

ATTACHMENT O – SAR TEST PLOTS (2 of 4)

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 1013

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.02 mW/g


Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.2 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.966 mW/g; SAR(10 g) = 0.663 mW/g

Maximum value of SAR (measured) = 1.04 mW/g

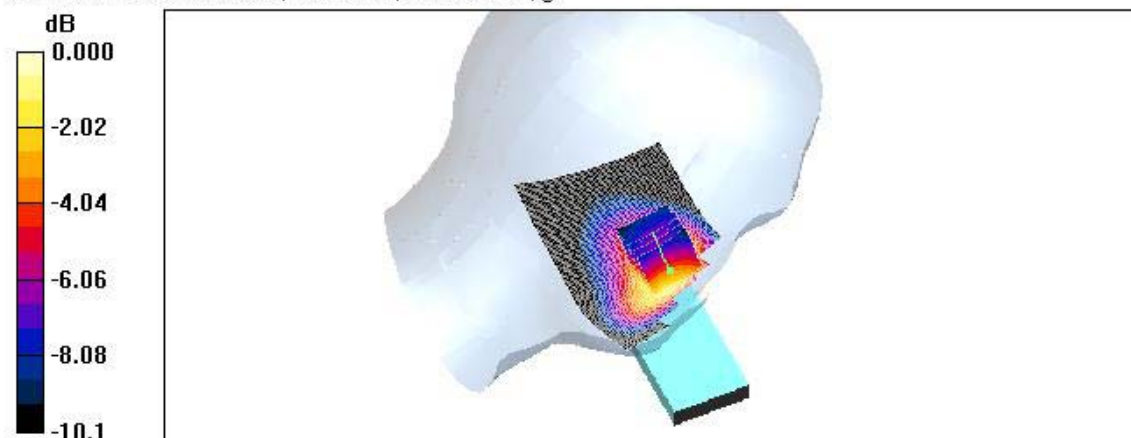

0 dB = 1.04mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 1013

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825$ MHz; $\sigma = 0.875$ mho/m; $\epsilon_r = 42.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.03 mW/g


Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.8 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.992 mW/g; SAR(10 g) = 0.682 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

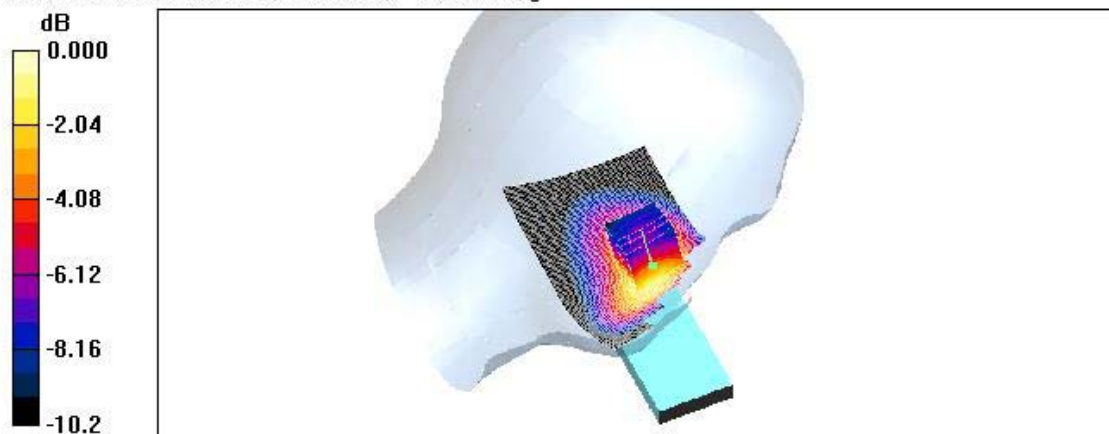

0 dB = 1.07mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.19 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 30.8 V/m; Power Drift = -0.029 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.736 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.17 mW/g

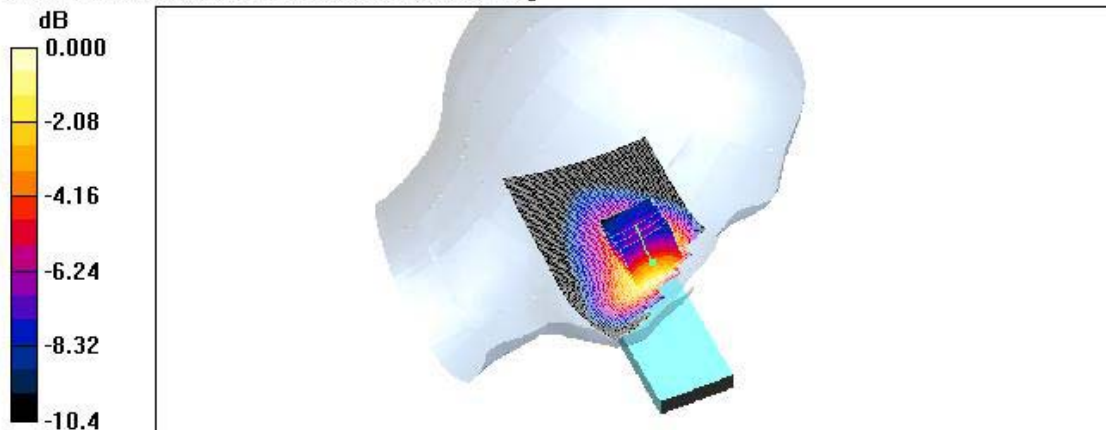

0 dB = 1.17mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607, ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (61x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.899 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 25.6 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.588 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.917 mW/g

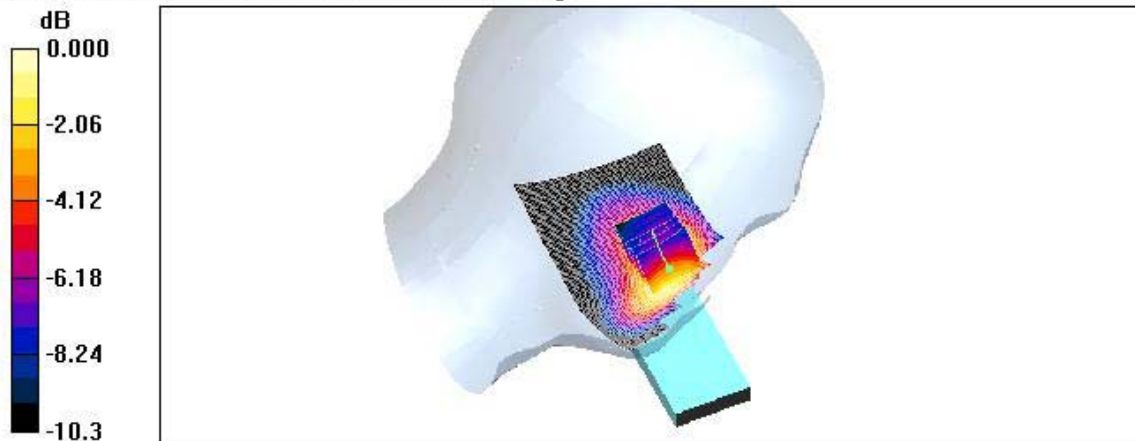

0 dB = 0.917mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 777

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.17 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 28.2 V/m; Power Drift = -0.028 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.698 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.11 mW/g

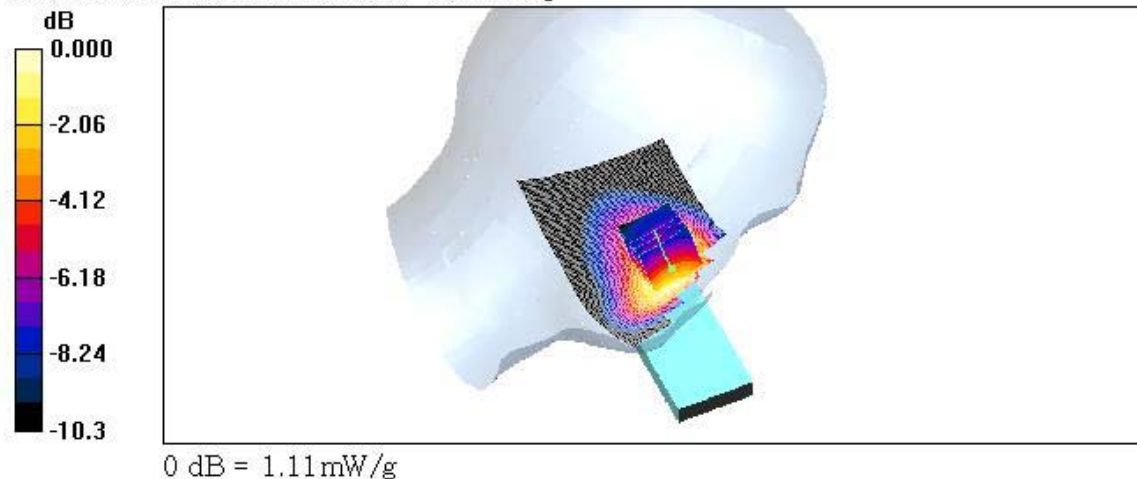

Test Laboratory: HCT

MODEL: CDM7075A

Company: UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 777

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.04 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.5 V/m; Power Drift = -0.084 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.993 mW/g; SAR(10 g) = 0.678 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.06 mW/g

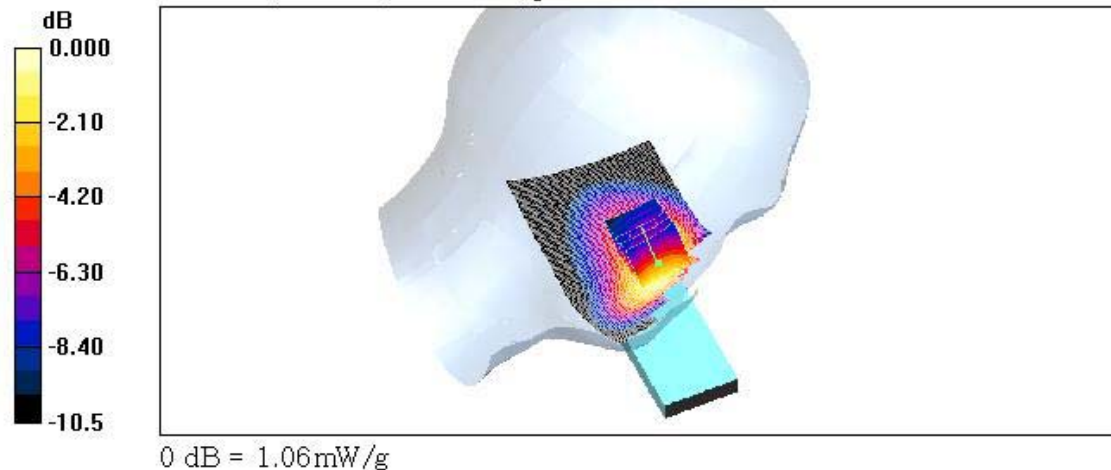

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 1013

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (61x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.19 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 29.0 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.736 mW/g

Maximum value of SAR (measured) = 1.12 mW/g

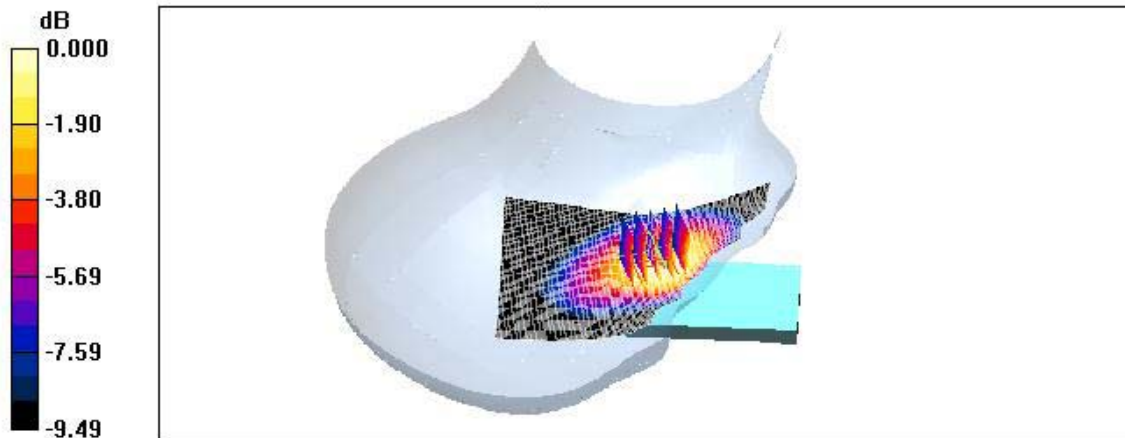

0 dB = 1.12mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 1013

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.875 \text{ mho/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (61x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Maximum value of SAR (interpolated) = 1.13 mW/g


Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 29.1 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.731 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

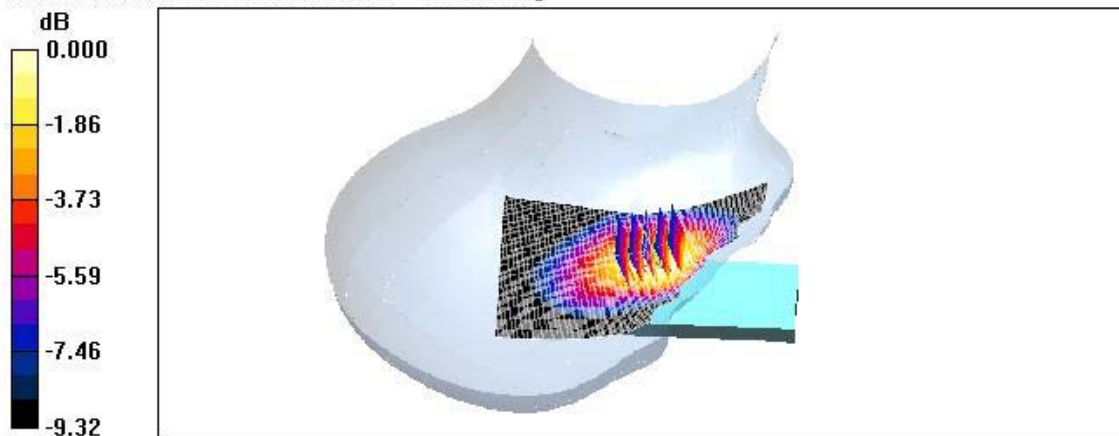

0 dB = 1.13mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 28.8 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.742 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

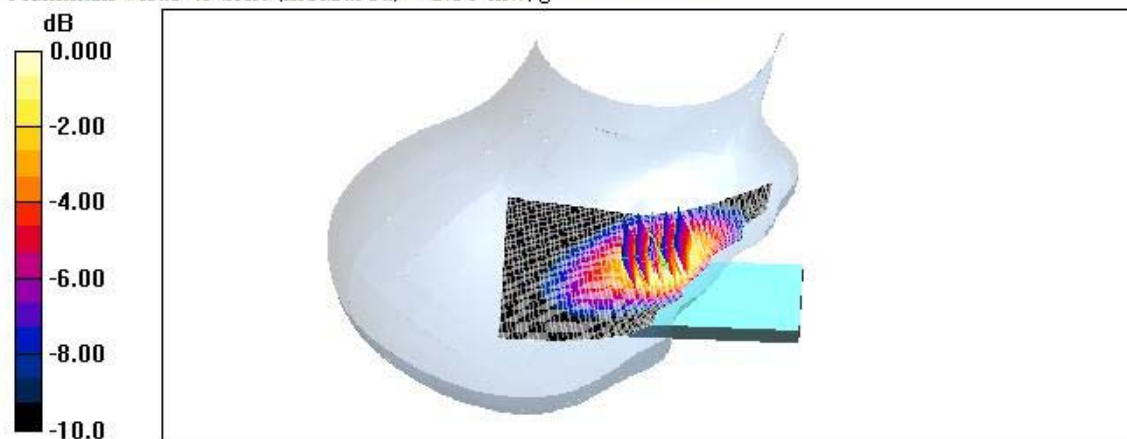

0 dB = 1.20mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.07 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 27.1 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.920 mW/g; SAR(10 g) = 0.634 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.986 mW/g

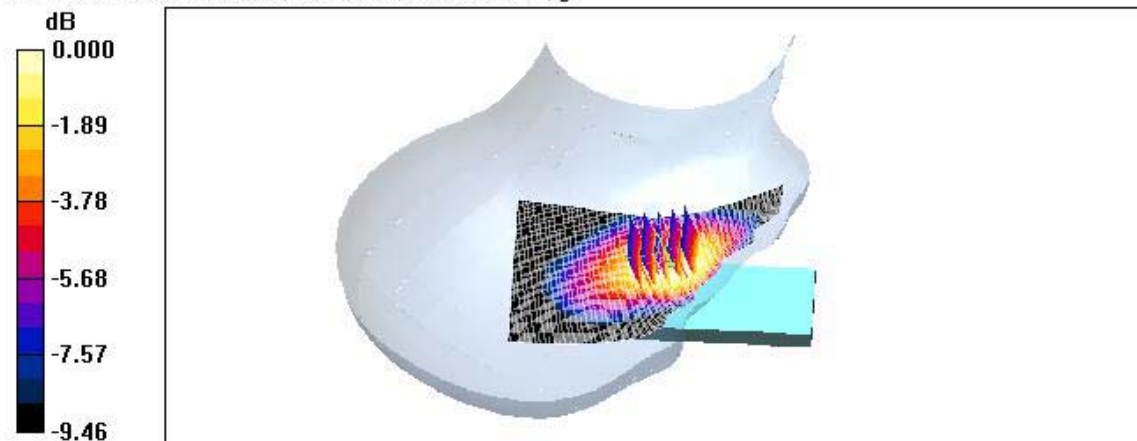

0 dB = 0.986mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 777

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607, ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.28 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 29.8 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.813 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.26 mW/g

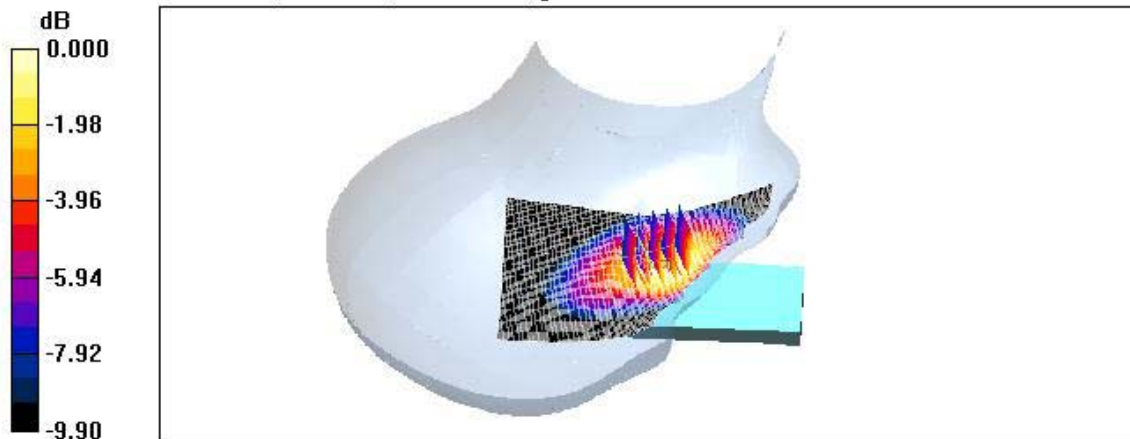

0 dB = 1.26mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 777

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.896$ mho/m; $\epsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (61x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.24 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 29.4 V/m; Power Drift = 0.171 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.769 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

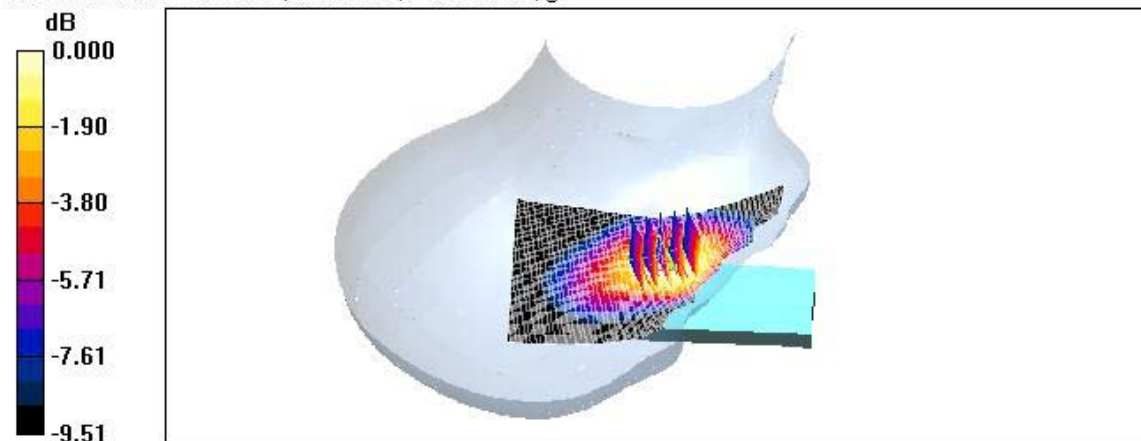

0 dB = 1.20mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.887 \text{ mho/m}$; $\epsilon_r = 42$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 384/Area Scan (61x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.337 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.5 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.243 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.338 mW/g

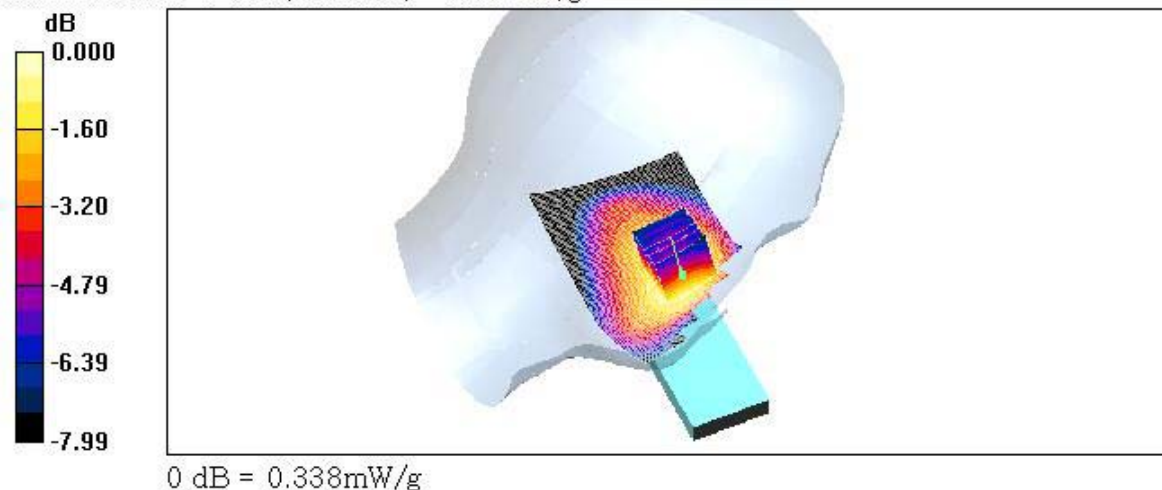

Test Laboratory: HCT

MODEL: CDM7075A

Company: UTStarcom Inc.

Mode: CDMA 835 / Antenna: out / Channel: 384

Liquid Temperature: 21.5 °C

Date Tested: March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 384/Area Scan (61x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.231 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 15.8 V/m; Power Drift = 0.177 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.167 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.236 mW/g

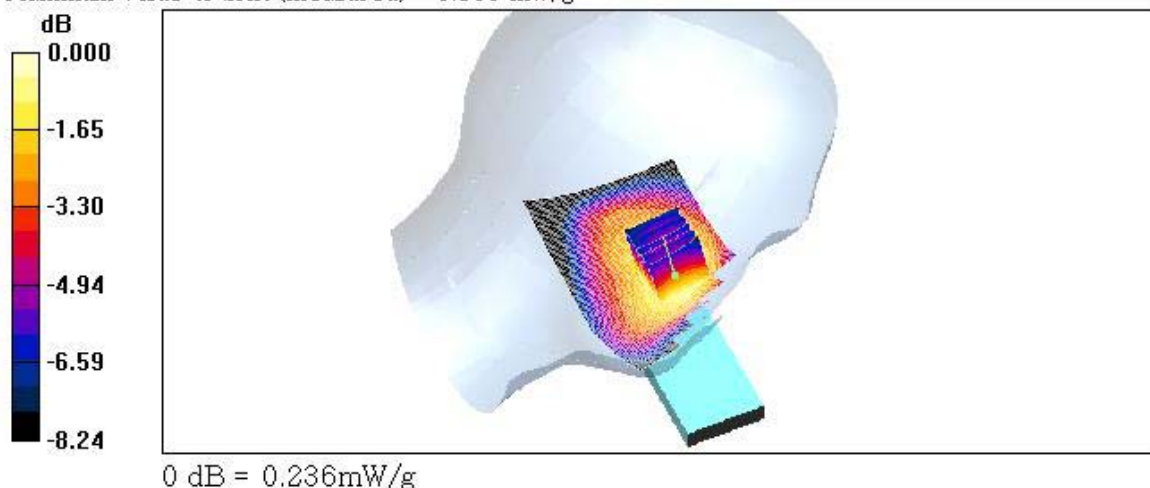

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : in / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (61x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.362 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 19.0 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.260 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.355 mW/g

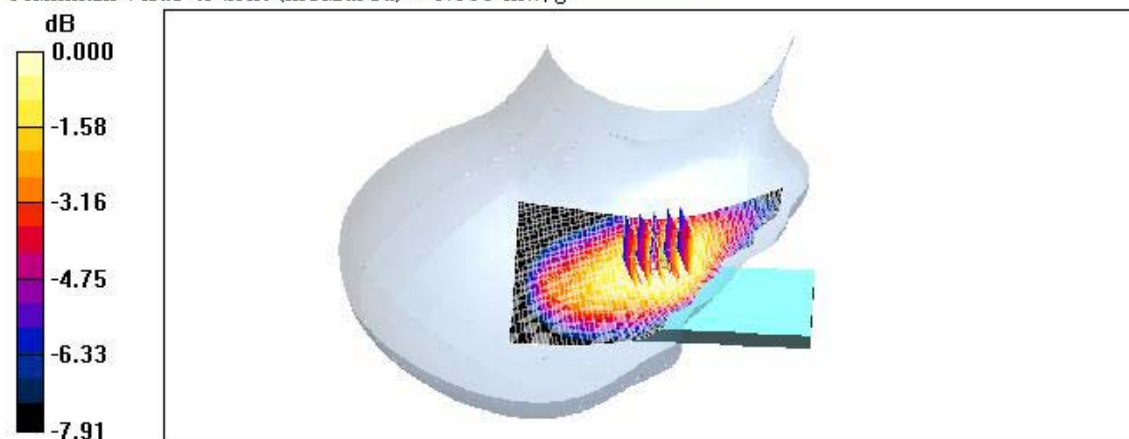

0 dB = 0.355mW/g

Test Laboratory: HCT

MODEL: CDM7075A

Company : UTStarcom Inc.

Mode : CDMA 835 / Antenna : out / Channel : 384

Liquid Temperature : 21.5 °C

Date Tested : March 07, 2006

DUT: CDM7075A; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.887$ mho/m; $\epsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (61x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.227 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 14.4 V/m; Power Drift = 0.079 dB

Peak SAR (extrapolated) = 0.263 W/kg

SAR(1 g) = 0.215 mW/g; SAR(10 g) = 0.166 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.227 mW/g

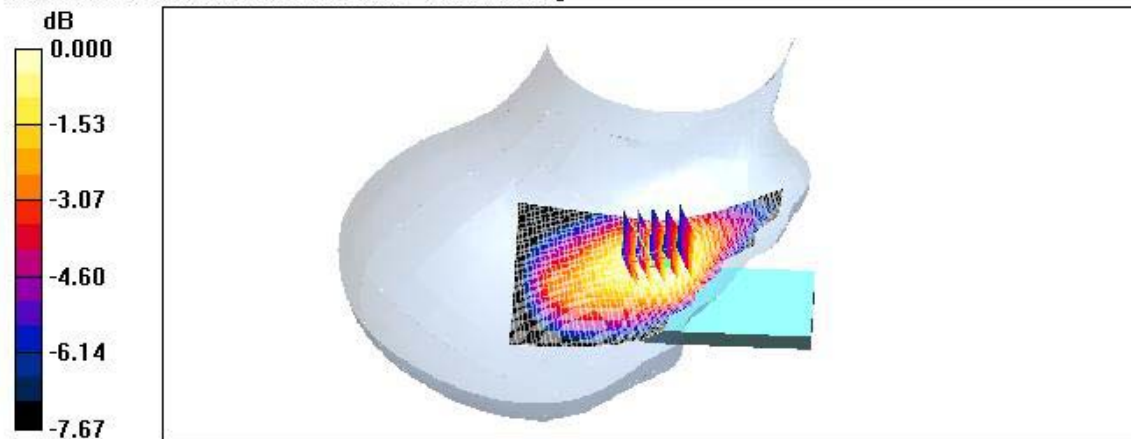

0 dB = 0.227mW/g