



HCT CO., LTD.

SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL: +82 31 639 8565 FAX: +82 31 639 8525 www.hct.co.kr

CERTIFICATE OF COMPLIANCE

RF TEST REPORT

UTStarcom, Inc.

555 Wireless Boulevard hauppauge, NY 11788

Date of Issue: February 5, 2008
Test Report No.: HCT-SAR08-0201
Test Site: HCT CO., LTD.

FCC :
APPLICANT :

O6Y-UM100
UTStarcom, Inc.

EUT Type: Tri-Band CDMA/EVDO USB Modem
Tx Frequency: 824.70 — 848.31 MHz (CDMA) / 1 851.25 — 1 908.75 MHz (PCS CDMA)
1 711.25 — 1753.75 MHz (AWS CDMA)
Rx Frequency: 869.70 — 893.31 MHz (CDMA) / 1 931.25 — 1 988.75 MHz (PCS CDMA)
2 111.25 — 2153.75 MHz (AWS CDMA)
Max. RF Output Power: 0.249 W ERP CDMA (23.97 dBm) / 0.265 W EIRP PCS CDMA (24.24 dBm)
0.263 W EIRP AWS CDMA (24.20 dBm)
Trade Name/Model(s): UTStarcom / UM100C
FCC Classification: PCS Licensed Transmitter (PCB)
Application Type: Certification
FCC Rule Part(s): §2, §22, §24, §27
Maximum SAR: 0.579 W/kg CDMA BODY SAR
1.04 W/kg PCS CDMA BODY SAR
1.24 W/kg AWS CDMA BODY SAR
Antenna Specifications: Manufacturer: Laird Technologies.
Part No.: 712195.0001 Gain: - 3.8 dBi (Length = 31.60 mm)
Emission Designator(s): 1M29F9W (CDMA) / 1M29F9W (PCS CDMA) / 1M29F9W (AWS CDMA)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in § 2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT Co., Ltd. Certifies that no party to this application has been denied FCC benefits pursuant to section 5301 of the Anti- Drug Abuse Act of 1998, 21 U.S. C. 853(a)

Report prepared by

: Young-Kwan Kim

Test Engineer of RF Part

Approved by

: Sang- Jun Lee

Manager of RF Part

Table of Contents

1. SCOPE -----	3
2. INTRODUCTION -----	4
3. INSERTS -----	5
4. DESCRIPTION OF TESTS -----	6
4.1 Conducted RF Power Test-----	7
4.2 Effective Radiated Power-----	8
4.3 Occupied Bandwidth-----	9
4.4 Spurious and Harmonic Emissions at Antenna Terminal-----	10
4.5 Field Strength of Spurious Radiation-----	11
4.6 Frequency Stability-----	12
5. RADIATED POWER TEST DATA-----	14
5.1 Effective Radiated Power Output (CDMA) -----	14
5.2 Equivalent Isotropic Radiated Power (E.I.R.P.) (PCS CDMA) -----	15
5.3 Equivalent Isotropic Radiated Power (E.I.R.P.) (AWS CDMA) -----	16
6. RADIATED SPURIOUS EMISSION MEASUREMENT TEST DATA-----	17
6.1 CDMA Radiated Measurements-----	17
6.2 PCS CDMA Radiated Measurements-----	20
6.3 AWS CDMA Radiated Measurements-----	23
7. FREQUENCY STABILITY TEST DATA-----	26
7.1 FREQUENCY STABILITY (CDMA) -----	26
7.2 FREQUENCY STABILITY (PCS CDMA) -----	27
7.3 FREQUENCY STABILITY (AWS CDMA) -----	28
8. LIST OF TEST EQUIPMENT-----	29
9. SAMPLE CALCULATIONS-----	30
10. CONCLUSION-----	31
11. TEST PLOTS -----	32

MEASUREMENT REPORT

1. SCOPE

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

General Information

Company Name:	UTStarcom, Inc.
Address:	555 Wireless Boulevard hauppauge, NY 11788
Tel. / Fax :	+ 82-2-368-8939/ + 82-2-2057-0182
E-Mail:	john.seo@utstar.com

- FCC: O6Y-UM100
- EUT Type: Tri-Band CDMA/EVDO USB Modem
- Trade Name: UTStarcom
- Model(s): UM100C
- Serial Number(s): #1
- Tx Frequency: 824.70 — 848.31 MHz (CDMA) / 1 851.25 — 1 908.75 MHz (PCS CDMA)
1 711.25 — 1753.75 MHz (AWS CDMA)
- Rx Frequency: 869.70 — 893.31 MHz (CDMA) / 1 931.25 — 1 988.75 MHz (PCS CDMA)
2 111.25 — 2 153.75 MHz (AWS CDMA)
- Application Type: Certification
- FCC Classification: PCS Licensed Transmitter (PCB)
- FCC Rule Part(s): §2, §22, §24, §27
- Modulation(s): CDMA / PCS CDMA / AWS CDMA
- Antenna Type: Intenna
- Date(s) of Tests: January 28, 2008 – January 30, 2008
- Place of Tests: HCT CO., LTD.
Icheon, Kyoungki-Do, KOREA
- Report Serial No.: HCT-SAR08-0201

2. INTRODUCTION

EUT DESCRIPTION

The UTStarcom, Inc. UM100C Tri-mode Dual-band Phone (CDMA / PCS CDMA / AWS CDMA) phone. Its basic purpose is used for communications. It transmits from CDMA (824.70 ~ 848.31), PCS CDMA (1 851.25 ~ 1 908.75), AWS CDMA (1 711.25 ~ 1 753.75) MHz and receives from CDMA (869.70 ~ 893.31), PCS CDMA (1 931.25 ~ 1 988.75), AWS CDMA (2 111.25 ~ 2 153.75) MHz. The RF power is rated at CDMA (0.249 W), PCS CDMA (0.265 W), AWS CDMA (0.263 W).

MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003(Registration Number: 90661)

3. INSERTS

Function of Active Devices (Confidential)

The Function of active devices are shown in Attachment K.

Block/Circuit Diagrams & Description (Confidential)

The circuit diagrams & description are shown in Attachment J, and the block diagrams are shown in Attachment I.

Operating Instructions

The instruction manual is shown in Attachment M.

Parts List & Tune-Up Procedure (Confidential)

The parts list & tune-up procedure are shown in Attachment L.

Description of Freq. Stabilization Circuit (Confidential)

The description of frequency stabilization circuit is shown in Attachment K.

Description for Suppression of Spurious Radiation, for Limiting Modulation, and Harmonic Supresion Circuits (Confidential)

The description of suppression stabilization circuits are shown in Attachment K

4. DESCRIPTION OF TESTS

Out power Variation

Test condition to measure the Output power

This device was tested under all R.C.s and worst case is reported with RC3/SO55, with "All Up" power control bits.

The following procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", May 2006

1. If the mobile station supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC = 1/1) with 9 600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1 (Table 1) parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9 600 bps Fundamental Channel and 9 600 bps SCH0 data rate Channel and 9 600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2(Table 2) was applied.
5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

Parameters for Max. Power for RC1

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-104
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

Table. 1

Parameters for Max. Power for RC3

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-86
$\frac{\text{Pilot } E_c}{I_{or}}$	dB	-7
$\frac{\text{Traffic } E_c}{I_{or}}$	dB	-7.4

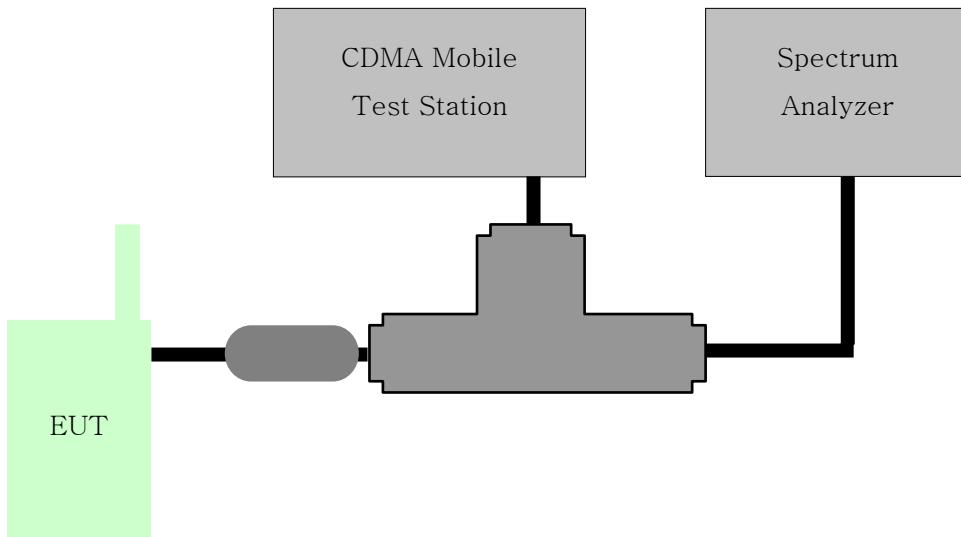
Table. 2

Maximum Power Output table for FCC ID: O6Y-UM100

Band	Channel	SO2	SO2	SO55	SO55	TDSO	1xEvDO	1xEvDO	1xEvDO	1xEvDO
		RC1/1	RC3/3	RC1/1	RC3/3	SO32	Rev.0	Rev.0	Rev. A	Rev. A
CDMA	1013	23.74	23.81	23.72	23.80	23.76	23.80	23.91	23.82	23.90
	384	23.93	23.96	23.96	23.97	23.94	24.02	24.08	24.00	24.05
	777	23.92	23.90	23.96	23.97	23.94	23.94	24.01	23.91	23.94
PCS CDMA	25	23.87	23.87	23.86	23.86	23.90	23.86	23.84	23.87	23.85
	600	23.98	24.04	23.96	24.06	24.14	24.17	24.02	24.09	24.07
	1175	23.92	23.97	23.94	23.98	24.04	24.15	24.03	24.12	24.07
AWS CDMA	25	23.87	23.91	23.90	23.93	23.91	23.97	23.91	23.98	24.02
	425	24.07	24.01	24.07	24.09	24.06	23.94	23.95	23.96	23.98
	875	24.04	24.00	24.01	24.05	24.05	24.11	24.09	24.13	24.08

4.1 Conducted RF Power Test

Test Set-up



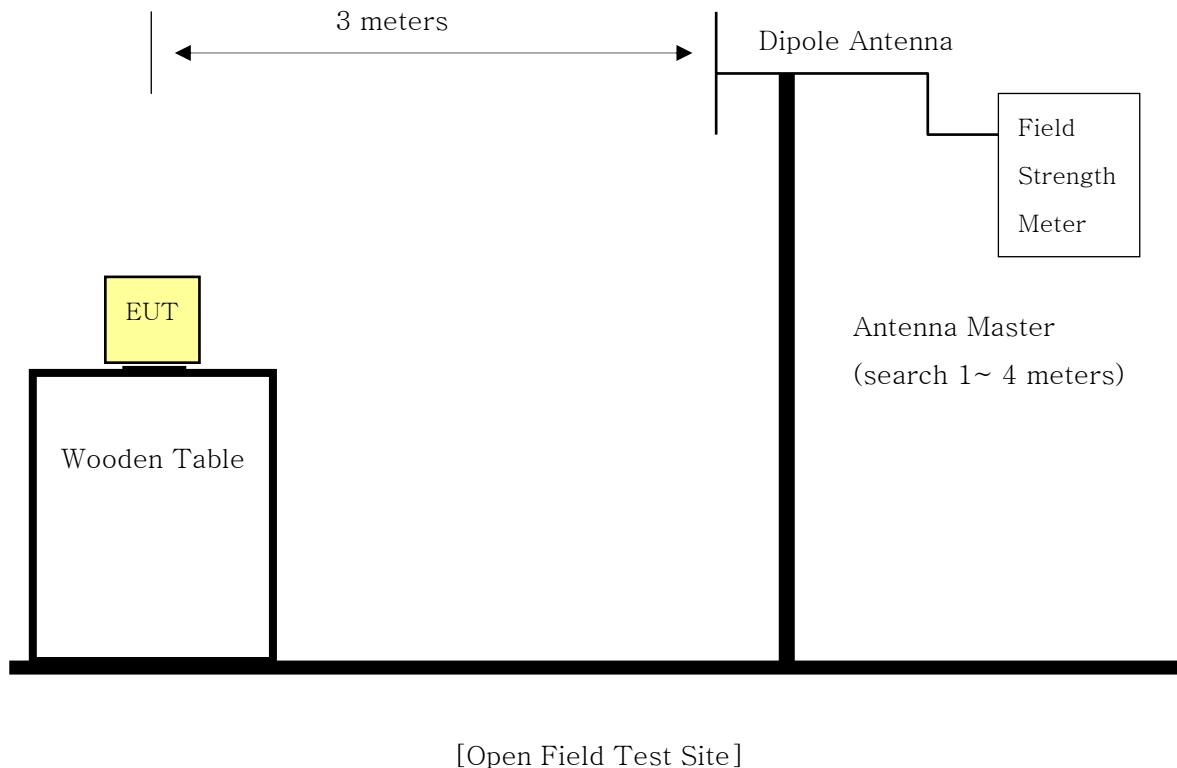
Test Procedure

According to FCC §2.1046 (A), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

- 1) The EUT was coupled to the spectrum analyzer and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables the test system is calibrated to correct the reading.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth. For GSM signal, VBW = RBM = 1 MHz; for CDMA signal, VBW = RBW = 3 MHz.

4.2 Effective Radiated Power.

Test Set-up



Test Procedure

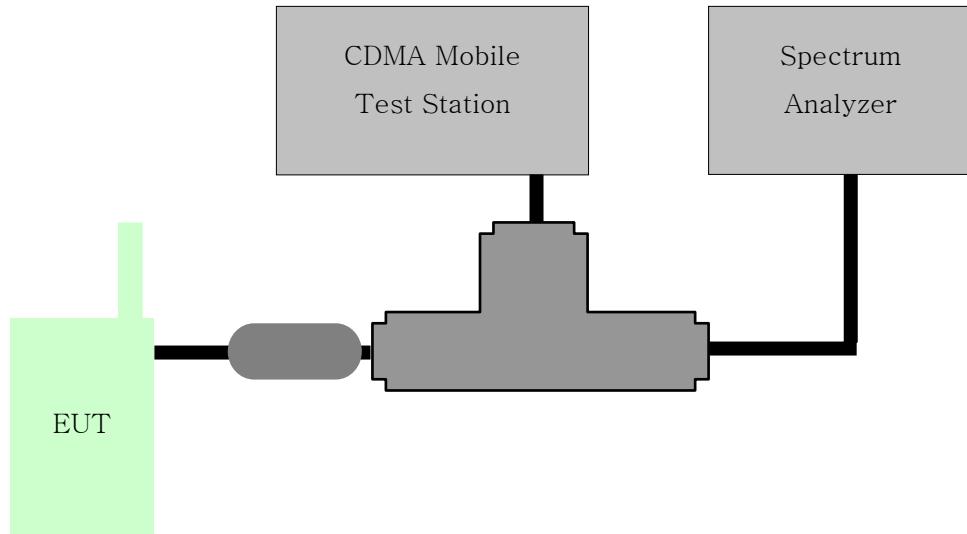
The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section 2.948.

The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a turn-able wooden platform mounted at three from the antenna mast.

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test, the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with $\lambda/2$ dipole antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (4).
- 6) The signal generator output level is the rating of effective radiated power (ERP).
- 7) The instrument settings used (RBW/ VBW) during ERP/ EIRP output power measurement are as Blows;
 - Below 1 GHz : RBW 3 MHz, VBW 3 MHz
 - Above 1 GHz : RBW 3 MHz, VBW 3 MHz

4.3 Occupied bandwidth.

Test Set-up

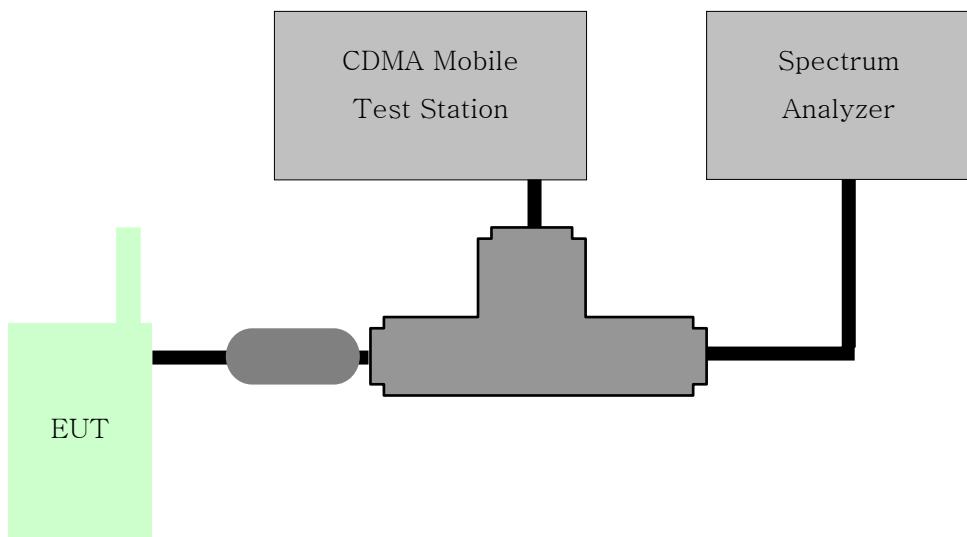


Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

4.4 Spurious and Harmonic Emissions at Antenna Terminal.

Test Set-up

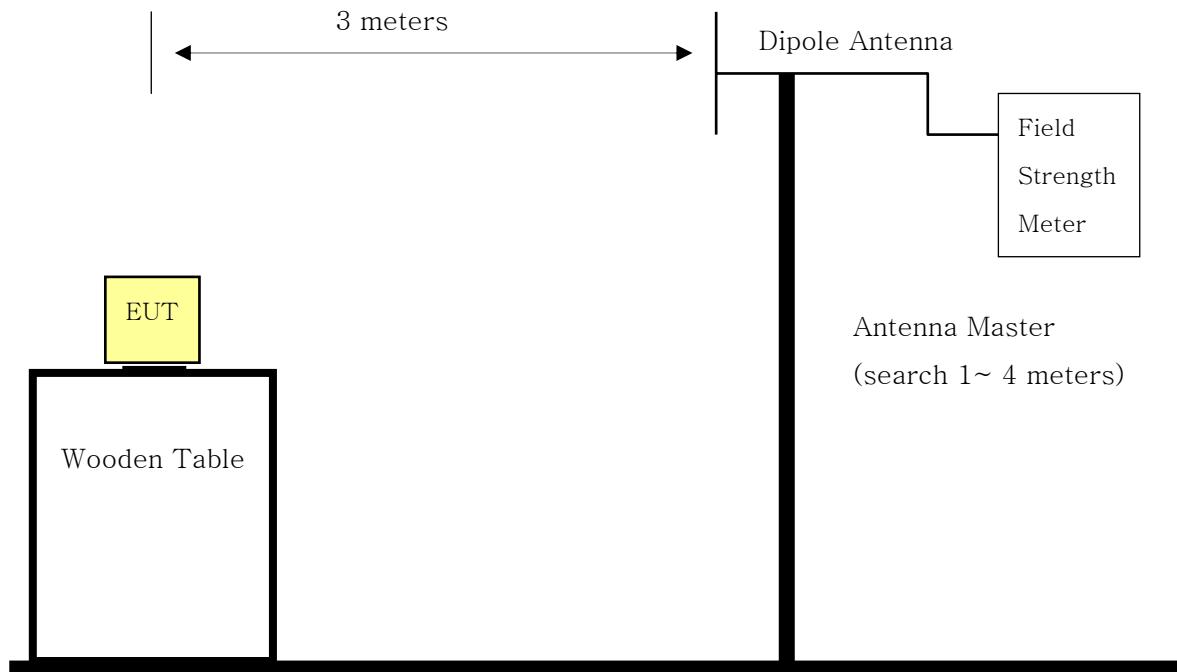


Test Procedure

The EUT was setup to maximum output power at its lowest channel. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with the – 13 dBm limit, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (PCS Mode: 10 MHz to 20 GHz). A display line was placed at – 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

4.5 Field strength of spurious radiation .

Test Set-up



[Open Field Test Site]

Test Procedure

The measurement facilities used for this test have been documented in previous filings with the commission pursuant to section 2.948.

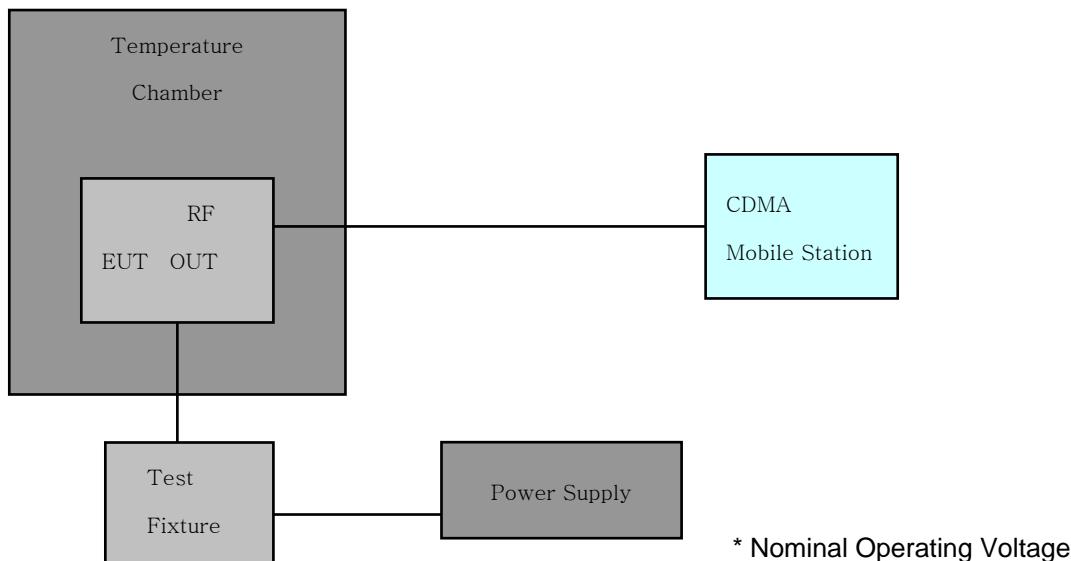
The open field test site is situated in open field with ground screen whose site attenuation characteristics meet ANSI C63.4 –2003. A mast capable of lifting the receiving antenna from a height of one to four meters is used together with a turn-able wooden platform mounted at three from the antenna mast.

- 1) The unit mounted on a wooden table 1.5 m × 1.0 m × 0.80 m is 0.8 meter above test site ground level.
- 2) During the emission test, the turn table is rotated and the EUT is manipulated to find the configuration resulting in maximum emission under normal condition of installation and operation.
- 3) The antenna height and polarization are also varied from 1 to 4 meters until the maximum signal is found.
- 4) The spectrum shall be scanned up to the 10th harmonic of the fundamental frequency.
- 5) The instrument settings used (RBW/ VBW) during ERP/EIRP output power measurement are as below ;
 - Below 1 GHz : RBW 3 MHz, VBW 3 MHz
 - Above 1 GHz : RBW 3 MHz, VBW 3 MHz

4.6 Frequency stability .

4.6.1 Frequency stability with variation of ambient temperature.

Test Set-up



Test Procedure

The frequency stability of the transmitter is measured by:

- Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

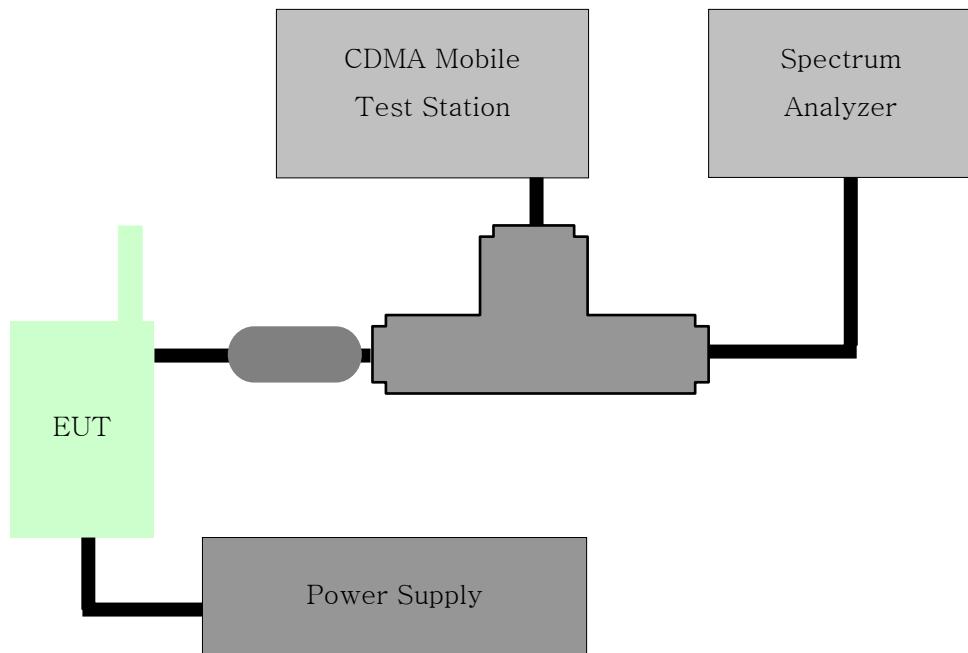
Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25 °C to 27 °C to provide a reference).
2. The equipment is subjected to an overnight "soak" at - 30 °C without any power applied.
3. After the overnight "soak" at 30 °C (usually 14-16 hours), the equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three minute interval after applying power to the transmitter.
4. Frequency measurements are made at 10 °C interval up to room temperature. At least a period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.
5. Again the transmitter carrier frequency and the individual oscillators is measured at room temperature to begin measurement of the upper temperature levels.
6. Frequency were made at 10 °C intervals starting at - 30 °C up to + 50 °C allowing at least two hours at each temperature for stabilization. In all measurements the frequency is measured within three minutes after applying power to the transmitter.
7. The artificial load is mounted external to the temperature chamber.

NOTE: The EUT is tested down to the battery endpoint.

4.6.2 Frequency stability with variation of primary supply voltage.

Test Set-up



Test Procedure

- 1) The primary supply is varied in steps of from battery end point to 115 % of the nominal supply voltage, or reduce primary supply voltage to the battery operating end point.
- 2) The frequency is recorded each 10 °C step.

5. Radiated Power Test Data

5.1 Effective Radiated Power Output (CDMA)

Radiated measurements at 3 meters

Modulation: CDMA

Mode	Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)
CDMA	824.70	-23.18	H	0.249	23.97
CDMA	835.89	-23.39	H	0.238	23.76
CDMA	848.31	-23.58	H	0.228	23.57
EVDO	824.70	-23.43	H	0.236	23.72

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

5.2 Equivalent Isotropic Radiated Power (E.I.R.P.) PCS CDMA

Radiated measurements at 3 meters

Modulation: PCS CDMA

Mode	Freq. Tuned (MHz)	RFF. LEVEL (dBm)	POL (H/V)	EIRP (W)	EIRP (dBm)
PCS	1 851.25	– 29.32	V	0.265	24.24
PCS	1 880.00	– 29.40	V	0.261	24.16
PCS	1 908.75	– 29.70	V	0.243	23.86
EVDO	1 851.25	– 29.53	V	0.253	24.03

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

5.3 Equivalent Isotropic Radiated Power (E.I.R.P.) AWS CDMA

Radiated measurements at 3 meters

Modulation: AWS CDMA

Mode	Freq. Tuned (MHz)	RFF. LEVEL (dBm)	POL (H/V)	EIRP (W)	EIRP (dBm)
AWS	1 711.25	– 29.71	V	0.243	23.85
AWS	1 731.25	– 29.52	V	0.254	24.04
AWS	1 753.75	– 29.36	V	0.263	24.20
EVDO	1 753.75	– 29.48	V	0.256	24.08

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

6. Radiated Spurious Emission Measurement Test Data

6.1 CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013 (Low)
 MEASURED OUTPUT POWER: 23.97 dBm = 0.249 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $-(43 + 10 \log_{10} (W)) =$ - 36.96 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1 649.40	- 59.38	7.3	- 52.08	H	- 70.75
2 474.10	- 64.52	8.3	- 56.22	H	- 74.39
3 298.80	- 65.24	9.7	- 55.54	H	- 72.81

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 384 (Mid)
 MEASURED OUTPUT POWER: 23.97 dBm = 0.249 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 36.96 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1 671.78	- 55.71	7.3	- 48.41	H	- 67.08
2 507.67	- 64.34	8.3	- 56.04	H	- 74.21
3 343.56	- 63.62	9.7	- 53.92	H	- 71.19

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 777 (High)
 MEASURED OUTPUT POWER: 23.97 dBm = 0.249 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 36.96 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1 696.62	- 55.62	7.3	- 48.32	H	- 66.99
2 544.93	- 64.62	8.3	- 56.32	H	- 74.49
3 393.24	- 64.69	9.7	- 54.99	H	- 72.26

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

6.2 PCS CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 851.25 MHz

CHANNEL: 25 (Low)

MEASURED OUTPUT POWER: 24.24 dBm = 0.265 W

MODULATION SIGNAL: PCS CDMA (Internal)

DISTANCE: 3 meters

LIMIT: $-(43 + 10 \log_{10} (W)) =$ - 37.23 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 702.50	- 63.05	12.4	- 50.65	V	- 65.49
5 553.75	- 68.34	11.7	- 56.64	V	- 72.68
7 405.00	- 63.22	11.5	- 51.72	V	- 68.46

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 880.00 MHz
 CHANNEL: 600 (Middle)
 MEASURED OUTPUT POWER: 24.24 dBm = 0.265 W
 MODULATION SIGNAL: PCS CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 37.23 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 760.00	- 49.99	12.4	- 37.59	V	- 52.43
5 640.00	- 67.14	11.7	- 55.44	V	- 71.48
7 520.00	- 62.29	11.5	- 50.79	V	- 67.53

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 908.75 MHz
 CHANNEL: 1175 (High)
 MEASURED OUTPUT POWER: 24.24 dBm = 0.265 W
 MODULATION SIGNAL: PCS CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 37.23 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 817.50	- 49.52	12.4	- 37.12	V	- 51.96
5 726.25	- 69.02	11.7	- 57.32	V	- 73.36
7 635.00	- 61.92	11.5	- 50.42	V	- 67.16

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

6.3 AWS CDMA Radiated Measurements

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 711.25 MHz

CHANNEL: 25 (Low)

MEASURED OUTPUT POWER: 24.20 dBm = 0.263 W

MODULATION SIGNAL: AWS CDMA (Internal)

DISTANCE: 3 meters

LIMIT: $-(43 + 10 \log_{10} (W)) =$ - 37.20 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 422.50	- 66.09	12.4	- 53.69	V	- 68.49
5 133.75	- 67.82	11.7	- 56.12	V	- 72.12
6 845.00	- 61.44	11.5	- 49.94	V	- 66.64

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 731.25 MHz
 CHANNEL: 425 (Middle)
 MEASURED OUTPUT POWER: 24.20 dBm = 0.263 W
 MODULATION SIGNAL: AWS CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 37.20 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 462.50	- 59.24	12.4	- 46.84	V	- 61.64
5 193.75	- 68.12	11.7	- 56.42	V	- 72.42
6 925.00	- 59.21	11.5	- 47.71	V	- 64.41

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1 753.75 MHz
 CHANNEL: 875 (High)
 MEASURED OUTPUT POWER: 24.20 dBm = 0.263 W
 MODULATION SIGNAL: AWS CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: - (43 + 10 \log_{10} (W)) = - 37.20 dBc

Freq. (MHz)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3 507.50	- 57.23	12.4	- 44.83	V	- 59.63
5 261.25	- 66.19	11.7	- 54.49	V	- 70.49
7 015.00	- 59.01	11.5	- 47.51	V	- 64.21

NOTES:

Radiated Spurious Emission Measurements by Substitution Method

According to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

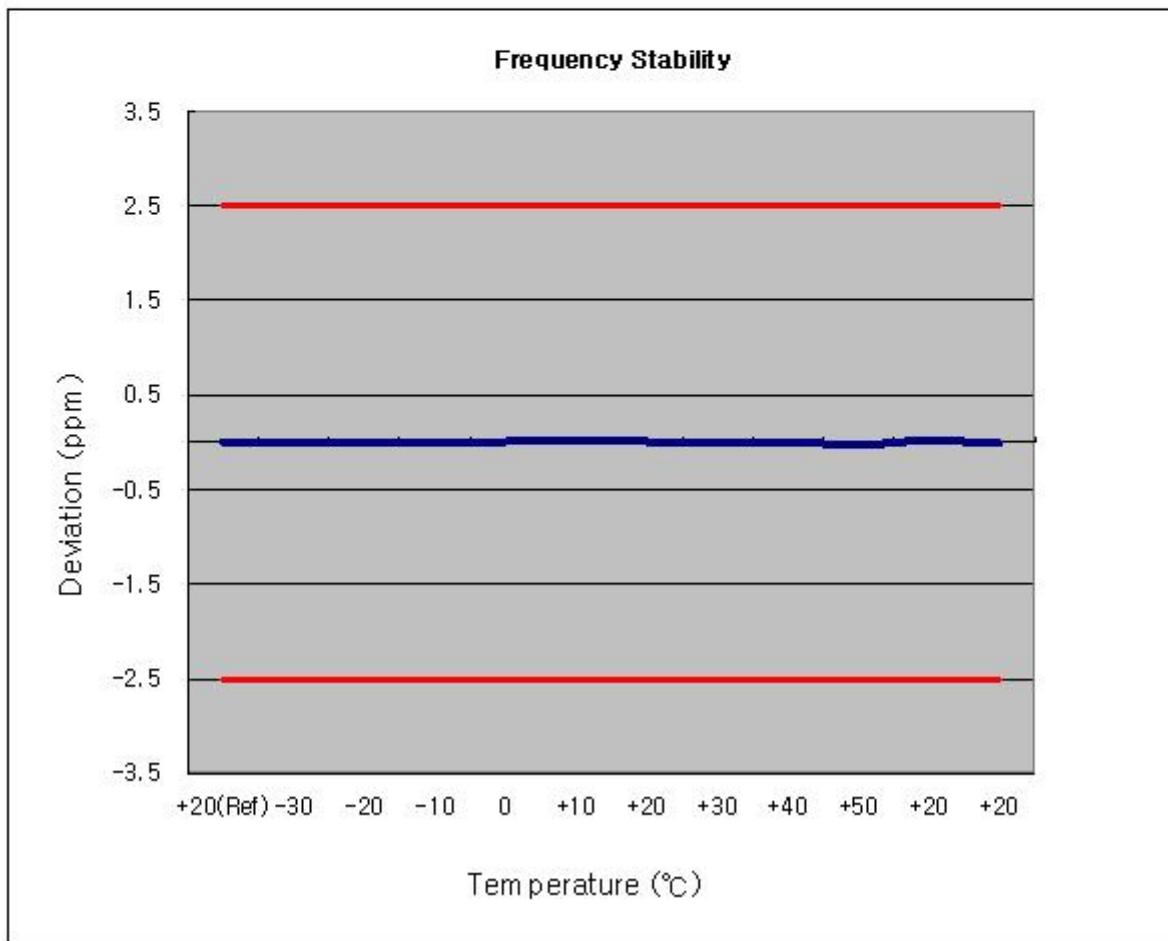
For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

7. Frequency Stability Test Data

7.1 FREQUENCY STABILITY (CDMA)

OPERATING FREQUENCY: 836 520 000 Hz
CHANNEL: 384
REFERENCE VOLTAGE: 3.7 VDC
DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

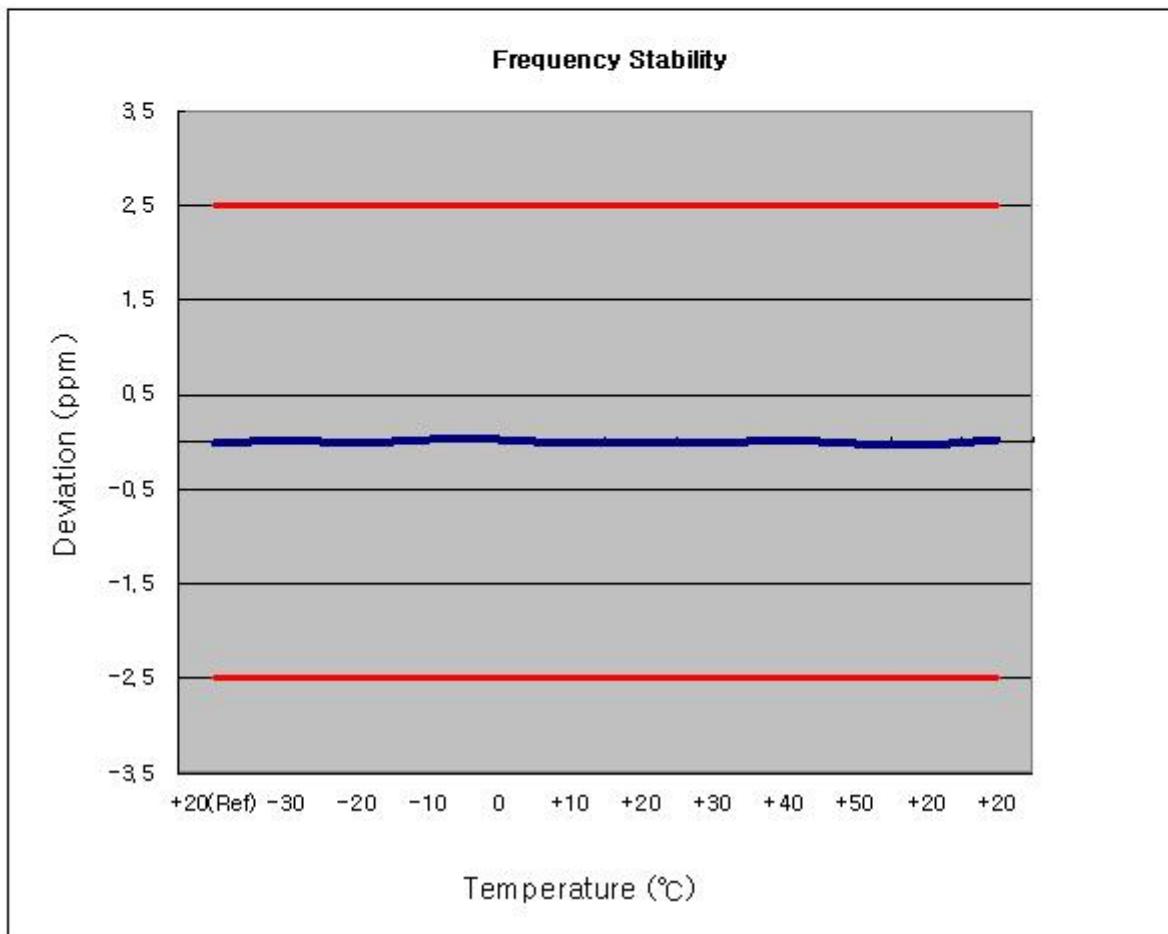
Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	5.00	+20(Ref)	836,520,021	21	0.000003	0.011
100%		-30	836,519,958	-42	-0.000005	-0.022
100%		-20	836,520,037	37	0.000004	0.020
100%		-10	836,519,968	-32	-0.000004	-0.017
100%		0	836,520,029	29	0.000003	0.015
100%		+10	836,520,028	28	0.000003	0.015
100%		+20	836,520,021	21	0.000003	0.011
100%		+30	836,519,969	-31	-0.000004	-0.016
100%		+40	836,520,029	29	0.000003	0.015
100%		+50	836,519,955	-45	-0.000005	-0.024
115%	5.75	+20	836,520,049	49	0.000006	0.026
Batt. Endpoint	4.25	+20	836,519,959	-41	-0.000005	-0.022



7.2 FREQUENCY STABILITY (PCS CDMA)

OPERATING FREQUENCY: 1 880 000 000 Hz
CHANNEL: 600
REFERENCE VOLTAGE: 3.7 VDC
DEVIATION LIMIT: $\pm 0.000 25\%$ or 2.5 ppm

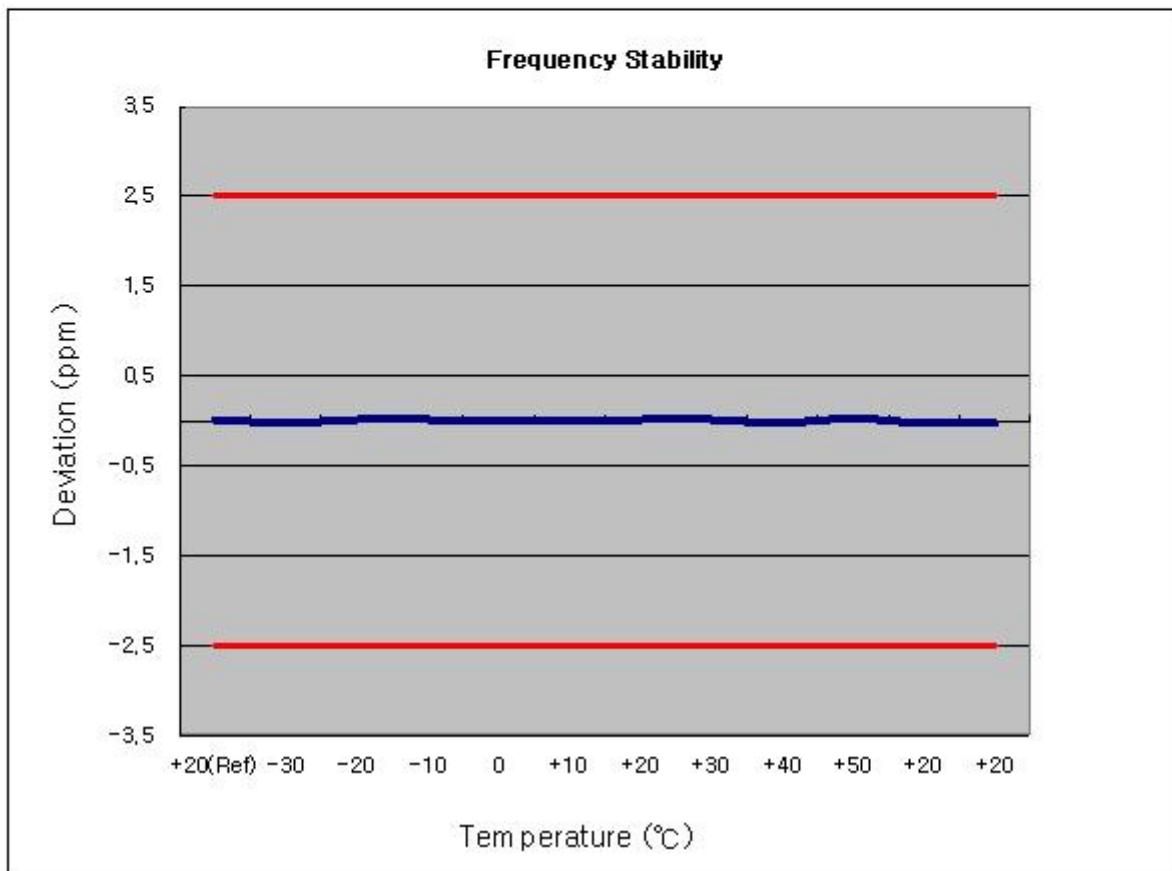
Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	5.00	+20(Ref)	1,799,999,968	-32	-0.000004	-0.017
100%		-30	1,800,000,041	41	0.000005	0.022
100%		-20	1,799,999,966	-34	-0.000004	-0.018
100%		-10	1,800,000,036	36	0.000004	0.019
100%		0	1,800,000,037	37	0.000004	0.020
100%		+10	1,799,999,971	-29	-0.000003	-0.015
100%		+20	1,799,999,968	-32	-0.000004	-0.017
100%		+30	1,799,999,966	-34	-0.000004	-0.018
100%		+40	1,800,000,041	41	0.000005	0.022
100%		+50	1,799,999,957	-43	-0.000005	-0.023
115%	5.75	+20	1,799,999,952	-48	-0.000006	-0.026
Batt. Endpoint	4.25	+20	1,800,000,046	46	0.000006	0.024



7.3 FREQUENCY STABILITY (AWS CDMA)

OPERATING FREQUENCY: 1 731 250 000 Hz
 CHANNEL: 425
 REFERENCE VOLTAGE: 3.7 VDC
 DEVIATION LIMIT: $\pm 0.000 25\%$ or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	5.00	+20(Ref)	1,731,250,026	26	0,000003	0,014
100%		-30	1,731,249,959	-41	-0,000005	-0,022
100%		-20	1,731,250,031	31	0,000004	0,016
100%		-10	1,731,250,035	35	0,000004	0,019
100%		0	1,731,249,972	-28	-0,000003	-0,015
100%		+10	1,731,249,973	-27	-0,000003	-0,014
100%		+20	1,731,250,026	26	0,000003	0,014
100%		+30	1,731,250,028	28	0,000003	0,015
100%		+40	1,731,249,964	-36	-0,000004	-0,019
100%		+50	1,731,250,049	49	0,000006	0,026
115%	5.75	+20	1,731,249,962	-38	-0,000005	-0,020
Batt. Endpoint	4.25	+20	1,731,249,957	-43	-0,000005	-0,023



8. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
R&S	ESI40/ Spectrum Analyzer	831564/003	11/06/2007	Annual	11/06/2008
Advantest	R3273/ Spectrum Analyzer	J04821	03/15/2007	Annual	03/15/2008
HP	8664A/ Signal Generator	3744A02069	04/10/2007	Annual	04/10/2008
Agilent	E4419B/ Power Meter	MY41291386	11/05/2007	Annual	11/05/2008
Agilent	8481A/ Power Sensor	MY41090870	11/05/2007	Annual	11/05/2008
Agilent	HP8901B/ Modulation Analyzer	3438A05231	08/04/2007	Annual	08/04/2008
Agilent	8903A/ Audio Analyzer	2433A04322	08/04/2007	Annual	08/04/2008
R&S	CMU200/ Base Station	110740	07/26/2007	Annual	07/26/2008
Agilent	8960 (E5515C)/ Base Station	GB444400269	02/11/2007	Annual	02/11/2008
Tescom	TC-3000/ Bluetooth Simulator	3000A4900112	01/11/2008	Annual	01/11/2009
MITEQ	AMF-6D-01180-35-20P/ AMP	990893	04/25/2007	Annual	04/25/2008
Wainwright	WHK1.2/15G-10EF/H.P.F	2	06/28/2007	Annual	06/28/2008
Wainwright	WHK3.3/18G-10EF/H.P.F	1	06/28/2007	Annual	06/28/2008
Agilent	778D/ Dual Directional Coupler	16072	11/09/2007	Annual	11/09/2008
Agilent	1506A/ Power Divider	99441	11/10/2007	Annual	11/10/2008
Digital	EP-3010/ Power Supply	3110117	12/29/2007	Annual	12/29/2008
Schwarzbeck	UHAP/ Dipole Antenna	630	11/13/2007	Annual	11/13/2008
Schwarzbeck	UHAP/ Dipole Antenna	605	11/13/2007	Annual	11/13/2008
R&S	HFH2-Z2/ Loop Antenna	881056/070	12/11/2007	Annual	12/11/2008
Korea Engineering	KR-1005L / Chamber	KRAB07063-2CH	01/05/2008	Annual I	01/05/2009
Schwarzbeck	VULB9160/ TRILOG Antenna	3150	04/20/2007	Biennial	04/20/2009
Schwarzbeck	VULB9160/ TRILOG Antenna	3125	05/16/2007	Biennial	05/16/2009
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	03/31/2007	Biennial	03/31/2008
Schwarzbeck	BBHA 9120D/ Horn Antenna	1201	05/02/2007	Biennial	05/02/2008

9. SAMPLE CALCULATIONS

A. ERP Sample Calculation

FREQ. TUNED (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)
824.70	-23.18	H	0.249	23.97

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test, the turn table is rotated and the antenna height is also varied from 1 to 4 meters until the maximum signal is found.
- 3) Record the field strength meter's level. (**LEVEL**)
- 4) Replace the EUT with dipole antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with cable loss is the rating of effective radiated power (**ERP**).
(Cable loss means the factor between Signal Generator and Transmitting Antenna.)

For more details, please refer to the test set-up procedure.

B. Emission Designator

Emission Designator = 1M29F9W

CDMA BW = 1.29 MHz

F = Frequency Modulation

9 = Composite Digital Info

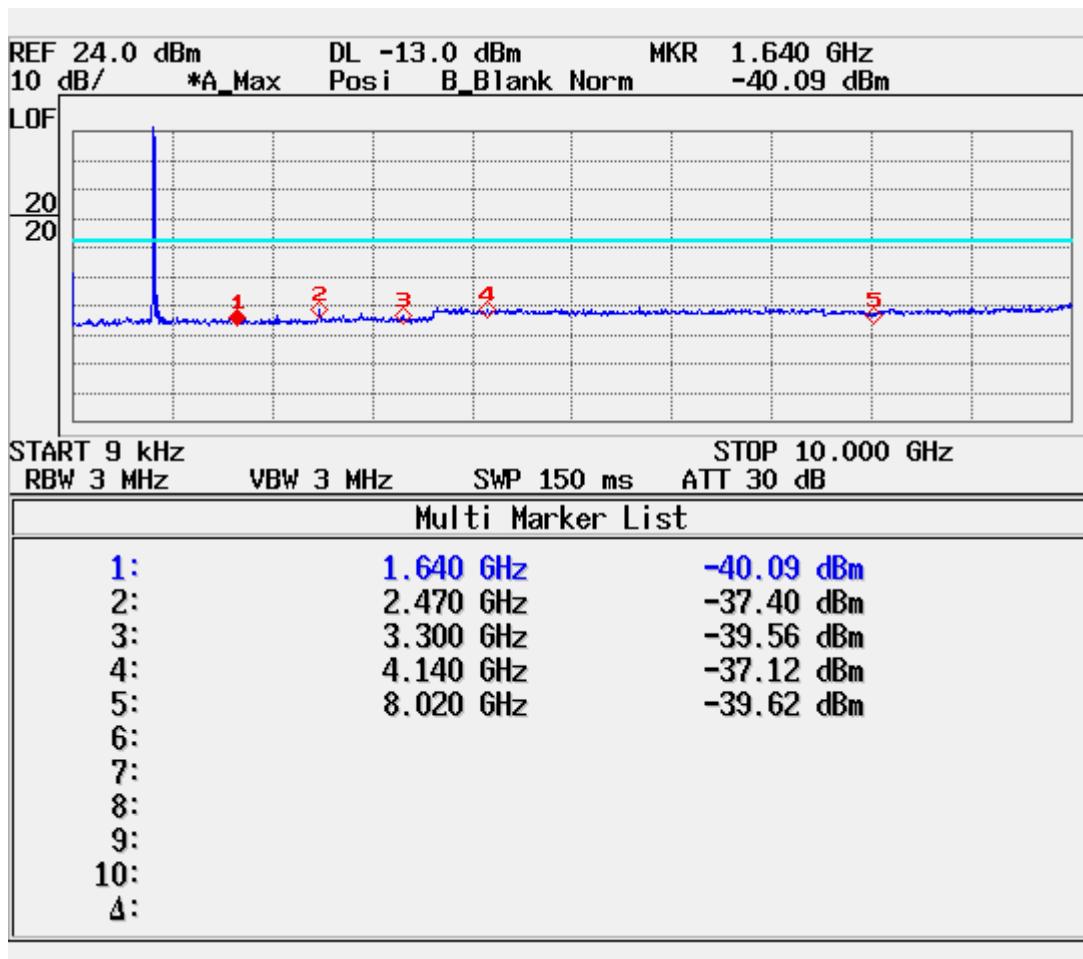
W = Combination (Audio/Data)

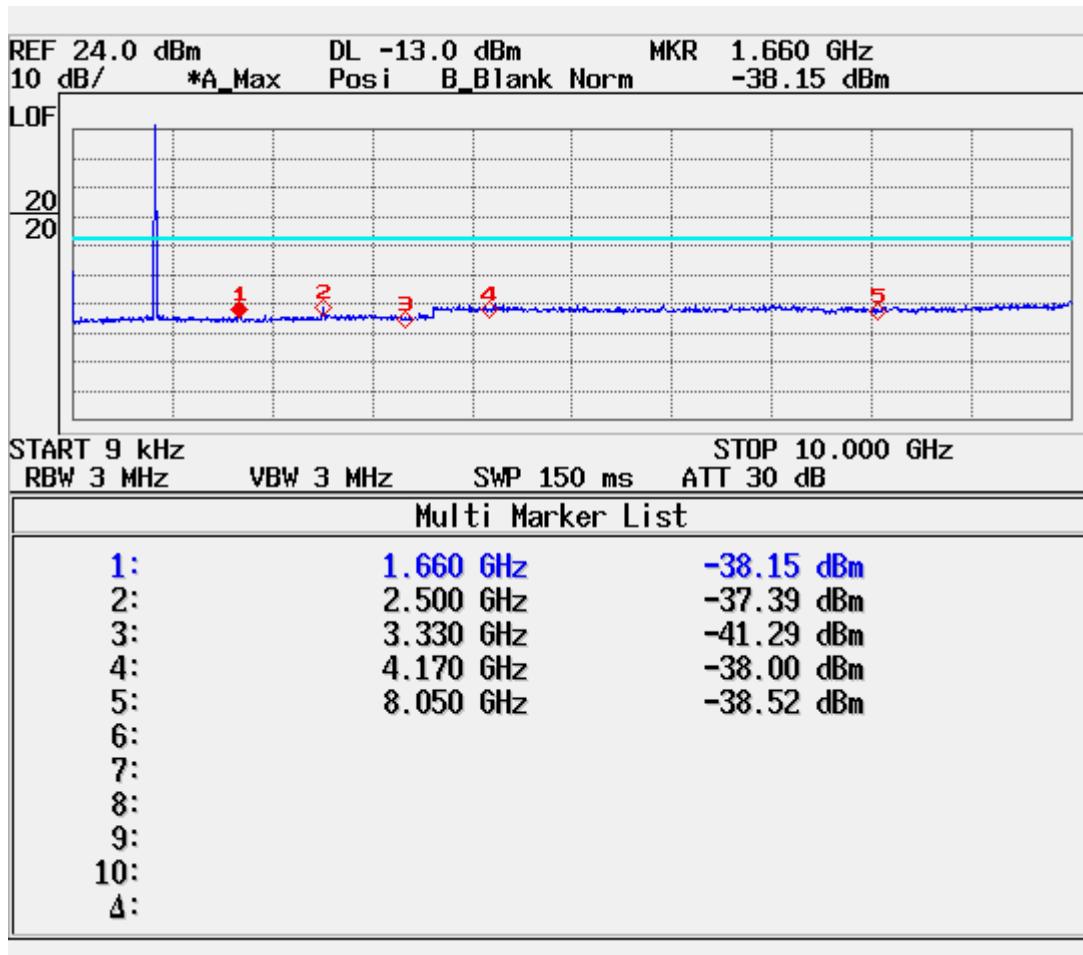
(Measured at the 99.75 % power bandwidth)

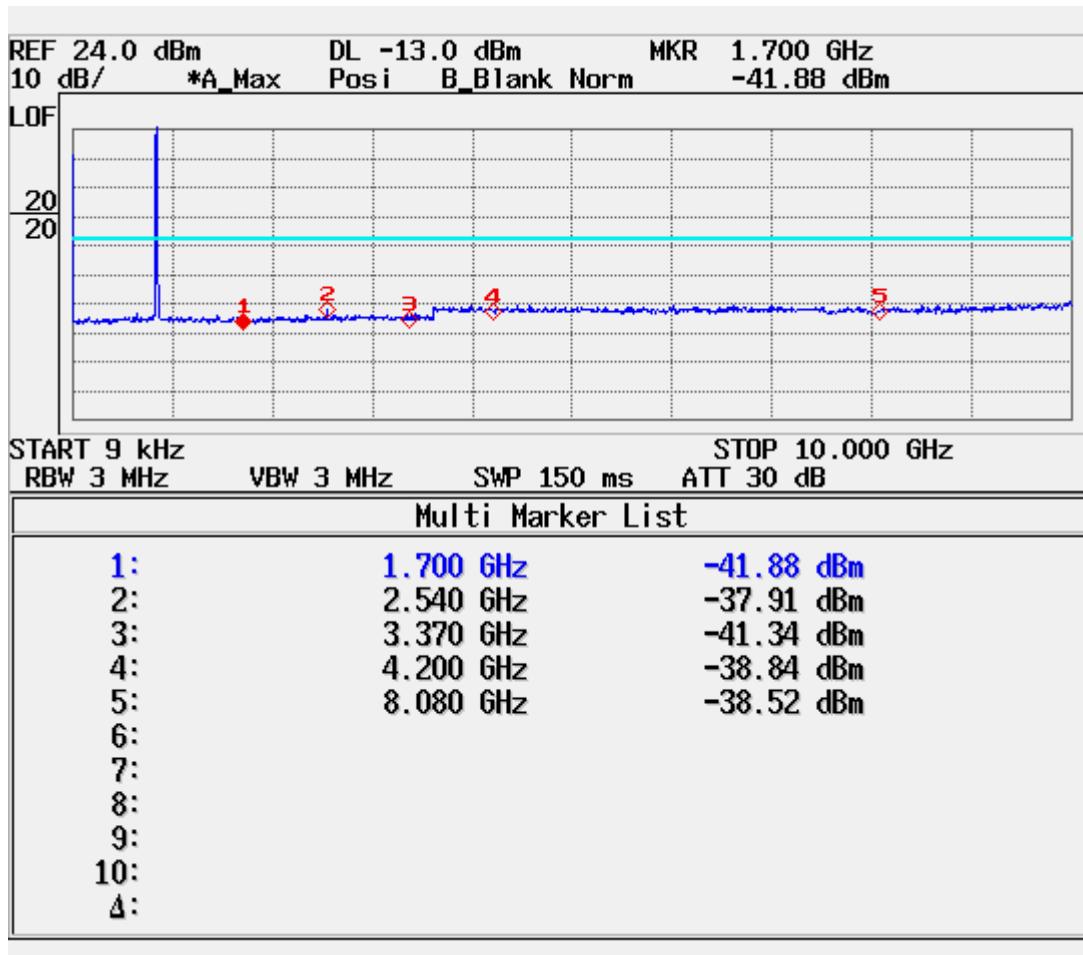
10. CONCLUSION

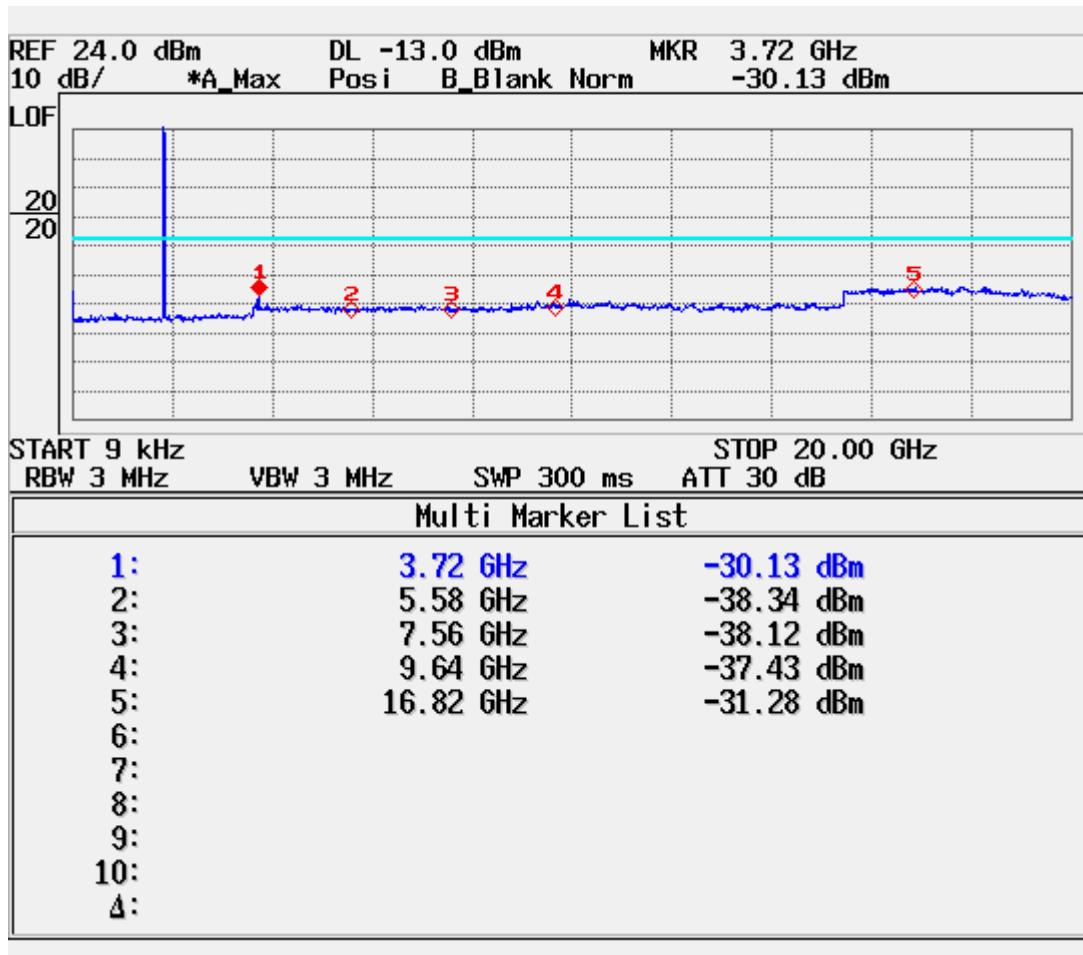
The data collected shows that the Tri-Band CDMA/EVDO USB Modem (CDMA / PCS CDMA / AWS CDMA) **FCC ID: O6Y-UM100** complies with all the requirements of Parts 22, 24, 27 of the FCC rules.

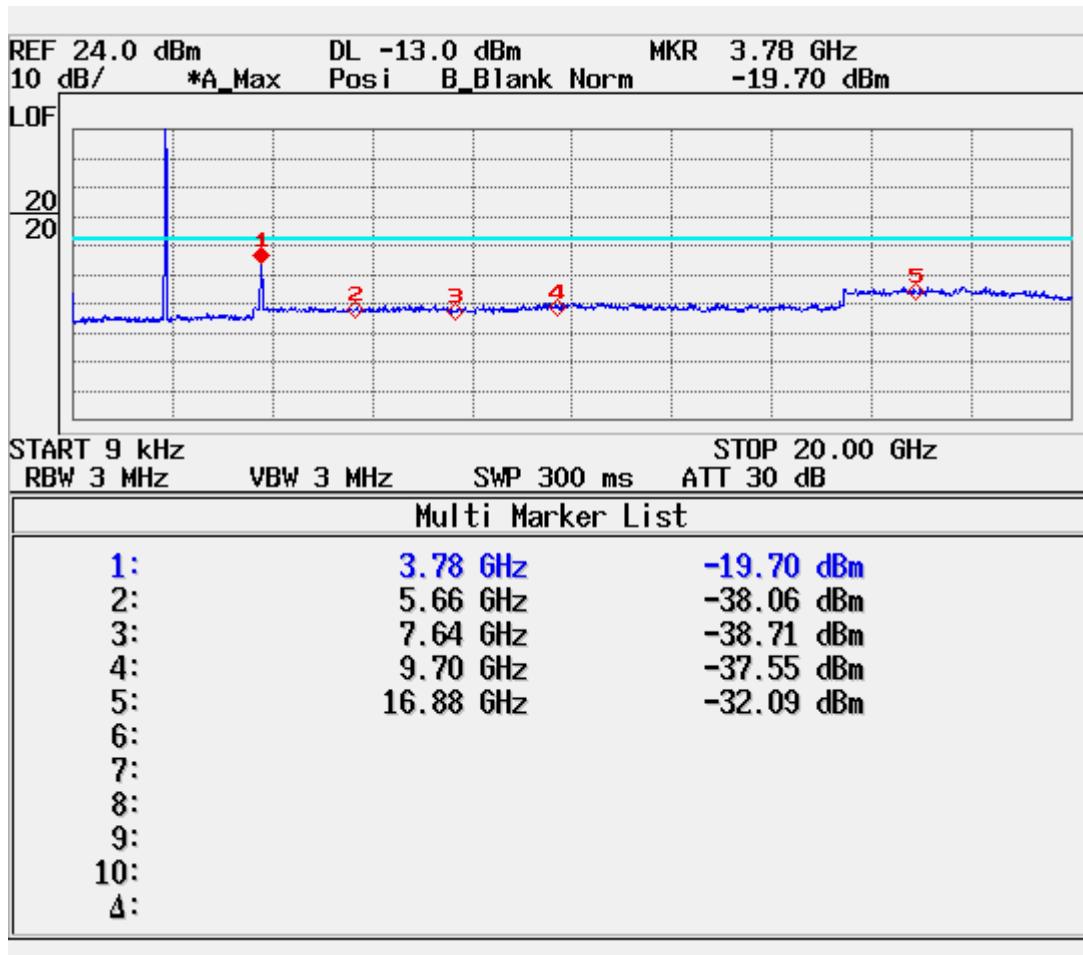
11. TEST PLOTS

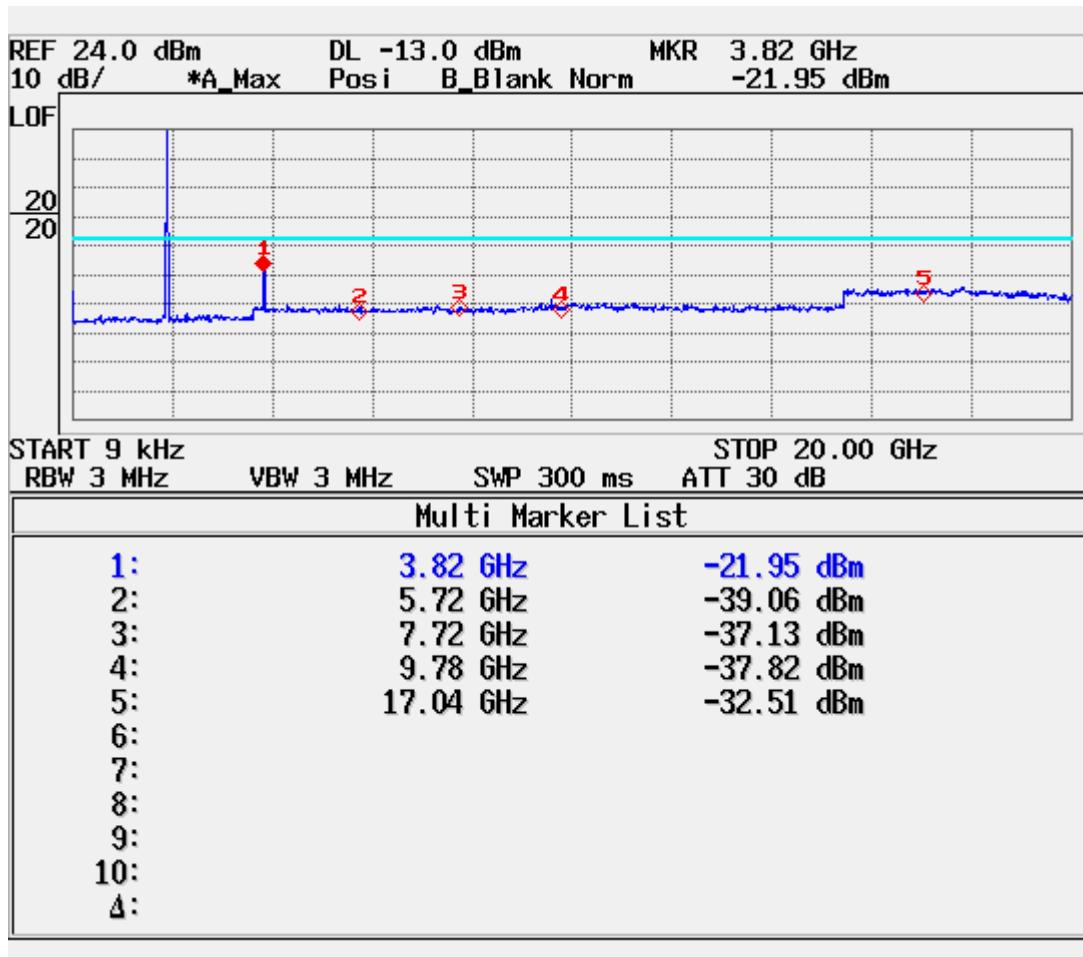
■ CDMA MODE (1013 CH.) Conducted Spurious

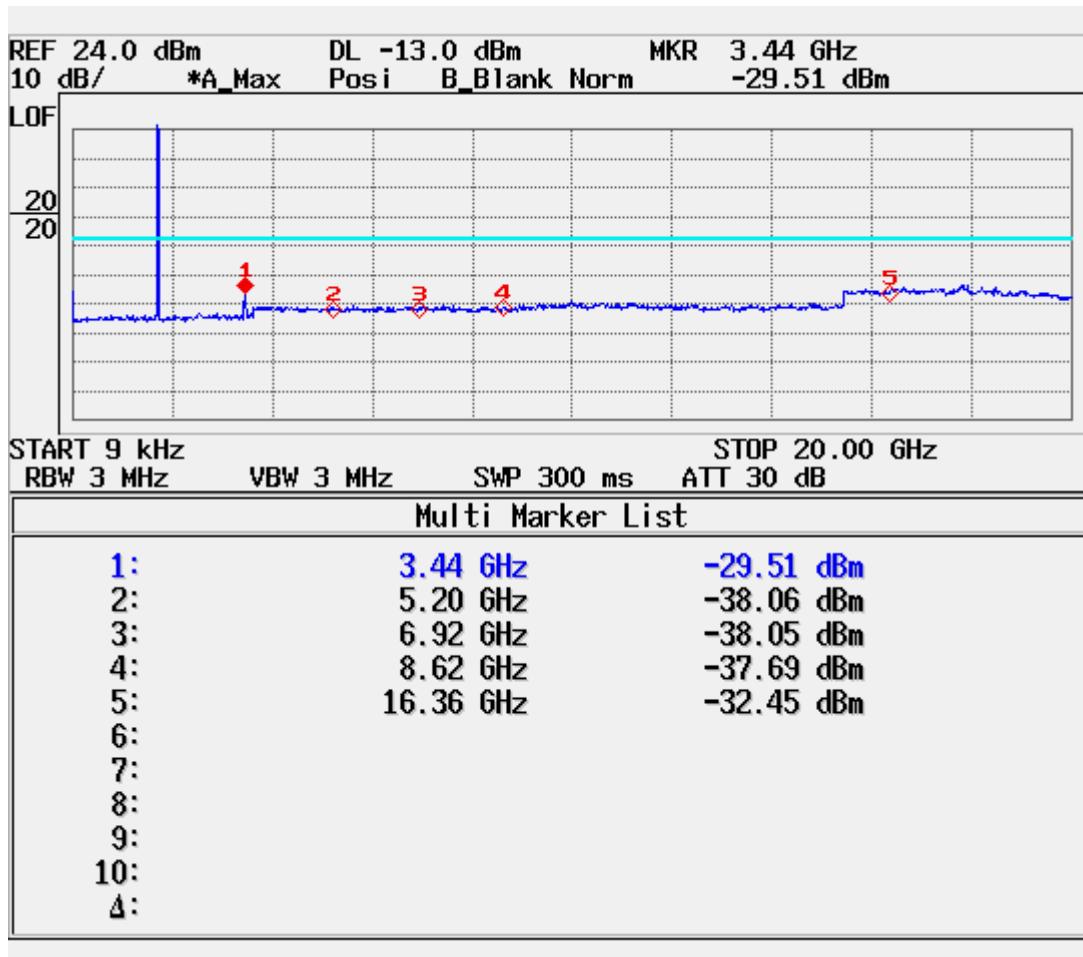
■ CDMA MODE (384 CH.) Conducted Spurious

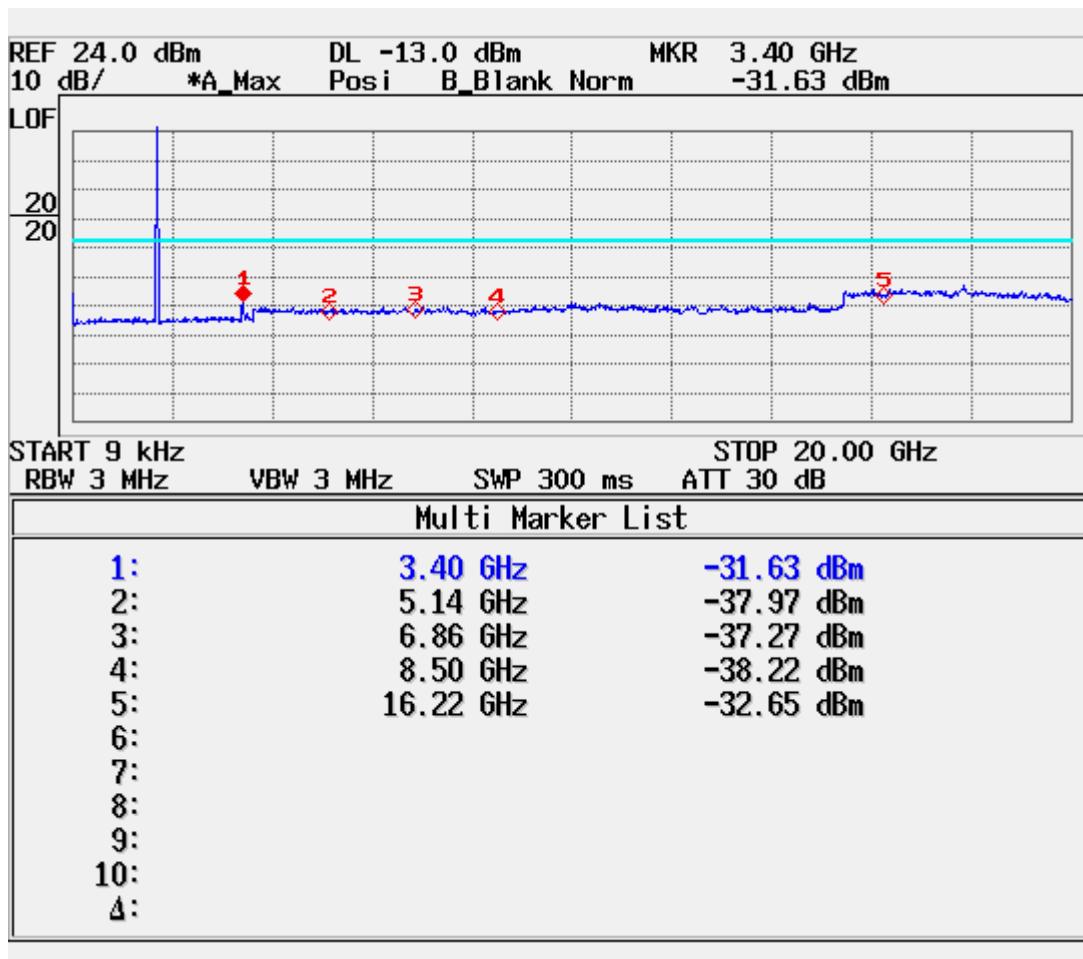
■ CDMA MODE (777 CH.) Conducted Spurious

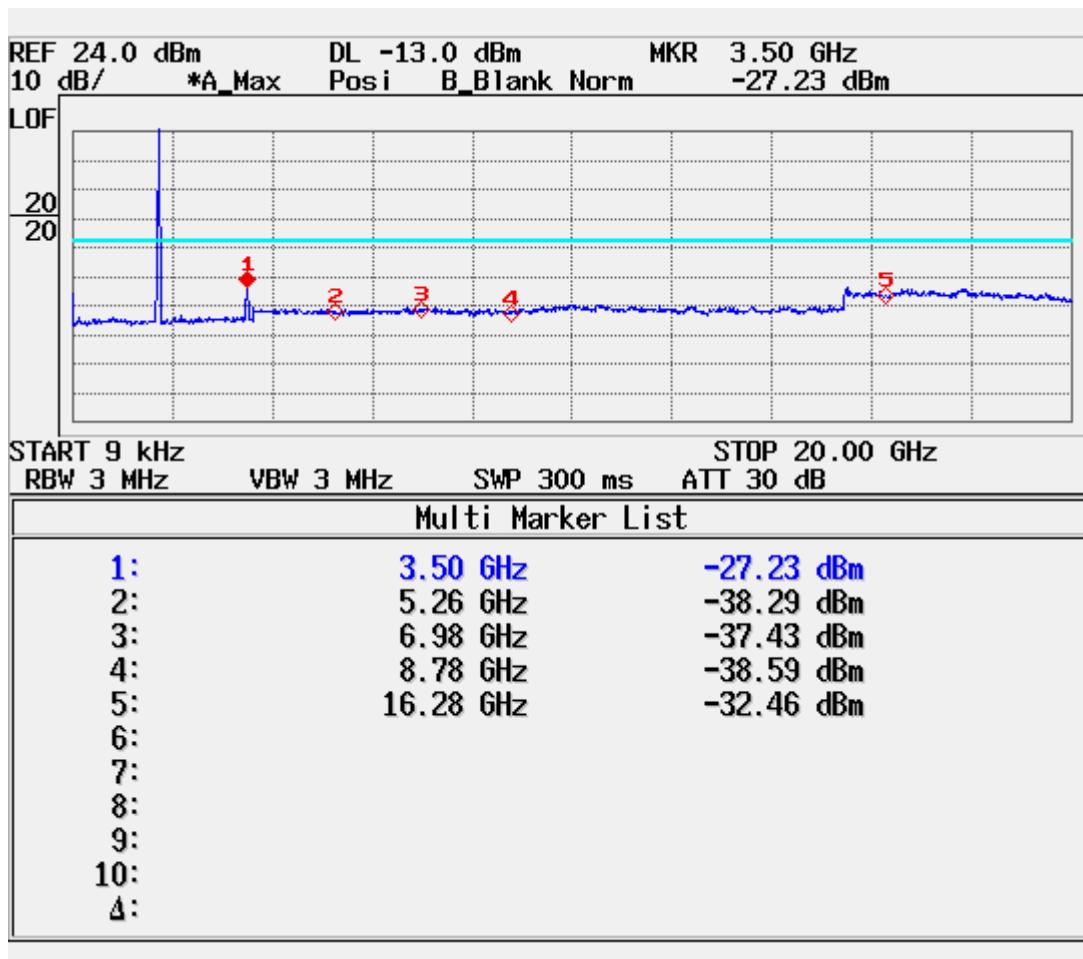
■ PCS CDMA MODE (25 CH.) Conducted Spurious

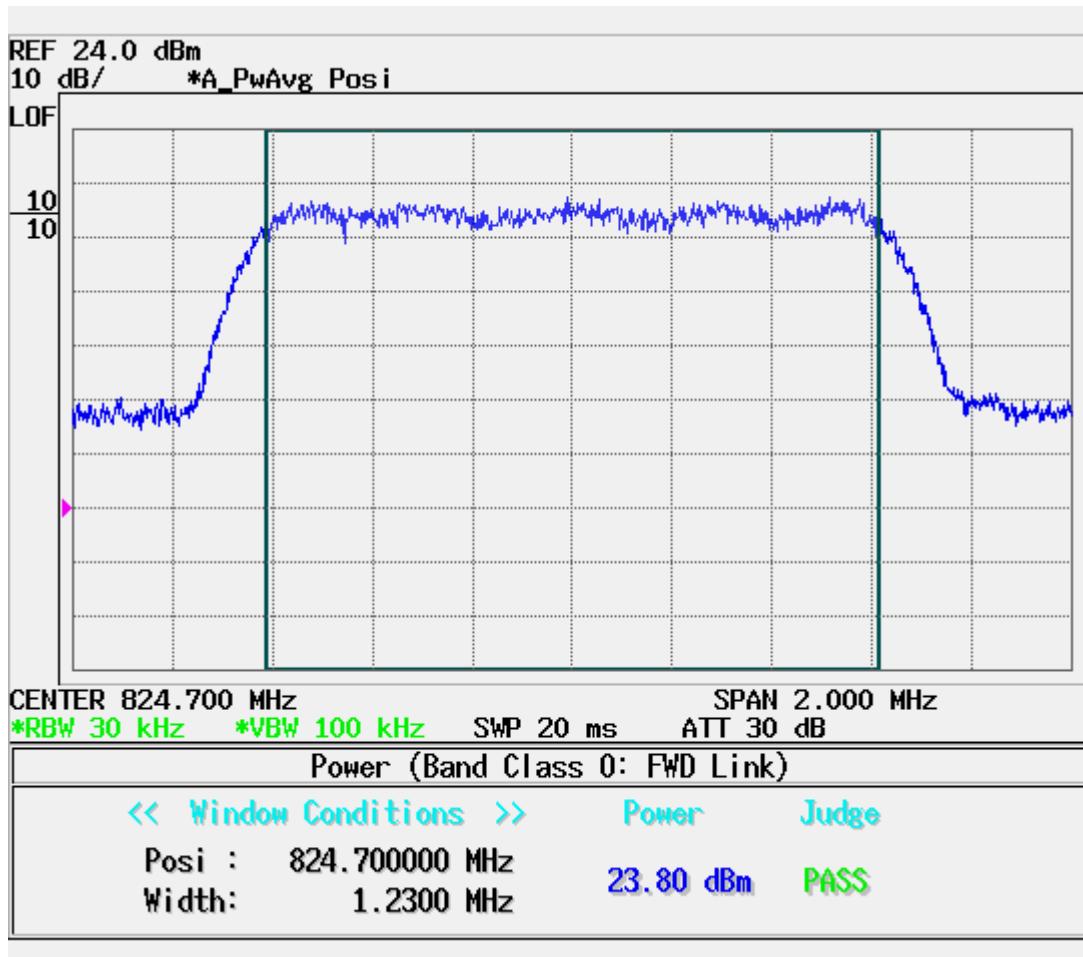
■ PCS CDMA MODE (600 CH.) Conducted Spurious

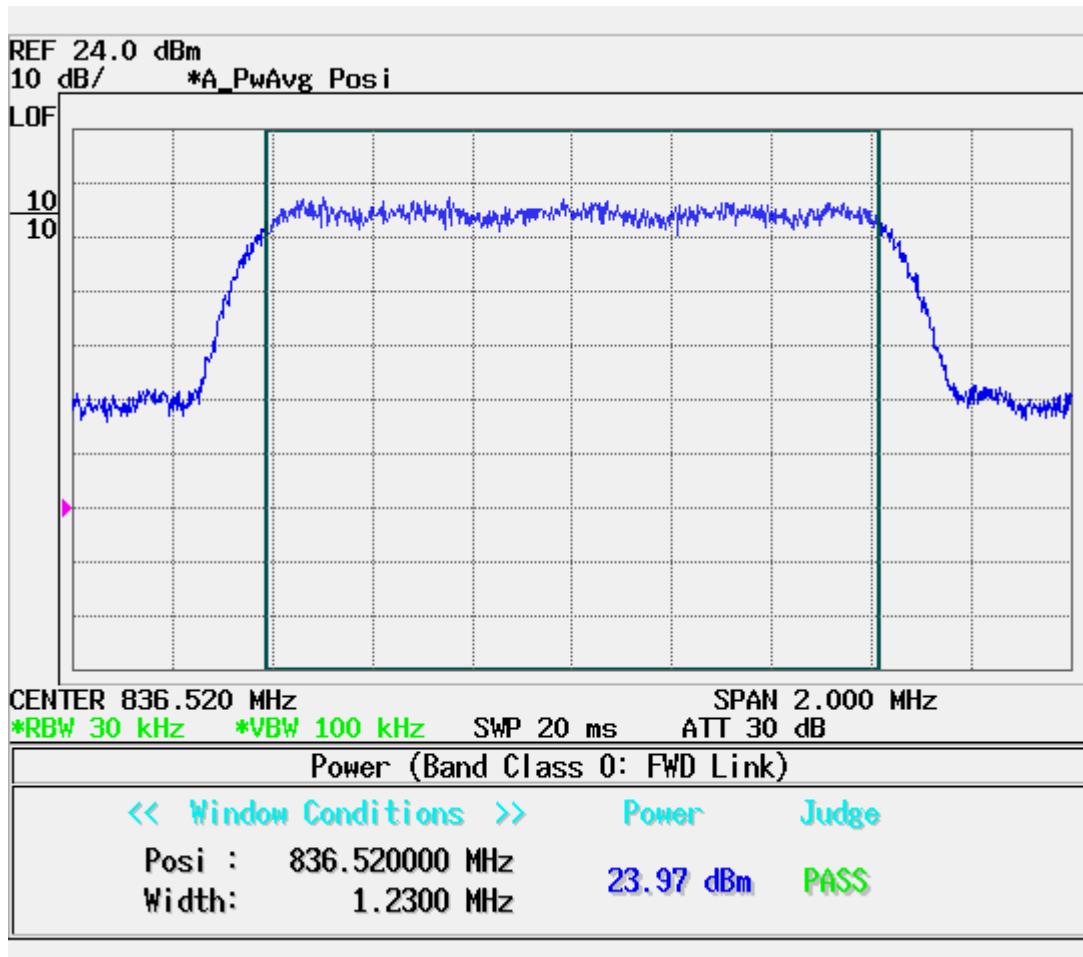
■ PCS CDMA MODE (1175 CH.) Conducted Spurious

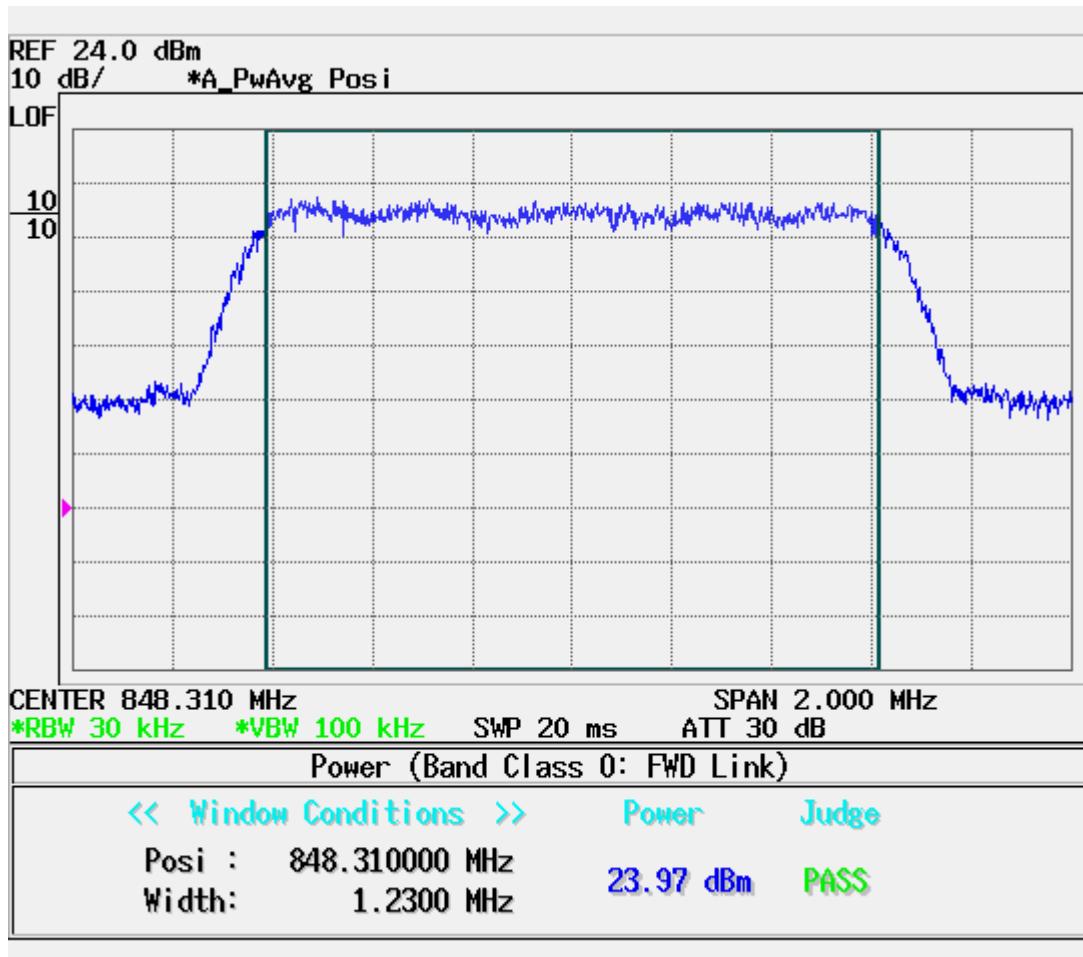
■ AWS CDMA MODE (25 CH.) Conducted Spurious

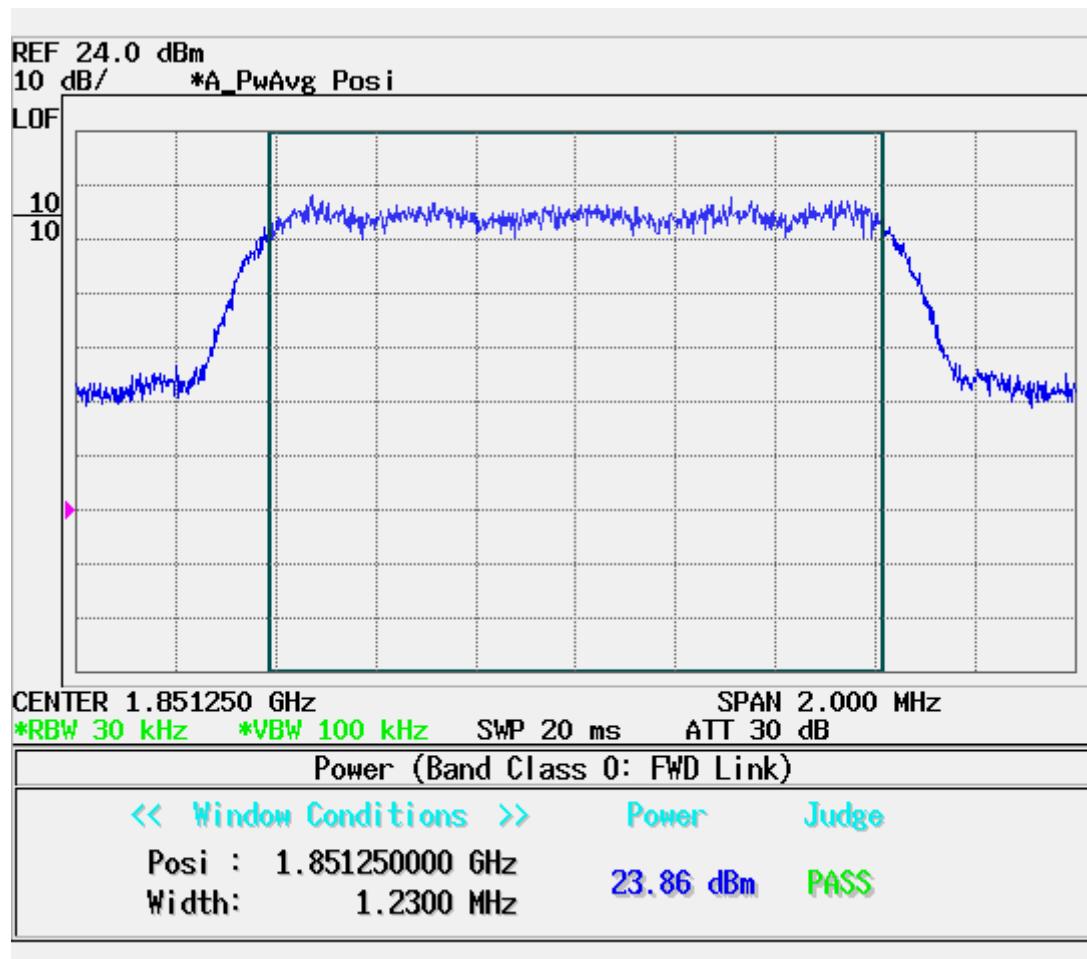
■ AWS CDMA MODE (425 CH.) Conducted Spurious

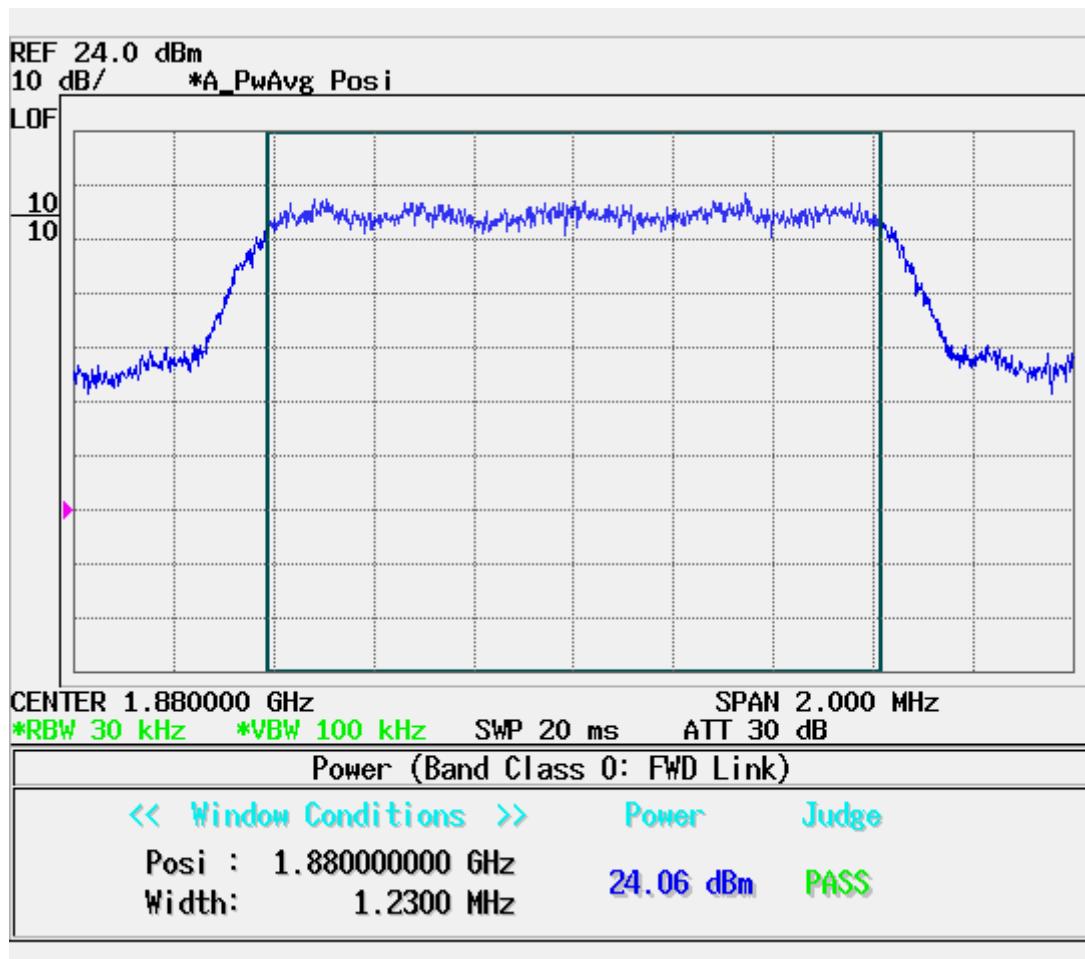
■ AWS CDMA MODE (875 CH.) Conducted Spurious

■ CDMA MODE (1013 CH.) : Channel Power

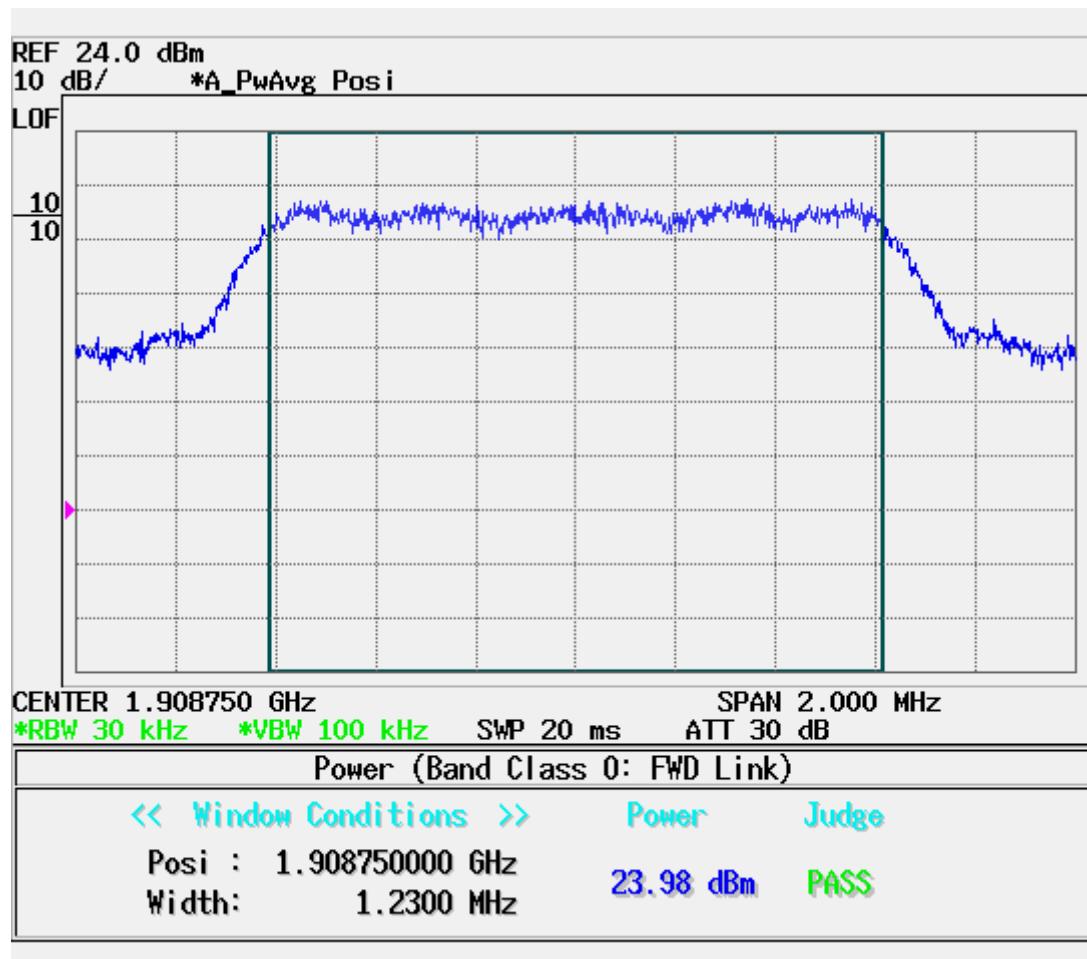
■ CDMA MODE (384 CH.) : Channel Power

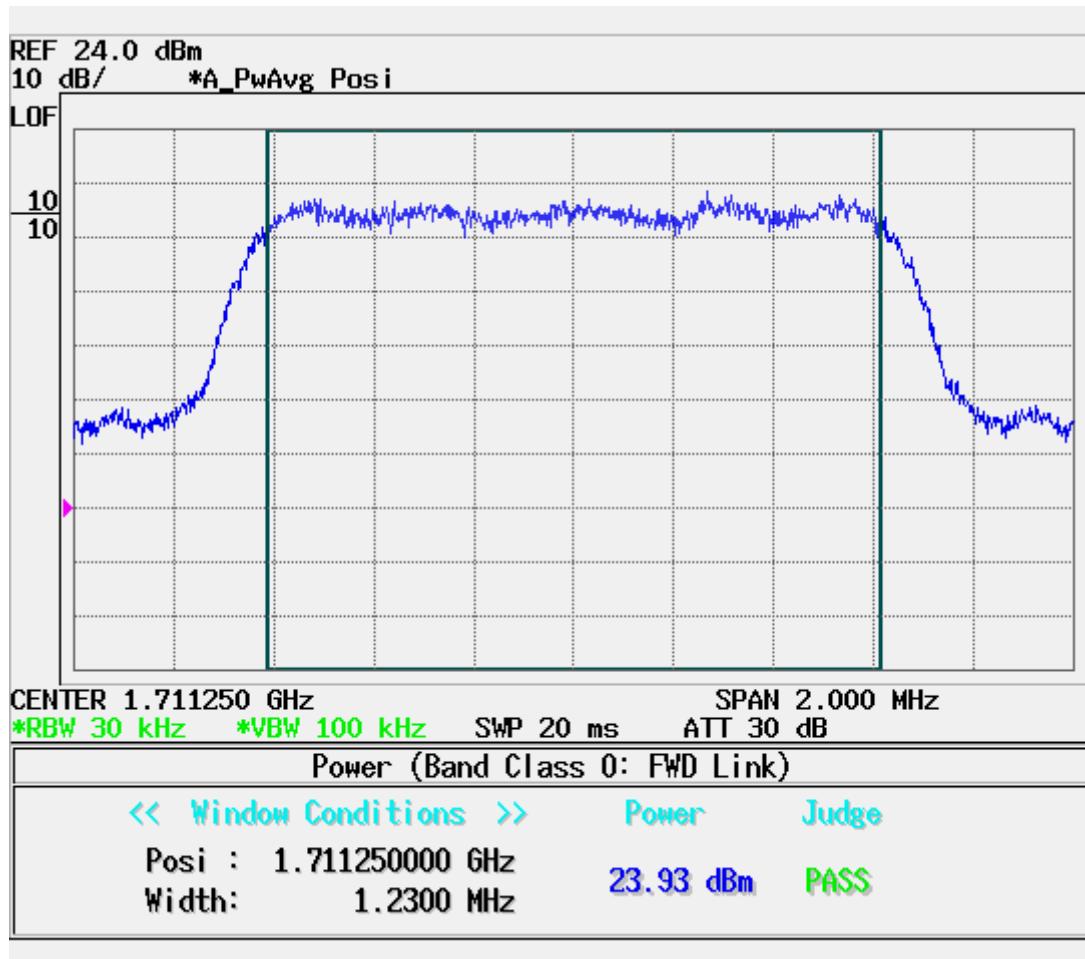
■ CDMA MODE (777 CH.) : Channel Power

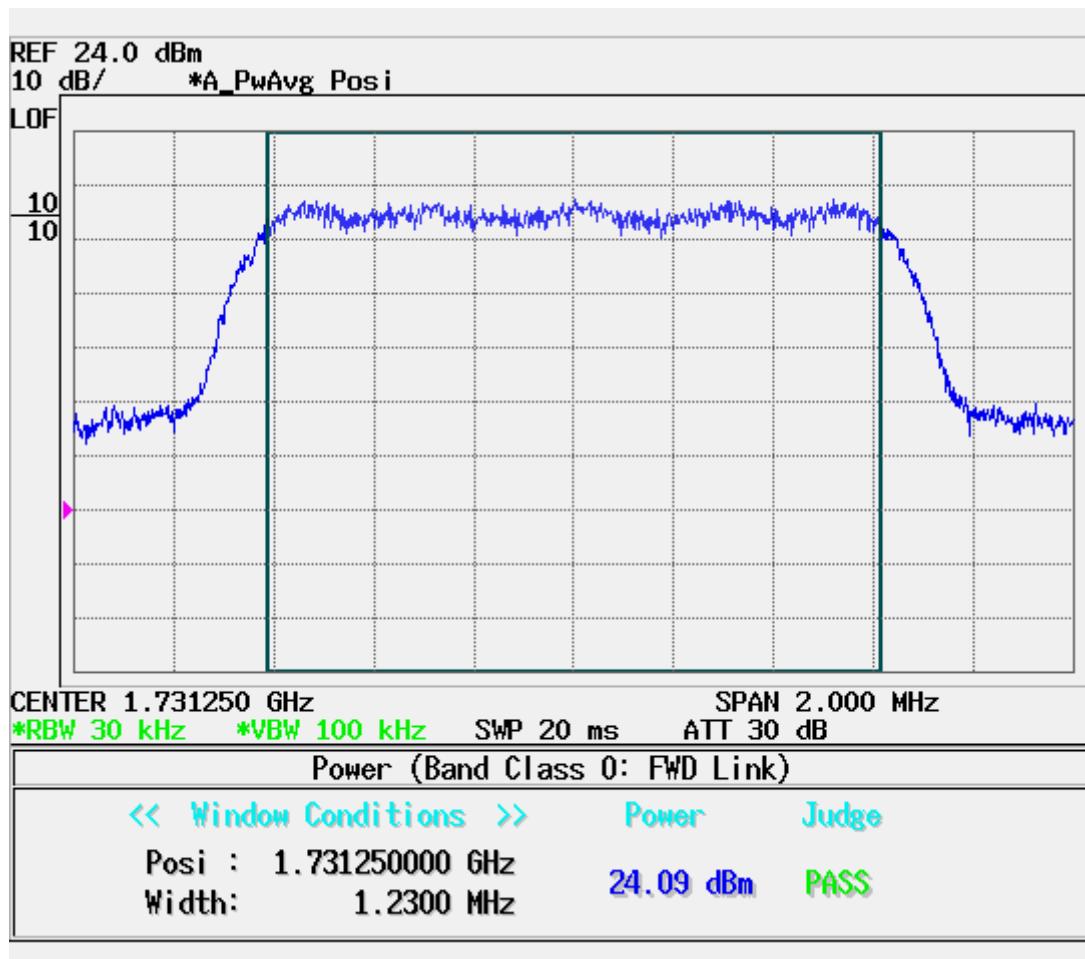
■ PCS CDMA MODE (25 CH.) : Channel Power

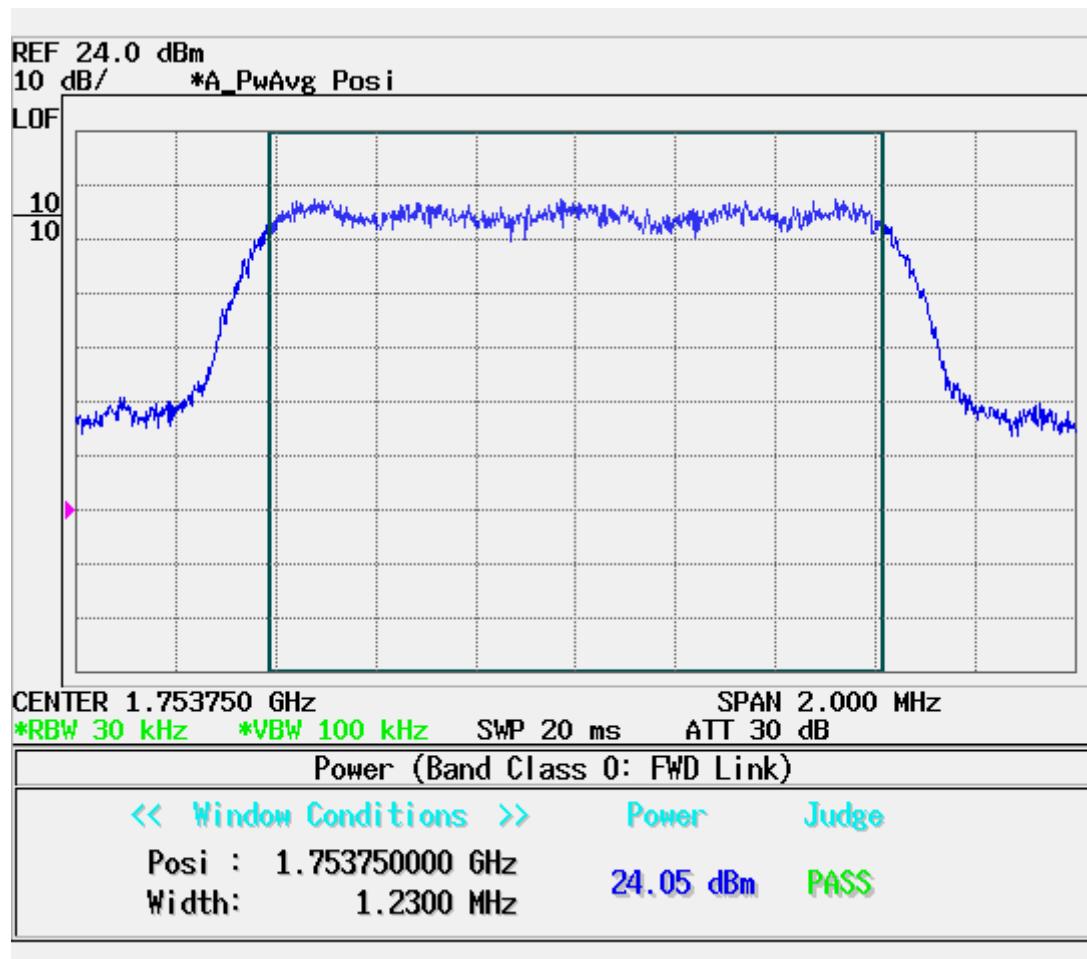
■ PCS CDMA MODE (600 CH.) : Channel Power

■ PCS CDMA MODE (1175 CH.) : Channel Power

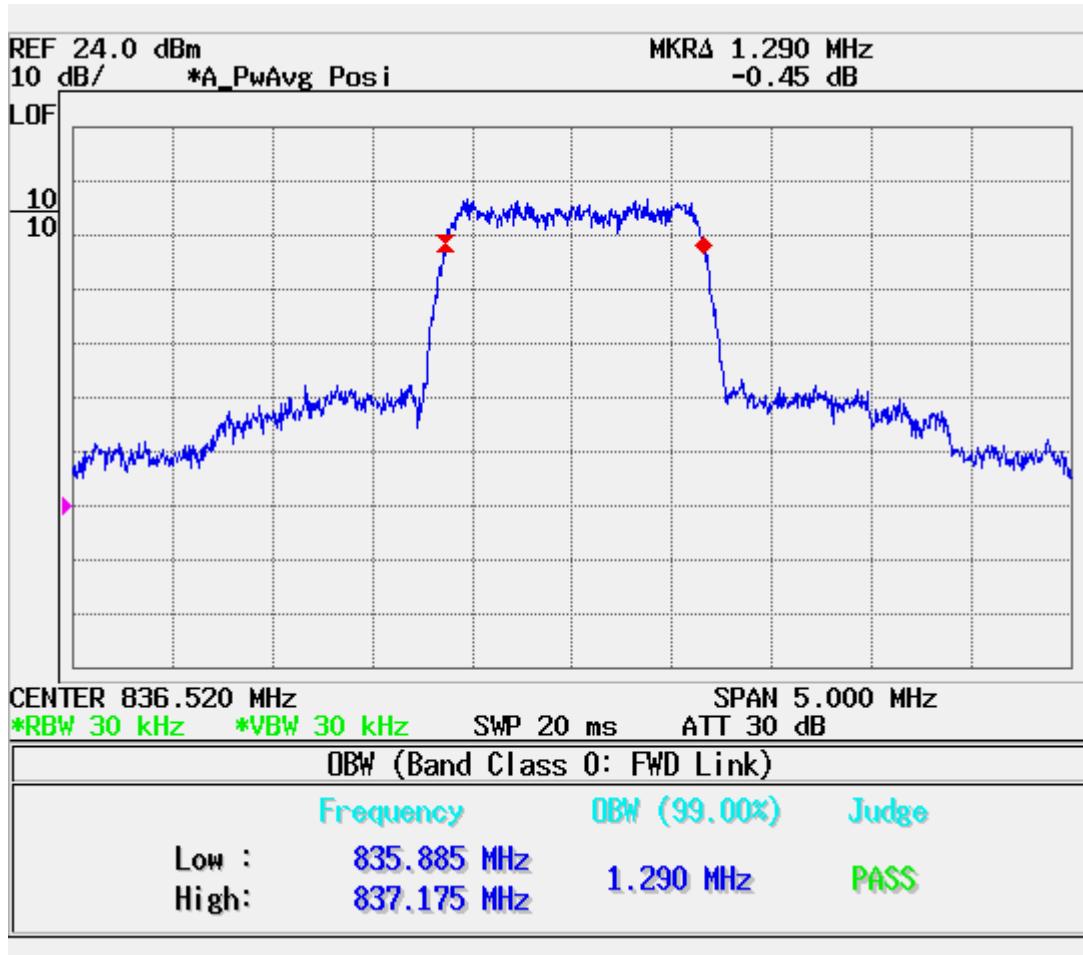


■ AWS CDMA MODE (25 CH.) : Channel Power

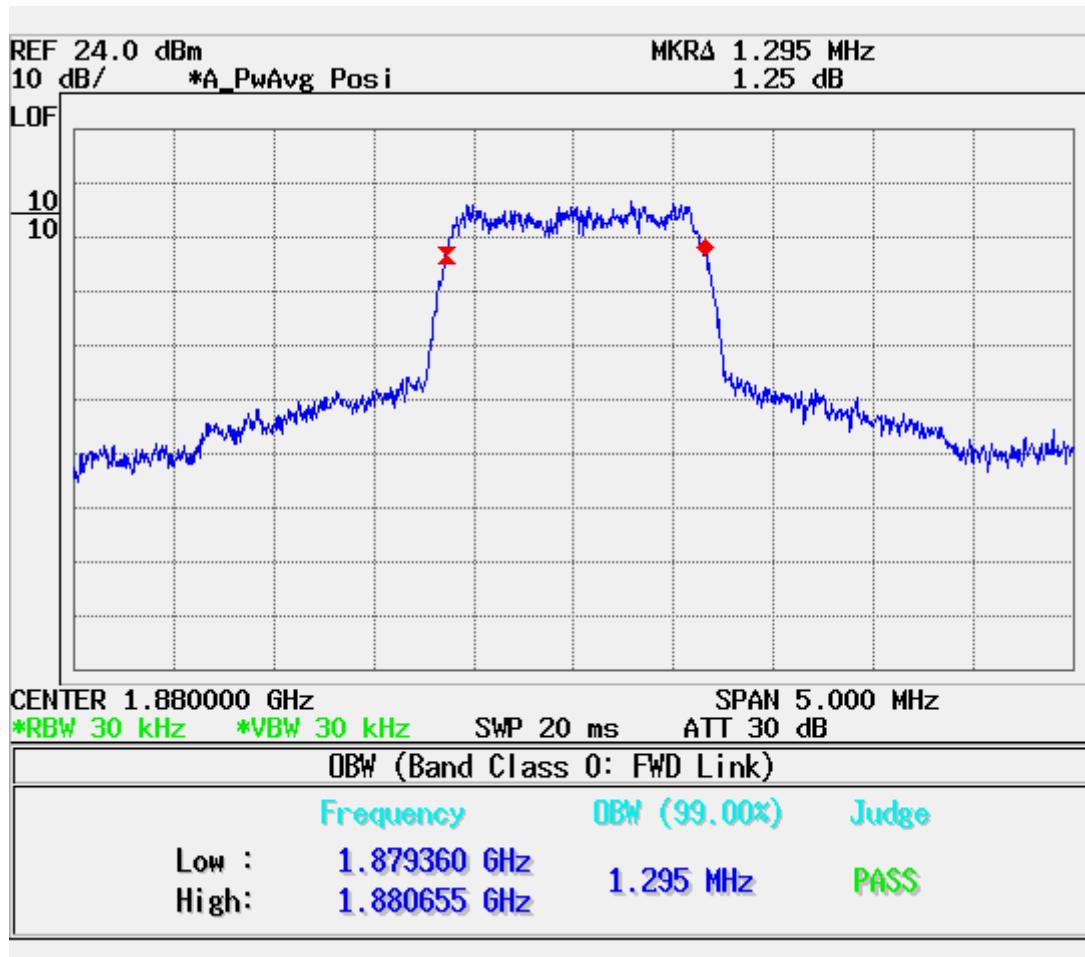
■ AWS CDMA MODE (425 CH.) : Channel Power

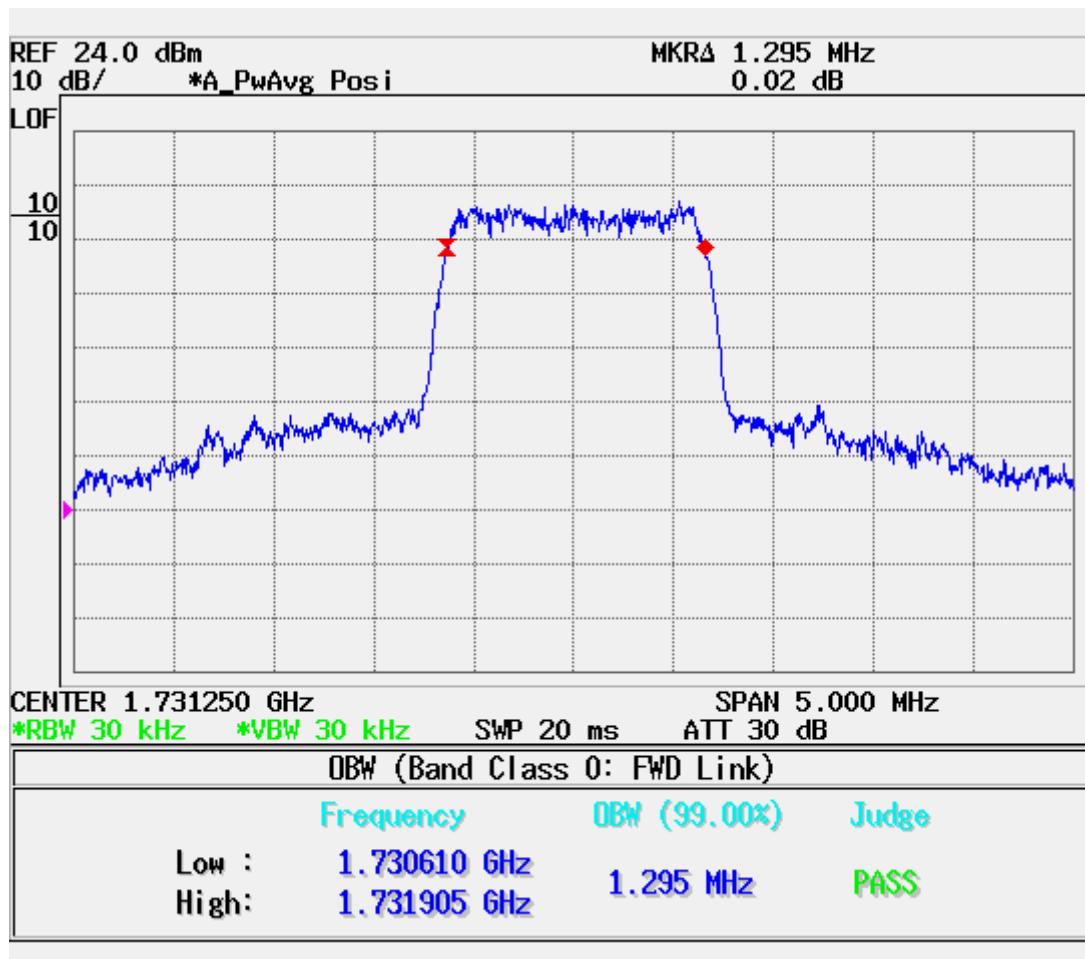
■ AWS CDMA MODE (875 CH.) : Channel Power

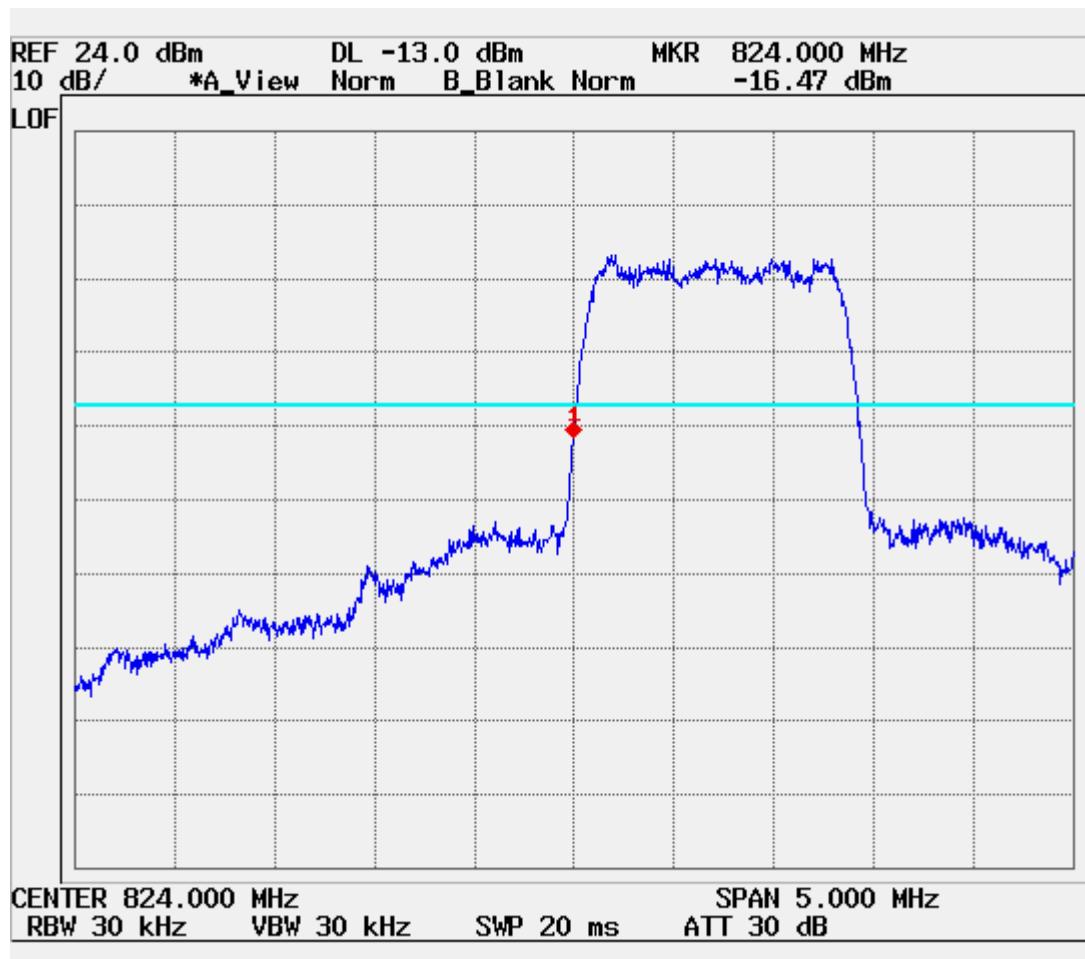
■ CDMA Mode (384 CH.) : Occupied Bandwidth

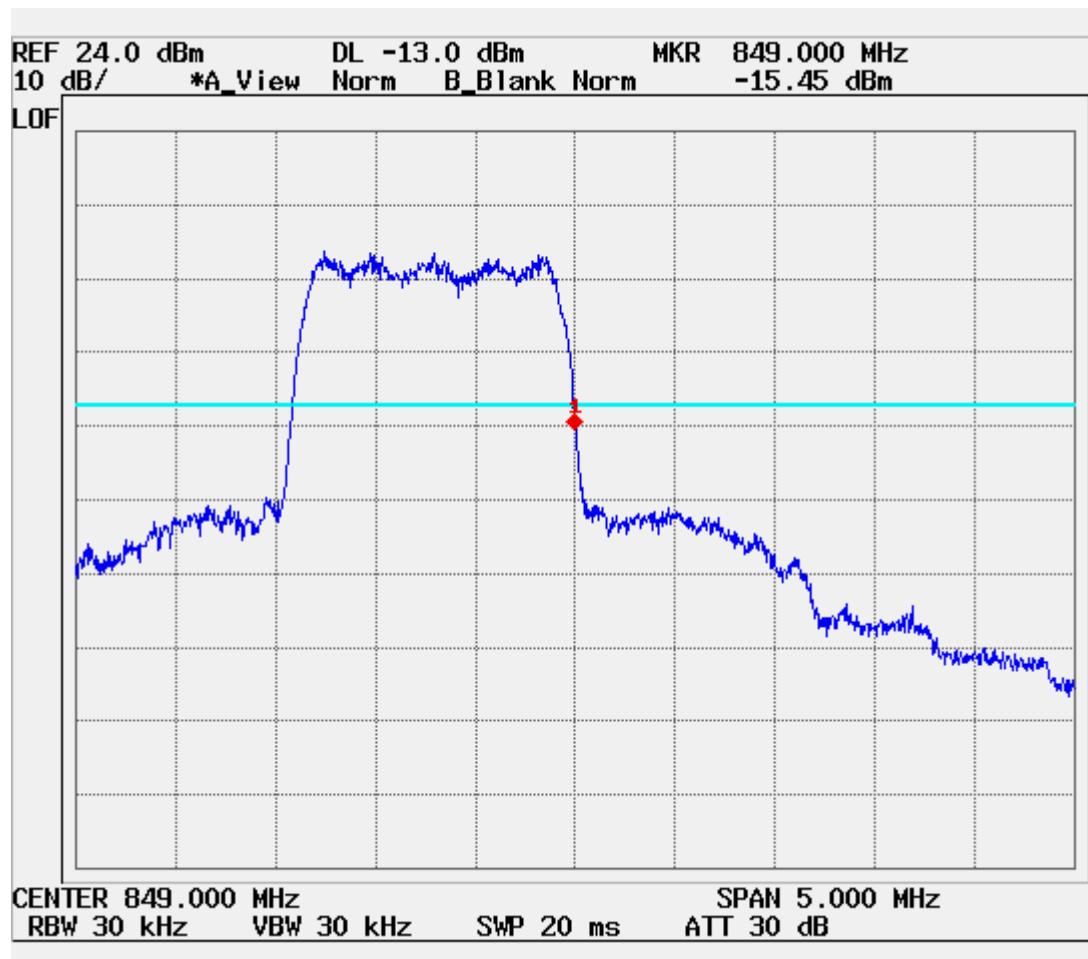


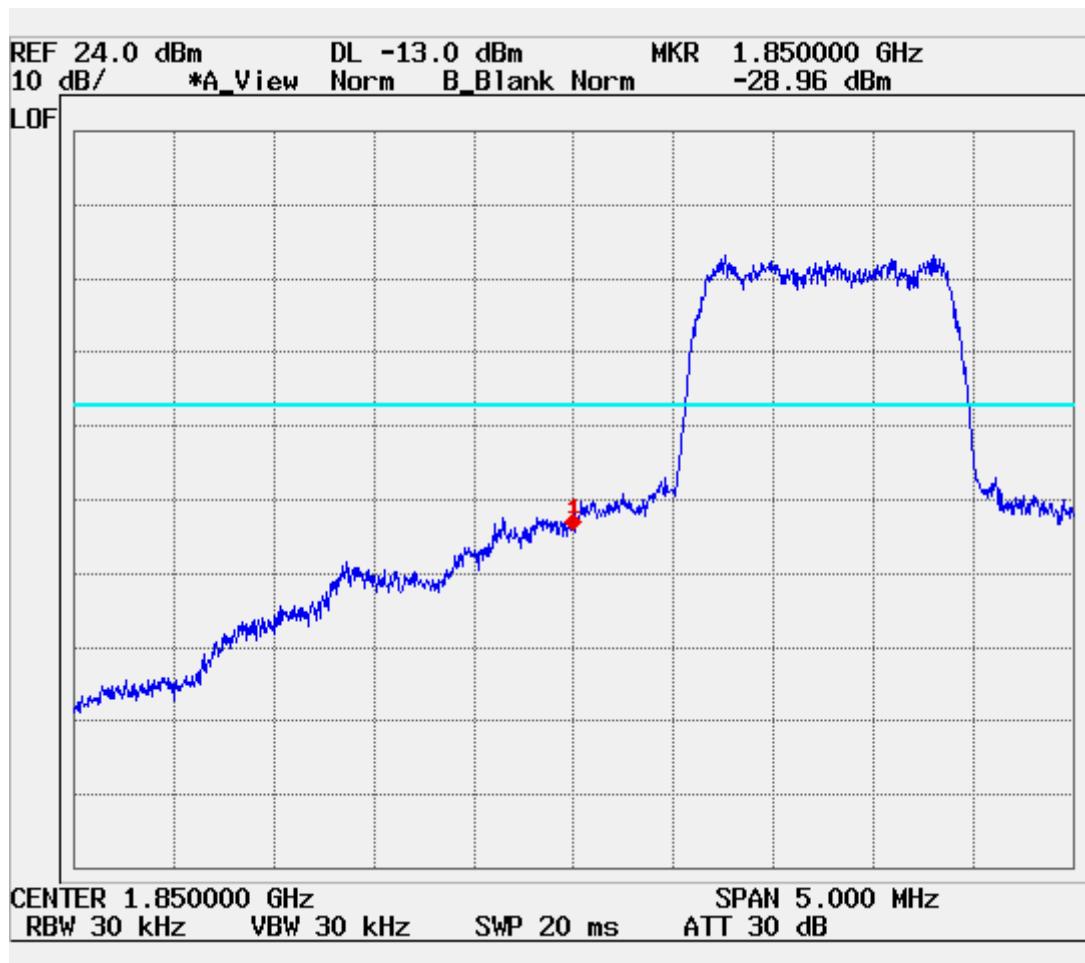
■ PCS CDMA Mode (600 CH) : Occupied Bandwidth

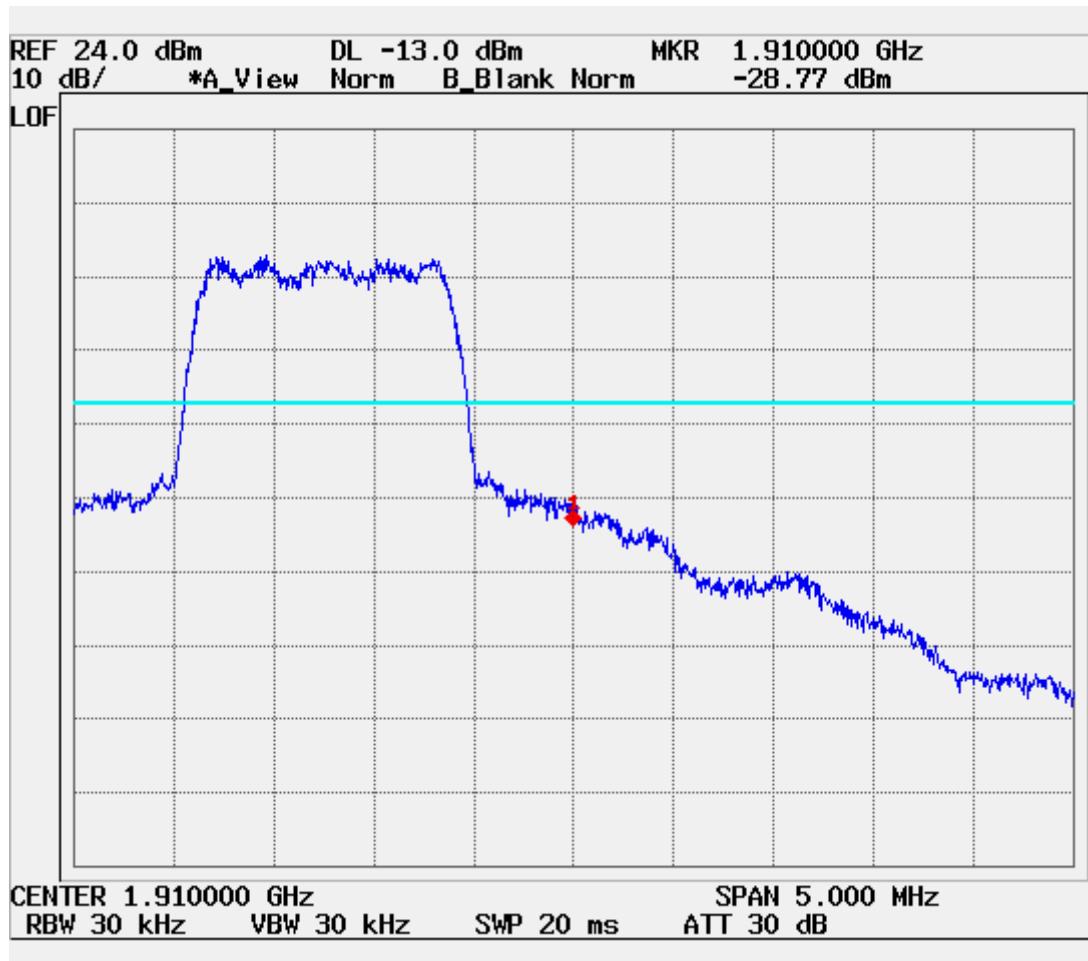


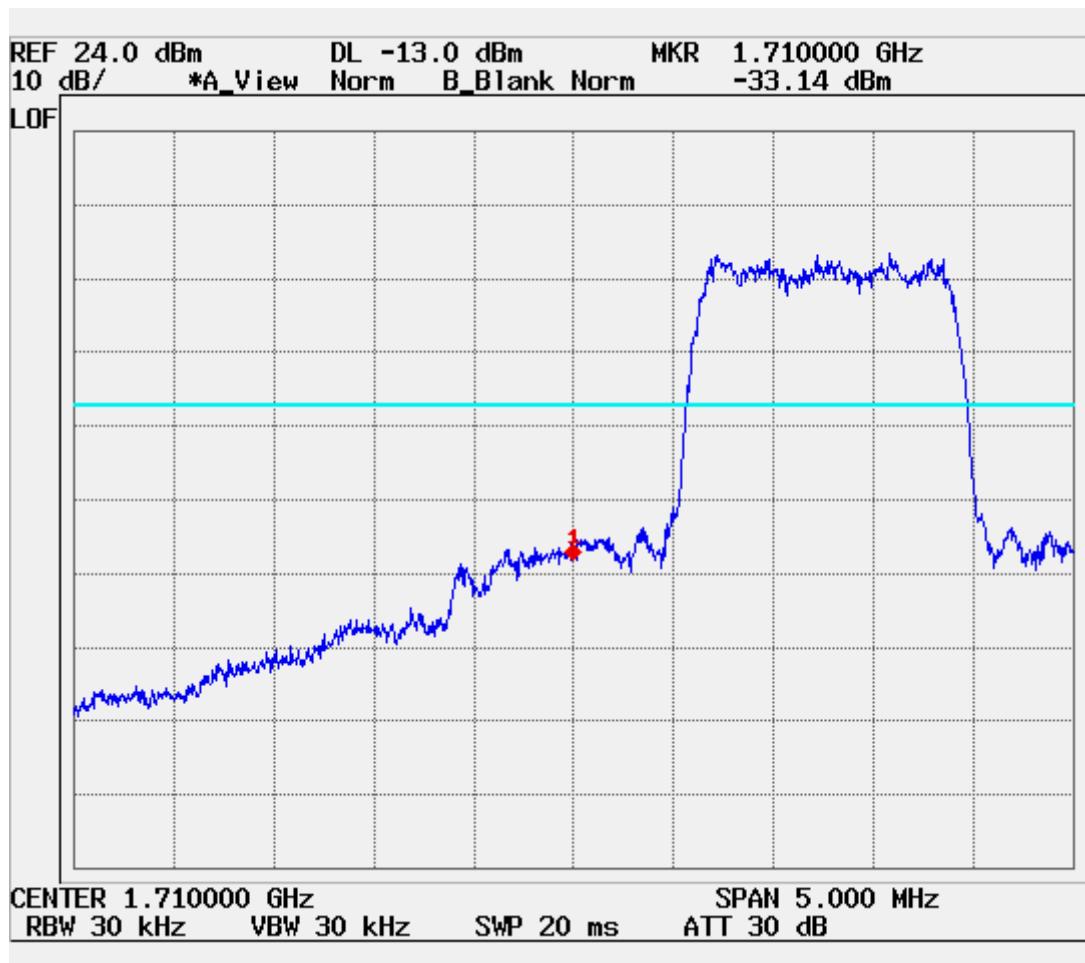
■ AWS CDMA Mode (425 CH) : Occupied Bandwidth

■ CDMA Mode (1013 CH.) : Band Edge

■ CDMA Mode (777 CH.) : Band Edge

■ PCS CDMA Mode (25 CH.) : Band Edge

■ PCS CDMA Mode (1175 CH.) : Band Edge

■ AWS CDMA Mode (25 CH.) : Band Edge

■ AWS CDMA Mode (875 CH.) : Band Edge