




APPENDIX B: PRODUCT DESCRIPTION

Technical data

UTS700X (main unit)	
Dimensions	approx. (W)44 × (L)105 × (H) 26.3 mm (excl.Antenna)
Weight	approx. 95g
Power supply	DC3.6V 350mAh
Continuous stand by time	approx. 500 hours
Continuous talk time	approx. 5 hours
AC adapter	
Input	AC110V 60Hz
Output	DC 9V 100mA

Phone display

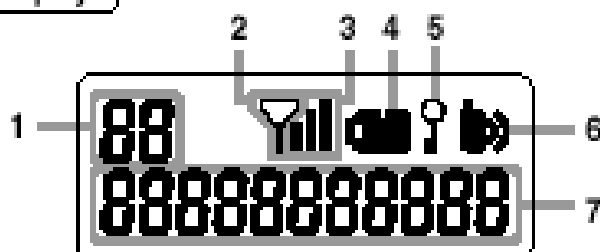

1. Information display area

This area includes indicators for missed calls, redial numbers, received call numbers, phonebook numbers etc.

2. Indicates when you are in a service area.

3. Indicates the strength of signal reception.

4. Battery mark

Indicates the battery level.



Enough to use ↔ Requires charging

5. Indicates when the phone is locked.

6. Indicates the ringer volume.

7. Phone display area

Displays phone numbers and other information.