


FCC C2PC Test Report

FCC ID : O6ZHXQX1AP0S
Equipment : 8-Channel LoRa Module
Model No. : HXQX1AP0S
Brand Name : machineQ
Applicant : Humax Co., Ltd.
Address : HUMAX BLDG., 2, HUMAX BLDG., 2,
Yeongmun-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, South Korea, 17040
Standard : 47 CFR FCC Part 15.247
Received Date : Mar. 05, 2019
Tested Date : Mar. 12 ~ Mar. 14, 2019

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:


Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	The Equipment List	9
1.5	Test Standards	10
1.6	Deviation from Test Standard and Measurement Procedure.....	10
1.7	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Conducted Emissions.....	12
3.2	Unwanted Emissions into Restricted Frequency Bands	17
4	TEST LABORATORY INFORMATION	27

Release Record

Report No.	Version	Description	Issued Date
FR782401-11	Rev. 01	Initial issue	Mar. 26, 2019

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.339MHz 39.16 (Margin -10.06dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 108.51MHz 41.99 (Margin -1.51dB) - QP	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared values of gain for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of the gain.

1 General Description

1.1 Information

This report is prepared for FCC class II change.

This report is issued as a supplementary report to original ICC report no. FR782401-08. The difference is concerned with following item of host listed on FR782401-08:

- ✧ Modification of PCB and components of non-RF section for ESD, Ethernet Port Surge and LED circuit Improvement and GPIO circuit.
- ✧ Remove matching circuit and replace by band pass filter on Lora external antenna area
- ✧ Lora External antenna connector location is moved out 3.15 mm
- ✧ Modification of SIM card detection circuit
- ✧ Remove an adapter (Brand name: PHIHONG, Model name: PSAC24A-120L6)

In this report, conducted emission and radiated emission tests had been re-tested and only its data was presented in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Data Rate (bit/sec)	Spread Factor	Channel Bandwidth (kHz)
902 ~ 928	923.3 ~ 927.5	1 ~ 8 [8]	980 ~ 21900	12 ~ 7	500
Note 1: RF output power specifies that Maximum Conducted (Average) Output Power.					
Note 2: The device uses CSS modulation.					

1.1.2 Information of Host

Brand Name	machineQ
Product name	8-Channel LoRa Gateway
Model name	HXQX1AP0S
Certified module (installed in the system)	FCC ID: XMR201605EC25A

1.1.2.1 Antenna of Host

For LoRa

Ant. No.	Brand	Type	Gain (dBi)	Connector	Remark
1	LoRa antenna (External)	Dipole	0.96	SMA	Lora Antenna
2	LoRa antenna (Internal)	Monopole	-1.65	UFL	Lora Antenna

For LTE / WCDMA

Ant. No.	Type	Connector	Gain (dBi)	Operating Band
1	PIFA	UFL	4.49	LTE Band 2 / WCDMA Band II
			3.59	LTE Band 4 / WCDMA Band IV
			2.05	LTE Band 12 / WCDMA Band V

1.1.2.2 Power Supply Type of Host

Power Supply Type	12Vdc from adapter
-------------------	--------------------

1.1.2.3 Accessories of Host

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: machineQ Model: WB-24J12FU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.7A Max O/P: 12Vdc, 2A Power Line: 1.2m non-shielded without core
3	RJ45 cable	1m shielded without core


1.1.3 Channel List

Channel	Frequency(MHz)
1	923.3
2	923.9
3	924.5
4	925.1
5	925.7
6	926.3
7	926.9
8	927.5

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E6430	DoC	---

1.3 Test Setup Chart

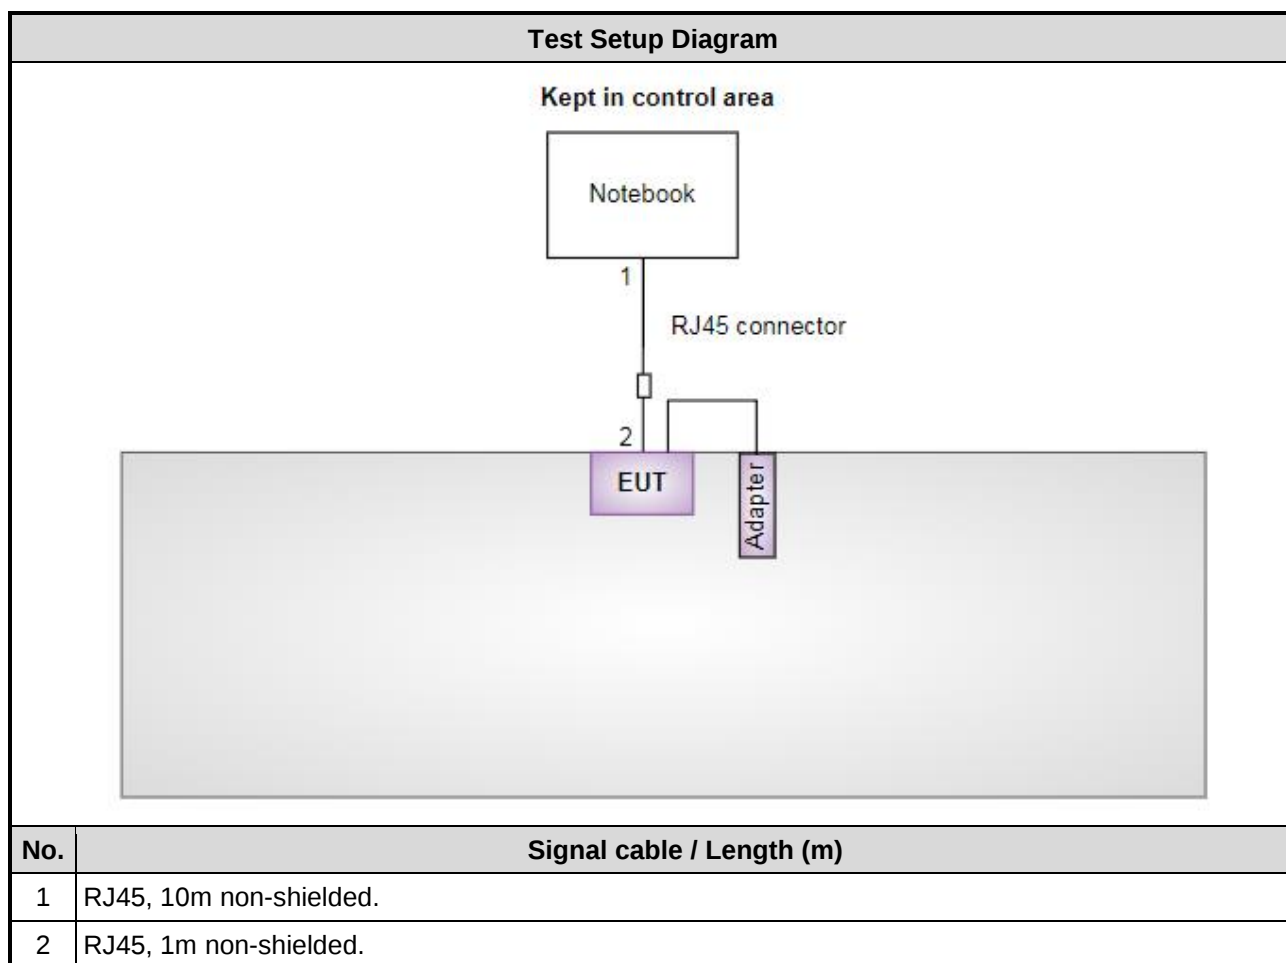

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Mar. 14, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Jan. 08, 2019	Jan. 07, 2020
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 05, 2018	Nov. 04, 2019
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 23, 2018	Oct. 23, 2019
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 3 / (03CH03-WS)				
Tested Date	Mar. 12, 2019				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Jan. 07, 2019	Jan. 06, 2020
Receiver	R&S	ESR3	101658	Dec. 11, 2018	Dec. 10, 2019
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 19, 2018	Apr. 18, 2019
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Jan. 07, 2019	Jan. 06, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2018	Nov. 14, 2019
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 09, 2018	Nov. 08, 2019
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 08, 2018	Oct. 07, 2019
Preamplifier	EMC	EMC02325	980187	Aug. 24, 2018	Aug. 23, 2019
Preamplifier	Agilent	83017A	MY53270014	Aug. 09, 2018	Aug. 08, 2019
Preamplifier	EMC	EMC184045B	980192	Aug. 09, 2018	Aug. 08, 2019
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Oct. 01, 2018	Sep. 30, 2019
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Oct. 01, 2018	Sep. 30, 2019
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Oct. 01, 2018	Sep. 30, 2019
LF cable-0.8M	EMC	EMC8D-NM-NM-8000	EMC8D-NM-NM-800-001	Oct. 01, 2018	Sep. 30, 2019
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Oct. 01, 2018	Sep. 30, 2019
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Oct. 01, 2018	Sep. 30, 2019
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r01

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.90 dB
Radiated emission ≤ 1GHz	±3.96 dB
Radiated emission > 1GHz	±4.51 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 65%	Alex Tsai
Radiated Emissions	03CH03-WS	21°C / 66%	Roger Lu

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Test Frequency (MHz)	Channel Bandwidth (kHz)	Modulation / SF	Test Configuration
Conducted Emissions	923.3 / 927.5	500	CSS / 12	---
Radiated Emissions	923.3 / 927.5	500	CSS / 12	---
NOTE: 1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.				

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.


3.1.3 Test Setup

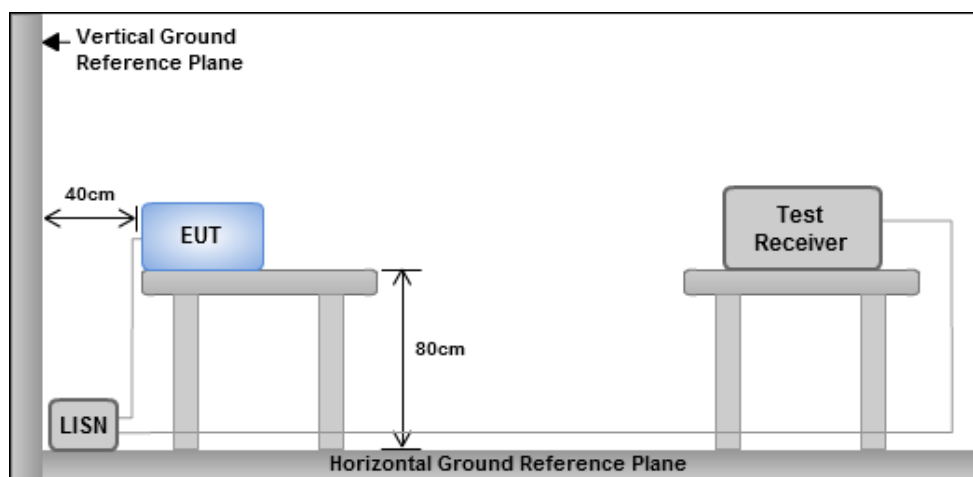

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 Test Result of Conducted Emissions

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Power Phase	Line		

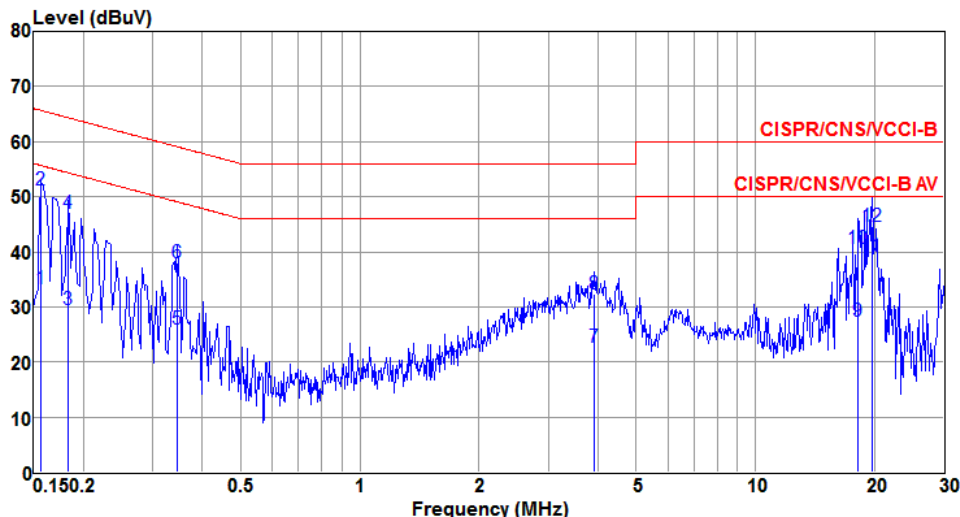


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.156	33.21	55.69	-22.48	32.96	0.07	0.05	Average
2	0.156	51.26	65.69	-14.43	51.01	0.07	0.05	QP
3	0.183	29.61	54.33	-24.72	29.32	0.06	0.06	Average
4	0.183	47.03	64.33	-17.30	46.74	0.06	0.06	QP
5	0.345	26.00	49.09	-23.09	25.62	0.06	0.08	Average
6	0.345	37.94	59.09	-21.15	37.56	0.06	0.08	QP
7	3.922	22.57	46.00	-23.43	21.80	0.11	0.28	Average
8	3.922	32.28	56.00	-23.72	31.51	0.11	0.28	QP
9	18.232	27.43	50.00	-22.57	26.04	0.23	0.59	Average
10	18.232	40.52	60.00	-19.48	39.13	0.23	0.59	QP
11*	19.715	39.20	50.00	-10.80	37.75	0.24	0.60	Average
12	19.715	44.71	60.00	-15.29	43.26	0.24	0.60	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

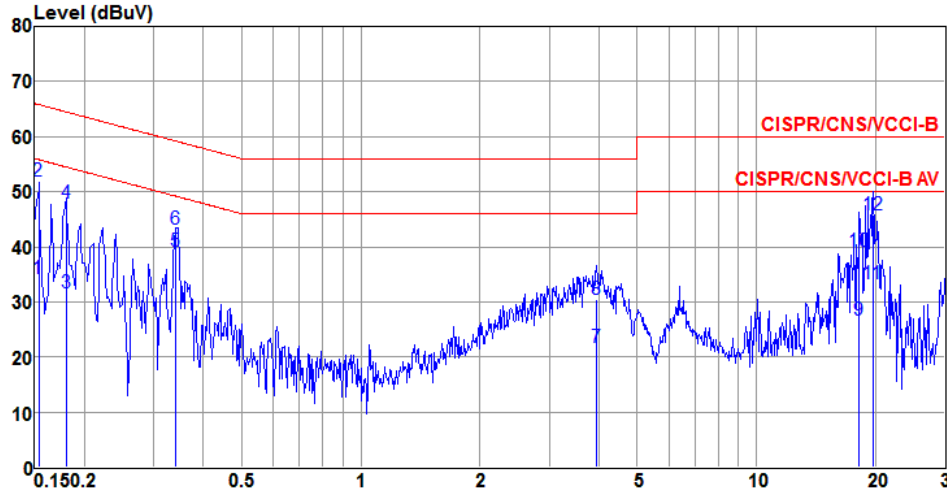Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3																																																																																																																																							
Power Phase	Neutral																																																																																																																																									
Level (dBuV)  <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th></th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.153</td><td>34.23</td><td>55.82</td><td>-21.59</td><td>34.02</td><td>0.05</td><td>0.05</td><td>Average</td></tr><tr><td>2</td><td>0.153</td><td>52.03</td><td>65.82</td><td>-13.79</td><td>51.82</td><td>0.05</td><td>0.05</td><td>QP</td></tr><tr><td>3</td><td>0.180</td><td>31.71</td><td>54.50</td><td>-22.79</td><td>31.48</td><td>0.04</td><td>0.06</td><td>Average</td></tr><tr><td>4</td><td>0.180</td><td>47.94</td><td>64.50</td><td>-16.56</td><td>47.71</td><td>0.04</td><td>0.06</td><td>QP</td></tr><tr><td>5*</td><td>0.339</td><td>39.16</td><td>49.22</td><td>-10.06</td><td>38.91</td><td>0.05</td><td>0.08</td><td>Average</td></tr><tr><td>6</td><td>0.339</td><td>43.25</td><td>59.22</td><td>-15.97</td><td>43.00</td><td>0.05</td><td>0.08</td><td>QP</td></tr><tr><td>7</td><td>3.943</td><td>21.79</td><td>46.00</td><td>-24.21</td><td>21.16</td><td>0.09</td><td>0.28</td><td>Average</td></tr><tr><td>8</td><td>3.943</td><td>30.56</td><td>56.00</td><td>-25.44</td><td>29.93</td><td>0.09</td><td>0.28</td><td>QP</td></tr><tr><td>9</td><td>18.232</td><td>26.68</td><td>50.00</td><td>-23.32</td><td>25.42</td><td>0.25</td><td>0.59</td><td>Average</td></tr><tr><td>10</td><td>18.232</td><td>39.24</td><td>60.00</td><td>-20.76</td><td>37.98</td><td>0.25</td><td>0.59</td><td>QP</td></tr><tr><td>11</td><td>19.740</td><td>33.28</td><td>50.00</td><td>-16.72</td><td>31.97</td><td>0.26</td><td>0.60</td><td>Average</td></tr><tr><td>12</td><td>19.740</td><td>45.80</td><td>60.00</td><td>-14.20</td><td>44.49</td><td>0.26</td><td>0.60</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	Line	Limit	Level	factor	loss					dBuV	dB	dBuV	dB	dB		1	0.153	34.23	55.82	-21.59	34.02	0.05	0.05	Average	2	0.153	52.03	65.82	-13.79	51.82	0.05	0.05	QP	3	0.180	31.71	54.50	-22.79	31.48	0.04	0.06	Average	4	0.180	47.94	64.50	-16.56	47.71	0.04	0.06	QP	5*	0.339	39.16	49.22	-10.06	38.91	0.05	0.08	Average	6	0.339	43.25	59.22	-15.97	43.00	0.05	0.08	QP	7	3.943	21.79	46.00	-24.21	21.16	0.09	0.28	Average	8	3.943	30.56	56.00	-25.44	29.93	0.09	0.28	QP	9	18.232	26.68	50.00	-23.32	25.42	0.25	0.59	Average	10	18.232	39.24	60.00	-20.76	37.98	0.25	0.59	QP	11	19.740	33.28	50.00	-16.72	31.97	0.26	0.60	Average	12	19.740	45.80	60.00	-14.20	44.49	0.26	0.60	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																																		
	MHz	dBuV	Line	Limit	Level	factor	loss																																																																																																																																			
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.153	34.23	55.82	-21.59	34.02	0.05	0.05	Average																																																																																																																																		
2	0.153	52.03	65.82	-13.79	51.82	0.05	0.05	QP																																																																																																																																		
3	0.180	31.71	54.50	-22.79	31.48	0.04	0.06	Average																																																																																																																																		
4	0.180	47.94	64.50	-16.56	47.71	0.04	0.06	QP																																																																																																																																		
5*	0.339	39.16	49.22	-10.06	38.91	0.05	0.08	Average																																																																																																																																		
6	0.339	43.25	59.22	-15.97	43.00	0.05	0.08	QP																																																																																																																																		
7	3.943	21.79	46.00	-24.21	21.16	0.09	0.28	Average																																																																																																																																		
8	3.943	30.56	56.00	-25.44	29.93	0.09	0.28	QP																																																																																																																																		
9	18.232	26.68	50.00	-23.32	25.42	0.25	0.59	Average																																																																																																																																		
10	18.232	39.24	60.00	-20.76	37.98	0.25	0.59	QP																																																																																																																																		
11	19.740	33.28	50.00	-16.72	31.97	0.26	0.60	Average																																																																																																																																		
12	19.740	45.80	60.00	-14.20	44.49	0.26	0.60	QP																																																																																																																																		
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																										

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5																																																																																																																																							
Power Phase	Line																																																																																																																																									
Level (dBuV) Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.150</td><td>32.82</td><td>56.00</td><td>-23.18</td><td>32.58</td><td>0.07</td><td>0.05</td><td>Average</td></tr><tr><td>2*</td><td>0.150</td><td>50.90</td><td>66.00</td><td>-15.10</td><td>50.66</td><td>0.07</td><td>0.05</td><td>QP</td></tr><tr><td>3</td><td>0.180</td><td>30.27</td><td>54.50</td><td>-24.23</td><td>29.99</td><td>0.06</td><td>0.06</td><td>Average</td></tr><tr><td>4</td><td>0.180</td><td>46.23</td><td>64.50</td><td>-18.27</td><td>45.95</td><td>0.06</td><td>0.06</td><td>QP</td></tr><tr><td>5</td><td>0.339</td><td>31.85</td><td>49.22</td><td>-17.37</td><td>31.47</td><td>0.06</td><td>0.08</td><td>Average</td></tr><tr><td>6</td><td>0.339</td><td>39.33</td><td>59.22</td><td>-19.89</td><td>38.95</td><td>0.06</td><td>0.08</td><td>QP</td></tr><tr><td>7</td><td>3.964</td><td>21.11</td><td>46.00</td><td>-24.89</td><td>20.34</td><td>0.11</td><td>0.28</td><td>Average</td></tr><tr><td>8</td><td>3.964</td><td>29.88</td><td>56.00</td><td>-26.12</td><td>29.11</td><td>0.11</td><td>0.28</td><td>QP</td></tr><tr><td>9</td><td>18.232</td><td>28.23</td><td>50.00</td><td>-21.77</td><td>26.84</td><td>0.23</td><td>0.59</td><td>Average</td></tr><tr><td>10</td><td>18.232</td><td>41.32</td><td>60.00</td><td>-18.68</td><td>39.93</td><td>0.23</td><td>0.59</td><td>QP</td></tr><tr><td>11</td><td>19.740</td><td>31.13</td><td>50.00</td><td>-18.87</td><td>29.68</td><td>0.24</td><td>0.60</td><td>Average</td></tr><tr><td>12</td><td>19.740</td><td>44.61</td><td>60.00</td><td>-15.39</td><td>43.16</td><td>0.24</td><td>0.60</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	Line	Limit	Level	factor	loss	Remark				dBuV	dB	dBuV	dB	dB		1	0.150	32.82	56.00	-23.18	32.58	0.07	0.05	Average	2*	0.150	50.90	66.00	-15.10	50.66	0.07	0.05	QP	3	0.180	30.27	54.50	-24.23	29.99	0.06	0.06	Average	4	0.180	46.23	64.50	-18.27	45.95	0.06	0.06	QP	5	0.339	31.85	49.22	-17.37	31.47	0.06	0.08	Average	6	0.339	39.33	59.22	-19.89	38.95	0.06	0.08	QP	7	3.964	21.11	46.00	-24.89	20.34	0.11	0.28	Average	8	3.964	29.88	56.00	-26.12	29.11	0.11	0.28	QP	9	18.232	28.23	50.00	-21.77	26.84	0.23	0.59	Average	10	18.232	41.32	60.00	-18.68	39.93	0.23	0.59	QP	11	19.740	31.13	50.00	-18.87	29.68	0.24	0.60	Average	12	19.740	44.61	60.00	-15.39	43.16	0.24	0.60	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark																																																																																																																																		
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.150	32.82	56.00	-23.18	32.58	0.07	0.05	Average																																																																																																																																		
2*	0.150	50.90	66.00	-15.10	50.66	0.07	0.05	QP																																																																																																																																		
3	0.180	30.27	54.50	-24.23	29.99	0.06	0.06	Average																																																																																																																																		
4	0.180	46.23	64.50	-18.27	45.95	0.06	0.06	QP																																																																																																																																		
5	0.339	31.85	49.22	-17.37	31.47	0.06	0.08	Average																																																																																																																																		
6	0.339	39.33	59.22	-19.89	38.95	0.06	0.08	QP																																																																																																																																		
7	3.964	21.11	46.00	-24.89	20.34	0.11	0.28	Average																																																																																																																																		
8	3.964	29.88	56.00	-26.12	29.11	0.11	0.28	QP																																																																																																																																		
9	18.232	28.23	50.00	-21.77	26.84	0.23	0.59	Average																																																																																																																																		
10	18.232	41.32	60.00	-18.68	39.93	0.23	0.59	QP																																																																																																																																		
11	19.740	31.13	50.00	-18.87	29.68	0.24	0.60	Average																																																																																																																																		
12	19.740	44.61	60.00	-15.39	43.16	0.24	0.60	QP																																																																																																																																		
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																										

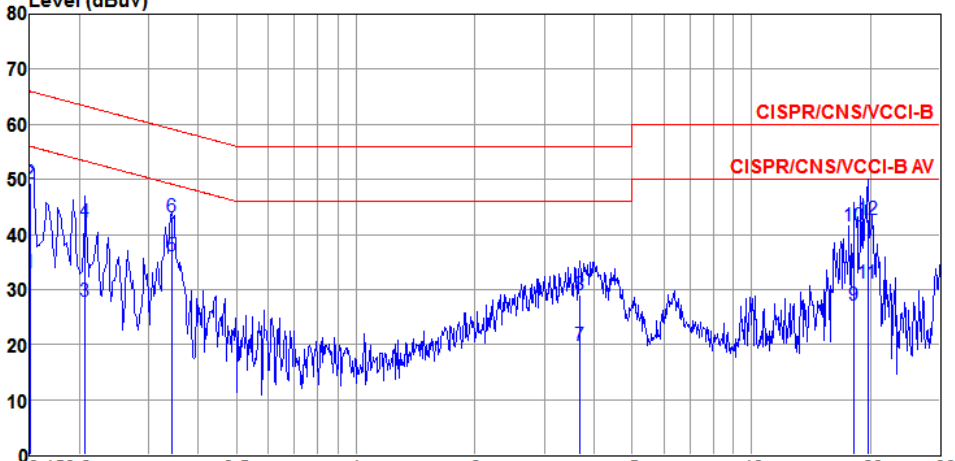Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5																																																																																																																																							
Power Phase	Neutral																																																																																																																																									
Level (dBuV)  Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dBuV</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.150</td><td>33.01</td><td>56.00</td><td>-22.99</td><td>32.80</td><td>0.05</td><td>0.05</td><td>Average</td></tr><tr><td>2</td><td>0.150</td><td>49.40</td><td>66.00</td><td>-16.60</td><td>49.19</td><td>0.05</td><td>0.05</td><td>QP</td></tr><tr><td>3</td><td>0.207</td><td>27.88</td><td>53.32</td><td>-25.44</td><td>27.63</td><td>0.04</td><td>0.07</td><td>Average</td></tr><tr><td>4</td><td>0.207</td><td>42.26</td><td>63.32</td><td>-21.06</td><td>42.01</td><td>0.04</td><td>0.07</td><td>QP</td></tr><tr><td>5*</td><td>0.343</td><td>36.02</td><td>49.13</td><td>-13.11</td><td>35.77</td><td>0.05</td><td>0.08</td><td>Average</td></tr><tr><td>6</td><td>0.343</td><td>43.31</td><td>59.13</td><td>-15.82</td><td>43.06</td><td>0.05</td><td>0.08</td><td>QP</td></tr><tr><td>7</td><td>3.681</td><td>19.75</td><td>46.00</td><td>-26.25</td><td>19.14</td><td>0.09</td><td>0.26</td><td>Average</td></tr><tr><td>8</td><td>3.681</td><td>29.08</td><td>56.00</td><td>-26.92</td><td>28.47</td><td>0.09</td><td>0.26</td><td>QP</td></tr><tr><td>9</td><td>18.232</td><td>27.10</td><td>50.00</td><td>-22.90</td><td>25.84</td><td>0.25</td><td>0.59</td><td>Average</td></tr><tr><td>10</td><td>18.232</td><td>41.50</td><td>60.00</td><td>-18.50</td><td>40.24</td><td>0.25</td><td>0.59</td><td>QP</td></tr><tr><td>11</td><td>19.740</td><td>31.22</td><td>50.00</td><td>-18.78</td><td>29.91</td><td>0.26</td><td>0.60</td><td>Average</td></tr><tr><td>12</td><td>19.740</td><td>42.74</td><td>60.00</td><td>-17.26</td><td>41.43</td><td>0.26</td><td>0.60</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	dBuV	Limit	Level	factor	loss	Remark					dB	dBuV	dB	dB		1	0.150	33.01	56.00	-22.99	32.80	0.05	0.05	Average	2	0.150	49.40	66.00	-16.60	49.19	0.05	0.05	QP	3	0.207	27.88	53.32	-25.44	27.63	0.04	0.07	Average	4	0.207	42.26	63.32	-21.06	42.01	0.04	0.07	QP	5*	0.343	36.02	49.13	-13.11	35.77	0.05	0.08	Average	6	0.343	43.31	59.13	-15.82	43.06	0.05	0.08	QP	7	3.681	19.75	46.00	-26.25	19.14	0.09	0.26	Average	8	3.681	29.08	56.00	-26.92	28.47	0.09	0.26	QP	9	18.232	27.10	50.00	-22.90	25.84	0.25	0.59	Average	10	18.232	41.50	60.00	-18.50	40.24	0.25	0.59	QP	11	19.740	31.22	50.00	-18.78	29.91	0.26	0.60	Average	12	19.740	42.74	60.00	-17.26	41.43	0.26	0.60	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	dBuV	Limit	Level	factor	loss	Remark																																																																																																																																		
				dB	dBuV	dB	dB																																																																																																																																			
1	0.150	33.01	56.00	-22.99	32.80	0.05	0.05	Average																																																																																																																																		
2	0.150	49.40	66.00	-16.60	49.19	0.05	0.05	QP																																																																																																																																		
3	0.207	27.88	53.32	-25.44	27.63	0.04	0.07	Average																																																																																																																																		
4	0.207	42.26	63.32	-21.06	42.01	0.04	0.07	QP																																																																																																																																		
5*	0.343	36.02	49.13	-13.11	35.77	0.05	0.08	Average																																																																																																																																		
6	0.343	43.31	59.13	-15.82	43.06	0.05	0.08	QP																																																																																																																																		
7	3.681	19.75	46.00	-26.25	19.14	0.09	0.26	Average																																																																																																																																		
8	3.681	29.08	56.00	-26.92	28.47	0.09	0.26	QP																																																																																																																																		
9	18.232	27.10	50.00	-22.90	25.84	0.25	0.59	Average																																																																																																																																		
10	18.232	41.50	60.00	-18.50	40.24	0.25	0.59	QP																																																																																																																																		
11	19.740	31.22	50.00	-18.78	29.91	0.26	0.60	Average																																																																																																																																		
12	19.740	42.74	60.00	-17.26	41.43	0.26	0.60	QP																																																																																																																																		
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																										

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

3.2.3 Test Setup

Radiated Emissions below 1 GHz

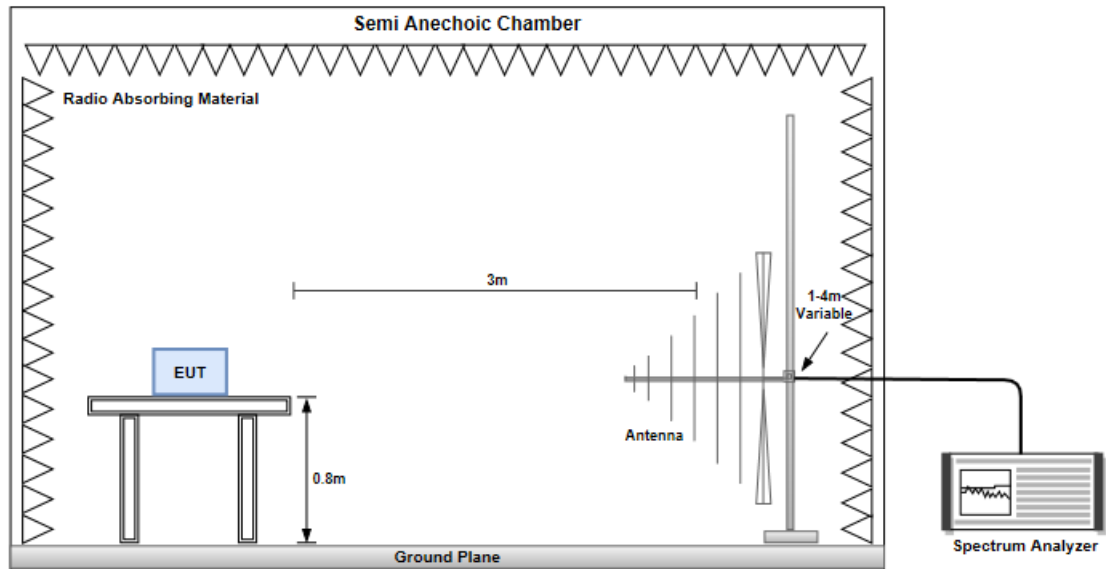


Radiated Emissions above 1 GHz

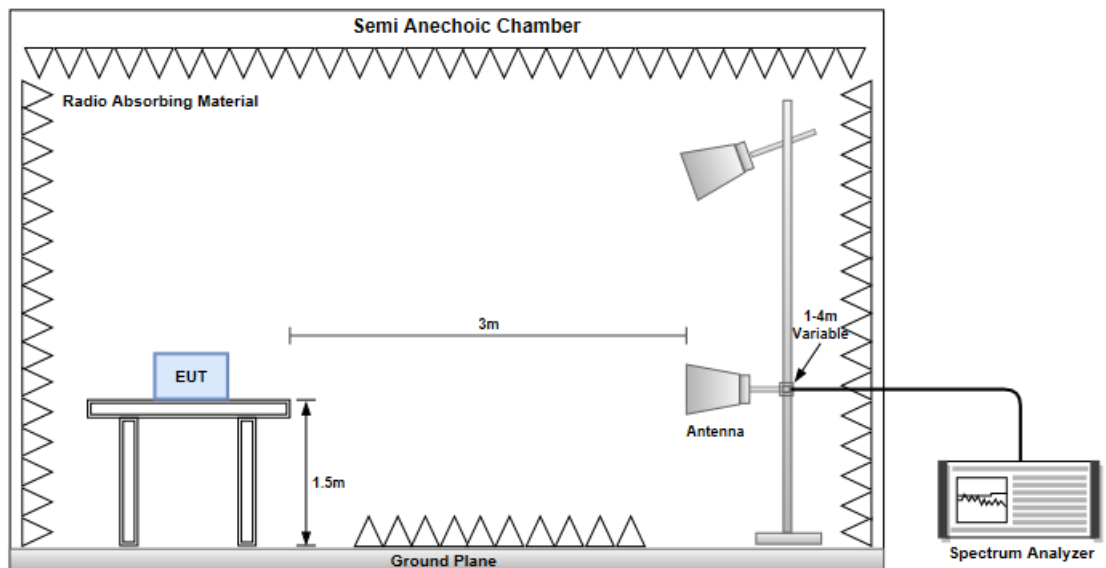

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Vertical		

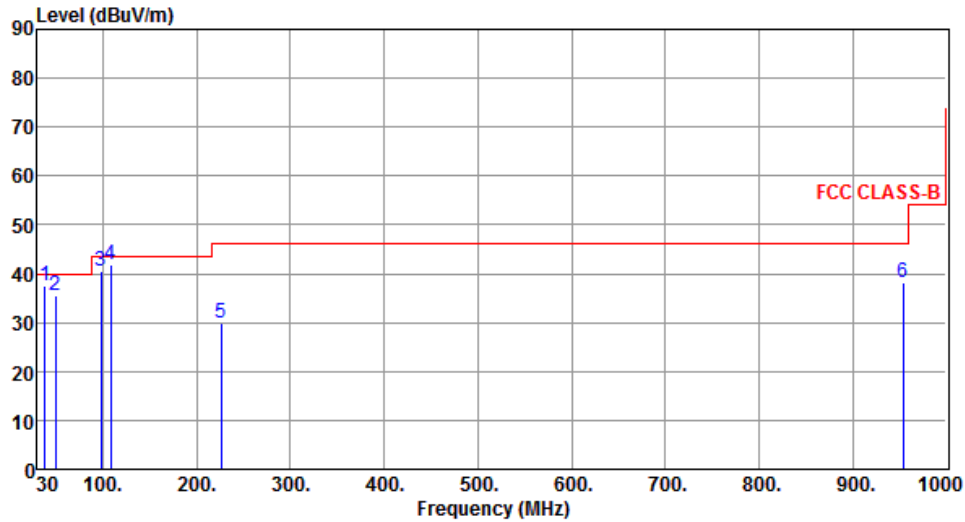

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.49	37.52	40.00	-2.48	46.16	-8.64	QP	100	239
2	49.49	35.41	40.00	-4.59	43.30	-7.89	QP	100	36
3	98.21	40.49	43.50	-3.01	54.21	-13.72	QP	100	305
4	108.51	41.99	43.50	-1.51	54.09	-12.10	QP	100	316
5	226.39	29.95	46.00	-16.05	40.45	-10.50	Peak	---	---
6	953.53	38.15	46.00	-7.85	32.29	5.86	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Horizontal		

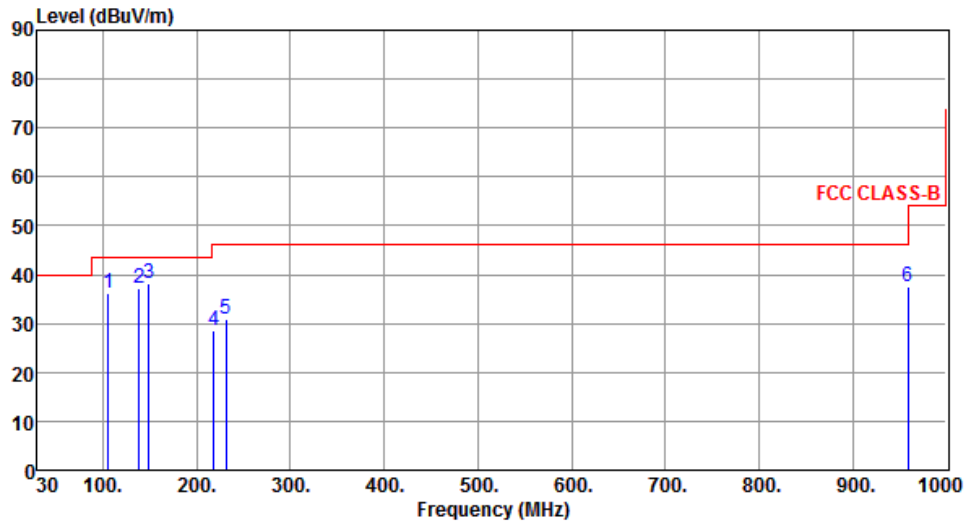

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	105.46	36.27	43.50	-7.23	48.91	-12.64	Peak	---	---
2	138.69	37.34	43.50	-6.16	46.22	-8.88	Peak	---	---
3	148.68	38.15	43.50	-5.35	46.53	-8.38	Peak	---	---
4	218.36	28.64	46.00	-17.36	39.61	-10.97	Peak	---	---
5	231.28	31.05	46.00	-14.95	41.20	-10.15	Peak	---	---
6	959.30	37.45	46.00	-8.55	31.52	5.93	Peak	---	---


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Vertical		

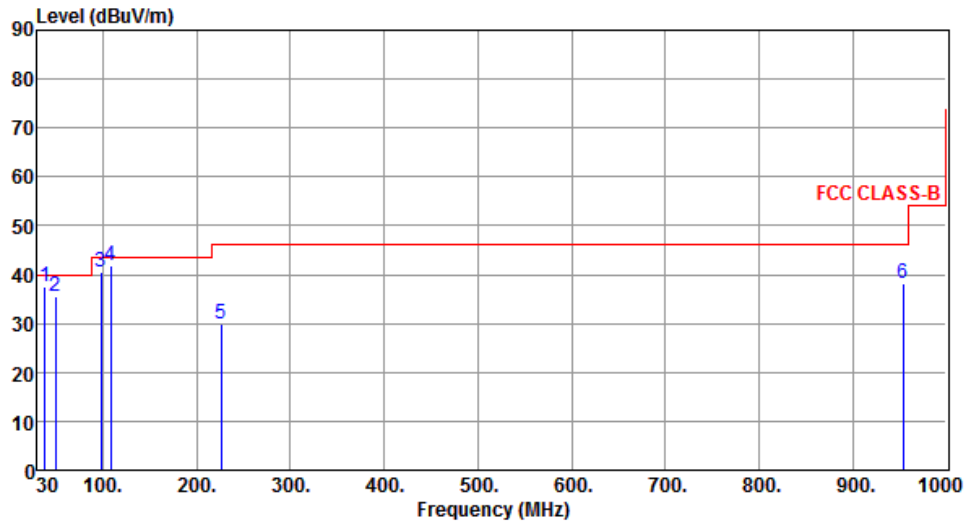

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	38.47	37.55	40.00	-2.45	46.19	-8.64	QP	100	243
2	49.48	35.37	40.00	-4.63	43.26	-7.89	QP	100	38
3	98.15	40.40	43.50	-3.10	54.13	-13.73	QP	100	308
4	108.58	41.97	43.50	-1.53	54.06	-12.09	QP	100	318
5	226.36	29.81	46.00	-16.19	40.31	-10.50	Peak	---	---
6	953.58	38.17	46.00	-7.83	32.31	5.86	Peak	---	---

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation / SF	CSS / 12	Test Freq. (MHz)	923.3
Polarization	Vertical		
Level (dBuV/m) </			

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Horizontal		
Level (dBuV/m) </			

Modulation / SF	CSS / 12	Test Freq. (MHz)	927.5
Polarization	Vertical		

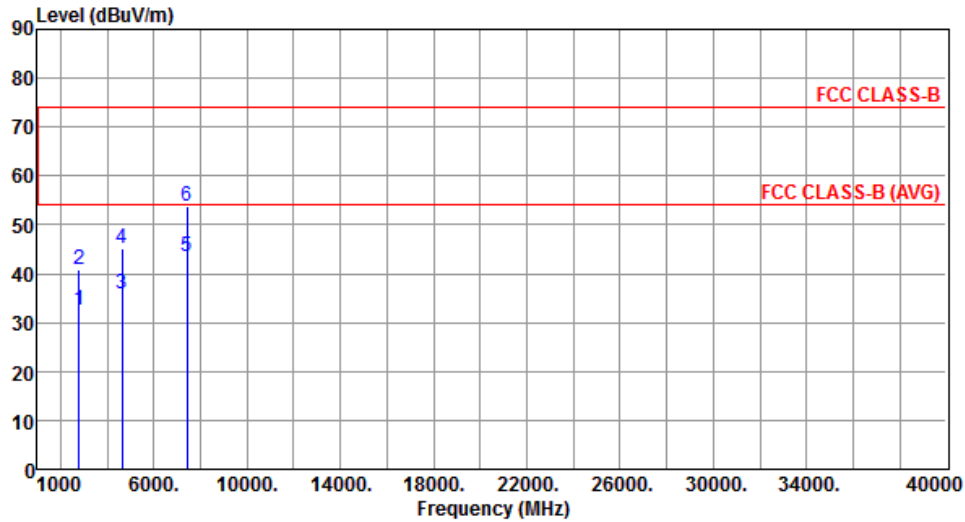

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2782.50	32.67	54.00	-21.33	32.85	-0.18	Average	300	15
2	2782.50	41.01	74.00	-32.99	41.19	-0.18	Peak	300	15
3	4637.50	35.79	54.00	-18.21	31.17	4.62	Average	100	315
4	4637.50	45.32	74.00	-28.68	40.70	4.62	Peak	100	315
5	7420.00	43.40	54.00	-10.60	33.17	10.23	Average	100	168
6	7420.00	53.80	74.00	-20.20	43.57	10.23	Peak	100	168

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==