



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test Report No. : E056R-030

Applicant : HUMAX Co., Ltd.

Address : Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Manufacturer : HUMAX Co., Ltd.

Address : Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Type of Equipment : IP TV RECEIVER (TV Interface Device)

FCC ID : O6ZRG-200

Model Name : RG-200

Serial number : N/A

Total page of Report : 19 pages (including this page)

Date of Incoming : April 11, 2005

Date of Issuing : June 16, 2005

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B**.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: _____

Young-Min, Choi / Project Engineer
EMC Div.
ONETECH Corp.

Reviewed by: _____

Y. K. Kwon / Director
EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION.....	5
2.1 PRODUCT DESCRIPTION	5
2.2 MODEL DIFFERENCES:	5
2.3 RELATED SUBMITTAL(S) / GRANT(S)	5
2.4 TEST SYSTEM DETAILS	5
2.5 TEST METHODOLOGY	6
2.6 TEST FACILITY	6
3. SYSTEM TEST CONFIGURATION.....	6
3.1 JUSTIFICATION	6
3.2 EUT EXERCISE SOFTWARE.....	6
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	8
3.6.1 Line Conducted Test.....	8
3.6.2 Radiated Emission Test	8
3.6.3 Output Signal Level Test	8
3.6.4 Output Terminal Conducted Spurious Emission test.....	8
3.6.5 Transfer Switch Isolation Test	9
4. PRELIMINARY TEST	9
4.1 AC POWER LINE CONDUCTED EMISSION TEST	9
4.2 RADIATED EMISSIONS TESTS.....	9
5. FINAL RESULT OF MEASUREMENT	10
5.1 CONDUCTED EMISSION TEST.....	10
5.2 RADIATED EMISSION TEST	14
5.3 OUTPUT TERMINAL SIGNAL LEVEL TEST.....	15
5.4 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS TEST	16
5.5 TRANSFER SWITCH ISOLATION TEST	17



6. FIELD STRENGTH CALCULATION	18
-------------------------------------	----

7. LIST OF TEST EQUIPMENT	19
---------------------------------	----

**1. VERIFICATION OF COMPLIANCE**

- APPLICANT : HUMAX Co., Ltd.
- ADDRESS : Humax Bldg., 212-1, Yubang-Dong, Yongin-Si, Gyeonggi-Do, 449-080, Korea
- CONTACT PERSON : Mr. Jung-Jae, Choi / Engineering Manager
- TELEPHONE NO : +82-31-600-6362
- FCC ID : O6ZRG-200
- MODEL NAME : RG-200
- BRAND NAME : HUMAX
- SERIAL NUMBER : N/A
- DATE : June 16, 2005

EQUIPMENT CLASS	HID – Part 15 TV INTERFACE DEVICE
E.U.T. DESCRIPTION	IP TV RECEIVER - Unintentional Radiator
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

- This device has shown compliance with the conducted emissions limits in 15.107 adopted under FCC 02-107 (ET Docket 98-80). The device may be marketed after July 11, 2005 affected by the 15.37(j) transition provisions.
- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



2. GENERAL INFORMATION

2.1 Product Description

The HUMAX Co., Ltd., Model RG-200 (referred to as the EUT in this report) is an IP TV RECEIVER that has two kinds of memory types, HDD or CF memory, and has a RF modulator for TV interfacing and Peripheral Device for Class B Computing Device functions. The report for the Peripheral Device for Class B Computing Device with Part 15 shall be issued with other report number and submitted as composite device simultaneously. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Metal
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	14.31818MHz, 16.83MHz, 24.576MHz, 25MHz, 33MHz, 66MHz, 48MHz and 133MHz on the main board. 24.000MHz on the front board
NUMBER OF LAYERS	4 Layers: Main Board, 2Layers: SCART Board and Front Board, 1 Layer: PU311S
ELECTRICAL RATING	AC 120V~, 60Hz, 2.0A
TUNER M/N / MFR	RMVP13450WD / SAMSUNG
EXTERNAL TERMINALS	Video Out, Audio Out, S-Video Out, Optical Out, Coaxial Out, IR Out, RS-232 Port, VGA Port, USB 2 Ports, Ethernet Port

2.2 Model Differences:

- None

2.3 Related Submittal(s) / Grant(s)

- Original submittal only

2.4 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
RG-200	HUMAX Co., Ltd.	N/A	IP TV RECEIVER (EUT)	-
PP05LC	Dell Computer.	N/A	Notebook PC	EUT
LT201CB	KTV Global	DoC	LCD TV	EUT
LT 416	LEADER	N/A	Pattern Generator	EUT
MO56UO	N/A	N/A	Mouse	EUT
3500U	BTC	N/A	Keyboard	EUT



2.5 Test Methodology

The measurement for radiated emission, line conducted emission, output signal level, output terminal conducted spurious emission and transfer switch isolation tests were performed in accordance with the procedures described in ANSI C63.4: 2003. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.6 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-080, Korea. Description details of test facilities were submitted to the Commission on April 04, 2003. (Registration Number: 340658)

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	HUMAX Co., Ltd.	N/A	N/A
Front Board	HUMAX Co., Ltd.	RG-200 FRONT	N/A
Power Board	Sung Ho Electronics	PE 311S	N/A
HDD	Seagate	ST380012ACE	N/A
Memory	N/A	M2S5H04A PS	N/A
Scart Board	HUMAX Co., Ltd.	RG-200 SCART	N/A

3.2 EUT exercise Software

The EUT was received satellite signal from dish antenna and then the signals were transmitted to IP TV RECEIVER using the audio/video cables and other cables were terminated with resistance load.

During the test, each channel 3 & 4 was tested, but the worst emissions were recorded in this report.



3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
IP TV RECEIVER	N	N	1.5(P), 1.5(D)
Notebook PC	N	-	1.5(P)
LCD TV	N	N	1.5(P), 1.5(D)
Pattern Generator	N	N	1.5(P), 1.5(D)
Mouse	N/A	N	1.5(D)
Keyboard	N/A	N	1.5(D)

* The marked "(P)" means the Power Cable and "(D)" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
IP TV RECEIVER	N	N/A	Y	BOTH END
Notebook PC	-	-	-	-
LCD TV	N	N/A	Y	BOTH END
Pattern Generator	N	N/A	Y	BOTH END
Mouse	N	N/A	Y	Notebook PC END
Keyboard	N	N/A	Y	Notebook PC END

3.5 Equipment Modifications

-. None

3.6 Configuration of Test System

3.6.1 Line Conducted Test

The EUT was connected to LISN, all supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4: 2003 7.2.3 to determine the worse operating conditions.

3.6.2 Radiated Emission Test

Preliminary radiated emission test was conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

3.6.3 Output Signal Level Test

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at 3 and 4 channel connecting directly to a spectrum analyzer with 50ohm input impedance via 75-to-50ohm matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75ohm system.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
CF : Conversion Factor of the matching pad in dB.

3.6.4 Output Terminal Conducted Spurious Emission test

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at 3 and 4 channel.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF + AT)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
CF : Conversion Factor of the matching pad in dB,
AT : Attenuation of attenuator in dB.

3.6.5 Transfer Switch Isolation Test

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Data conversion method is as follows.

$$V_{75}[\text{uV}] = 10^{(V_r + CF - PG + AT)/20}[\text{uV}]$$

here, V_{75} : Voltage at the RF-out terminal of 75ohm in uV,
 V_r : Voltage read at analyzer with 50ohm input-impedance in dBuV,
CF : Conversion Factor of the matching pad in dB,
PG : Gain of pre-amplifier in dB,
AT: Attenuation of attenuator in dB.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

4.2 Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated.

Operation Mode	The Worse operating condition (Please check one only)
CH. 3	X
CH. 4	

**5. FINAL RESULT OF MEASUREMENT**

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test

Humidity Level : 43 % Temperature: 21 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107 (a)
 Type of Test : CLASS B
 Result : PASSED BY -14.98 dB at 0.20 MHz under CF type

EUT : IP TV RECEIVER Date: April 27, 2005
 Operating Condition : CH. 3
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)
 Operating Condition : The HDD was installed into the EUT.

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.20	N	45.13	63.61	-18.48
0.34	N	42.67	59.20	-16.53
2.37	N	35.60	56.00	-20.40
4.68	N	35.86	56.00	-20.14
9.50	N	36.51	60.00	-23.49
20.99	N	34.42	60.00	-25.58
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
-				
-				

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line, "P": Peak detect

Average mode was not measured, because peak values were under the Average limit.

See next page for an overview sweep performed with peak detector.



Operating Condition : The CF type memory card was installed into the EUT.

Frequency (MHz)	Line	Peak (dBuV)		Margin (dB)
		Emission level	Q.P Limits	
0.20	N	48.63	63.61	-14.98
0.40	N	40.21	57.85	-17.64
0.73	N	34.64	56.00	-21.36
8.60	N	37.69	60.00	-22.31
21.78	N	36.03	60.00	-23.97
22.39	H	35.15	60.00	-24.85
Frequency (MHz)	Line	Average (dBuV)		Margin (dB)
		Emission level	Limits	
-				
-				

Line Conducted Emission Tabulated Data

Remark : "H": Hot Line, "N": Neutral line


Average mode was not measured, because Peak values were under the Average limit.

See next page for an overview sweep performed with peak detector.


Tested by: Sue-Yong, Lee / Test Engineer



Operating Condition : The HDD was installed into the EUT.

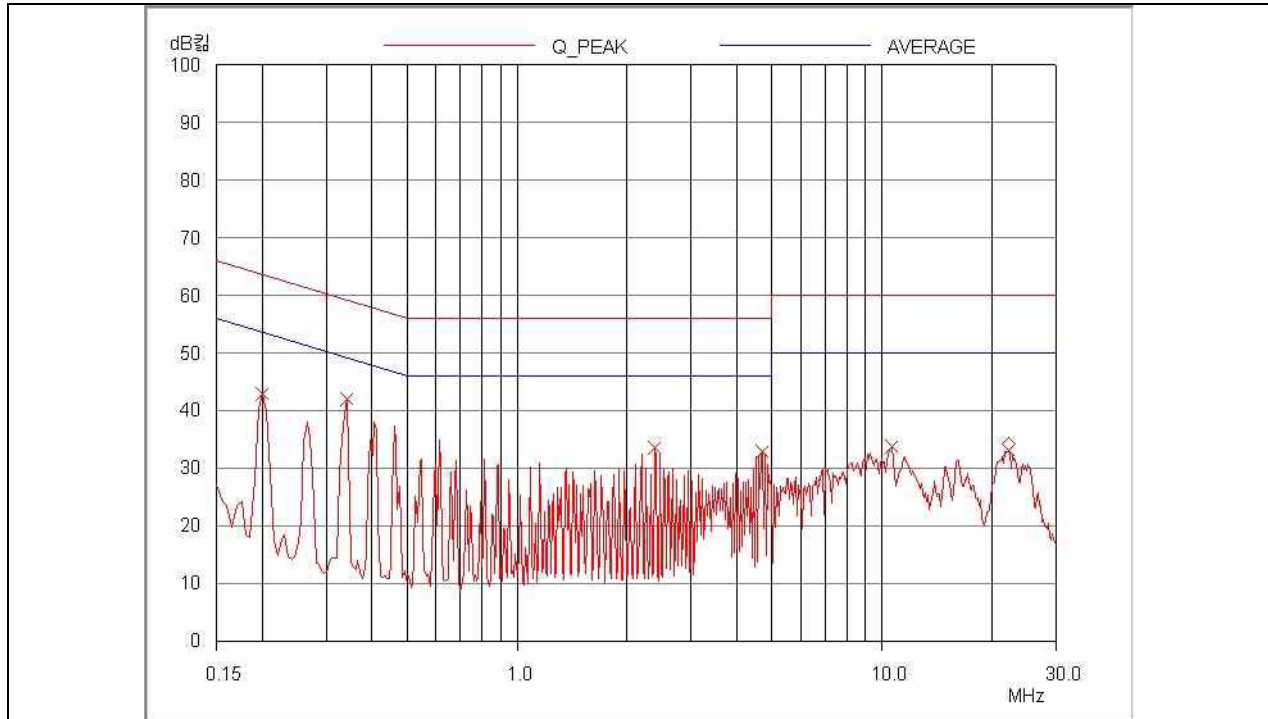

HOT LINE

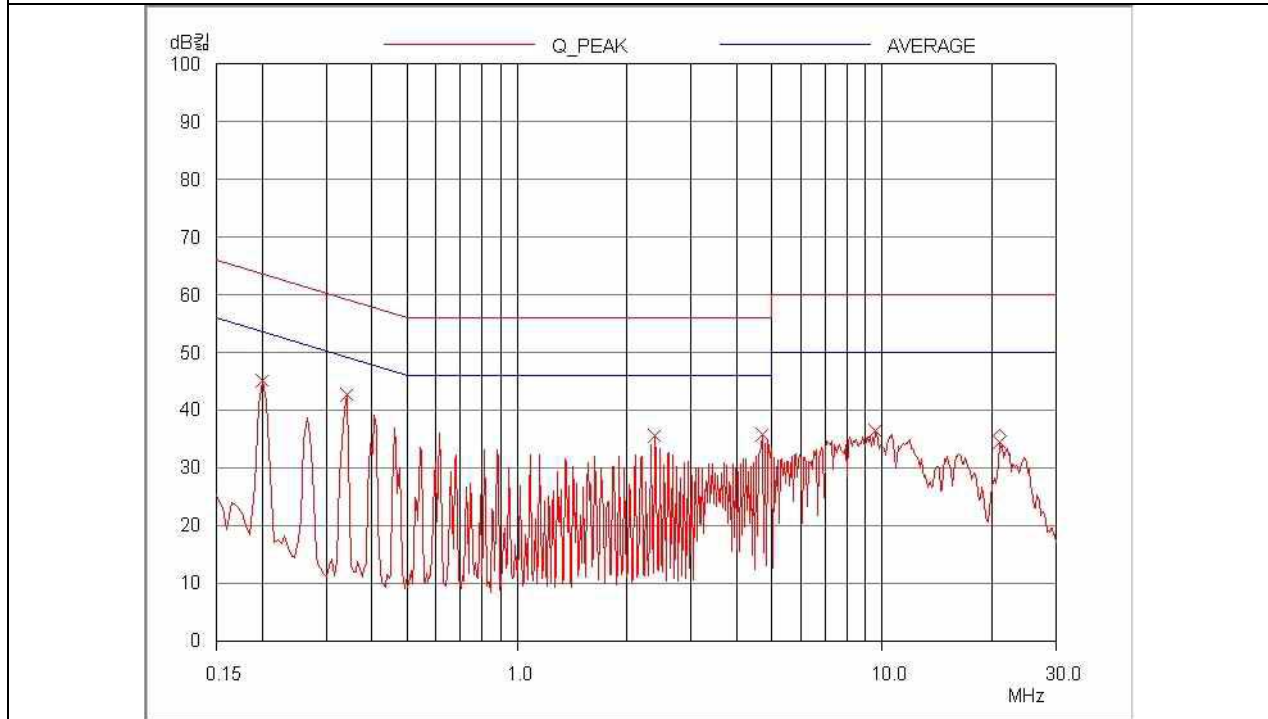

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.


FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)


EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



Operating Condition : The CF type memory card was installed into the EUT.

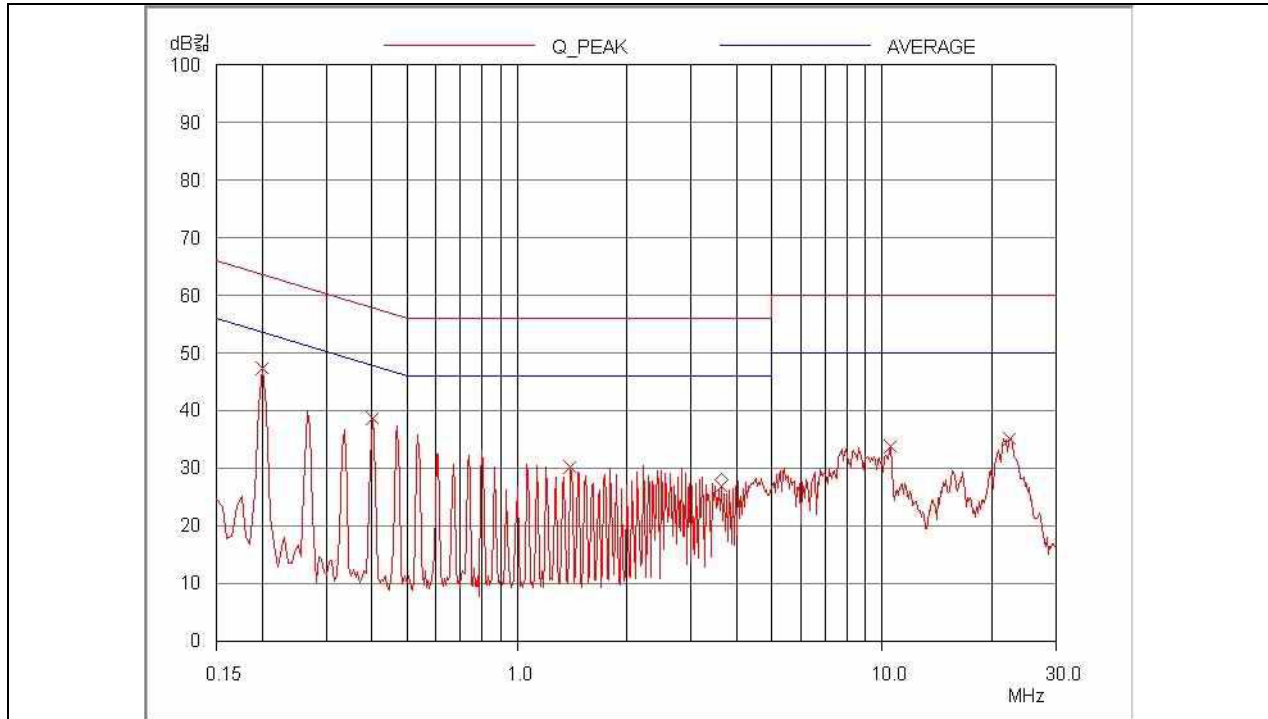

HOT LINE

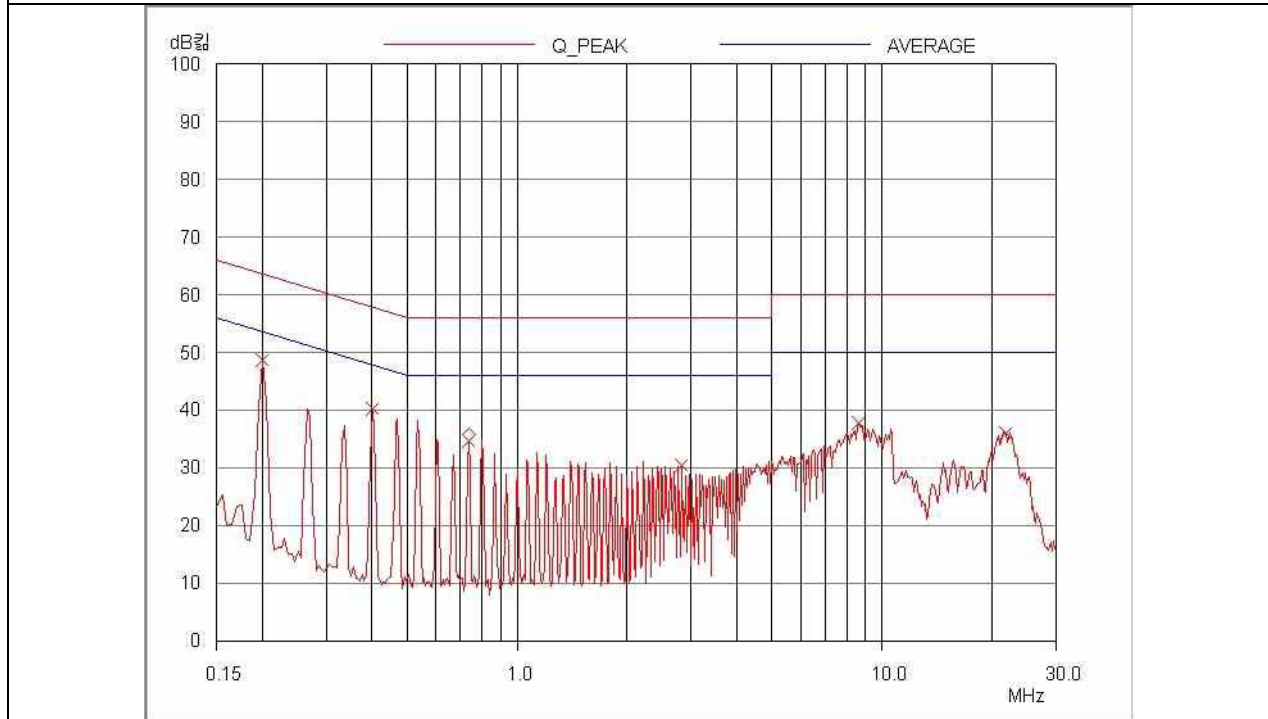

NEUTRAL LINE

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

**5.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 41 % Temperature : 20 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, Section 15.109 (a)
 Type of Test : TV INTERFACE DEVICE
 Result : PASSED BY -3.41 dB at 383.97 MHz under HDD Type

EUT : IP TV RECEIVER Date: April 20, 2005
 Operating Condition : CH. 3
 Frequency range : 30MHz – 2000MHz
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter
 Operating Condition : The HDD was installed into the EUT.

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
71.67	24.54	V	5.72	1.53	31.79	40.00	-8.21
121.09	22.65	V	13.06	2.02	37.73	43.52	-5.79
238.34	21.88	V	16.76	3.21	41.85	46.02	-4.17
383.97	23.17	H	15.10	4.34	42.61	46.02	-3.41
431.18	20.47	H	16.28	4.46	41.21	46.02	-4.81
455.41	19.51	H	16.82	4.61	40.94	46.02	-5.08
623.05	14.33	H	18.94	5.48	38.75	46.02	-7.27
719.95	8.98	H	20.83	6.60	36.41	46.02	-9.61

Operating Condition : The CF type memory card was installed into the EUT.

Radiated Emission		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
71.67	25.77	V	5.72	1.53	33.02	40.00	-6.98
96.86	20.89	V	9.54	1.90	32.33	43.52	-11.19
121.09	23.44	V	13.06	2.02	38.52	43.52	-5.00
146.28	20.17	V	14.94	2.34	37.45	43.52	-6.07
431.18	20.74	H	16.28	4.46	41.48	46.02	-4.54

Radiated Emission Tabulated Data

It should not be reproduced except in full, without the written approval of ONETECH.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-705, Korea
 (TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daessangryung-Ri, Chowol-Eup, Kwangju-City, Kyunggi-Do, 464-860, Korea. (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



5.3 Output Terminal Signal Level Test

The following table shows that the all modes of operation and worst-case emissions were investigated

Humidity Level : 41 %

Temperature : 20 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: April 20, 2005

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

- Video signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	61.25	55.5	6.0	1188.50	3000	-8.04
4	67.27	35.8	6.0	123.03	3000	-27.74

- Audio signal

CH	Freq.(MHz)	Reading(dBuV)	M/P Loss(dB)	Signal Level(uV)	Limit(uV)	Margin(dB)
3	56.70	39.5	6.0	188.36	671	-11.03
	65.79	38.6	6.0	169.82	671	-11.93
4	62.73	20.4	6.0	20.89	671	-30.14
	71.82	19.6	6.0	19.05	671	-30.94

MP = Impedance Matching Pad

*Sample Calculation at 61.25MHz = $10^{[(55.5 + 6.0)/20]} = 1188.50\text{uV}$

*Margin [dB] = 20 log (R/L) where, R : Signal Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer

**5.4 Output Terminal Conducted Spurious Emissions Test**

The following table shows that frequency range of 30MHz to 1000MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.

Humidity Level : 41 %Temperature : 20 °CLimits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: April 20, 2005

Detector : Span : 10MHz SWP : 2 sec

RBW : 100kHz VBW : 300kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Reading (dBuV)	M/P Loss (dB)	Output Level(uV)	Limit (uV)	Margin (dB)
3	121.2	11.7	6.0	7.67	95.00	-21.86
	182.3	10.5	6.0	6.68	95.00	-23.06
	817.6	11.4	6.0	7.41	95.00	-22.16
	865.2	12.7	6.0	8.61	95.00	-20.85
4	816.7	10.3	6.0	6.53	95.00	-23.26
	964.1	9.0	6.0	5.62	95.00	-24.56

* Sample Calculation at 121.2MHz = $10^{[(11.7 + 6.0)/20]} = 7.67\mu\text{V}$

*Margin [dB] = 20 log (R/L) where, R : Output Level, [uV] or [uV/m],

L : Corresponding Limit, [uV] or [uV/m].

Tested by: Sue-Yong, Lee / Test Engineer

**5.5 Transfer Switch Isolation Test**

The following table shows that the maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

Humidity Level : 41 %Temperature : 20 °CLimits apply to : FCC CFR 47, PART 15, SUBPART B (Section 15.115)

EUT : DIGITAL SATELLITE RECEIVER

Date: April 20, 2005

Detector : Span : 1 MHz SWP : 30 msec

RBW : 10 kHz VBW : 30 kHz

Output Impedance of RF-Output Terminal: 75ohm

CH.	Freq. (MHz)	Meter Reading (dBuV)	M/P Loss (dB)	Preamp Gain(dB)	Attn. (dB)	Signal Level (uV)	Limit (uV)	Margin (dB)
“There was no found any emission during the above test”								

Note : To clarify the emissions emanated from RF output terminal the EUT, RF pre-amplifier was utilized.

The gain of pre-amplifier at each frequency measured from the EUT was obtained after sufficient warm-up for stabilization of gain.

Tested by: Sue-Yong, Lee / Test Engineer



6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

**7. LIST OF TEST EQUIPMENT**

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/04	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/04	12MONTH	■
3.	Spectrum analyzer	HP	8566B	3407A08547	JUL/04	12MONTH	
4.	Spectrum analyzer	HP	85680B	3001A04955	APR/05	12MONTH	■
5.	RF preselector	HP	85685A	3107A01264	APR/05	12MONTH	■
6.	Quasi-Peak Adapter	HP	8574B	2811A01432	APR/05	12MONTH	■
7.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 166	FEB/05	12MONTH	
8.	Biconical antenna	EMCO	3104C	9109-4443	MAY/04	12MONTH	■
		Schwarzbeck	VHA9103	91031852	JAN/05		
9.	Log Periodic antenna	EMCO	3146	9109-3213	FEB/05	12MONTH	■
				9109-3217	MAY/04		
		Schwarzbeck	9108-A(494)	62281001	JAN/05		
10.	LISN	EMCO	3825/2	9109-1867	JUL/04	12MONTH	
				9109-1869	OCT/04		■
		Schwarzbeck	NSLK 8126	8126-404	MAY/04		■
11.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
12.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
13.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■