

# Nemko Korea CO., Ltd.

300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

TEL:+82 31 322 2333 FAX:+82 31 322 2332

## FCC EVALUATION REPORT FOR CERTIFICATION

**Manufacturer :**

**Humax Co., Ltd.**

**Humax Venture Tower 271-2, Seohyeon-dong**

**Bundang-ku, Seongnam-city, Kyungki-Do, Korea**

**Attn : Mr. Bong-kyu, Kwon**

**Dates of Issue : July 26, 2002**

**Test Report No. : NK2CE517**

**Test Site : Nemko Korea Co., Ltd.**

**EMC site, Korea**

**FCC ID**

***O6ZSIR-TS160***

**Brand Name**

***SAMSUNG***

**Contact Person**

**Humax Co., Ltd.**

**Humax Venture tower 271-2, Seohyeon-dong,  
Bundang-ku, Seongnam-city, Kyungki-do, Korea**

**Mr. Bong-kyu, Kwon**

**Telephone No. : +82 31 600 6553**

FCC Rule Part(s):

Part 15 & 2

Classification :

FCC Class B Device

EUT Type:

Satellite Receiver


The device bearing the Brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



**Tested By : C. S. Choi**

**Engineer**



**Reviewed By : H.H. Kim**

**Manager & Chief Engineer**

## **TABLE OF CONTENTS**

---

<b>SCOPE</b>	<b>3</b>
<b>INTRODUCTION (Site Description)</b>	<b>4</b>
<b>GENERAL TEST CONDITION</b>	<b>5</b>
<b>DESCRIPTION OF TEST (Conducted Emissions)</b>	<b>6</b>
<b>DESCRIPTION OF TEST (Radiated Emissions)</b>	<b>7</b>
<b>DESCRIPTION OF TEST (Antenna-conducted Power Emissions)</b>	<b>8</b>
<b>DESCRIPTION OF TEST (Output-conducted Level Emissions)</b>	<b>9</b>
<b>DESCRIPTION OF TEST (Antenna Transfer Switch Emissions)</b>	<b>10</b>
<b>TEST DATA (Conducted Emissions)</b>	<b>11</b>
<b>TEST DATA (Radiated Emissions)</b>	<b>12</b>
<b>TEST DATA (Antenna-conducted Power Emissions)</b>	<b>13</b>
<b>TEST DATA (Output-conducted Level Emissions)</b>	<b>16</b>
<b>TEST DATA (Antenna Transfer Switch Emissions)</b>	<b>17</b>
<b>PLOT OF EMISSION</b>	<b>18</b>
<b>SAMPLE CALCULATIONS</b>	<b>28</b>
<b>ACCURACY of MEASUREMENT</b>	<b>29</b>
<b>LIST of TEST EQUIPMENT</b>	<b>30</b>
<b>RECOMMENDATION/CONCLUSION</b>	<b>31</b>
<b>APPENDIX A - LABELLING REQUIREMENTS</b>	<b>32</b>
<b>APPENDIX B - CIRCUIT DIAGRAM</b>	<b>33</b>
<b>APPENDIX C - PHOTOGRAPHS of TEST SET-UP</b>	<b>34</b>
<b>APPENDIX D - EUT PHOTOGRAPHS</b>	<b>38</b>
<b>APPENDIX E - USER'S MANUAL</b>	<b>53</b>
<b>APPENDIX F - SCHEMATIC DIAGRAM</b>	<b>54</b>

## **SCOPE**

*Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission under FCC part 15.*

<b>Responsible Party* :</b>	Humax Co., Ltd.
<b>Contact Person :</b>	Mr. Bong-kyu, Kwon Tel No.: +82 31 600 6553
<b>Manufacturer :</b>	Humax Co., Ltd. Humax venture tower 271-2, Seohyeon-dong, Bundang-ku, Seongnam-city, Kyungki-Do, Korea Tel: +82 31 600 6553 / Fax: +82 31 600 6549

- FCC ID: O6ZSIR-TS160
- Model: SIR-TS160
- Brand Name: Samsung
- EUT Type: Satellite Receiver
- Input Impedance: 75ohm unbalanced
- Voltage: 120V AC 60Hz, 42W
  
- Classification: FCC Class B
- Rule Part(s): FCC Part 15 & Part 2
- Test Procedure(s): ANSI C63.4 (1992)
- Dates of Test: July 18, 2002 to July 26, 2002
- Place of Tests: Nemko Korea Co., Ltd. EMC Site
- Test Report No.: NK2CE517

*\* NOTE: Please refer to the duties and responsibilities of the Responsible Party attached.*

## INTRODUCTION

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-1992) was used in determining radiated and conducted emissions emanating from **Humax Co., Ltd.**

FCC ID : **O6ZSIR-TS160,Satellite Receiver.**

These measurement tests were conducted at **Nemko Korea Co., Ltd. EMC Laboratory .**

The site address is 300-2, Osan-Ri, Mohyun-Myun, Yongin-City, Kyungki-Do, KOREA

The area of Nemko Korea Corporation LTD. EMC Test Site is located in a mountain area at 50 kilometers (30 miles) southeast and Seoul International Airport (Kimpo Airport), 30 kilometers (18miles) south-southeast from central Seoul.

It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures.

The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 1992.



Nemko Korea Co., Ltd.  
 OPEN AREA TEST SITE  
 300-2, Osan-Ri, Mohyun-Myun, Yongin-  
 City Kyungki-Do, KOREA 449-852  
 Tel)+82-31-322-2333  
 Fax)+82-31-322-2332

Fig. 1. The map above shows the Seoul in Korea vicinity area.

The map also shows Nemko Korea Corporation Ltd. EMC Lab and Kimpo Airport.

## **TEST CONDITIONS & EUT INFORMATION**

---

### **Operating During Test**

The receiver was tuned to the output frequency of color bar signal generator, with a pattern defined as 100/0/75/0 in the CCIR recommendation 471.

### **Support Equipment**

Equipment	Manufacturer	Model	Serial Number
PC	Intel Corp.	BSG-200	BLS203810068
LCD Monitor	Samsung	RB15NS	N136H1ERC00400
Modulator	Conexant System	CM2000	000442
RF Generator	Doctor Design	RF-100	N/A
Keyboard	MITSUMI	KFK-EA4XT	N/A
Mouse	H.P	M-S48a	LZE03050735
Simulator(ATSC)	SENCORE	HDTV996	N/A

### **EUT Information**

Clock :	26.8MHz(X101), 4MHz(X102), 18.43MHz(X211) 8MHz(X601), 4.9152MHz(X701)
Chipset(s) :	BCM3510KPF(U109), STU0299B(U113) VPX3226E(U203), MSP3425G(U204),
Port(s) :	Air In, Satellite In, Video/Audio Out, Audio In, S-video Component Out, RGB Out, DVI/HDCP Out, Dolby Digital. TV out, Tel line

## DESCRIPTION OF TESTS

### Conducted Emissions

The Line conducted emission test facility is located inside a 4 X 7 X 2.5 meter shielded enclosure.

It is manufactured by EM engineering. The shielding effectiveness of the shielded room is in accordance with MIL-STD-285 or NSA 65-6.

A 1mX 1.5M wooden table 0.8m height is placed 0.4m away from the vertical wall and 1.5m away from the side of wall of the shielded room

Kyoritsu LISNs, 50ohm/50uH line impedance stabilization network are bonded to the shielded room. The EUT and the support equipment are powered from the Kyoritsu LISNs.

Power to the LISN s are filtered by high-current high insertion loss

Power line filters. The purpose of filter is to attenuate ambient signal interference and this filter is also bonded to shielded enclosure. All electrical cables are shielded by tinned copper zipper tubing with inner diameter of 1/2".

If DC power device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the LISNs,

All interconnecting cables more than 1 meter were shortened by non inductive bundling (serpentine fashion) to a 1 meter length.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT. The spectrum was scanned from 450KHz to 30MHz with 20msec sweep time.

The frequency producing the maximum level was re-examined using the EMI test receiver. (Rohde & Schwarz ESCS30).

The detector function was set to CISPR quasi-peak mode.

The bandwidth of receiver was set to 9KHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission.

Each emission was maximized by; switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R&S signal generator.

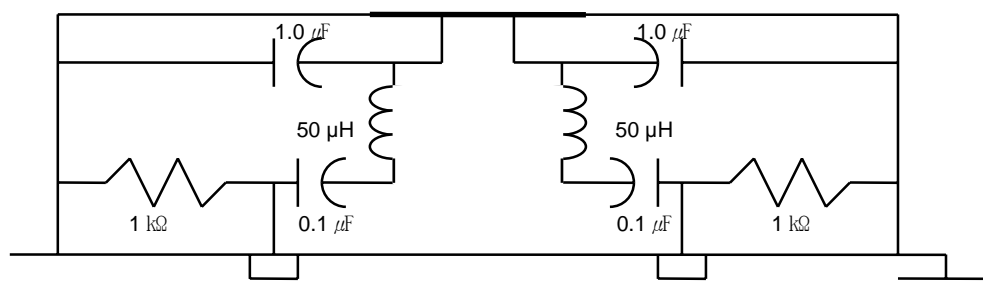


Fig. 2. LISN Schematic Diagram

## DESCRIPTION OF TESTS

### Radiated Emissions

Preliminary measurement were made indoors at 1 meter using broad band antennas, broadband amplifier, and spectrum analyzer to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The Technology configuration, clock speed, mode of operation or video resolution, turntable azimuth with respect to the antenna was note for each frequency found.

The spectrum was scanned from 30 to 1000MHz using Biconical log Antenna(ARA, LPB-2520/A). Above 1GHz, log periodic antenna (Rohde Schwarz HL025:upto 18GHz) was used.

Final Measurements were made outdoors at 3 or 10m test range using Logbicon Super Antenna(Schwarzbeck, VULB9166) or log periodic antenna.( Rohde Schwarz HL025)

The test equipment was placed on a wooden table.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was reexamined and investigated using EMI test receiver.(ESCS30)

The detector function was set to CISPR quasi-peak mode and the bandwidth of the receiver was set to 120KHz or 1MHz depending on the frequency or type of signal.

The half wave dipole antenna was tuned to the frequency found during preliminary radiated measurements.

The EUT support equipment and interconnecting cables were re configured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8m high non- metallic 1.0X 1.5 meter table.

The EUT, support equipment and interconnecting cables were re-arranged and manipulated to maximize each EME emission.

The turn table containing the Technology was rotated; the antenna height was varied 1 to 4meter and stopped at the azimuth or height producing the maximum emission Each emission was maximized by : switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and of support equipment, and powering the monitor from the floor mounted outlet box and computer aux AC outlet, if applicable; which ever determined the worst case emission.

Each EME reported was calibrated using the R/S signal generator.

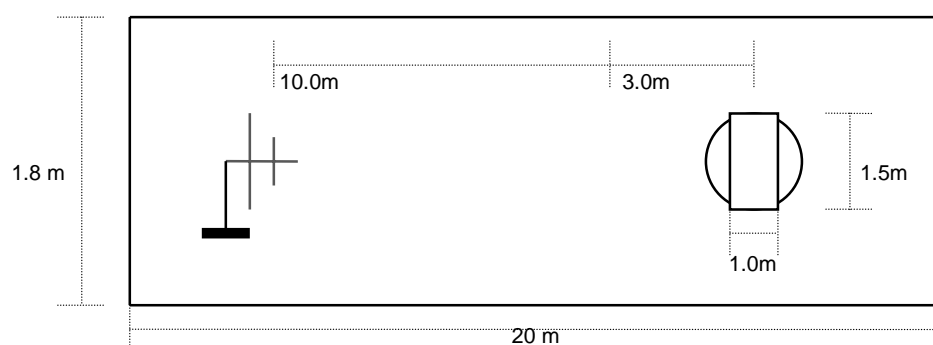


Fig. 3. Dimensions of Outdoor Test Site

## ***DESCRIPTION OF TESTS***

---

### **Antenna-Conducted Power Measurements**

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals.

Antenna –conducted power measurements was performed with the EUT antenna terminals connected directly to measuring instrument (Rohde&Schwarz, ESCS 30) using a impedance-matching network(Rohde&Schwarz, RAM358.5414.02 ) to connect the measurement instrument to the antenna terminals of the EUT. Losses in decibels in impedance-matching network used was added to the measured values in dBuV.

With the receiver tuned to one of the number of frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements. The measurements was repeated with the receiver tuned to another frequency until the number of frequencies had been successively measured.

Power on the receive antenna terminals in the ratio of  $V^2/R$ , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

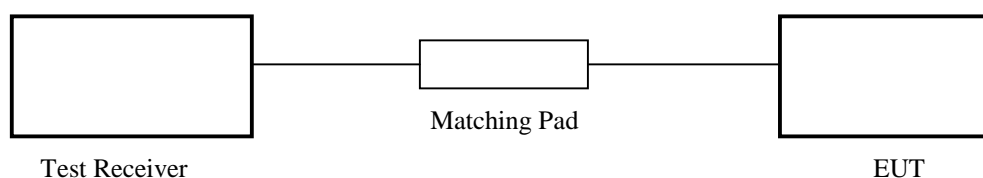


Fig. 4. Description of Test



## ***DESCRIPTION OF TESTS***

---

### **Output-Conducted Level Measurements**

The output signal level was the maximum voltage level present at the output terminal of EUT on a particular frequency during normal use.

Measurements was made of the levels of the aural carrier, visual carrier and all spurious emissions.

Measurements was made by direct connection to the measuring instrument(Rohde&Schwarz, ESCS 30) with proper impedance matching(Rohde&Schwarz, RAM358.5414.02 ) between the measuring instrument and the EUT.

Losses in decibels in impedance-matching network used was added to the measured values in dBuV. The cable was supported between the EUT and the measuring instrument in a straight horizontal line so it had at least 75 cm clearance from any conducting surface.

The EUT was provided with a typical signal consistent with normal operation. For each channel on which the EUT operated and in each mode in which the EUT operated the level the video carrier, audio carrier, the spurious emissions over the frequency range measured and recorded.

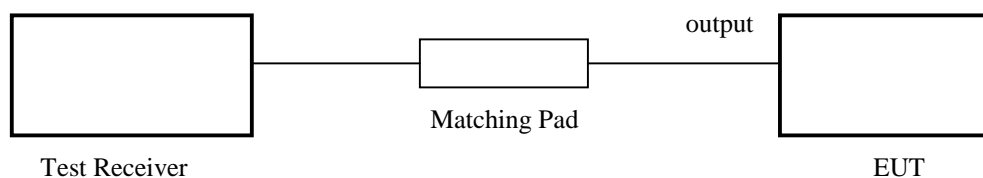


Fig. 5. Description of Test

## ***DESCRIPTION OF TESTS***

---

### **Antenna Transfer Switch Measurements**

Isolation was measured for all positions of an antenna transfer switch on all output channels of the EUT. For the transfer switch isolation test, The EUT equipped with coaxial connectors was performed by measuring the maximum voltage of the visual carrier, appearing at the receiving antenna input terminals when terminated with a resistance ( R in ohms) matching the rated impedance of the antenna input of the switch.

Using an impedance-matching device(Rohde&Schwarz, RAM358.5414.02 ), the length of coaxial cable was connected between the antenna terminal of the switch and the measuring instrument(Rohde&Schwarz, ESCS 30).

The measuring instrument was tuned to the output channel of the EUT in peak mode and the voltage levels was measured and recorded.

## TEST DATA

---

### Conducted Emissions

FCC ID : O6ZSIR-TS160


Test Mode : Tuned to the output frequency of color bar signal generator

FREQ (MHz)	LEVEL(dB $\mu$ V)	LINE	LIMIT( $\mu$ V)	( $\mu$ V)	MARGIN*(dB)
4.54	46.0	N	250	199.53	2.0
4.73	46.5	N	250	211.35	1.5
4.87	44.8	N	250	173.78	3.2
4.93	44.9	N	250	175.79	3.1
19.41	45.8	N	250	194.98	2.2
19.61	46.3	N	250	206.54	1.7

Table 1. Line Conducted Emissions Tabulated Data

**NOTES:**

1. Measurements using CISPR quasi-peak mode
2. All modes of operation were investigated and the worst -case emission are reported. See attached Plots.
3. The limit for Class B device is 250  $\mu$ V from 450 kHz to 30MHz.
4. Line L = Line, Line N = Neutral



Tested by **C. S. Choi**

# TEST DATA

## Radiated Emissions


FCC ID : O6ZSIR-TS160

Test Mode : Tuned to the output frequency of color bar signal generator

Frequency (MHz)	Reading (dB $\mu$ V)	Pol* (H/V)	AF+CL+Amp (dB)**	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
184.30	42.2	H	-13.4	28.8	43.5	14.7
208.89	40.1	H	-13.5	26.6	43.5	16.9
233.47	41.4	H	-12.9	28.5	46.0	17.5
594.30	36.3	V	-3.8	32.5	46.0	13.5
756.22	37.6	H	0.5	38.1	46.0	7.9
789.70	32.4	V	1.3	33.7	46.0	12.3

\*) No values due to local oscillator(above 1GHz)higher than 20dB below the limit was measured during radiated disturbance.

**Table 2. Radiated Measurements at 3meters**

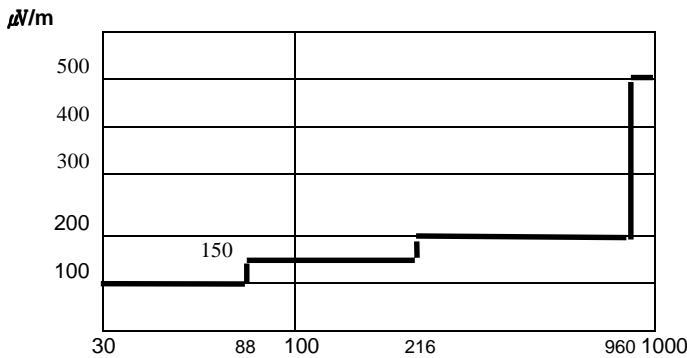

**NOTES:**

1. All modes of operation were investigated the worst-case emission are reported.
2. The radiated limits are shown on Figure 4.

Above 1GHz the limit is 500  $\mu$ V/m.

Fig. 6. Limits at 3 meters

**NOTES:**

1. \*Pol. H =Horizontal V=Vertical
2. \*\*AF+CL+Amp. = Antenna Factor + Cable Loss + Amplifier.
3. Measurements using CISPR quasi-peak mode. Above 1GHz, peak detector function mode is used using a resolution bandwidth of 1MHz and a video bandwidth of 1MHz. The peak level complies with the average limit. Peak mode is used with linearly polarized horn antenna and low-loss microwave cable.

*C. S. Choi*

Tested by **C. S. Choi**

# TEST DATA

## Antenna-Conducted Power Measurements

FCC ID : O6ZSIR-TS160

Test Mode : Tuned to the output frequency of color bar signal(Satellite In)

T. Freq.* (MHz)	Frequency (MHz)	Reading (dB $\mu$ V)	MPL ** (dB)	Result (dB $\mu$ V)	Limit		Margin (dB)
					(nW)	(dB $\mu$ V)	

\* No values higher than 20dB below the limit was measured during Antenna-Conducted Power testing.

**Table 3. Antenna-Conducted Power Measurements**

**NOTES:**

1. \*T. Freq. = Tuned Frequency
2. \*\*MPL = Impedance Matching Network Loss
3. Measurements using CISPR quasi-peak mode. The limits is 2.0 nanowatts from 30MHz to 960MHz.



Tested by **C. S. Choi**

**TEST DATA****Antenna-Conducted Power Measurements**

FCC ID : O6ZSIR-TS160

Test Mode : Tuned to the output frequency of color bar signal(Air In)

CHNNEL	Frequency (MHz)	Reading (dB $\mu$ V)	MPL ** (dB)	Result (dB $\mu$ V)	Limit		Margin (dB)
					(nW)	(dB $\mu$ W)	
2	101.00	11.3	7.8	19.1	2.0	50.0	30.9
	202.00	10.7	7.8	18.5	2.0	50.0	31.5
3	107.00	7.8	7.8	15.6	2.0	50.0	34.4
	214.00	6.0	7.8	13.8	2.0	50.0	36.2
4	113.00	-	7.8	-	2.0	50.0	-
	226.00	-	7.8	-	2.0	50.0	-
5	123.00	-	7.8	-	2.0	50.0	-
	246.00	-	7.8	-	2.0	50.0	-
6	129.00	-	7.8	-	2.0	50.0	-
	258.00	-	7.8	-	2.0	50.0	-
7	221.00	10.3	7.8	18.1	2.0	50.0	31.9
	442.00	9.8	7.8	17.6	2.0	50.0	32.4
8	227.00	-	7.8	-	2.0	50.0	-
	454.00	-	7.8	-	2.0	50.0	-
9	233.00	-	7.8	-	2.0	50.0	-
	466.00	-	7.8	-	2.0	50.0	-
10	239.00	11.3	7.8	19.1	2.0	50.0	30.9
	478.00	11.0	7.8	18.8	2.0	50.0	31.2
11	245.00	9.8	7.8	17.6	2.0	50.0	32.4
	490.00	6.5	7.8	14.3	2.0	50.0	35.7
12	251.00	-	7.8	-	2.0	50.0	-
	502.00	9.3	7.8	17.1	2.0	50.0	32.9
13	257.00	-	7.8	-	2.0	50.0	-
	514.00	6.0	7.8	13.8	2.0	50.0	36.2
14	517.00	-	7.8	-	2.0	50.0	-
	1034.00	-	7.8	-	2.0	50.0	-
19	547.00	-	7.8	-	2.0	50.0	-
	1094.00	-	7.8	-	2.0	50.0	-
28	601.00	-	7.8	-	2.0	50.0	-
	1202.00	-	7.8	-	2.0	50.0	-
36	649.00	11.1	7.8	18.9	2.0	50.0	31.1
	1298.00	6.8	7.8	14.6	2.0	50.0	35.4
44	697.00	9.5	7.8	17.3	2.0	50.0	32.7
	1394.00	-	7.8	-	2.0	50.0	-
53	751.00	13.1	7.8	20.9	2.0	50.0	29.1
	1502.00	7.3	7.8	15.1	2.0	50.0	34.9
61	799.00	9.1	7.8	16.9	2.0	50.0	33.1
	1598.00	6.9	7.8	14.7	2.0	50.0	35.3
69	847.00	-	7.8	-	2.0	50.0	-
	1694.00	-	7.8	-	2.0	50.0	-

\* No values higher than 20dB below the limit was measured during Antenna-Conducted Power testing.

**Table 3. Antenna-Conducted Power Measurements**

**NOTES:**

1. \*T. Freq. = Tuned Frequency
2. \*\*MPL = Impedance Matching Network Loss
3. Measurements using CISPR quasi-peak mode. The limits is 2.0 nanowatts from 30MHz to 960MHz.



---

Tested by **C. S. Choi**

## TEST DATA

### Output-Conducted Level Measurements

FCC ID : O6ZSIR-TS160

Test Mode : Tuned to the output frequency of color bar signal generator

Channel	Frequency (MHz)	Reading (dB $\mu$ V)	MPL * (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
3	56.63	46.0	5.7	51.7	56.5	4.8
	61.25	62.5	5.7	68.2	69.5	1.3
	65.81	45.7	5.7	51.4	56.5	5.1
	Others	-	-	-	39.5	-
4	62.63	45.4	5.7	51.1	56.5	5.4
	67.25	62.5	5.7	68.2	69.5	1.3
	71.81	45.6	5.7	51.3	56.5	5.2
	Others	-	-	-	39.5	-

\*) Any emission appearing on frequencies removed by more than 4.6MHz below or 7.4MHz above the video carrier frequency wasn't detected during output-conducted level measurements.

**Table 4. Output-Conducted Level Measurements**

#### NOTES:

1. \*MPL = Impedance Matching Network Loss
2. Measurements using in quasi-peak mode. The limits is 346.4 times the square root of (R) for the video signal and 77.5 times the square root of (R) for the audio signal.
3. The limit is 10.95 times the square root of (R), in case of the frequencies removed by more than 4.6MHz below or 7.4MHz above the video carrier frequency.



Tested by **C. S. Choi**



# TEST DATA

## Antenna Transfer Switch Measurements

FCC ID : O6ZSIR-TS160

Test Mode : Tuned to the output frequency of color bar signal generator

Signal Input	Channel	Frequency (MHz)	Reading (dB $\mu$ V)	MPL * (dB)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)
Air In	3	61.20	-	5.7	-	9.5	-
	4	67.20	-	5.7	-	9.5	-
Satellite In	3	61.20	-	5.7	-	9.5	-
	4	67.20	-	5.7	-	9.5	-

\*) - ; No values in other frequencies was detected during antenna transfer switch measurements.

**Table 5. Antenna Transfer Switch Measurements**

**NOTES:**

1. \*MPL = Impedance Matching Network Loss
2. Measurements using in peak mode. The limits is 0.346 times the square root of (R).



Tested by **C. S. Choi**

# PLOTS OF EMISSIONS

- Conducted Emission at the Mains port(Line)**


The emission measured using the peak instrumentation with band 450kHz to 30MHz.

Scan Settings (1 Range)

----- Frequencies -----			----- Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
450k	30M	5k	9k	PK	20ms	AUTO	LN OFF

Transducer No.	Start	Stop	Name
17	150k	30M	CE_CNE

Final Measurement: x QP  
 Meas Time: 1 s  
 Subranges: 25  
 Acc Margin: 50dB

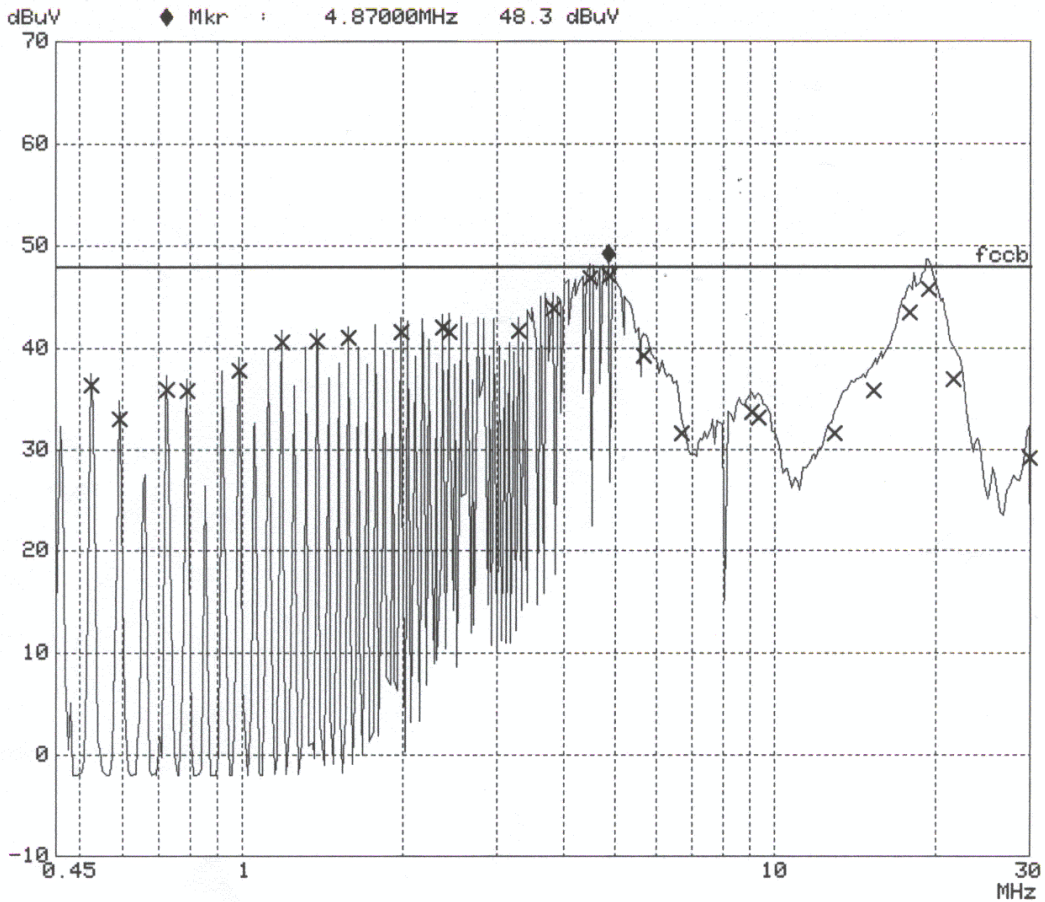

# PLOTS OF EMISSIONS

- **Conducted Emission at the Mains port(LINE)**


The emission measured using the quasi-peak instrumentation with band 4.35MHz to 5.2MHz didn't exceed the limits.

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
4.35M	5.2M	5k	9k	QP	20ms	10dB	BLN OFF

Transducer No.	Start	Stop	Name
17	150k	30M	CE_CNE

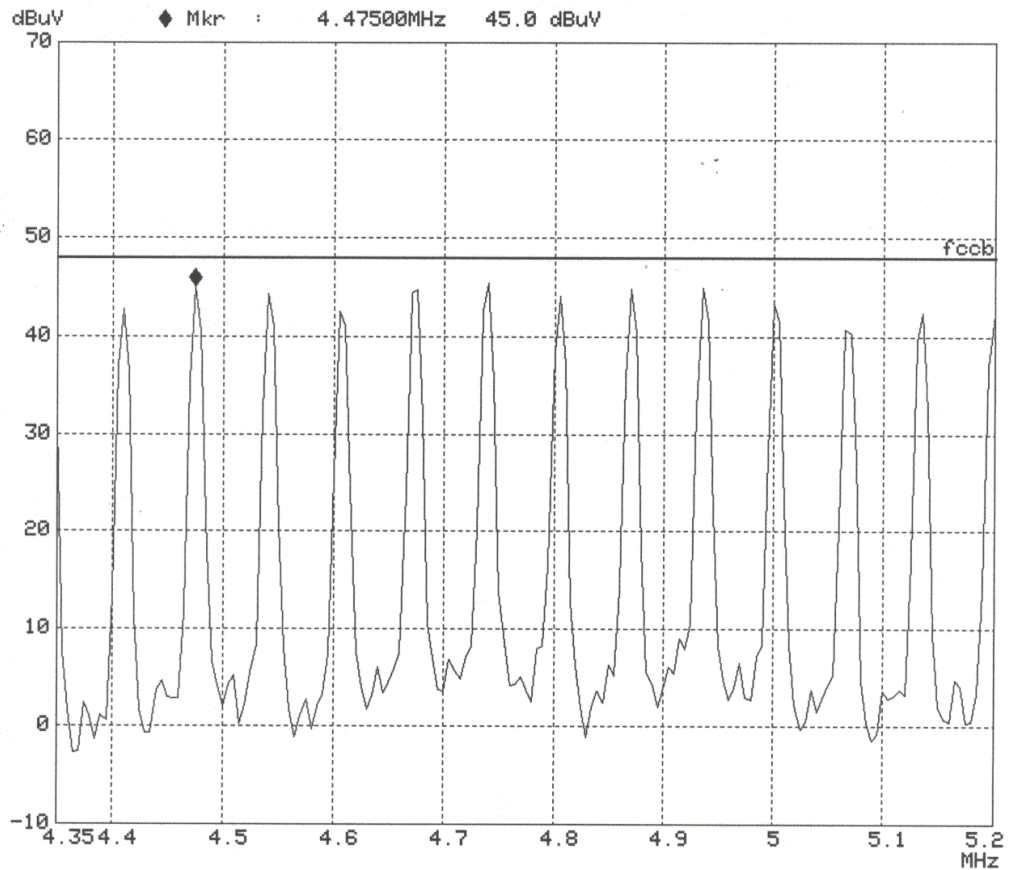

## PLOTS OF EMISSIONS


- **Conducted Emission at the Mains port(LINE)**

The emission measured using the quasi-peak instrumentation with band 17MHz to 19.5MHz didn't exceed the limits.

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
17M	19.5M	5k	9k	QP	20ms	10dBLN	OFF

Transducer No.	Start	Stop	Name
17	150k	30M	CE_CNE

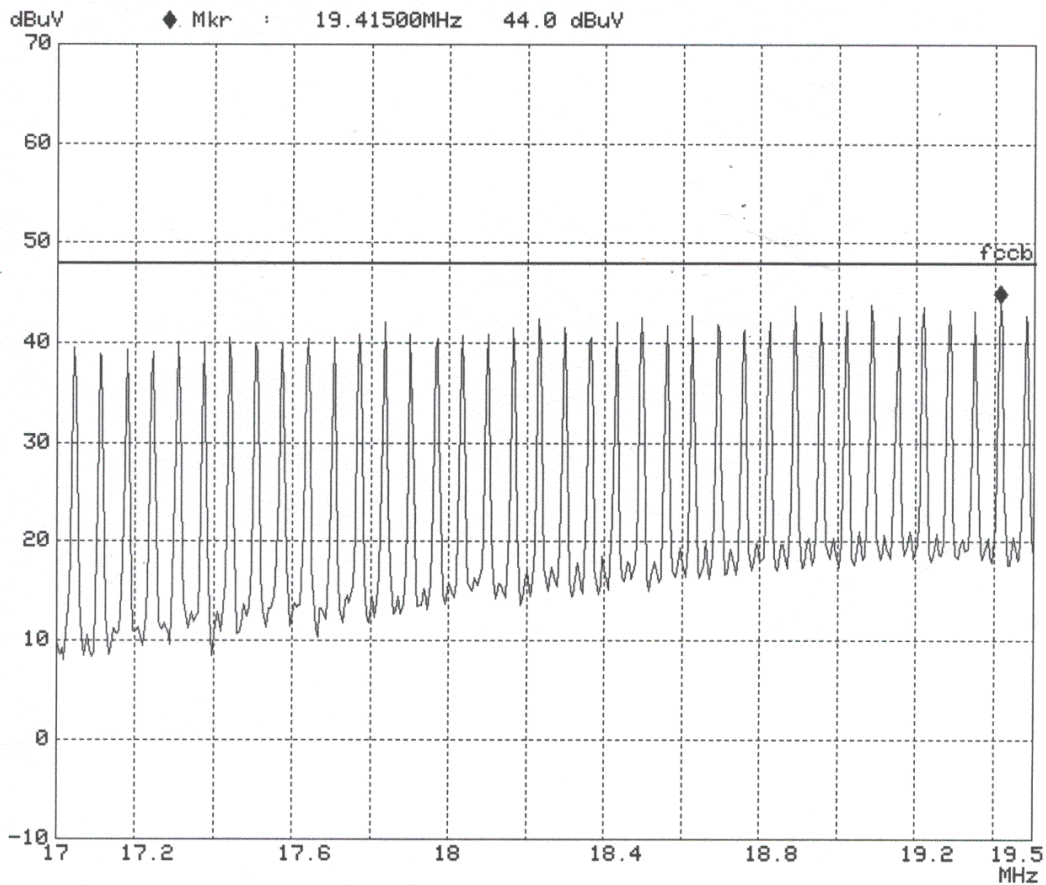

# PLOTS OF EMISSIONS


● **Conducted Emission at the Mains port(Neutral)**

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten Preamp
450k	30M	5k	9k	PK	20ms AUTO	LN OFF


Transducer No.	Start	Stop	Name
17	150k	30M	CE_CNE

Final Measurement: x QP  
 Meas Time: 1 s  
 Subranges: 50  
 Acc Margin: 25dB

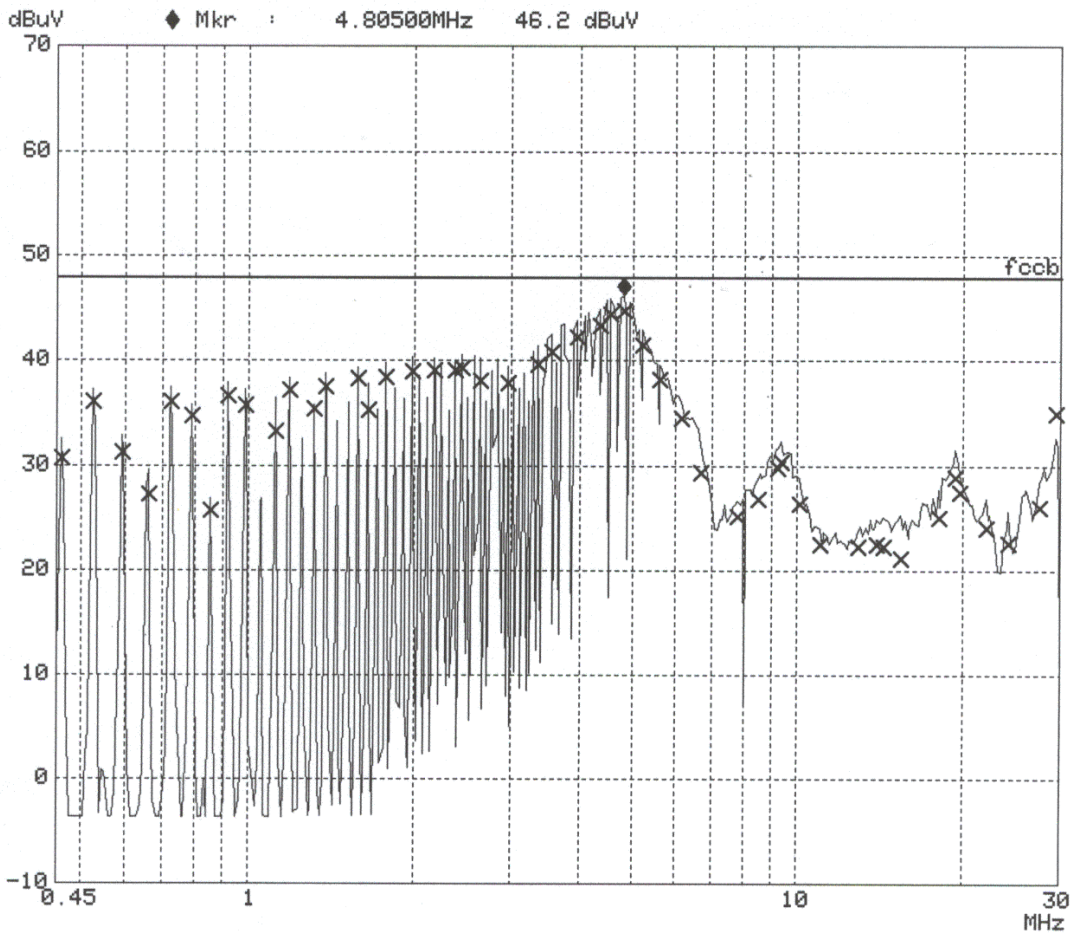


# PLOTS OF EMISSIONS

- Output-Conducted Level Measurements(Channel 3)

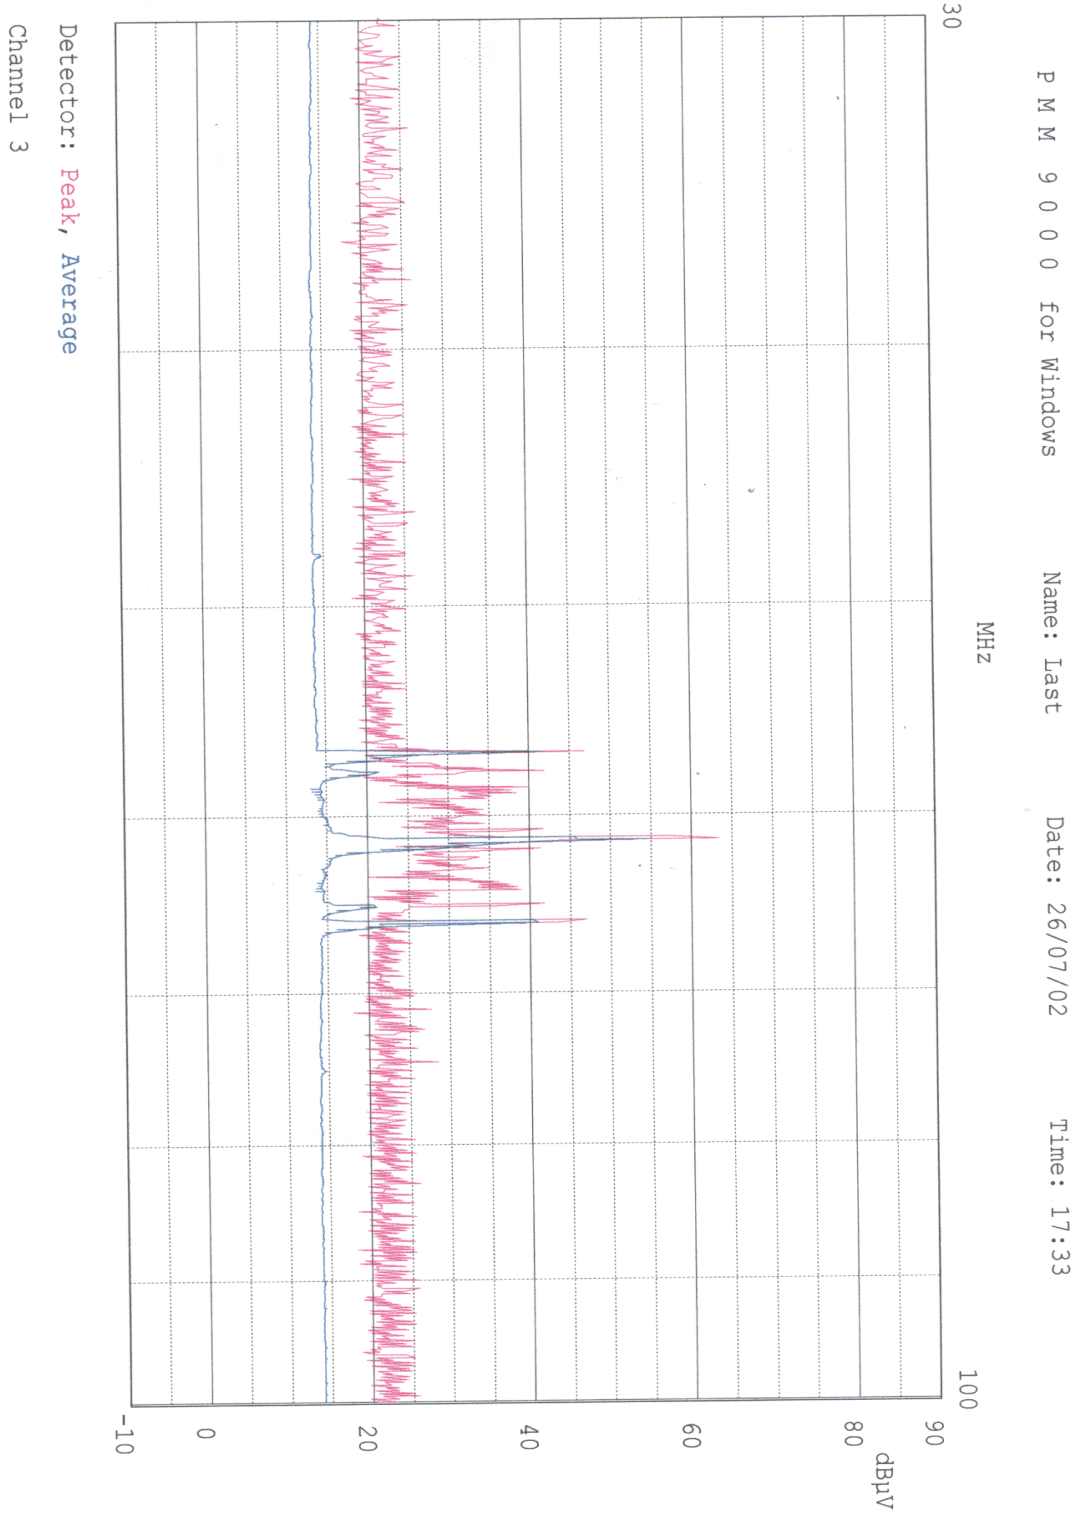

# PLOTS OF EMISSIONS


- Output-Conducted Level Measurements(Channel 4)

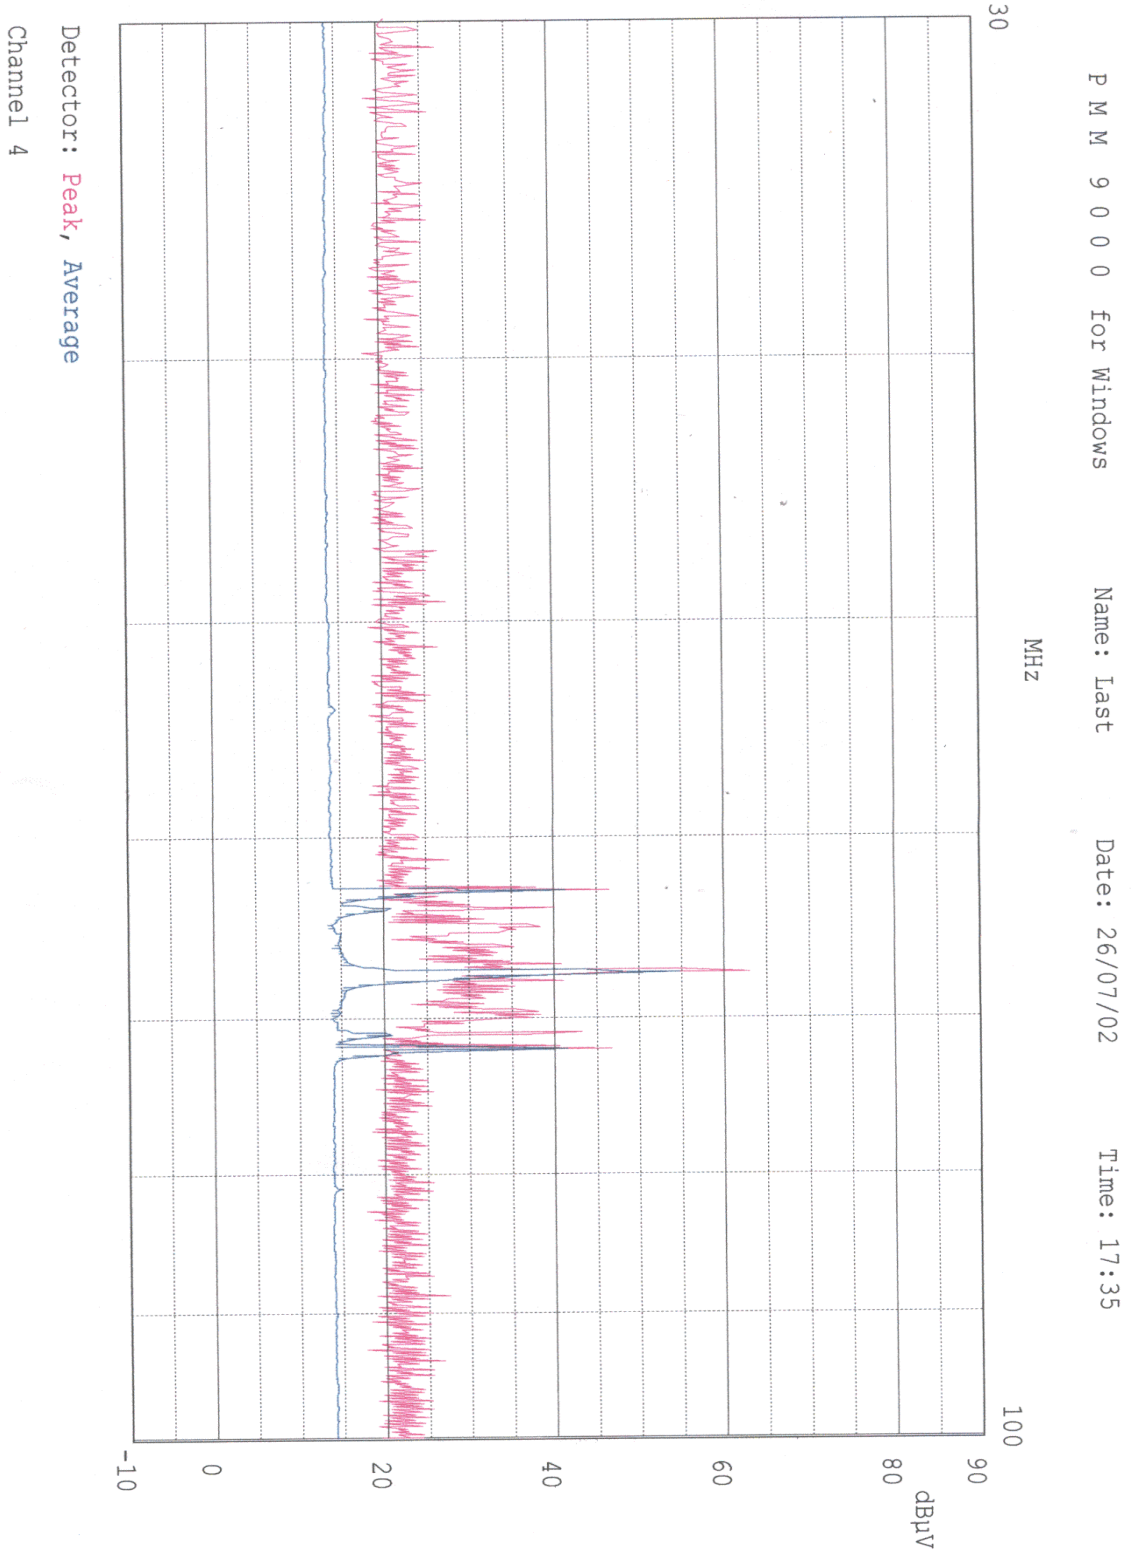

# PLOTS OF EMISSIONS

- Antenna Transfer Switch Measurement(Channel 3, Air In)

Scan Settings (1 Range)  
|----- Frequencies -----| |----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp  
55M 66M 50k 120k QP 20ms 10dB LN OFF

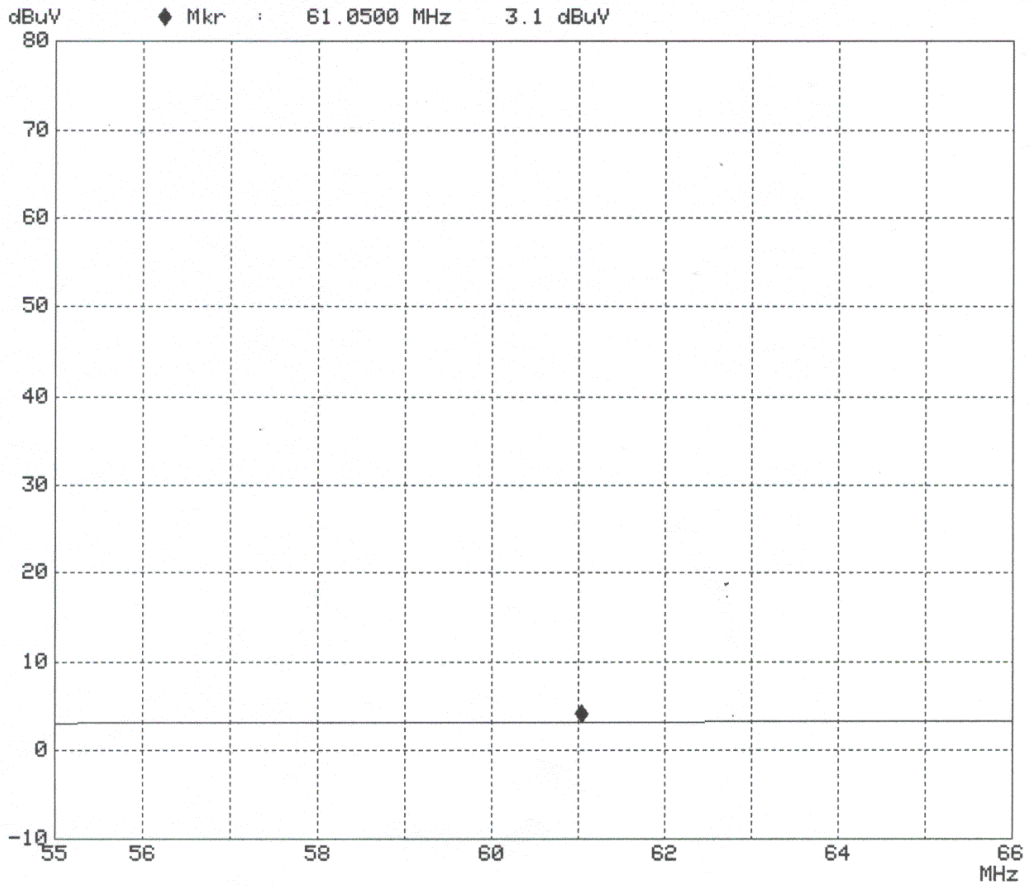




# PLOTS OF EMISSIONS

- Antenna Transfer Switch Measurement(Channel 4, Air In)

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
55M	66M	50k	120k	QP	20ms	10dBLN	OFF

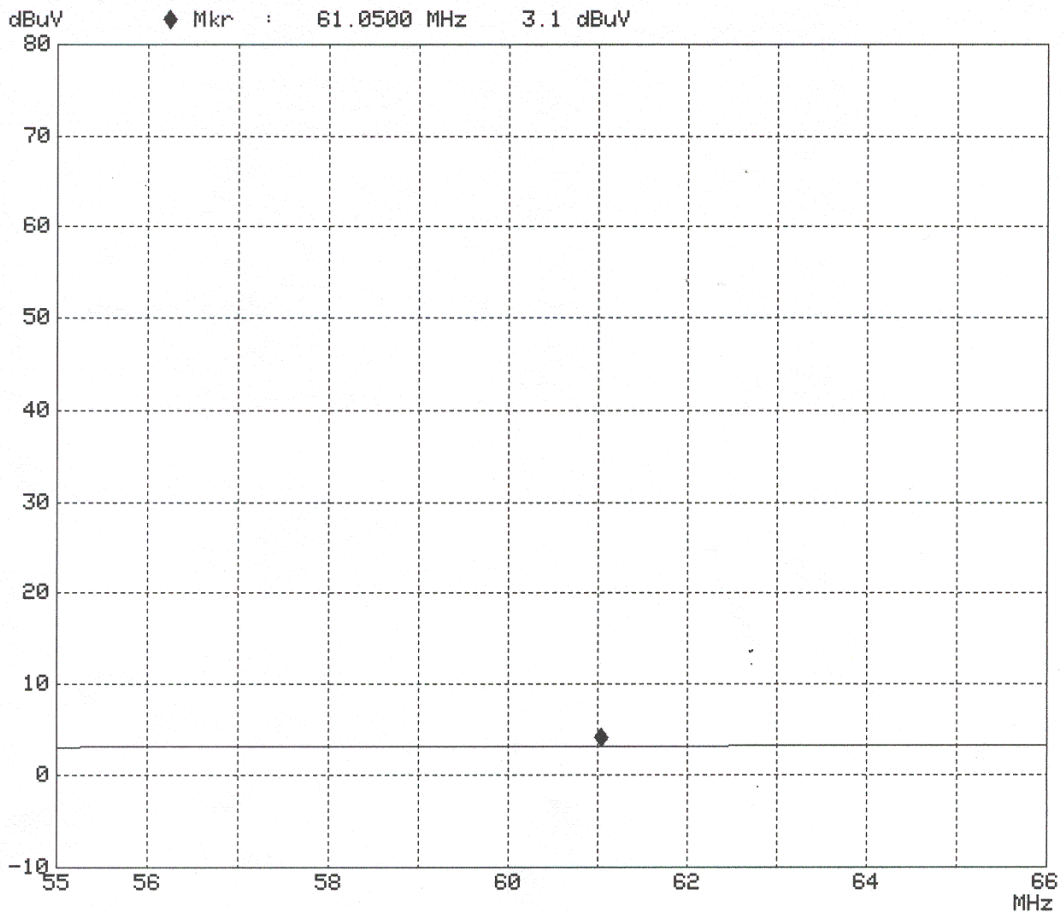


# PLOTS OF EMISSIONS

- Antenna Transfer Switch Measurement(Channel 3, Antenna In)

Scan Settings (1 Range)

----- Frequencies -----			Receiver Settings -----				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
55M	66M	50k	120k	QP	1ms	10dBLN	OFF

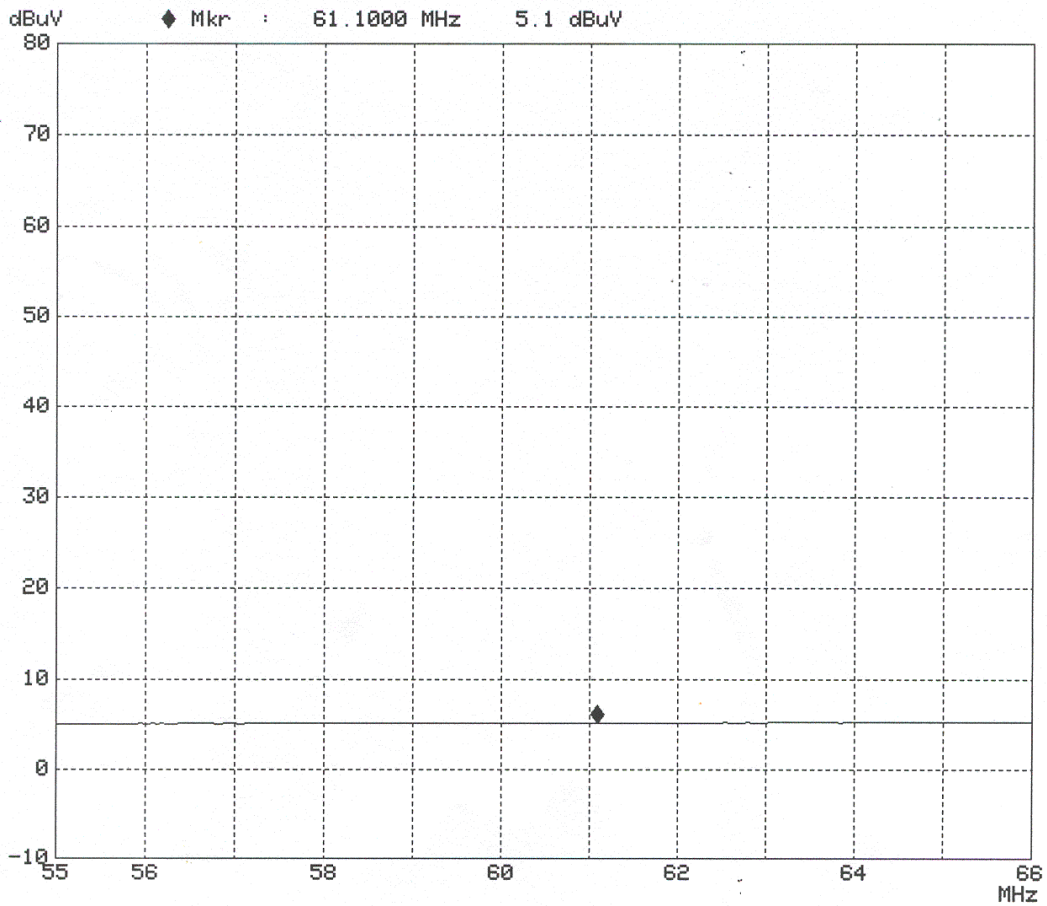


# PLOTS OF EMISSIONS

- Antenna Transfer Switch Measurement(Channel 4, Antenna In)

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
55M	75M	200k	120k	QP	1ms	10dBLN	OFF

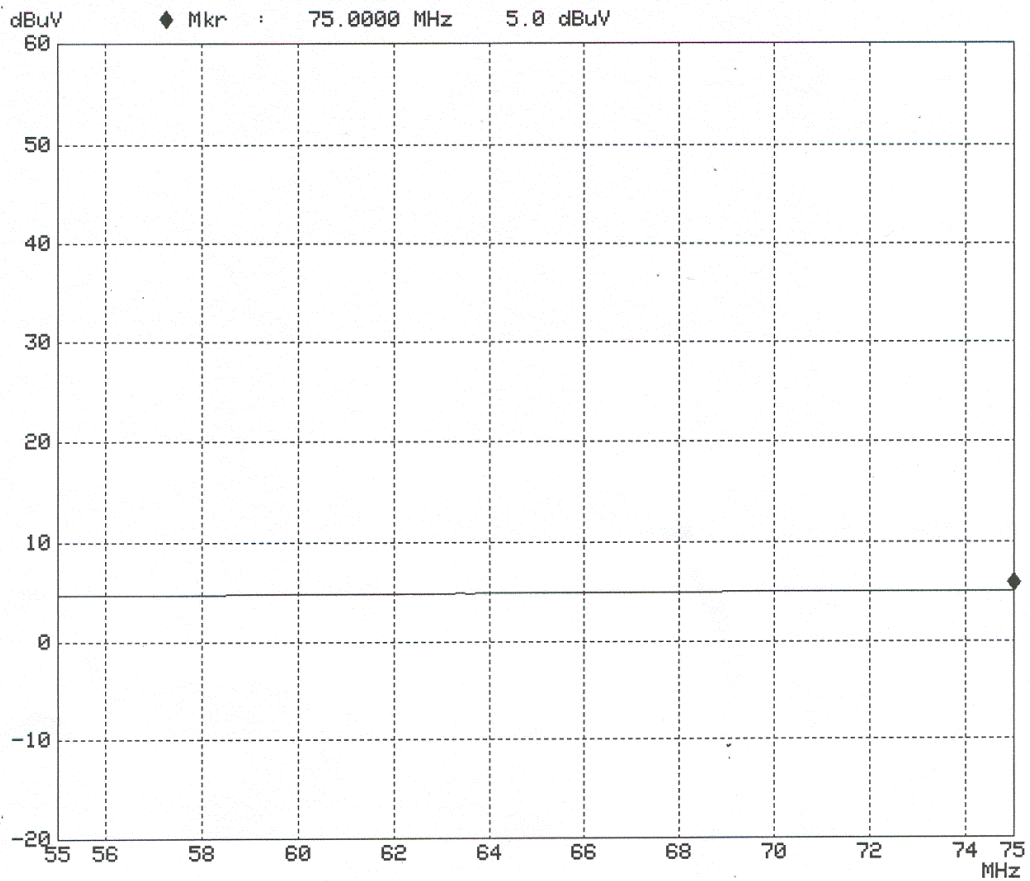

## SAMPLE CALCULATIONS

---

$$\text{dB } \mu\text{V} = 20 \log_{10} (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB } \mu\text{V}/20)}$$

### EX. 1.

@20.3 MHz

Class B limit = 250  $\mu\text{V}$  = 48.0 dB  $\mu\text{V}$

Reading = 40.8 dB  $\mu\text{V}$  (calibrated level)

$$10^{(40.8/20)} = 109.64 \mu\text{V}$$

$$\text{Margin} = 48.0 - 40.8 = 7.2$$

**7.2 dB below limit**

### EX. 2.

@57.7 MHz

Class B limit = 100  $\mu\text{V}/\text{m}$  = 40.0 dB  $\mu\text{V}/\text{m}$

Reading = 19.1 dB  $\mu\text{V}$  (calibrated level)

Antenna factor + Cable Loss = 10.12 dB

Total = 29.22 dB  $\mu\text{V}/\text{m}$

$$\text{Margin} = 40.0 - 29.22 = 10.78$$

**10.78 dB below the limit**

### EX. 3.

@98.20 MHz

Class B limit = 2 nW = 50.0 dB  $\mu\text{V}$

Reading = 19.1 dB  $\mu\text{V}$  (calibrated level)

Impedance matching Network Loss = 7.5 dB

Total = 26.6 dB  $\mu\text{V}$

$$\text{Margin} = 50.0 - 26.6 = 23.4$$

**23.4 dB below the limit**

## ACCURACY OF MEASUREMENT

The Measurement Uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 with the confidence level of 95%

### 1. Radiation Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Antenna Factor	Normal (k=2)	± 0.5
Cable Loss	Normal (k=2)	± 0.04
Receiver Specification	Rectangular	± 2.0
Antenna directivity	Rectangular	± 1.0
Antenna Factor variation with Height		
Antenna Phase Center Variation		
Antenna Factor Frequency Interpolation		
Measurement Distance Variation		
Site Imperfections	Rectangular	± 2.0
Mismatch:Receiver VRC $r_i=0.3$ Antenna VRC $r_R=0.1(B_i)0.4(L_p)$ Uncertainty Limits $20\text{Log}(1+/-r_i r_R)$	U-Shaped	+ 0.25 / - 0.26
System Repeatability	Std.deviation	± 0.05
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.77
Expanded Uncertainty U	Normal (k=2)	± 3.5

### 2. Conducted Uncertainty Calculation

<i>Contribution</i>	<i>Probability Distribution</i>	<i>Uncertainty(+/-dB)</i>
Receiver Specification	Normal (k=2)	± 2.0
LISN coupling spec.	Normal (k=2)	± 0.4
Cable and input attenuator cal.	Rectangular	± 0.4
Mismatch:Receiver VRC $r_i=0.3$ LISN vrc $r_g=0.1$ Uncertainty Limits $20\text{Log}(1+/-r_i r_R)$	U-Shaped	± 0.26
System Repeatability	Std.deviation	± 0.68
Repeatability of EUT	-	-
Combined Standard Uncertainty	Normal	± 1.18
Expanded Uncertainty U	Normal (k=2)	± 2.4

**TEST EQUIPMENT**

No.	Instrument	Manufacturer	Model	Calibration Date
1	*Test Receiver	R & S	ESCS 30	2002.02
2	Test Receiver	PMM	PMM9000	2002.06
3	*Amplifier	HP	8447F	2001.11
4	*Amplifier	HP	8447F	2001.11
5	*Spectrum Analyzer	Advantest	R3265A	2002.03
6	*Logbicon Super Antenna	Schwarzbeck	VULB9166	2002.02
7	Log-Periodic Antenna	R & S	HL025	2002.01
8	Dipole Antenna	R & S	VHA9103	2002.05
9	Dipole Antenna	R & S	UHA9105	2002.05
11	Biconical Log Antenna	ARA	LPB-2520/A	2002.01
12	Absorbing Clamp	R & S	MDS21	2002.03
13	High Voltage Probe	R & S	ESH2-Z3	2001.09
14	Signal Generator	R & S	SMP02	2001.12
15	*Matching Pad	R & S	RAM358.5414.02	2002.05
16	LISN	R & S	ESH3-Z5	2001.10
17	*LISN	Kyoritsu	KNW-407	2002.04
18	*LISN	Kyoritsu	KNW-408	2002.04
19	*Position Controller	EM Eng.	N/A	N/A
20	*Turn Table	EM Eng.	N/A	N/A
21	*Antenna Mast	EM Eng.	N/A	N/A
22	*Anechoic Chamber	EM Eng.	N/A	N/A
23	*Shielded Room	EM Eng.	N/A	N/A

\*) Test equipment used during the test

## ***RECOMMENDATION/CONCLUSION***

---


The data collected shows that the **Samsung Electro-Mechanics Co., Ltd.**  
FCC ID : **O6ZSIR-TS160, Satellite Receiver**, complies with § 15.107, 15.109, 15.111  
and 15.115 of the FCC Rules.

The highest emission observed was at **4.73 MHz** for conducted emissions with a margin  
of **1.5 dB**, at **756.22 MHz** for radiated emissions with a margin of **7.9 dB**, and at  
**61.25 MHz** for output-conducted level measurements with a margin of **1.3dB**.


## APPENDIX A – SAMPLE LABEL

### Labelling Requirements

The sample label shown shall be *permanently affixed* at a conspicuous location on the device and be readily visible to the user at the time of purchase.

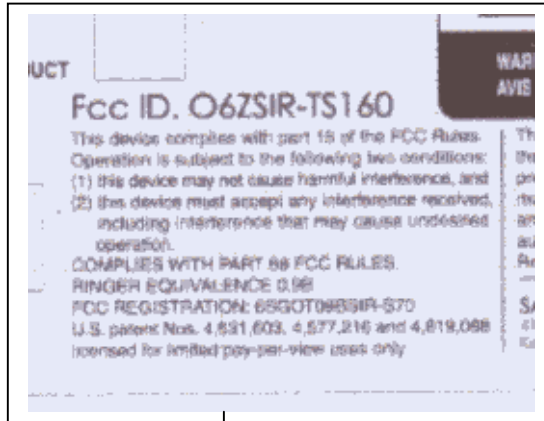

- FCC ID Location of EUT

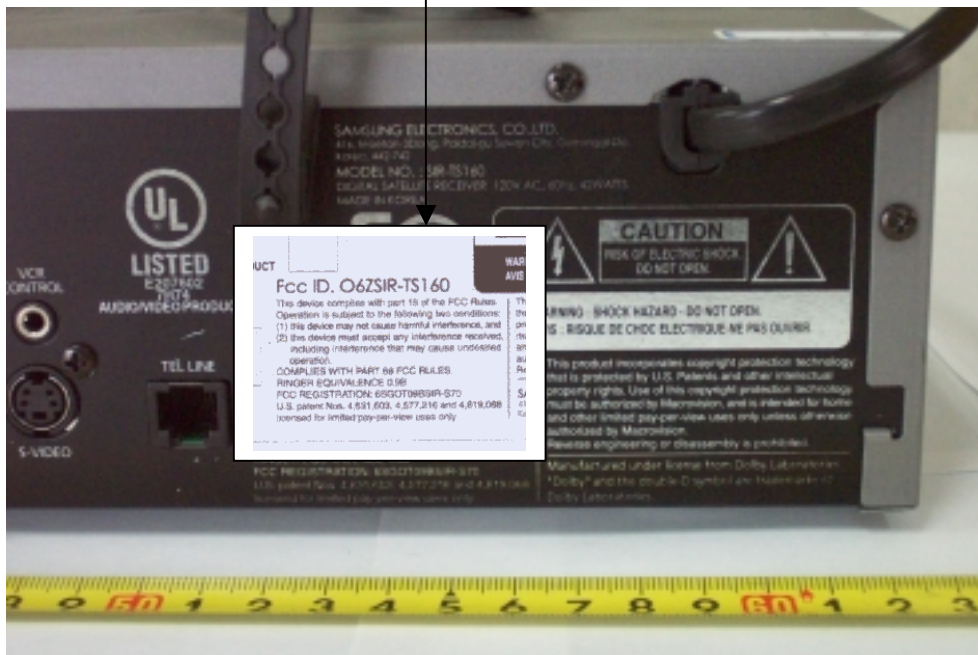



## ***APPENDIX B – CIRCUIT DIAGRAM***

---