

46 Waverley Road  
Beeches Industrial Estate  
Yate, Bristol BS37 5QT  
Telephone: +44 (0)1454 326 998  
Fax: +44 (0)1454 326 930  
Email: bristol.testing@yorkemc.co.uk

**Test Report  
EMC Testing of  
Digital Yacht AIT 2000  
for  
SRT Marine Technology Limited**

Document number B961TR1  
Project number C113/B0349

Author: .....  
Mr D. Bowley  
Test Technician

Checked: .....  
Mr A Dace, BA, iNCE  
Principal Engineer

Approved: .....  
Mr A Dace, BA, iNCE  
Principal Engineer

Issue	Description	Issued by	Date
1	Initial Issue	AD	02/05/2012

**Disclaimers:** Tests marked "not UKAS accredited" are not included in the UKAS accreditation schedule of our laboratory.  
Opinions and interpretations expressed herein are outside the scope of UKAS accreditation

This report shall not be reproduced, except in full, without the prior written approval of York EMC Services (2007) Ltd  
This test report relates only to the unit(s) tested



1574  
Testing

A BIS  
designated  
Notified Body  
No 1892



York EMC Services (2007) Ltd  
THE UNIVERSITY of York  
Heslington  
York  
YO10 5DD  
UK

Tel: +44 (0)1904 324440  
Fax: +44 (0)1904 324434  
Email: enquiry@yorkemc.co.uk  
www.yorkemc.co.uk

Registered in England and Wales  
Company Reg No. 6048589  
VAT Reg No. GB 647 2055 41

**CONTENTS**

1	Introduction .....	2
2	Test Specification.....	3
2.1	Equipment under Test and Environment.....	3
2.2	Relevant Standards .....	3
3	Test Results .....	6
3.1	Conducted Emissions dc port (10kHz to 30MHz) .....	6
3.2	Radiated Emissions (150kHz to 2000MHz).....	8
3.3	ICES Radiated Electric Field Emissions (30MHz to 2000MHz) .....	14
3.4	FCC Radiated Electric Field Emissions (30MHz to 2000MHz) .....	15
3.5	Conducted RF Immunity .....	16
3.6	Radiated Immunity (80MHz-2000MHz).....	17
3.7	Immunity to Electrical Fast Transient / Burst.....	18
3.8	Immunity to Electrostatic Discharge .....	19
4	Summary.....	20
4.1	Emissions .....	20
4.2	Immunity .....	21
4.3	Compliance Statement .....	21
5	Appendices .....	22
5.1	Appendix 1. Conducted Emission (dc port) Test Method.....	22
5.2	Appendix 2. Radiated Emission Test Method (150kHz to 2000MHz) .....	23
5.3	Appendix 3. ICES Radiated Emission Test Method (30MHz to 2000MHz) .....	24
5.4	Appendix 4. FCC Radiated Emission Test Method (30MHz to 2000MHz) .....	25
5.5	Appendix 5. Conducted RF Immunity Test Method.....	26
5.6	Appendix 6. Radiated Immunity Test Method .....	27
5.7	Appendix 7. Immunity to Electrical Fast Transients /Burst Test Method.....	28
5.8	Appendix 8. Immunity to Electrostatic Discharge Test Method .....	29
5.9	Appendix 9. ESD Test Point Locations .....	30
5.10	Appendix 10. Conducted Emissions Test Results .....	32
5.11	Appendix 11. Radiated Emission Test Results .....	34
5.12	Appendix 12. ICES Radiated Emission Test Results (30MHz to 2000MHz) .....	44
5.13	Appendix 13. FCC Radiated Emission Test Results (30MHz-2000MHz) .....	46
5.14	Appendix 14. EUT Test Configurations .....	48
5.15	Appendix 15. Modification States .....	55
5.16	Appendix 16. Test Report History.....	56
5.17	Appendix 17. Documentation .....	57

## 1 Introduction

**Name and address of laboratory:** York EMC Services (2007) Ltd  
46 Waverley Road  
Beeches Industrial Estate  
Yate  
Bristol  
BS37 5QT  
UKAS testing laboratory N° 1574

**Name and address of customer:** SRT Marine Technology Limited  
Wireless House  
Midsomer Norton  
Bath  
BA3 4BS

The test results contained in this test report relate only to the unit(s) tested.

<b>Equipment under test</b>	Digital Yacht AIT 2000
<b>Manufacturer</b>	SRT Marine Technology Limited
<b>Product name</b>	Digital Yacht AIT 2000
<b>Sample number</b>	1514B and 1519B
<b>Model number</b>	ZDIGAIT 2000
<b>Serial number</b>	None
<b>Circuit revision</b>	None
<b>No. tested of each item</b>	Two
<b>Customer supplied test plan ref.</b>	None
<b>Date of receipt of EUT</b>	13/04/2012
<b>Method of receipt</b>	Brought by customer
<b>Date(s) of test(s)</b>	13/04/2012 to 17/04/2012
<b>Date(s) when EUT was out of laboratory's control</b>	None
<b>Method of disposal</b>	Returned to customer
<b>Personnel witnessing tests</b>	Testing was partially witnessed by the customer
<b>Any other relevant information</b>	None

## 2 Test Specification

### 2.1 Equipment under Test and Environment

The equipment under test is the Digital Yacht AIT 2000 and is maritime navigation and radio communication equipment.

### 2.2 Relevant Standards

#### 2.2.1 Emissions

Product Specific Standard	Basic Standard	Class/Limit	Test
EN60945:2002 Maritime navigation and radio communication equipment Not UKAS accredited	Conducted emissions dc power port EN60945:2002 clause 9.2	Table 5 Protected	1
	Radiated emissions EN60945:2002 clause 9.3	Table 5 Protected	6 Note 2

Regulation/Test Standard	ICES 003 Issue 4 February 2004 "Interference Causing Equipment Standard Digital Apparatus 2" (Not UKAS accredited)  CAN/CSA-CEI/IEC CISPR 22:02 "Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment" (Not UKAS accredited)		
--------------------------	--	--	--

Test	Class/limit	Comments and deviations from the standard	
Radiated electric field emissions	ICES 003 Class A	Frequency range of measurement 30MHz to 2GHz	7
AC mains conducted emissions	ICES-003 Class A	DC powered	Not applicable

Regulation/Test Standard	Title 47 of the Code of Federal Regulations (CFR) Part 15 (47CFR15):2011 Subpart B – Unintentional Radiators  ANSI C63.4-2003  American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9kHz to 40GHz		
--------------------------	--	--	--

Test	Class/limit	Comments and deviations from the standard	
Radiated electric field emissions	Class A	Frequency range of measurement 30MHz to 2GHz	8
AC mains conducted emissions	Class A	DC powered	Not applicable

Note 1 Tests marked 'Not applicable' do not apply to the EUT or have not been requested by the customer.

Note 2 Radiated emission testing above 1GHz is not currently within the scope of our UKAS accreditation with respect to the Bristol Laboratory of York EMC Services. The highest clock oscillator frequency was specified as 192MHz by the customer.

## 2.2.2 Immunity

Product Specific Standard	Basic Standard	Level	Test
EN60945:2002 Not UKAS accredited	EN61000-4-6: 2009 Conducted immunity (EN60945 clause 10.3)	3Vrms 150kHz to 80MHz 10Vrms spot frequencies 2MHz, 3MHz, 4MHz, 6.2MHz, 8.2MHz, 12.6MHz, 16.5MHz, 18.8MHz, 22MHz, 25MHz 80% AM modulation 400Hz	2
	EN61000-4-3:2006 +A1 +A2 Radiated immunity (EN60945 clause 10.4)	10V/m 80MHz-2000MHz 80% 400Hz AM Level 3	5
	EN61000-4-4:2004 +A1 Electrical fast transients/burst (EN60945 clause 10.5)	±2kV ac power ±1kV signal ports	Not applicable 3
	EN61000-4-5:2006 Surge (EN60945 clause 10.6)	±0.5kV ac power, line to line ±1kV ac power, line to earth	Not applicable
	EN61000-4-11:2004 Power supply variations (EN60945 clause 10.7)	Voltage +20% for 1.5 sec Frequency +10% superimposed for 5 seconds Voltage -20% for 1.5 sec Frequency -10% superimposed for 5 seconds Rise and decay times 0.2 seconds	Not applicable
	EN61000-4-11:2004 Power supply interruptions (EN60945 clause 10.8)	Break in power supply for 60 seconds	Not applicable
	EN61000-4-2: 2009 Electrostatic discharge (EN60945 clause 10.9)	+/-6kV contact +/-8kV air	4

Note 1: Tests marked "Not applicable" were not requested by the customer or not applicable to the EUT.

Note 2: Testing to EN60945:2002 is not within the scope of the UKAS accreditation of the Bristol Laboratory of York EMC Services. Testing to the EN61000 series of basic immunity standards is UKAS accredited unless stated otherwise.

### 2.2.3 Performance Criteria

The following parameters were monitored during immunity testing:

Parameter	Nominal Value/State	Unacceptable change
Active mode	Monitoring Laptop software (TERA TERM VT) COM9 & COM8 checking for GPS Transmission Plus Observing Poseidon class display unit for AGE information (Counter)	Any change other than the nominal value

### 3 Test Results

#### 3.1 Conducted Emissions dc port (10kHz to 30MHz)

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Test description	Class/Limit
EN60945:2002 Clause 9.3	Conducted emissions DC port	Table 5 protected

Results	Mode	Figure	Result Pass/Fail	Comments
	1	CE01	Pass	None
		CE02	Pass	None
		CE03	Pass	None
		CE04	Pass	None

#### CE01 (10kHz – 150kHz) Positive

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V)	Comments
	1	10kHz- 150kHz	-	No peaks within 20dB limit

#### CE02 (150kHz – 30MHz) Positive

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V)	Comments
	1	15.23	26.18	Clears by 23.82dB
		19.30	29.92	Clears by 20.08dB
		20.72	33.85	Clears by 16.15dB
		23.56	38.17	Clears by 11.83dB
		25.74	38.64	Clears by 11.36dB
		27.97	35.35	Clears by 14.65dB

**CE03 (10kHz – 150kHz) Negative**

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V)	Comments
	1	10kHz- 150kHz	-	No peaks within 20dB limit

**CE04 (150kHz – 30MHz) Negative**

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V)	Comments
	1	13.84	28.11	Clears by 21.89dB
		15.53	30.00	Clears by 20.00dB
		17.46	30.27	Clears by 19.73dB
		19.11	31.8	Clears by 18.20dB
		20.76	30.75	Clears by 19.25dB
		29.90	32.64	Clears by 17.36dB

Modifications	Required for this test	Modification state
	None	0

### 3.2 Radiated Emissions (150kHz to 2000MHz)

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Test description	Class/Limit
EN60945:2002 Clause 9.3	Radiated emissions	Table 5 Protected

Results	Mode	Figure	Result Pass/Fail	Comments
1	ME01	Pass	0.15-30MHz – at 0degrees, parallel	
	ME02	Pass	0.15-30MHz – at 90degrees, parallel	
	ME03	Pass	0.15-30MHz – at 180degrees, parallel	
	ME04	Pass	0.15-30MHz – at 270degrees, parallel	
	ME05	Pass	0.15-30MHz – at 0degrees, perpendicular	
	ME06	Pass	0.15-30MHz – at 90degrees, perpendicular	
	ME07	Pass	0.15-30MHz – at 180degrees, perpendicular	
	ME08	Pass	0.15-30MHz – at 270degrees, perpendicular	
	RE01	Pass	30-1000MHz (120kHz bandwidth)	
	RE02	Pass	156MHz-165MHz (9kHz bandwidth)	
	RE03	Pass	1000-2000MHz	

ME01

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	22.12	28.9	Clears by 6.3dB
		22.64	28.1	Clears by 7.0dB
		22.72	27.4	Clears by 7.7dB
		22.77	28.5	Clears by 6.6dB
		23.61	28.0	Clears by 6.9dB
		27.00	28.6	Clears by 5.8dB
		23.09	26.7	Clears by 8.3dB
		22.45	26.8	Clears by 8.3dB
		21.49	26.1	Clears by 9.2dB
		21.68	26.0	Clears by 9.3dB
		29.11	24.7	Clears by 9.4dB
		27.25	24.5	Clears by 9.9dB
		22.55	25.2	Clears by 9.9dB
		26.16	24.6	Clears by 9.9dB
		20.92	25.3	Clears by 10.1dB
		26.80	24.3	Clears by 10.1dB
		22.88	24.6	Clears by 10.5dB

ME02

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	21.49	31.4	Clears by 3.9dB
		21.68	29.7	Clears by 5.6dB
		21.86	29.5	Clears by 5.7dB
		22.55	31.1	Clears by 4.0dB
		22.64	30.3	Clears by 4.8dB
		22.71	30.5	Clears by 4.6dB
		23.61	28.8	Clears by 6.1dB
		23.15	28.5	Clears by 6.5dB
		23.09	28.2	Clears by 6.8dB
		26.16	27.5	Clears by 7.0dB
		22.11	28.0	Clears by 7.2dB
		20.92	28.2	Clears by 7.2dB
		22.45	27.9	Clears by 7.2dB
		22.88	27.2	Clears by 7.9dB
		26.80	25.3	Clears by 9.1dB
		29.11	24.7	Clears by 9.4dB
		22.77	25.6	Clears by 9.5dB

ME03

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	21.49	30.1	Clears by 5.2dB
		21.68	28.0	Clears by 7.3dB
		22.71	30.1	Clears by 5.0dB
		22.77	28.5	Clears by 6.6dB
		26.80	27.7	Clears by 6.7dB
		27.00	28.5	Clears by 5.9dB
		22.64	27.5	Clears by 7.6dB
		22.55	27.3	Clears by 7.8dB
		20.92	27.4	Clears by 8.0dB
		23.15	26.4	Clears by 8.6dB
		26.16	25.8	Clears by 8.7dB
		21.86	26.5	Clears by 8.7dB
		22.11	26.2	Clears by 9.0dB
		29.11	25.1	Clears by 9.0dB
		23.09	26.0	Clears by 9.0dB
		22.88	25.3	Clears by 9.8dB
		22.45	25.1	Clears by 10.0dB

## ME04

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	21.68	29.7	Clears by 5.6dB
		21.86	30.1	Clears by 5.1dB
		22.11	30.1	Clears by 5.1dB
		22.71	30.2	Clears by 4.9dB
		22.77	30.3	Clears by 4.8dB
		29.11	28.8	Clears by 5.3dB
		22.45	29.5	Clears by 5.6dB
		27.25	28.6	Clears by 5.8dB
		20.92	28.5	Clears by 6.9dB
		23.15	27.2	Clears by 7.8dB
		23.61	26.1	Clears by 8.8dB
		22.88	26.1	Clears by 9.0dB
		21.49	26.3	Clears by 9.0dB
		22.64	25.0	Clears by 10.1dB
		23.09	24.9	Clears by 10.1dB
		26.16	24.3	Clears by 10.2dB
		22.55	24.8	Clears by 10.3dB

## ME05

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	0.15-30	-	No quasi-peak results within 20dB of the limit

## ME06

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	0.15-30	-	No quasi-peak results within 20dB of the limit

## ME07

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	0.15-30	-	No quasi-peak results within 20dB of the limit

## ME08

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Comments
	1	0.15-30	-	No quasi-peak results within 20dB of the limit

RE01

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Clears by (dB)	Antenna Height (m)	Turntable angle (degrees)	Pol'n	Result
		1	48.006	45.41	8.59	1.29	225	Vertical
1	72.018	10.87	43.13	1.00	3.70	310	Vertical	Pass
	96.000	8.37	45.63	2.59	3.70	85	Vertical	Pass
	125.400	6.31	47.69	1.79	3.70	300	Horizontal	Pass
	326.334	34.36	19.64	5	2.40	Vertical	Pass	Pass
	458.526	16.74	37.26	2.40	275	Horizontal	Pass	Pass

RE02

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Clears by (dB)	Antenna Height (m)	Turntable angle (degrees)	Pol'n	Result
		1	156.074	12.32	11.68	1.00	115	Vertical
1	159.623	3.17	20.83	1.00	3.70	305	Vertical	Pass
	161.386	4.48	19.52	1.00	3.70	230	Vertical	Pass
	164.936	2.71	21.29	1.00	3.70	210	Vertical	Pass

RE03

QP Results	Mode	Freq (MHz)	QP level (dB $\mu$ V/m)	Clears by (dB)	Antenna Height (m)	Turntable angle (degrees)	Pol'n	Result
		1	1.192	39.49	14.51	1.00	360	Vertical
1	1.248	33.59	20.41	1.00	3.70	315	Vertical	Pass
	1.249	40.66	13.34	1.00	3.70	315	Vertical	Pass
	1.362	34.72	19.28	1.00	3.70	315	Vertical	Pass

Modifications	Required for this test	Modification state
	None	0

### 3.3 ICES Radiated Electric Field Emissions (30MHz to 2000MHz)

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Test description	Class/Limit
ICES 003 Class A	Radiated emissions	A

Results	Mode	Figure	Result Pass/Fail	Comments
	1	RE04-7	Pass	Vertical and Horizontal Results

Frequency (MHz)	Polarity (H/V)	Height (m)	Angle (degrees)	Detector Type	Spec distance (m)	E field @ spec distance (dBuV/m)	E field Limit (dBuV/m)	Margin (dB)	Result	Date of measurement
35.94	V	1.00	263	QP	10.0	25.2	39	-13.8	Pass	24/04/12
36.00	V	1.00	0	QP	10.0	26.8	39	-12.2	Pass	24/04/12
36.06	V	1.00	0	QP	10.0	27.0	39	-12.0	Pass	24/04/12
47.88	V	1.00	27	QP	10.0	24.6	39	-14.4	Pass	24/04/12
47.94	V	1.00	0	QP	10.0	26.7	39	-12.3	Pass	24/04/12
48.00	V	1.00	15	QP	10.0	31.8	39	-7.2	Pass	24/04/12
48.06	V	1.00	0	QP	10.0	27.1	39	-11.9	Pass	24/04/12
48.12	V	1.00	0	QP	10.0	24.3	39	-14.7	Pass	24/04/12

### 3.4 FCC Radiated Electric Field Emissions (30MHz to 2000MHz)

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Test description	Class/Limit
ICES 003 Class A	Radiated emissions	A

Results	Mode	Figure	Result Pass/Fail	Comments
	1	RE08-11	Pass	Vertical and Horizontal Results

Frequency (MHz)	Polarity (H/V)	Height (m)	Angle (degrees)	Detector Type	Spec distance (m)	E field @ spec distance (dBuV/m)	E field Limit (dBuV/m)	Margin (dB)	Result	Date of measurement
35.94	V	1.00	263	QP	10.0	25.2	40	-13.8	Pass	24/04/12
36.00	V	1.00	0	QP	10.0	26.8	40	-12.2	Pass	24/04/12
36.06	V	1.00	0	QP	10.0	27.0	40	-12.0	Pass	24/04/12
47.88	V	1.00	27	QP	10.0	24.6	40	-14.4	Pass	24/04/12
47.94	V	1.00	0	QP	10.0	26.7	40	-12.3	Pass	24/04/12
48.00	V	1.00	15	QP	10.0	31.8	40	-7.2	Pass	24/04/12
48.06	V	1.00	0	QP	10.0	27.1	40	-11.9	Pass	24/04/12
48.12	V	1.00	0	QP	10.0	24.3	40	-14.7	Pass	24/04/12

### 3.5 Conducted RF Immunity

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Description	Dwell time (s)	Level
EN 61000-4-6: 2009 Conducted Immunity (EN60945 clause 10.3)	Conducted RF Immunity	3	3Vrms dc port 3Vrms signal ports 150kHz-80MHz 1kHz 80% AM

Climatic conditions	Temperature (°C)	Humidity (%)	Pressure (kPa)
	24	32	99.6

Results	Mode	Cable	Injection	Figure	Result Pass/Fail	Observed effects & deviations from standard
	1	DC	EM Clamp	Visual	Pass	None
		GPS	EM Clamp	Visual	Pass	None
		VHF	EM Clamp	Visual	Pass	None

Spot Frequency Tests	Mode	Frequency (MHz)	Result Pass/Fai l	Observed effects & deviations from standard
	1	2.0MHz	Pass	None
		3.0MHz	Pass	None
		4.0MHz	Pass	None
		6.2MHz	Pass	None
		8.2MHz	Pass	None
		12.6MHz	Pass	None
		16.5MHz	Pass	None
		18.8MHz	Pass	None
		22.0MHz	Pass	None
		25.0MHz	Pass	None

Modifications	Required for this test	Modification state
	None	0

### 3.6 Radiated Immunity (80MHz-2000MHz)

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Description	Dwell time (s)	Test distance (m)	Level
EN61000-4-3:2006 +A1 +A2 Radiated RF Immunity (EN60945 clause 10.4)	Radiated Immunity	3seconds 80-1000MHz  9 seconds 1000-2000MHz 9 seconds	3	10V/m 80MHz-2000MHz 80% 400Hz AM Level 3

Climatic conditions	Temperature (°C)	Humidity (%)	Pressure (kPa)
	24	31	99.5

80-1000MHz

Results	Mode	EUT face	Pol'n	Figure	Result Pass/Fail	Observed effects & deviations from standard
1	1	0°	V	Visual	Pass	None
		0°	H	Visual	Pass	None
		90°	V	Visual	Pass	None
		90°	H	Visual	Pass	None
		180°	V	Visual	Pass	None
		180°	H	Visual	Pass	None
		270°	V	Visual	Pass	None
		270°	H	Visual	Pass	None

1000-2000MHz

Results	Mode	EUT face	Pol'n	Figure	Result Pass/Fail	Observed effects & deviations from standard
1	1	0°	V	Visual	Pass	None
		0°	H	Visual	Pass	None
		90°	V	Visual	Pass	None
		90°	H	Visual	Pass	None
		180°	V	Visual	Pass	None
		180°	H	Visual	Pass	None
		270°	V	Visual	Pass	None
		270°	H	Visual	Pass	None

Note 1: The front face of the EUT is deemed to be 0°, which is then turned in a clockwise direction through 270°.

Modifications	Required for this test	Modification state
	None	0

### 3.7 Immunity to Electrical Fast Transient / Burst

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Description	Application time (s)	Level
EN61000-4-4:2004 +A1 Electrical Fast Transients / Burst (EN60945 clause 10.5)	Electrical Fast Transients /Burst	60	±0.5kV signal ports (5kHz repetition frequency)

Climatic conditions	Temperature (°C)	Humidity (%)	Pressure (kPa)
	24	32	99.6

Results	Mode	Cable	Injection	Result Pass/Fail	Observed effects & deviations from standard
1	GPS	Indirect	Pass	None	

Note 1: Tests at lower severity levels have been performed

Modifications	Required for this test			Modification state
	None			

### 3.8 Immunity to Electrostatic Discharge

Mode of operation	Description	Mode No.
Active	EUT on & transmitting	1

Test standard	Test description	Number of discharges	Level
EN 61000-4-2: 2009 Electrostatic Discharge EN60945 clause 10.9	Electrostatic Discharge	10 air, 10 contact at both negative and positive polarity.	±8kV air, ±6kV contact

Climatic conditions	Temperature (°C)	Humidity (%)	Pressure (kPa)
	24	32	99.4

Results	Mode	Discharge Points	Result Pass/Fail	Observed effects & deviations from standard
		1	H1	
		H2	Pass	None
		H3	Pass	None
		H4	Pass	None
		V1	Pass	None
		V2	Pass	None
		V3	Pass	None
		V4	Pass	None
		A1	Pass	None
		A2	Pass	None
		A3	Pass	None
		A4	Pass	None
		A5	Pass	None
		C1	Pass	None
		C2	Pass	None
		C3	Pass	None
		C4	Pass	None

Note 1: The locations of the test points are contained in Appendix 9

Note 2: Tests at lower severity levels have been performed.

Modifications	Required for this test	Modification state
		0

## 4 Summary

### 4.1 Emissions

<b>Product Specific Standard</b>	EN60945:2002 Maritime navigation and radiocommunication equipment and systems (Not UKAS accredited)	
----------------------------------	---	--

<b>Basic Standard</b>	<b>Class/Limit</b>	<b>Result</b>
Conducted emissions EN60945:2002	Clause 9.3 Table 5	Pass
Radiated emissions EN60945:2002	Clause 9.3 Table 5	Pass

Note 1: The method of test for both the Conducted and Radiated test refers to CISPR 16-1. The Bristol Laboratory of York EMC Services is accredited to EN55016-1-2:2004 +A1 +A2.

### ICES Requirements

<b>Regulation / Test Standard</b>	ICES 003 Issue 4 February 2004 "Interference Causing Equipment Standard Digital Apparatus 2" (Not UKAS accredited)  CAN/CSA-CEI/IEC CISPR22:02 "Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment" (Not UKAS accredited)
-----------------------------------	---

<b>Basic Standard</b>	<b>Class/Limit</b>	<b>Result</b>
Radiated electric field emissions	ICES 003 Class A	Pass

Note 1: ICES testing was carried out at the Castleford laboratory of York EMC Services. The Castleford Laboratory is accredited to EN55022:2010 (CISPR22)

### FCC Requirements

<b>Regulation/Test Standard</b>	Title 47 of the Code of Federal Regulations (CFR) Part 15 (47CFR15):2011 Subpart B – Unintentional Radiators  ANSI C63.4-2003 American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz
---------------------------------	---

<b>Basic Standard</b>	<b>Class/Limit</b>	<b>Result</b>
Radiated electric field emissions	Class A 30MHz to 2000MHz	Pass

Note 1: FCC testing was carried out at the Castleford laboratory of York EMC Services.

#### 4.2 Immunity

<b>Product Specific Standard</b>	EN60945:2002 Maritime navigation and radiocommunication equipment and systems (Not UKAS accredited)		
<b>Basic Standard</b>	<b>Level</b>	<b>Criterion</b>	<b>Result</b>
EN 61000-4-6: 2009 Conducted RF Immunity (EN60945 clause 10.3)	3Vrms 150kHz to 80MHz 10Vrms spot frequencies 80% AM modulation 400Hz	A	Pass
EN61000-4-3:2006 +A1 +A2 Radiated RF Immunity (EN60945 clause 10.4)	10V/m 80MHz-2000MHz 80% 400Hz AM Level 3	A	Pass
EN61000-4-4:2004 +A1 Electrical Fast Transients / Burst EN60945 clause 10.5	±1kV signal ports	B	Pass
EN 61000-4-2: 2009 Electrostatic Discharge (EN60945 clause 10.9)	+/-6kV contact +/-8kV air	B	Pass

Note 1: Testing to EN60945:2002 is not within the scope of the UKAS accreditation of the Bristol Laboratory of York EMC Services. Testing to the EN61000 series of basic immunity standards is UKAS accredited unless stated otherwise.

#### 4.3 Compliance Statement

The Digital Yacht AIT 2000, as tested, was shown to meet the requirements of the standards listed in 4.1 and 4.2 of this report.

## 5 Appendices

### 5.1 Appendix 1. Conducted Emission (dc port) Test Method

#### 5.1.1 Test Information

<b>Standard</b>	EN60945:2002 Clause 9.3
<b>YES Test Method</b>	BEP19
<b>Measurement uncertainty</b>	±3.5dB

#### Test Equipment Used

Instrument	YES Serial No.
Rainford Shielded Room	LAB2
Impedance Stabilisation Network	B0868
10dB Attenuator / Limiter	B0539
6dB Attenuator	B0949
Connector Adaptor	B0873
Connector Adaptor	B0871
Rohde & Schwarz ESHS10 Measuring Receiver	B0916
LISN Verification IEC Connector	B0896
CNE V Emission Source	B0855
CNE V to T800ISN Connector	B0897
Vaisala Temperature/Relative Humidity Meter HM34C	B0854

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.2 Appendix 2. Radiated Emission Test Method (150kHz to 2000MHz)

### 5.2.1 Test Information

<b>Standards</b>	EN60945:2002 Clause 9.3
<b>YES Test Method</b>	BEP23
<b>Measurement uncertainty</b>	5.12dB as defined by EN55016-4-2:2004

### Test Equipment Used

Instrument	YES Serial No.
Rainford Semi Anechoic Shielded Room	LAB1
60A Mains Filter DS23335C	(Fixed)
ETS Lindgren 6512 Loop Antenna, 0.15-30MHz	B0921
Chase Bilog Antenna CBL6111A, 30MHz - 1GHz	B0544
Rohde & Schwarz HL-050 Log Periodic Antenna, 1-2GHz	B0936
Maturo Antenna Mast	B0934
Clark Compressor (Mast)	B0953
Rohde & Schwarz ESU Measuring Receiver	B0984
CNE V Emission Source	B0855

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

### 5.3 Appendix 3. ICES Radiated Emission Test Method (30MHz to 2000MHz)

#### 5.3.1 Test Information

<b>Standards</b>	CAN/CSA-CEI/IEC CISPR22:02
<b>YES Test Method</b>	CEP19/CEP23

#### Test Equipment Used

Instrument	YES Serial No.
ESVS 30 Receiver	78107
X wing antenna	78310
EMCO 3115 Horn Antenna	78347
HP Analyser 8594E	78662
HP pre amp 8449B	On hire
ESHS 10 Receiver	78035
ESH3 Z5 LISN	78119
ESH3 Z5 LISN	78037
CFL 9206 Transient limiter	78087
CBL6112B Green Bilog	78708

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.4 Appendix 4. FCC Radiated Emission Test Method (30MHz to 2000MHz)

### 5.4.1 Test Information

<b>Standards</b>	CFR47:2008 Part 15
<b>YES Test Method</b>	CEP19/CEP23

### Test Equipment Used

Instrument	YES Serial No.
ESVS 30 Receiver	78107
X wing antenna	78310
EMCO 3115 Horn Antenna	78347
HP Analyser 8594E	78662
HP pre amp 8449B	On hire
ESHS 10 Receiver	78035
ESH3 Z5 LISN	78119
ESH3 Z5 LISN	78037
CFL 9206 Transient limiter	78087
CBL6112B Green Bilog	78708

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.5 Appendix 5. Conducted RF Immunity Test Method

### 5.5.1 Test Information

<b>Standard</b>	EN6100-4-4:2009 EN60945:2002 Clause 10.3
<b>YES Test Method</b>	BEP2
<b>Measurement Uncertainty</b>	±2.1dB

### Test Equipment Used

Instrument	YES Serial No.
Emerson & Cuming Eccoshield Shielded Room 6052	LAB2
Kalmus RF Amplifier 225LC	B0610
Rohde & Schwarz RF Generator SML02	B0744
Amplifier Research Coupler DC2600A	B0830
Rohde & Schwarz Power Meter NRVD	B0823
Bird 6dB Attenuator	B0915
Rohde & Schwarz Insertion Unit URY-Z4	B0824
Rohde & Schwarz Insertion Unit URY-Z4	B0825
Schaffner EM-Clamp KEMZ 801	B0609
50 Ohm RF CDN Termination	B0888
Vaisala Temperature/Relative Humidity Meter HM34C	B0854

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.6 Appendix 6. Radiated Immunity Test Method

### 5.6.1 Test Information

<b>Standard</b>	EN61000-4-3:2006+A1+A2 EN60945:2002 Clause 10.4
<b>YES Test Method</b>	BEP30
<b>Measurement Uncertainty</b>	±1.2dB (≤1GHz); ±1.54dB (1-2GHz)

### Test Equipment Used

Instrument	YES Serial No.
Rainford Semi Anechoic Shielded Room C776 001A	LAB1
AR ATL 80M1G Bilog Antenna	B0983
Schaffner RF (3GHz) Amplifier	B0903
BBHA 9120A Horn Antenna	B0748
50Ohm RF Termination (3GHz)	B0887
AR DC7144A Insertion Unit (3GHz)	B0832
Amplifier Research RF Amplifier 150W1000	B0826
Rohde & Schwarz RF Generator SMC100A	B0939
Rohde & Schwarz Power Meter NRV	B0929
Rohde & Schwarz Power Sensor NRV-Z5	B0930
RS 50ohm RF Termination (1GHz)	B0886
Amplifier Research Insertion Unit DC6180A	B0831
Amplifier Research FL7000 Laser Probe System	B0828
Alien Camera Monitor System	B1284
Vaisala Temperature/Relative Humidity Meter HM34C	B0854

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.7 Appendix 7. Immunity to Electrical Fast Transients /Burst Test Method

### 5.7.1 Test Information

<b>Standard</b>	EN6100-4-4:2004 +A1 EN60945:2002 Clause 10.5
<b>YES Test Method</b>	BEP41
<b>Measurement Uncertainty</b>	The uncertainties associated with the applied pulse characteristics, calculated at a probability confidence of 95%, were all within the tolerance limits given in the appropriate standard.

### Test Equipment Used

Instrument	YES Serial No.
Rainford Shielded Room	LAB2
Schaffner Coupling Clamp CDN 125	B0522
Schaffner Fast Transient Generator NSG2025	B0817
NSG2025 Cable to Coupling Clamp	B06
Tektronix Oscilloscope 2230	B0275
Vaisala Temperature/Relative Humidity Meter HM34C	B0854
Oregon Scientific Environmental Monitor (Pressure)	B0549

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.8 Appendix 8. Immunity to Electrostatic Discharge Test Method

### 5.8.1 Test Information

<b>Standard</b>	EN61000-4-2:2009 EN60945:2002 Clause 10.9
<b>YES Test Method</b>	BEP40
<b>Measurement uncertainty</b>	The uncertainties associated with the applied pulse characteristics, calculated at a probability confidence of 95%, were all within the tolerance limits given in the appropriate standard.

### Test Equipment Used

Instrument	YES Serial No.
Rainford Shielded Room	LAB2
Schaffner NSG 435 Simulator	B0927
Schaffner NSG 435 Air discharge tip	B0927
Schaffner NSG 435 contact discharge tip	B0927
Vertical Coupling Plane	B0809
Horizontal Coupling Plane	B0808
ESD go/no go Verification Jig	B0899
Vaisala Temperature/Relative Humidity Meter HM34C	B0854
Oregon Scientific Environmental Monitor (Pressure)	B0549

Note: Specific set-ups for the EUT are shown in EUT test configurations section of this report (where applicable).

## 5.9 Appendix 9. ESD Test Point Locations




Figure 5.9.1 ESD test point locations




Figure 5.9.2 ESD test point locations

Discharge	Discharge Location	Discharge Type
V1-V4	Vertical coupling plane	Contact
H1-H4	Horizontal coupling plane	Contact
A1	Front panel	Air
A2	Silent LED	Air
A3	Status LED	Air
A4	TX Timeout LED	Air
A5	Power Up LED	Air
C1	Top case	Contact
C2	VHF Connecter	Contact
C3	GPS Connecter	Contact
C4	NMEA 2000 Connecter	Contact


## 5.10 Appendix 10. Conducted Emissions Test Results

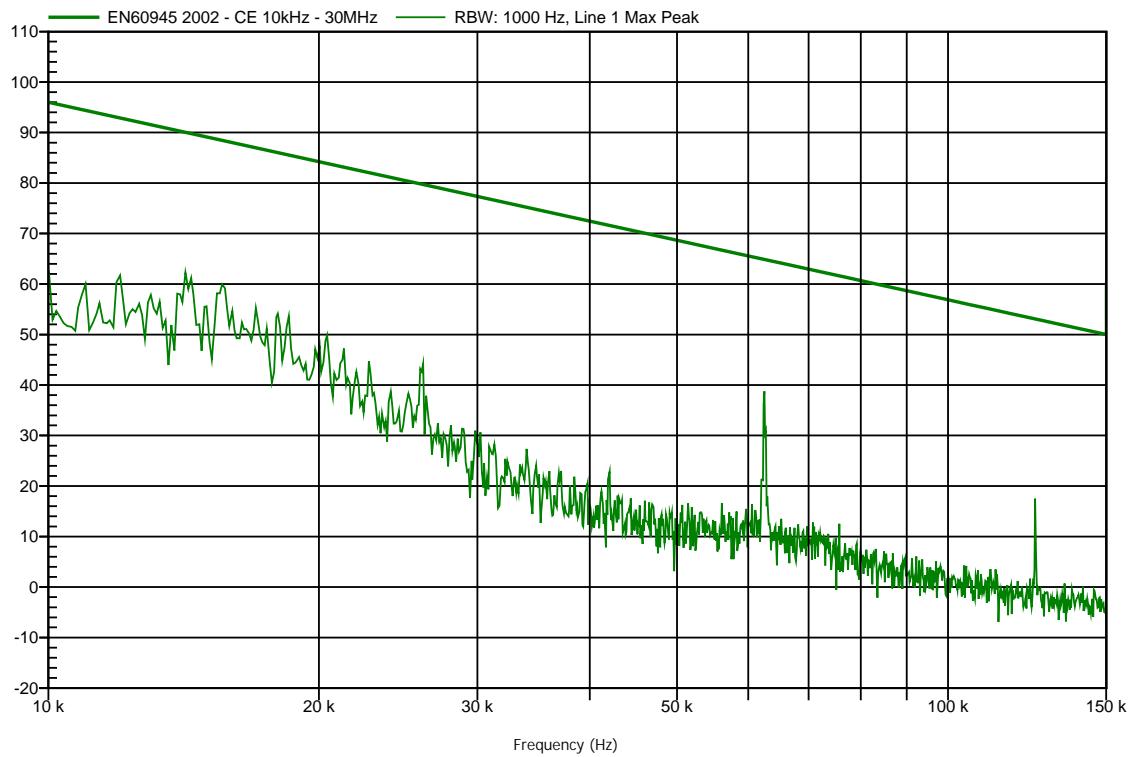


**Figure 5.10.1 Conducted Emissions Results (10kHz–150kHz) LIVE CE01**

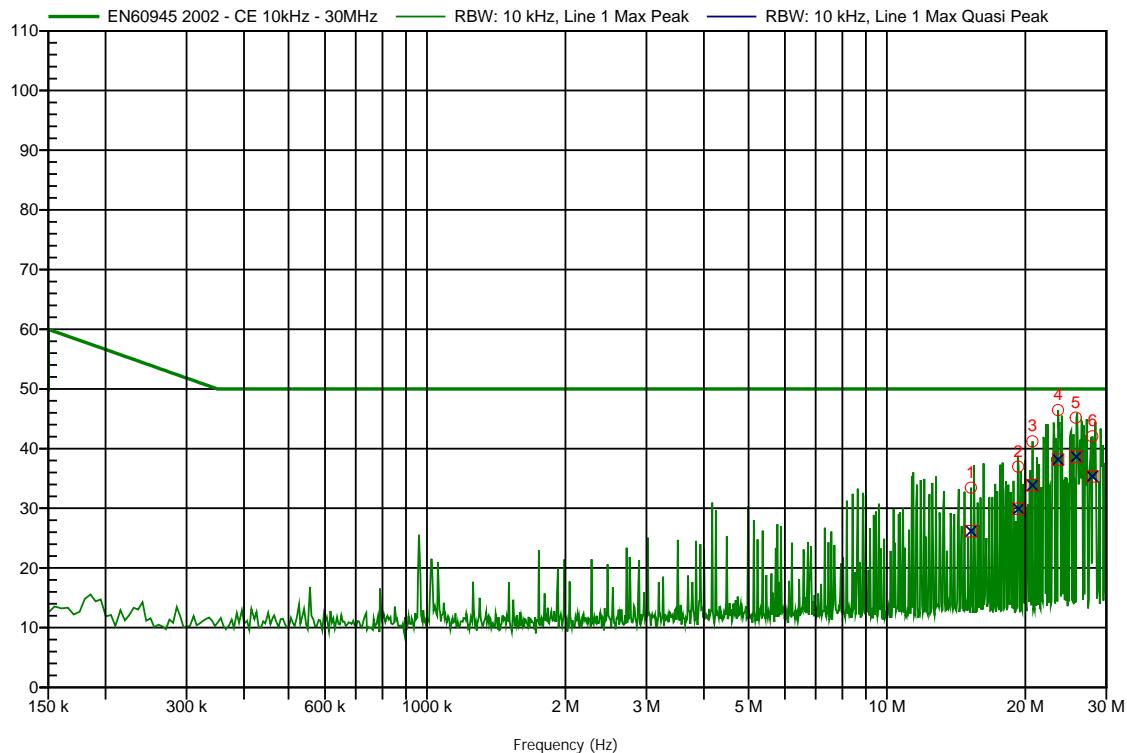

**Figure 5.10.2 Conducted Emissions Results (150kHz–30MHz) LIVE CE02**

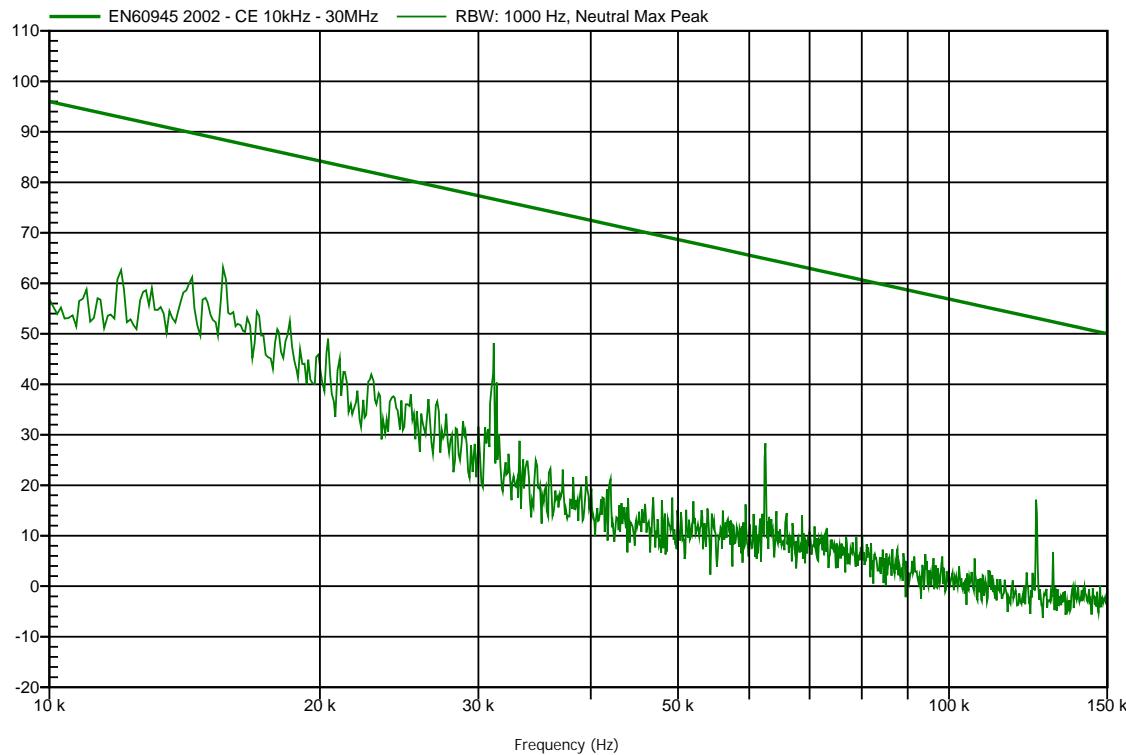

**Figure 5.10.3 Conducted Emissions Results (10kHz-150kHz) NEUTRAL CE03**

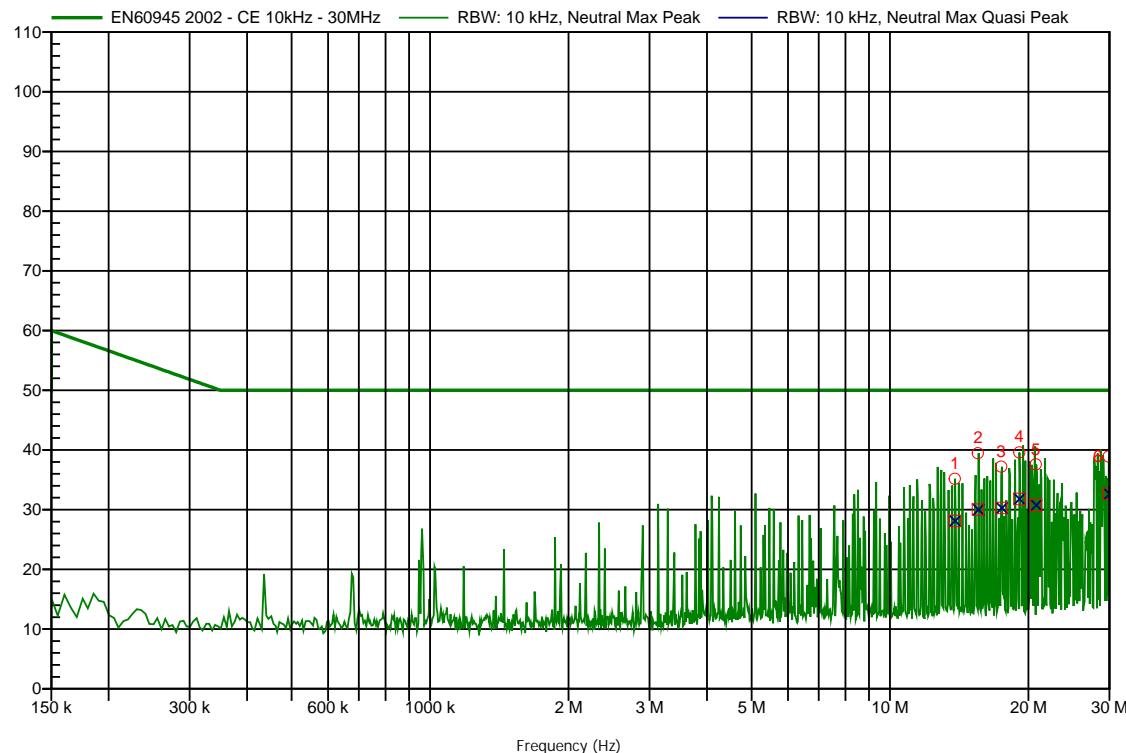


**Figure 5.10.4 Conducted Emissions Results (150kHz-30MHz) NEUTRAL CE04**

## 5.11 Appendix 11. Radiated Emission Test Results

### Digital Yacht AIT2000, 0° Parallel

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

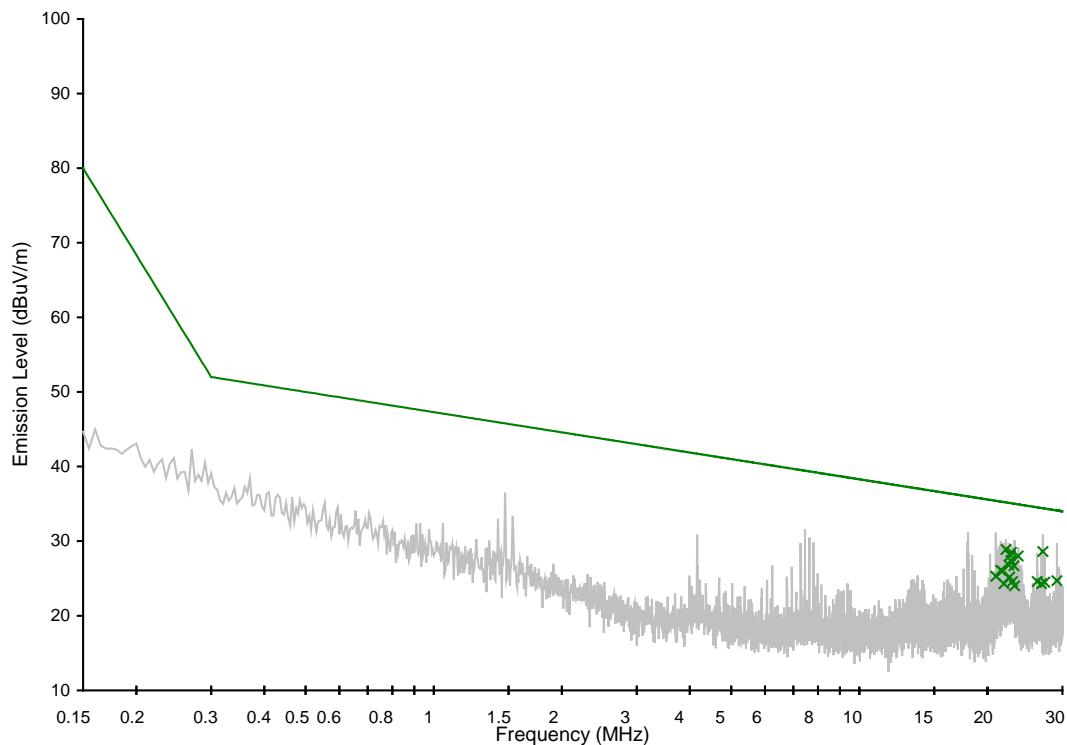


#### Frequencies with worst clearances and within 20dB of the quasi-peak limit

<u>MHz</u>	<u>QP dB<math>\mu</math>V</u>	<u>Clears by (dB)</u>
22.115	28.9	Pass
22.645	28.1	Pass
22.715	27.4	Pass
22.775	28.5	Pass
23.610	28.0	Pass
27.000	28.6	Pass
23.095	26.7	Pass
22.455	26.8	Pass
21.495	26.1	Pass
21.685	26.0	Pass
29.110	24.7	Pass
27.255	24.5	Pass
22.555	25.2	Pass
26.165	24.6	Pass
20.920	25.3	Pass
26.805	24.3	Pass
22.885	24.6	Pass

Figure 5.11.1 Radiated Emissions Results (ME01)

**Digital Yacht AIT2000, 90° Parallel**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

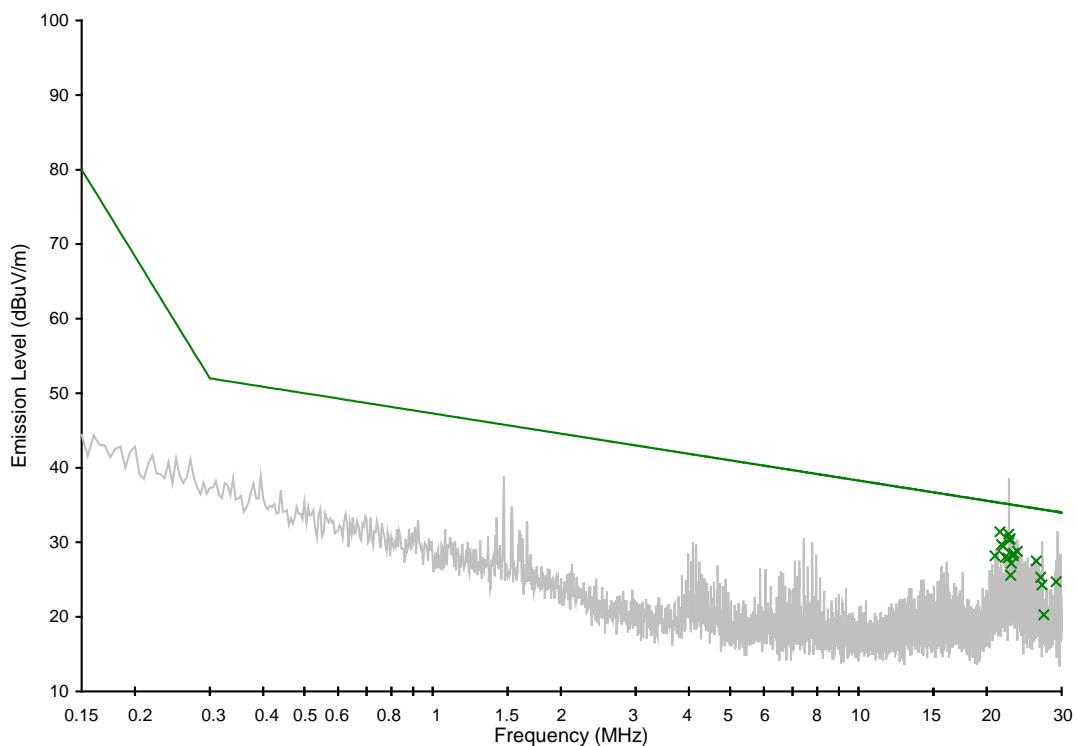
**Frequencies with worst clearances and within 20dB of the quasi-peak limit**

<u>MHz</u>	<u>QP dBuV</u>	<u>Clears by (dB)</u>
21.495	31.4	3.9
21.685	29.7	5.6
21.860	29.5	5.7
22.555	31.1	4.0
22.645	30.3	4.8
22.715	30.5	4.6
23.610	28.8	6.1
23.155	28.5	6.5
23.095	28.2	6.8
26.165	27.5	7.0
22.115	28.0	7.2
20.920	28.2	7.2
22.455	27.9	7.2
22.885	27.2	7.9
26.805	25.3	9.1
29.110	24.7	9.4
22.775	25.6	9.5

**Figure 5.11.2 Radiated Emissions Results (ME02)**

**Digital Yacht AIT2000, 180° Parallel**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

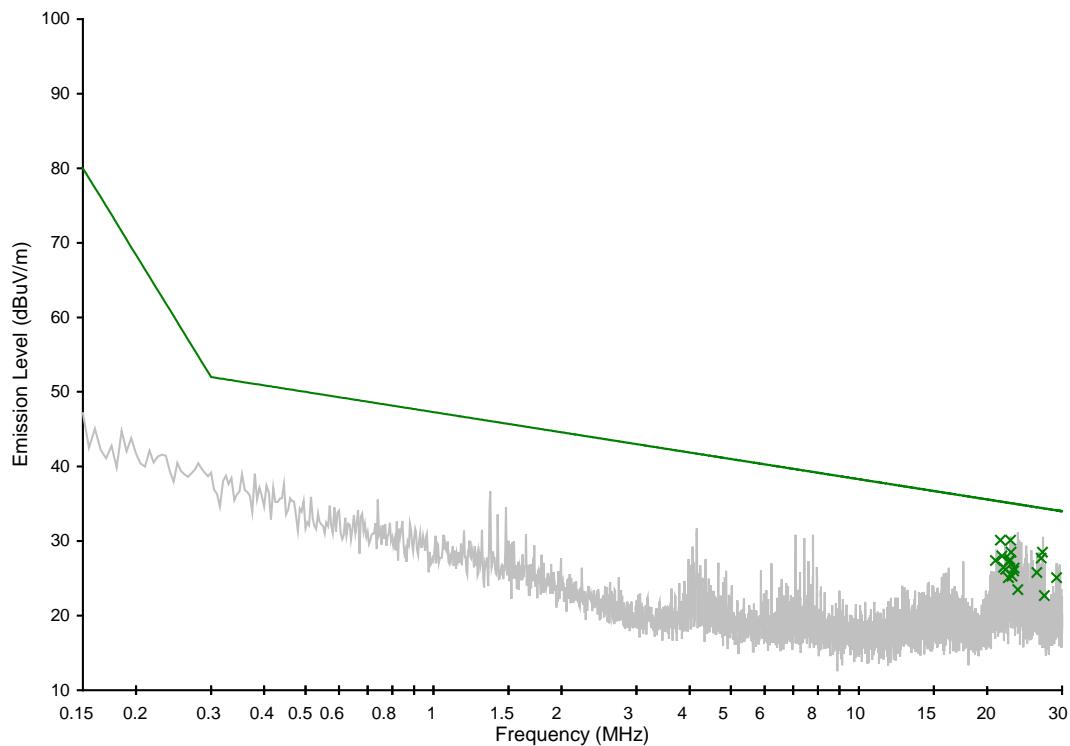
**Frequencies with worst clearances and within 20dB of the quasi-peak limit**

<u>MHz</u>	<u>QP dBuV</u>	<u>Clears by (dB)</u>
21.495	30.1	Pass
21.685	28.0	Pass
22.715	30.1	Pass
22.775	28.5	Pass
26.805	27.7	Pass
27.000	28.5	Pass
22.645	27.5	Pass
22.555	27.3	Pass
20.920	27.4	Pass
23.155	26.4	Pass
26.165	25.8	Pass
21.860	26.5	Pass
22.115	26.2	Pass
29.110	25.1	Pass
23.095	26.0	Pass
22.885	25.3	Pass
22.455	25.1	Pass

**Figure 5.11.3 Radiated Emissions Results (ME03)**

**Digital Yacht AIT2000, 270° Parallel**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

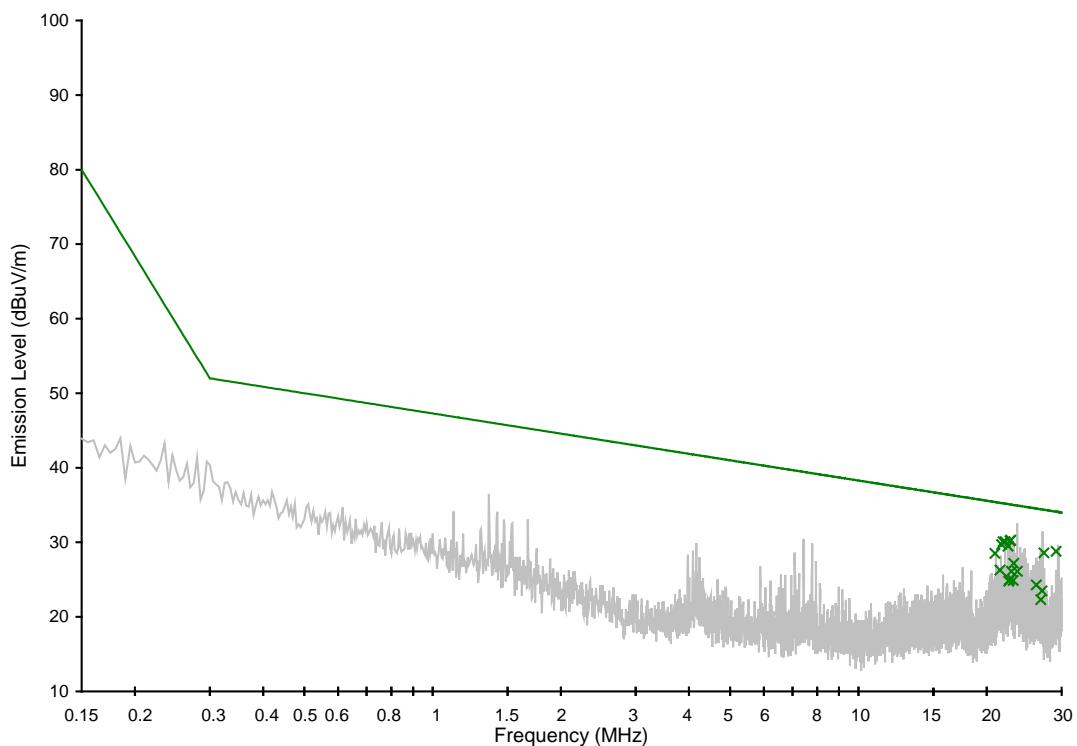
**Frequencies with worst clearances and within 20dB of the quasi-peak limit**

<u>MHz</u>	<u>QP dBuV</u>	<u>Clears by (dB)</u>
21.685	29.7	Pass
21.860	30.1	Pass
22.115	30.1	Pass
22.715	30.2	Pass
22.775	30.3	Pass
29.110	28.8	Pass
22.455	29.5	Pass
27.255	28.6	Pass
20.920	28.5	Pass
23.155	27.2	Pass
23.610	26.1	Pass
22.885	26.1	Pass
21.495	26.3	Pass
22.645	25.0	Pass
23.095	24.9	Pass
26.165	24.3	Pass
22.555	24.8	Pass

**Figure 5.11.4 Radiated Emissions Results (ME04)**

**Digital Yacht AIT2000, 0° Perpendicular**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

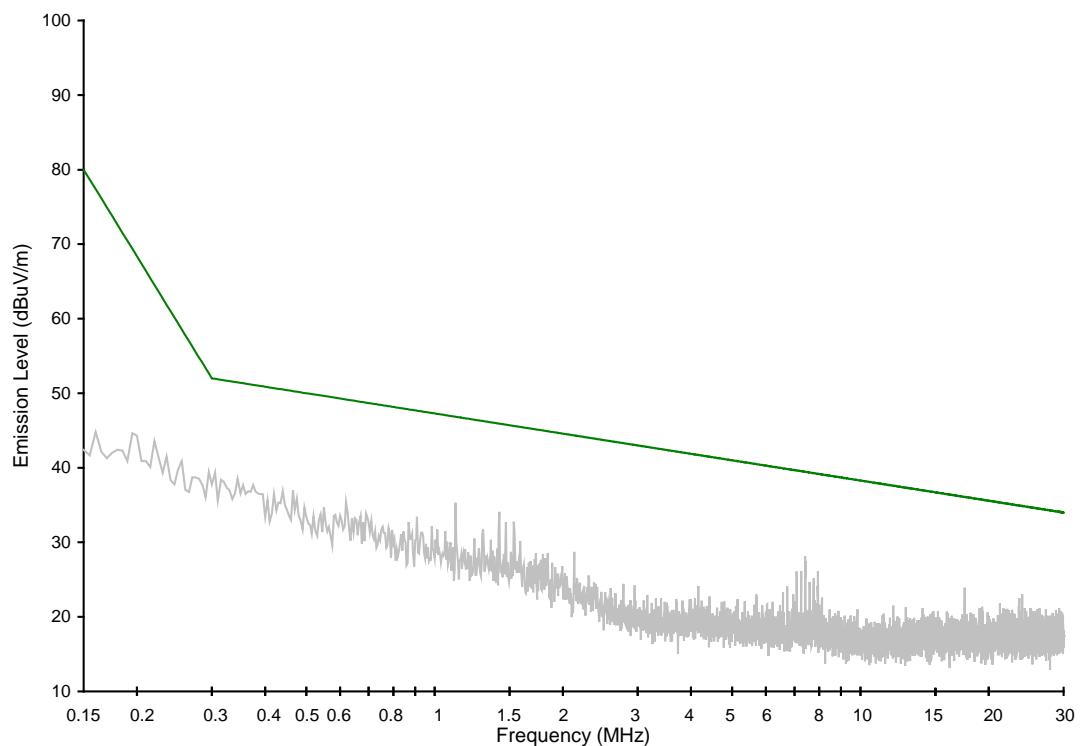


No quasi-peak results within 20dB of the limit

**Figure 5.11.5 Radiated Emissions Results (ME05)**

**Digital Yacht AIT2000, 90° Perpendicular**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

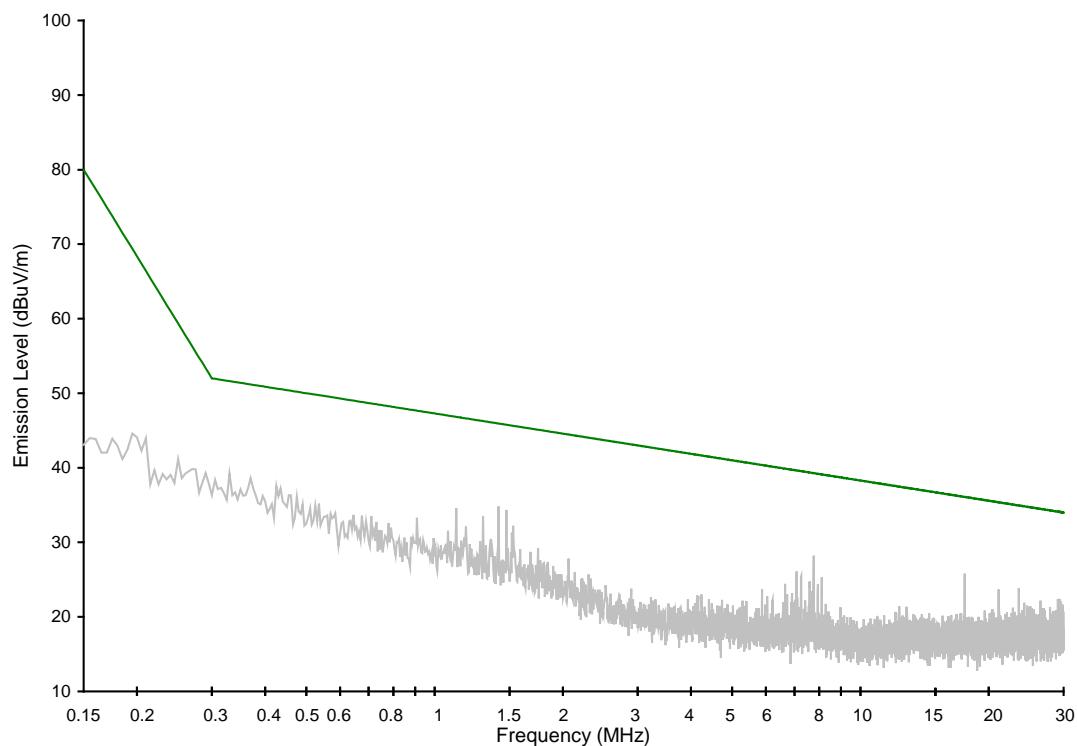


No quasi-peak results within 20dB of the limit

**Figure 5.11.6 Radiated Emissions Results (ME06)**

**Digital Yacht AIT2000, 180° Perpendicular**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

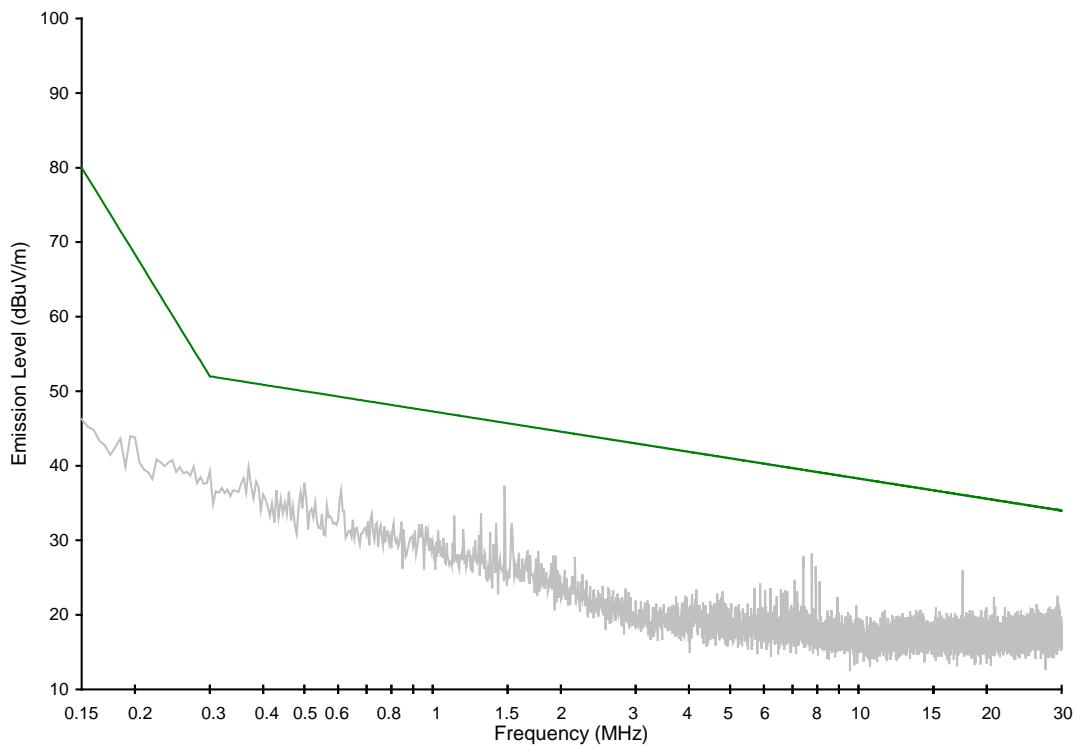


No quasi-peak results within 20dB of the limit

**Figure 5.11.7 Radiated Emissions Results (ME07)**

**Digital Yacht AIT2000, 270° Perpendicular**

EN60945:2002 Radiated Emissions, Loop Antenna  
Quasi Peak (X), peak levels shown greyed

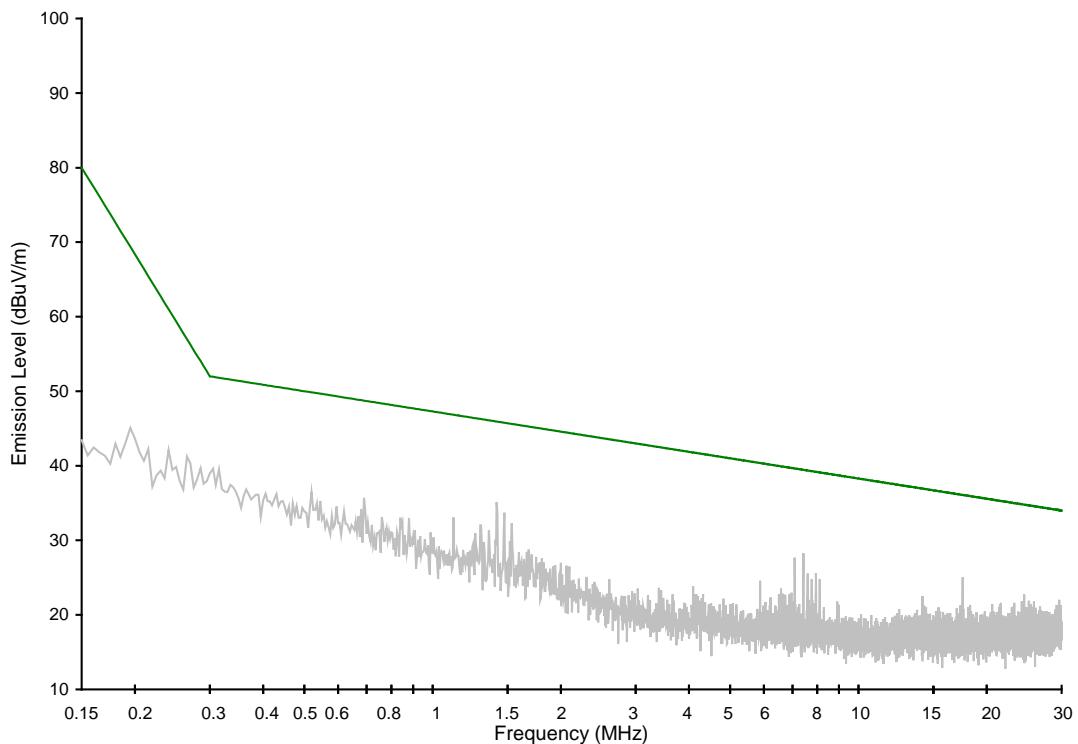

No quasi-peak results within 20dB of the limit

**Figure 5.11.8 Radiated Emissions Results (ME08)**




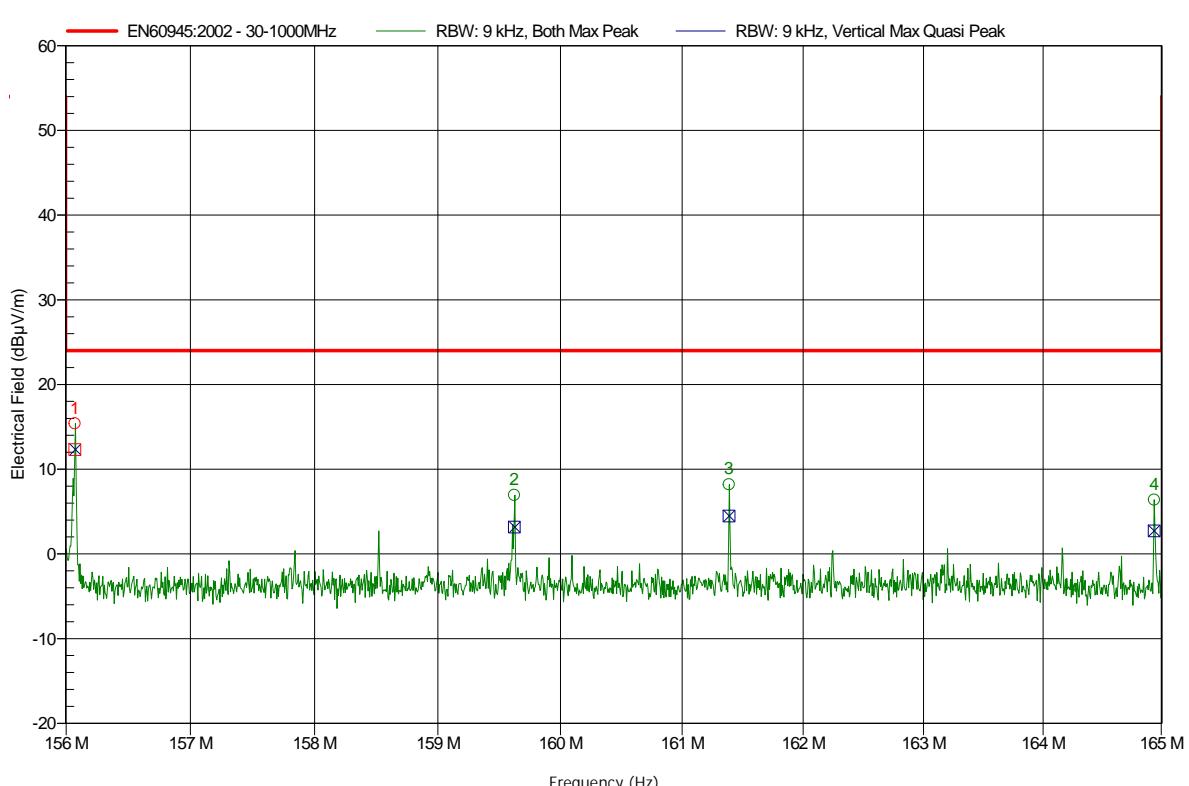


Figure 5.11.10 Radiated Emissions Results (RE02)

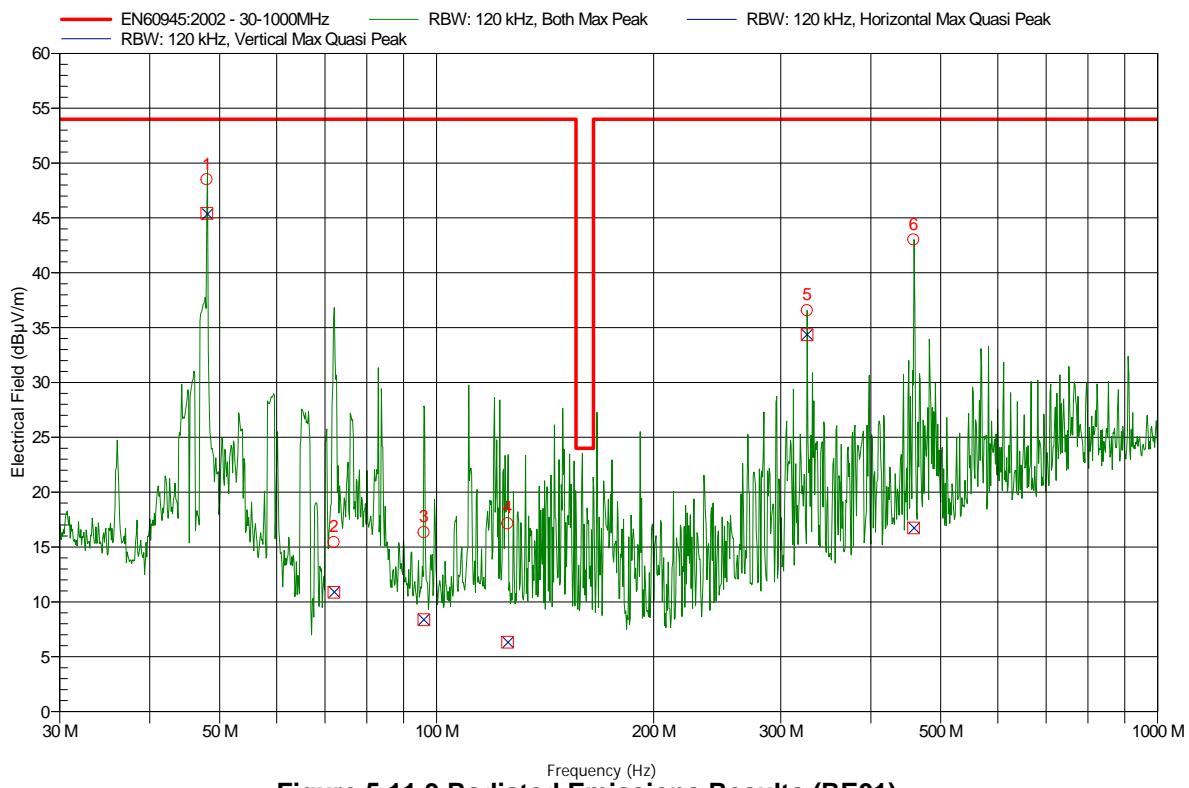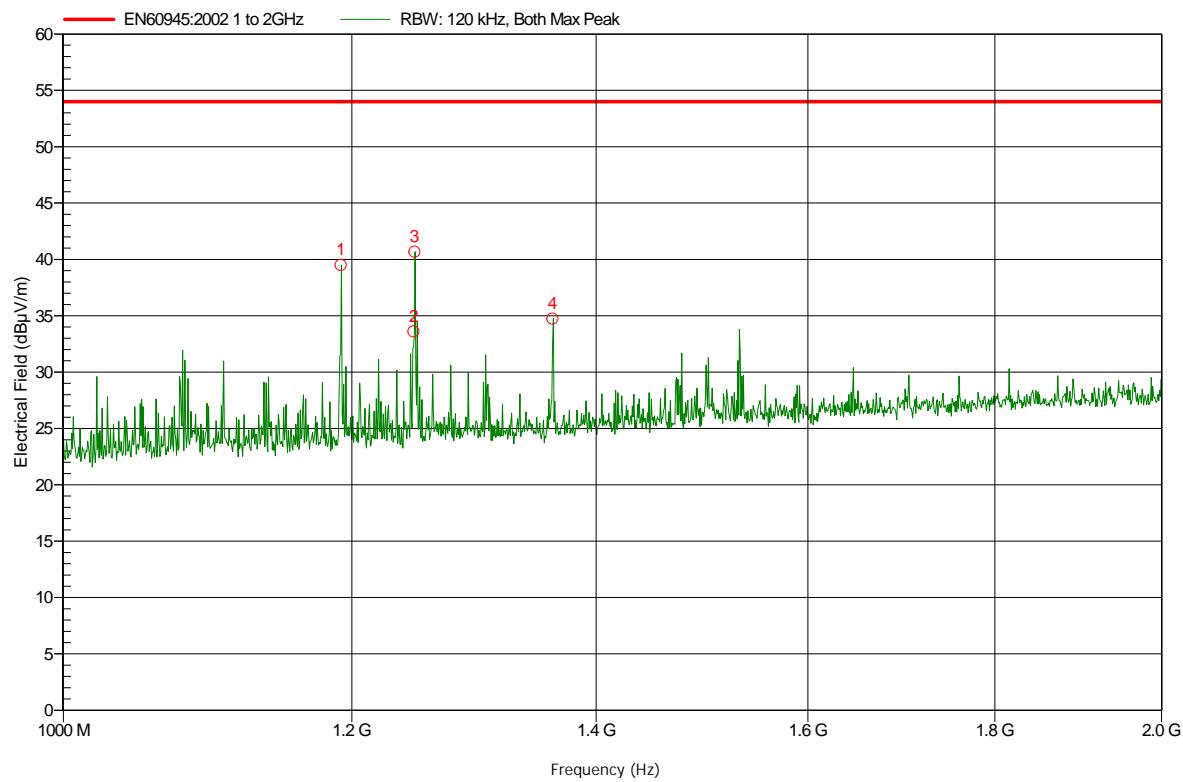


**Figure 5.11.11 Radiated Emissions Results (RE03)**


### 5.12 Appendix 12. ICES Radiated Emission Test Results (30MHz to 2000MHz)

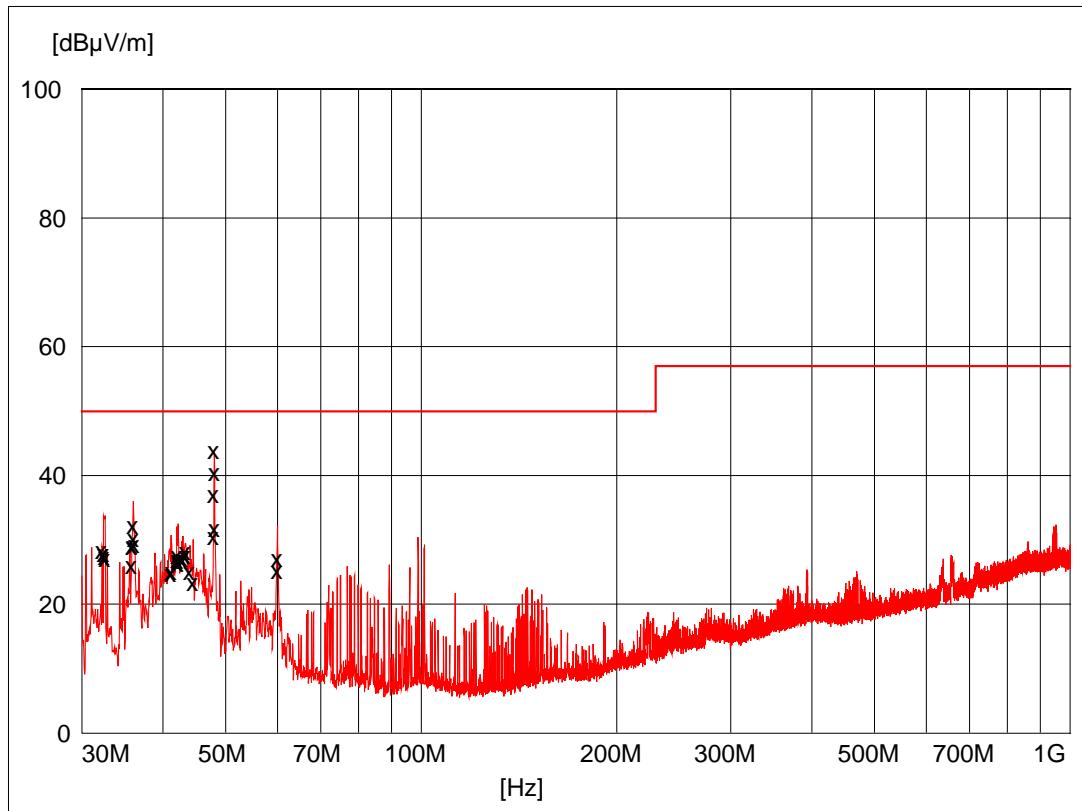


**Figure 5.12.1 Radiated Emissions Results  
Chamber result @ 3m (RE04)**

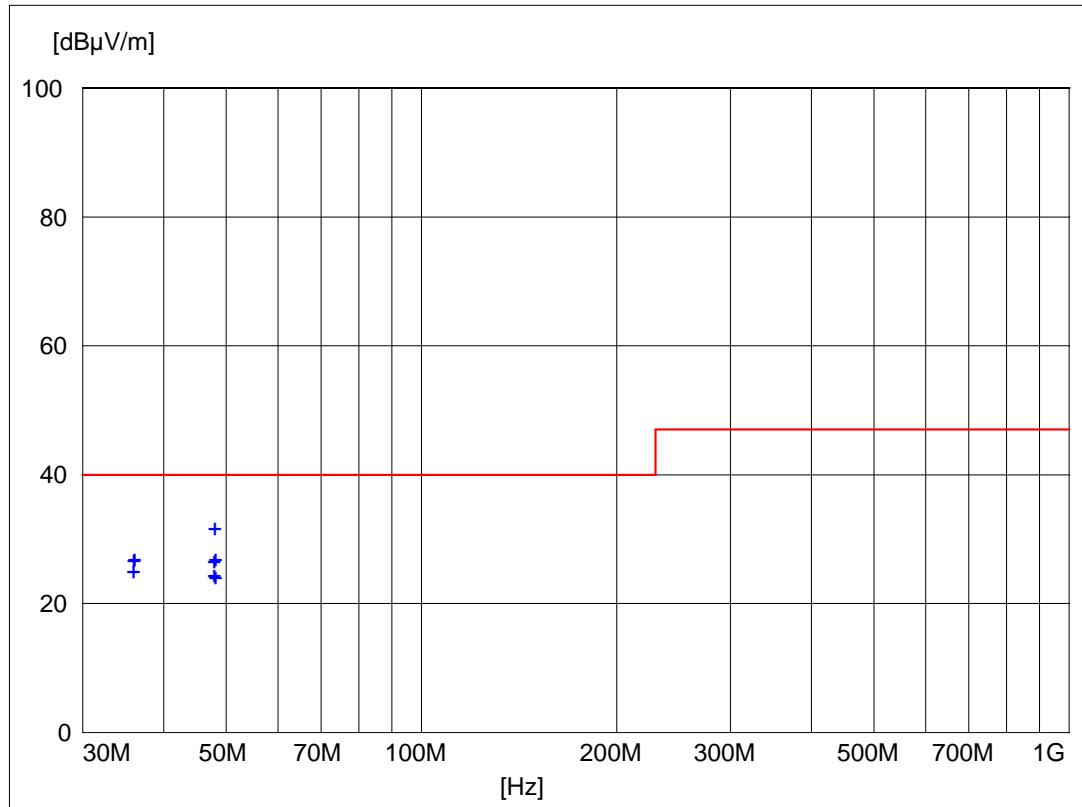


**Figure 5.12.2 Radiated Emissions Results  
Open area test site @10m (RE05)**

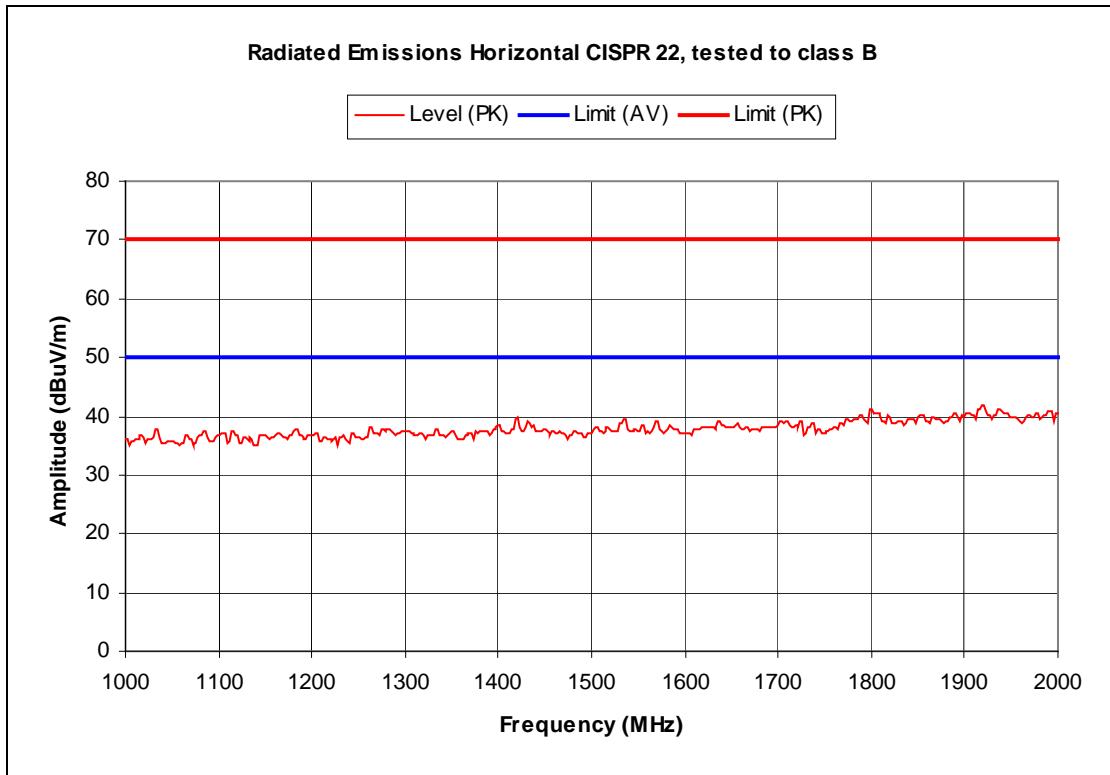


**Figure 5.12.3 Radiated Emission Result (RE06)**

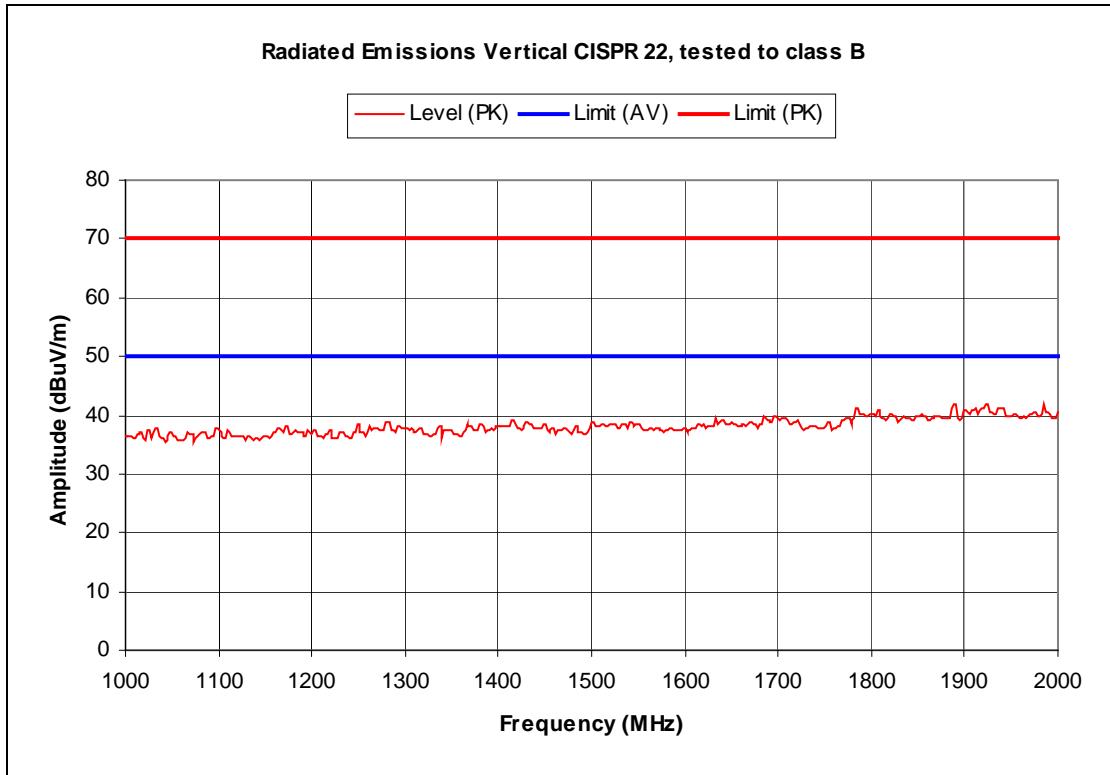


**Figure 5.12.4 Radiated Emission Result (RE07)**

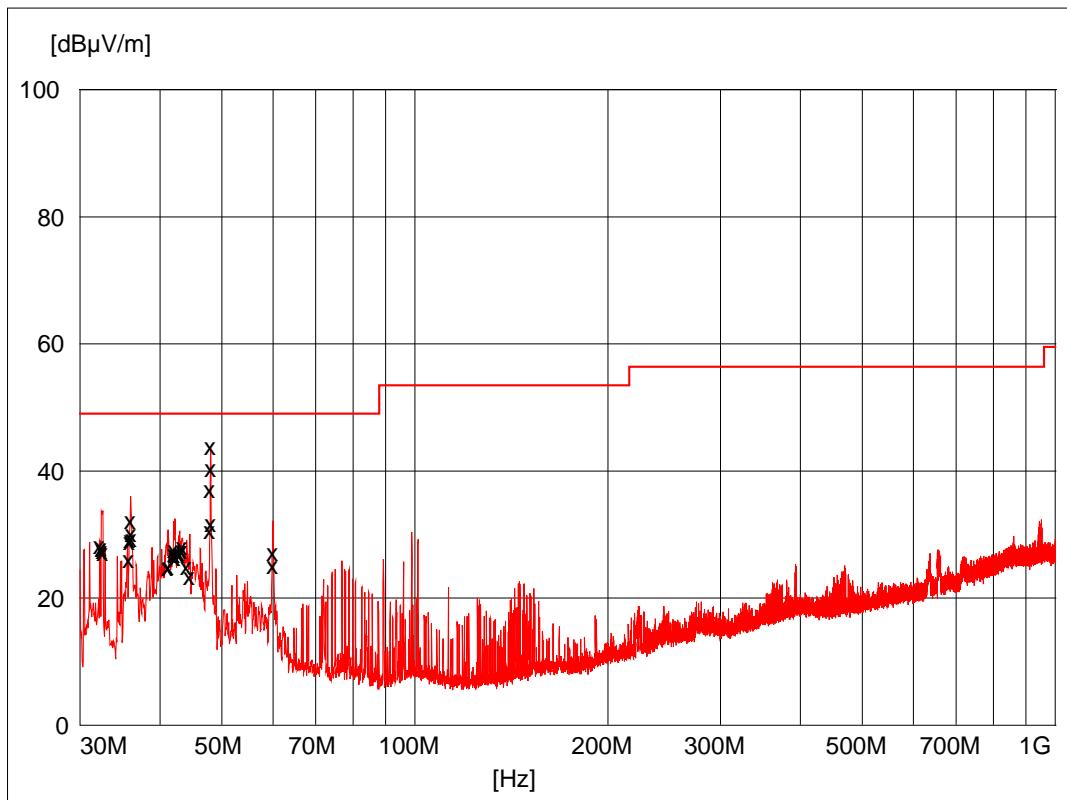**5.13 Appendix 13. FCC Radiated Emission Test Results (30MHz-2000MHz)**


**Figure 5.13.1 Radiated Emissions Results**  
**Chamber result @ 3m (RE08)**

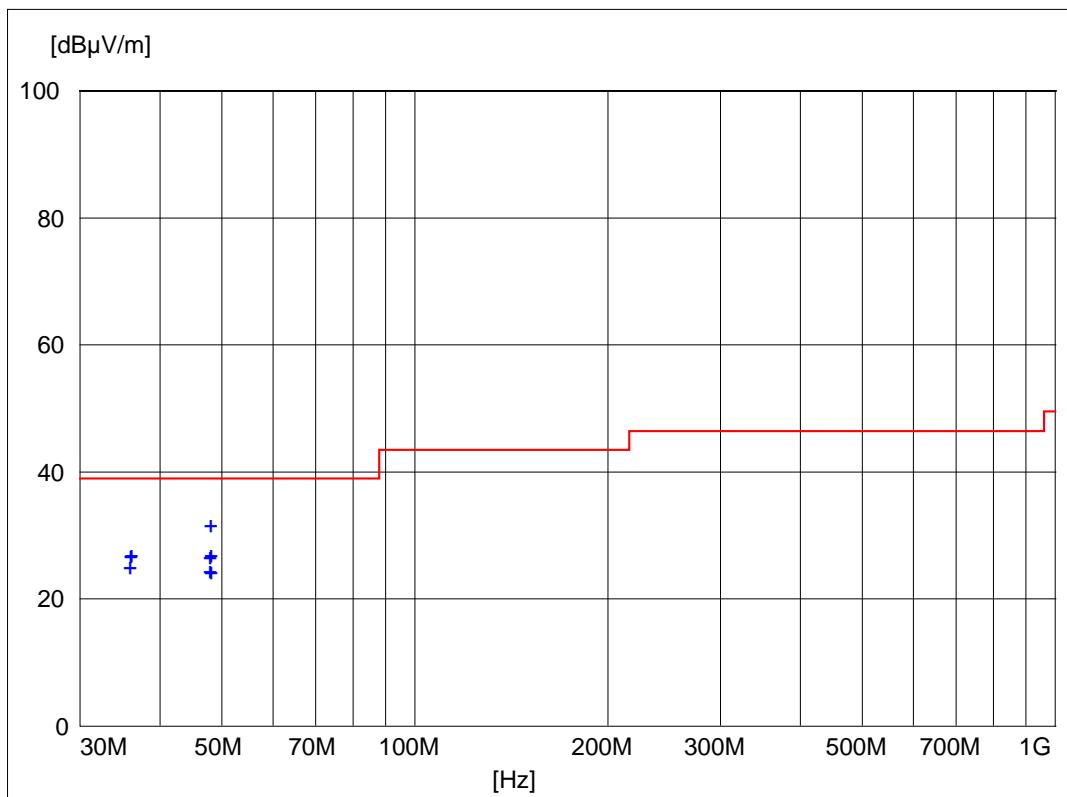

**Figure 5.13.2 Radiated Emissions Results**  
**Open area test site @10m (RE09)**

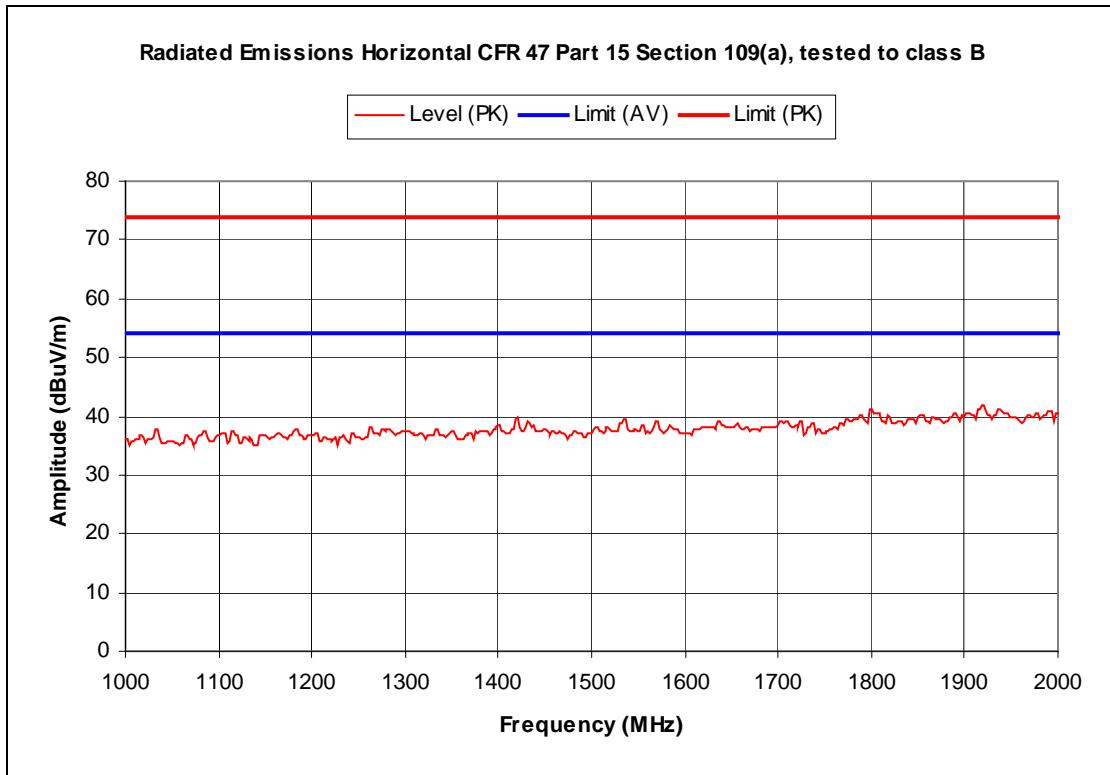

**Figure 5.13.3 Radiated Emission Result (RE10)**

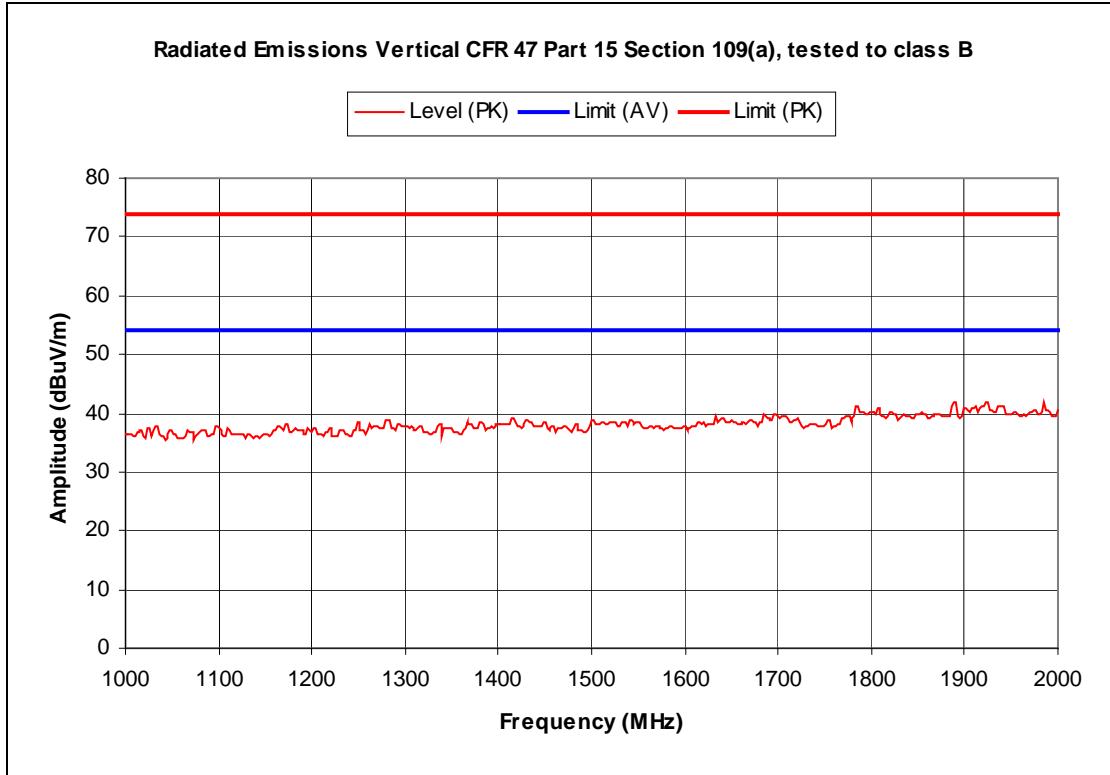

**Figure 5.13.4 Radiated Emission Results (RE11)**

### 5.14 Appendix 14. EUT Test Configurations



Figure 5.14.1 Conducted Emissions Testing



Figure 5.14.2 Radiated Emissions 150kHz to 30MHz Testing

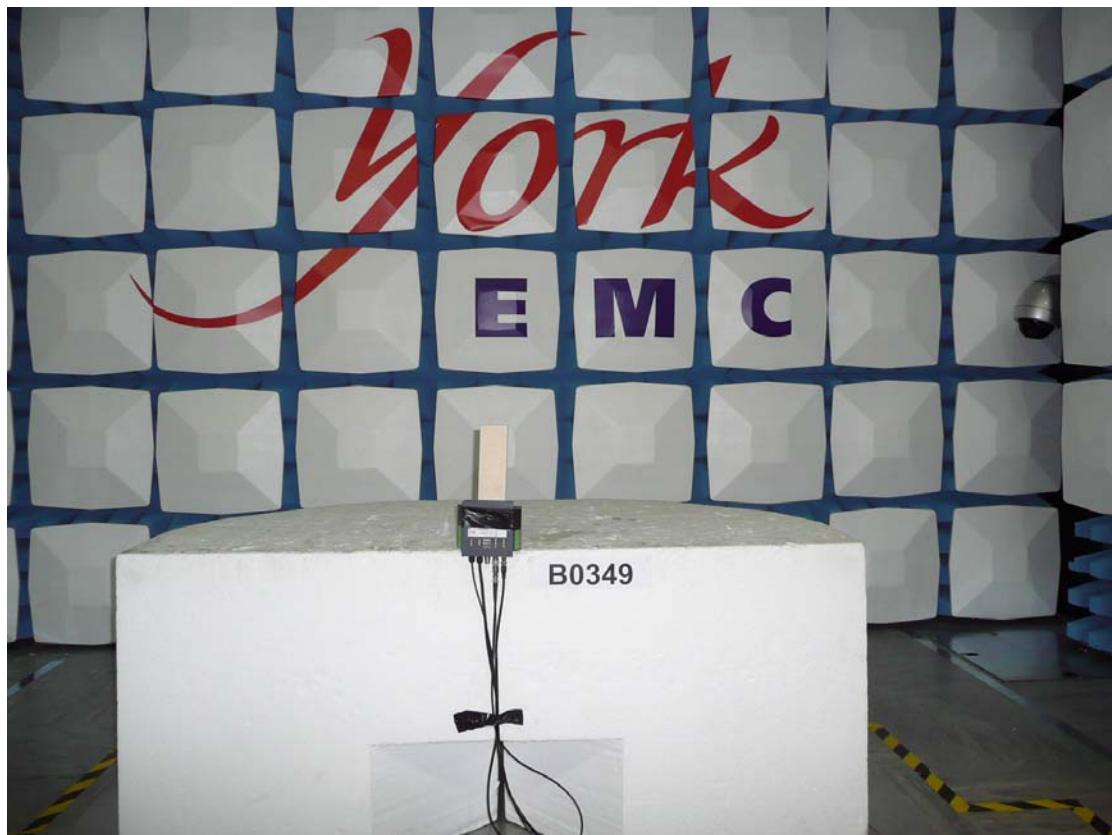


Figure 5.14.3 Radiated Emissions 30MHz to 1000MHzTesting

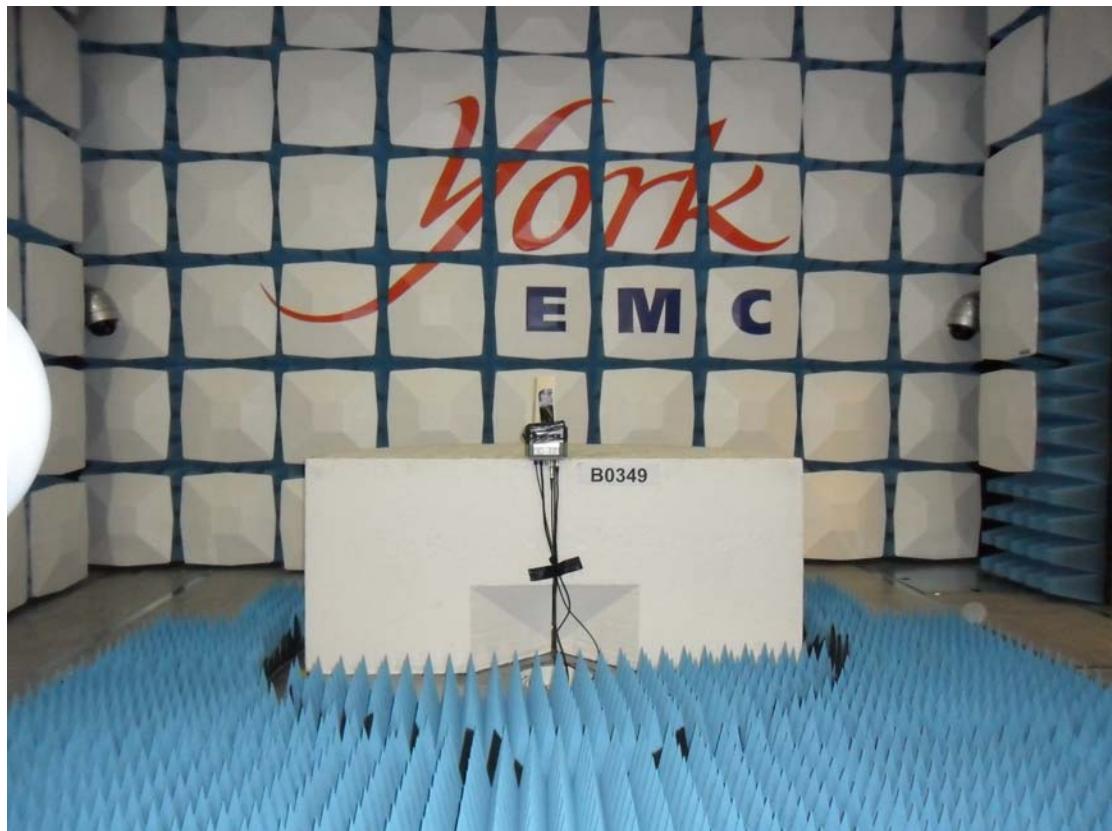


Figure 5.14.4 Radiated Emissions 1000MHz to 2000MHzTesting



**Figure 5.14.5 ICES and FCC Testing  
Radiated emissions 30MHz to 1000MHz in chamber @ 3m**



**Figure 5.14.6 ICES and FCC Testing  
Radiated emissions 1GHz to 2GHz in chamber @ 3m**



Figure 5.14.7 Canadian & USA Requirements Testing  
Radiated emissions open area test site 30MHz to 1000MHz @ 10m



Figure 5.14.8 ESD Testing – Air



Figure 5.14.9 ESD Testing – Contact


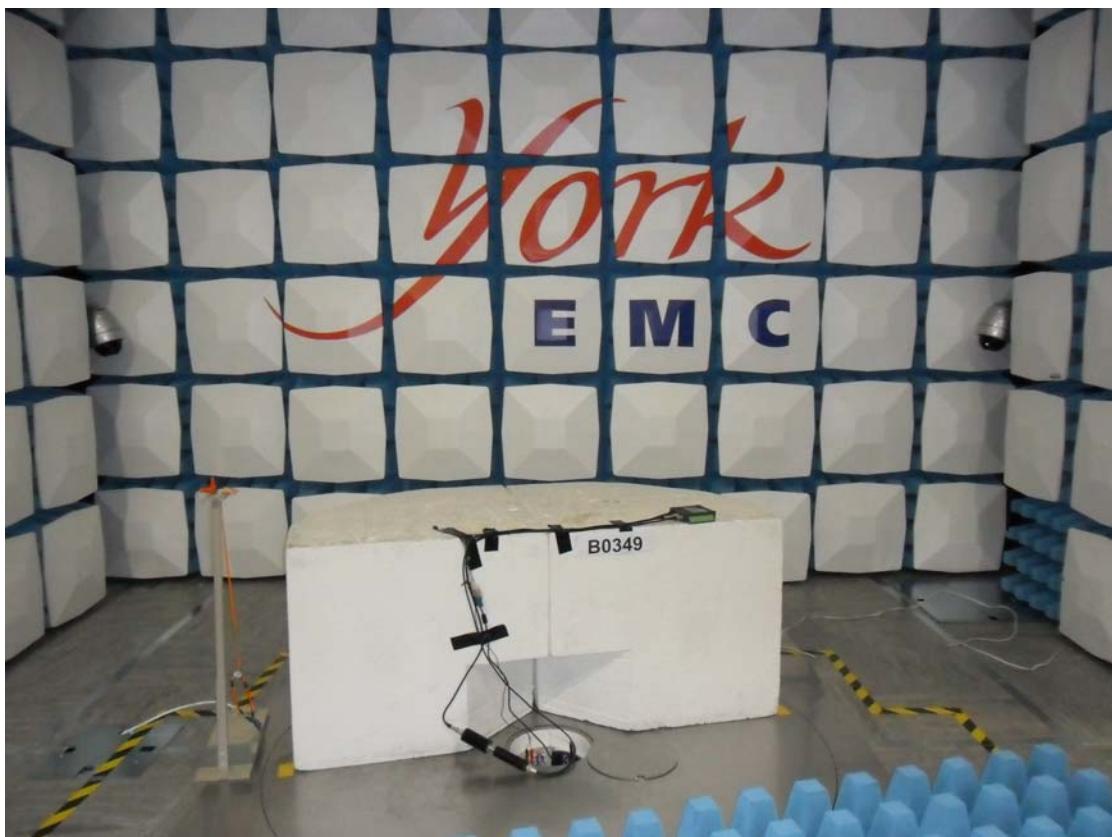


Figure 5.14.10 Radiated Immunity Testing



**Figure 5.14.11 Electrical Fast Transients /Burst Testing**

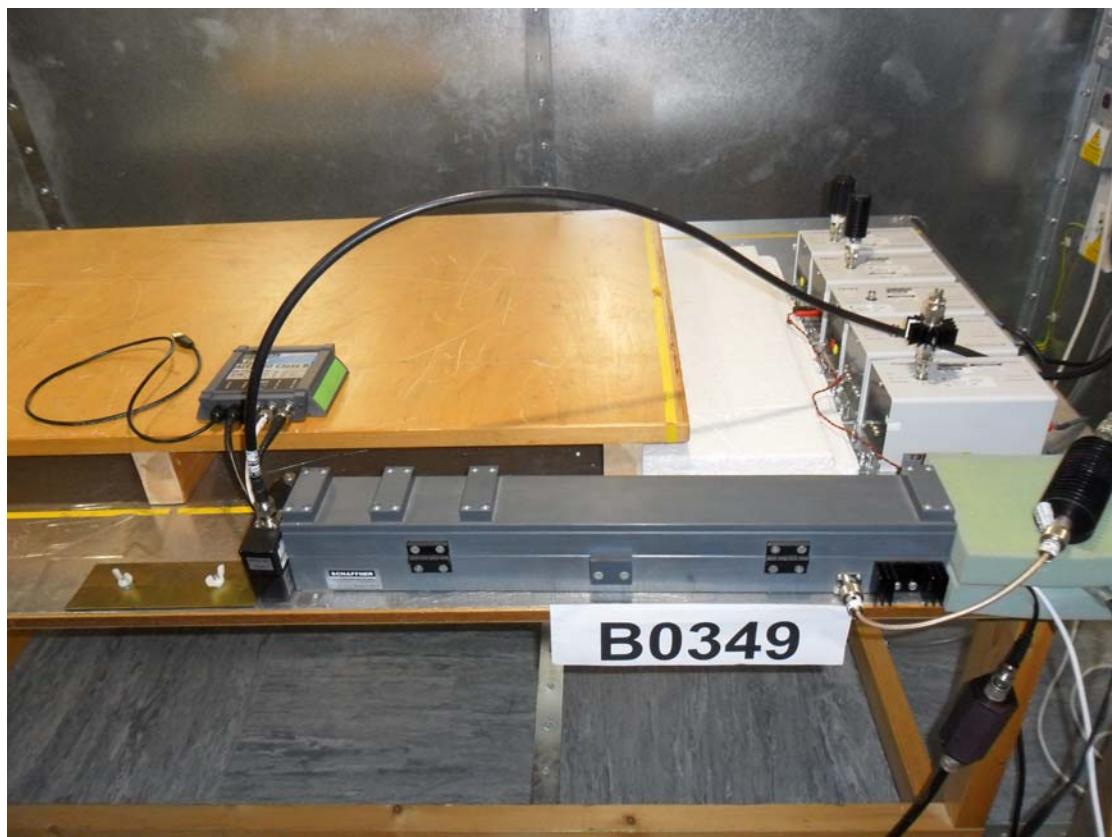

**Figure 5.14.12 Conducted RF Immunity Testing**

**Appendix 1. Customers Test Equipment Used**

Equipment	Serial number	Cal status
Laptop	Not Applicable	Not applicable
Thandor Dual Power supply	00343	None

**5.15 Appendix 15. Modification States**

<b>Modification state</b>	<b>Modification</b>
0	As supplied by the customer

**5.16 Appendix 16. Test Report History**

<b>Issue</b>	<b>Modification details</b>
1	Original issue of the test report

### **5.17 Appendix 17. Documentation**

No documentation was provided for inclusion in this report.