



www.ecmg-global.net

FCC RADIO MEASUREMENT TECHNICAL REPORT

On Model Name: SMART PLAYER

Model Numbers: HS** ("*" can be 0-9)

Brand Name: N/A

FCC ID Number: O7T786-HEHS06

Prepared for HESIO INTERNATIONAL CO., LTD

Test Specification: FCC Part 15, Subpart C

Test Report #: SHE-1204-10805-FCC ID

Tested by: Daomen Galanz
Engineer Company Name

Reviewed by: Jameryon ECMG
Senior Engineer Company Name

QC Manager: Swall Zhang ECMG
QC Manager Company Name

Test Report Released by: Swall Zhang August 8th, 2012
Swall Zhang Date

List of Attached Files

<i>Exhibit Type</i>	<i>File Description</i>	<i>File Name</i>
<i>Test Report</i>	<i>Test Report</i>	<i>O7T786-HEHS06 _Test Report.pdf</i>
<i>Theory Of Operation</i>	<i>Technical Description</i>	<i>O7T786-HEHS06 _Theory of Operation .pdf</i>
<i>External Photos</i>	<i>External Photos</i>	<i>O7T786-HEHS06 _External Photos.pdf</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>O7T786-HEHS06 _Internal Photos.pdf</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>O7T786-HEHS06 _Block Diagram.pdf</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>O7T786-HEHS06 _Schematics.pdf</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>O7T786-HEHS06 _Label & Location.pdf</i>
<i>User Manual</i>	<i>User Manual</i>	<i>O7T786-HEHS06 _User Manual.pdf</i>
<i>Test set-up photos</i>	<i>Test set-up photos</i>	<i>O7T786-HEHS06 _Test Set-up Photos.pdf</i>

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location #1 : Galanz

*25 South Ronggui Rd., Shunde, Foshan,
Guangdong, China*

Tel : (86)-757-23612785

Fax : (86)-757-23612537

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

- *CNAL- LAB Code: L2244*

Galanz EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- *FCC- Registration No.: 580210*

Galanz EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

Test Site Location #2

: *Shenzhen Academy of Metrology and quality Inspection.*

*Bldg. of Metrology & Quality Inspection,
Longzhu Road, Nanshan District,
Shenzhen, Guangdong, China.*

Tel : (86)-755-26941599

Fax : (86)-755-26941615

Test Facility

The test facility was recognized, certified, or accredited by the following organizations:

● *CNAL- LAB Code: L0579*

SMQ EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements)for the Competence of Testing Laboratories.

● *FCC -Registration No.: 979748*

SMQ EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

List of Test and Measurement Instruments

Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
<i>Spectrum Analyzer</i>	R&S	FSP30	100755	2012-11-30
<i>EMI Receiver 1</i>	SCHAFFNER	SMR4503	11725	2012-11-30
<i>LISN 1</i>	ETS	4825/2	1161	2012-11-30
<i>EMI Receiver 2</i>	R&S	ESCS30	SB3319	2013-01-25
<i>LISN 2</i>	Rohde & Schwarz	ESH2-Z5	SB3996	2013-01-25
<i>Coaxial Cable</i>	ATC	N/A	N/A	2012-11-30
<i>Double-ridged Wave guide horn</i>	ETS	3115	6587	2012-11-30
<i>Amplifier</i>	Agilent	83017A	MY39500438	2012-11-30
<i>Band filter</i>	ASI	82346	S06389	2012-11-30
<i>Biconilog Antenna</i>	ETS	3142C	00042672	2012-11-30
<i>Bilog Antenna</i>	Chase	CBL6112B	SB3438	2012-11-30
<i>Semi-anechoic Chamber</i>	ETS	N/A	N/A	2012-11-30

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

Table of Contents

DISCLAIMER NOTICE	1
REPRODUCTION CLAUSE	1
OPINIONS AND INTERPRETATIONS	1
STATEMENT OF MEASUREMENT UNCERTAINTY	1
ADMINISTRATIVE DATA	2
EUT DESCRIPTION	3
EUT MODEL DERIVED	5
TEST SUMMARY	5
TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATION	7
TEST SYSTEM DETAILS	8
ATTACHMENT 1 - ANTENNA REQUIREMENT	10
ATTACHMENT 2 - CONDUCTED EMISSION TEST RESULTS	12
ATTACHMENT 3- RADIATED EMISSION TEST	15
ATTACHMENT 4 - OCCUPIED BANDWIDTH TEST	44
ATTACHMENT 5- MAXIMUM PEAK OUTPUT POWER	52
ATTACHMENT 6 - BAND EDGES TEST	61
ATTACHMENT 7 - PEAK POWER SPECTRAL DENSITY TEST	90

Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EU T). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen). Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : SMART PLAYER

Model Number : HS** ("*" can be 0-9)

Model Tested : HS06

Receipt Date : April 29th, 2012

Date Tested : May 3rd, 2012 to June 27th, 2012

Applicant : HESIO INTERNATIONAL CO., LTD

Address : UNIT 1 3/F, GOOD HARVEST CENTRE, 33 ON CHUEN STREET FANLING, NT, HONGKONG

Telephone : (00852)2682 6421

Fax : (00852)2793 1668

Manufacturer : HESIO INTERNATIONAL CO., LTD

Address : UNIT 1 3/F, GOOD HARVEST CENTRE, 33 ON CHUEN STREET FANLING, NT, HONGKONG

Telephone : (00852)2682 6421

Fax : (00852)2793 1668

Factory : HESIO INTERNATIONAL CO., LTD

Address : UNIT 1 3/F, GOOD HARVEST CENTRE, 33 ON CHUEN STREET FANLING, NT, HONGKONG

Telephone : (00852)2682 6421

Fax : (00852)2793 1668

EUT Description

HESIO INTERNATIONAL CO., LTD., model tested HS06 (referred to as the EUT in this report) is a SMART PLAYER.

The EUT is a SMART PLAYER which integrates an IEEE 802.11 b/g/n Wi-Fi module. main technical specifications of the EUT are as belows:

Parameter		Range	
Basic parameters	Rated voltage	DC 5V	
	Rated Current	2A	
802.11b/g/n Adapter Parameters	Operating band	2400-2483.5MHz	
	Wi-Fi Module Voltage	DC 3.0V	
	Working Frequency of Each Channel	Channel No.	Frequency (MHz)
		001	2412
		002	2417
		003	2422
		004	2427
	Frequency of Number	005	2432
		006	2437
	Modulation Type	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM IEEE 802.11n H420: OFDM	
	Transmit Power	802.11g/n: 15dBm ±15% 802.11b: 18dBm ±15%.	
	Antenna Spec.	1. Antenna Gain(peak): 2dBi 2. Impedance: 50 Ohm nominal 3. Antenna Type: I-PEX External Receptacle Antenna(1T1R)	

Continue on the next page...

<i>I/O Ports</i>	<i>LAN interface x 1</i>	<i>Ethernet 10/100M Network</i>
	<i>DC Power Jack</i>	<i>5V DC Power connector</i>
	<i>USB Port x 2</i>	<i>USB devices may be connected via the USB port</i>
	<i>SD/MMC Slot</i>	<i>supports SD/MMC Pro</i>
	<i>HDMI output</i>	<i>High-Definition Multimedia Interface</i>
	<i>AV composite port (Optional)</i>	<i>YPbPr& CVBS output</i>
	<i>Standard accessories</i>	<i>IR remote control</i>
<i>Power Adapter</i>	<i>Input</i>	<i>100-240V, 50/60Hz, max 0.5A</i>
	<i>Output</i>	<i>DC5V 2A</i>
	<i>Model</i>	<i>GSCC2000S005V015</i>
	<i>Brand name</i>	<i>GSP</i>

NOTE: For more detailed informations or features please refer to user's manual of EUT.

EUT model Derived

Models of HS** (“*” can be 0 - 9) are a the same series of product, (Input: 100-240V 50/60Hz) . They have the same circuit function and PCB Layout. Differences between these models are only model number and appearances .Model of HS06 was selected for the final testing.

Test Summary

The Electromagnetic Compatibility requirements on tested model HS06 for this test is stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Tested model HS06 has been tested to conform to the following parts of the Part 15, Subpart C as detailed below:

FCC Rules	Requirement	Result	Remark
§15.247(c)(1)(i); §15.203	Antenna Requirement	Compliant	Attachment 1
§15.207	Conducted Emission	Compliant	Attachment 2
§15.205(a); §15.209(a)	Radiated Emission	Compliant	Attachment 3
§15.247(b)	Maximum Peak Output Power	Compliant	Attachment 4
§15.247(a)(2)	Occupied Bandwidth	Compliant	Attachment 5
§15.247(d)	Edges Measurement	Compliant	Attachment 6
§15.247(e)	Power Spectral Density	Compliant	Attachment 7

Note: The maximum peak power measured is 18.47dBm(70.31mw) on 802.11/b mode.

Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rate and antenna diversity (if any).

Regards to the frequency band over 10MHz, the lowest, middle and highest frequency of channel were selected to perform the test, and then shown on this report.

The following mode& channels were chosen for final test as listed belows.

For IEEE 802.11b/g mode and IEEE 802.11n HT20 mode:

Carried Frequency (MHz)	Channel	Duty Cycle	Data Rate (Mbps)	Modulation Type
2412	Channel Low	100%	IEEE 802.11b:1Mbps; IEEE 802.11g: 6Mbps; IEEE 802.11n HT20: 6.5Mbps; IEEE 802.11n HT40:13.5Mbps	IEEE 802.11b for DSSS, IEEE 802.11g and 802.11n HT20 For OFDM
2437	Channel Mid			
2462	Channel High			

For IEEE 802.11n HT40 mode:

Carried Frequency (MHz)	Channel Type&Number	Duty Cycle	Data Rate (Mbps)	Modulation Type
2422	Channel Low	100%	13.5Mbps	OFDM
2437	Channel Mid			
2452	Channel High			

EUT Exercise Software

During testing an exercise software which “USB WLAN MP Diagnostic program 0.0026.0726.2011” was provided by manufacturer runs on windows XP system and control IEEE 802.11b/g/n adapter operating on a continuous transmission mode and receive mode.

Note: “power level 40” in test software was determined for the final testing.

Equipment Modification

Any modifications installed previous to testing by HESIO International Co., Ltd. will be incorporated in each production model sold or leased in United States.

There were no modifications for this EUT intended for grant.

Test System Details

EUT			
Model Number:	HS06		
Description:	SMART PLAYER		
Manufacturer:	HESIO INTERNATIONAL CO.,LTD		
Input Voltage:	120VAC/60Hz		
Support Equipment			
<i>Description</i>	<i>Model Number</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Notebook PC	NC4000	CNU4122BCL	HP
Power Adaptor Of Notebook PC	PPP009H	239427-003	HP
Desktop PC	Thinkcentre M57e	N/A	Lenovo
Keybroad	Ku-0225	0683207	Lenovo
Mouse	M028UOL	44AC107	Lenovo
Monitor	9227-AE1	V1TCW36	ThinkVision
SD/MMC Card	BB0703605013D	N/A	SanDisk

<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>to</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
<i>Power Adaptor Cord Of Notebook PC</i>	<i>Adaptor</i>	<i>Notebook PC</i>	1.6	N	Y
	<i>Notebook PC</i>	<i>AC Plug</i>	1.2	N	Y
<i>Desktop PC Power Cord</i>	<i>Desktop PC</i>	<i>AC Plug</i>	1.6	N	Y
<i>Monitor</i>	<i>PC</i>	<i>Monitor</i>	1.2	Y	Y
<i>Power Adaptor of EUT</i>	<i>EUT</i>	<i>Plug</i>	1.5	N	N

Note: The "EUT" means "SMART PLAYER".

Note: The EUT has been tested as an independent unit together with other necessary accessories or support units. the above support units or accessories were used to form a representative test configuration during the test tests.

ATTACHMENT 1 - ANTENNA REQUIREMENT

§15.203 Requirements:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

§15.247(c) (1)(i) Requirements:


(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

FCC Section	FCC Rules	Conclusion
<p>§15.203& §15.207 (c) (1) (i)</p>	<p><i>Described how the EUT complies with the requirements that either its antenna is permanently attached, or that it employ a unique antenna connector, for every antenna proposed for use with the EUT.</i></p> <p><i>The exception is in those cases where EUT must be professionally installed. In order to demonstrate that professional installation is required, the following 3 points must be addressed:</i></p> <ol style="list-style-type: none"> 1. <i>The application (or intended use) of the EUT.</i> 2. <i>The installation requirements of the EUT.</i> 3. <i>The method by which the EUT will be marketed.</i> 	<p><i>The maximal gain of the antenna is 2.0 dBi and use a unique connector.</i></p> <p><i>So the unit do meet requirement.</i></p>


ATTACHMENT 2 - CONDUCTED EMISSION TEST RESULTS

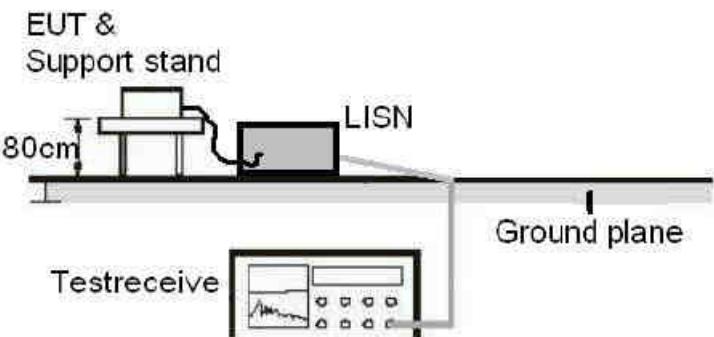CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.207
MODEL NUMBERS:	HS**(** express 0-9)	PRODUCT:	SMART PLAYER
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	June 27 th , 2012
TEST REFERENCE:	ANSI C63.10: 2009		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.10: 2009 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged.		
TEST SETUP			
DESCRIPTIONS OF TEST MODE:	Set to Wi-Fi operation mode, communicate with a notebook PC by wireless router nearby.		
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	120VAC/60Hz		
RESULTS:	The EUT meet the requirements of test reference for conducted emissions at AC input port. The test results relate only to the equipment under test provided by client.		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB		

Wi-Fi Operation Mode:

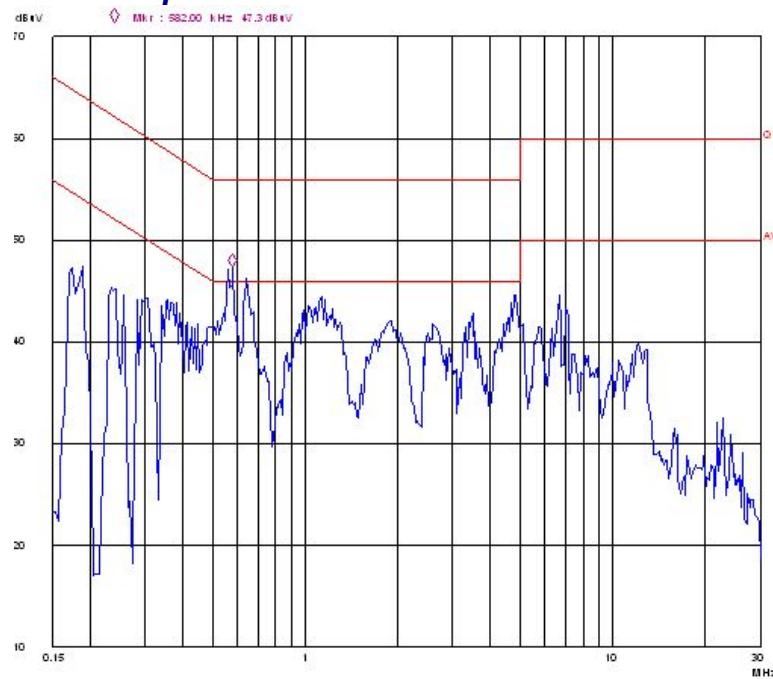

Line L Conducted Emission Graph

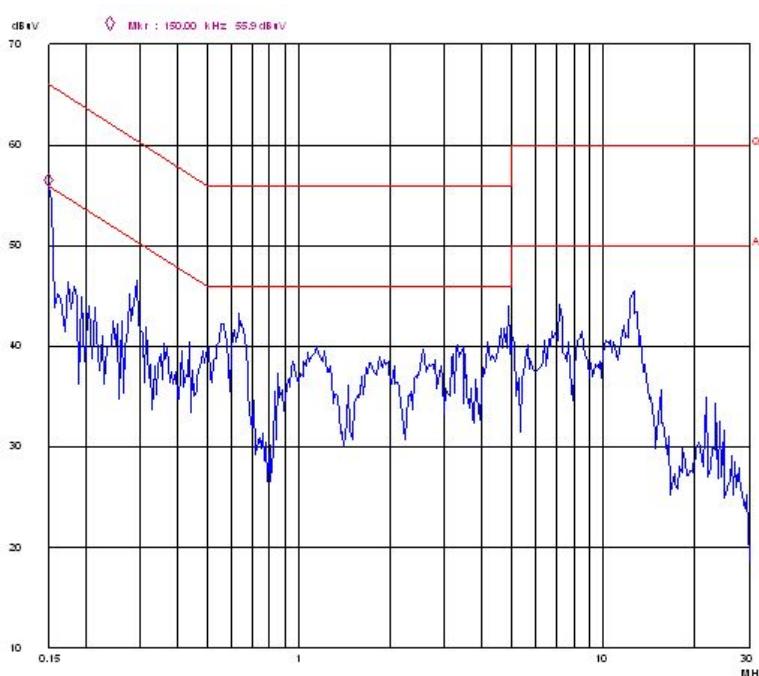

Line N Conducted Emission Graph

Test Data:

Lines	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
Wi-Fi Operation Mode:								
L	0.150	52.3	66	-13.7	0.150	32.4	56	-23.6
L	0.634	41.6	56	-14.4	0.634	32	46	-14.0
L	4.816	37.3	56	-18.7	4.816	30.9	46	-15.1
L	/	/	/	/	/	/	/	/
L	/	/	/	/	/	/	/	/
L	/	/	/	/	/	/	/	/
N	0.150	51.6	66	-14.4	0.150	28.9	56	-27.1
N	4.880	35.9	56	-20.1	4.880	30.9	46	-15.1
N	12.624	38.7	60	-21.3	12.624	32.1	50	-17.9
N	/	/	/	/	/	/	/	/
N	/	/	/	/	/	/	/	/
N	/	/	/	/	/	/	/	/



Note :

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other emission readings are too low against official limits that are not be recorded.

ATTACHMENT 3- RADIATED EMISSION TEST

CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.209(a), Section 15.205(a)
MODEL NUMBERS:	HS**(** express 0-9)	PRODUCT:	SMART PLAYER
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	None
TESTED BY:	Daomen	DATE OF TEST:	May 9 th , 2012
TEST REFERENCE:	ANSI C63.10: 2009		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.10: 2009 for radiated emissions. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Test procedure as follow:</p> <ul style="list-style-type: none"> a) The EUT is placed on a turntable, which is 0.8 m above ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. b) The EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. c) Maximum procedure was performed on the six highest emissions to ensure EUT compliance. d) And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. e) Repeat above procedures until the measurements for all frequencies are complete. 		
DESCRIPTION OF TEST MODE	<p>For below 1GHz:</p> <p>Set to WiFi operation mode, pre-scan all channels of the IEEE 802.11b/g/n, and found the 801.11b mode, channel 1 with data rate of 1Mbps which is worst case mode. So IEEE 802.11b mode,channel 1 with data rate of 1Mbps was chosen for the final test and recorded in report.</p> <p>For above 1GHz:</p> <p>Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations,data rate and antenna ports (if EUT with antenna diversity architecture). Following channels were chosen for the final test as listed below: 802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>		

MEASUREMENT SETUP:	Measurement receiver shall be set as below:								
	Frequency (MHz)	Receive detector	RBW	VBW	Value				
	30-1000	Quasi-peak	120KHz	300KHz	Quasi-peak				
	Above 1000	Peak	1MHz	1MHz	Peak				
	Above 1000	Peak	1MHz	10Hz	average				
LIMITS:	Section 15.209 limits as below:								
	<i>Other Frequency (MHz)</i>		<i>Field strength (uV/meter)</i>						
	30-88		100		40.0				
	88-216		150		43.5				
	216-960		200		46.0				
	Above 960		500		54.0				
NOTE:									
1) Field Strength (dBmV/m)= 20log Field Strength (mV/m). 2) In the emission tables above, the tighter limit applies at the band edge.									
TESTED RANGE:	30MHz to 25GHz								
TEST VOLTAGE:	120VAC/60Hz								
RESULTS:	According to the data in the following, the EUT complied with the FCC Part 15.209 &15.205. The test results relate only to the equipment under test provided by client.								

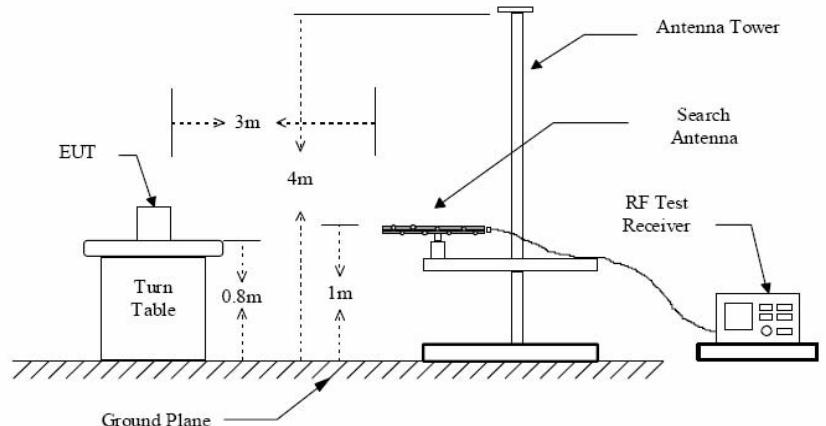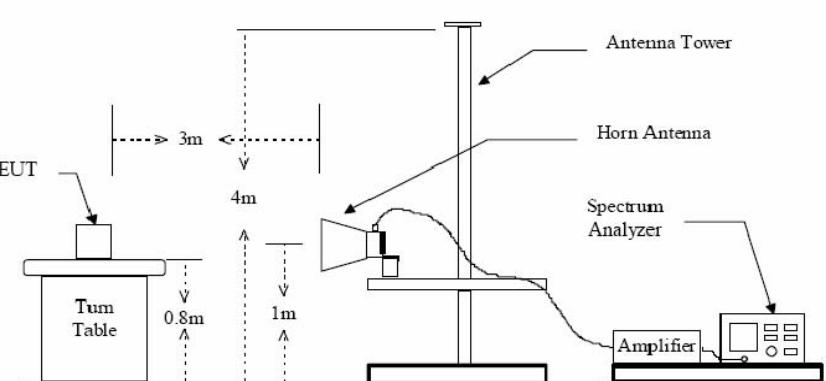	<p>Figure 1 : Frequencies measured below 1 GHz configuration</p>  <p>TEST SETUP:</p>
	<p>Figure 2 : Frequencies measured above 1 GHz configuration</p> 
CHANGES OR MODIFICATIONS:	<p>There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.</p>
M. UNCERTAINTY:	<p>Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB</p>

Test Data (Below 1GHz):**For 802.11b mode, channel 1 with data rate of 1Mbps:**

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level QP (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Horizontal							
55.368	0.02	5.6	/	29.08	34.7	40.0	-5.30
150.769	0.02	8.8	/	26.48	35.3	40.0	-4.70
250.012	0.12	11.8	/	31.70	43.0	46.0	-3.00
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
Vertical							
56.274	0.02	5.7	/	30.48	36.2	40.0	-3.80
150.236	0.02	8.8	/	26.28	35.1	40.0	-4.90
250.012	0.12	11.8	/	31.54	43.1	46.0	-2.90
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/

Note:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level =Reading Level + Antenna Factor + Cable Loss -Preamplifier Factor.
- Other emission levels are too low against official limits that are not recorded.

Test Data (Above 1GHz):
802.11b mode/Low Channel: 2412MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1180.00	1.41	24.3	33.6	56.84	48.95	74	-25.05	V
4818.00	3.26	32.9	32.0	51.85	56.01	74	-17.99	V
7246.00	4.67	36.0	30.5	52.77	62.94	74	-11.06	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1656.00	1.71	26.1	33.6	60.44	54.65	74	-19.35	H
4823.92	3.26	32.9	32.0	55.94	43.11	74	-30.89	H
7246.00	4.67	36.0	30.5	52.75	62.92	74	-11.08	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
1656.00	1.71	26.1	33.6	56.75	51.00	54	-3.00	V
4823.26	3.26	32.9	32.0	46.48	50.64	54	-3.36	V
4818.80	3.26	32.9	32.0	32.4	36.56	54	-17.44	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1656.00	1.71	26.1	33.6	44.38	38.59	54	-15.41	H
4823.90	3.26	32.9	32.0	38.95	43.11	54	-10.89	H
7246.00	4.67	36.0	30.5	39.41	49.58	54	-4.42	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

802.11b mode/Mid Channel: 2437MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1656.00	1.71	26.1	33.6	70.51	64.72	74	-9.28	V
4823.26	3.26	32.9	32.0	61.04	65.20	74	-8.80	V
7246.00	4.67	36.0	30.5	56.53	66.70	74	-7.30	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1544.00	1.71	26.1	33.6	65.65	59.86	74	-14.14	H
5461.00	3.50	32.9	31.6	55.49	60.29	74	-13.71	H
6473.00	4.10	33.90	30.8	57.9	65.10	74	-8.90	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
1656.00	1.71	26.1	33.6	55.99	50.2	54	-3.80	V
4823.26	3.26	32.9	32.0	43.64	47.80	54	-6.20	V
7246.00	4.67	36.0	30.5	40.05	50.22	54	-3.78	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
2224.00	2.01	28.00	33.0	50.09	47.10	54	-6.90	H
3526.20	2.67	32.2	32.1	43.44	46.21	54	-7.79	H
6934.00	4.10	33.90	30.8	38.57	45.77	54	-8.23	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

802.11b mode/High Channel: 2462MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1656.00	1.71	26.1	33.6	65.43	59.64	74	-14.36	V
4823.26	3.26	32.9	32.0	53.3	57.46	74	-16.54	V
7246.00	4.67	36.0	30.5	52.77	62.94	74	-11.06	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
7834.00	4.10	36.20	30.5	50.41	60.21	74	-13.79	H
6534.00	4.10	33.90	30.8	50.69	57.89	74	-16.11	H
5210.32	3.50	32.90	31.6	54.3	59.10	74	-14.90	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
1656.00	1.71	26.1	33.6	54.01	48.22	54	-5.78	V
4823.26	3.26	32.9	32.0	39.94	44.10	54	-9.90	V
7246.00	4.67	36.0	30.5	40.49	50.66	54	-3.34	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
7392.00	4.10	36.20	30.50	37.3	47.10	54	-6.90	H
3550.00	2.67	32.20	32.10	43.13	45.90	54	-8.10	H
6230.00	4.02	35.00	30.80	39.88	48.10	54	-5.90	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11g mode/Low Channel: 2412MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
1034.00	1.39	23.9	31.6	58.63	52.32	74	-21.68	V
3210.00	2.57	31.5	32.1	54.91	56.88	74	-17.12	V
4808.00	3.26	33.5	32.0	55.54	60.30	74	-13.70	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1544.00	1.71	26.1	33.6	67.91	62.12	74	-11.88	H
3350.12	2.57	31.5	32.1	63.94	65.91	74	-8.09	H
6825.00	4.10	33.90	30.8	53.13	60.33	74	-13.67	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
4908.00	3.26	33.5	32.0	40.44	45.2	54	-8.80	V
10248.00	7.2	37.8	30.0	28.7	43.7	54	-10.30	V
1170.00	1.39	23.9	31.6	53.11	46.8	54	-7.20	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
7256.00	4.10	36.20	30.5	39.1	48.9	54	-5.10	H
1860.00	1.71	26.1	33.6	50.79	45.0	54	-9.00	H
7005.00	4.10	36.20	30.5	33.4	43.2	54	-10.80	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11g mode /Mid Channel: 2437MHz

Frequency (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
4876.00	3.26	33.5	32.0	52.35	57.11	74	-16.89	V
3006.00	2.57	31.5	32.1	59.96	61.93	74	-12.07	V
1034.00	1.39	23.9	31.6	58.81	52.50	74	-21.50	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
7324.00	4.10	36.20	30.5	51.75	61.55	74	-12.45	H
7500.25	5.32	36.00	30.5	41.68	52.50	74	-21.50	H
3500.00	2.67	32.2	32.1	53.23	56.00	74	-18.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
4876.00	3.26	33.5	32.0	42.89	47.65	54	-6.35	V
3006.00	2.57	31.5	32.1	47.3	49.27	54	-4.73	V
1170.00	1.39	23.9	31.6	51.89	45.58	54	-8.42	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1068.00	1.39	23.9	31.6	49.35	43.04	54	-10.96	H
1170.50	1.39	23.9	31.6	51.36	45.05	54	-8.95	H
7620.00	4.10	36.00	30.5	39.7	49.30	54	-4.70	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11g mode /High Channel: 2462MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Resding Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarizat ion (H/V)
Peak Measurement								
4910.00	3.26	33.5	32.0	59.8	64.56	74	-9.44	V
3278.00	2.57	31.5	32.1	62.12	64.09	74	-9.91	V
1034.00	1.39	23.9	31.6	63.27	56.96	74	-17.04	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1102.00	1.39	23.9	31.6	56.51	50.20	74	-23.80	H
1250.00	1.39	23.9	31.6	57.51	51.20	74	-22.80	H
3560.50	2.67	32.2	32.1	62.43	65.20	74	-8.80	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
7936.00	5.32	36.00	30.5	38.09	48.91	54	-5.09	V
4910.00	3.26	33.5	32.0	44.5	49.26	54	-4.74	V
3278.00	2.57	31.5	32.1	38.07	40.04	54	-13.96	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1068.00	1.39	23.9	31.6	49.63	43.32	54	-10.68	H
1253.00	1.39	23.9	31.6	50.51	44.20	54	-9.80	H
7600.50	5.32	36.00	30.5	38.18	49.00	54	-5.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT20 mode/Low Channel: 2412MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
7256.00	4.10	36.00	30.5	61.18	70.78	74	-3.22	V
4808.00	3.26	33.5	32.0	60.7	65.46	74	-8.54	V
1117.00	1.71	26.1	33.6	61.92	56.13	74	-17.87	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1182.92	1.71	26.1	33.6	60.6	54.81	74	-19.19	H
4808.00	3.26	33.5	32.0	53.66	58.42	74	-15.58	H
7222.00	5.32	36.00	30.5	48.85	59.67	74	-14.33	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
4826.900	3.26	33.5	32.0	45.65	50.41	54	-3.59	V
7232.00	5.32	36.00	30.5	35.51	46.33	54	-7.67	V
1170.00	1.39	23.9	31.6	51.75	45.44	54	-8.56	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
4827.520	3.26	33.5	32.0	45.1	49.86	54	-4.14	H
7534.00	5.32	36.00	30.5	36.38	47.20	54	-6.80	H
3500.20	2.67	32.2	32.1	43.38	46.15	54	-7.85	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT20 mode/Mid Channel: 2437MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
4876.00	3.26	33.5	32.0	57.05	61.81	74	-12.19	V
3312.00	2.57	31.5	32.1	59.76	61.73	74	-12.27	V
1034.00	1.39	23.9	31.6	63.51	57.20	74	-16.80	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1306.00	1.39	23.9	31.6	65.69	59.38	74	-14.62	H
1450.00	1.39	23.9	31.6	64.66	58.35	74	-15.65	H
4874.00	3.26	33.5	32.0	50.44	55.20	74	-18.80	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
4876.00	3.26	33.5	32.0	34.76	39.52	54	-14.48	V
3312.00	2.57	31.5	32.1	37.24	39.21	54	-14.79	V
1034.00	1.39	23.9	31.6	53.64	47.33	54	-6.67	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1170.00	1.39	23.9	31.6	49.73	43.42	54	-10.58	H
1252.00	1.39	23.9	31.6	50.51	44.20	54	-9.80	H
4900.00	3.26	33.5	32.0	33.24	38.00	54	-16.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT20 mode/High Channel: 2462MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
7936.00	5.32	36.0	30.5	50.52	61.34	74	-12.66	V
3210.00	2.57	31.5	32.1	59.75	61.72	74	-12.28	V
1034.00	1.39	23.9	31.6	64.83	58.52	74	-15.48	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1544.00	1.71	26.1	33.6	55.96	50.17	74	-23.83	H
1600.00	1.71	26.1	33.6	56.99	51.20	74	-22.80	H
3530.00	2.67	32.2	32.1	54.23	57.00	74	-17.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
7936.00	5.32	36.00	30.5	48.21	59.03	54	-5.03	V
4910.00	3.26	33.5	32.0	54.49	59.25	54	-5.25	V
3278.00	2.57	31.5	32.1	57.92	59.89	54	-5.89	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
4910.00	3.26	33.5	32.0	52.97	57.73	54	-3.73	H
1250.00	1.39	23.9	31.6	70.51	64.20	54	-10.2	H
7520.00	5.32	36.00	30.5	48.18	59.00	54	-5.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT40 Mode/Low Channel: 2422MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
7460.00	4.10	36.00	30.5	51.02	60.62	74	-13.38	V
4842.00	3.26	33.5	32.0	57.03	61.79	74	-12.21	V
3006.00	2.57	31.5	32.1	60.13	62.10	74	-11.90	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
2224.00	2.01	28.0	33.0	63.73	60.74	74	-13.26	H
4920.00	3.26	33.5	32.0	50.24	55.00	74	-19.00	H
3250.00	2.57	31.5	32.1	53.03	55.00	74	-19.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
7460.00	4.10	36.00	30.5	29.01	38.61	54	-15.39	V
4842.00	3.26	33.5	32.0	35.87	40.63	54	-13.37	V
3006.00	2.57	31.5	32.1	37.56	39.53	54	-14.47	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
3210.00	2.57	31.5	32.1	37.6	39.57	54	-14.43	H
3500.20	2.67	32.2	32.1	35.79	38.56	54	-15.44	H
4900.00	3.26	33.5	32.0	36.24	41.00	54	-13.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT40 mode/Mid Channel: 2437MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
4842.00	3.26	33.5	32.0	56.15	60.91	74	-13.09	V
1544.00	1.71	26.1	33.6	67.09	61.30	74	-12.70	V
1306.00	1.39	23.9	31.6	68.41	62.10	74	-11.90	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1204.00	1.39	23.9	31.6	66.82	60.51	74	-13.49	H
1305.00	1.39	23.9	31.6	65.31	59.00	74	-15.00	H
3520.00	2.67	32.2	32.1	52.23	55.00	74	-19.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Average Measurement								
7902.00	5.32	36.00	30.5	27.83	38.65	54	-15.35	V
4876.00	3.26	33.5	32.0	35.4	40.16	54	-13.84	V
1034.00	1.39	23.9	31.6	51.78	45.47	54	-8.53	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
1306.00	1.39	23.9	31.6	51.86	45.55	54	-8.45	H
1250.00	1.39	23.9	31.6	50.51	44.20	54	-9.80	H
4650.00	3.26	33.5	32.0	37.74	42.50	54	-11.50	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

For 802.11n HT40 Mode/High Channel: 2452MHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarization (H/V)
Peak Measurement								
7732.00	5.32	36.00	30.5	50.35	61.17	74	-12.83	V
4774.00	3.26	33.5	32.0	55.31	60.07	74	-13.93	V
1531.50	1.71	26.1	33.6	68.09	62.30	74	-11.70	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
7426.00	4.10	36.00	30.5	51.8	61.40	74	-12.60	H
1600.20	1.71	26.1	33.6	67.79	62.00	74	-12.00	H
4500.50	3.26	33.5	32.0	47.24	52.00	74	-22.00	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Frequenc y (MHz)	Cable Loss(dB)	Antenna Factor (dB)	Preamp Factor (dB)	Reading Level (dBuV/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Polarizat ion (H/V)
Average Measurement								
7732.00	5.32	36.00	30.5	27.4	38.22	54	-15.78	V
4774.00	3.26	33.5	32.0	42.85	47.61	54	-6.39	V
1225.50	1.39	23.9	31.6	50.21	43.90	54	-10.10	V
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
4570.00	3.26	33.5	32.0	43.23	47.99	54	-6.01	H
1505.00	1.71	26.1	33.6	50.99	45.20	54	-8.80	H
3520.00	2.67	32.2	32.1	45.03	47.80	54	-6.20	H
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/
/	/	/	/	/	/	/	/	/

Note:

1. The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows: Emission Level = Reading Level + Antenna Factor + Cable Loss - Preamplifier Factor.
2. According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.
3. As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
4. The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

§15.205(a) Requirement:

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

Conclusions:

The fundamental is not in a restricted band, and spurious emission in the restricted bands comply with the general emission limits of 15.209.

ATTACHMENT 4 - OCCUPIED BANDWIDTH TEST

CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.247(a)								
MODEL NUMBERS:	HS**(** express 0-9)	PRODUCT:	SMART PLAYER								
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device								
TEMPERATURE:	23°C	HUMIDITY:	47%RH								
ATM PRESSURE:	101.0kPa	GROUNDING:	None								
TESTED BY:	Daomen	DATE OF TEST:	June 7 th , 2012								
TEST REFERENCE:	ANSI C63.10: 2009 and 558074 D01										
TEST PROCEDURE:	The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB. Analyzer and the attached plot were taken. The EUT was set up to ANSI C63.4-2009, tested to DTS test procedure of 558074 D01 for compliance with FCC 47CFR 15.247 requirements.										
DESCRIPTIONS OF TEST MODE:	<p>Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture).</p> <p>Following channels were selected for the final test as listed below:</p> <p>802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>										
EQUIPMENT SETUP	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Equipment Mode</td><td style="width: 50%;">Spectrum Analyzer</td></tr> <tr> <td>Detector Function</td><td>Peak</td></tr> <tr> <td>RBW</td><td>100KHz</td></tr> <tr> <td>VBW</td><td>300KHz</td></tr> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak	RBW	100KHz	VBW	300KHz
Equipment Mode	Spectrum Analyzer										
Detector Function	Peak										
RBW	100KHz										
VBW	300KHz										
TEST VOLTAGE:	120VAC/60Hz										
RESULTS:	The EUT meet the requirements of test reference for occupied bandwidth.The test results relate only to the equipment under test provided by client.										
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.										
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB										

Test Data:

For 802.11b Mode:

Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
2412	10.16	0.5	Pass
2437	10.32	0.5	Pass
2462	10.28	0.5	Pass

For 802.11g Mode:

Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
2412	16.96	0.5	Pass
2437	16.88	0.5	Pass
2462	16.96	0.5	Pass

For 802.11n HT20 Mode:


Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
2412	17.92	0.5	Pass
2437	18.08	0.5	Pass
2462	18.40	0.5	Pass

For 802.11n HT40 Mode:


Channel Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass/Fail
2422	36.60	0.5	Pass
2437	37.08	0.5	Pass
2452	37.20	0.5	Pass

For 802.11b Mode:


Low Channel: 2412MHz

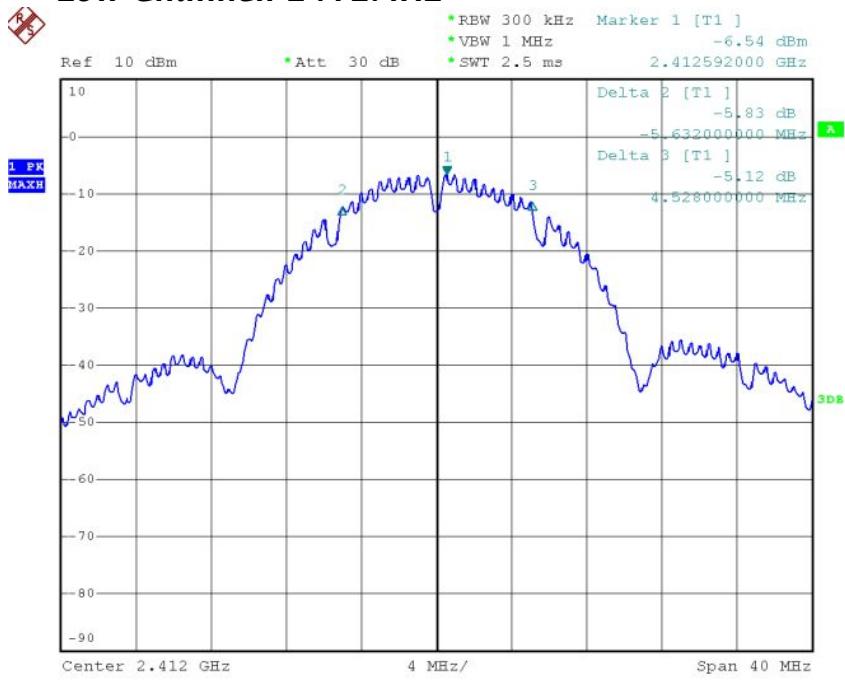

Mid Channel: 2437MHz

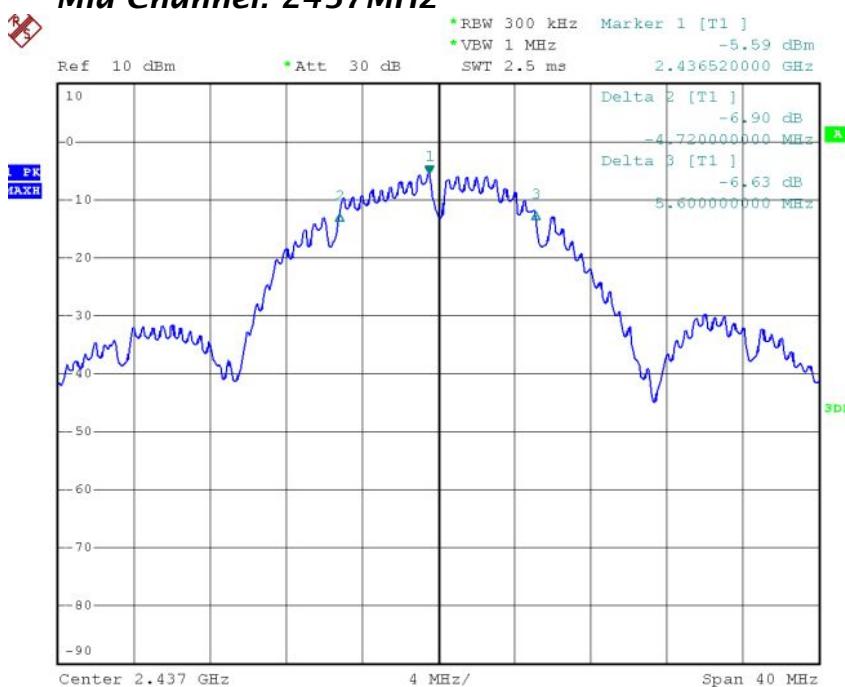


High Channel: 2462MHz

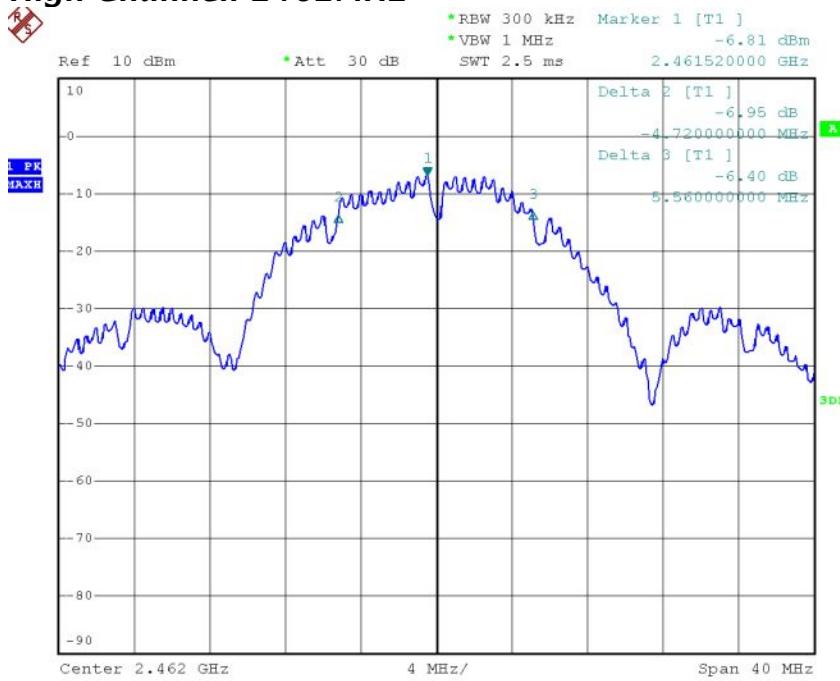


For 802.11g Mode:


Low Channel: 2412MHz

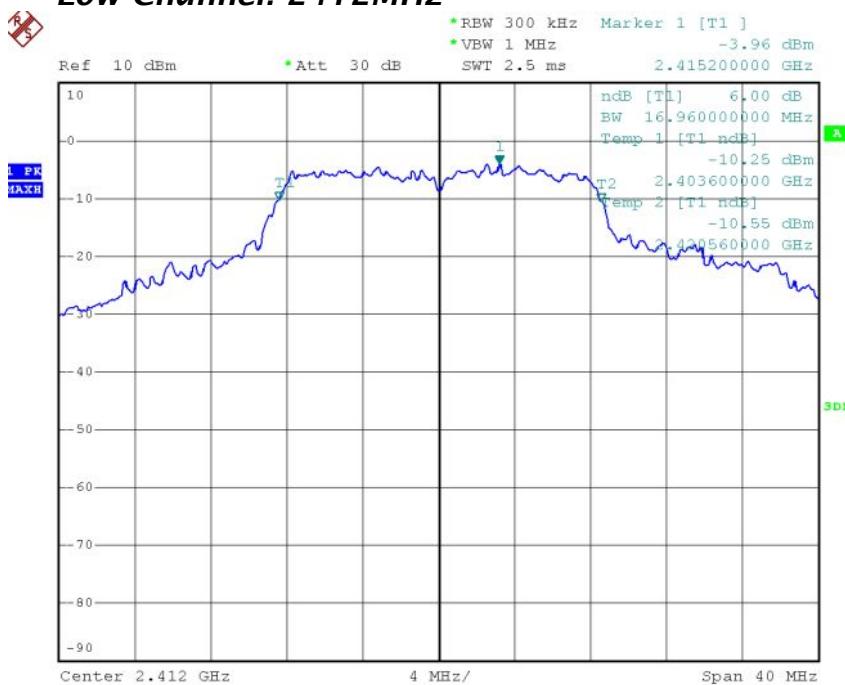

Mid Channel: 2437MHz

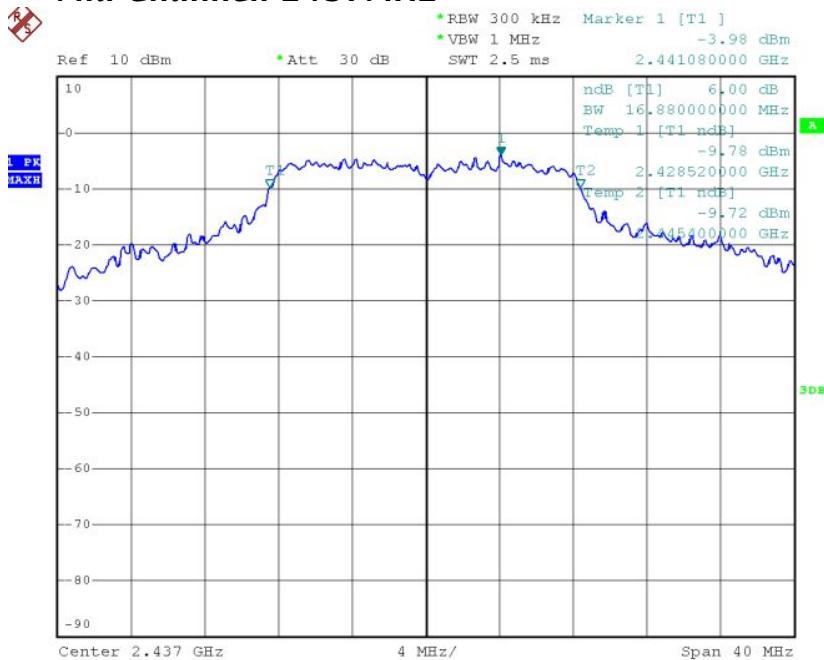


High Channel: 2462MHz

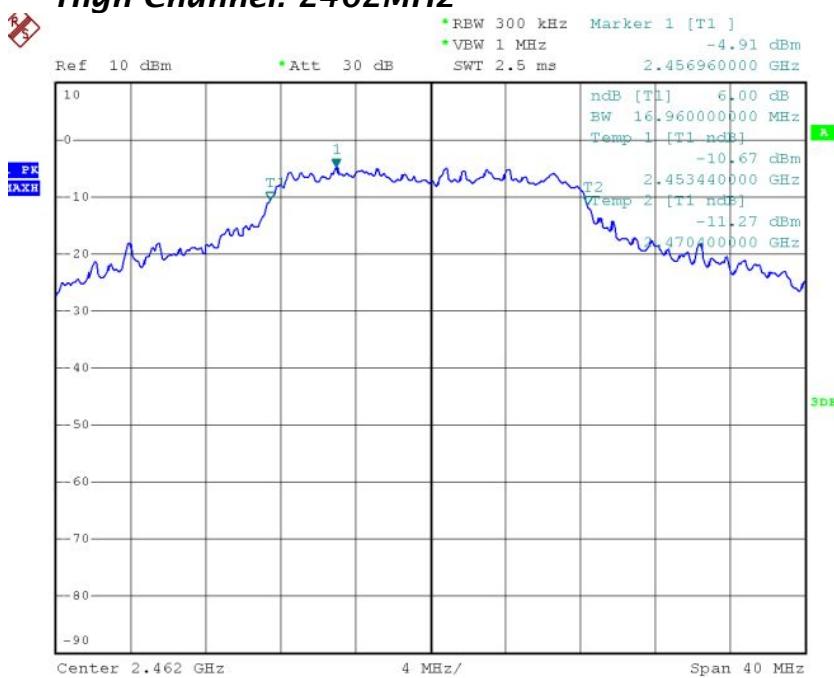


For 802.11n HT20 Mode:


Low Channel: 2412MHz

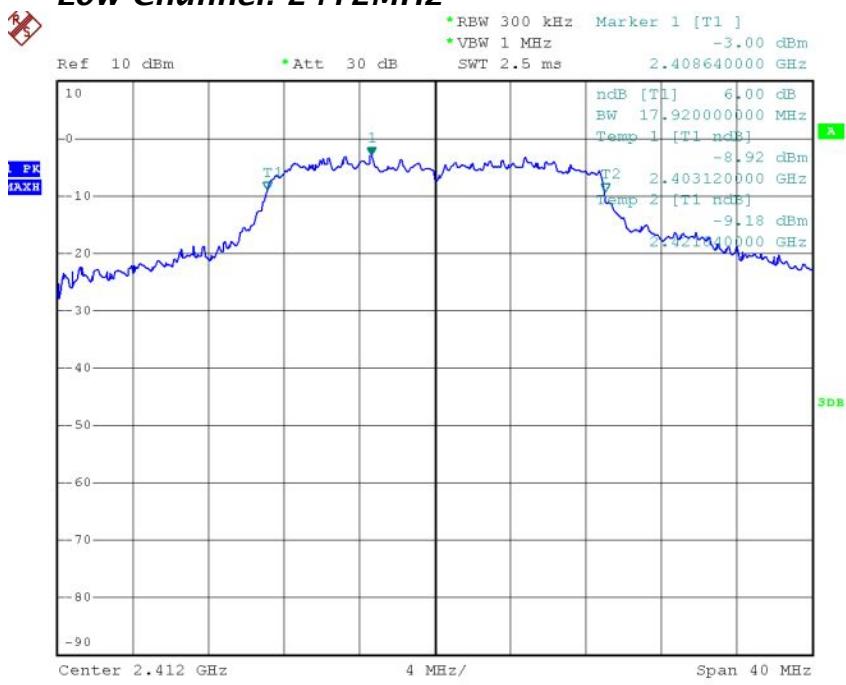

Mid Channel: 2437MHz

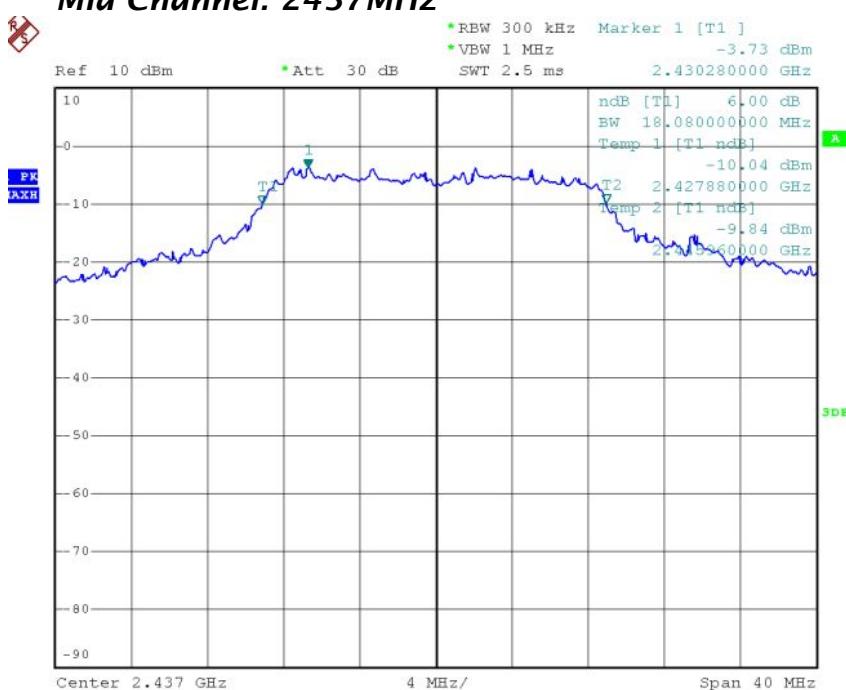


High Channel: 2462MHz

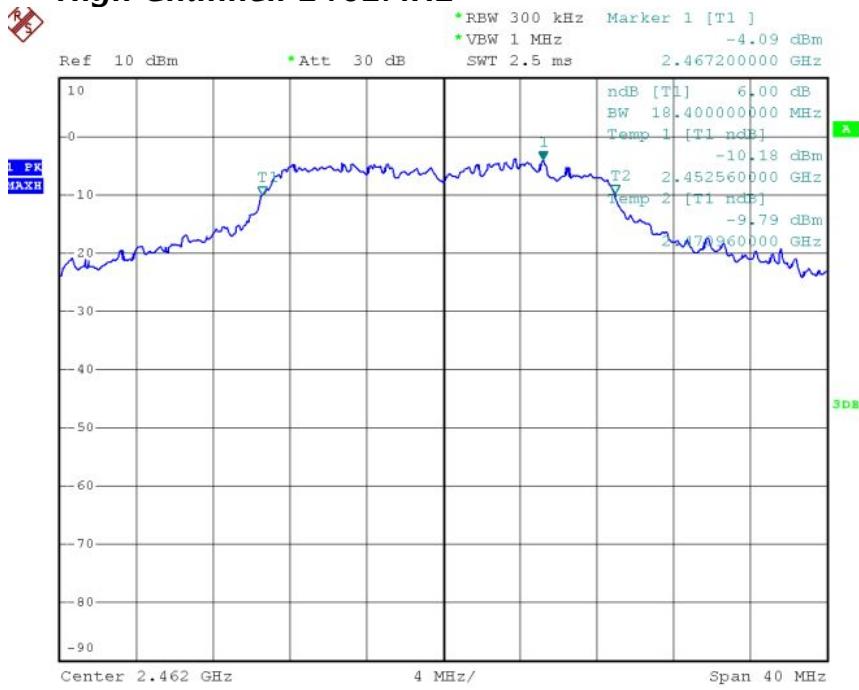


For 802.11n HT40 Mode:


Low Channel: 2422MHz

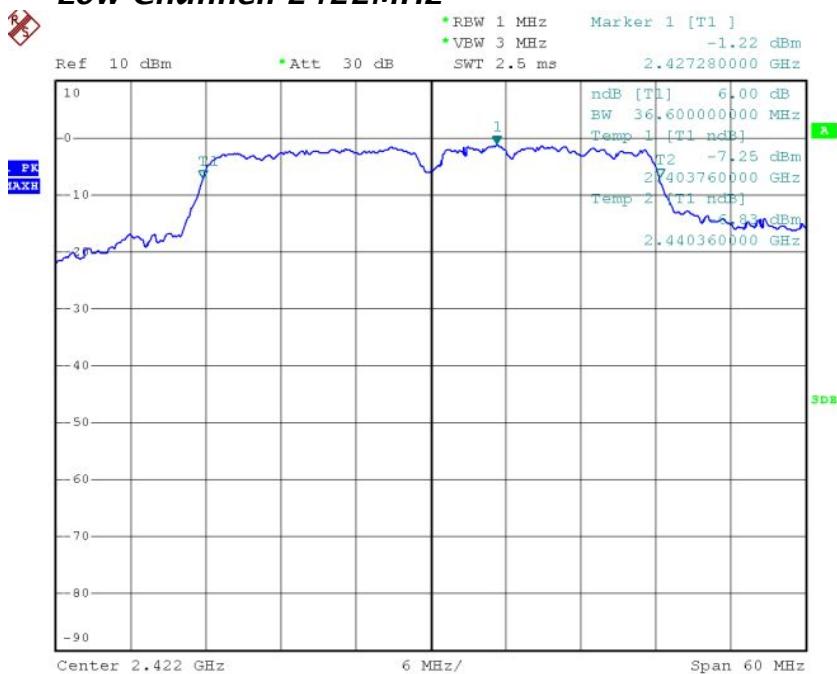

Mid Channel: 2437MHz

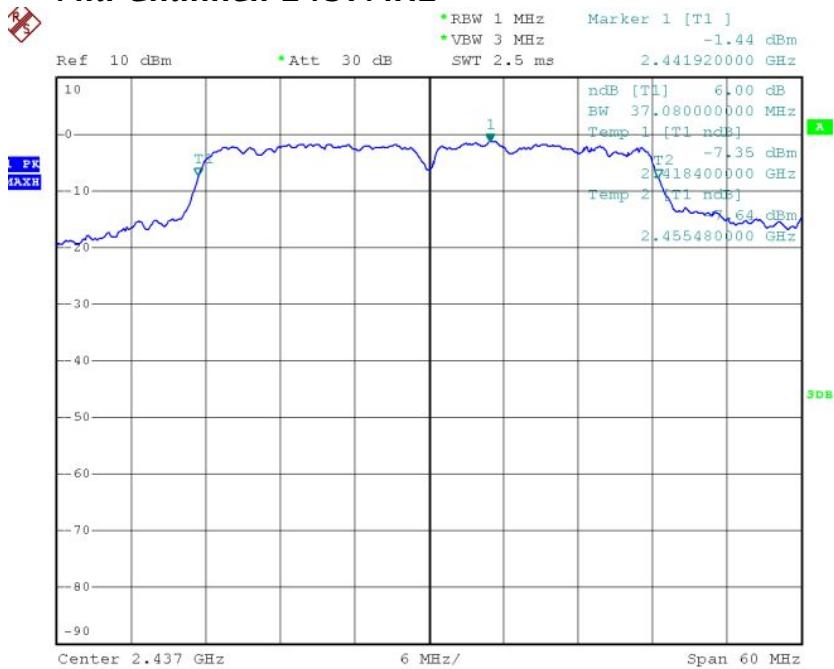

High Channel: 2452MHz

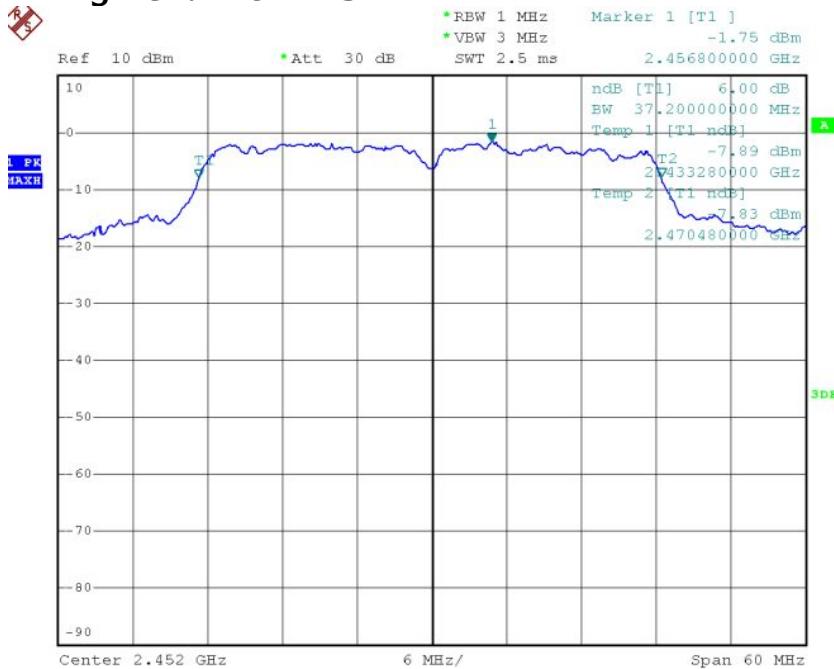

ATTACHMENT 5- MAXIMUM PEAK OUTPUT POWER

CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.247(b)								
MODEL NUMBERS:	HS**(** express 0-9)	PRODUCT:	SMART PLAYER								
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device								
TEMPERATURE:	23°C	HUMIDITY:	47%RH								
ATM PRESSURE:	101.0kPa	GROUNDING:	None								
TESTED BY:	Daomen	DATE OF TEST:	June 7 th , 2012								
TEST REFERENCE:	ANSI C63.4-2009 and 558074 D01										
TEST PROCEDURE:	The EUT was set-up as ANSI C63.4-2009, tested to DTS test procedure of 5580 74 D01 for compliance to FCC 47 CFR 15.247 requirements.										
DESCRIPTIONS OF TEST MODE:	<p>Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were selected for the final test as listed below:</p> <p>802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps, 802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.</p>										
MEASUREMENT EQUIPMENT SET	<p>Spectrum analyzer was set as below:</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <td>Equipment Mode</td> <td>Spectrum Analyzer</td> </tr> <tr> <td>Detector Function</td> <td>Peak</td> </tr> <tr> <td>RBW</td> <td>1MHz</td> </tr> <tr> <td>VBW</td> <td>1MHz</td> </tr> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak	RBW	1MHz	VBW	1MHz
Equipment Mode	Spectrum Analyzer										
Detector Function	Peak										
RBW	1MHz										
VBW	1MHz										
TESTED RANGE:	N/A										
TEST VOLTAGE:	120VAC/60Hz										
RESULTS:	The EUT meets the requirements of test reference for maximum peak output power. the worst-case mode is 802.11b mode with data rate 1Mbps in channel 1.The test results relate only to the equipment under test provided by client.										
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.										
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7}$ x Center Freq., Amp ± 2.6 dB.										

Test Data:**For 802.11b Mode:**

Channel Frequency (MHz)	Peak Output Power (dBm)/(mW)	Cable Loss (dB)	Power Level (dBm)/(mW)	Limit (dBm)	Margin
2412	16.13(dBm)/41.02(mW)	2.00	18.13(dBm)/65.01(mW)	30.00	-11.87
2437	16.29(dBm)/42.56(mW)	2.00	18.29(dBm)/67.50(mW)	30.00	-11.71
2462	16.47(dBm)/44.36(mW)	2.00	18.47 dBm/70.31(mW)	30.00	-11.53

For 802.11g Mode:

Channel Frequency (MHz)	Peak Output Power (dBm)/(mW)	Cable Loss (dB)	Power Level (dBm)/(mW)	Limit (dBm)	Margin
2412	11.85 dBm/15.31(mW)	2.00	13.85 dBm/24.27(mW)	30.00	-16.15
2437	11.53 dBm/14.22(mW)	2.00	13.53 dBm/22.54(mW)	30.00	-16.47
2462	10.68 dBm/11.69(mW)	2.00	12.68 dBm/18.53(mW)	30.00	-17.32

For 802.11n HT20 Mode:


Channel Frequency (MHz)	Peak Output Power (dBm)/(mW)	Cable Loss (dB)	Power Level (dBm)/(mW)	Limit (dBm)	Margin
2412	12.88 dBm/19.41(mW)	2.00	14.88 dBm/30.76(mW)	30.00	-15.12
2437	11.50 dBm/14.13(mW)	2.00	13.50 dBm/22.39(mW)	30.00	-16.50
2462	11.40 dBm/13.80(mW)	2.00	13.40 dBm/21.88(mW)	30.00	-16.60

For 802.11n HT40 Mode:


Channel Frequency (MHz)	Peak Output Power (dBm)/ (mW)	Cable Loss (dB)	Power Level (dBm)/ (mW)	Limit (dBm)	Margin
2422	11.84 dBm/ 15.28(mW)	2.00	13.84 dBm/ 24.21(mW)	30.00	-16.16
2437	12.40 dBm/ 17.38(mW)	2.00	14.40 dBm/ 27.54(mW)	30.00	-15.60
2452	11.74 dBm/ 14.93(mW)	2.00	13.74 dBm/ 23.66(mW)	30.00	-16.26

For 802.11b Mode:


Low Channel: 2412MHz

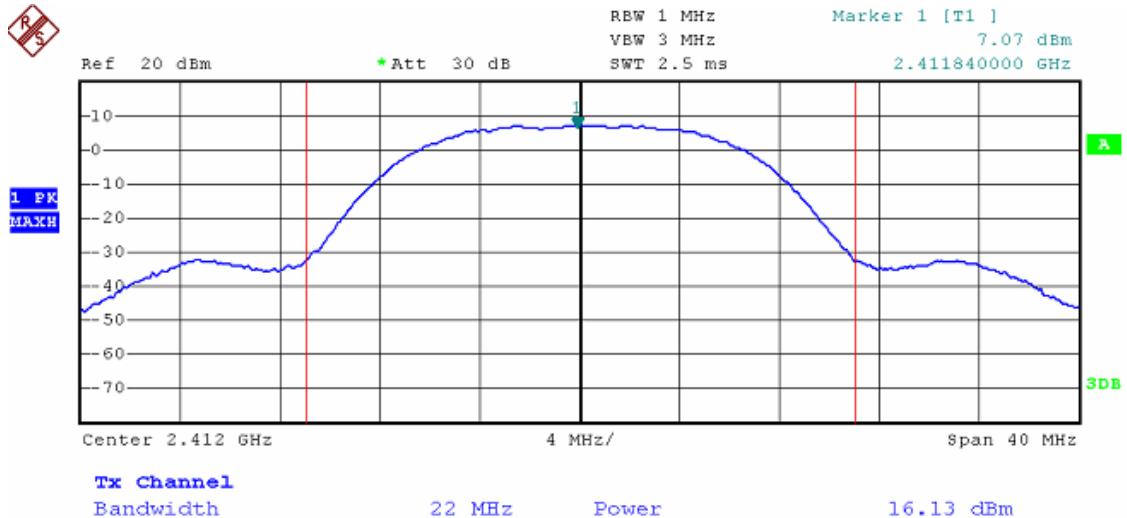

Mid Channel: 2437MHz

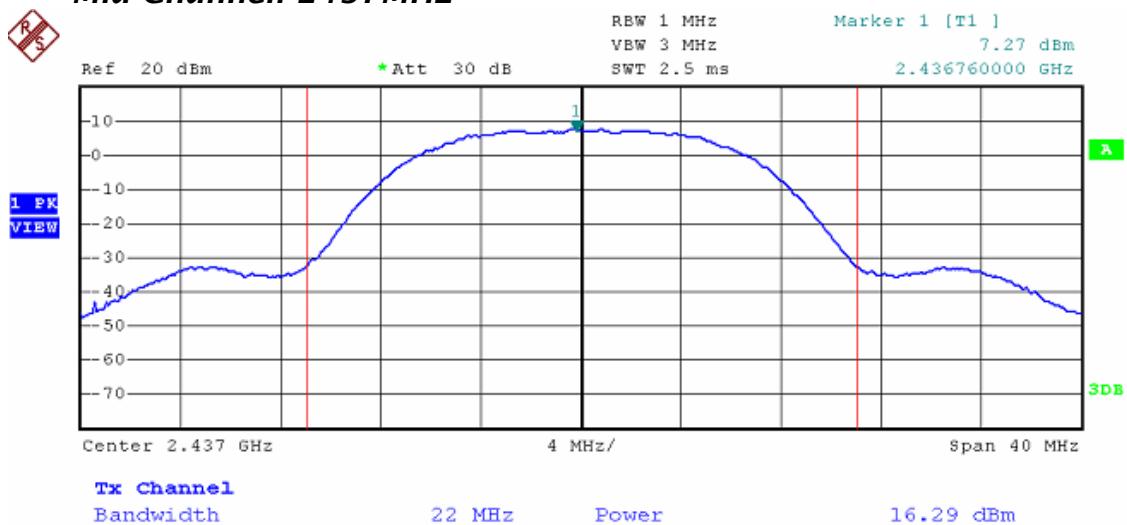


High Channel: 2462MHz

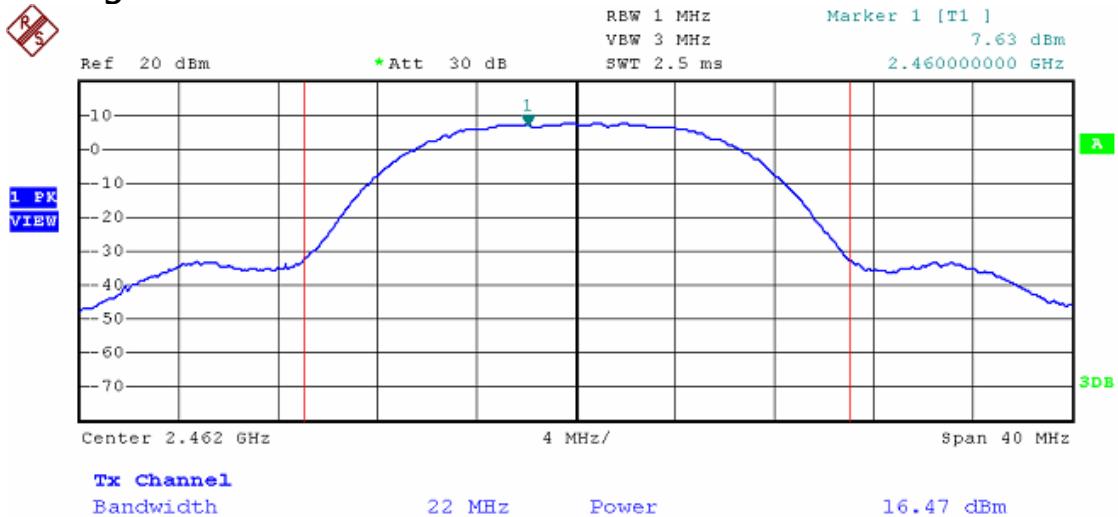


For 802.11g Mode:


Low Channel: 2412MHz

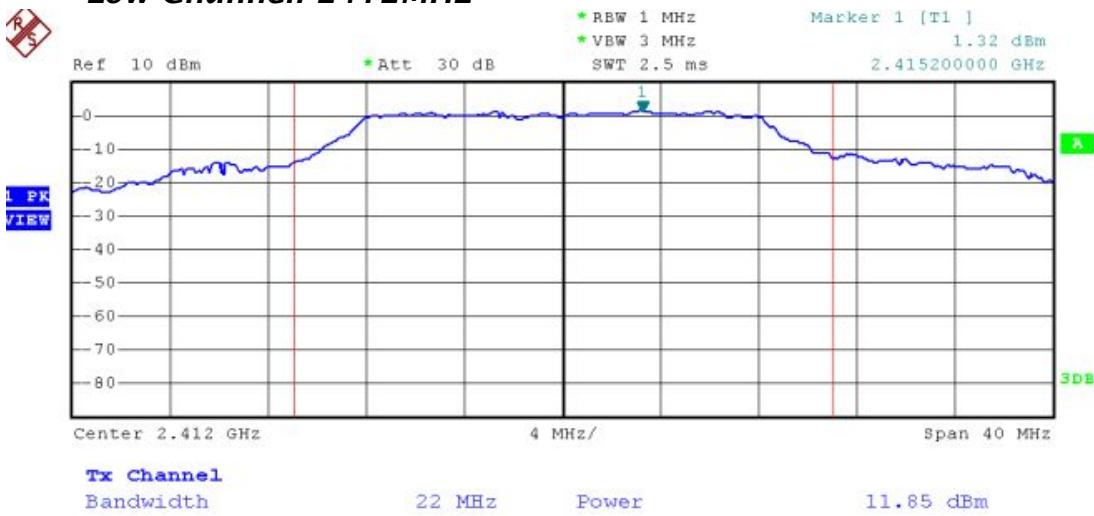

Mid Channel: 2437MHz

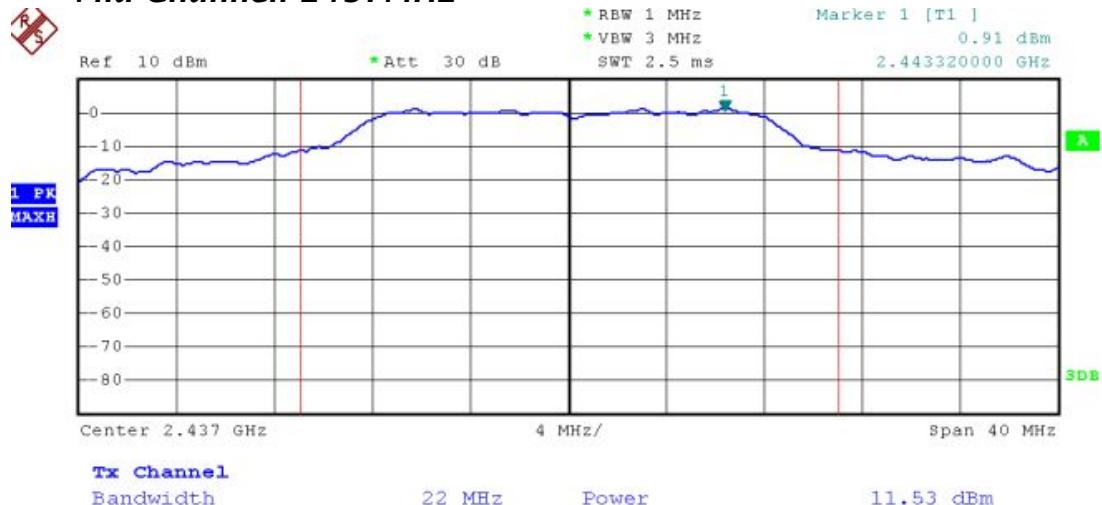


High Channel: 2462MHz

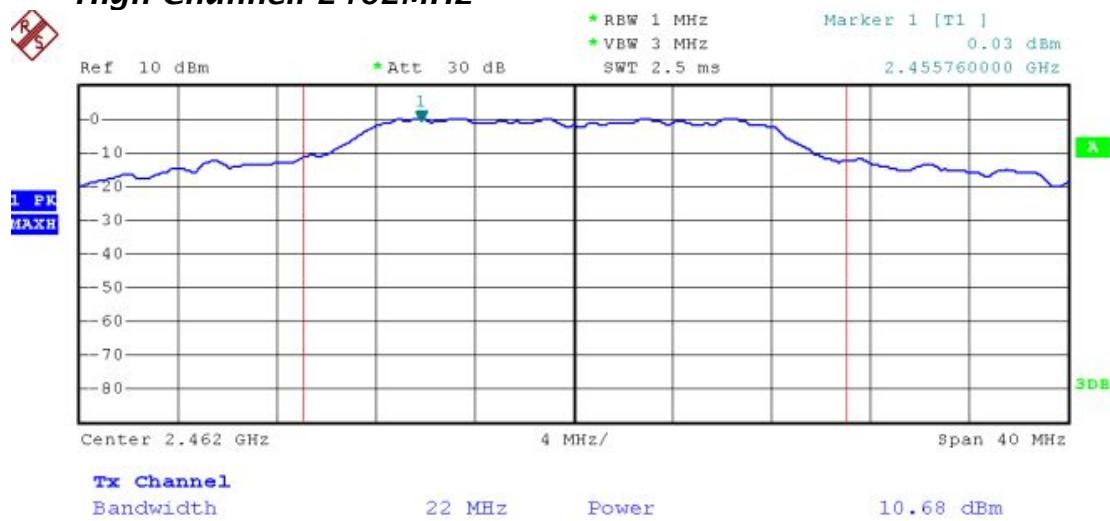


For 802.11n HT20 Mode:


Low Channel: 2412MHz

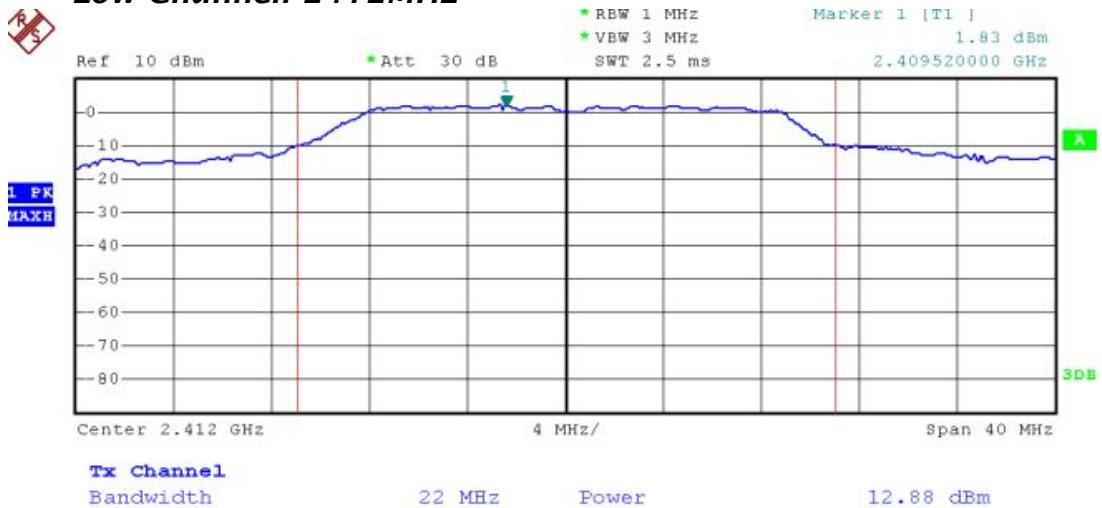

Mid Channel: 2437MHz

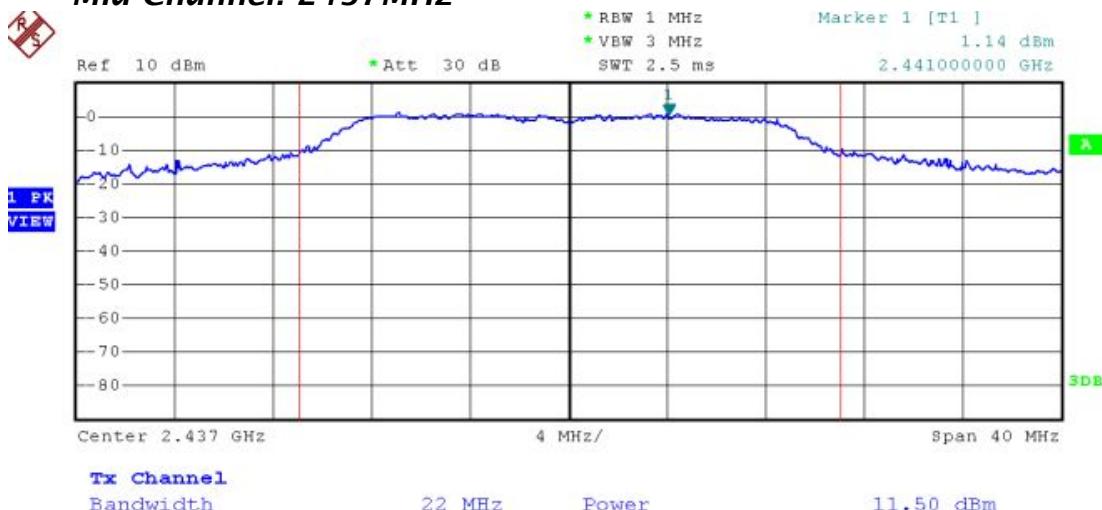


High Channel: 2462MHz

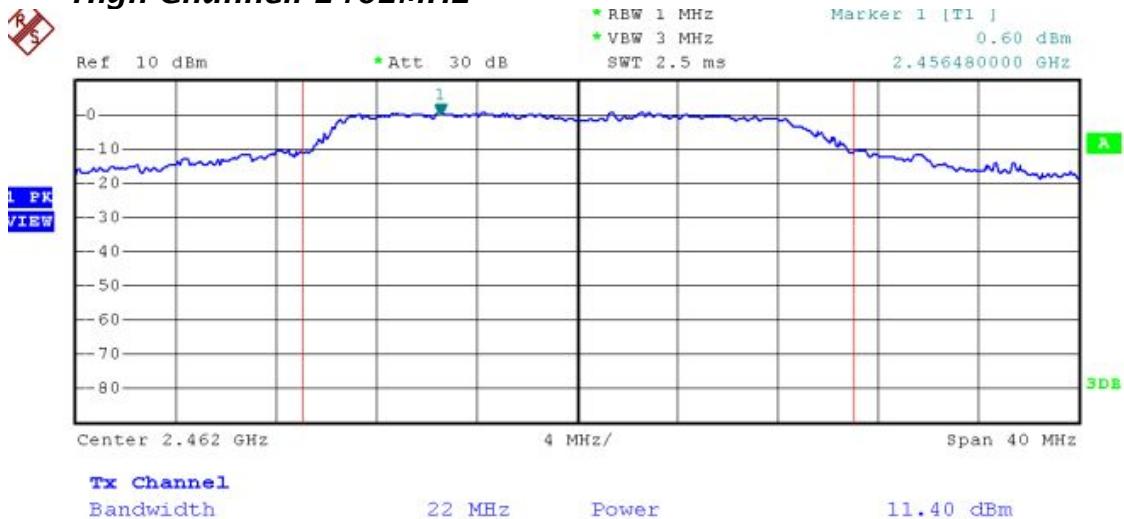


For 802.11n HT40 Mode:


Low Channel: 2422MHz

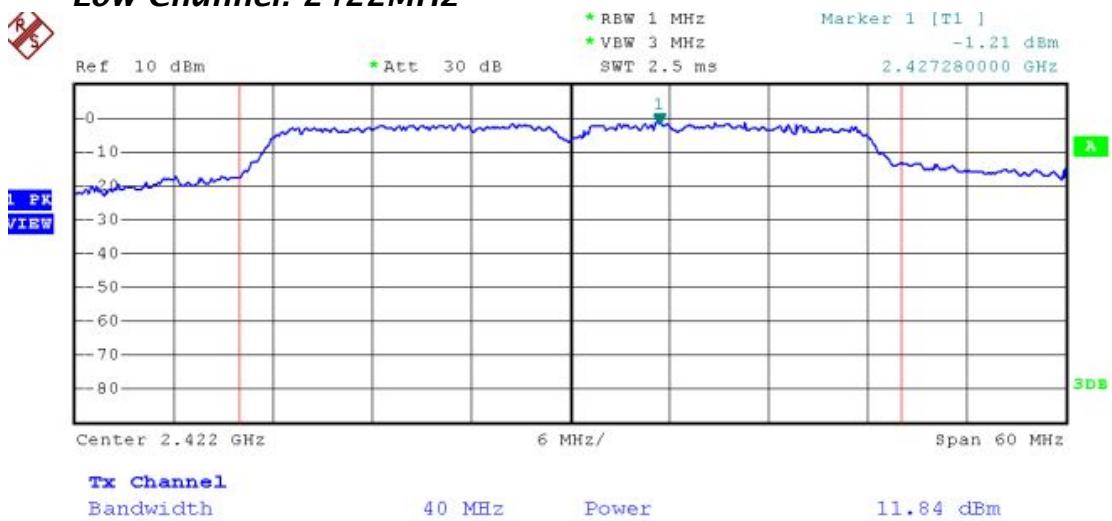

Mid Channel: 2437MHz

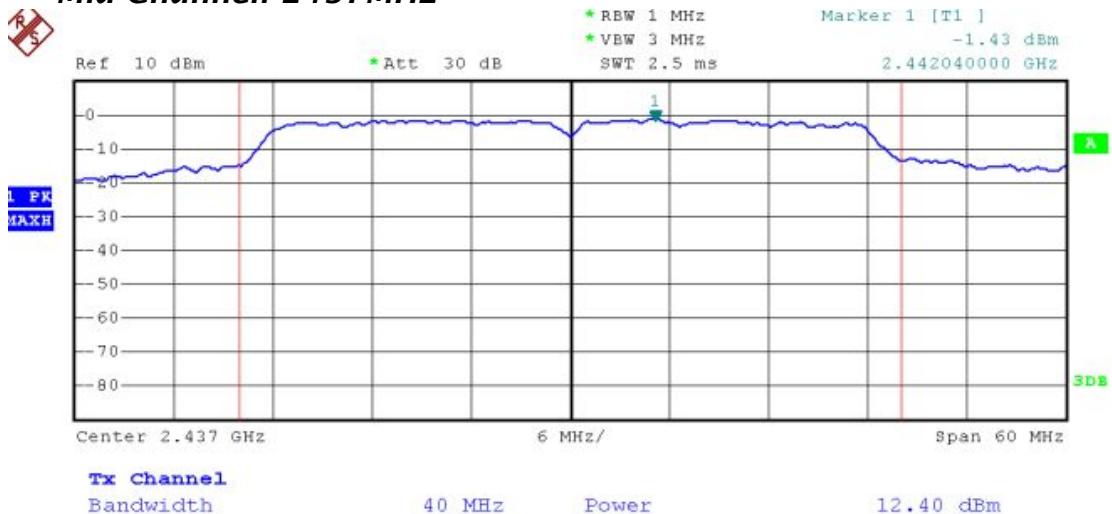

High Channel: 2452MHz

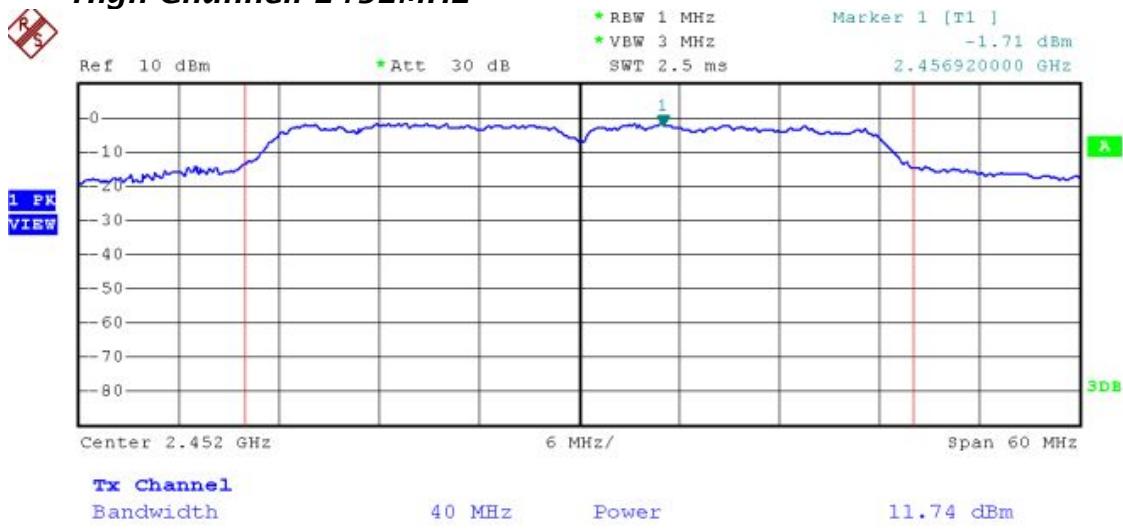


ATTACHMENT 6 - BAND EDGES TEST


CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.247(d)								
MODEL NUMBERS:	HS**	PRODUCT:	SMART PLAYER								
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device								
TEMPERATURE:	23°C	HUMIDITY:	47%RH								
ATM PRESSURE:	101.0kPa	GROUNDING:	None								
TESTED BY:	Daomen	DATE OF TEST:	June 7 th , 2012								
TEST REFERENCE:	ANSI C63.10: 2009 and 558074 D01										
TEST PROCEDURE:	<p>Requirement: 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.</p> <p>Test Procedures: The EUT was set -up as ANSI C63.4-2009, tested to DTS test procedure of 558074 D01 for compliance to FCC 47CFR 15.247 requirements.</p>										
DESCRIPTIONS OF TEST MODE:	Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations,data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were chosen for the final test as listed below: 802.11b mode with data rate of 1Mbps, 802.11g mode with data rate of 6Mbps,802.11n HT20 mode with data rate of 6.5Mbps and 802.11n HT40 mode with data rate of 13.5Mbps.										
EQUIPMENT SETUP	<p>Spectrum analyzer shall be set as below:</p> <table border="1"> <tr> <td>Equipment Mode</td> <td>Spectrum Analyzer</td> </tr> <tr> <td>Detector Function</td> <td>Peak Mode</td> </tr> <tr> <td>RBW</td> <td>100KHz</td> </tr> <tr> <td>VBW</td> <td>300KHz</td> </tr> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak Mode	RBW	100KHz	VBW	300KHz
Equipment Mode	Spectrum Analyzer										
Detector Function	Peak Mode										
RBW	100KHz										
VBW	300KHz										
TEST VOLTAGE:	120VAC/60Hz										
RESULTS:	The EUT meet the requirements of test reference for band edges.The test results relate only to the equipment under test provided by client.										
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.										
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB.										

For 802.11b Mode:

Conducted Band Edge Test Plot: 2412MHz

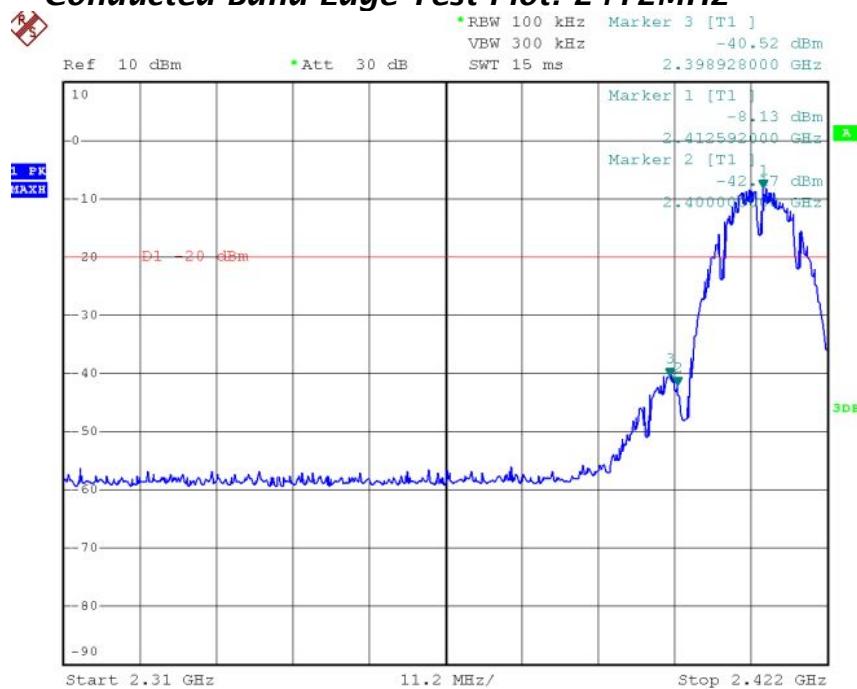


Conducted Band Edge Test Plot: 2462MHz

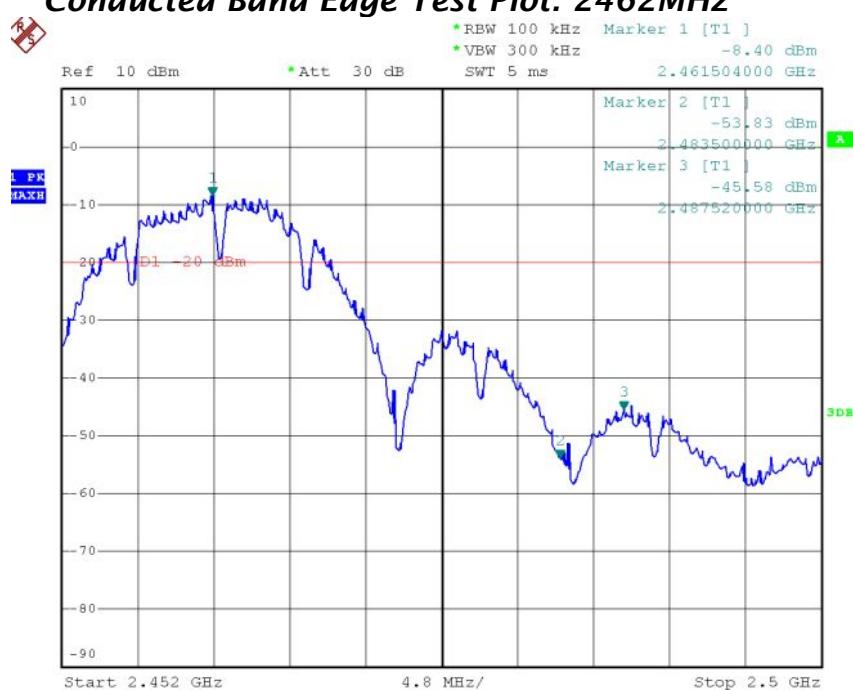


Radiated Band Edge Test Plot: 2412MHz


Horizontal-Average

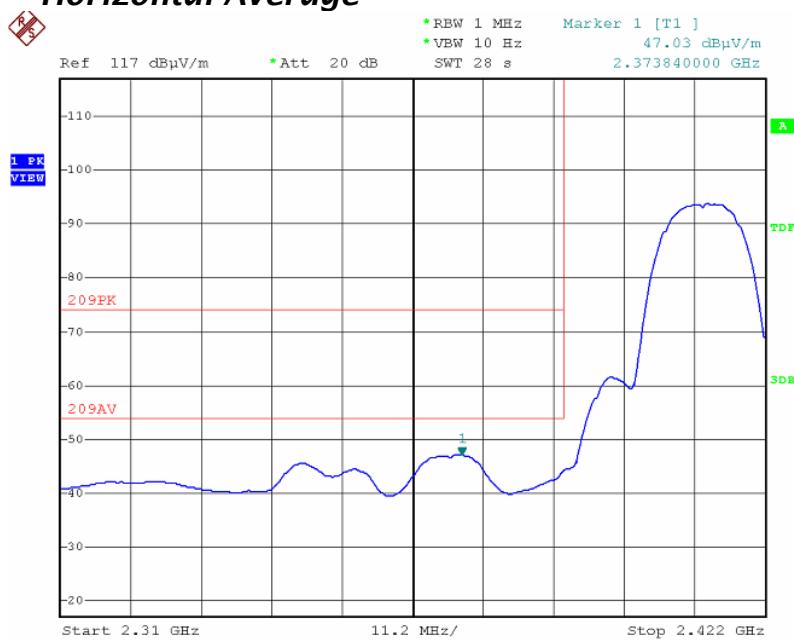


Horizontal-Peak

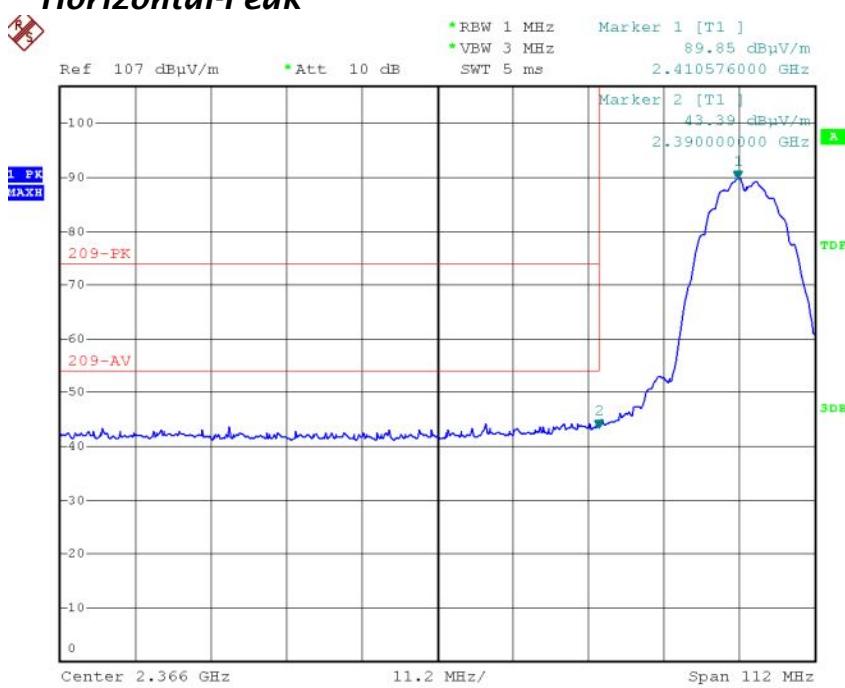

Vertical-Average

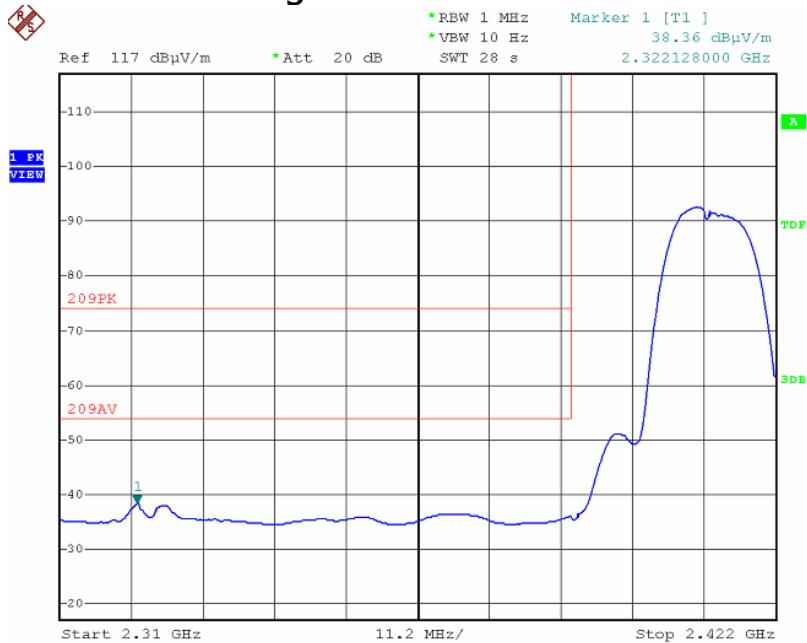


Vertical-Peak

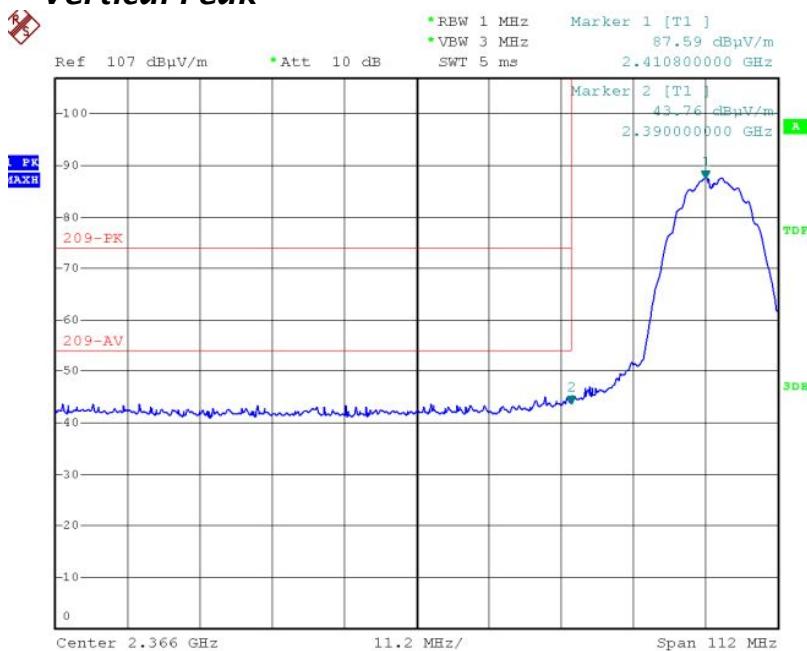


Radiated Band Edge Test Plot: 2462MHz


Horizontal-Average

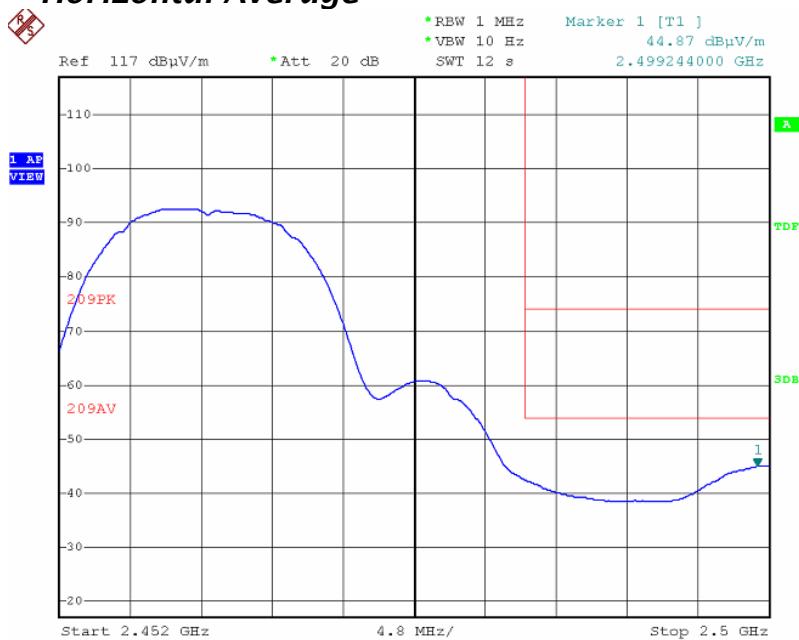


Horizontal-Peak

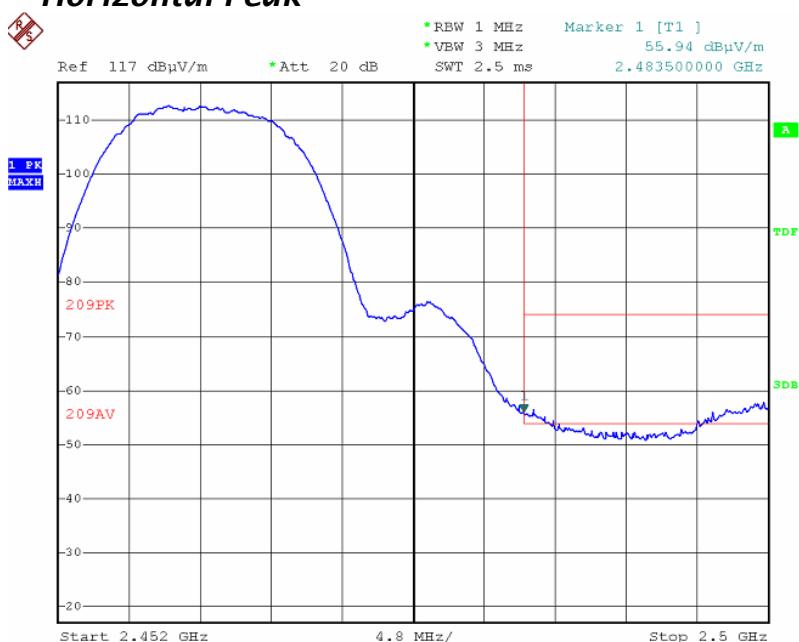

Vertical- Average

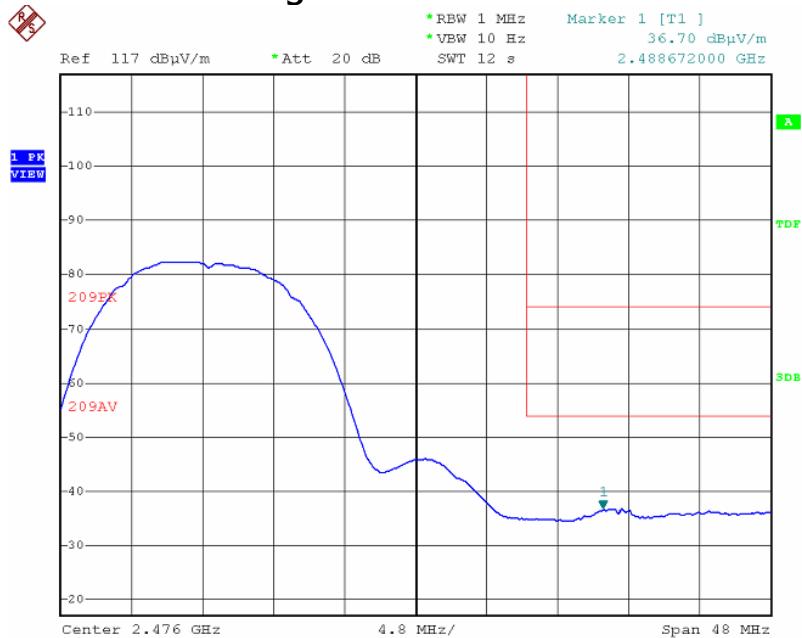


Vertical- Peak

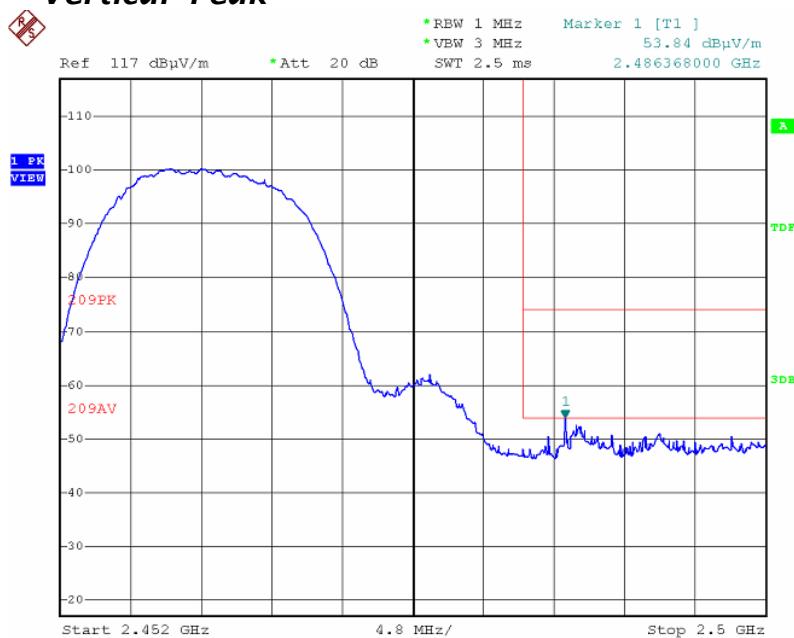


Conducted Spurious Emission Test Plot


Low Channel: 2412MHz

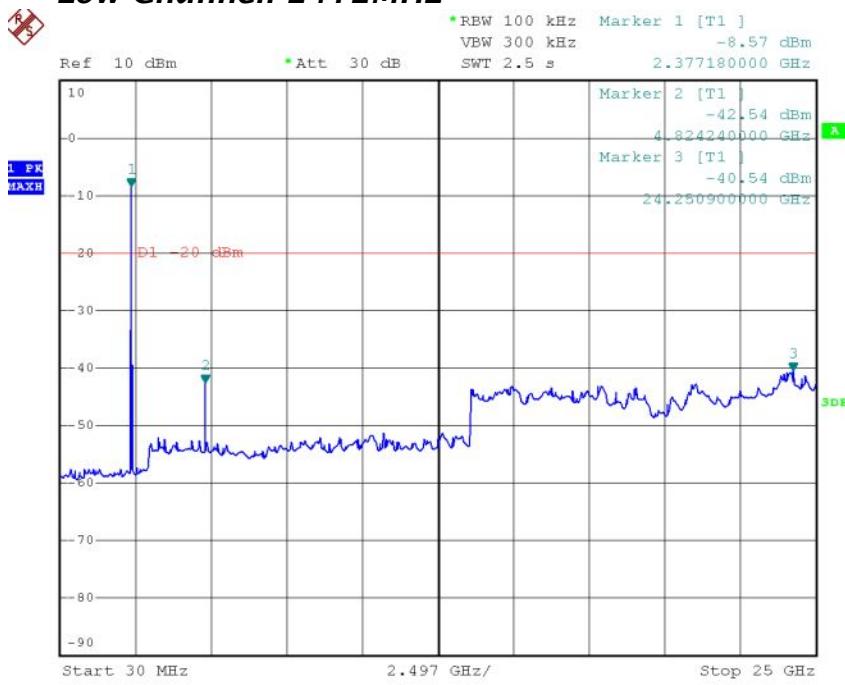

Mid Channel: 2437MHz

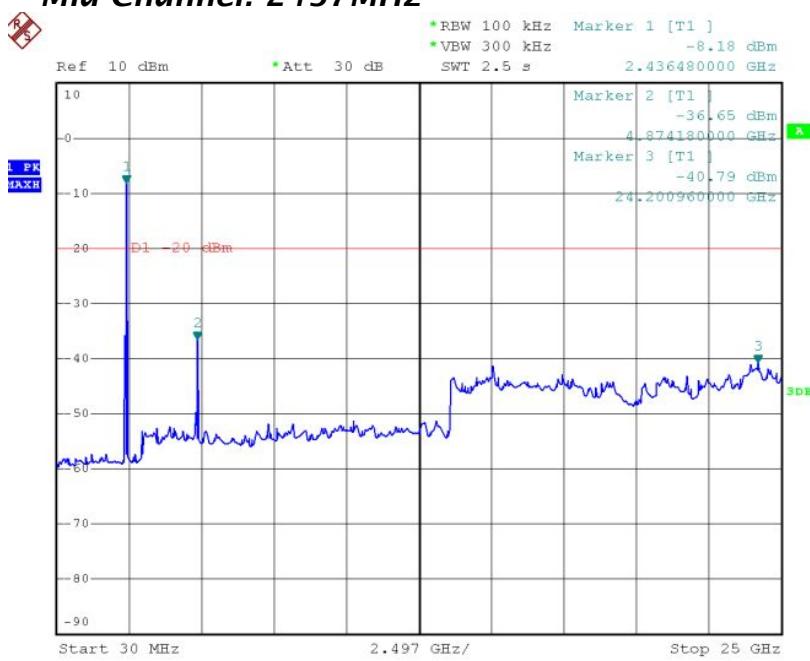


High Channel: 2462MHz

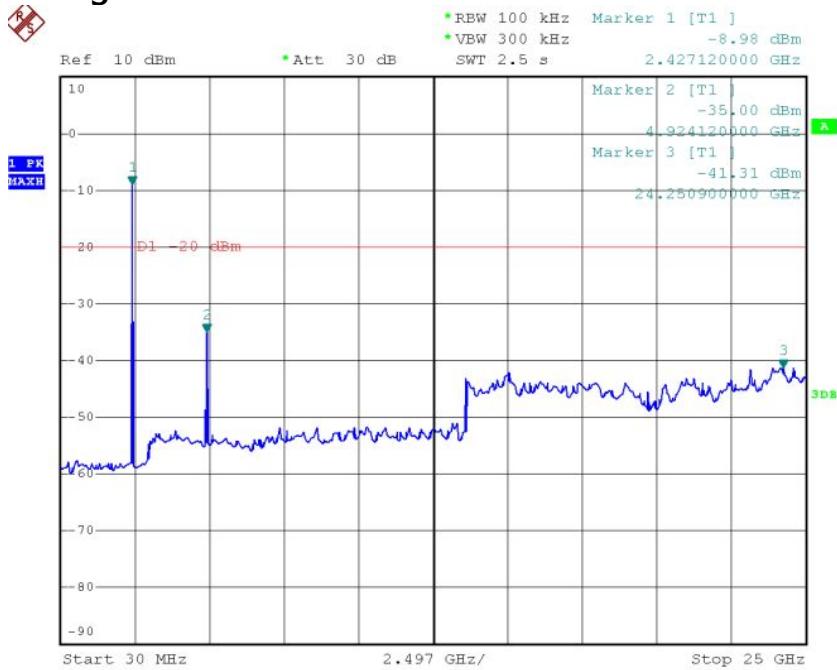


For 802.11g Mode:

Conducted Band Edge Test Plot: 2412MHz

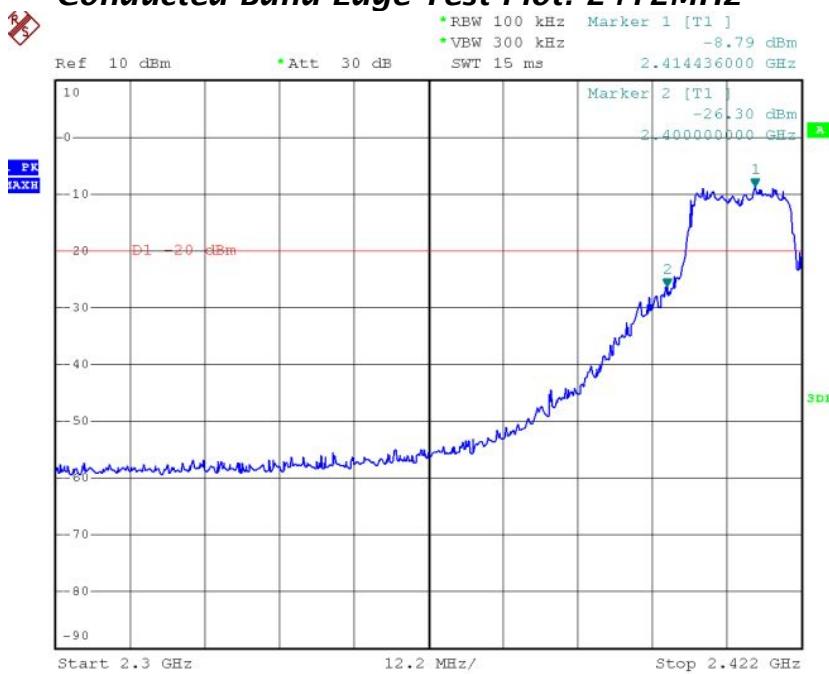


Conducted Band Edge Test Plot: 2462MHz

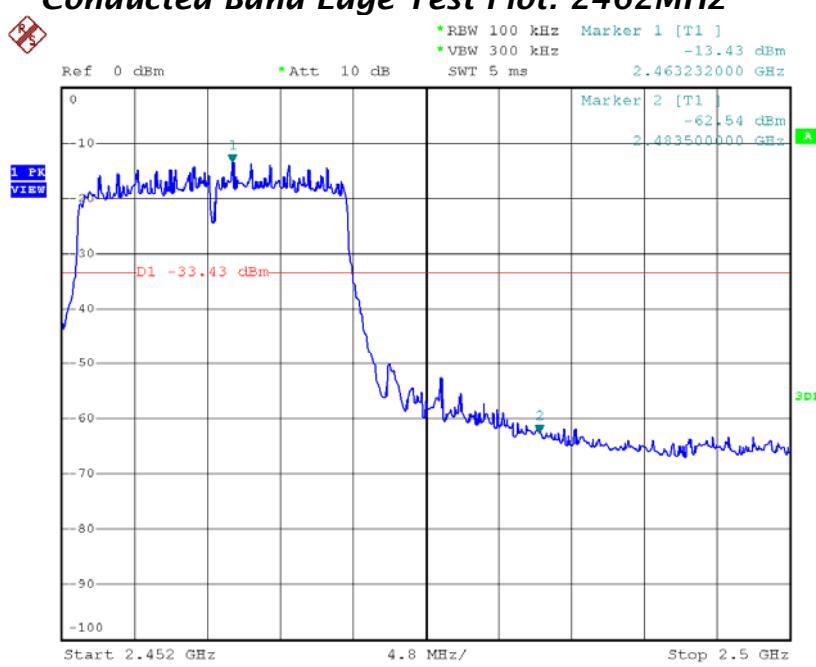


Radiated Band Edge Test Plot: 2412MHz


Horizontal- Average

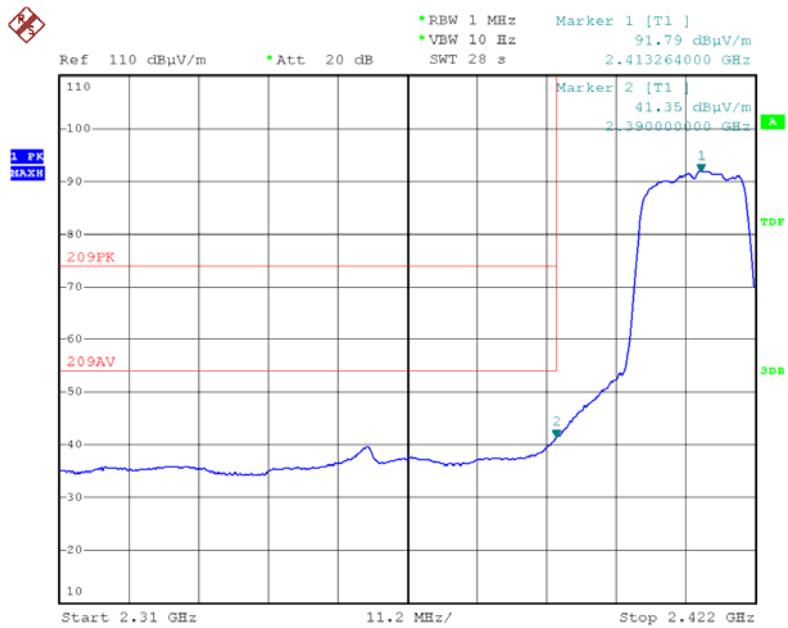


Horizontal-Peak

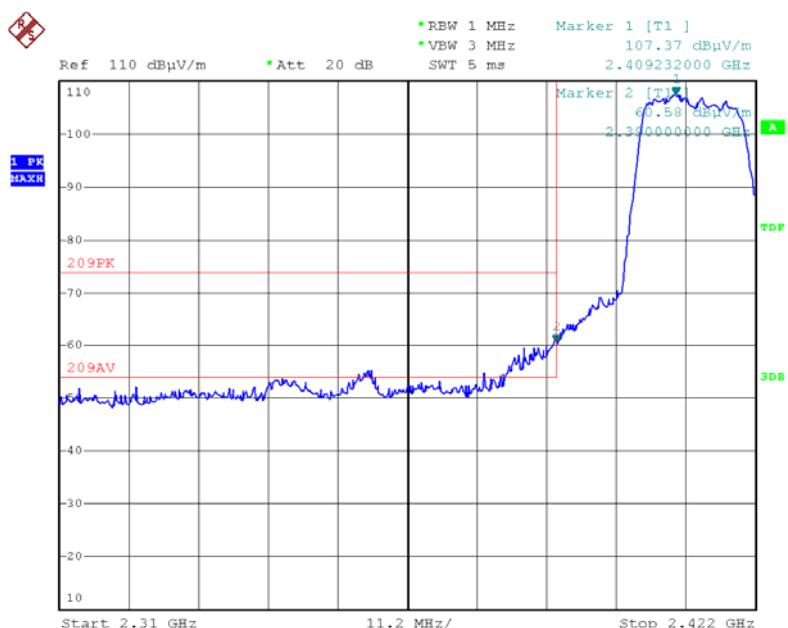

Vertical-Average

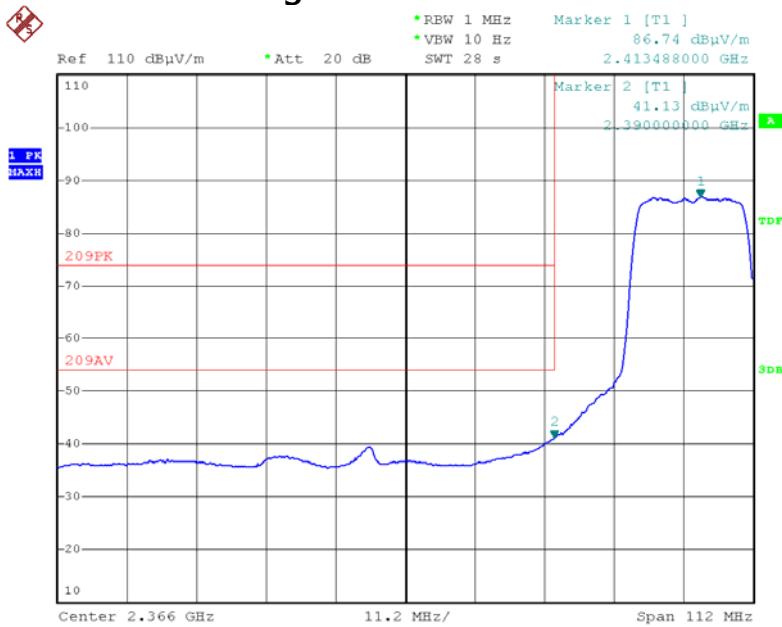


Vertical-Peak

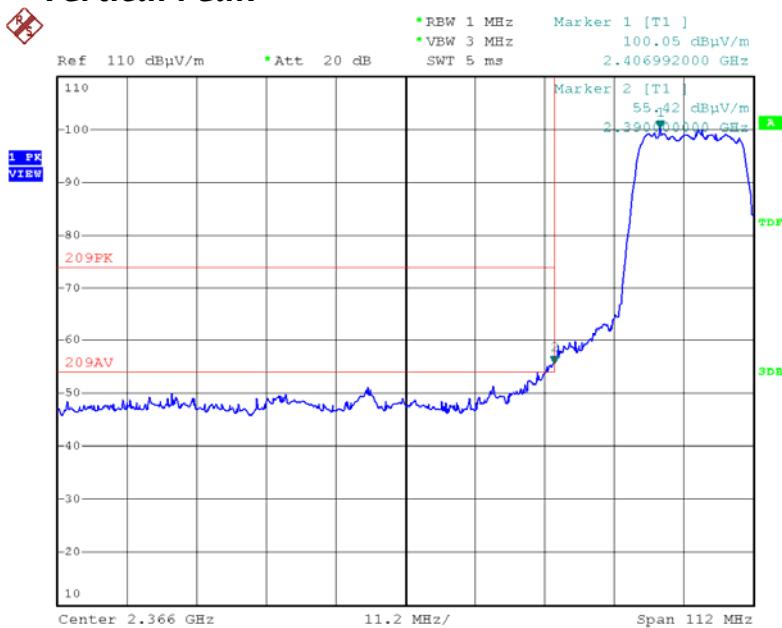


Radiated Band Edge Test Plot: 2462MHz


Horizontal- Average

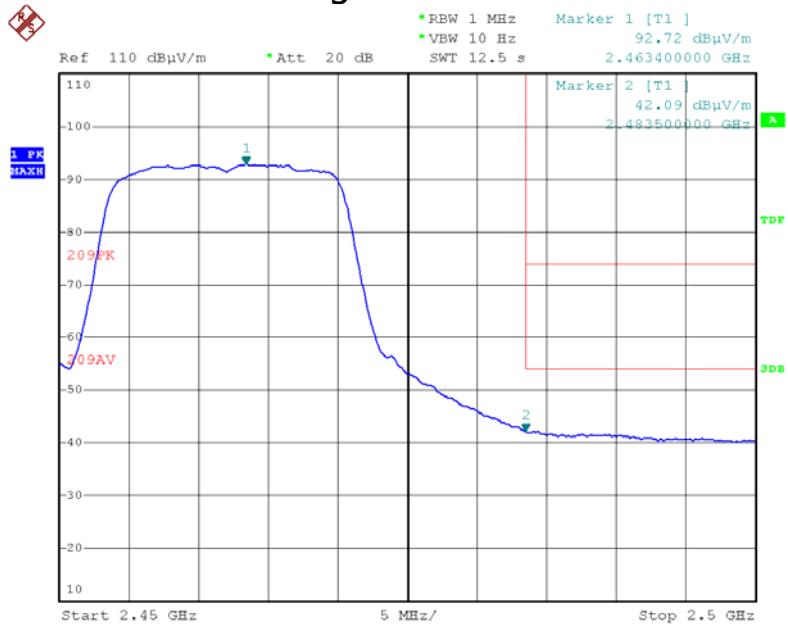


Horizontal-Peak

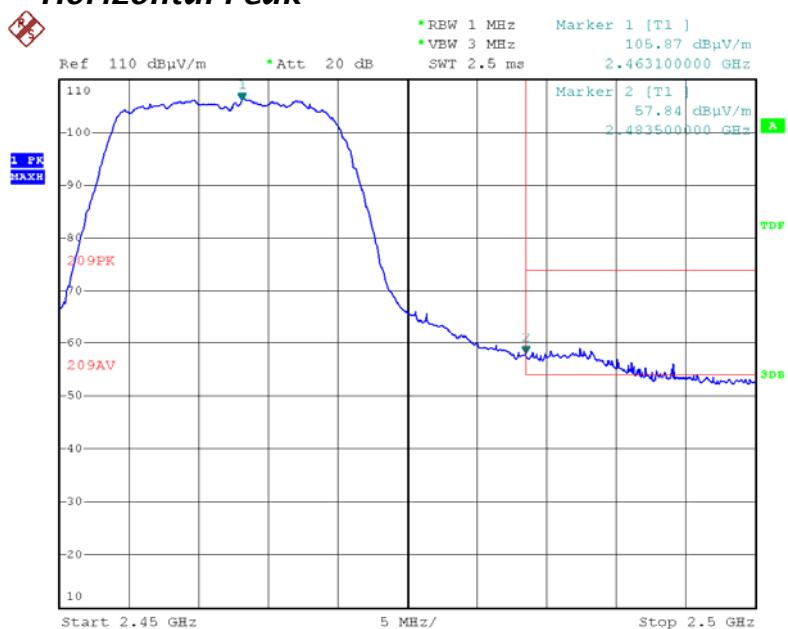

Vertical- Average

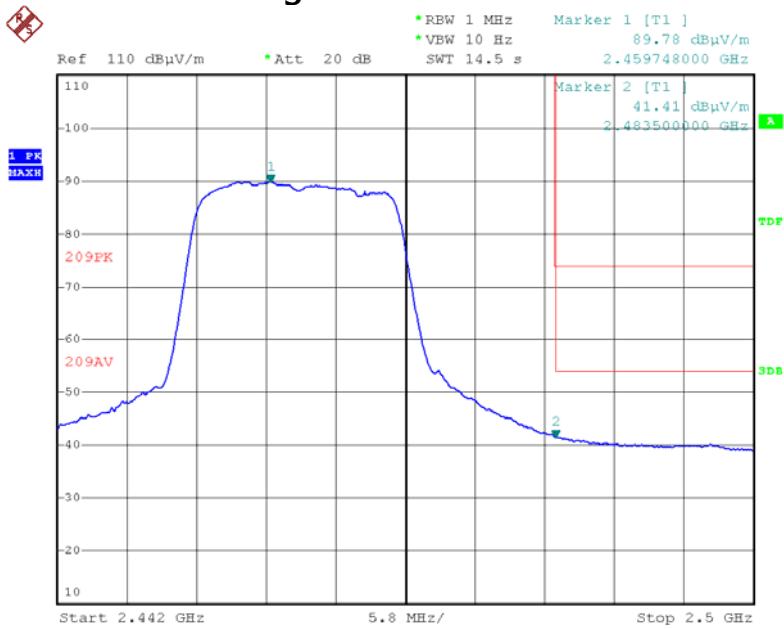


Vertical-Peak

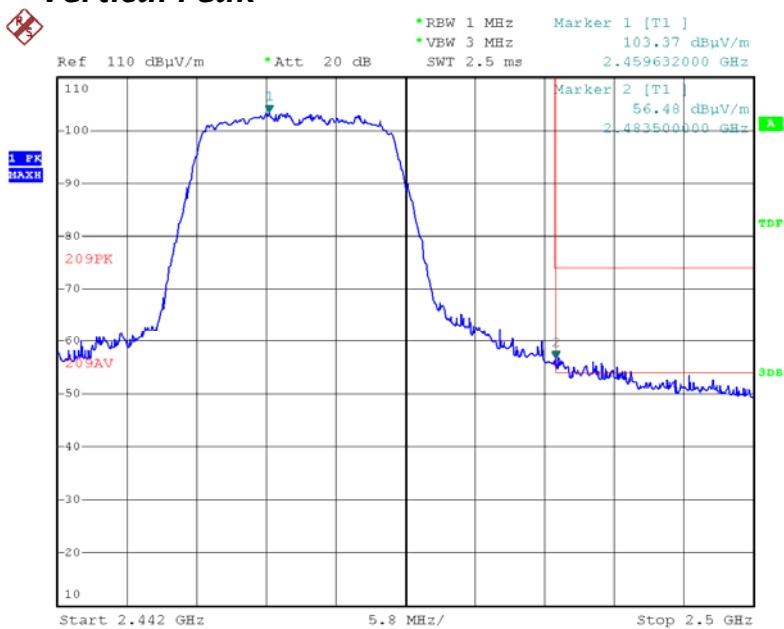


Conducted Spurious Emission Test Plot


Low Channel: 2412MHz

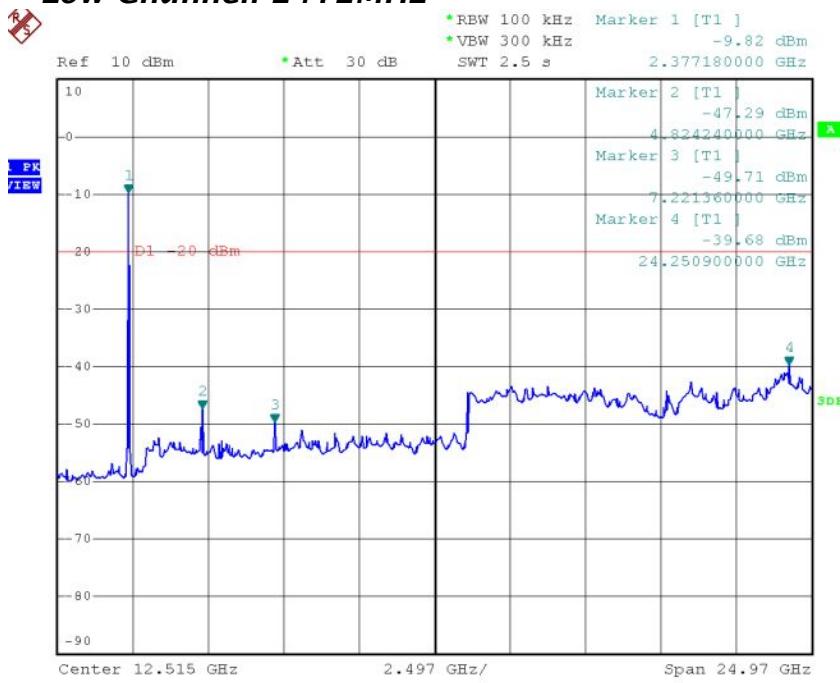

Mid Channel: 2437MHz

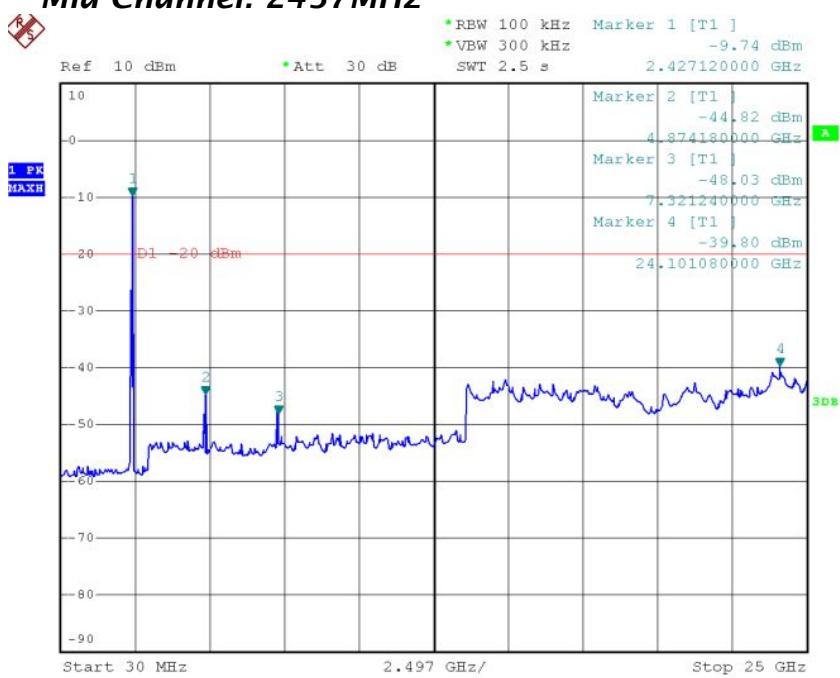


High Channel: 2462MHz

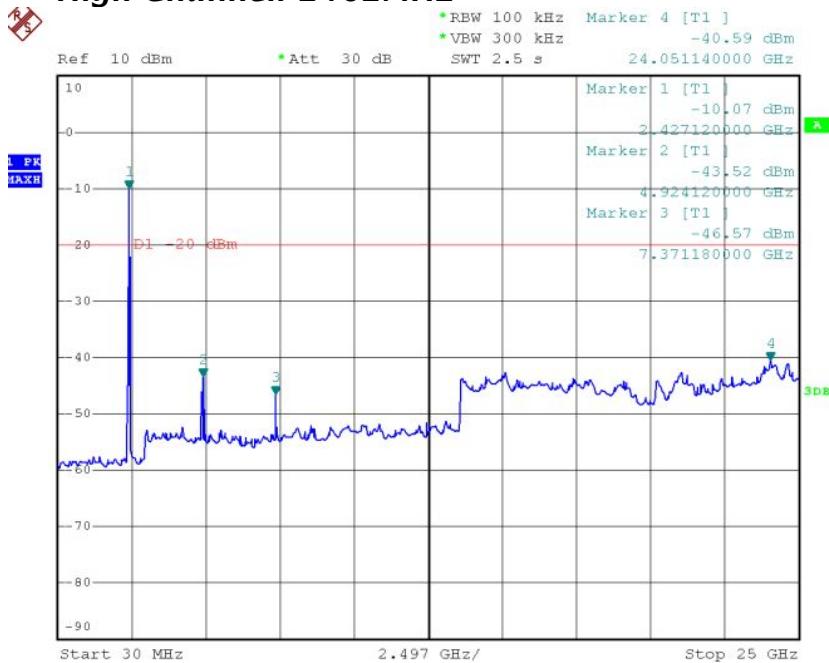


For 802.11n HT20 Mode:

Conducted Band Edge Test Plot: 2412MHz

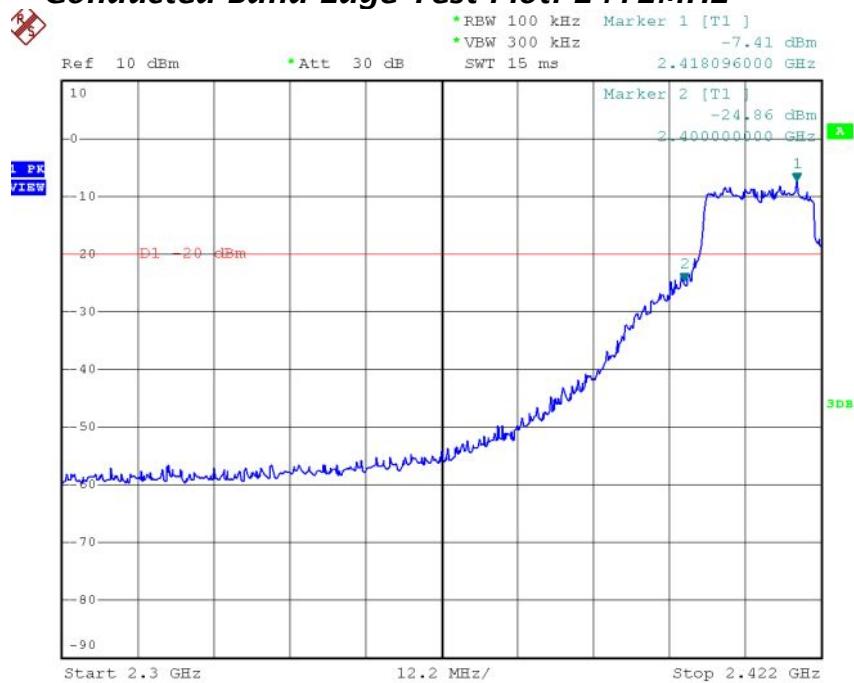


Conducted Band Edge Test Plot: 2462MHz

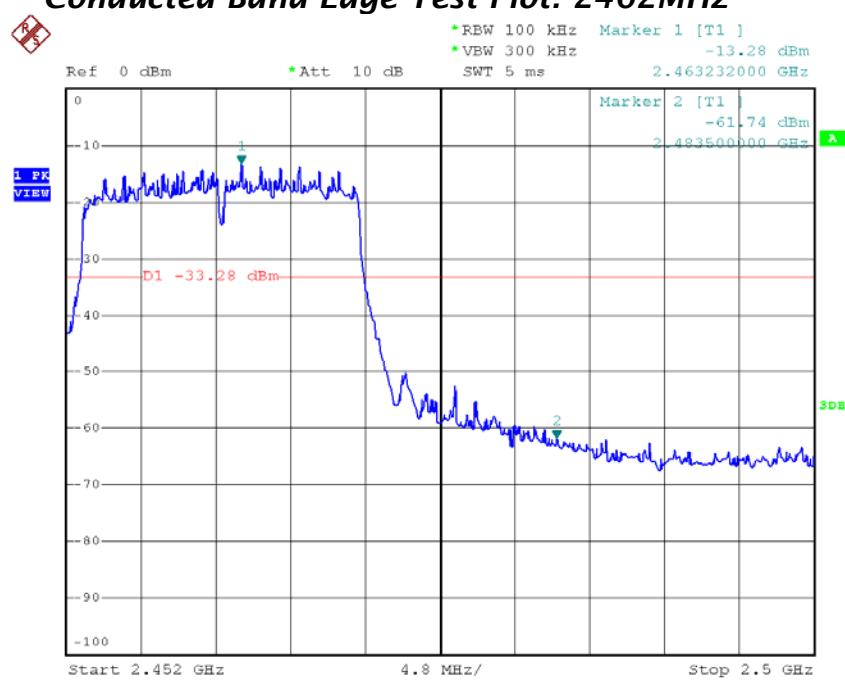


Radiated Band Edge Test Plot: 2412MHz

Horizontal-Average

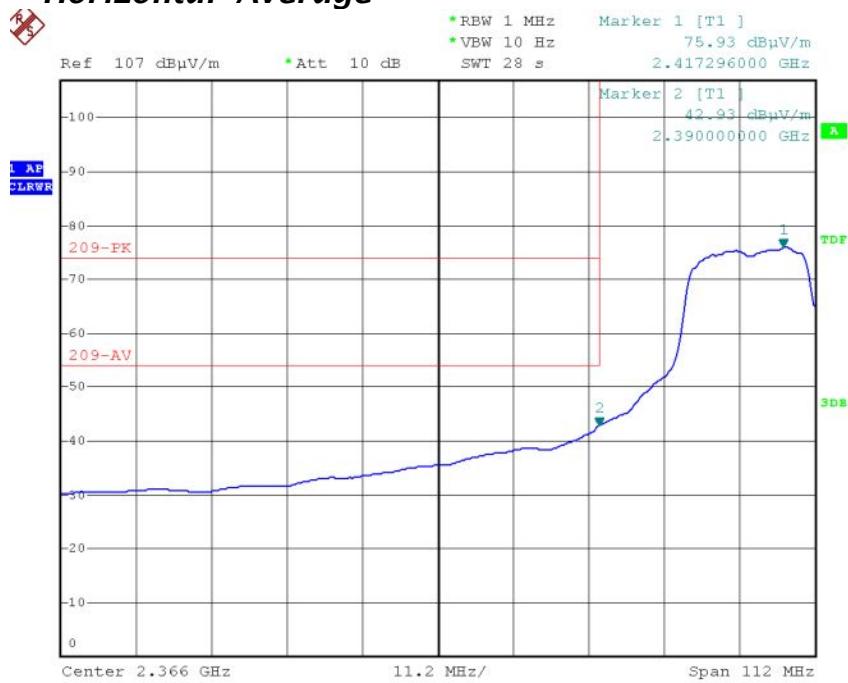


Horizontal-Peak

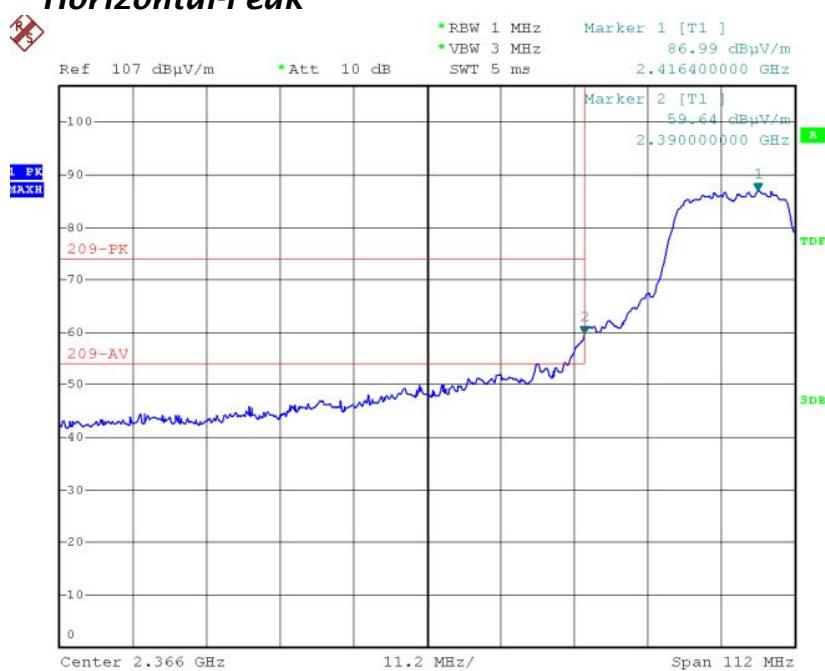

Vertical-Average



Vertical-Peak

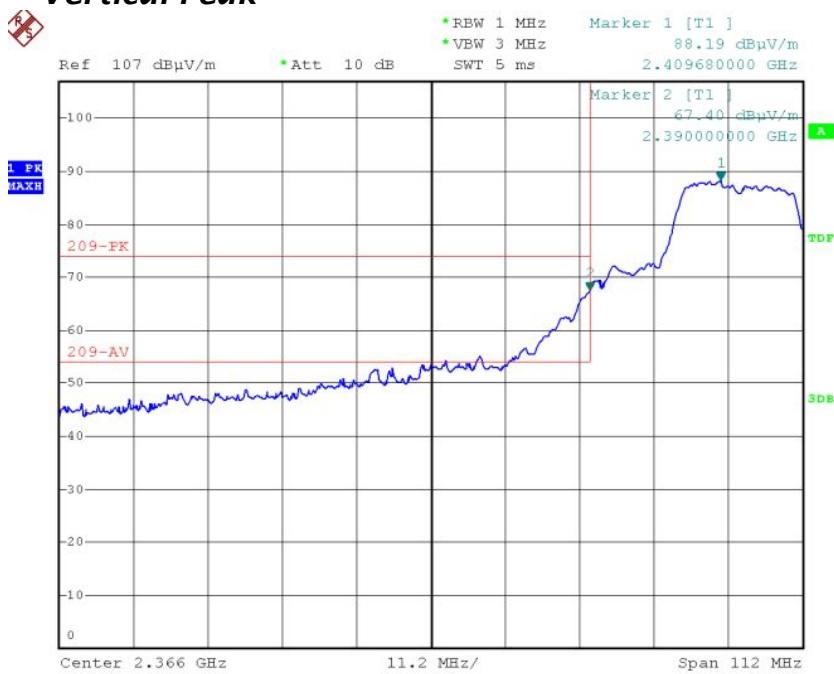


Radiated Band Edge Test Plot: 2462MHz


Horizontal-Average




Horizontal-Peak

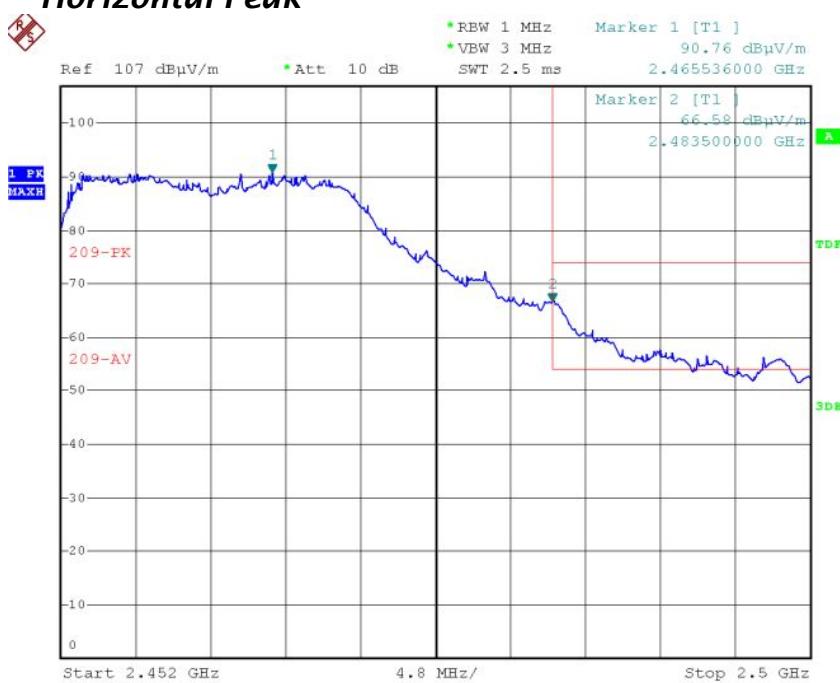

Vertical-Average

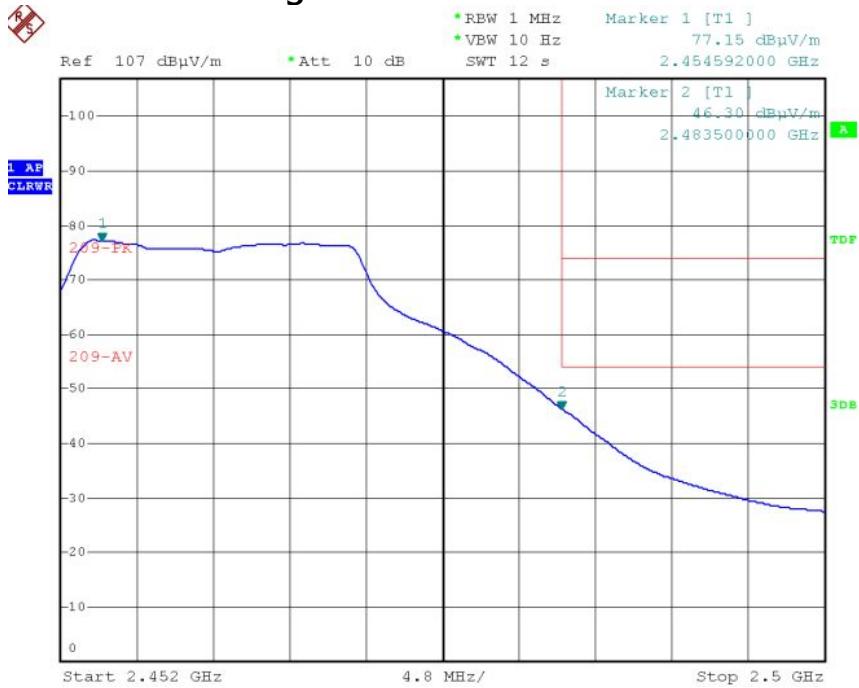


Vertical-Peak

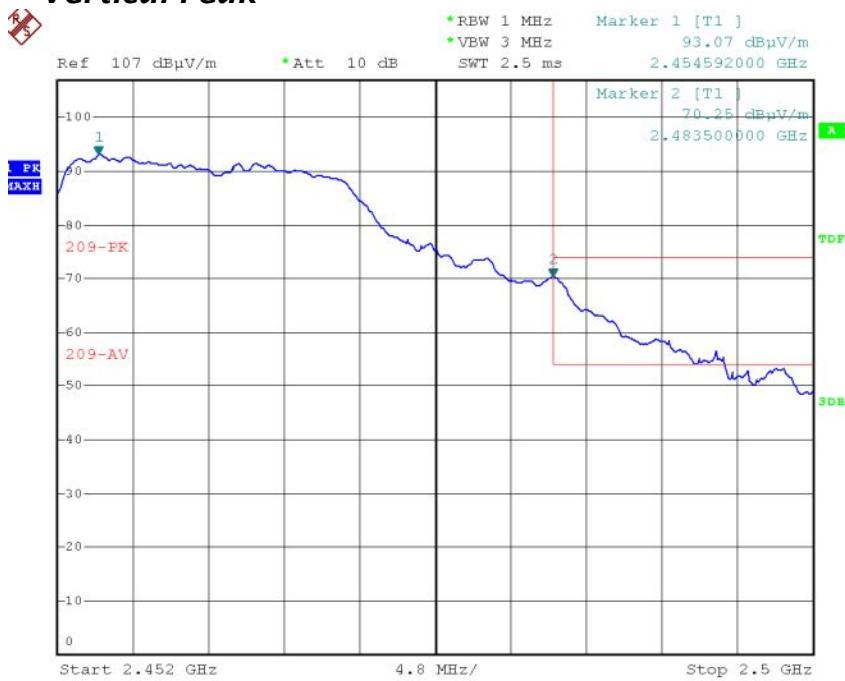


Conducted Spurious Emission Test Plot


Low Channel: 2412MHz

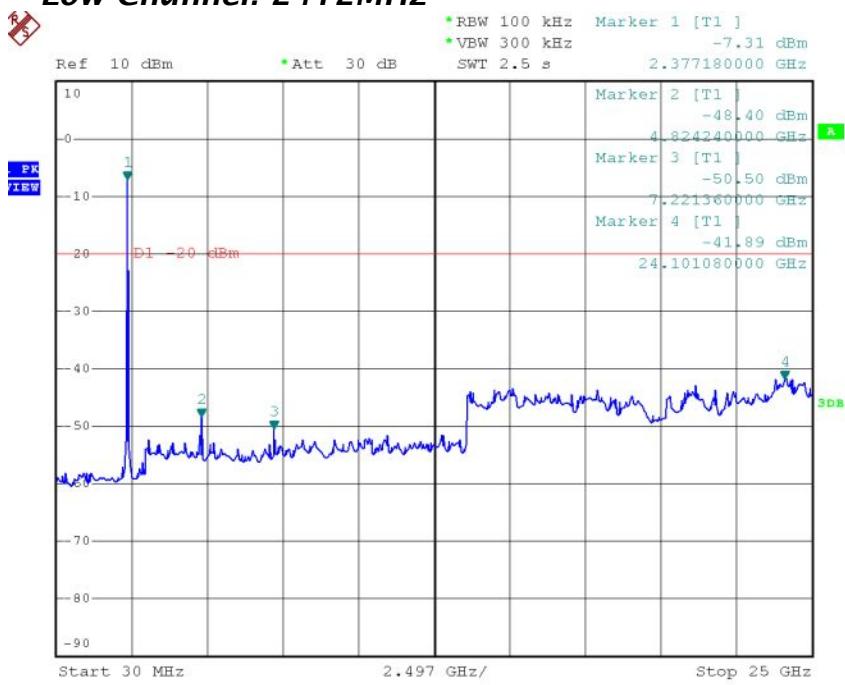

Mid Channel: 2437MHz

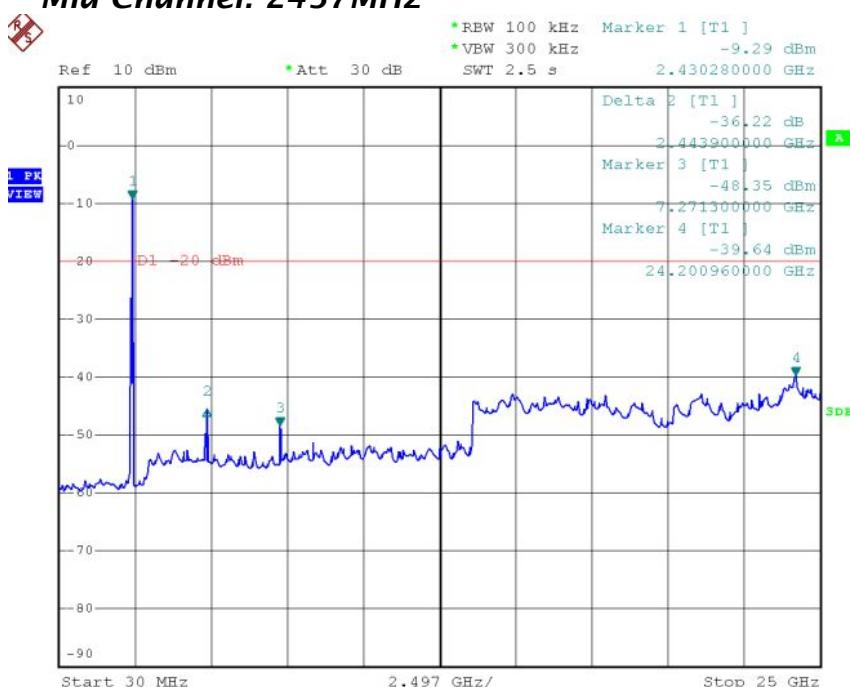

High Channel: 2462MHz

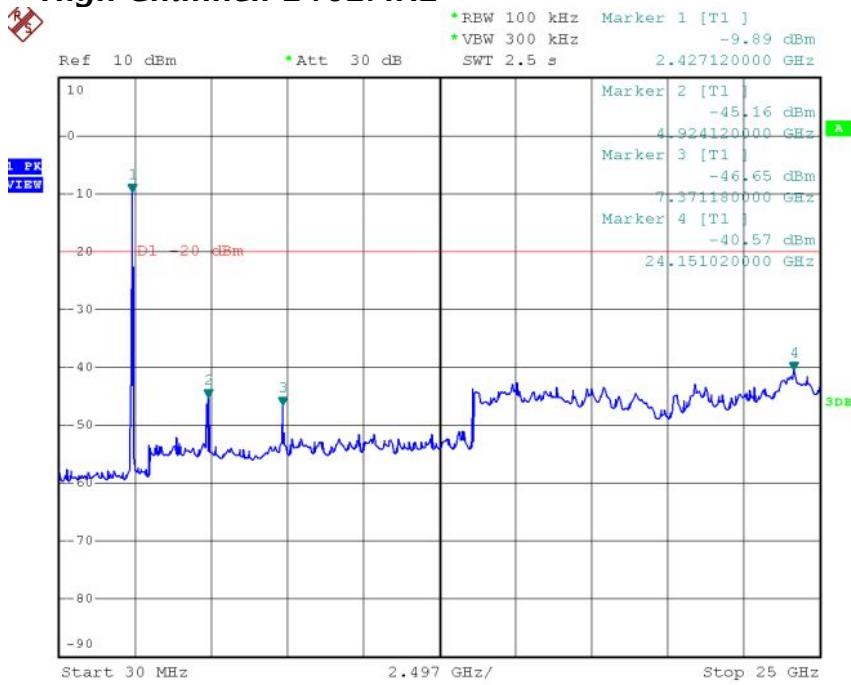

Test Report #: SHE-1204-10805-FCC ID


Prepared for HESIO INTERNATIONAL CO., LTD

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).


Page 82 of 97

For 802.11n HT40 Mode:

Conducted Band Edge Test Plot: 2422MHz

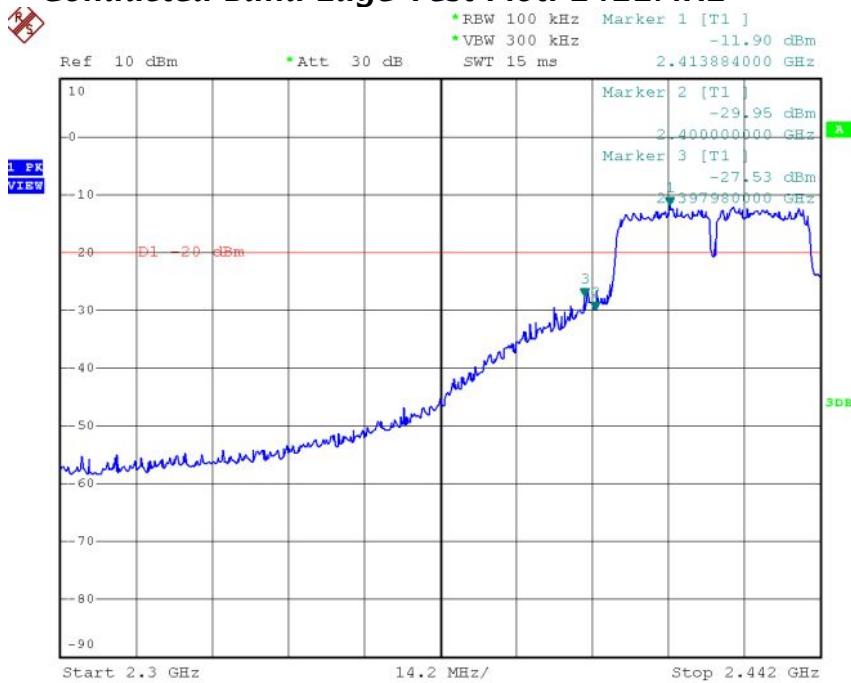


Conducted Band Edge Test Plot: 2452MHz

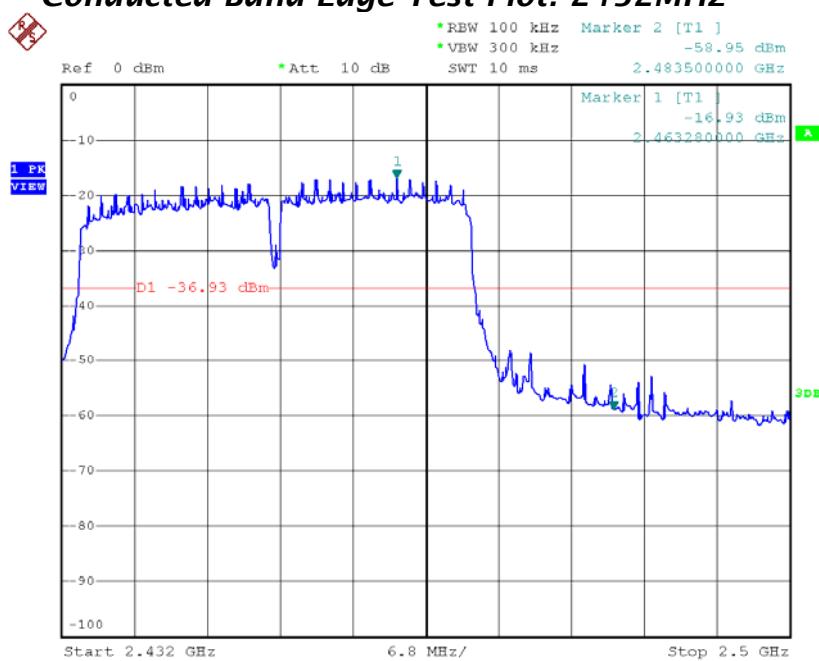


Radiated Band Edge Test Plot: 2422MHz


Horizontal- Average

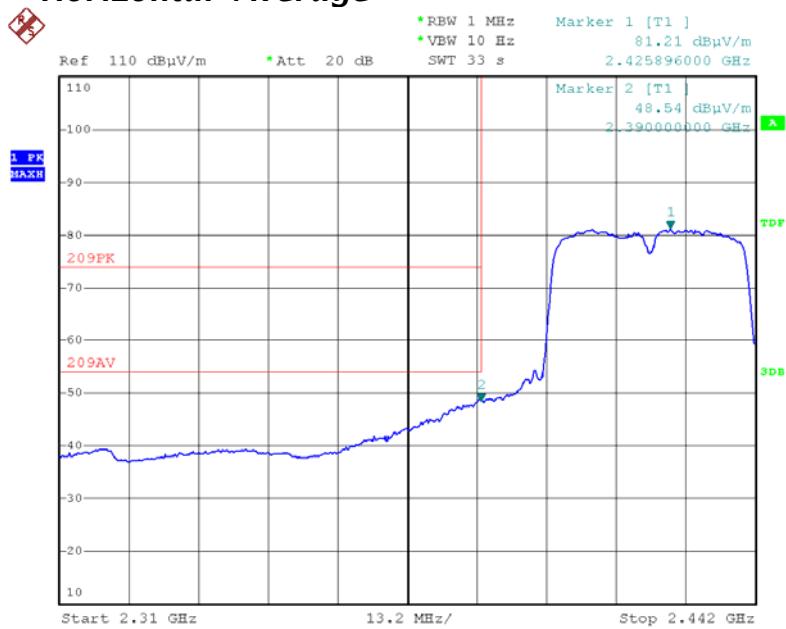


Horizontal-Peak

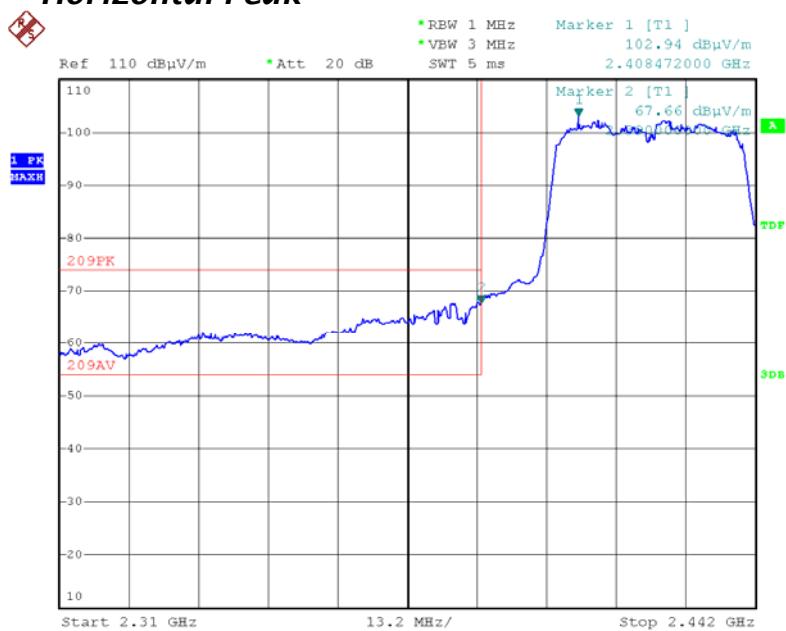

Vertical- Average

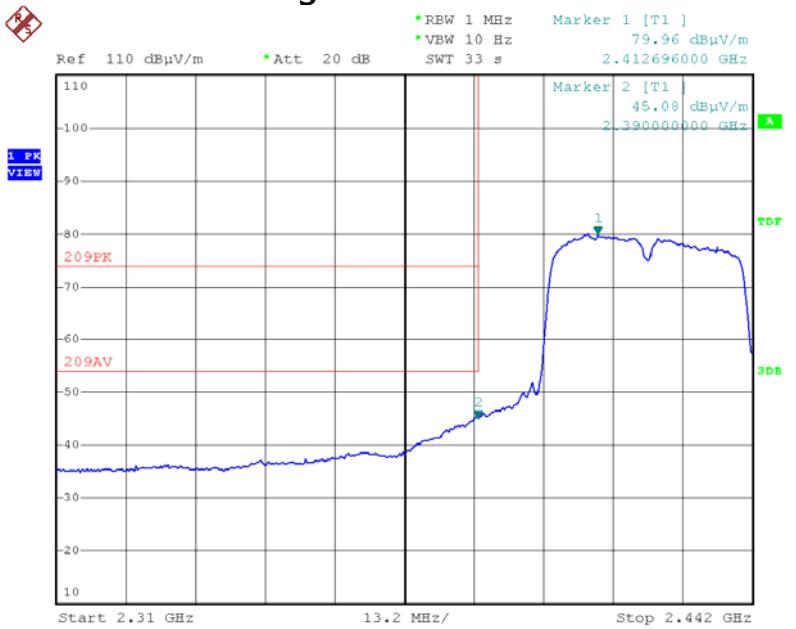


Vertical-Peak

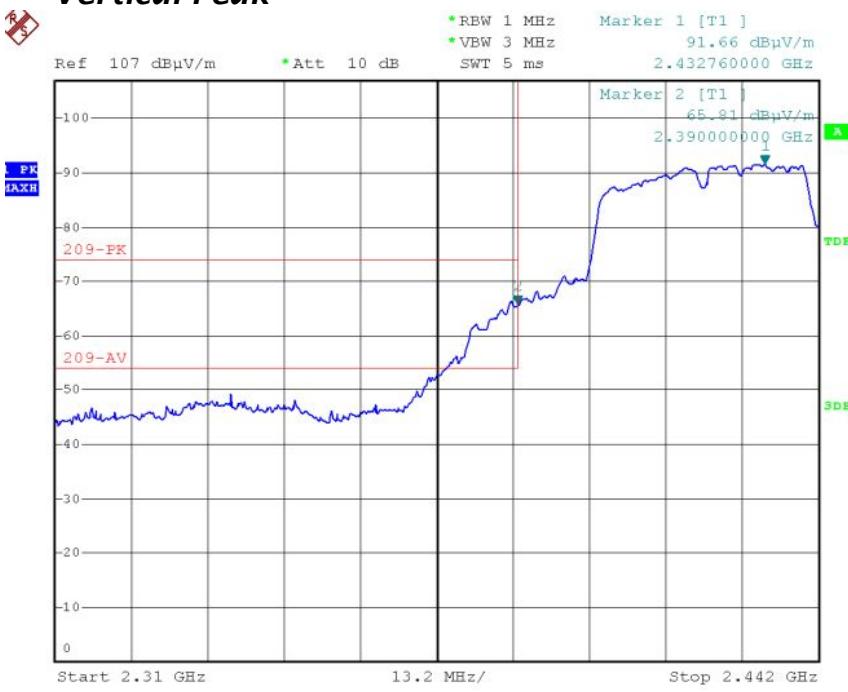


Radiated Band Edge Test Plot: 2452MHz


Horizontal- Average

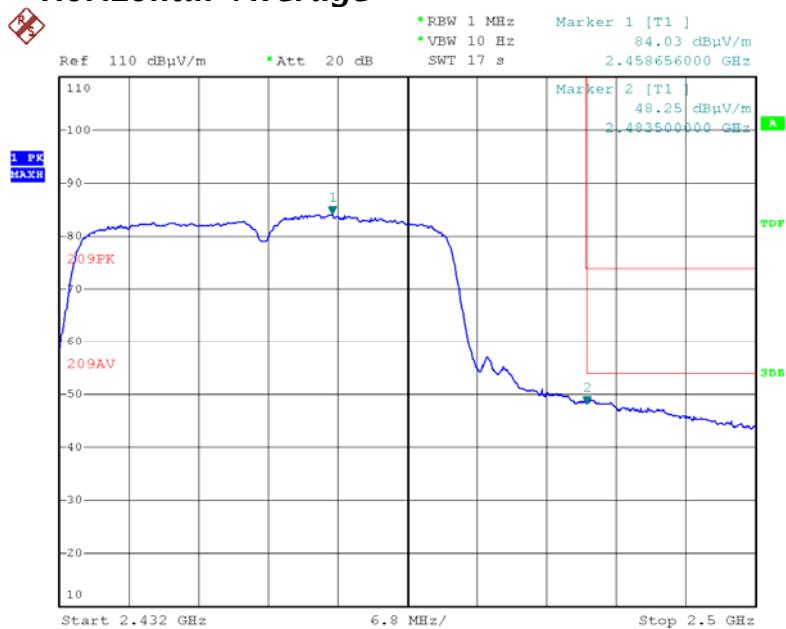


Horizontal-Peak

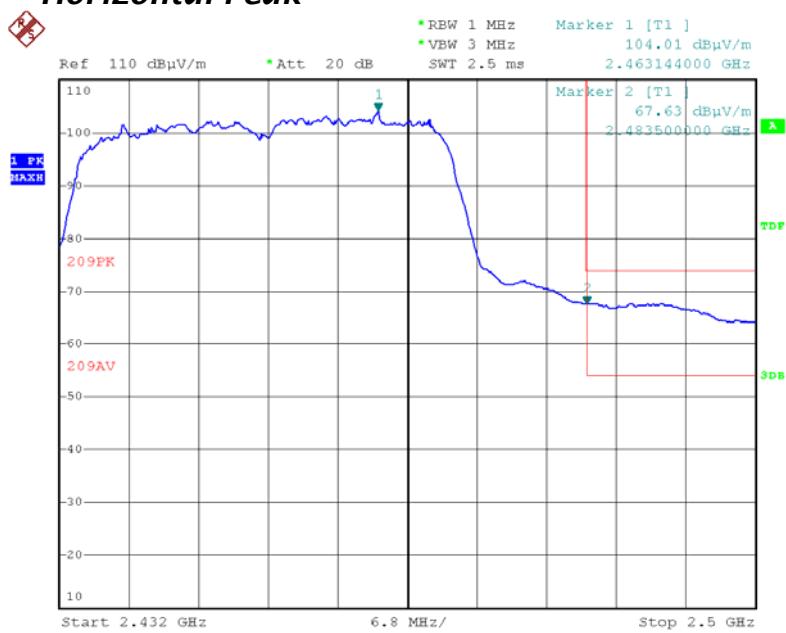

Vertical- Average

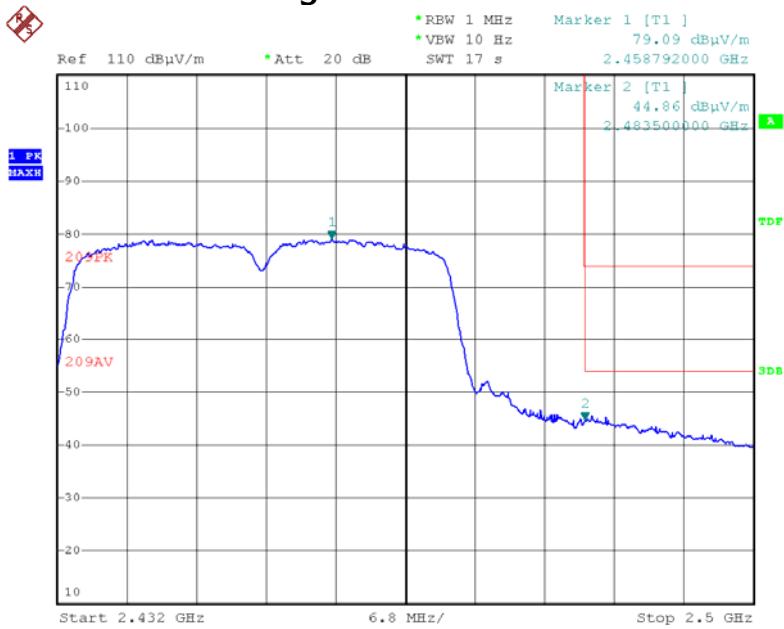


Vertical-Peak

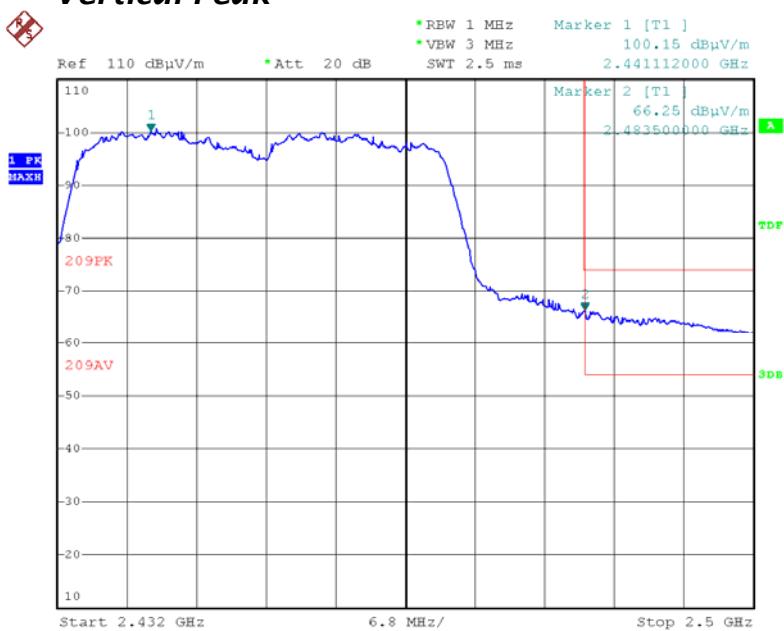


Conducted Spurious Emission Test Plot


Low Channel: 2422MHz

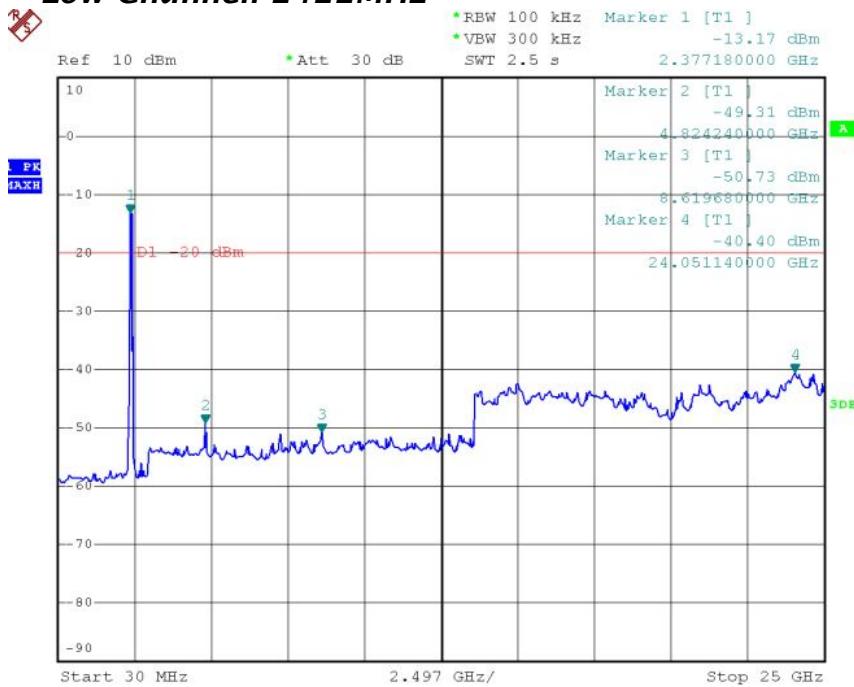

Mid Channel: 2437MHz

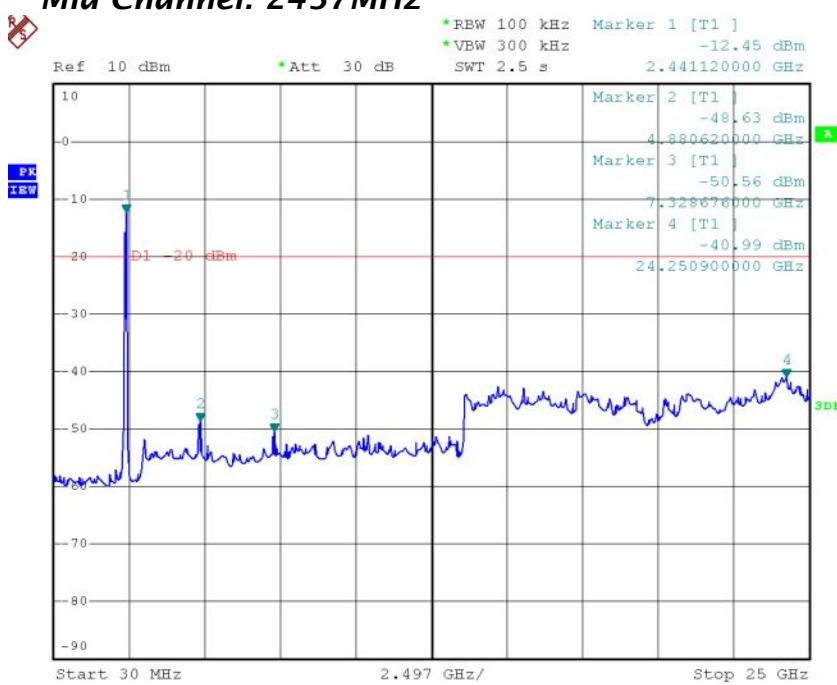

High Channel: 2452MHz

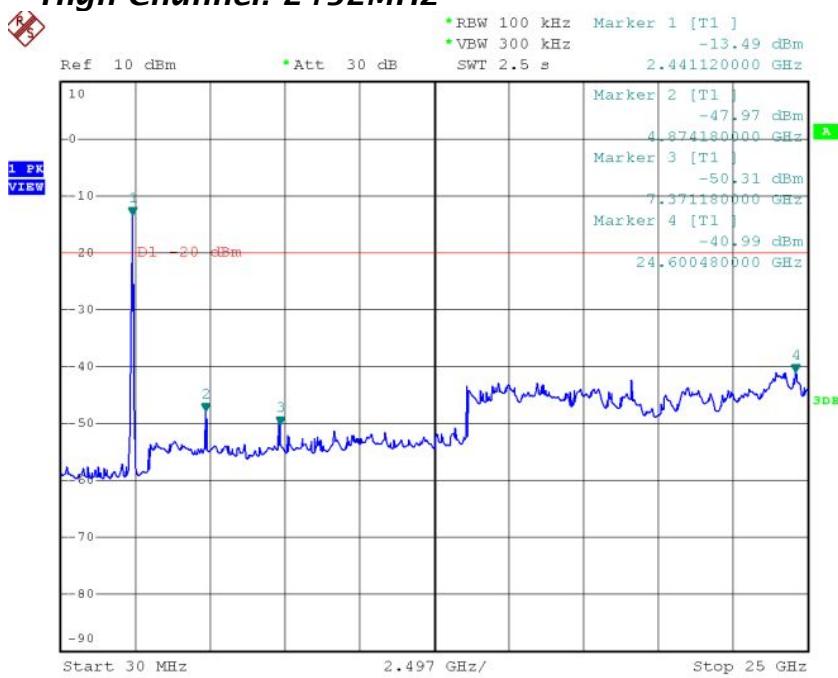

ATTACHMENT 7 - PEAK POWER SPECTRAL DENSITY TEST

CLIENT:	HESIO INTERNATIONAL CO.,LTD.	TEST STANDERD:	Section 15.247(d)												
MODEL NUMBERS:	HS**	PRODUCT:	SMART PLAYER												
EUT MODEL:	HS06	EUT DESIGNATION:	Digital Transmission Device												
TEMPERATURE:	23°C	HUMIDITY:	47%RH												
ATM PRESSURE:	101.0kPa	GROUNDING:	None												
TESTED BY:	Daomen	DATE OF TEST:	May 10 th , 2012												
TEST REFERENCE:	ANSI C63.4 and KDB Publication No. 558074 D01 for DSSS.														
TEST PROCEDURE:	Regulation 15.247(d) for direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. The EUT was set transmitting continuously and force selection of output power level and channel number. We'd observed that the peak levels aren't greater than +8dBm limit. The EUT was set up as ANSI C63.4, 2009, tested to DTS test procedure of 558074 D01 for compliance to FCC 47CFR 15.247 requirements.														
DESCRIPTIONS OF TEST MODE:	Pre-Scan has been conducted to determine the worst-case mode from all possible Combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channels were selected for the final test as listed below: 802.11b mode with data rate of 1mbps, 802.11g mode with data rate of 6mbps, 802.11n ht20 mode with data rate of 6.5mbps and 802.11n ht40 mode with data rate of 13.5mbps.														
EQUIPMENT SETUP	<p>Spectrum analyzer shall be set as below:</p> <table border="1"> <tr> <td>Equipment Mode</td> <td>Spectrum Analyzer</td> </tr> <tr> <td>Detector Function</td> <td>Peak</td> </tr> <tr> <td>RBW</td> <td>3KHz</td> </tr> <tr> <td>VBW</td> <td>10KHz</td> </tr> <tr> <td>Span</td> <td>300KHz</td> </tr> <tr> <td>Sweep Time</td> <td>100S</td> </tr> </table>			Equipment Mode	Spectrum Analyzer	Detector Function	Peak	RBW	3KHz	VBW	10KHz	Span	300KHz	Sweep Time	100S
Equipment Mode	Spectrum Analyzer														
Detector Function	Peak														
RBW	3KHz														
VBW	10KHz														
Span	300KHz														
Sweep Time	100S														
TEST VOLTAGE:	120VAC/60Hz														
RESULTS:	The EUT meet the requirements of test reference for power spectral density. The test results relate only to the equipment under test provided by client.														
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.														
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB.														

Peak Power Spectral Density Test Data:

For 802.11b Mode:

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-8.30	-15.2	2.0	-21.5	8.00	-29.5
2437	-7.20	-15.2	2.0	-20.4	8.00	-28.4
2462	-8.43	-15.2	2.0	-21.63	8.00	-29.63

For 802.11g Mode:

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-8.73	-15.2	2.0	-21.93	8.00	-29.93
2437	-8.51	-15.2	2.0	-21.71	8.00	-29.71
2462	-8.77	-15.2	2.0	-21.97	8.00	-29.97

For 802.11n HT20 Mode:

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-7.34	-15.2	2.0	-20.54	8.00	-28.54
2437	-8.04	-15.2	2.0	-21.24	8.00	-29.24
2462	-9.12	-15.2	2.0	-22.32	8.00	-30.32


For 802.11n HT40 Mode:

Channel Frequency (MHz)	Power Spectral Density (dBm)	BWCF (db)	Cable Loss (dB)	Power Spectral Density Level (dBm)	Maximum Limit (dBm)	Margin (dB)
2412	-8.39	-15.2	2.0	-21.59	8.00	-29.59
2437	-10.69	-15.2	2.0	-23.89	8.00	-31.89
2452	-10.87	-15.2	2.0	-24.07	8.00	-32.07


Note: $BWCF = 10\log (3 \text{ kHz}/100\text{kHz}) = 15.2 \text{ dB}$.

For 802.11b Mode:


Low Channel: 2412MHz

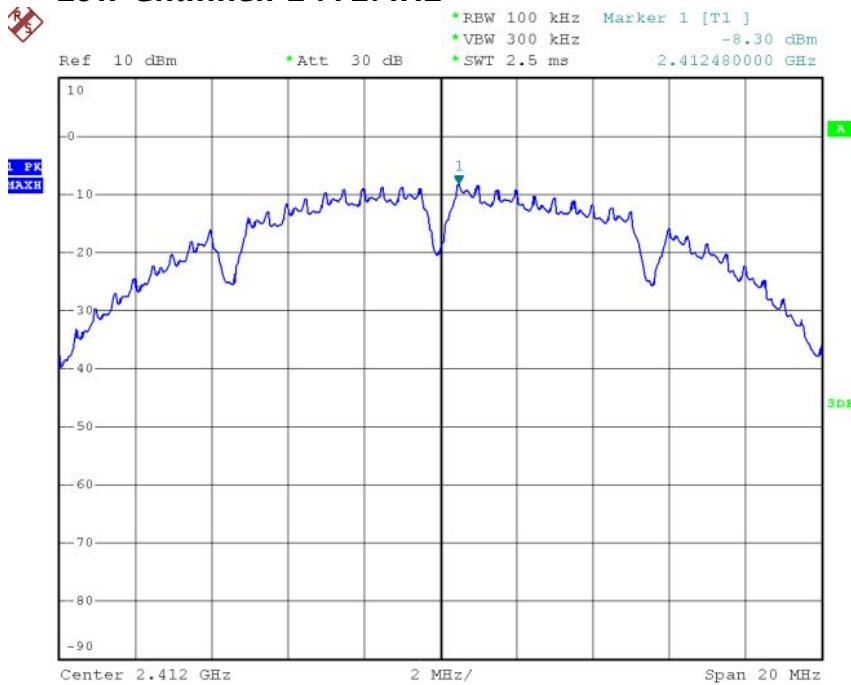

Mid Channel: 2437MHz

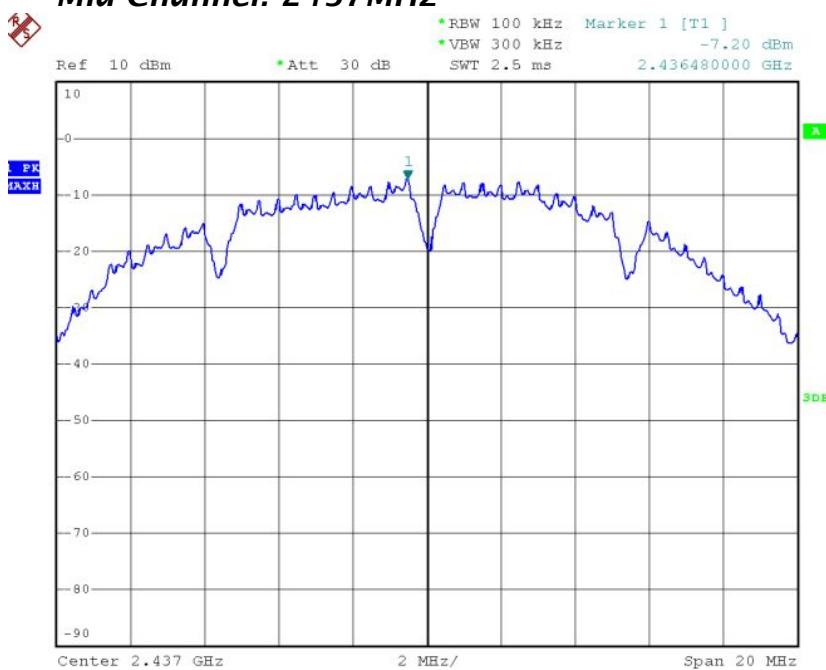


High Channel: 2462MHz

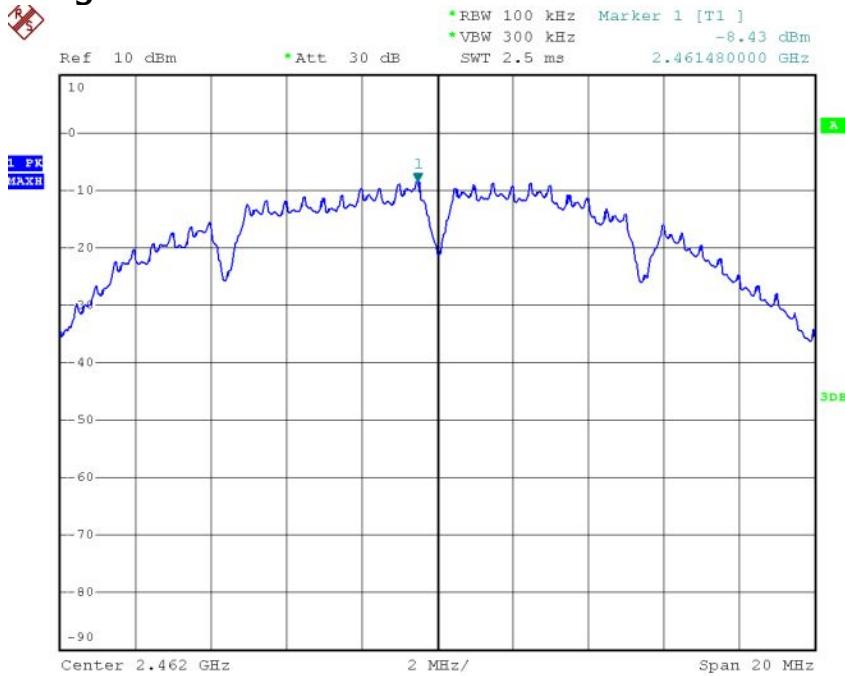


For 802.11g Mode:


Low Channel: 2412MHz

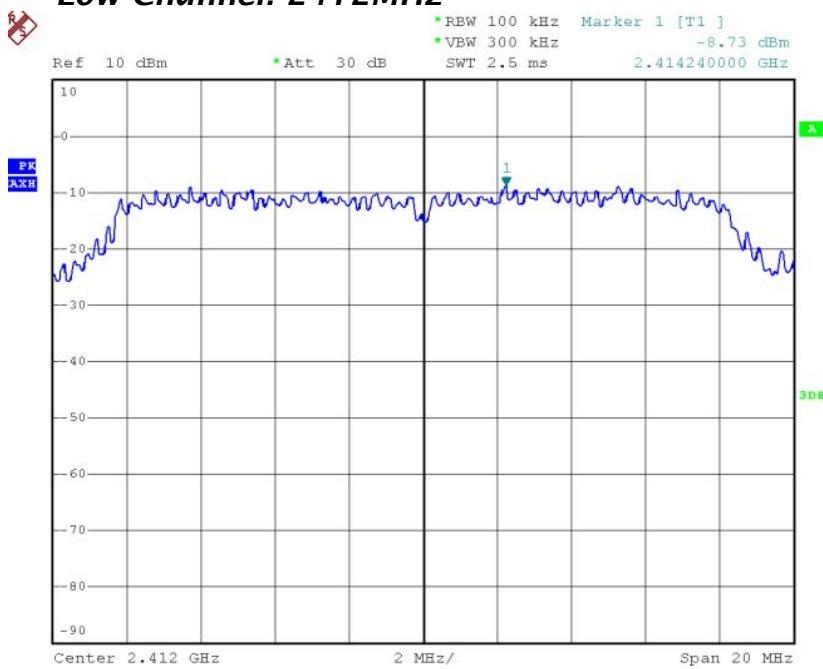

Mid Channel: 2437MHz

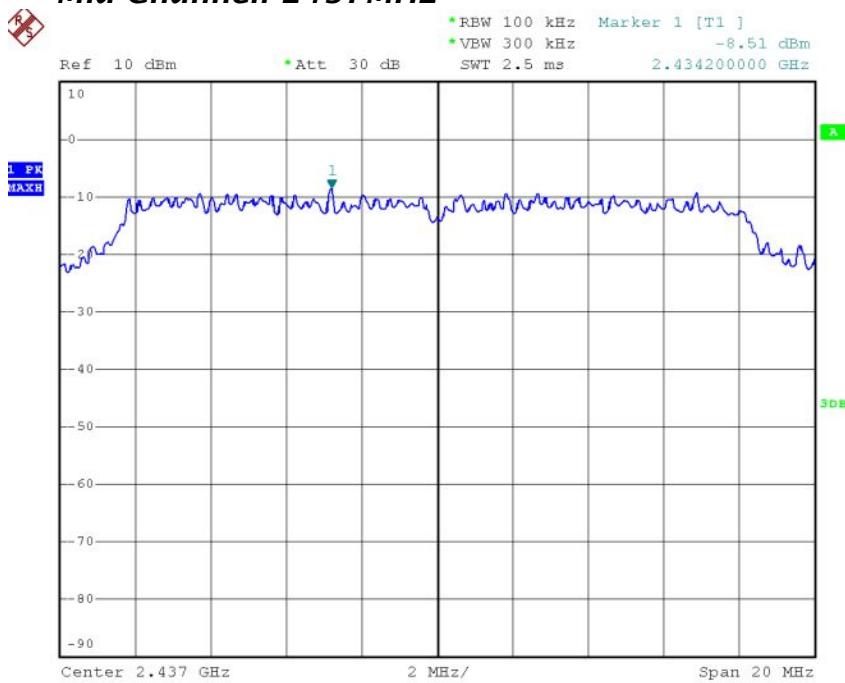


High Channel: 2462MHz

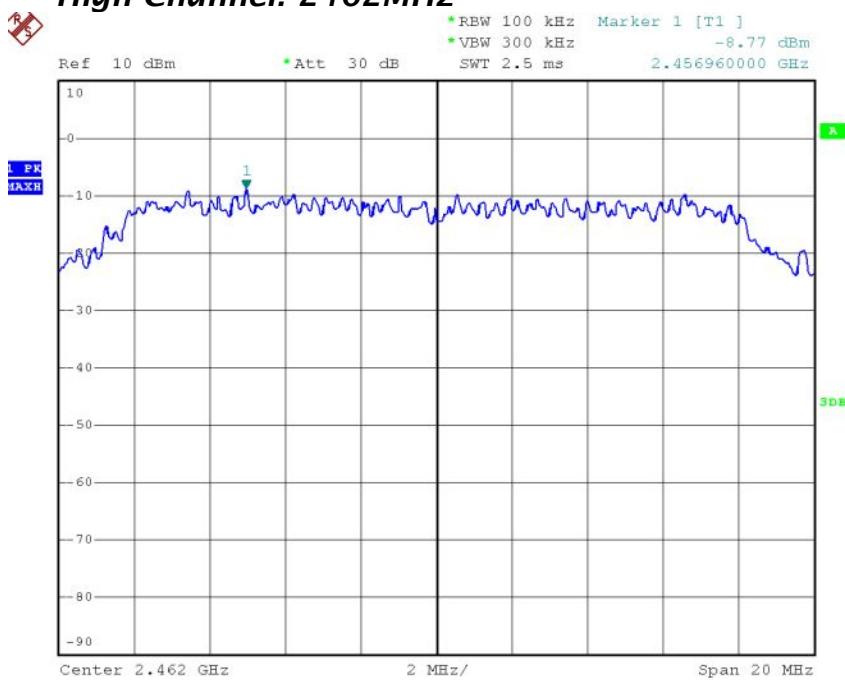


For 802.11n HT20 Mode:


Low Channel: 2412MHz

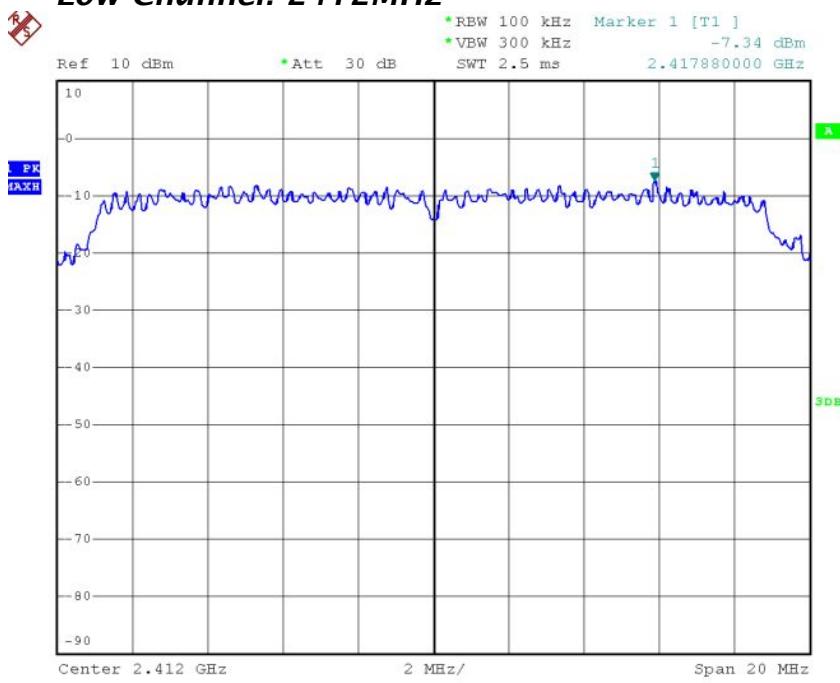

Mid Channel: 2437MHz

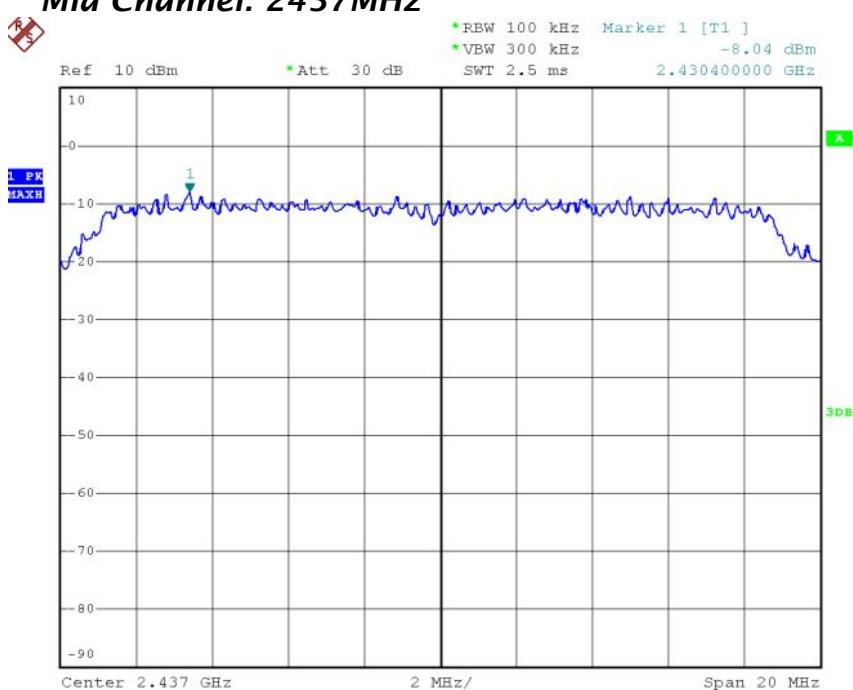


High Channel: 2462MHz

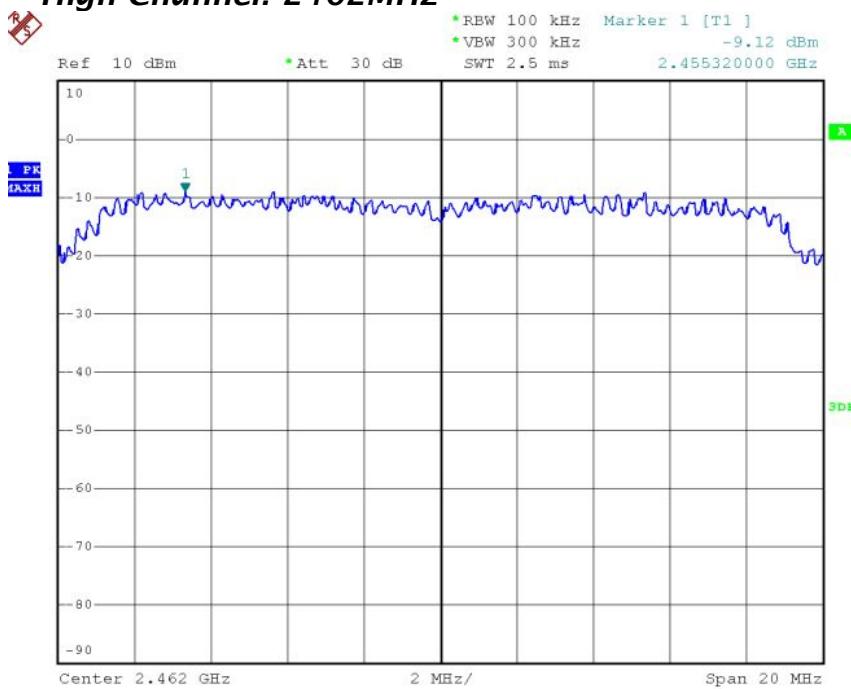


For 802.11n HT40 Mode:

Low Channel: 2422MHz

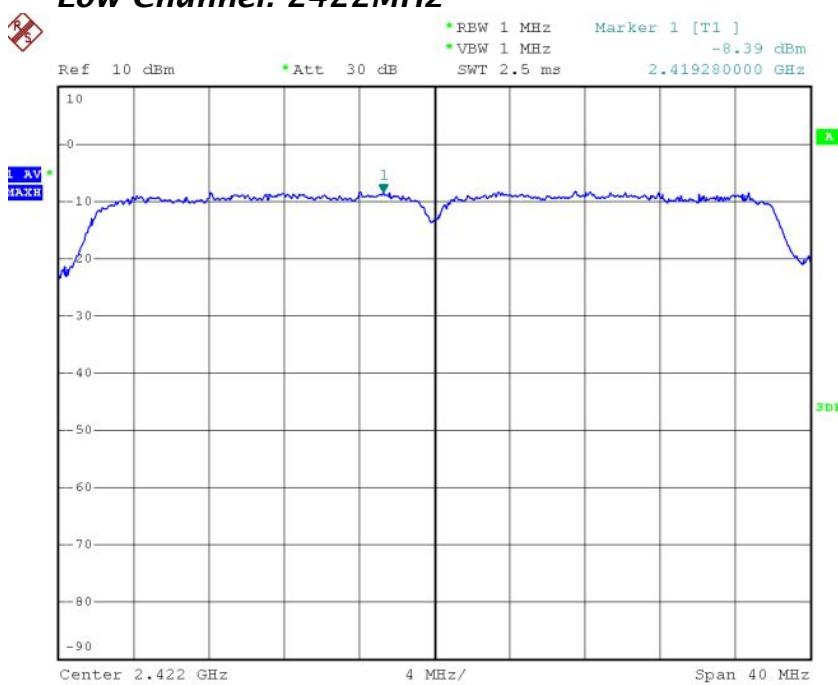

Mid Channel: 2437MHz

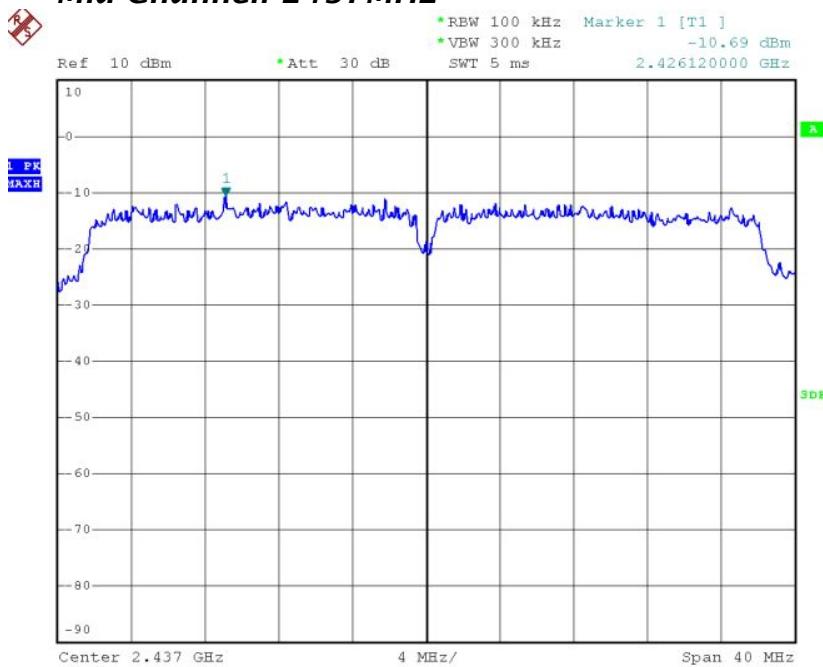

High Channel: 2452MHz

