

BT

DUT: WEIXING

Communication System: BT ; Frequency: 2441 MHz;Duty Cycle: 1:2.14042
Medium: H2450 Medium parameters used: $f = 2441\text{ MHz}$; $\sigma = 1.77\text{ S/m}$; $\epsilon_r = 39.96$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.2\text{ }^\circ\text{C}$; Liquid Temperature : $21.0\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom DH5/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.00911 W/kg


Bottom DH5/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.684 V/m ; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0340 W/kg

SAR(1 g) = 0.014 W/kg ; SAR(10 g) = 0.00608 W/kg

Maximum value of SAR (measured) = 0.0209 W/kg

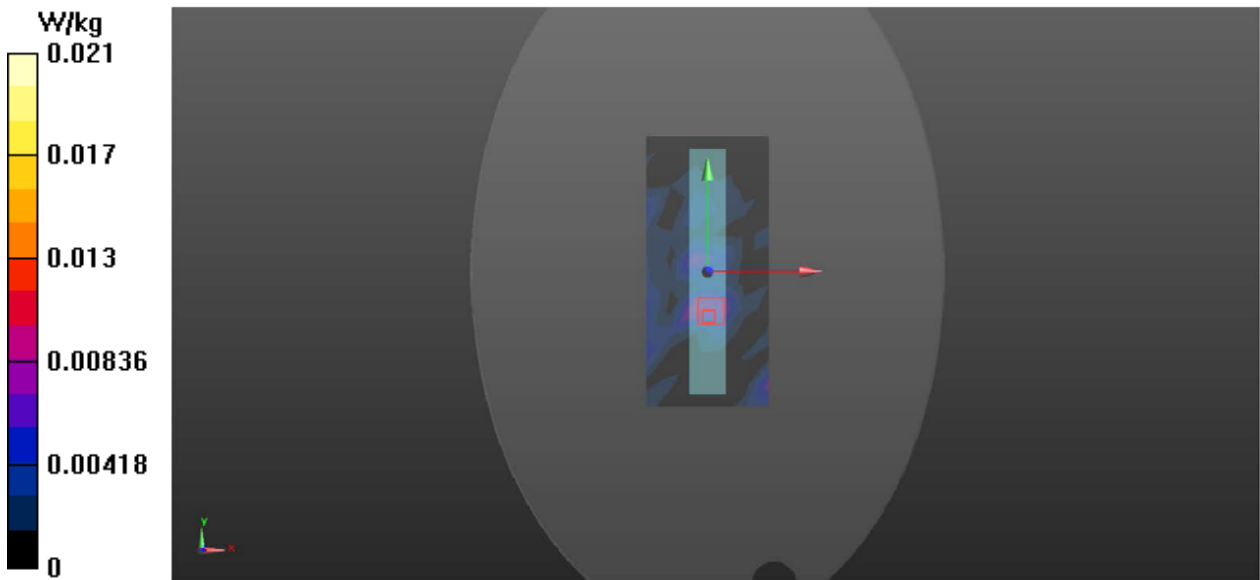

2.4GWIFI

DUT: WEIXING


Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2437\text{ MHz}$; $\sigma = 1.75\text{ S/m}$; $\epsilon_r = 40.40$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $21.2\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.0\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANTA/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.217 W/kg

Bottom-ANTA/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.587 V/m ; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.430 W/kg
SAR(1 g) = 0.200 W/kg ; SAR(10 g) = 0.091 W/kg
Maximum value of SAR (measured) = 0.220 W/kg

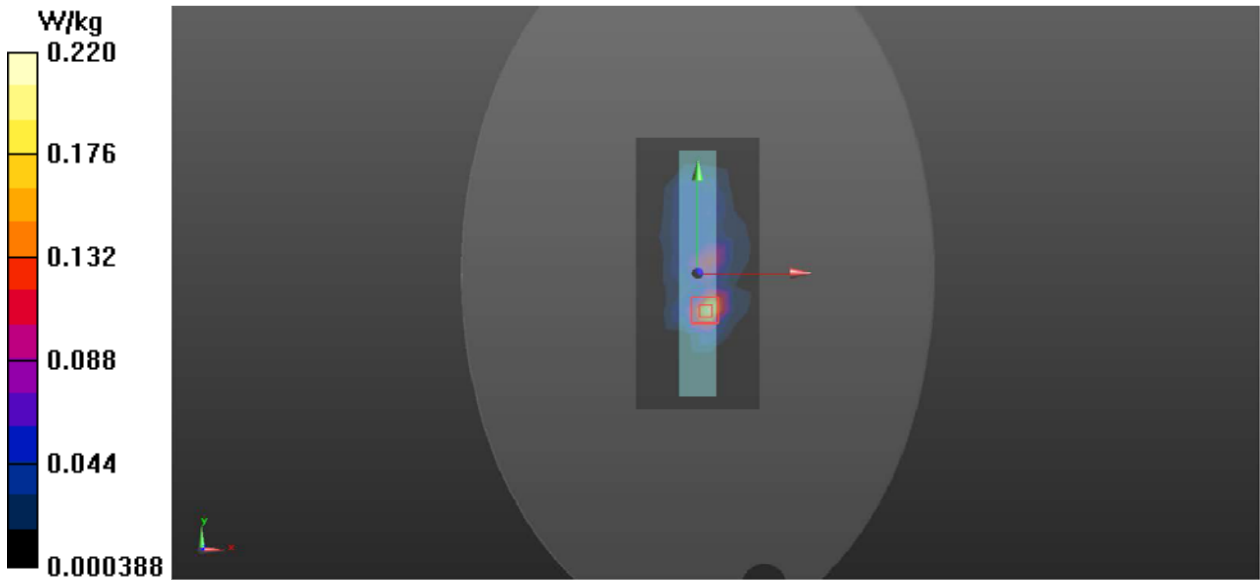

5.2GWIFI

DUT: WEIXING


Communication System: 802.11a ; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.62\text{ S/m}$; $\epsilon_r = 36.80$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.8\text{ }^{\circ}\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.8, 5.8, 5.8); Calibrated: 2023/5/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANTA/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.328 W/kg

Bottom-ANTA/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 4.094 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.389 W/kg ; SAR(10 g) = 0.132 W/kg
Maximum value of SAR (measured) = 0.447 W/kg

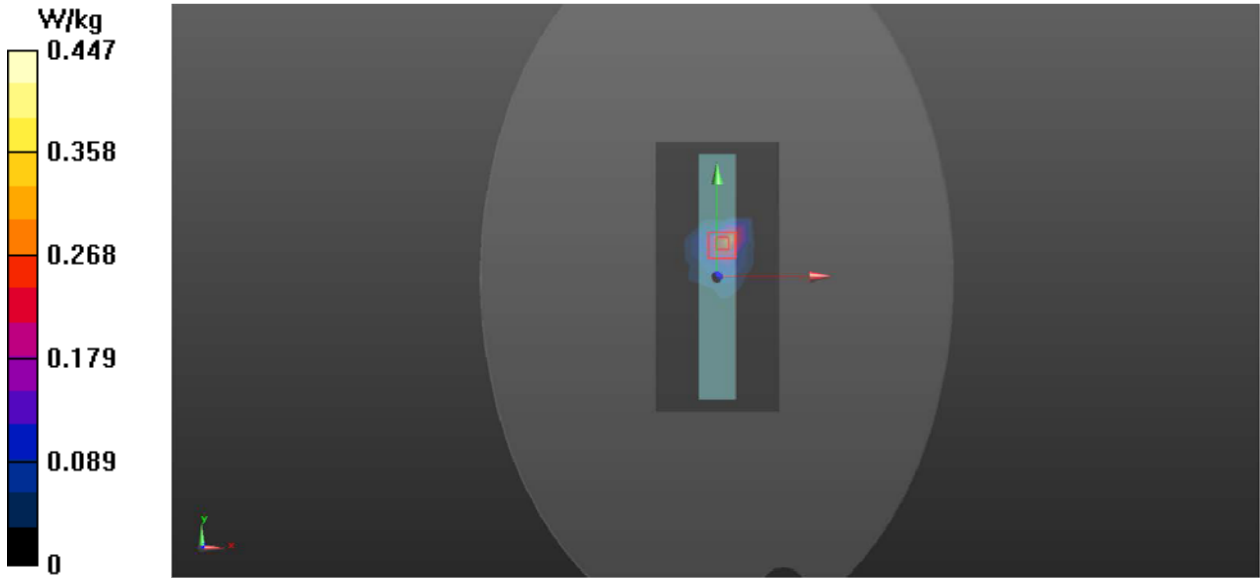

5.3GWIFI

DUT: WEIXING


Communication System: 802.11a ; Frequency: 5300 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5300\text{ MHz}$; $\sigma = 4.79\text{ S/m}$; $\epsilon_r = 36.85$; $\rho = 1000\text{ kg/m}^3$ Ambient
Temperature : $22.0\text{ }^\circ\text{C}$; Liquid Temperature : $21.8\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.8, 5.8, 5.8); Calibrated: 2023/5/17;
 - Sensor-Surface: 42mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANTA/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.338 W/kg

Bottom-ANTA/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 4.504 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.402 W/kg ; SAR(10 g) = 0.136 W/kg
Maximum value of SAR (measured) = 0.447 W/kg

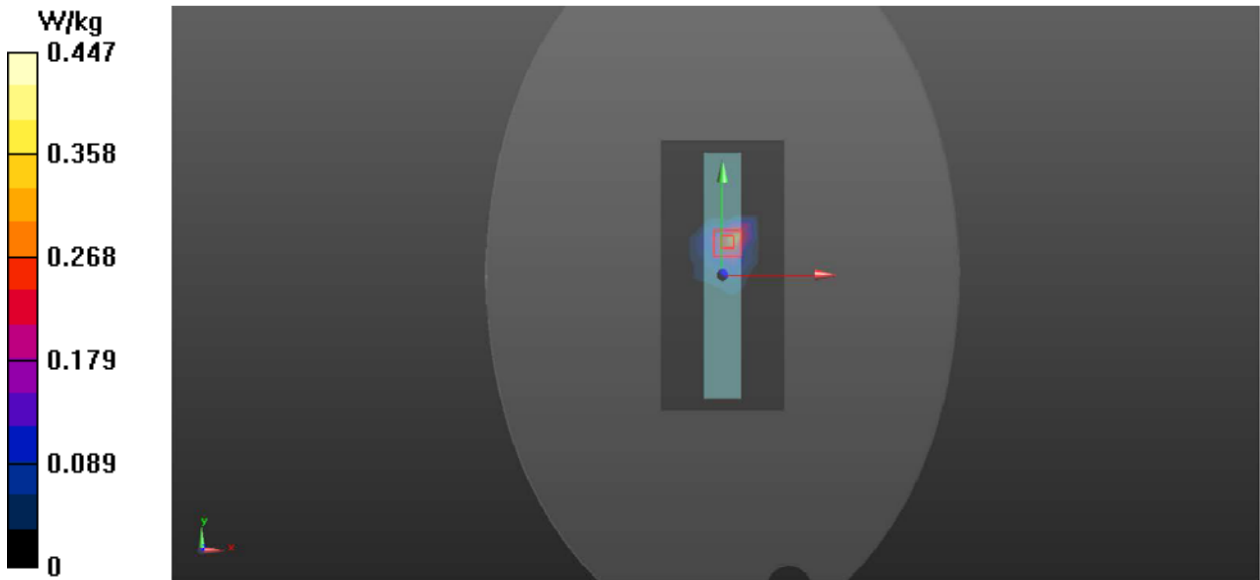

5.6GWIFI

DUT: WEIXING


Communication System: 802.11a ; Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5580 \text{ MHz}$; $\sigma = 5.18 \text{ S/m}$; $\epsilon_r = 36.12$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2023/5/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANTA/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.276 W/kg

Bottom-ANTA/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 4.421 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.11 W/kg
SAR(1 g) = 0.319 W/kg ; SAR(10 g) = 0.107 W/kg
Maximum value of SAR (measured) = 0.353 W/kg

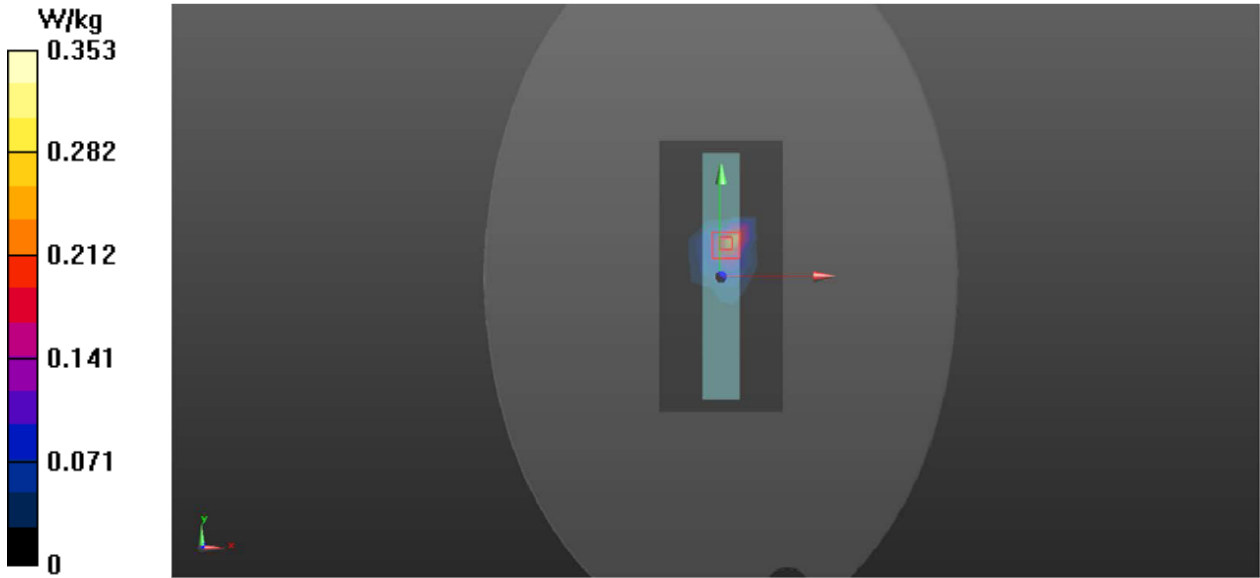

5.8GWIFI

DUT: WEIXING


Communication System: 802.11a ; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.31 \text{ S/m}$; $\epsilon_r = 35.76$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(5.29, 5.29, 5.29); Calibrated: 2023/5/17;
 - Sensor-Surface: 2mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANTA/Area Scan (6x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.249 W/kg

Bottom-ANTA/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 4.463 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.300 W/kg ; SAR(10 g) = 0.100 W/kg
Maximum value of SAR (measured) = 0.334 W/kg

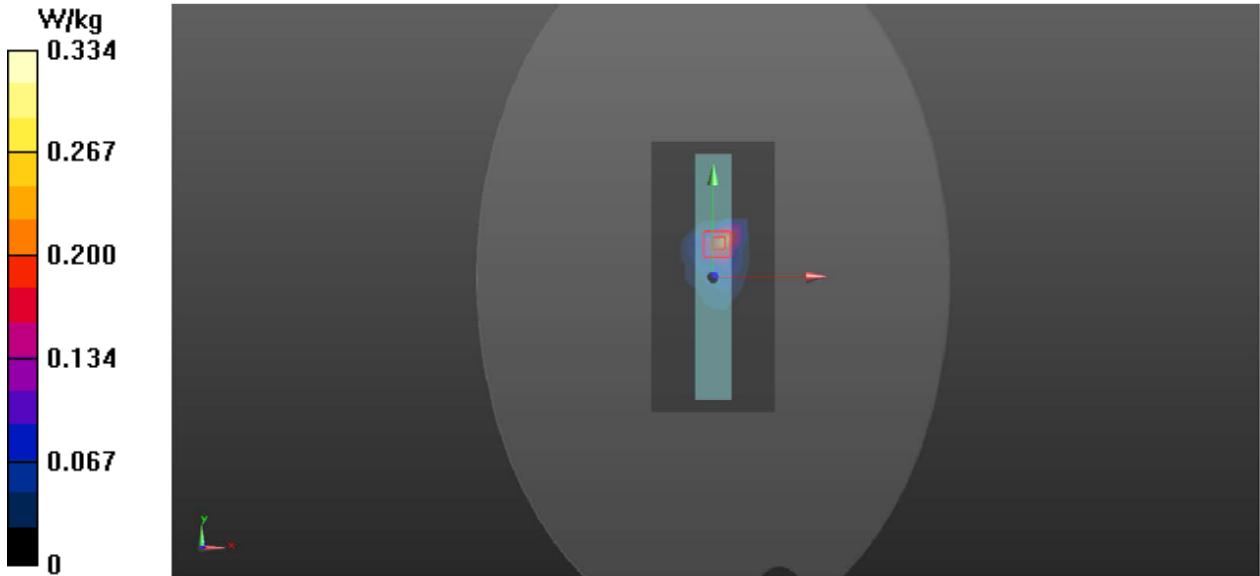

BAND2

DUT: WEIXING

Communication System: LTE; Frequency: 1900 MHz;Duty Cycle: 1:1
Medium: HSL1900 Medium parameters used: $f = 1900\text{ MHz}$; $\sigma = 1.45\text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.2\text{ }^{\circ}\text{C}$; Liquid Temperature : $22.0\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.55, 8.55, 8.55); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right High/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.975 W/kg


Right High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.245 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.68 W/kg

SAR(1 g) = 1.120 W/kg ; SAR(10 g) = 0.504 W/kg

Maximum value of SAR (measured) = 0.976 W/kg

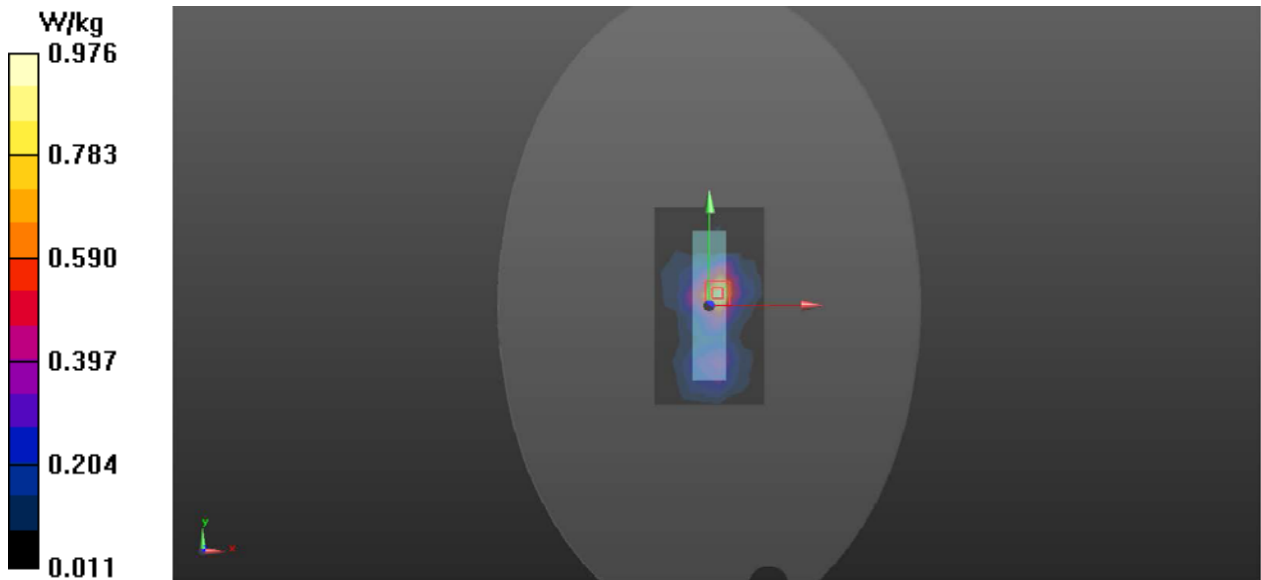

BAND4


DUT: WEIXING

Communication System: LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
Medium: HSL1750 Medium parameters used : $f = 1732.5\text{ MHz}$; $\sigma = 1.33\text{ S/m}$; $\epsilon_r = 40.08$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.5\text{ }^\circ\text{C}$; Liquid Temperature : $22.3\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.85, 8.85, 8.85); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.601 W/kg

Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.885 V/m ; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 1.10 W/kg ; SAR(10 g) = 0.366 W/kg
Maximum value of SAR (measured) = 0.681 W/kg

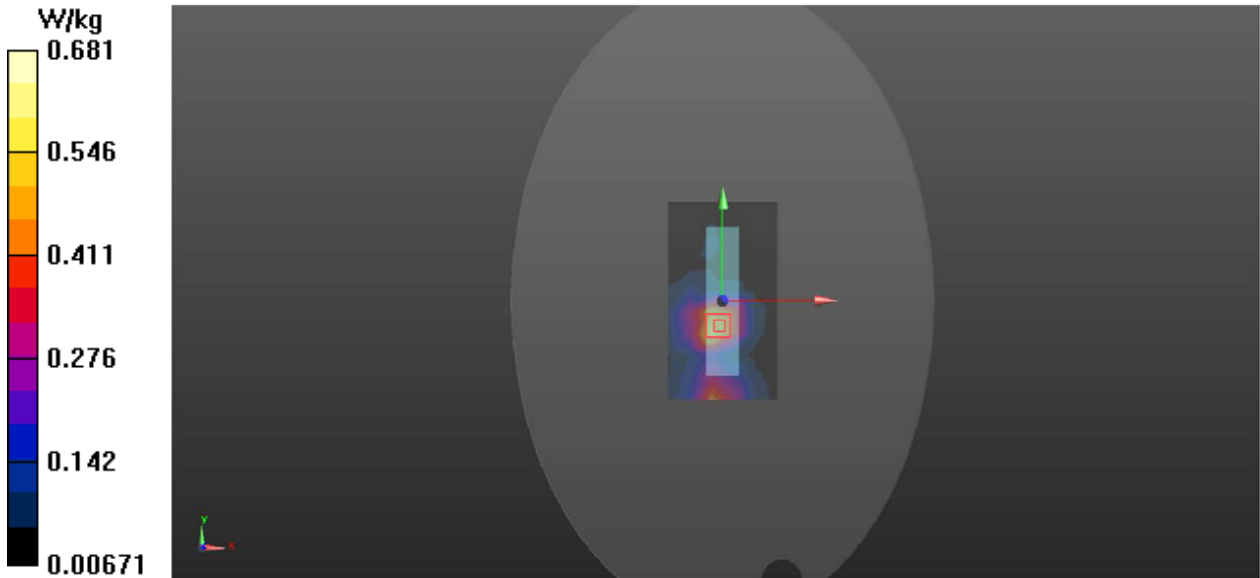

BAND5

DUT: WEIXING

Communication System: LTE; Frequency: 844 MHz;Duty Cycle: 1:1
Medium: H835 Medium parameters used: $f = 844\text{ MHz}$; $\sigma = 0.90\text{ S/m}$; $\epsilon_r = 42.69$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.7\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(10.25, 10.25, 10.25); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right High/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.771 W/kg


Right High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.939 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.887 W/kg ; SAR(10 g) = 0.566 W/kg

Maximum value of SAR (measured) = 0.958 W/kg

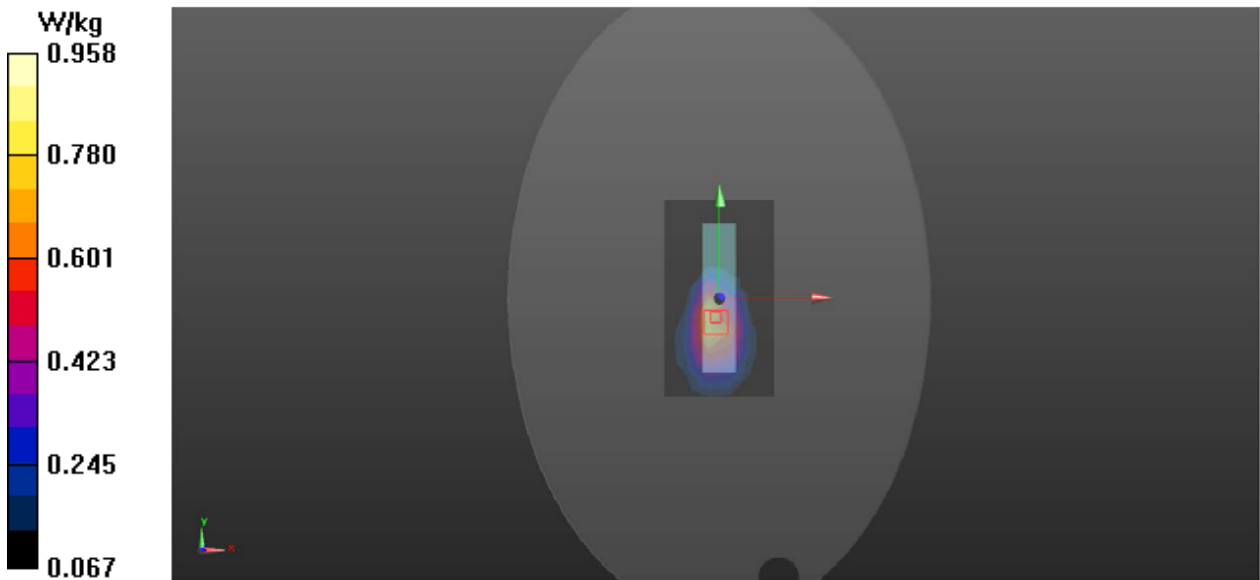

BAND7

DUT: WEIXING

Communication System: LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2535\text{ MHz}$; $\sigma = 1.91\text{ S/m}$; $\epsilon_r = 38.54$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.3\text{ }^{\circ}\text{C}$; Liquid Temperature : $22.1\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.311 W/kg


Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.716 V/m ; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.369 W/kg ; SAR(10 g) = 0.167 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

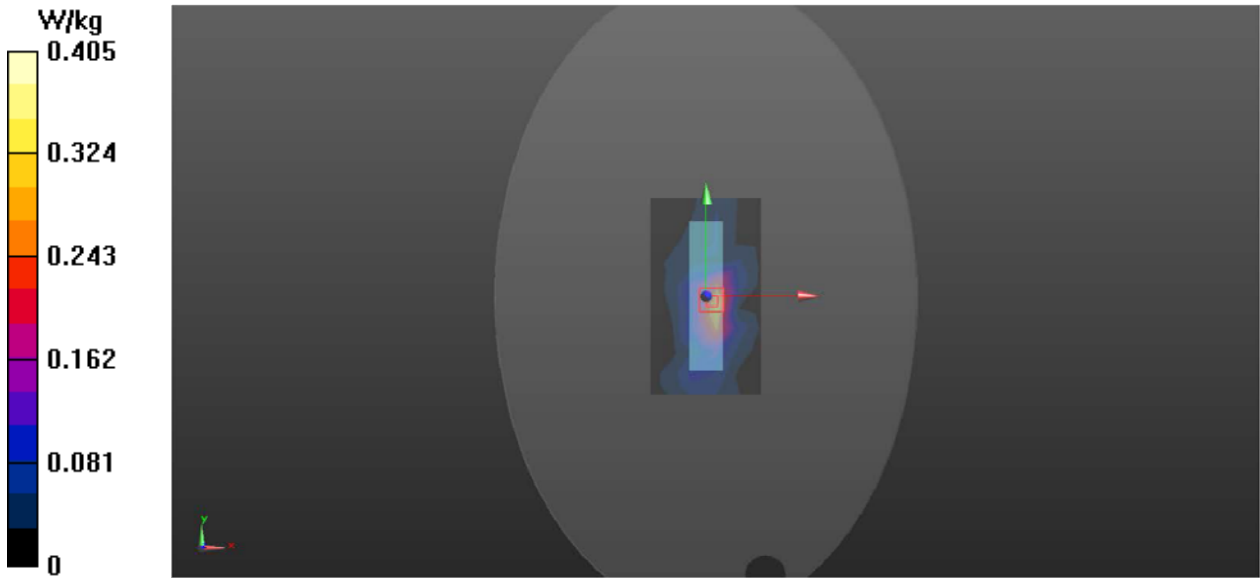

BAND12


DUT: WEIXING

Communication System: LTE; Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium: HSL750 Medium parameters used : $f = 707.5 \text{ MHz}$; $\sigma = 0.84 \text{ S/m}$; $\epsilon_r = 42.41$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.1 \text{ }^\circ\text{C}$; Liquid Temperature : $21.9 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(10.6, 10.6, 10.6); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.426 W/kg

Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 22.850 V/m ; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.727 W/kg
SAR(1 g) = 0.472 W/kg ; SAR(10 g) = 0.304 W/kg
Maximum value of SAR (measured) = 0.508 W/kg

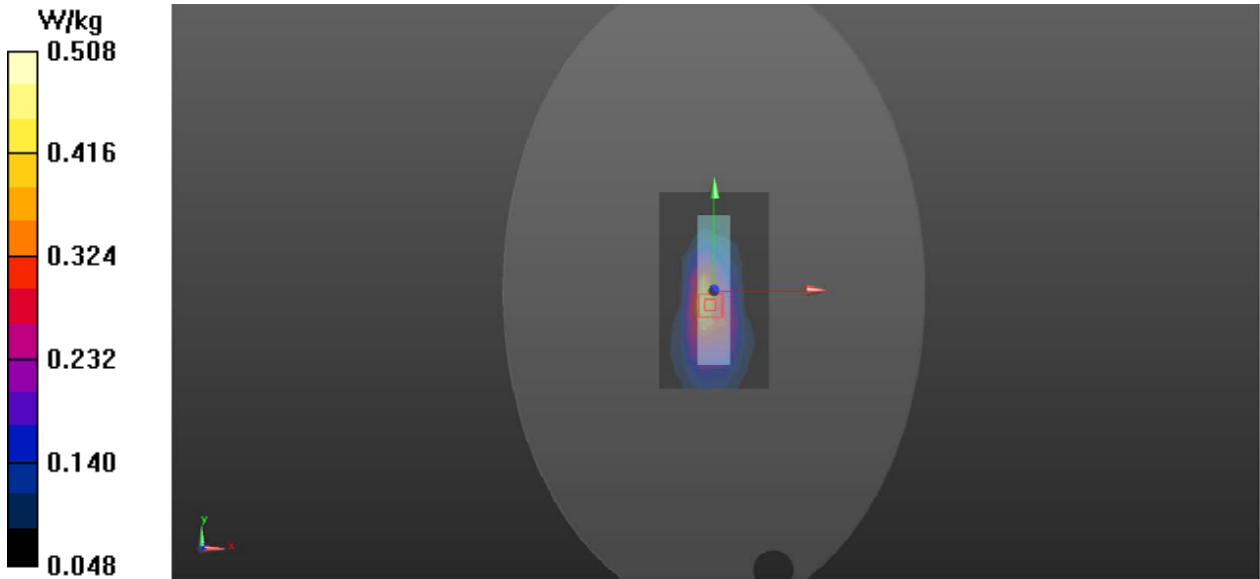

BAND13


DUT: WEIXING

Communication System: LTE; Frequency: 782 MHz;Duty Cycle: 1:1
Medium: HSL750 Medium parameters used : $f = 782\text{ MHz}$; $\sigma = 0.94\text{ S/m}$; $\epsilon_r = 41.43$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.1\text{ }^\circ\text{C}$; Liquid Temperature : $21.9\text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(10.6, 10.6, 10.6); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.665 W/kg

Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 26.856 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.771 W/kg ; SAR(10 g) = 0.499 W/kg
Maximum value of SAR (measured) = 0.817 W/kg

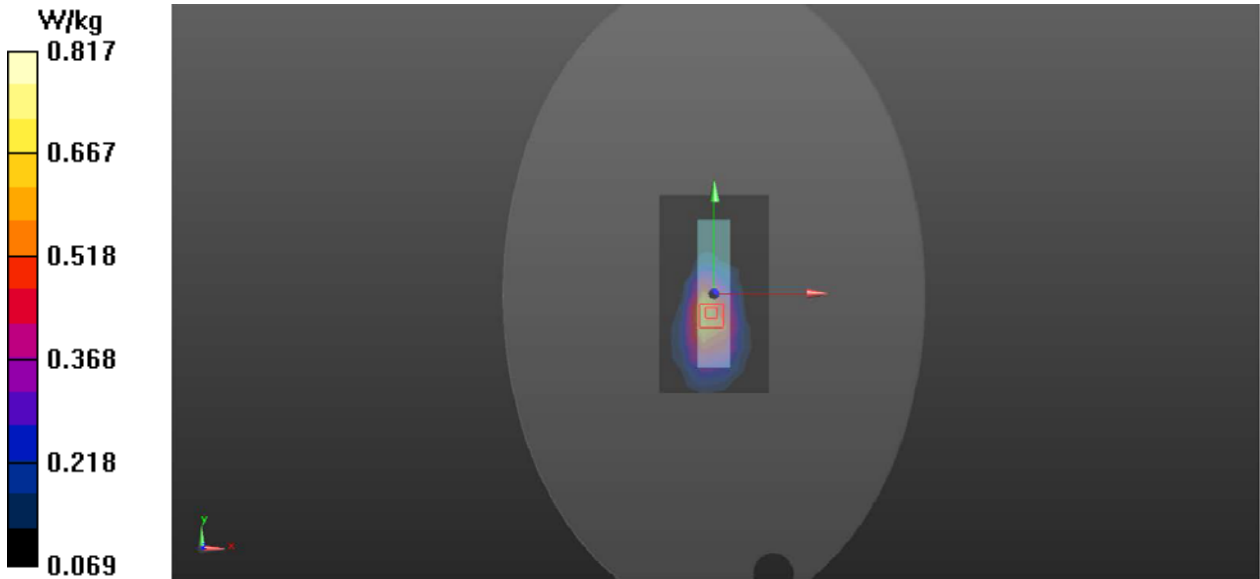

BAND26


DUT: WEIXING

Communication System: LTE; Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium: H835 Medium parameters used : $f = 836.5\text{ MHz}$; $\sigma = 0.92\text{ S/m}$; $\epsilon_r = 42.83$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.0\text{ }^{\circ}\text{C}$; Liquid Temperature : $21.7\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(10.25, 10.25, 10.25); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.755 W/kg

Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 27.730 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 1.05 W/kg ; SAR(10 g) = 0.627 W/kg
Maximum value of SAR (measured) = 0.949 W/kg

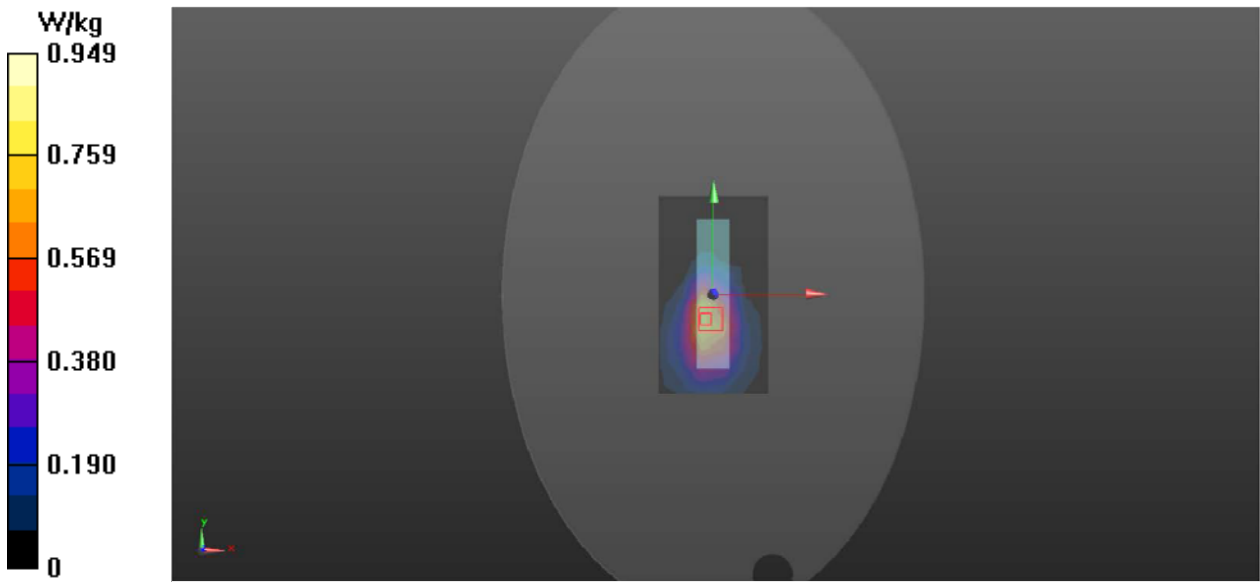

BAND41

DUT: WEIXING

Communication System: LTE; Frequency: 2593 MHz;Duty Cycle: 1:1
Medium: HSL2600 Medium parameters used: $f = 2593\text{ MHz}$; $\sigma = 2.01\text{ S/m}$; $\epsilon_r = 38.11$; $\rho = 1000\text{ kg/m}^3$
Ambient Temperature : $22.3\text{ }^{\circ}\text{C}$; Liquid Temperature : $22.1\text{ }^{\circ}\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.207 W/kg


Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.058 V/m ; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.782 W/kg

SAR(1 g) = 0.330 W/kg ; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.336 W/kg

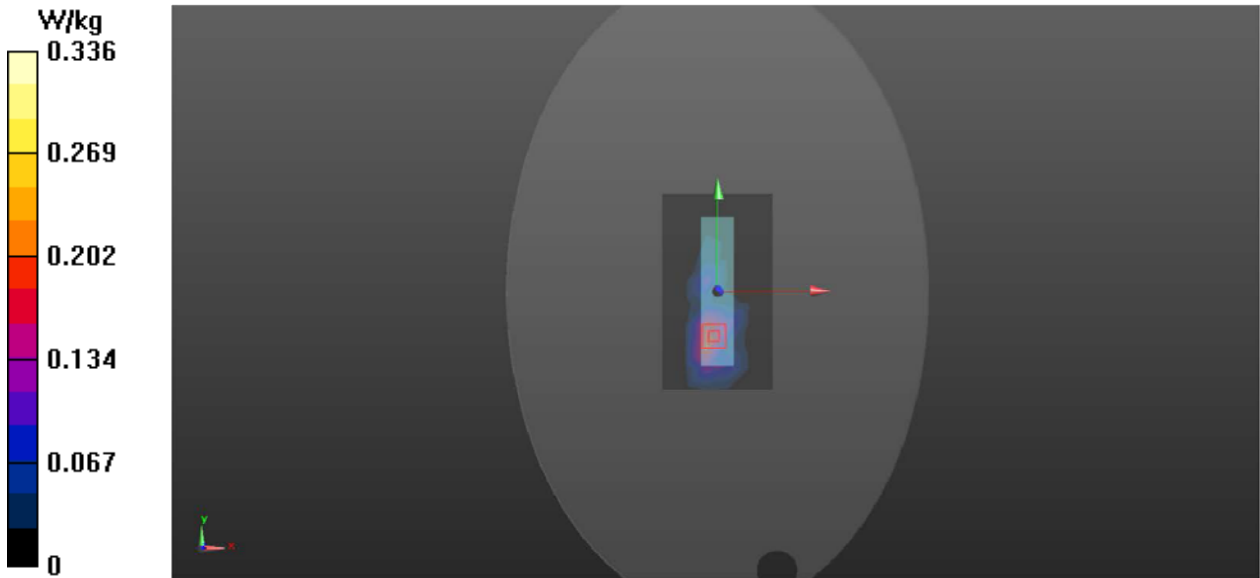

BAND66

DUT: WEIXING

Communication System: LTE; Frequency: 1745 MHz;Duty Cycle: 1:1
Medium: HSL1750 Medium parameters used : $f = 1745 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 40.02$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.5 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

- DASY5 Configuration:
- Probe: EX3DV4 - SN3970; ConvF(8.85, 8.85, 8.85); Calibrated: 2023/5/17;
 - Sensor-Surface: 3mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn1418; Calibrated: 2023/4/25
 - Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Right/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.612 W/kg

Right/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.874 V/m ; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 1.05W/kg ; SAR(10 g) = 0.372 W/kg
Maximum value of SAR (measured) = 0.689 W/kg

