



# FCC PART 15 CLASS B

## MEASUREMENT AND TEST REPORT

For

**Xiamen Pinnacle Electrical Co., Ltd.**

4F Guang Xia Building, Torch High-Tech Zone, Xiamen, China

**FCC ID: O89BD1X**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Wall Type display
<b>Test Engineer:</b> <u>Leon Chen</u> <i>Leon Chen</i>	
<b>Report Number:</b> <u>R1XM120716051-00</u>	
<b>Report Date:</b> <u>2012-08-02</u>	
<b>Reviewed By:</b> <u>Ivan Cao</u> <i>Ivan Cao</i> <u>EMC Engineer</u>	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST FACILITY.....	3
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....</b>	<b>8</b>
MEASUREMENT UNCERTAINTY .....	8
EUT SETUP .....	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE .....	9
TEST RESULTS SUMMARY .....	9
TEST DATA .....	9
<b>FCC §15.109 - RADIATED EMISSIONS .....</b>	<b>12</b>
MEASUREMENT UNCERTAINTY .....	12
EUT SETUP .....	12
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE .....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST RESULTS SUMMARY .....	13
TEST DATA .....	14

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The Xiamen Pinnacle Electrical Co., Ltd.'s product, model number: BD1X (FCC ID: O89BD1X) or ("EUT") in this report is a Wall Type display, which was measured approximately: 42.0 cm (L) x6.5 cm (W) x16.5 cm (H), rated input voltage: DC 13.8V from adapter, the highest operating frequency is 36.864 MHz

Adapter information:

Model: P36-138250

Input: 100-240V, 50/60Hz, 1.5A

Output: 13.8V, 2.5A

\* All measurement and test data in this report was gathered from production sample serial number: 120716051 (Assigned by BACL, Dongguan). The EUT was received on 2012-07-25.

### Objective

This report is prepared on behalf of *Xiamen Pinnacle Electrical Co., Ltd.* in accordance with Part 2-Subpart J, Part 15- Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 Class B.

### Related Submittal(s)/Grant(s)

No related submittal(s).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## **SYSTEM TEST CONFIGURATION**

### **Description of Test Configuration**

The system was configured for testing in a typical mode which is provided by manufacturer.

### **EUT Exercise Software**

No EUT exercise software.


### **Equipment Modifications**

No modification was made to the EUT tested.

### **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
HP	Signal Generator	8648A	3426A00831

### Block Diagram of Test Setup

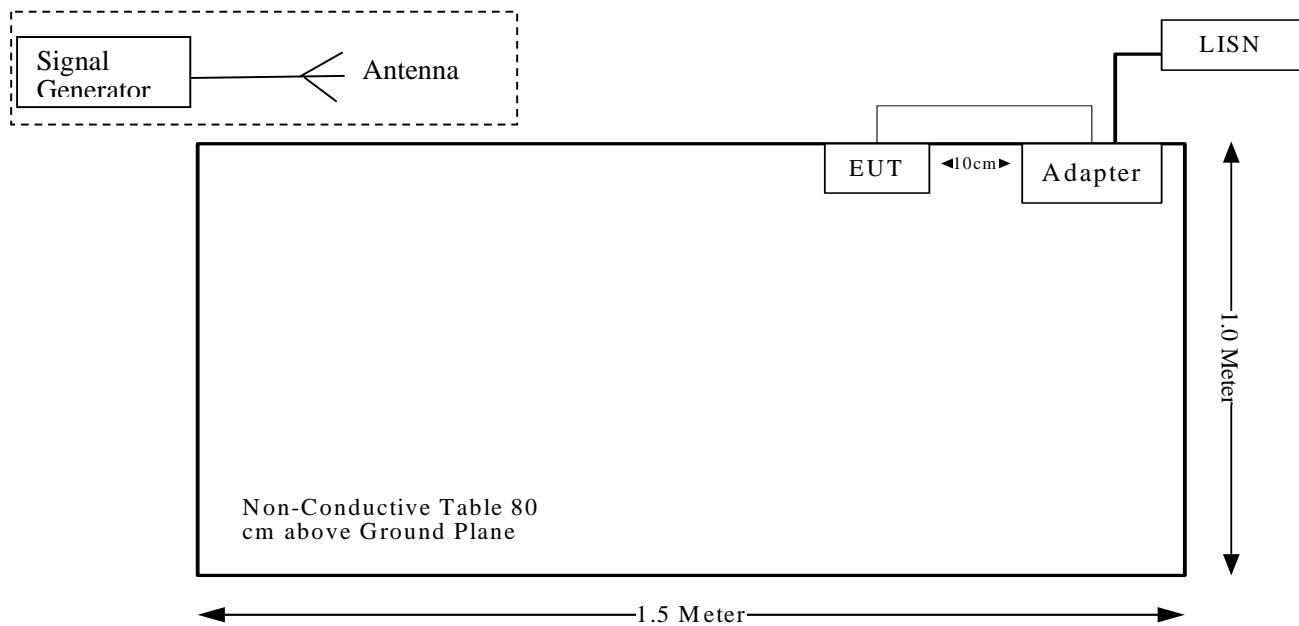

## **SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance


## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is 2.4 dB.(k=2, 95% level of confidence)

### EUT Setup

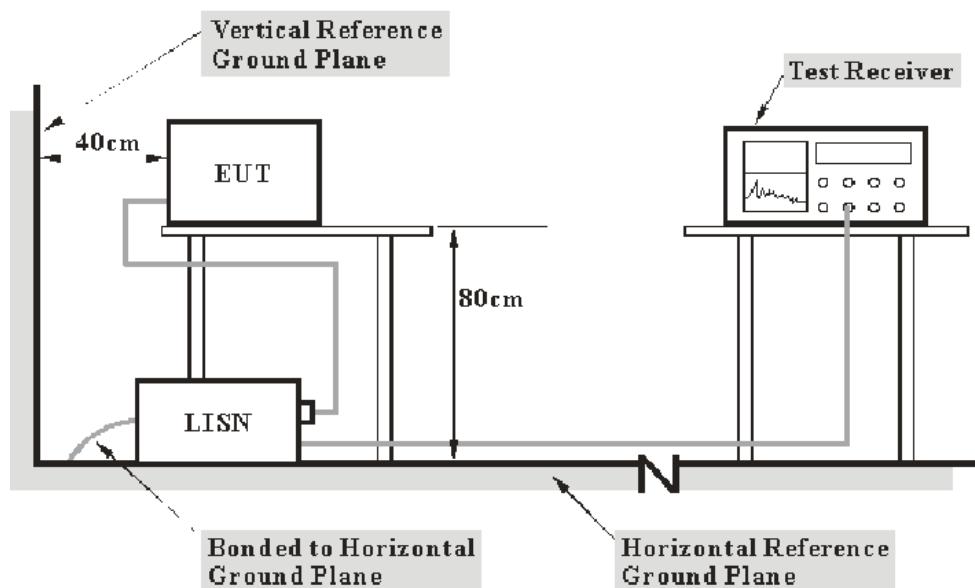

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<b>Frequency Range</b>	<b>IF BW</b>
150 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	830245/006	2011-10-08	2012-10-07
Rohde & Schwarz	LISN	ESH3-Z5	843331/015	2011-10-08	2012-10-07

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp.(Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

**16.96 dB at 0.515 MHz in the L line**

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 ° C
<b>Relative Humidity:</b>	48 %
<b>ATM Pressure:</b>	100.0 kPa


*The testing was performed by Leon Chen on 2012-07-31.*

*Test Mode: Operating*

## 120 V, 60 Hz, Line:



Frequency (MHz)	Corrected Result (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK /QP/Ave.)
0.515	29.04	0.42	46.00	16.96	Ave.
0.515	35.78	0.42	56.00	20.22	QP
1.360	22.93	0.46	46.00	23.07	Ave.
1.360	28.49	0.46	56.00	27.51	QP
2.130	18.14	0.48	46.00	27.86	Ave.
19.700	20.66	1.69	50.00	29.34	Ave.
0.185	35.00	0.41	65.00	30.00	QP
2.130	23.96	0.48	56.00	32.04	QP
26.010	14.19	2.34	50.00	35.81	Ave.
0.185	16.19	0.41	55.00	38.81	Ave.
19.840	20.91	1.71	60.00	39.09	QP
26.010	15.63	2.34	60.00	44.37	QP

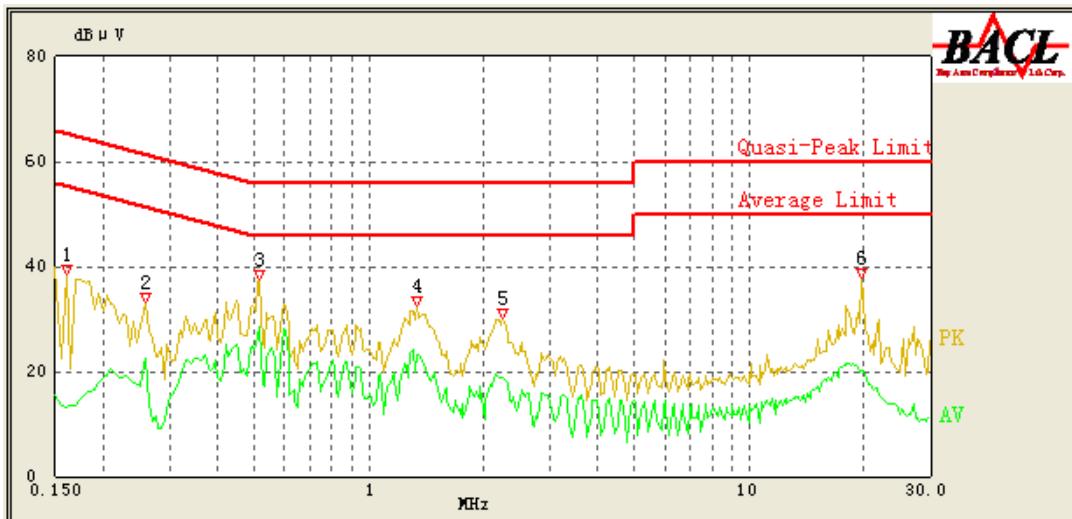**120V, 60 Hz, Neutral:**

Frequency (MHz)	Corrected Result (dB $\mu$ V)	Correction Factor (dB)	Limit (dB $\mu$ V)	Margin (dB)	Detector (PK /QP/Ave.)
0.515	28.61	0.42	46.00	17.39	Ave.
0.515	38.55	0.42	56.00	17.45	QP
1.335	23.09	0.46	46.00	22.91	Ave.
1.335	29.58	0.46	56.00	26.42	QP
2.250	18.70	0.48	46.00	27.30	Ave.
19.700	20.18	1.69	50.00	29.82	Ave.
0.260	22.45	0.42	52.86	30.41	Ave.
2.250	25.46	0.48	56.00	30.54	QP
0.260	30.37	0.42	62.86	32.49	QP
19.700	22.24	1.69	60.00	37.76	QP
0.160	24.50	0.40	65.71	41.21	QP
0.160	13.01	0.40	55.71	42.70	Ave.

## FCC §15.109 - RADIATED EMISSIONS


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is  $\pm 4.0$  dB. (k=2, 95% level of confidence)

### EUT Setup

#### Below 1GHz:

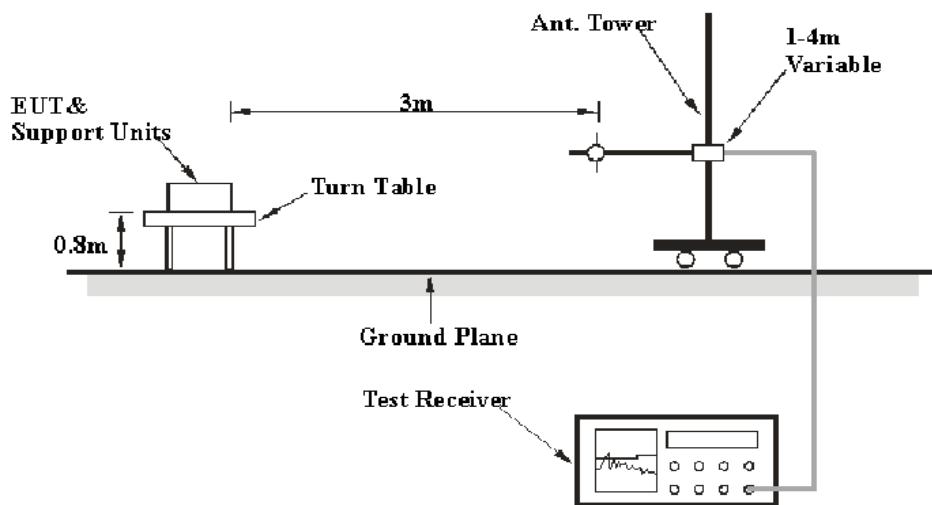

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The system was investigated from 30 MHz to above 1GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	RBW	VBW	Detection
30 MHz-1 GHz	100 kHz	300 kHz	Quasi-peak

## Test Procedure

During the radiated emissions test, the EUT was connected to AC floor outlet

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all Install combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Reciever	ESCI	100224	2011-11-11	2012-11-10
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-09-06	2012-09-05
HP	Pre-amplifier	8447E	2434A02181	2011-10-08	2012-10-07

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109 Class B, with the worst margin reading of:

**5.90 dB at 725.4900 MHz in the Vertical polarization**

## Test Data

### Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	100.0 kPa

The testing was performed by Leon Chen on 2012-07-31.

Test Mode: Operating

### Horizontal

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Correction Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
669.2300	37.88	QP	1.02	38.90	46.00	7.10
687.6600	36.37	QP	1.33	37.70	46.00	8.30
897.1800	32.80	QP	4.40	37.20	46.00	8.80
841.8900	33.42	QP	3.38	36.80	46.00	9.20
650.8000	35.52	QP	0.98	36.50	46.00	9.50
632.3700	35.36	QP	0.84	36.20	46.00	9.80

### Vertical

Frequency (MHz)	Reading (dB $\mu$ V)	Detector	Correction Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
725.4900	38.12	QP	1.98	40.10	46.00	5.90
46.4900	43.73	QP	-10.33	33.40	40.00	6.60
706.0900	36.01	QP	1.59	37.60	46.00	8.40
687.6600	36.07	QP	1.33	37.40	46.00	8.60
571.2600	37.15	QP	-0.05	37.10	46.00	8.90
141.5500	37.06	QP	-6.86	30.20	43.50	13.30

\* Within measurement uncertainty.

\*\*\*\*\* END OF REPORT \*\*\*\*\*