

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 34.4 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 39.0 V/m; Power Drift = -0.157 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m



Grid 1 17.6 M4	Grid 2 26.6 M4	Grid 3 27.2 M4
Grid 4 25.6 M4	Grid 5 34.4 M4	Grid 6 34.4 M4
Grid 7 31.4 M4	Grid 8 36.6 M4	Grid 9 36.4 M4

Cursor:

Total = 36.6 V/m

E Category: M4

Location: -6.5, 20.5, 8.7 mm

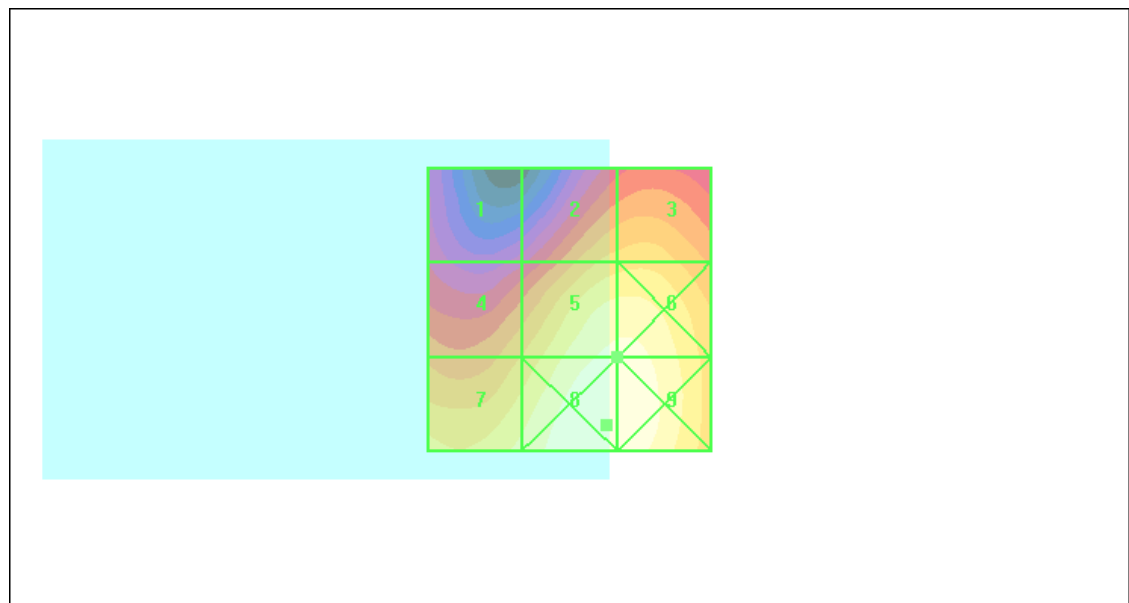

0 dB = 36.6V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 34.5 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 37.5 V/m; Power Drift = -0.150 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m



Grid 1 17.4 M4	Grid 2 25.3 M4	Grid 3 25.9 M4
Grid 4 24.8 M4	Grid 5 34.5 M4	Grid 6 34.6 M4
Grid 7 30.3 M4	Grid 8 36.7 M4	Grid 9 36.8 M4

Cursor:

Total = 36.8 V/m

E Category: M4

Location: -9, 16, 8.7 mm

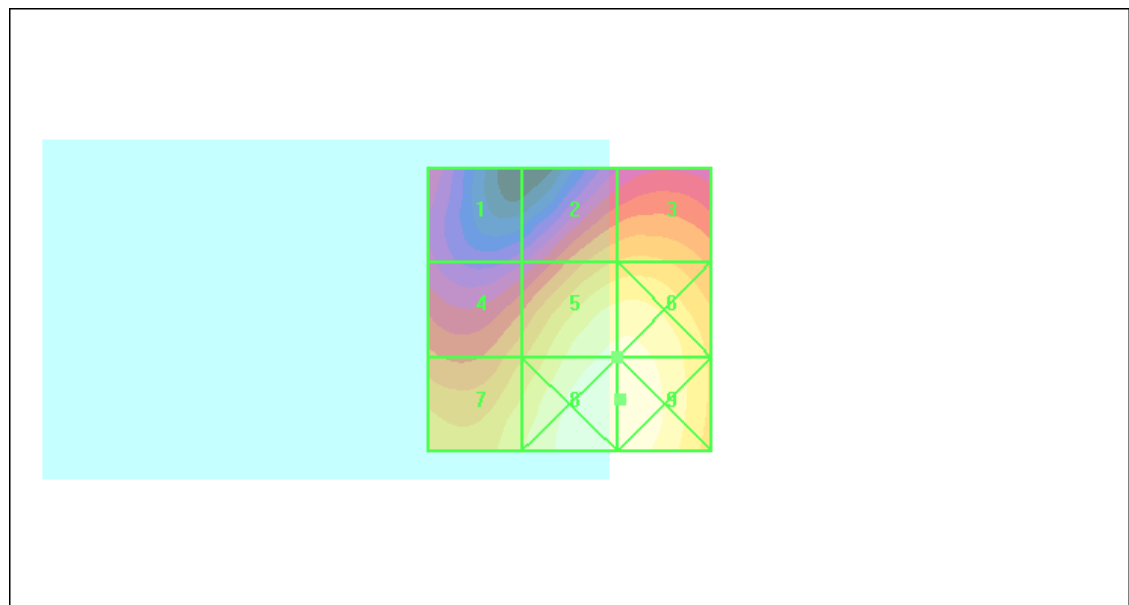

0 dB = 36.8V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 28.0 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 28.3 V/m; Power Drift = -0.077 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m



Grid 1 19.8 M4	Grid 2 19.0 M4	Grid 3 19.6 M4
Grid 4 20.4 M4	Grid 5 28.0 M4	Grid 6 28.1 M4
Grid 7 25.5 M4	Grid 8 30.5 M4	Grid 9 30.5 M4

Cursor:

Total = 30.5 V/m

E Category: M4

Location: -7, 19.5, 8.7 mm

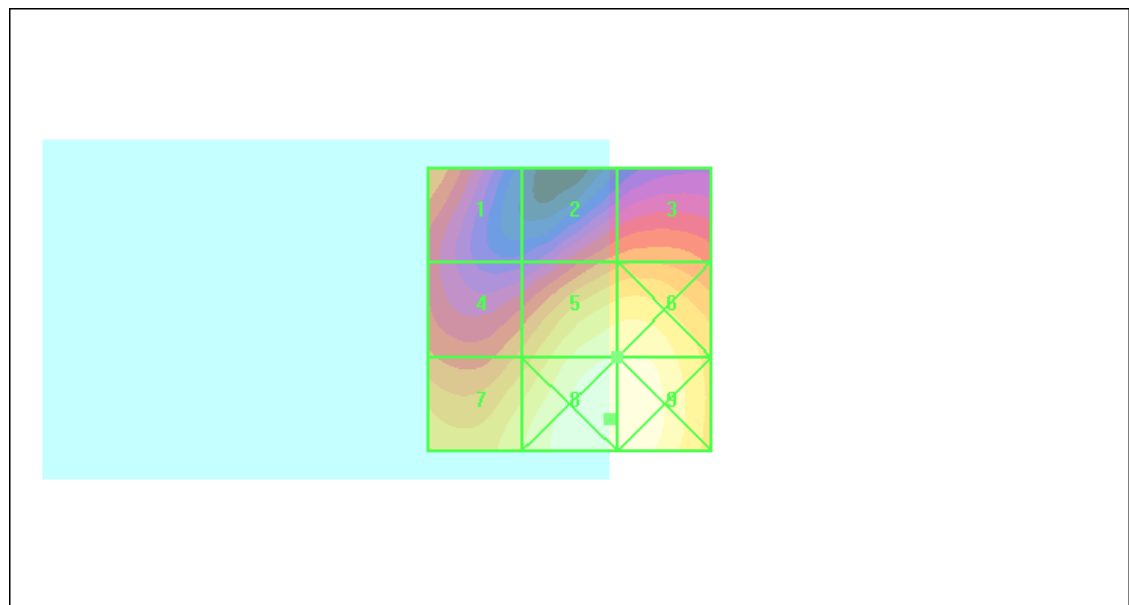

0 dB = 30.5V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 50.0 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 57.1 V/m; Power Drift = -0.102 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m



Grid 1 35.2 M4	Grid 2 49.9 M4	Grid 3 49.9 M4
Grid 4 32.4 M4	Grid 5 50.0 M4	Grid 6 50.1 M4
Grid 7 38.7 M4	Grid 8 46.0 M4	Grid 9 46.3 M4

Cursor:

Total = 50.1 V/m

E Category: M4

Location: -10, -6, 8.7 mm

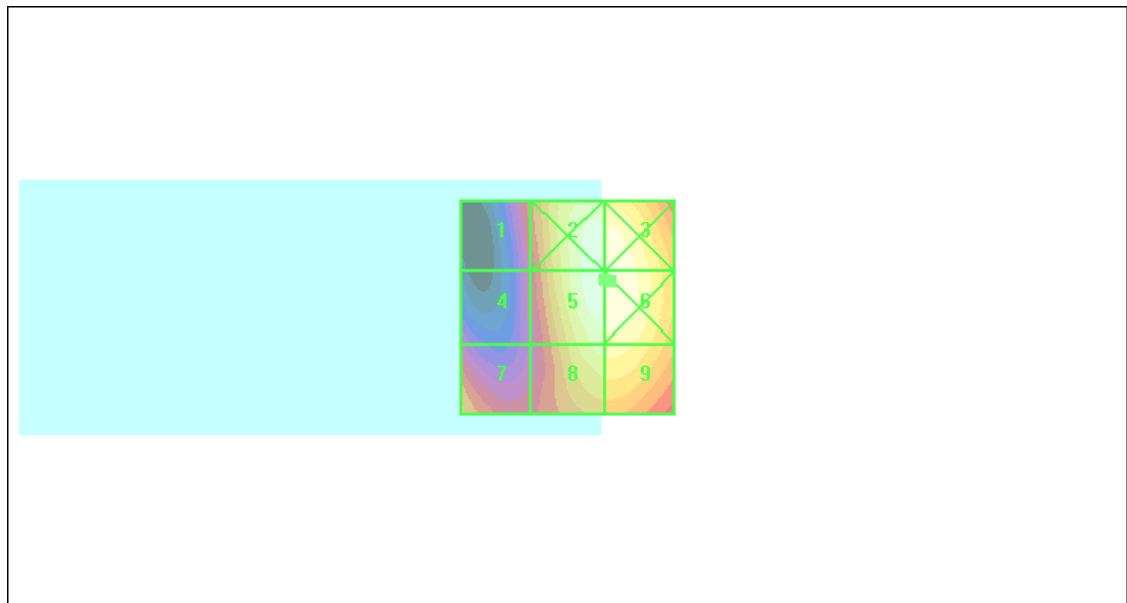

0 dB = 50.1V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 49.9 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 57.5 V/m; Power Drift = 0.148 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m


Grid 1 30.6 M4	Grid 2 49.0 M4	Grid 3 49.2 M4
Grid 4 31.6 M4	Grid 5 49.9 M4	Grid 6 50.2 M4
Grid 7 37.8 M4	Grid 8 48.3 M4	Grid 9 48.5 M4

Cursor:

Total = 50.2 V/m

E Category: M4

Location: -10.5, -0.5, 8.7 mm

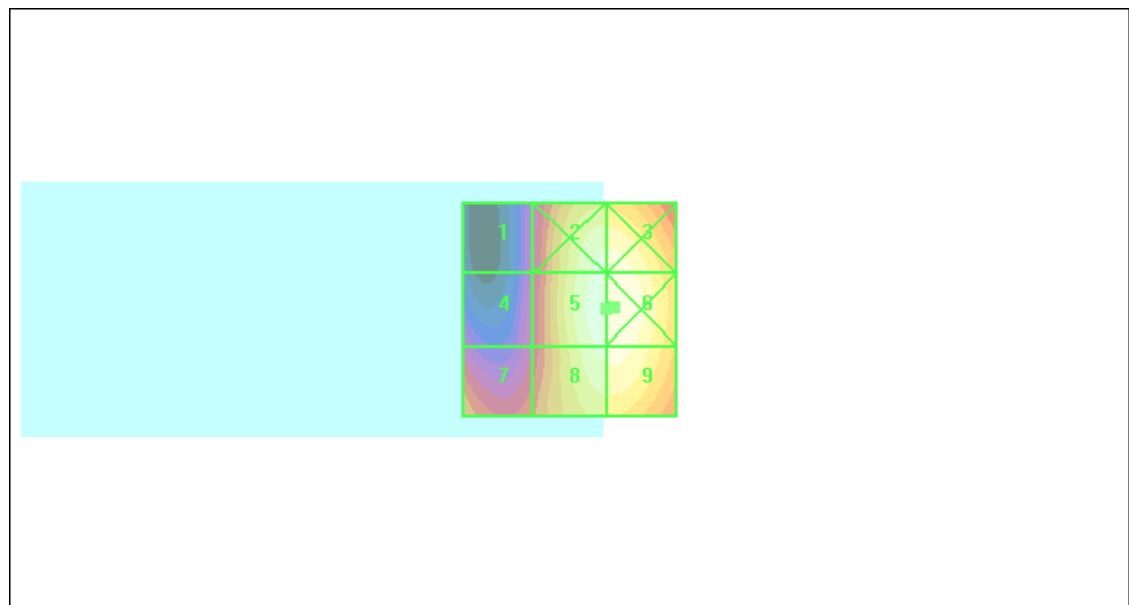

0 dB = 50.2V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

E Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 42.1 V/m

Probe Modulation Factor = 0.950

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 48.6 V/m; Power Drift = -0.048 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m



Grid 1 25.3 M4	Grid 2 40.1 M4	Grid 3 40.2 M4
Grid 4 27.7 M4	Grid 5 42.1 M4	Grid 6 42.3 M4
Grid 7 32.3 M4	Grid 8 41.6 M4	Grid 9 41.8 M4

Cursor:

Total = 42.3 V/m

E Category: M4

Location: -10.5, 4, 8.7 mm

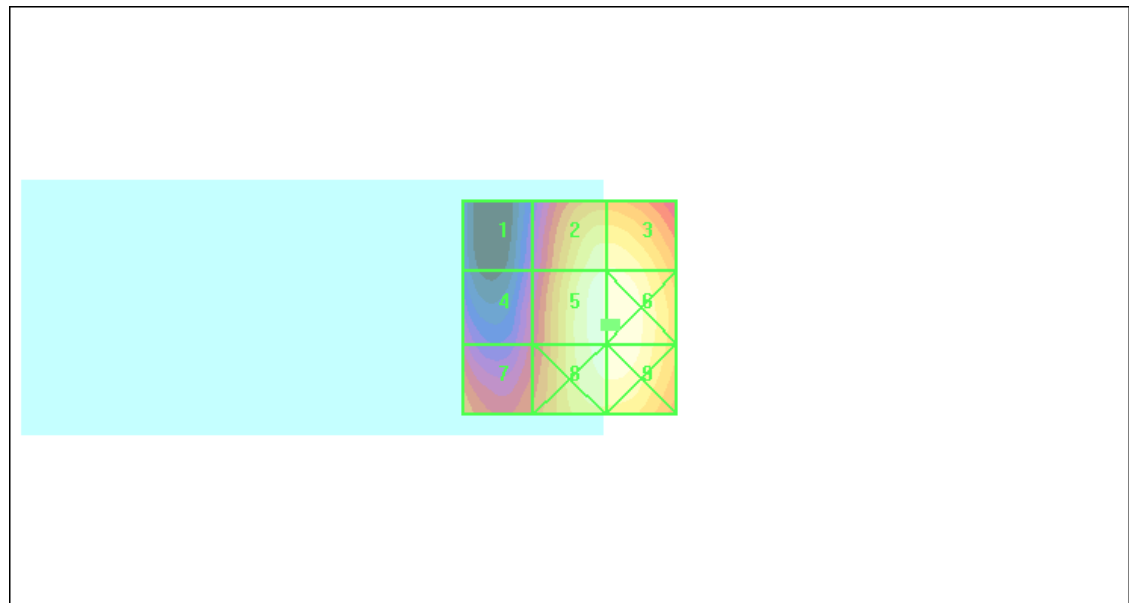

0 dB = 42.3V/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.090 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.092 A/m; Power Drift = 0.047 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.081 M4	Grid 2 0.082 M4	Grid 3 0.067 M4
Grid 4 0.092 M4	Grid 5 0.090 M4	Grid 6 0.069 M4
Grid 7 0.116 M4	Grid 8 0.105 M4	Grid 9 0.076 M4

Cursor:

Total = 0.116 A/m

H Category: M4

Location: 23, 25, 8.7 mm

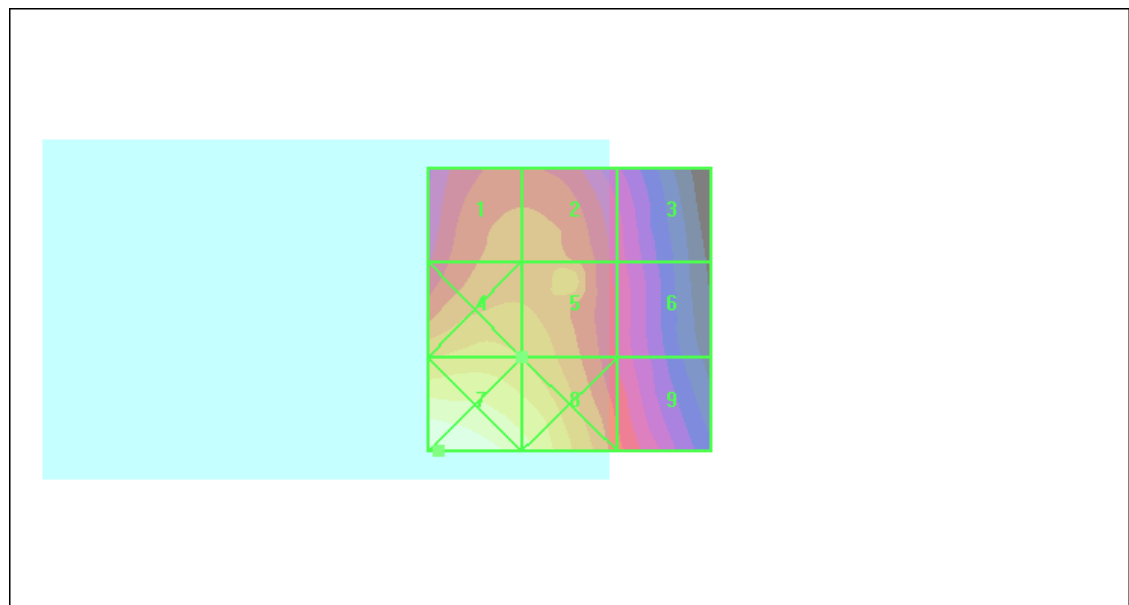

0 dB = 0.116A/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.093 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.096 A/m; Power Drift = -0.003 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.085 M4	Grid 2 0.085 M4	Grid 3 0.069 M4
Grid 4 0.095 M4	Grid 5 0.093 M4	Grid 6 0.070 M4
Grid 7 0.114 M4	Grid 8 0.107 M4	Grid 9 0.077 M4

Cursor:

Total = 0.114 A/m

H Category: M4

Location: 23.5, 25, 8.7 mm

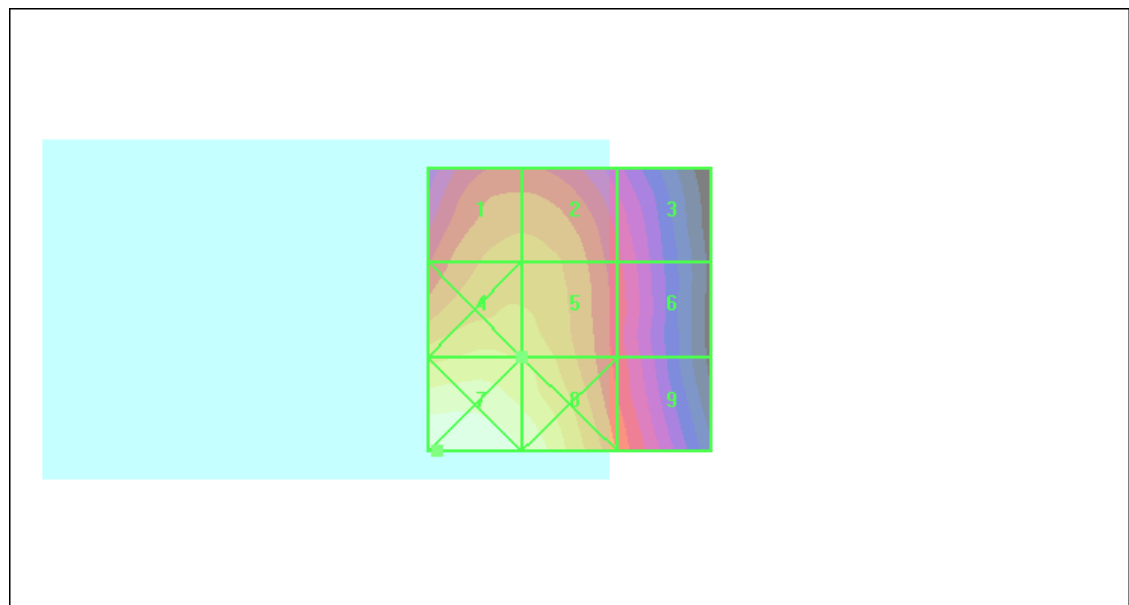

0 dB = 0.114A/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide close)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.085 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.089 A/m; Power Drift = -0.061 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.082 M4	Grid 2 0.082 M4	Grid 3 0.066 M4
Grid 4 0.087 M4	Grid 5 0.085 M4	Grid 6 0.067 M4
Grid 7 0.098 M4	Grid 8 0.092 M4	Grid 9 0.069 M4

Cursor:

Total = 0.098 A/m

H Category: M4

Location: 21, 25, 8.7 mm

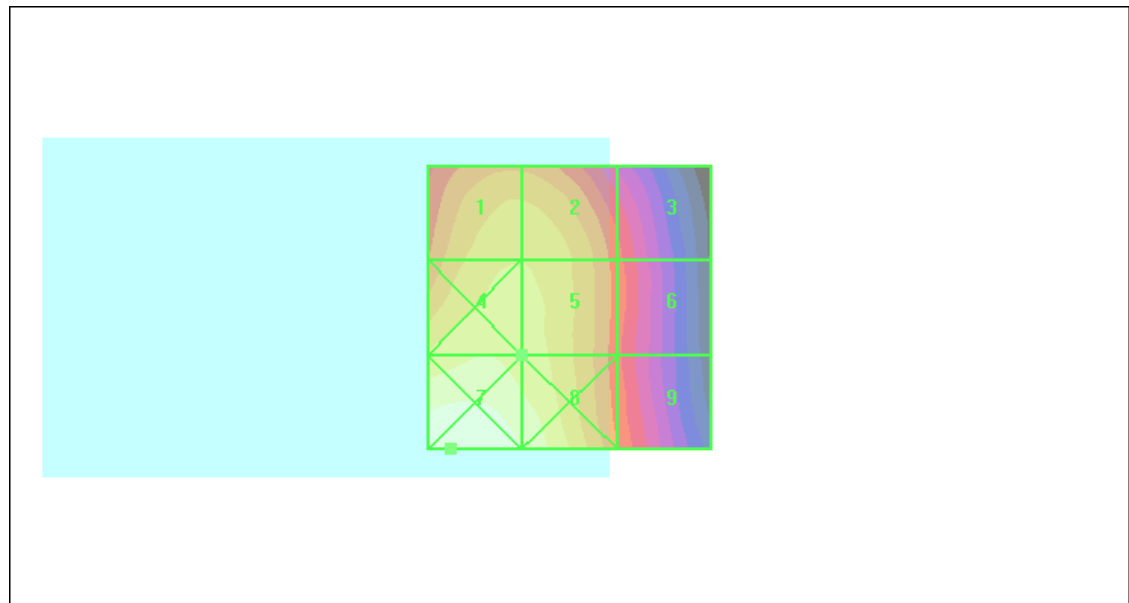

0 dB = 0.098 A/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - L-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.145 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.130 A/m; Power Drift = 0.150 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.146 M4	Grid 2 0.132 M4	Grid 3 0.093 M4
Grid 4 0.149 M4	Grid 5 0.141 M4	Grid 6 0.109 M4
Grid 7 0.153 M4	Grid 8 0.145 M4	Grid 9 0.115 M4

Cursor:

Total = 0.153 A/m

H Category: M4

Location: 21, 19, 8.7 mm

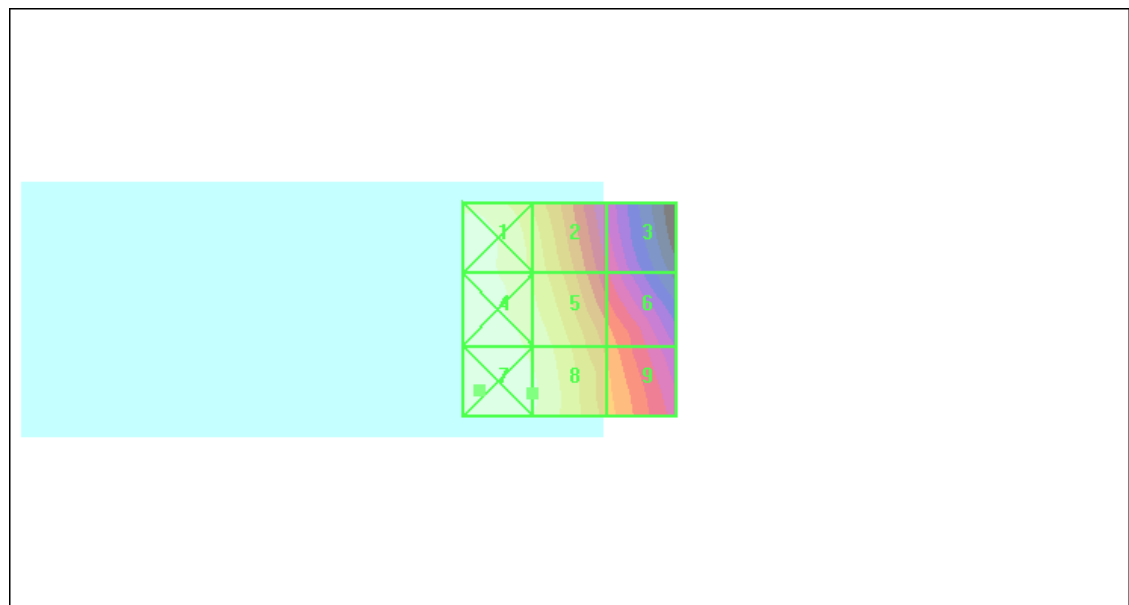

0 dB = 0.153A/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - M-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.146 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.135 A/m; Power Drift = 0.005 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.146 M4	Grid 2 0.135 M4	Grid 3 0.095 M4
Grid 4 0.155 M4	Grid 5 0.146 M4	Grid 6 0.111 M4
Grid 7 0.163 M4	Grid 8 0.154 M4	Grid 9 0.120 M4

Cursor:

Total = 0.163 A/m

H Category: M4

Location: 16, 20.5, 8.7 mm

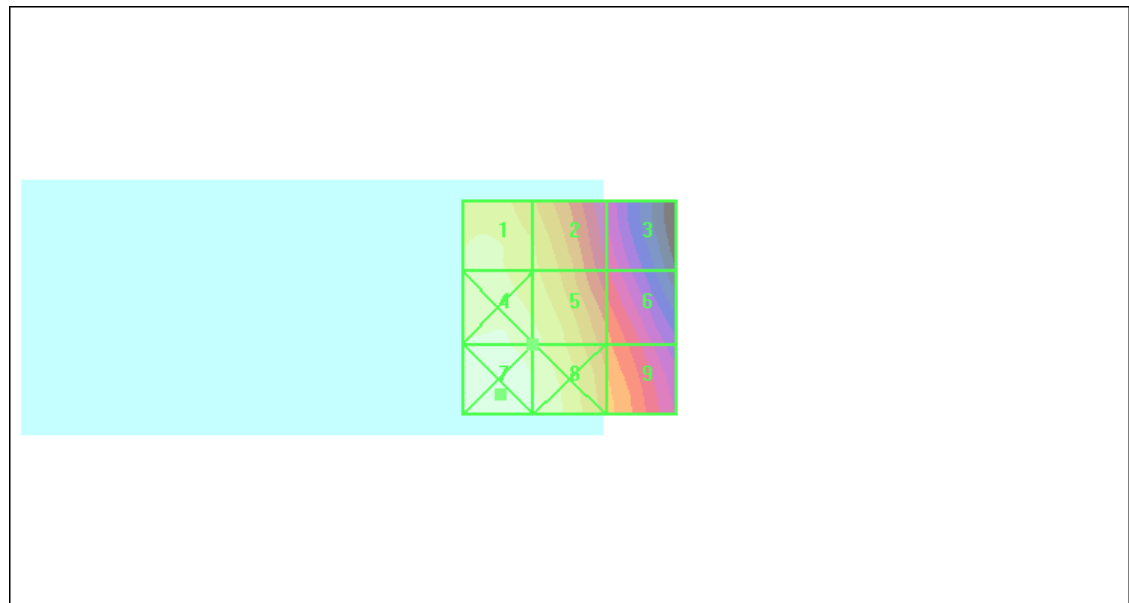

0 dB = 0.163A/m

Test Laboratory: Compliance Certification Services

PCS band HAC (slide open)

DUT: Palm; Type: N/A; Serial: N/A

Communication System: CDMA PCS band; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 2/16/2010
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 9/15/2009
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 100x
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

H Scan - H-ch/Hearing Aid Compatibility Test (101x101x1): Measurement grid: dx=5mm, dy=5mm

Maximum value of peak Total field = 0.127 A/m

Probe Modulation Factor = 0.960

Device Reference Point: 0.000, 0.000, -6.30 mm

Reference Value = 0.118 A/m; Power Drift = -0.071 dB

Hearing Aid Near-Field Category: M4 (AWF 0 dB)

Peak H-field in A/m



Grid 1 0.124 M4	Grid 2 0.117 M4	Grid 3 0.083 M4
Grid 4 0.135 M4	Grid 5 0.127 M4	Grid 6 0.095 M4
Grid 7 0.143 M4	Grid 8 0.133 M4	Grid 9 0.103 M4

Cursor:

Total = 0.143 A/m

H Category: M4

Location: 20, 23.5, 8.7 mm

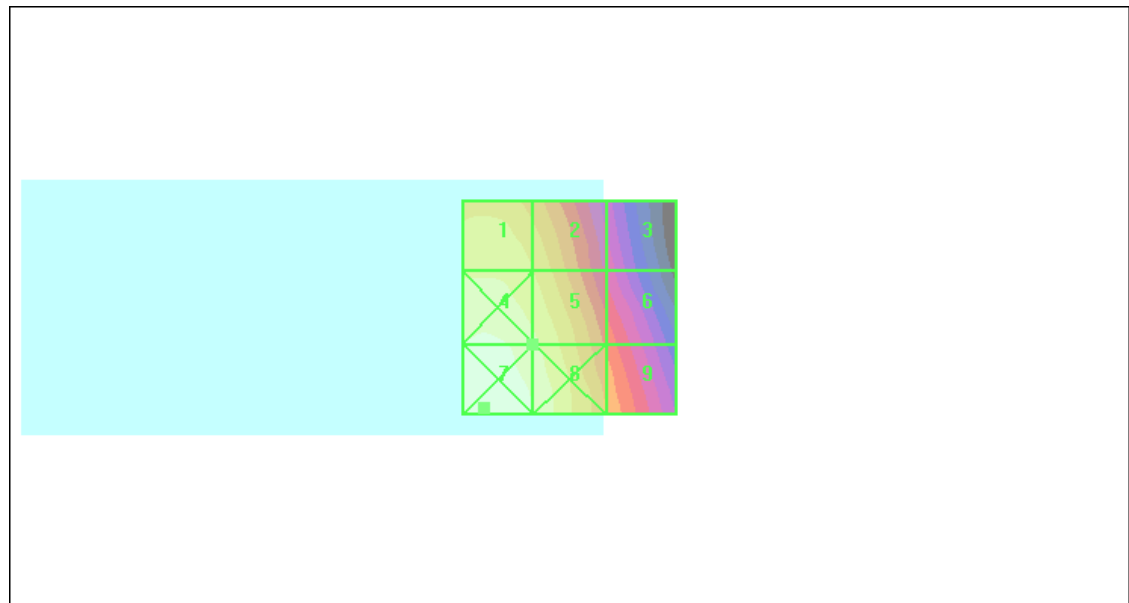

0 dB = 0.143A/m