


FCC Test Report

EQUIPMENT : Smart Phone
BRAND NAME : Palm
MODEL NAME : T850EWW
FCC ID : O8F-SKYC
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : Digital Transmission System (DTS/Hybrid)
APPLICANT : Palm, Inc.

950 W Maude Ave. MS 22L02 Sunnyvale, CA 94085-2801

The product sample received on Sep. 11, 2008 and completely tested on Sep. 24, 2008. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	3
REVISION HISTORY.....	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Feature of Equipment Under Test	5
1.3 Testing Site.....	7
1.4 Applied Standards	7
1.5 Ancillary Equipment List	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Pre-Scanned RF Power.....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 RF Utility	10
3 TEST RESULT	11
3.1 Number of Channel Measurement	11
3.2 20dB Bandwidth Measurement	13
3.3 Hopping Channel Separation Measurement	20
3.4 Dwell Time of Each Channel Measurement	27
3.5 Peak Output Power Measurement	40
3.6 Band Edges Measurement.....	47
3.7 Power Spectral Density Measurement	52
3.8 AC Conducted Emission Measurement.....	59
3.9 Radiated Emission Measurement.....	63
3.10 Antenna Requirements.....	77
4 LIST OF MEASURING EQUIPMENTS	78
5 UNCERTAINTY OF EVALUATION.....	79
6 CERTIFICATION OF TAF ACCREDITATION	81
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(b)(1)	Number of Channels	$\geq 15\text{Chs}$	Pass	
3.2	15.247(a)(1)	20dB Bandwidth	NA	Pass	-
3.3	15.247(a)(1)	Channel Separation	$\geq 2/3$ of 20dB BW	Pass	-
3.4	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Pass	-
3.5	15.247(a)(1)	Peak Output Power	$\leq 0.125\text{W}$	Pass	-
3.6	15.247(d)	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.7	15.247(f)	Power Spectral Density	$< 8\text{dBm}/3\text{kHz}$	Pass	-
3.8	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.4 dB at 0.63 MHz
3.9	15.247(d)	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.18 dB at 7281.0 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR891114B	Rev. 02	Initial issue of report	Oct. 23, 2008



1 General Description

1.1 Applicant

Palm, Inc.

950 W Maude Ave. MS 22L02 Sunnyvale, CA 94085-2801

1.2 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Smart Phone
Brand Name	Palm
Model Name	T850EWW
Tx/Rx Frequency Range	2400 MHz ~ 2483.5 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Channel Spacing	1 MHz
Maximum Output Power to Antenna	Bluetooth: 1.01 dBm (1Mbps) Bluetooth EDR: 1.34dBm (2Mbps) / 0.11dBm (3Mbps)
Antenna Type	PIFA Antenna with gain 1 dBi
Type of Modulation	Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
EUT Stage	Identical Prototype

2nd component Source List

Component Model		
AC Adapter	Brand Name	Palm
	Model Name	5890-712V-02K0
	Part Number	157-10108-00
	Power Rating	I/P:100-240Vac, 50-60Hz, 0.25A; O/P: 5Vdc, 1000mA
Battery	Brand Name	Palm
	Model Name	157-10105-00
	Power Rating	3.7Vdc, 1500mAh
	Type	Li-ion
Earphone	Brand Name	Palm
	Model Name	3363WW
	Part Number	180-10611-00
	Signal Line Type	0.9 meter non-shielded cable without ferrite core
USB Cable	Brand Name	Palm
	Model Name	3403WW
	Part Number	163-10274-00
	Signal Line Type	1.8 meter non-shielded cable without ferrite core

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. For accessories equipped with this EUT, please refer to the appendix of the external photo.
3. For other wireless features of this EUT, test report will be issued separately.

1.3 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH06-HY	TW1022/4086B-1

1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC Public Notice DA 00-705
- ♦ ANSI C63.4-2003

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC) which recorded in a separate test report.

1.5 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	GPS Station	T&E	GS-50	N/A	N/A	Unshielded, 1.8m
2.	BT Base Station	Anritus	8852A	N/A	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Free style	JD-100	N/A	N/A	N/A

2 Test Configuration of Equipment Under Test

2.1 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and recorded the RF output power in the following table:

RF Output Power				
Channel	Frequency	Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	0.47 dBm	0.92 dBm	-0.51 dBm
Ch39	2441MHz	0.63 dBm	0.97 dBm	-0.3 dBm
Ch78	2480MHz	1.01 dBm	1.34 dBm	0.11 dBm

Remark:

1. The data rate 2Mbps was set for radiated emission cases, due to the highest RF output power.
2. The EUT is programmed to transmit signal continuously for all tests.


2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests were conducted to determine the final configuration from all possible combinations. The following tables are showing the test modes as the worst cases and recorded in this report.


Test Cases			
Test Item	Modulation		
	Bluetooth 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted TCs	■ Mode 1: CH00_2402 MHz ■ Mode 2: CH39_2441 MHz ■ Mode 3: CH78_2480 MHz	■ Mode 4: CH00_2402 MHz ■ Mode 5: CH39_2441 MHz ■ Mode 6: CH78_2480 MHz	■ Mode 7: CH00_2402 MHz ■ Mode 8: CH39_2441 MHz ■ Mode 9: CH78_2480 MHz
Radiated TCs	N/A	■ Mode 1: CH00_2402 MHz ■ Mode 2: CH39_2441 MHz ■ Mode 3: CH78_2480 MHz	N/A
AC Conducted Emission	Mode 1 : BT Link + GPS Rx+ Earphone + Adapter		

2.3 Connection Diagram of Test System

<Conducted Emission>

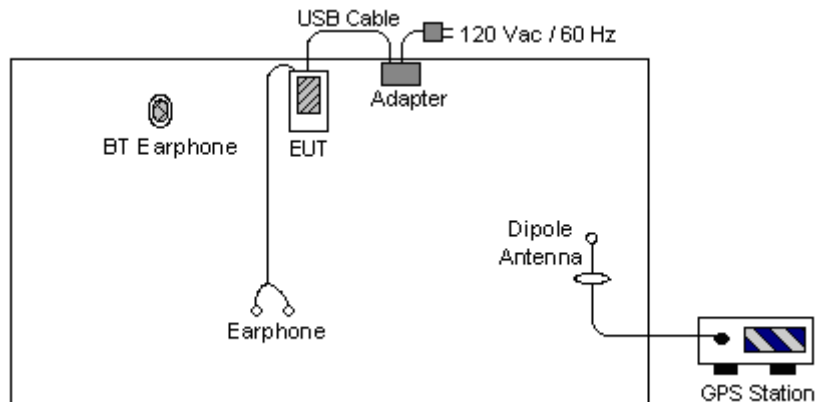

<Radiated Emission>

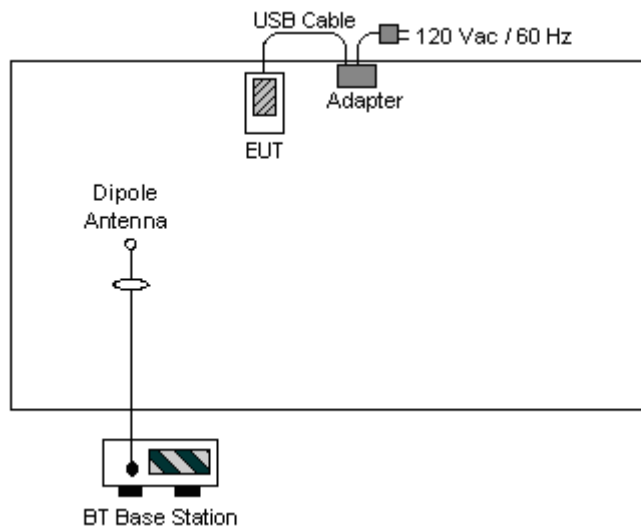

2.4 RF Utility

The programmed RF Utility, "MTTY144" is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The modulation types of EUT are irrelevant to number of hopping channels deviation.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = the frequency band of operation; $RBW \geq 1\%$ of the span; $VBW \geq RBW$; Sweep = auto;
Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the device has the numbers of total channel.


3.1.4 Test Setup

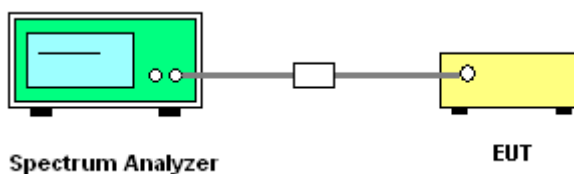

3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	Mode 1~9	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%
Number of Hopping Channels (Channel)		Limits (Channel)	Pass/Fail
79		> 15	Pass

Number of Hopping Channel Plot on Channel 00 - 78

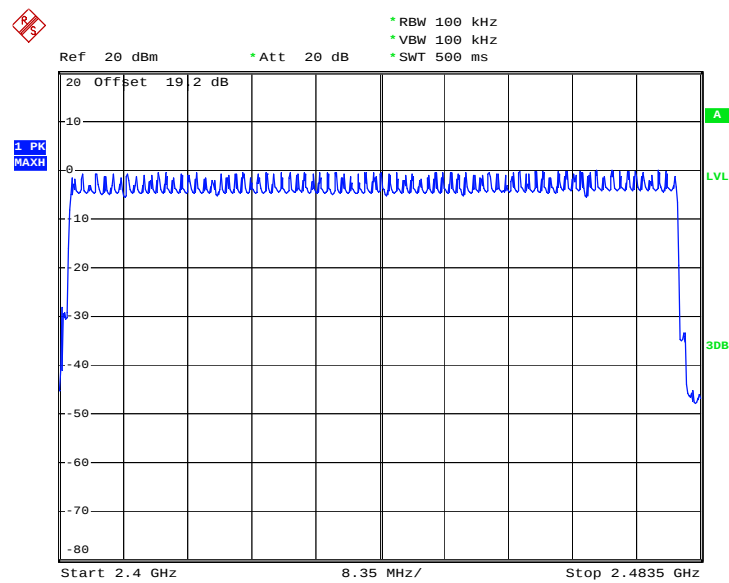

Date: 22.SEP.2008 18:32:22

3.2 20dB Bandwidth Measurement

3.2.1 Limit of 20dB Bandwidth

N/A


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq$ 1% of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

3.2.4 Test Setup

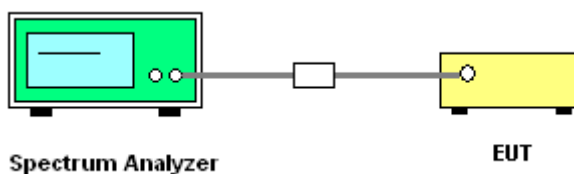


3.2.5 Test Result of 20dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	0.740
39	2441	0.744
78	2480	0.744


20 dB Bandwidth Plot on Channel 00

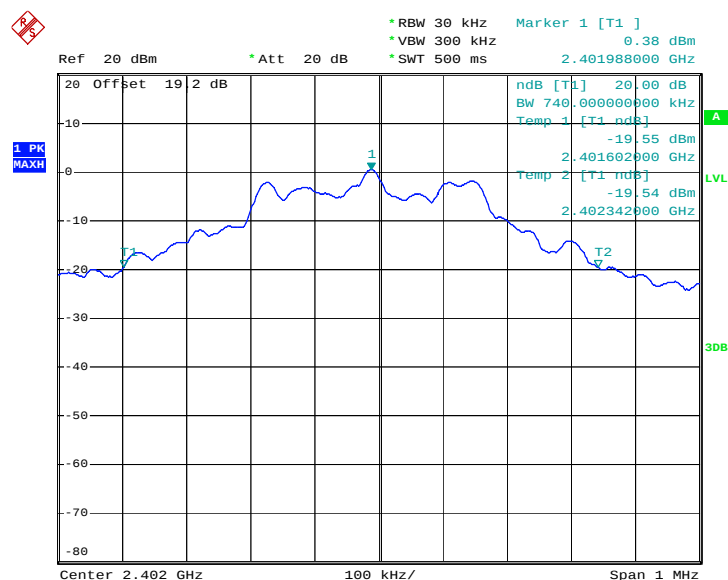

Date: 22.SEP.2008 17:04:38




20 dB Bandwidth Plot on Channel 39

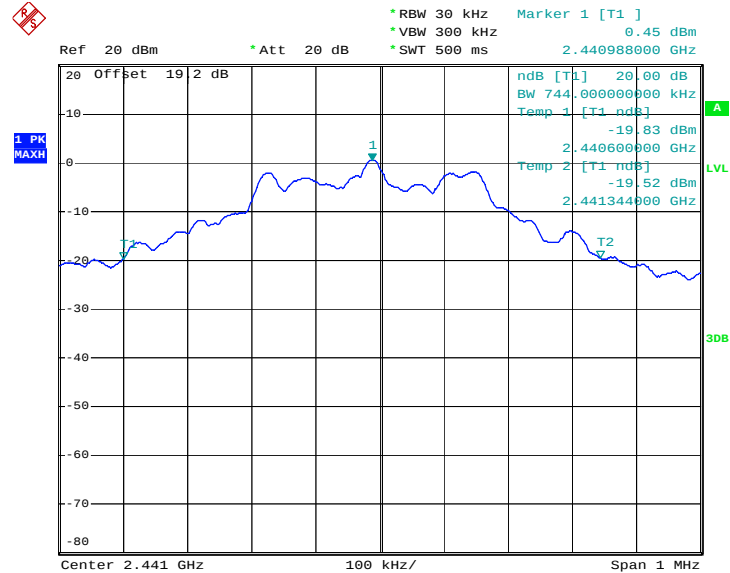

Date: 22.SEP.2008 17:04:58

20 dB Bandwidth Plot on Channel 78

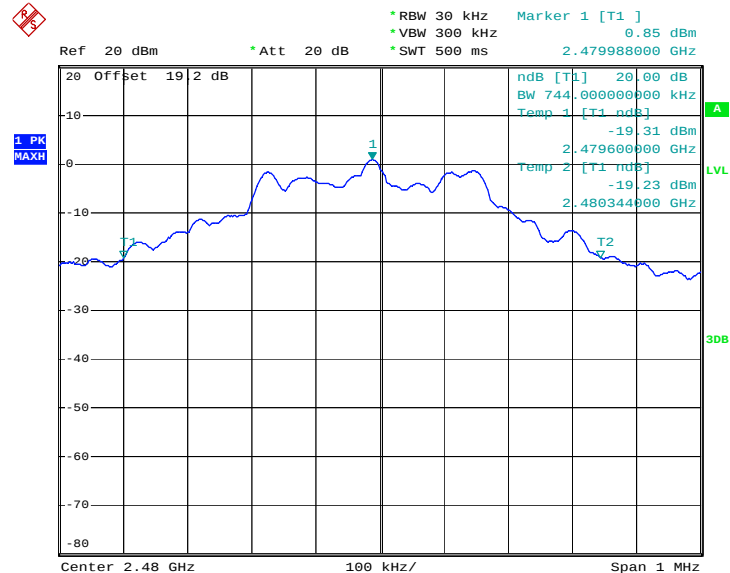


Date: 22.SEP.2008 17:05:16




Test Mode :	Mode 4, 5, 6	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.224
39	2441	1.220
78	2480	1.220

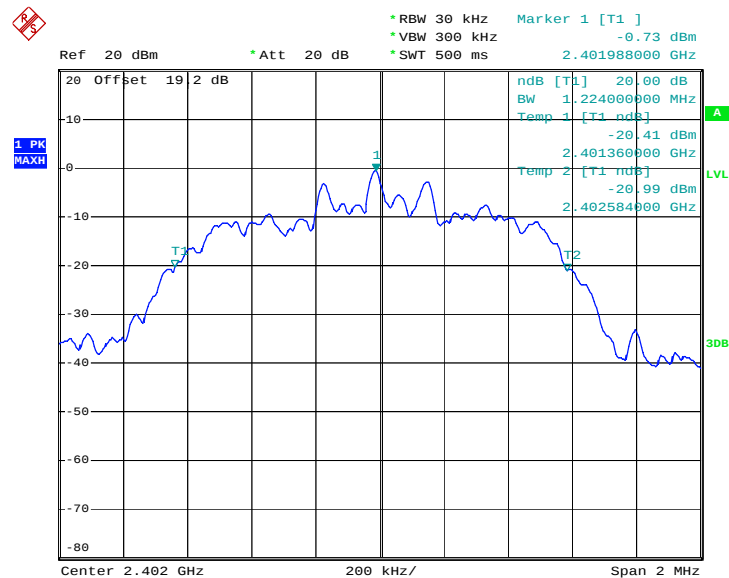20 dB Bandwidth Plot on Channel 00

Date: 22.SEP.2008 17:05:53

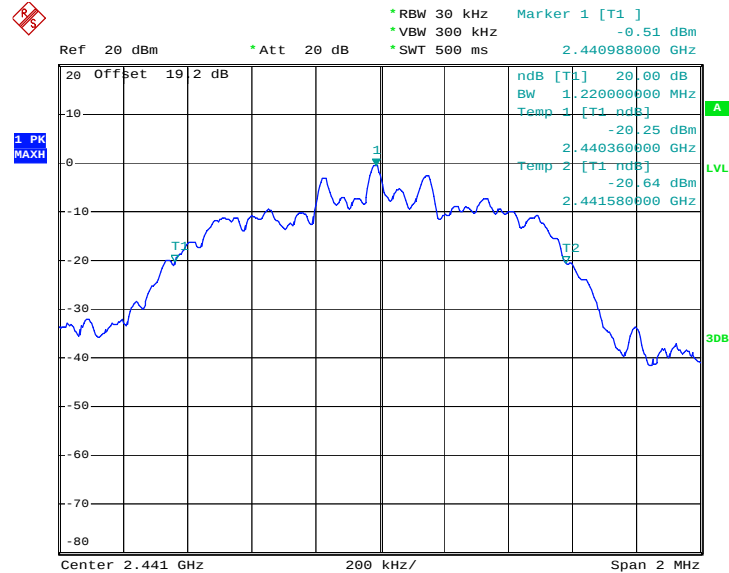20 dB Bandwidth Plot on Channel 39


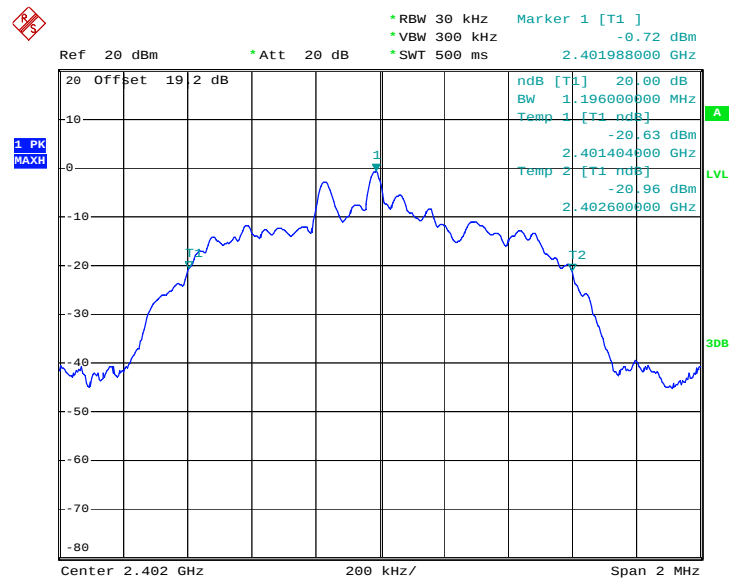
Date: 22.SEP.2008 17:06:24

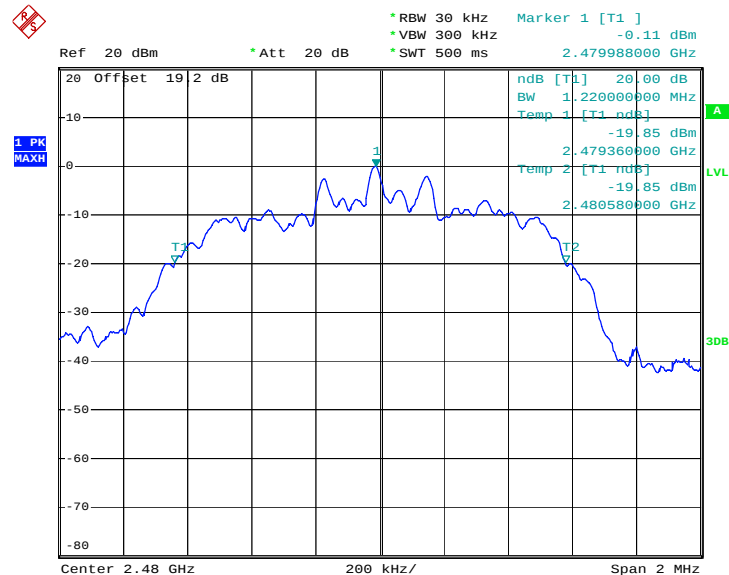20 dB Bandwidth Plot on Channel 78


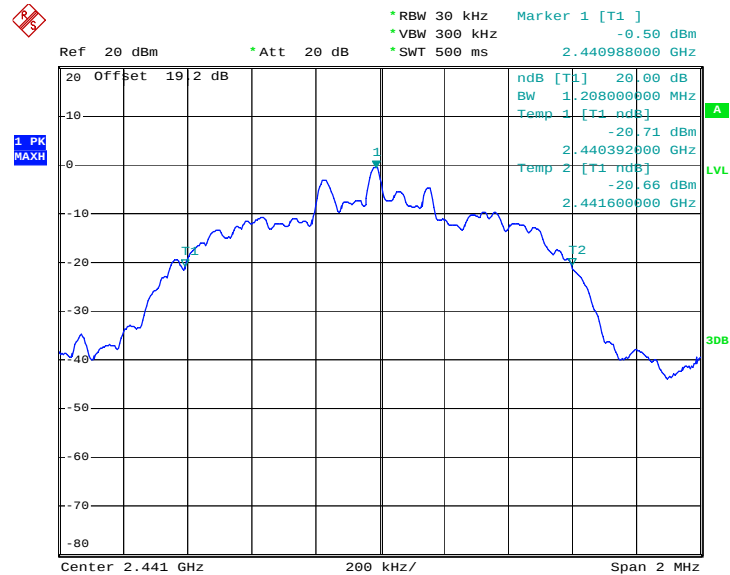
Date: 22.SEP.2008 17:06:41

Test Mode :	Mode 7, 8, 9	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
00	2402	1.196
39	2441	1.208
78	2480	1.200

20 dB Bandwidth Plot on Channel 00


Date: 22.SEP.2008 17:07:08

20 dB Bandwidth Plot on Channel 39


Date: 22.SEP.2008 18:41:38

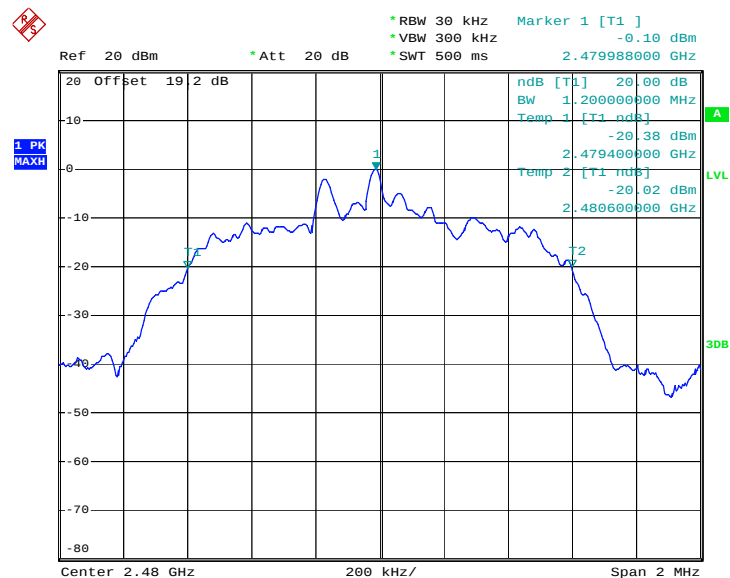20 dB Bandwidth Plot on Channel 78


Date: 22.SEP.2008 17:07:56

3.3 Hopping Channel Separation Measurement

3.3.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. Please refer FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels; $RBW \geq 1\%$ of the span;
 $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.3.4 Test Setup

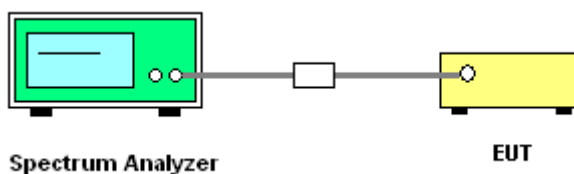


3.3.5 Test Result of Hopping Channel Separation


Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.493	Pass
39	2441	1.000	0.496	Pass
78	2480	1.000	0.496	Pass


Channel Separation Plot on Channel 00 - 01

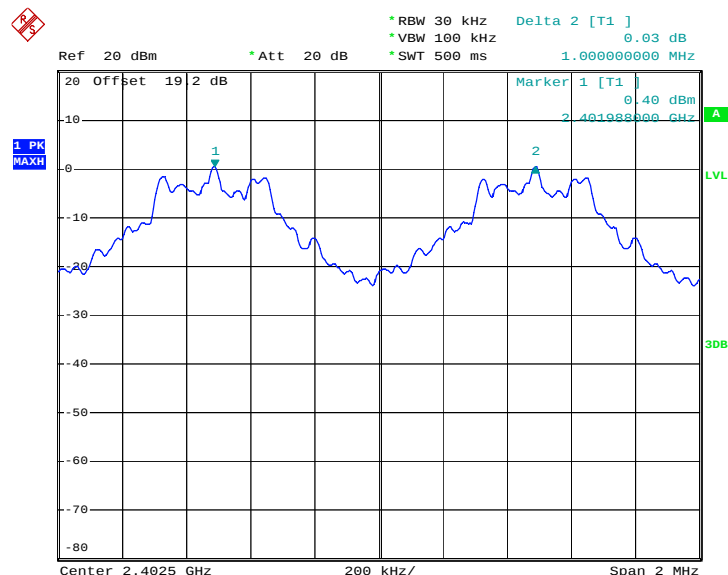

Date: 22.SEP.2008 17:54:15

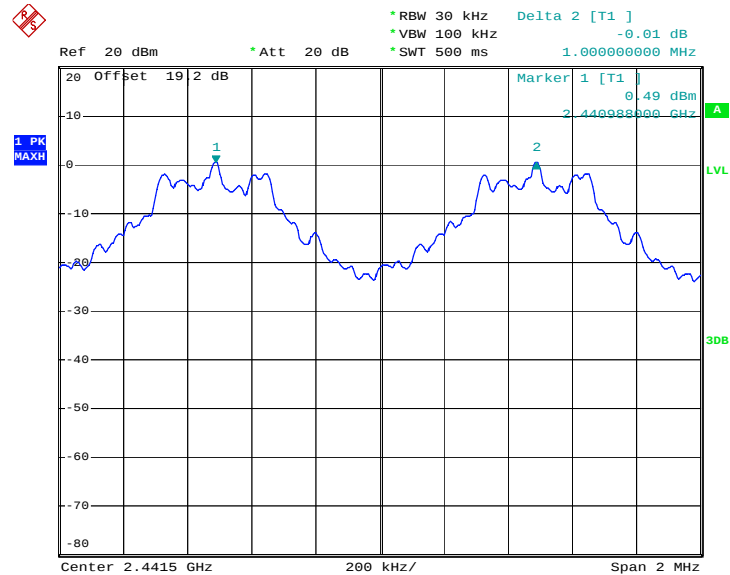Channel Separation Plot on Channel 39 - 40


Date: 22.SEP.2008 17:55:05

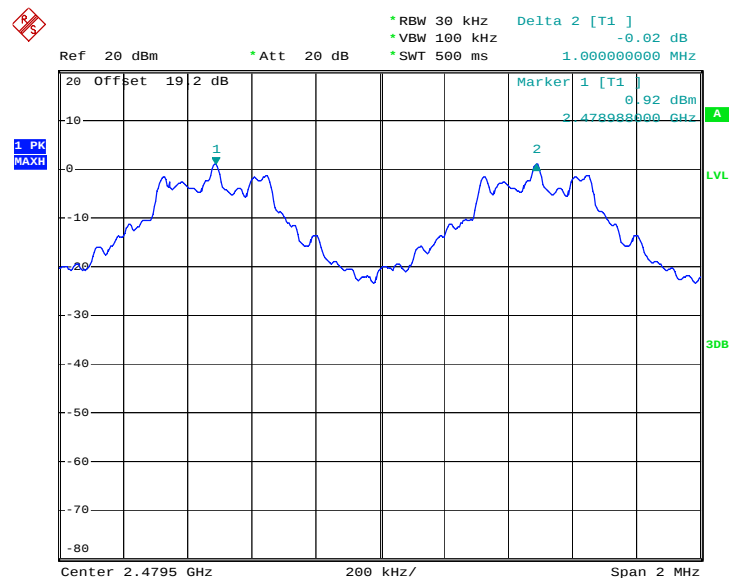
Channel Separation Plot on Channel 77 - 78


Date: 22.SEP.2008 17:55:56




Test Mode :	Mode 4, 5, 6	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.816	Pass
39	2441	1.000	0.813	Pass
78	2480	1.000	0.813	Pass

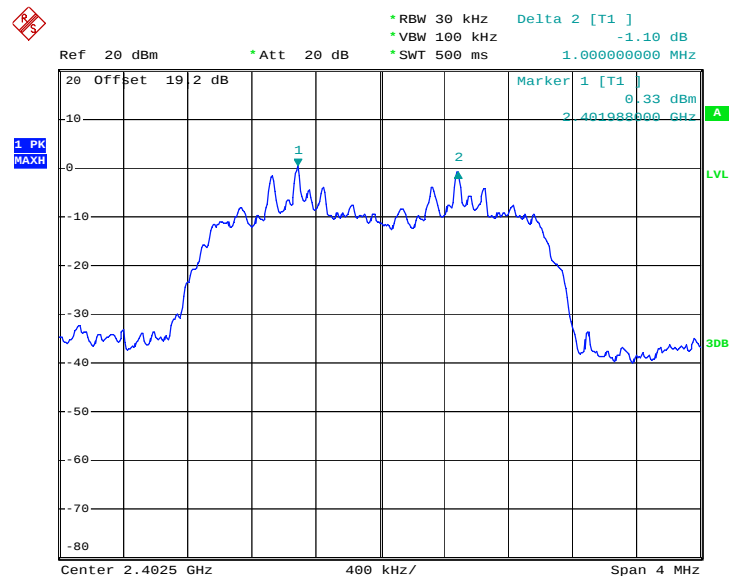Channel Separation Plot on Channel 00 - 01

Date: 22.SEP.2008 17:48:26

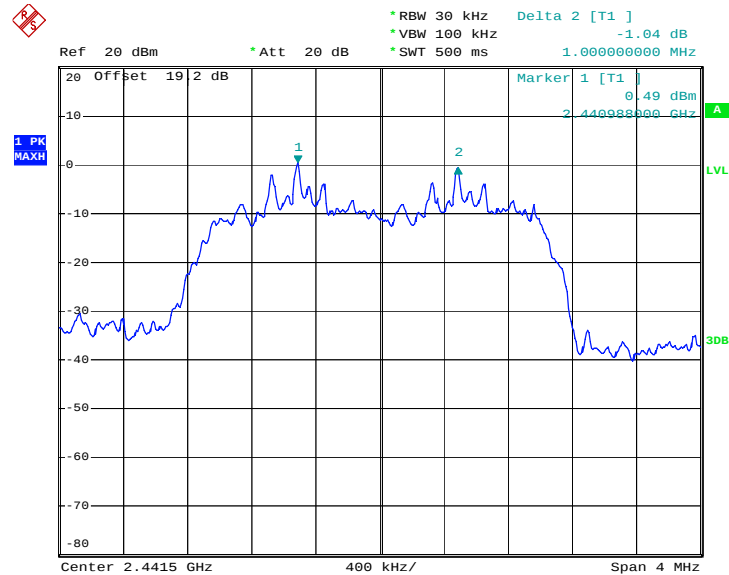Channel Separation Plot on Channel 39 - 40


Date: 22.SEP.2008 17:49:09

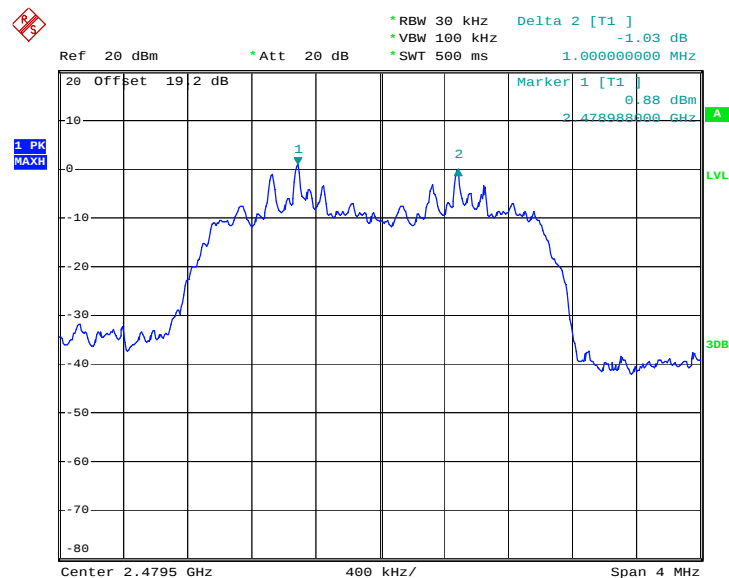Channel Separation Plot on Channel 77 - 78


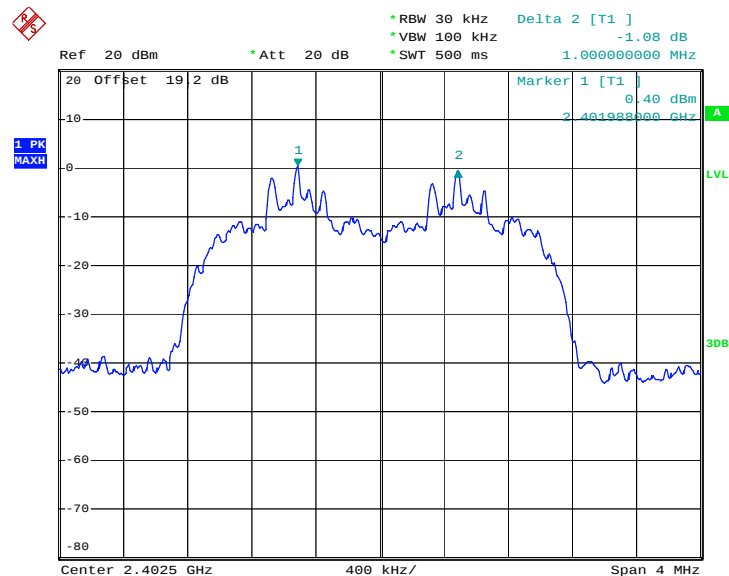
Date: 22.SEP.2008 17:49:52




Test Mode :	Mode 7, 8, 9	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	Frequency Separation (MHz)	(2/3 of 20dB BW) Limits (MHz)	Pass/Fail
00	2402	1.000	0.797	Pass
39	2441	1.000	0.805	Pass
78	2480	1.000	0.800	Pass


Channel Separation Plot on Channel 00 - 01



Date: 22.SEP.2008 17:51:28

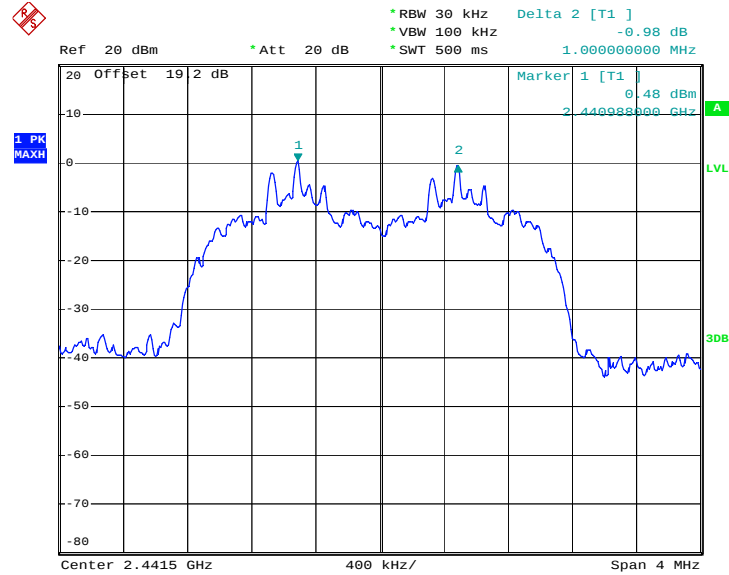Channel Separation Plot on Channel 39 - 40


Date: 22.SEP.2008 17:52:12

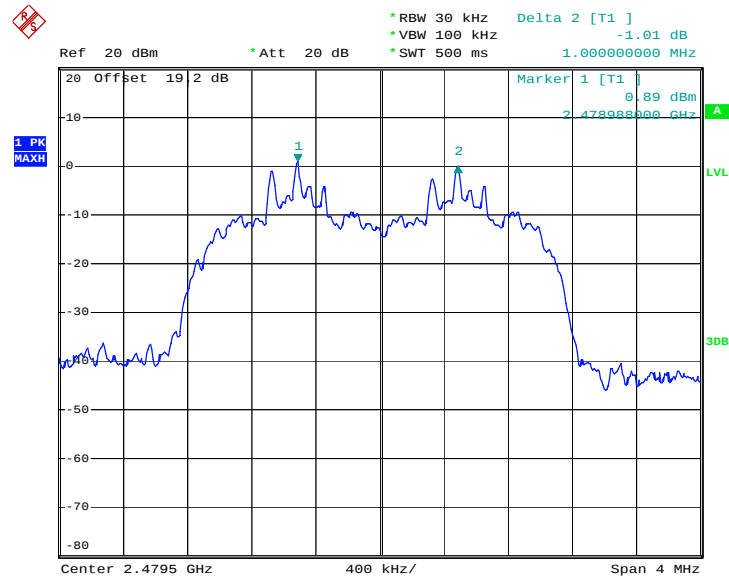Channel Separation Plot on Channel 77 - 78


Date: 22.SEP.2008 17:52:49

3.4 Dwell Time of Each Channel Measurement

3.4.1 Limit of Dwell Time of Each Channel

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. The EUT should be transmitting at its maximum data rate as the worst cases.
4. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Use the marker-delta function to calculate the dwell time.

3.4.4 Test Setup

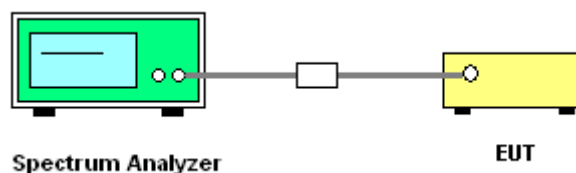


3.4.5 Test Result of Dwell Time of Each Channel

Test Mode :	Mode 2	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
DH1	9.70	444.00	0.136	0.4	Pass
DH3	5.40	1730.00	0.295	0.4	Pass
DH5	3.80	3030.00	0.364	0.4	Pass

Remark:


1. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
2. 79 channels come from the Hopping Channel number.
3. Average Hopping Channel = hops/sweep time
4. t: Package Transfer Time(us)

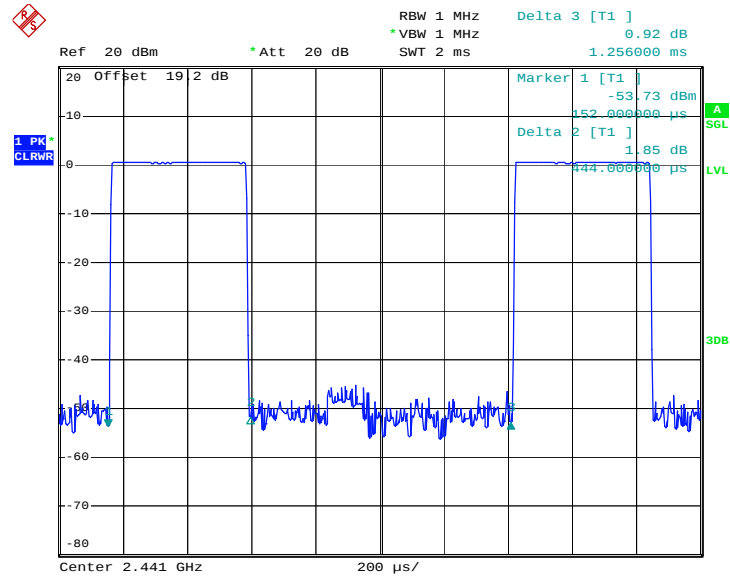DH1 Dwell Time (One Pulse) Plot on Channel 39


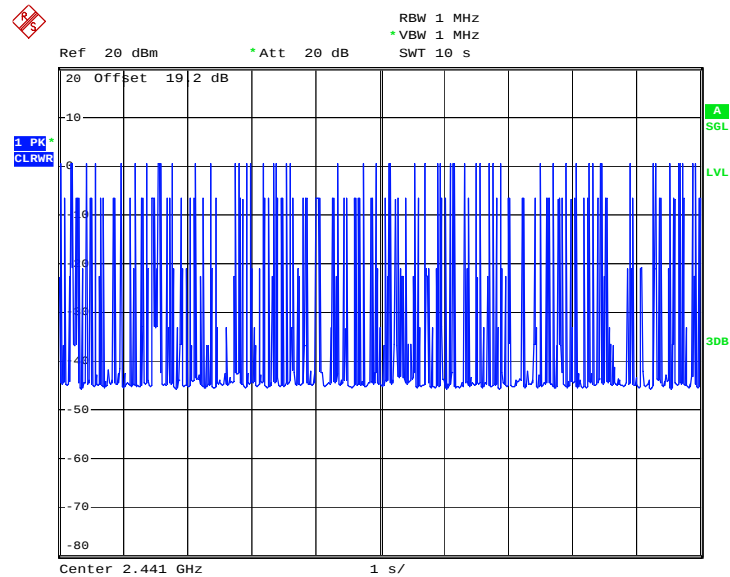
Date: 22.SEP.2008 17:57:00

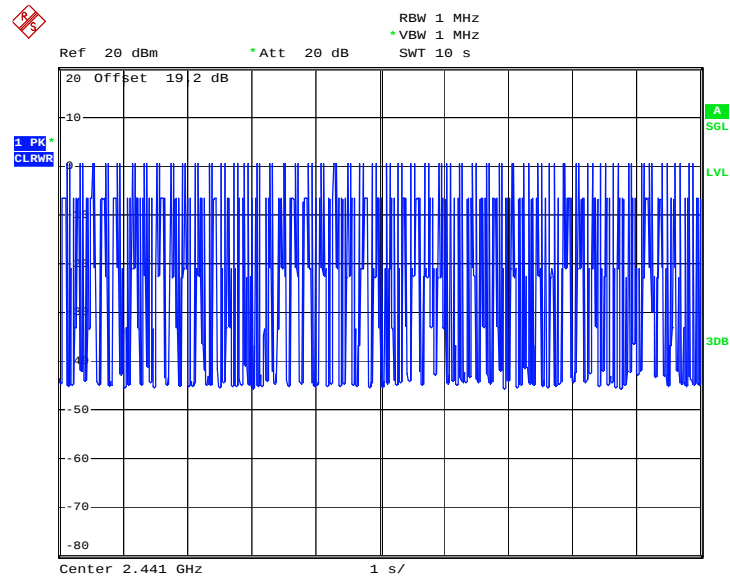DH1 Dwell Time (Count Pulses) Plot on Channel 39


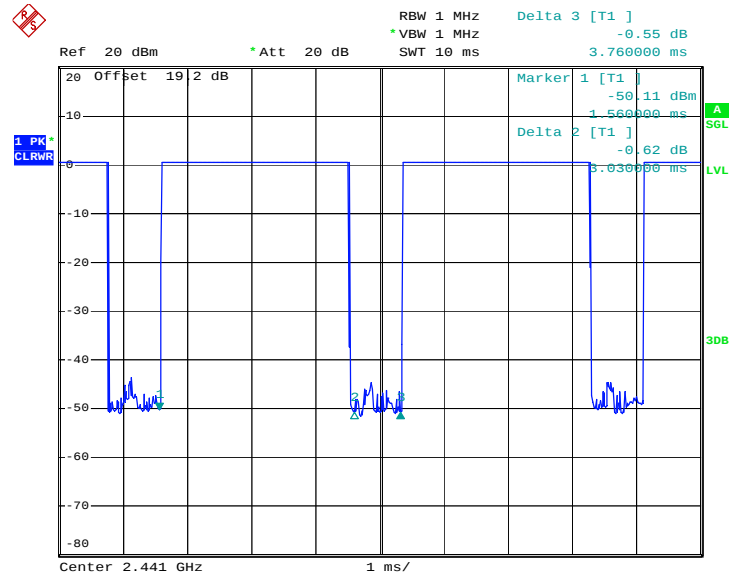
Date: 22.SEP.2008 18:16:19

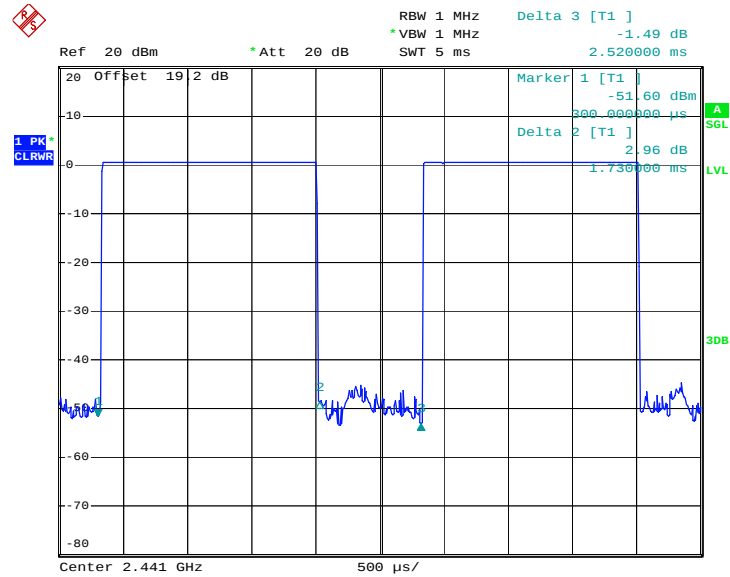DH3 Dwell Time (One Pulse) Plot on Channel 39


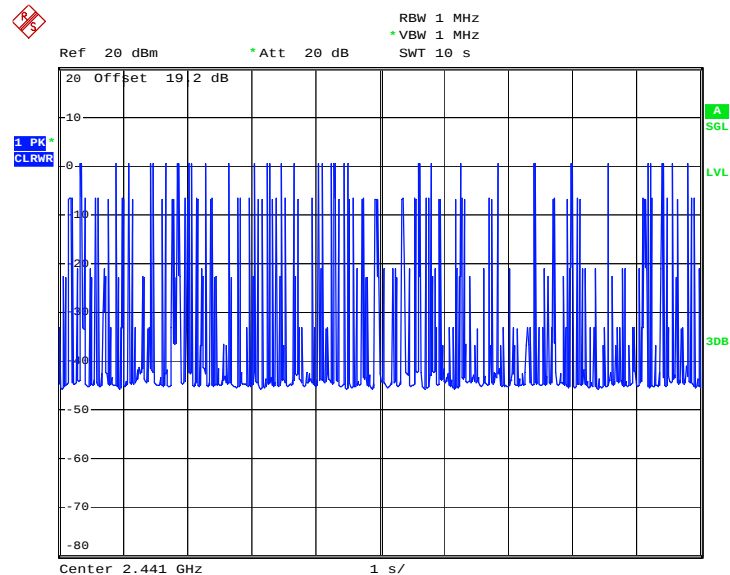
Date: 22.SEP.2008 17:57:32

DH3 Dwell Time (Count Pulses) Plot on Channel 39


Date: 22.SEP.2008 18:16:40

DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 22.SEP.2008 17:58:15

DH5 Dwell Time (Count Pulses) Plot on Channel 39


Date: 22.SEP.2008 18:17:02

Test Mode :	Mode 5	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
2DH1	8.40	456.00	0.121	0.4	Pass
2DH3	4.90	1720.00	0.266	0.4	Pass
2DH5	3.10	3020.00	0.296	0.4	Pass

Remark:

5. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
6. 79 channels come from the Hopping Channel number.
7. Average Hopping Channel = hops/sweep time
8. t: Package Transfer Time(us)




2DH1 Dwell Time (One Pulse) Plot on Channel 39

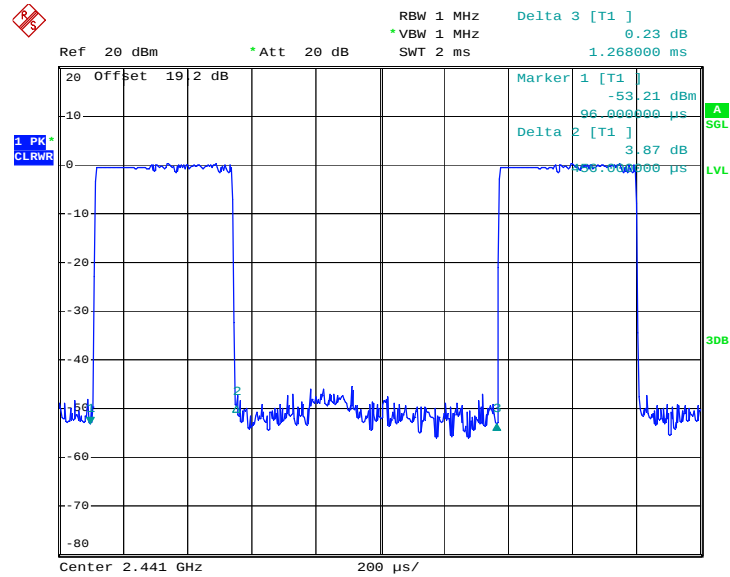


Date: 22.SEP.2008 18:00:12


2DH1 Dwell Time (Count Pulses) Plot on Channel 39

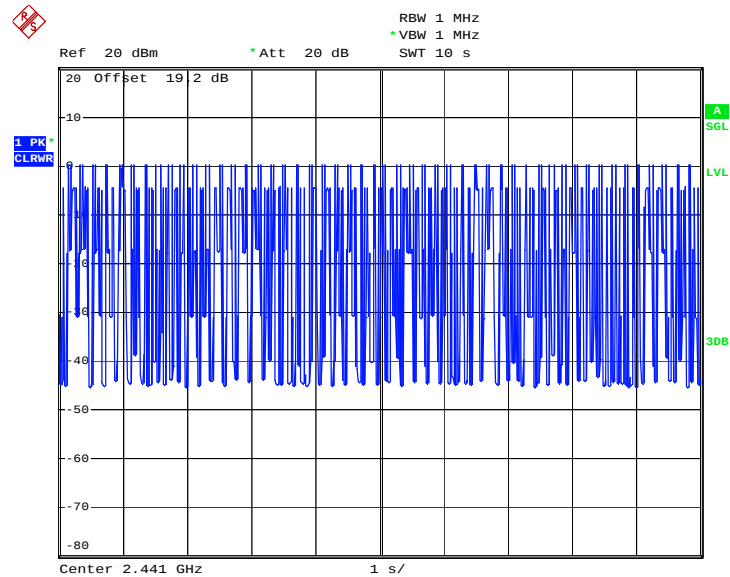


Date: 22.SEP.2008 18:09:15

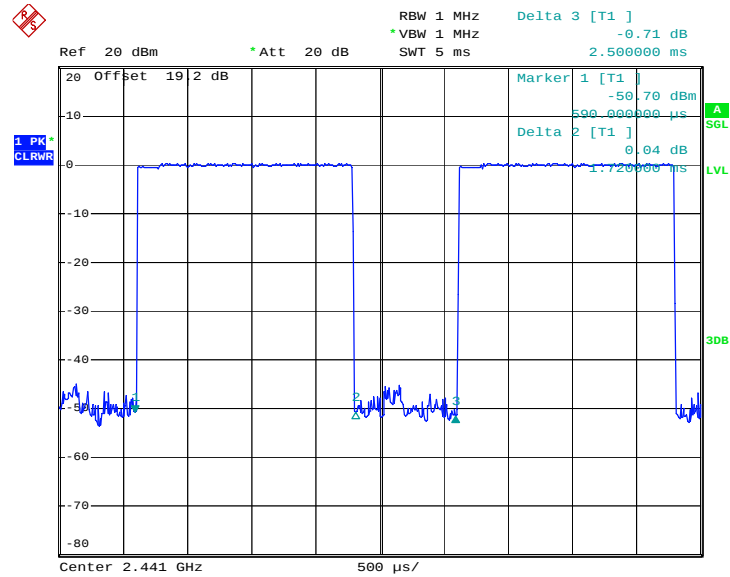2DH3 Dwell Time (One Pulse) Plot on Channel 39


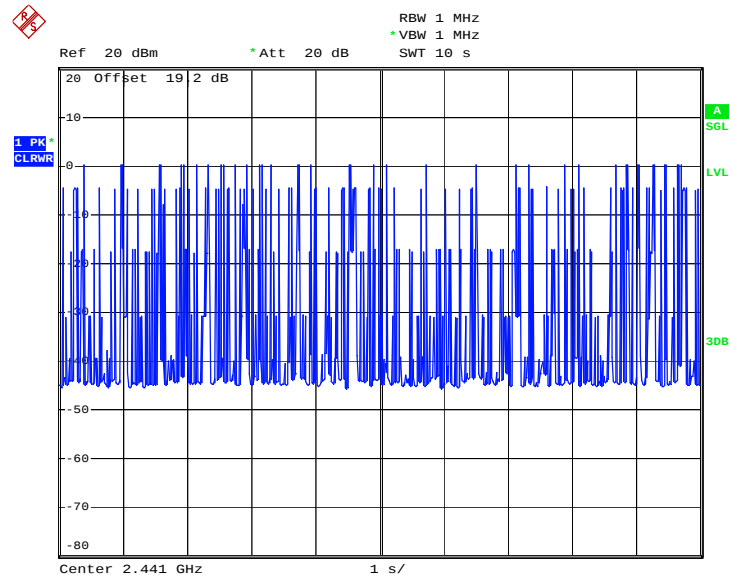
Date: 22.SEP.2008 18:03:34

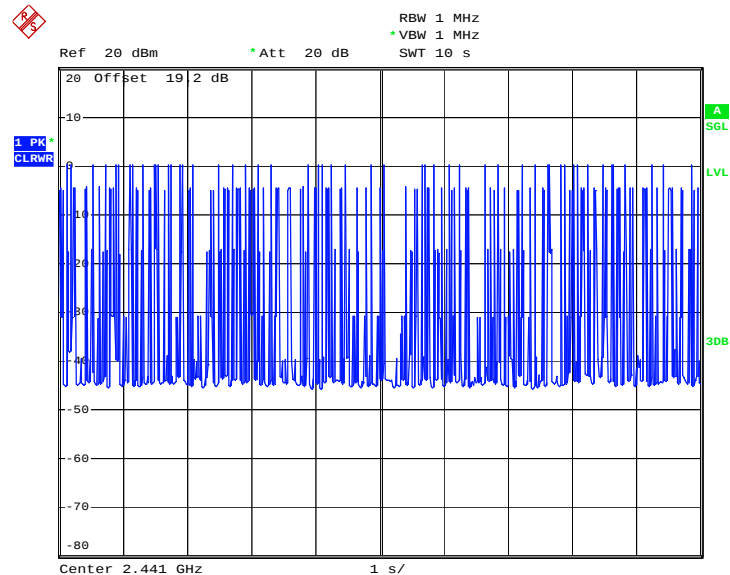2DH3 Dwell Time (Count Pulses) Plot on Channel 39


Date: 22.SEP.2008 18:09:48

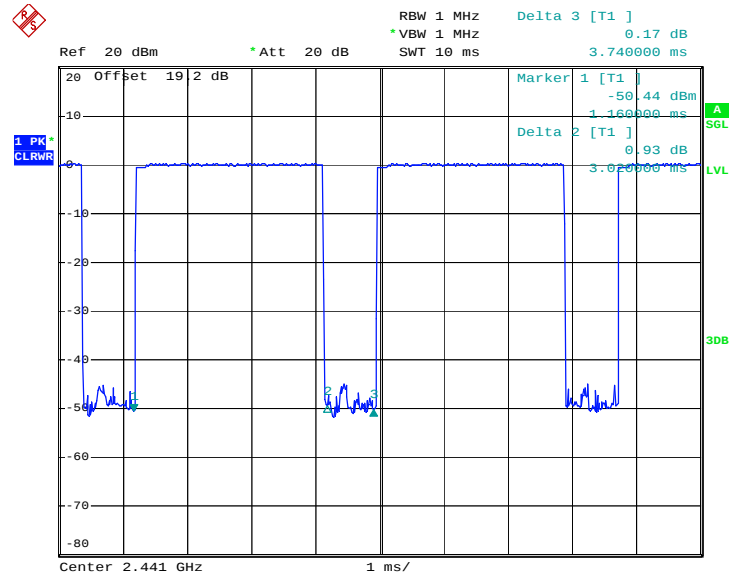2DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 22.SEP.2008 18:04:20

2DH5 Dwell Time (Count Pulses) Plot on Channel 39


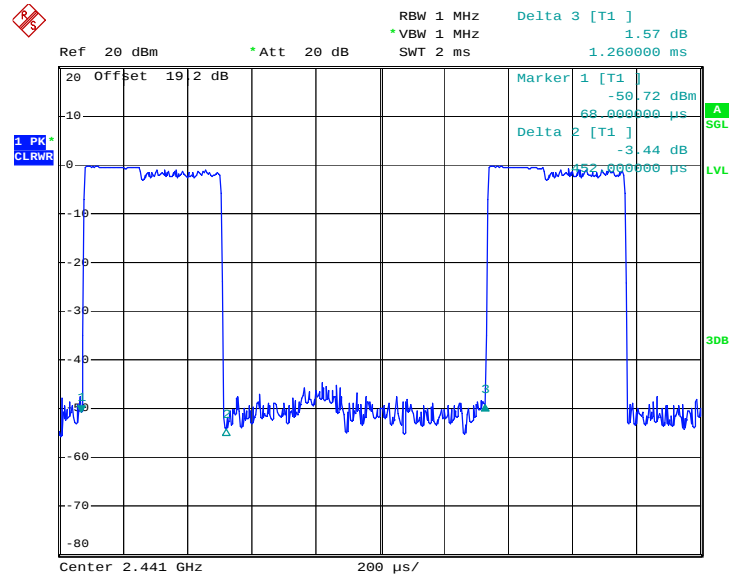
Date: 22.SEP.2008 18:13:13

Test Mode :	Mode 8	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Package Mode	Average Hopping Channel	Package Transfer Time (usec)	Dwell Time (sec)	Limits (sec)	Pass/Fail
3DH1	8.60	452.00	0.123	0.4	Pass
3DH3	5.20	1712.00	0.281	0.4	Pass
3DH5	3.00	3012.00	0.286	0.4	Pass

Remark:


9. Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
10. 79 channels come from the Hopping Channel number.
11. Average Hopping Channel = hops/sweep time
12. t: Package Transfer Time(us)

3DH1 Dwell Time (One Pulse) Plot on Channel 39


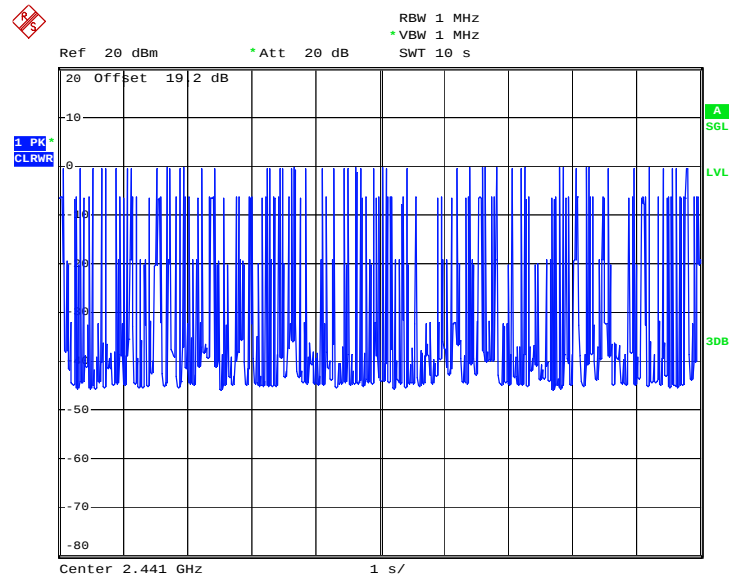
Date: 22.SEP.2008 18:06:13

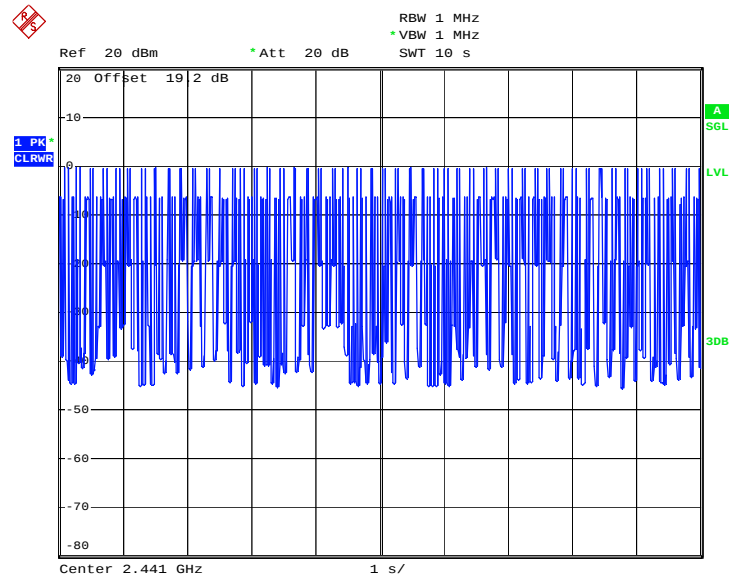3DH1 Dwell Time (Count Pulses) Plot on Channel 39


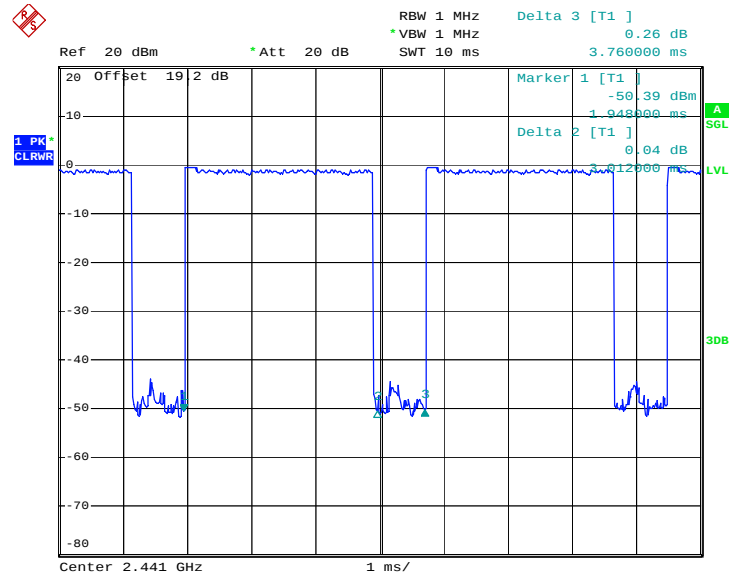
Date: 22.SEP.2008 18:13:39

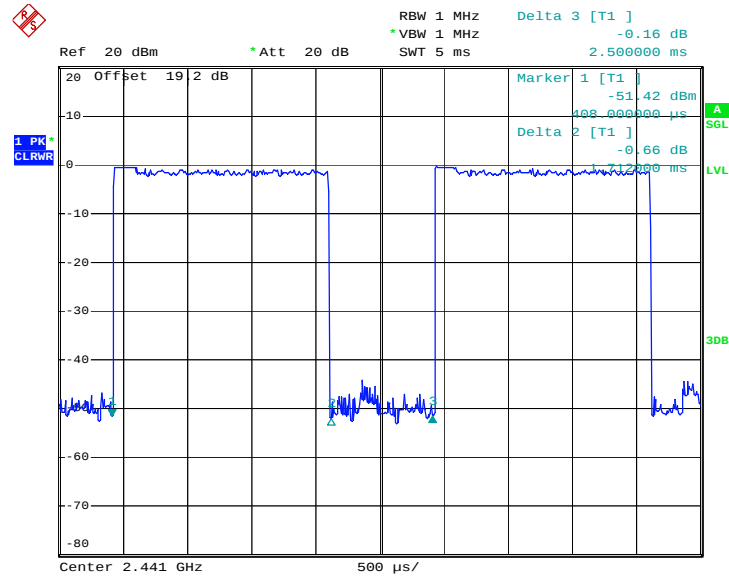3DH3 Dwell Time (One Pulse) Plot on Channel 39


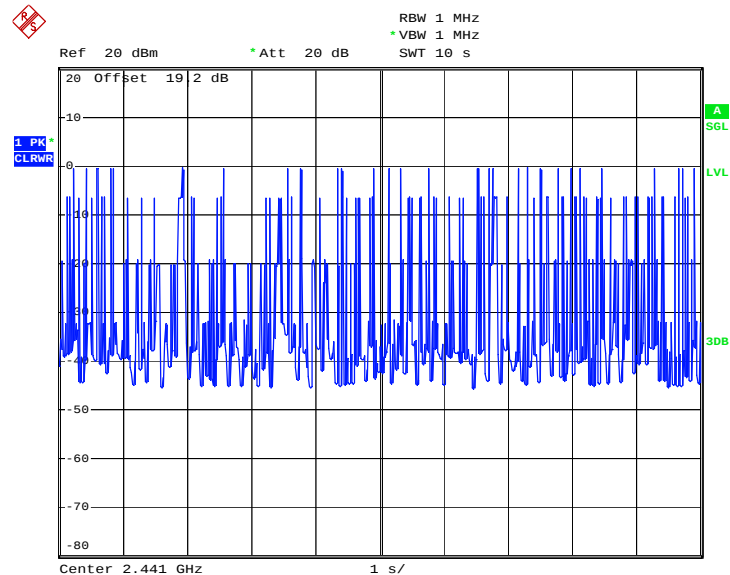
Date: 22.SEP.2008 18:07:23

3DH3 Dwell Time (Count Pulses) Plot on Channel 39


Date: 22.SEP.2008 18:14:20

DH5 Dwell Time (One Pulse) Plot on Channel 39


Date: 22.SEP.2008 18:08:02

DH5 Dwell Time (Count Pulses) Plot on Channel 39


Date: 22.SEP.2008 18:15:16

3.5 Peak Output Power Measurement

3.5.1 Limit of Peak Output Power

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW (20.97dBm).


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures

1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
2. The RF output of EUT was connected to the peak power meter by a low loss cable.

3.5.4 Test Setup

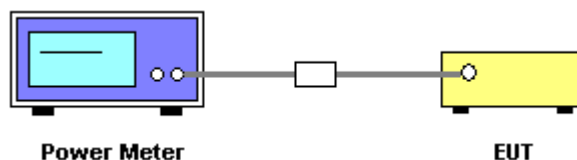


3.5.5 Test Result of Peak Output Power

Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	0.47	20.97	Pass
39	2441	0.63	20.97	Pass
78	2480	1.01	20.97	Pass

Peak Output Power Plot on Channel 00

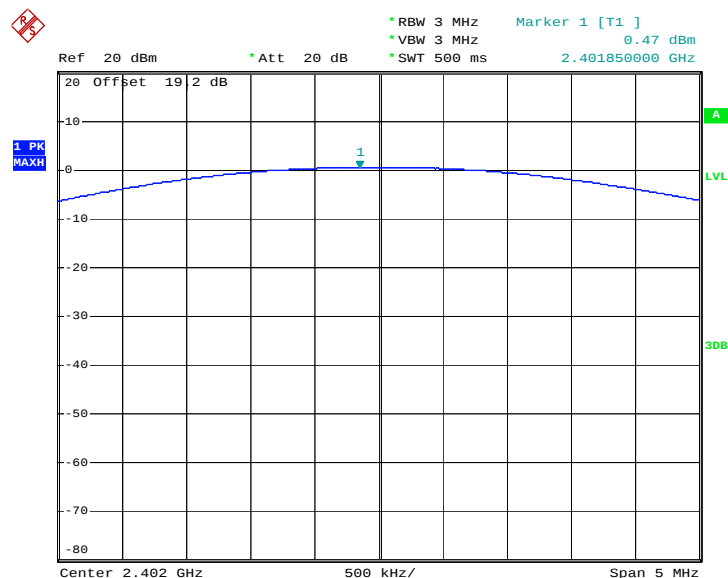


Date: 22.SEP.2008 16:27:49

Peak Output Power Plot on Channel 39

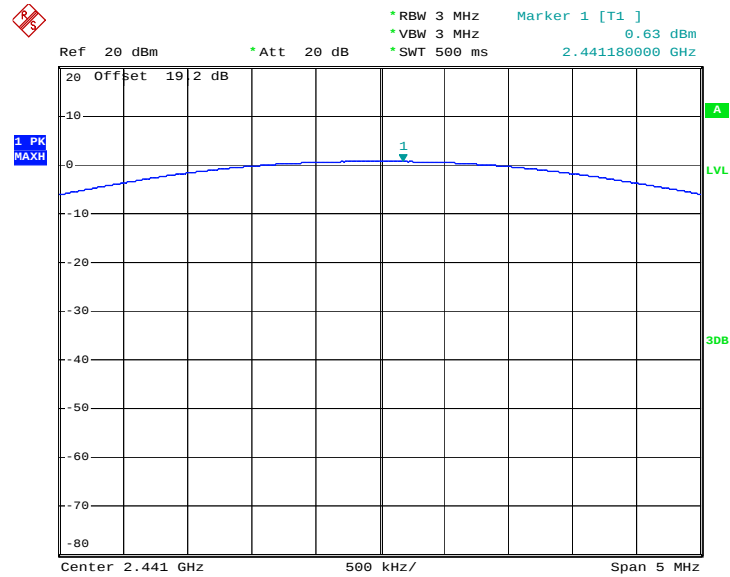

Date: 22.SEP.2008 16:30:05

Peak Output Power Plot on Channel 78

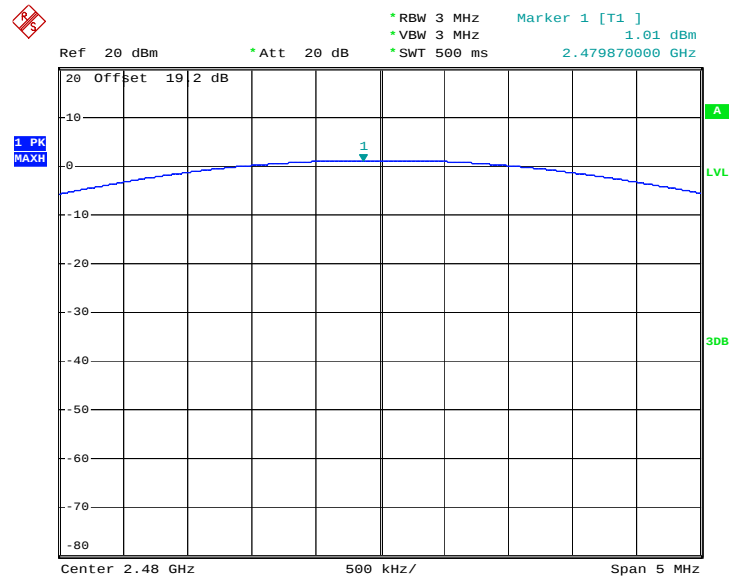


Date: 22.SEP.2008 16:31:37




Test Mode :	Mode 4, 5, 6	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	0.92	20.97	Pass
39	2441	0.97	20.97	Pass
78	2480	1.34	20.97	Pass

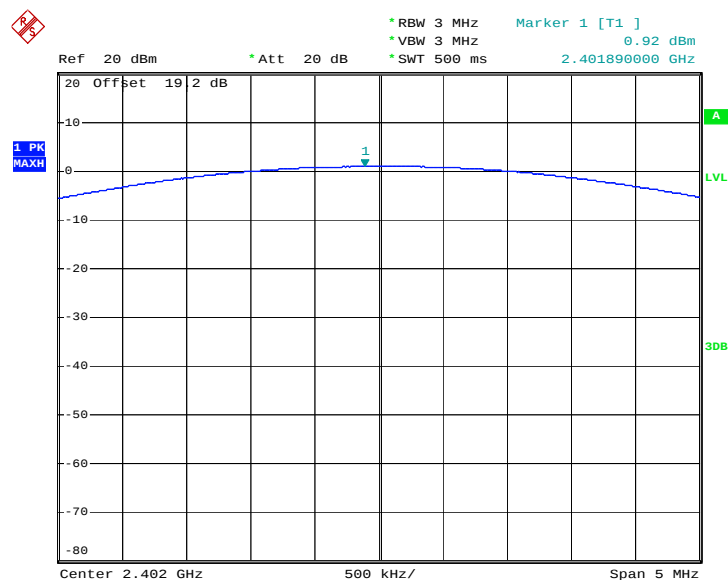Peak Output Power Plot on Channel 00


Date: 22.SEP.2008 16:32:55

Peak Output Power Plot on Channel 39

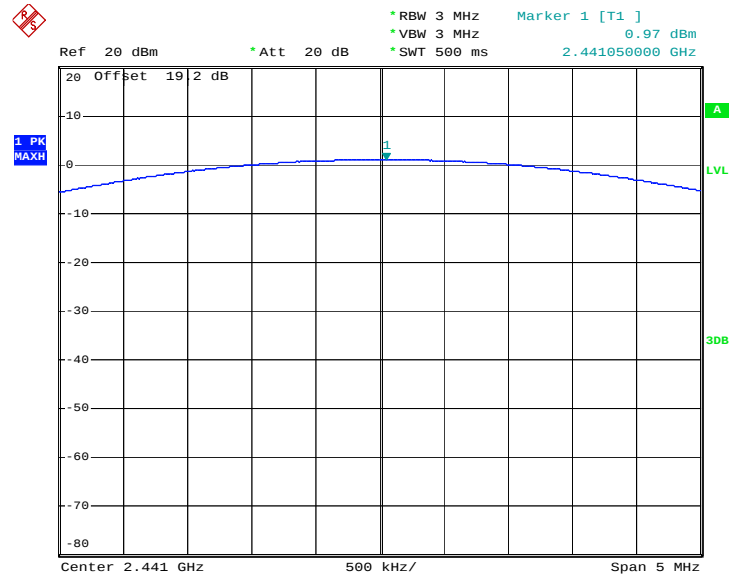

Date: 22.SEP.2008 16:33:40


Peak Output Power Plot on Channel 78

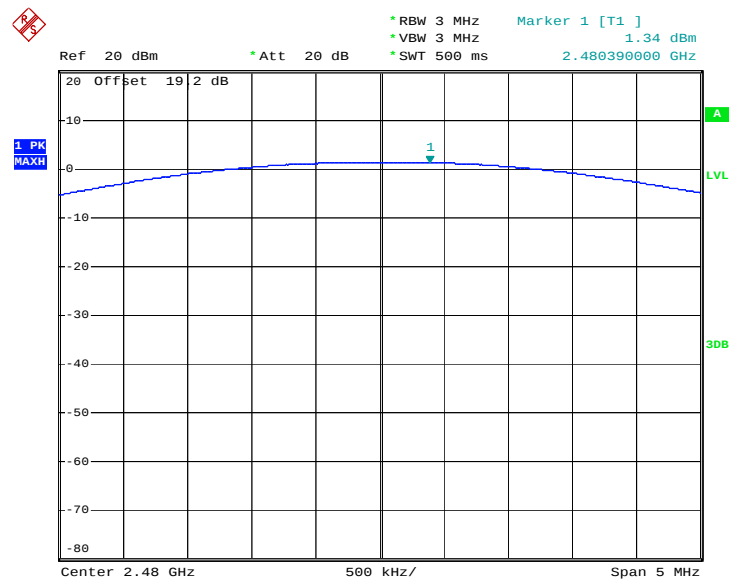

Date: 22.SEP.2008 16:34:47


Test Mode :	Mode 7, 8, 9	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	-0.51	20.97	Pass
39	2441	-0.30	20.97	Pass
78	2480	0.11	20.97	Pass

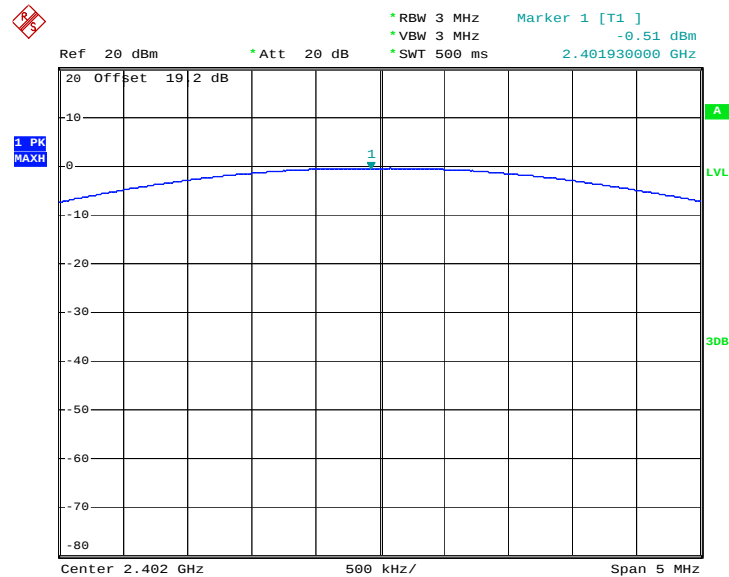Peak Output Power Plot on Channel 00


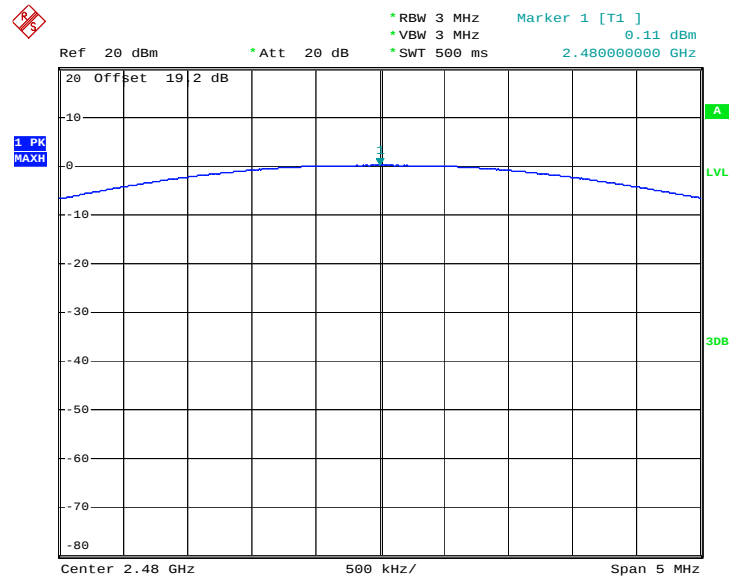
Date: 22.SEP.2008 16:35:26

Peak Output Power Plot on Channel 39

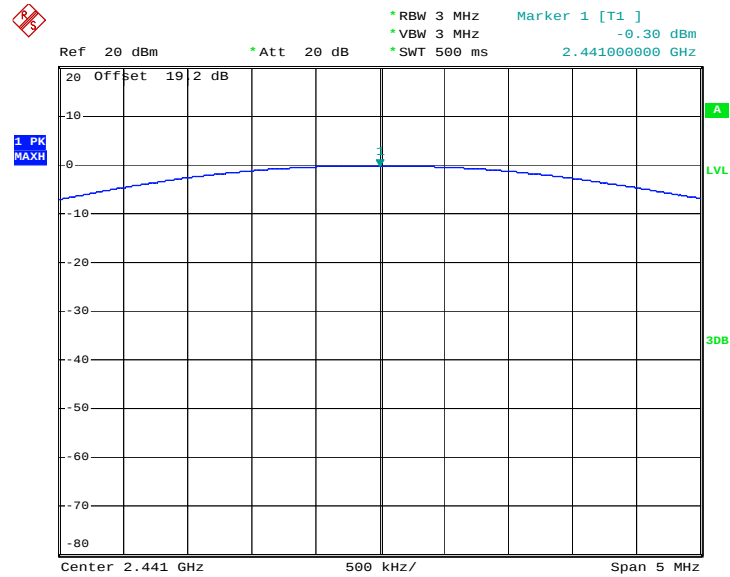

Date: 22.SEP.2008 16:36:09

Peak Output Power Plot on Channel 78



Date: 22.SEP.2008 16:37:06

3.6 Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures

1. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines.
2. RF antenna conducted test: Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. Bandedge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Applies to bandedge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See FCC Section 15.35(b) and (c).

3.6.4 Test Setup

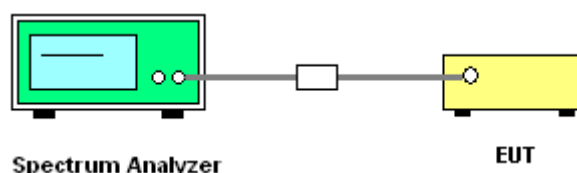

3.6.5 Test Result of Radiated Band Edges

Test Mode :	Mode 4	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Sun Wang		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2389.42	53.13	-20.87	74.00	52.91	31.98	3.92	35.68	100	0	Peak
2389.42	12.56	-41.44	54.00	12.34	31.98	3.92	35.68	138	336	Average

Remark:

<Delta Marker>

Delta marker at 1% RBW of span = 43.05 dB

Peak band edge at 2389.42 MHz (RBW = VBW = 1MHz) = 96.18 dBuV/m – 43.05 dB = 53.13 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.0031 x 3.2) = -40.57

Average band edge = Peak band edge + Duty factor = 53.13 dBuV/m + (-40.57) = 12.56 dBuV/m

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2386.57	48.70	-25.30	74.00	48.48	31.98	3.92	35.68	100	0	Peak
2386.57	8.13	-45.87	54.00	7.91	31.98	3.92	35.68	124	53	Average

Remark:

<Delta Marker>

Delta marker at 1% RBW of span = 43.05 dB

Peak band edge at 2386.57 MHz (RBW = VBW = 1MHz) = 91.75 dBuV/m – 43.05 dB = 48.70 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.0031 x 3.2) = -40.57

Average band edge = Peak band edge + Duty factor = 48.70 dBuV/m + (-40.57) = 8.13 dBuV/m



Test Mode :	Mode 6	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Sun Wang		

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	53.44	-20.56	74.00	53.01	32.08	4.05	35.70	100	0	Peak
2483.50	12.87	-41.13	54.00	12.44	32.08	4.05	35.70	100	5	Average

Remark:

<Delta Marker>

Delta marker at 1% RBW of span = 45.82 dB

Peak band edge at 2483.5 MHz (RBW = VBW = 1MHz) = 99.26 dBuV/m – 45.82 dB = 53.44 dBuV/m

Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.0031 x 3.2) = -40.57

Average band edge = Peak band edge + Duty factor = 53.44 dBuV/m + (-40.57) dB = 12.87 dBuV/m

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dBuV/m)	Over Limit (dB)	Limit Line (dBuV/m)	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.50	49.77	-24.23	74.00	49.34	32.08	4.05	35.70	100	0	Peak
2483.50	9.20	-44.80	54.00	8.77	32.08	4.05	35.70	128	194	Average

Remark:

<Delta Marker>

Delta marker at 1% RBW of span = 45.82 dB

Peak band edge at 2483.5 MHz (RBW = VBW = 1MHz) = 95.59 dBuV/m – 45.82 dB = 49.77 dBuV/m


Duty factor = 20 log (Package Transfer Times x Avg Hopping Channel) = 20 log (0.0031 x 3.2) = -40.57

Average band edge = Peak band edge + Duty factor = 49.77 dBuV/m + (-40.57) dB = 9.20 dBuV/m

3.6.6 Test Result of Conducted Band Edges


Test Mode :	Mode 4	Temperature :	24~25℃
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Ken Hsu		

Low Band Edge Plot on Channel 00

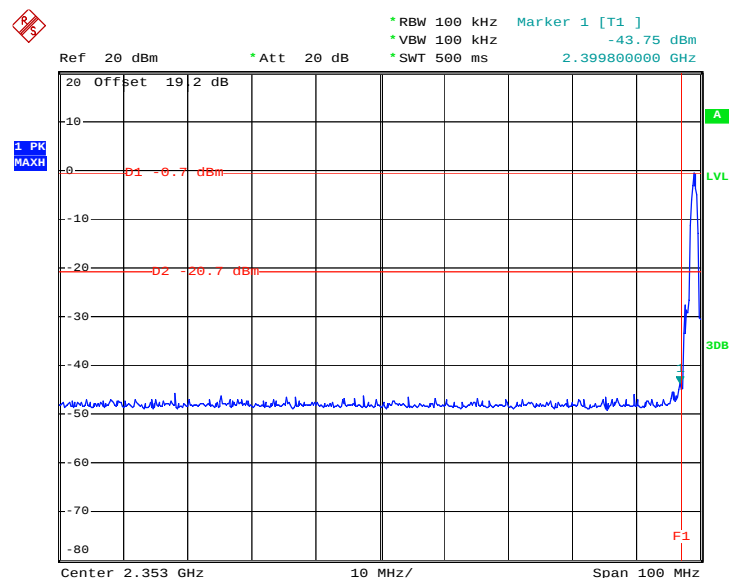

Date: 22.SEP.2008 17:16:03

Test Mode :	Mode 6	Temperature :	24~25℃
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Ken Hsu		

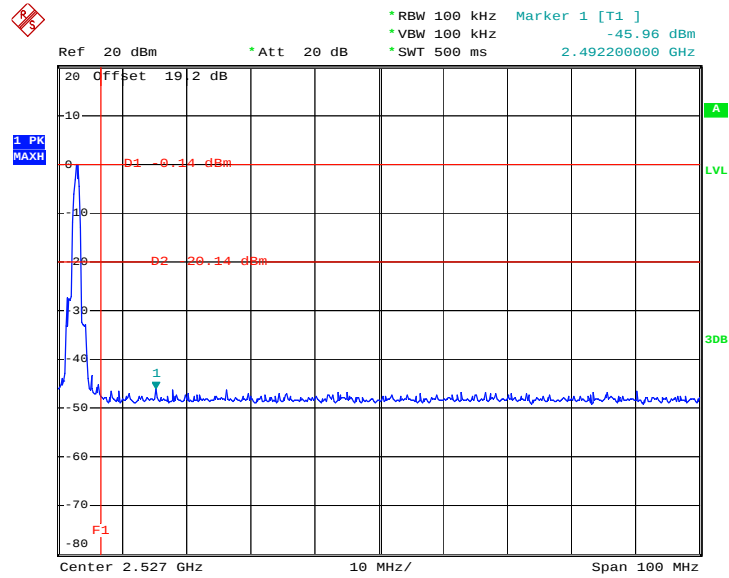High Band Edge Plot on Channel 78


Date: 22.SEP.2008 17:42:46

3.7 Power Spectral Density Measurement

3.7.1 Limit of Power Spectral Density Measurement

The peak power spectral density shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.


3.7.2 Measuring Instruments

See list of measuring instruments of this test report.

3.7.3 Test Procedure

1. The transmitter output was connected to spectrum analyzer directly.
2. The spectrum analyzer's resolution bandwidth was set RBW at 3kHz and VBW at 30kHz of the fundamental frequency. Set the sweep time=span/3kHz.
3. The power spectral density was measured and recorded.
4. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

3.7.4 Test Setup

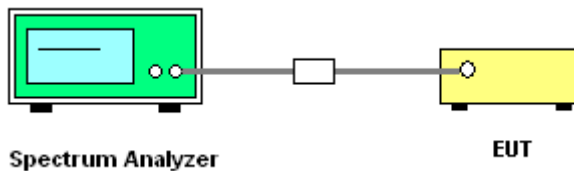


3.7.5 Test Result

Test Mode :	Mode 1, 2, 3	Temperature :	24~25℃
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Max. Limits (dBm)	Pass/Fail
00	2402	-10.35	8	Pass
39	2441	-10.26	8	Pass
78	2480	-9.77	8	Pass


Power Spectral Density Plot on Channel 00

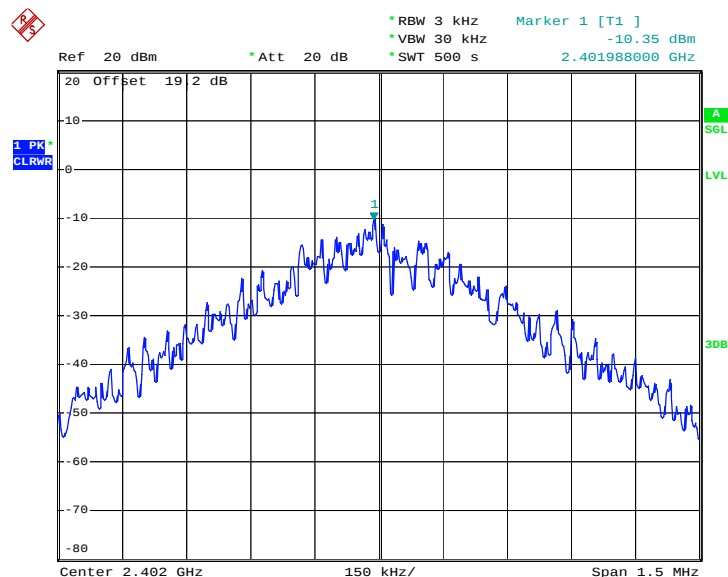

Date: 8.OCT.2008 12:13:30




Power Spectral Density Plot on Channel 39

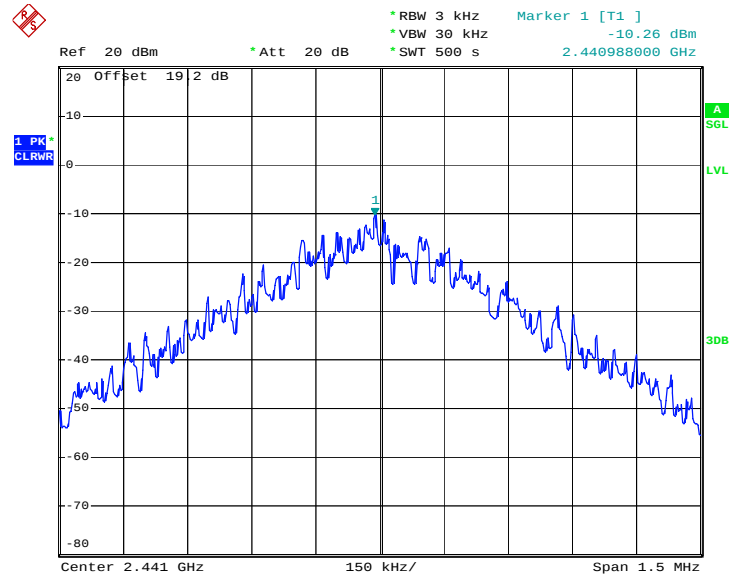

Date: 8.OCT.2008 13:00:48

Power Spectral Density Plot on Channel 78

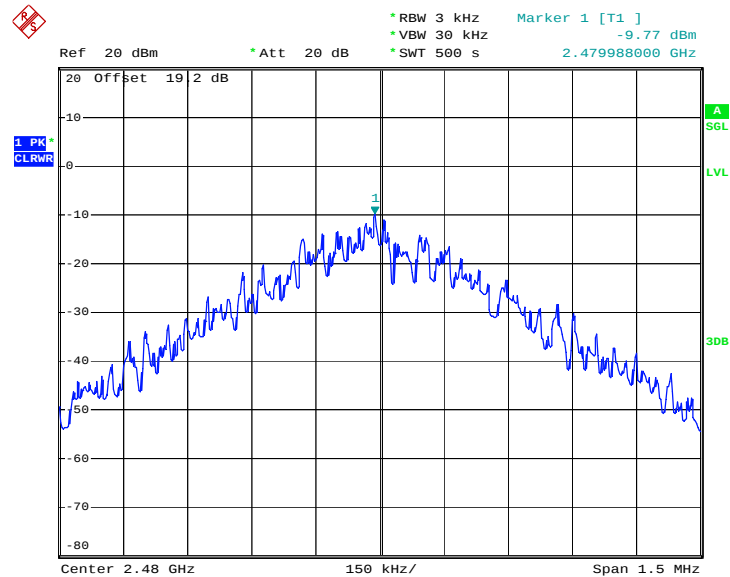


Date: 8.OCT.2008 13:31:52




Test Mode :	Mode 4, 5, 6	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Max. Limits (dBm)	Pass/Fail
00	2402	-11.19	8	Pass
39	2441	-11.01	8	Pass
78	2480	-10.49	8	Pass

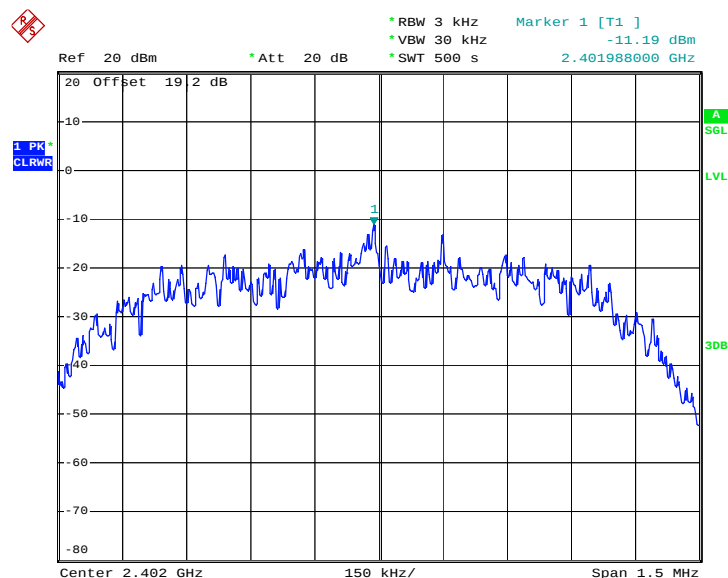Power Spectral Density Plot on Channel 00

Date: 8.OCT.2008 12:23:59

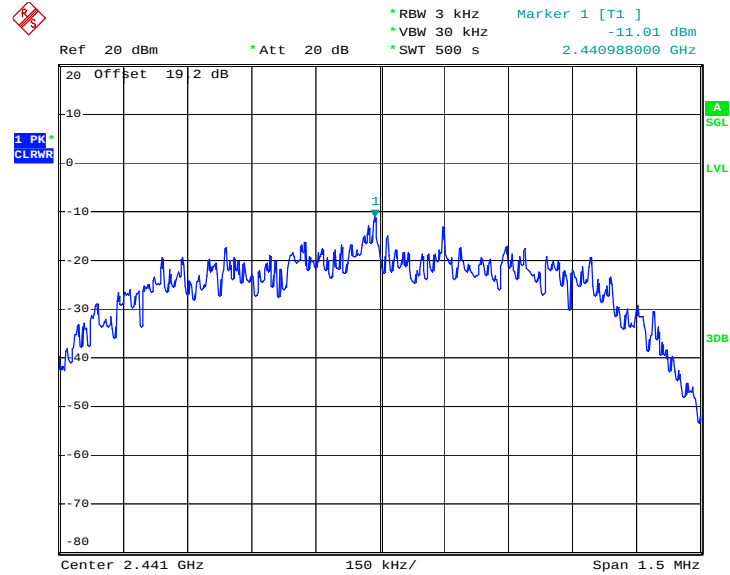Power Spectral Density Plot on Channel 39


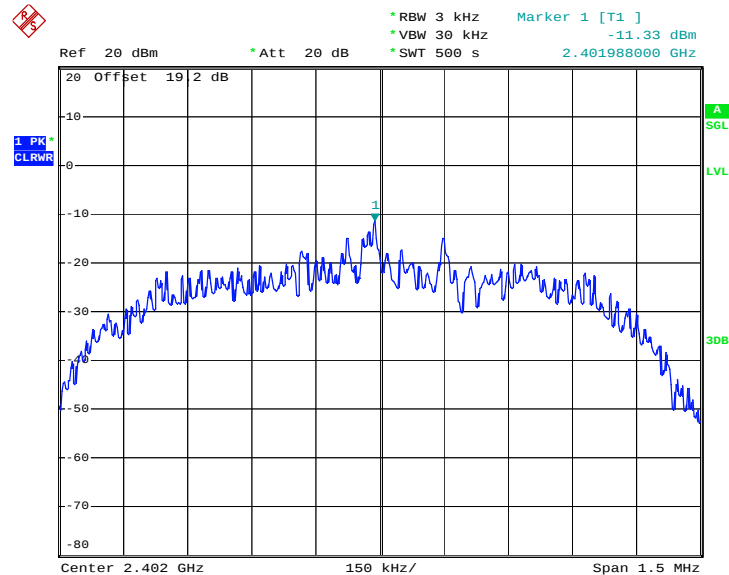
Date: 8.OCT.2008 13:09:34

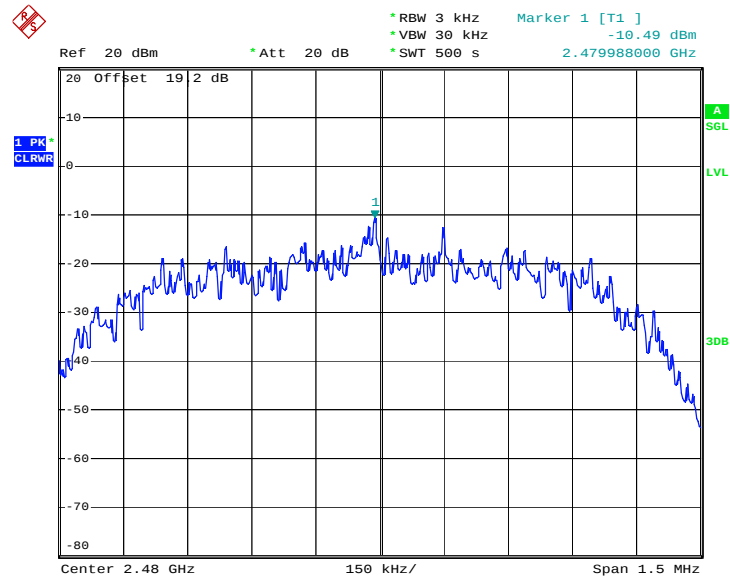Power Spectral Density Plot on Channel 78


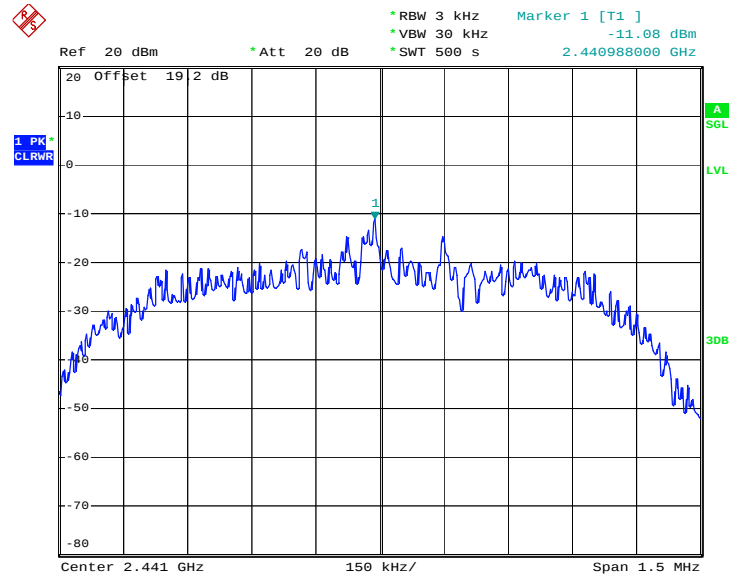
Date: 8.OCT.2008 13:44:23

Test Mode :	Mode 7, 8, 9	Temperature :	24~25°C
Test Engineer :	Ken Hsu	Relative Humidity :	51~53%


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Max. Limits (dBm)	Pass/Fail
00	2402	-11.33	8	Pass
39	2441	-11.08	8	Pass
78	2480	-10.58	8	Pass

Power Spectral Density Plot on Channel 00


Date: 8.OCT.2008 12:51:25

Power Spectral Density Plot on Channel 39


Date: 8.OCT.2008 13:18:43

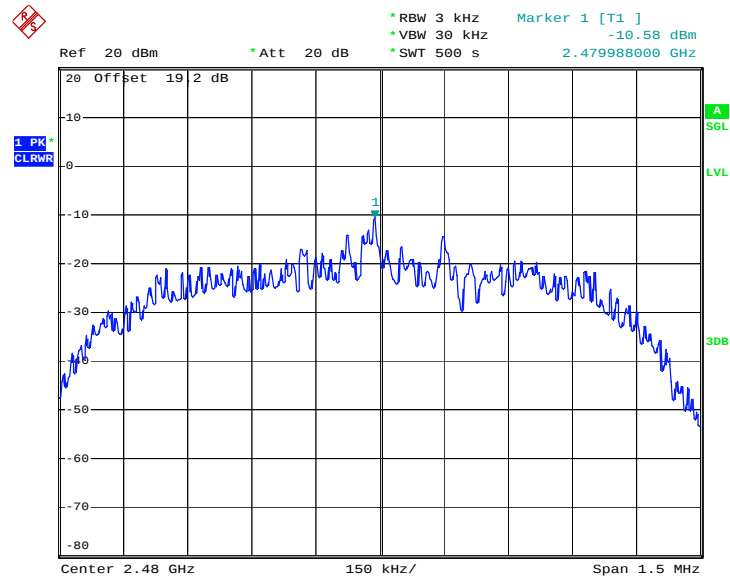Power Spectral Density Plot on Channel 78


Date: 8.OCT.2008 13:53:05

3.8 AC Conducted Emission Measurement

3.8.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.8.2 Measuring Instruments

See list of measuring instruments of this test report.

3.8.3 Test Procedures


1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.8.4 Test Setup

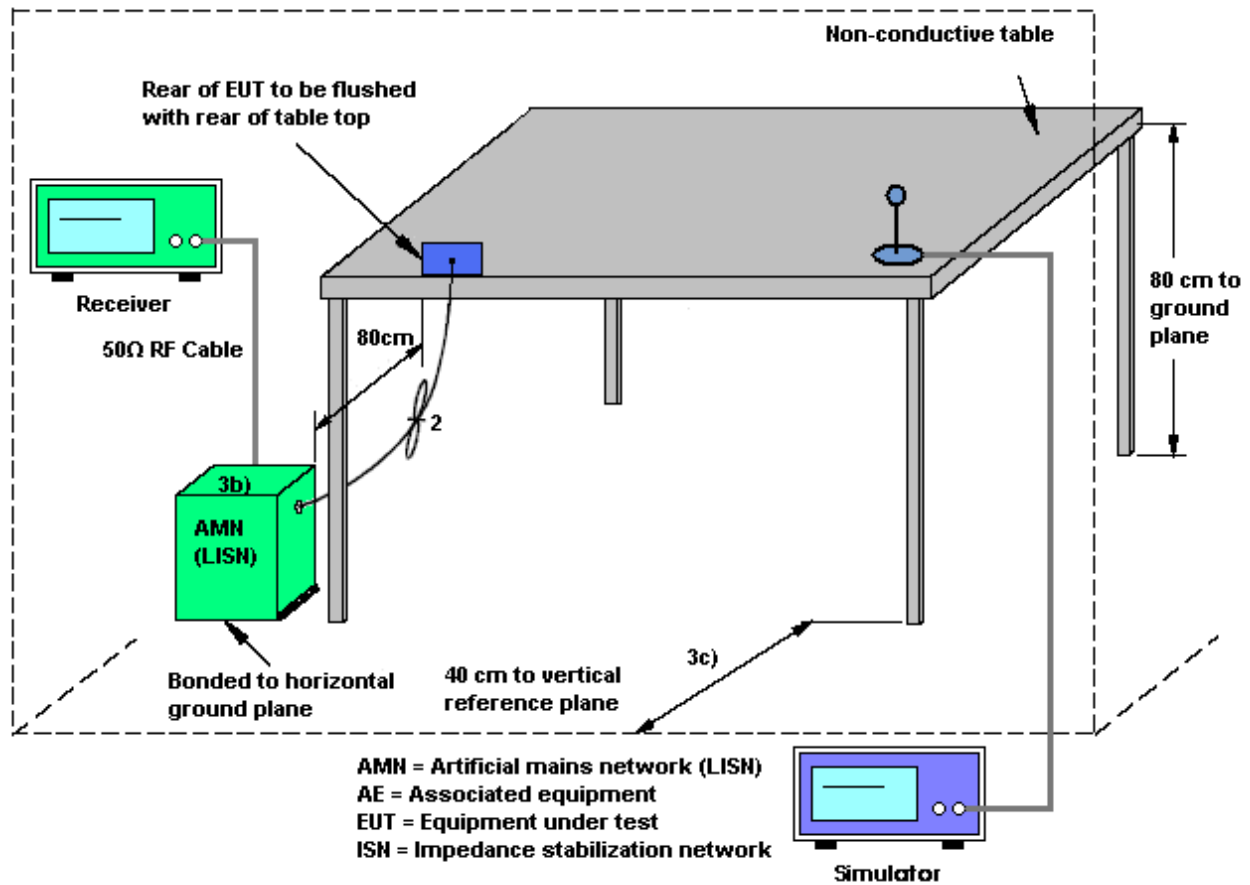

3.8.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	24~25℃
Test Engineer :	Cona Huang	Relative Humidity :	52~53%
		Phase :	Line
Function Type :	BT Link + GPS Rx + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

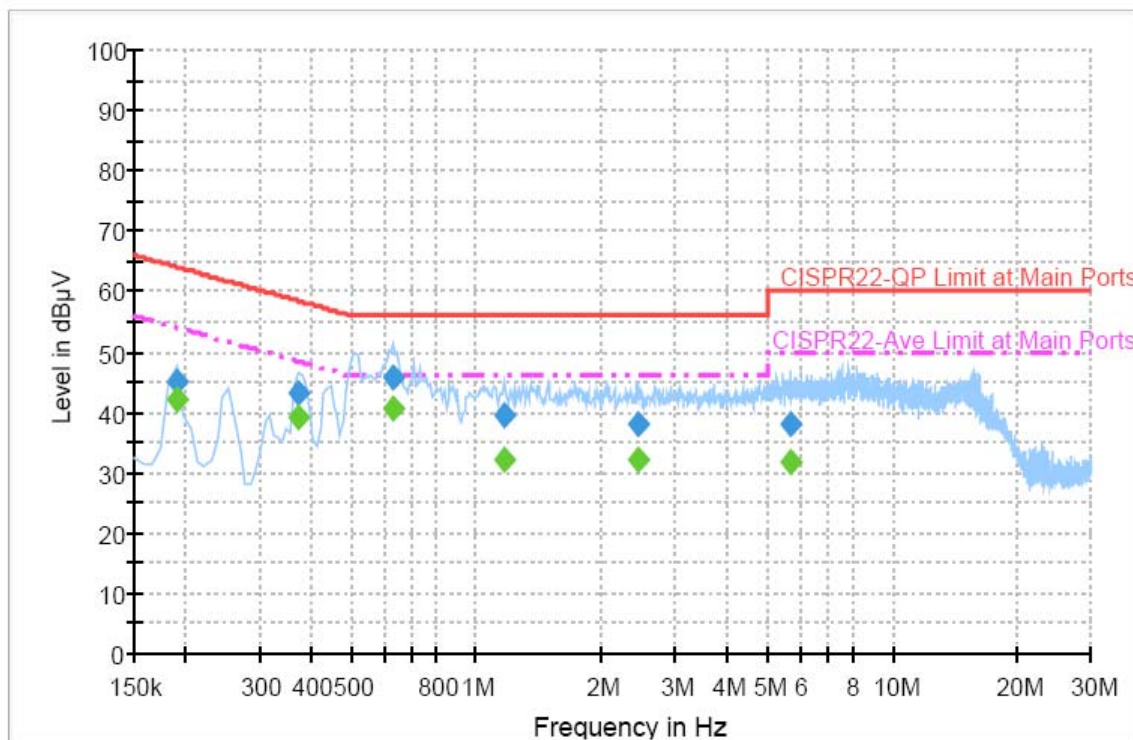


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	45.0	Off	L1	19.4	19.0	64.0
0.374000	43.0	Off	L1	19.4	15.4	58.4
0.630000	45.8	Off	L1	19.4	10.2	56.0
1.166000	39.5	Off	L1	19.4	16.5	56.0
2.454000	38.0	Off	L1	19.5	18.0	56.0
5.702000	38.0	Off	L1	19.5	22.0	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.190000	42.1	Off	L1	19.4	11.9	54.0
0.374000	39.2	Off	L1	19.4	9.2	48.4
0.630000	40.6	Off	L1	19.4	5.4	46.0
1.166000	32.1	Off	L1	19.4	13.9	46.0
2.454000	32.0	Off	L1	19.5	14.0	46.0
5.702000	31.8	Off	L1	19.5	18.2	50.0

Test Mode :	Mode 1	Temperature :	24~25°C
Test Engineer :	Cona Huang	Relative Humidity :	52~53%
		Phase :	Neutral
Function Type :	BT Link + GPS Rx + Earphone + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

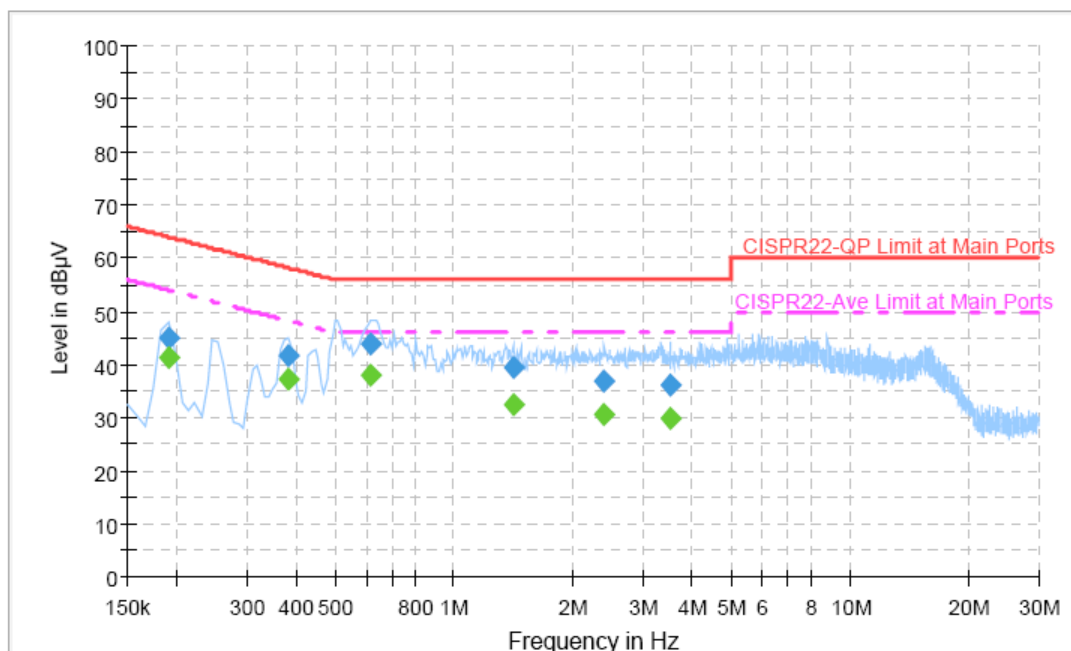
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	45.0	Off	N	19.4	19.0	64.0
0.382000	41.8	Off	N	19.4	16.4	58.2
0.614000	44.1	Off	N	19.4	11.9	56.0
1.414000	39.5	Off	N	19.4	16.5	56.0
2.398000	37.1	Off	N	19.5	18.9	56.0
3.534000	36.3	Off	N	19.5	19.7	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	41.2	Off	N	19.4	12.8	54.0
0.382000	37.3	Off	N	19.4	10.9	48.2
0.614000	37.9	Off	N	19.4	8.1	46.0
1.414000	32.4	Off	N	19.4	13.6	46.0
2.398000	30.7	Off	N	19.5	15.3	46.0
3.534000	29.8	Off	N	19.5	16.2	46.0

3.9 Radiated Emission Measurement

3.9.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.9.2 Measuring Instruments


See list of measuring instruments of this test report.

3.9.3 Test Procedures


1. The testing follows the guidelines in FCC Public Notice DA 00-705 Measurement Guidelines.
2. Use the following spectrum analyzer settings:
Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.9.4 Test Setup

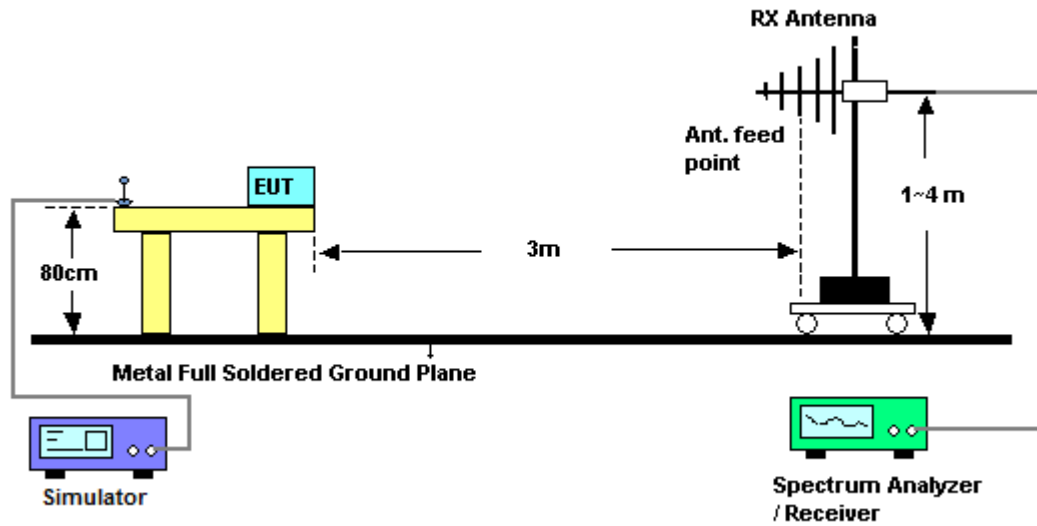


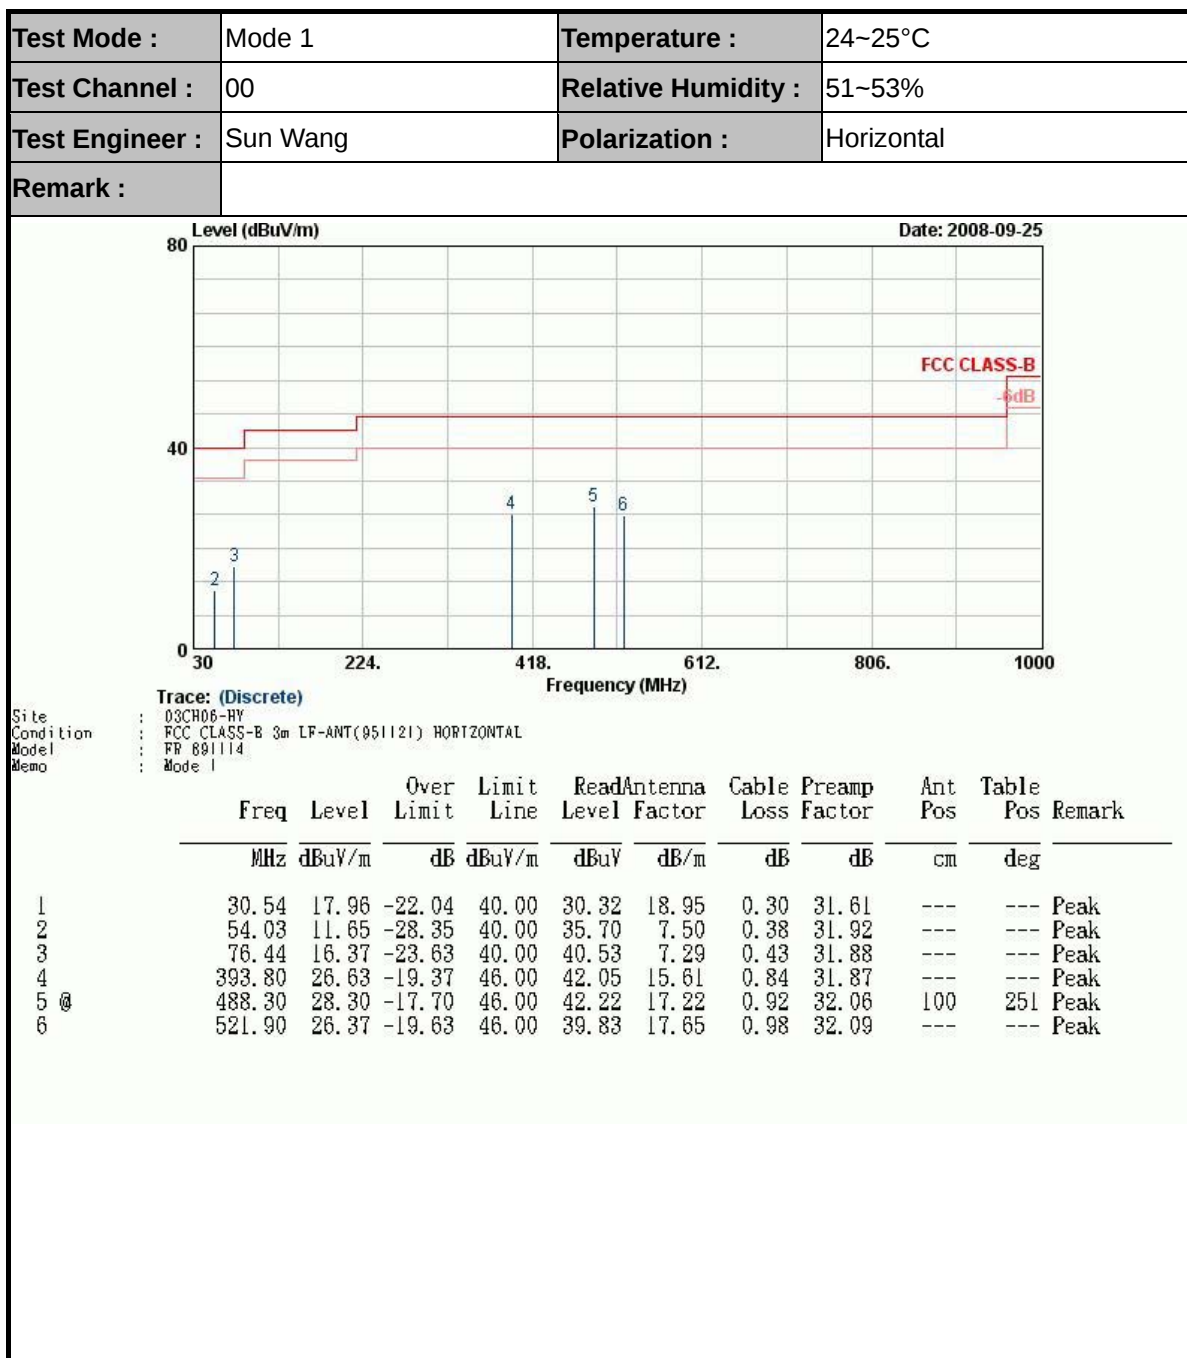3.9.5 Test Result of Radiated Emission < 1GHz


Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :			

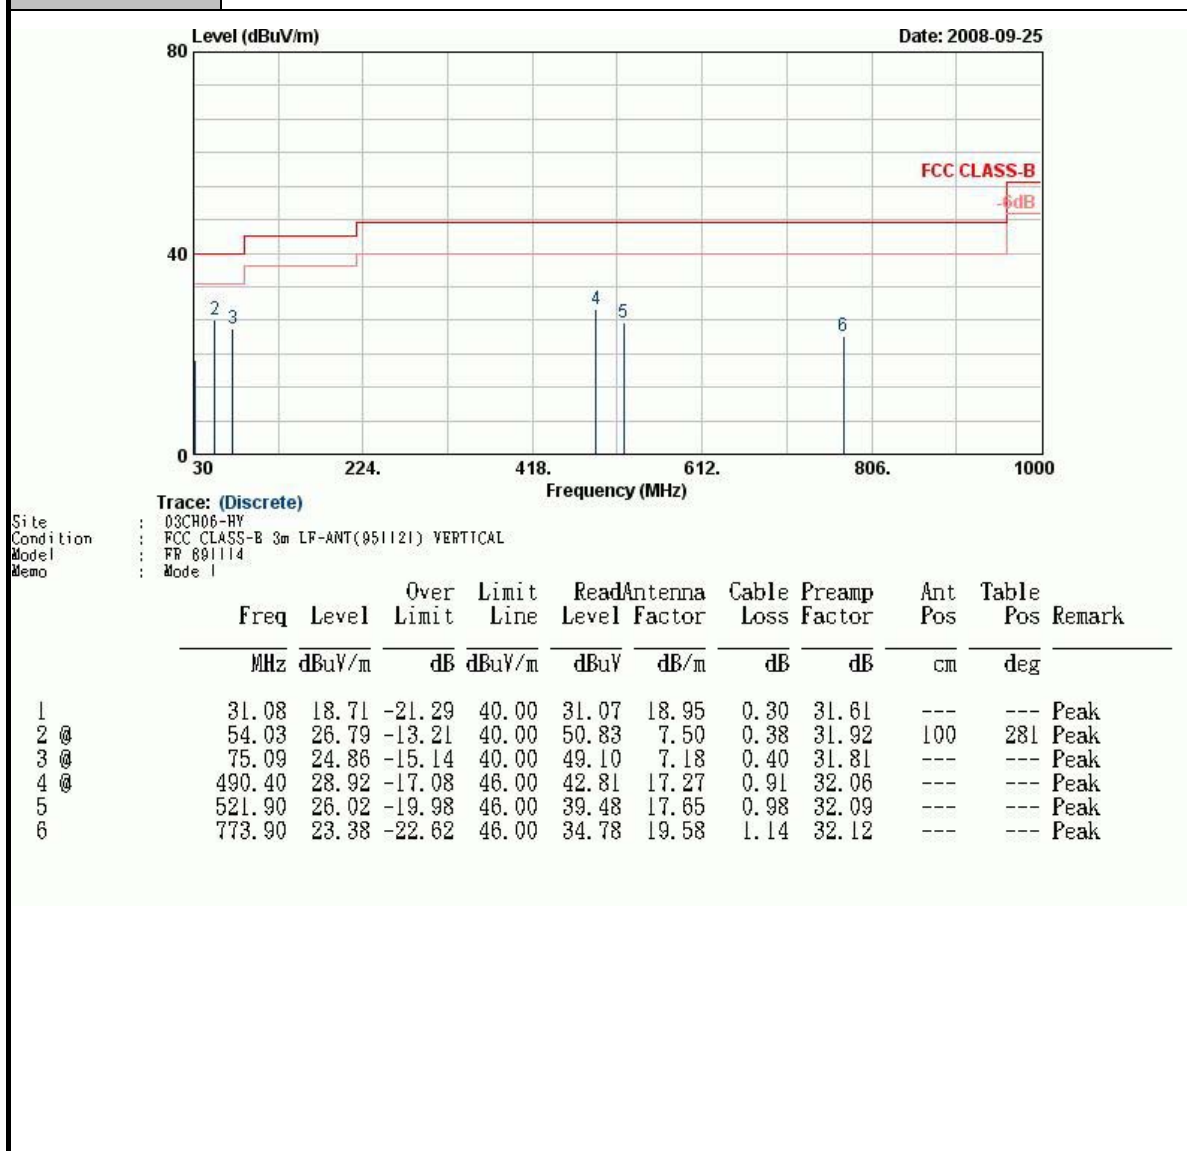


Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Horizontal
Remark :			

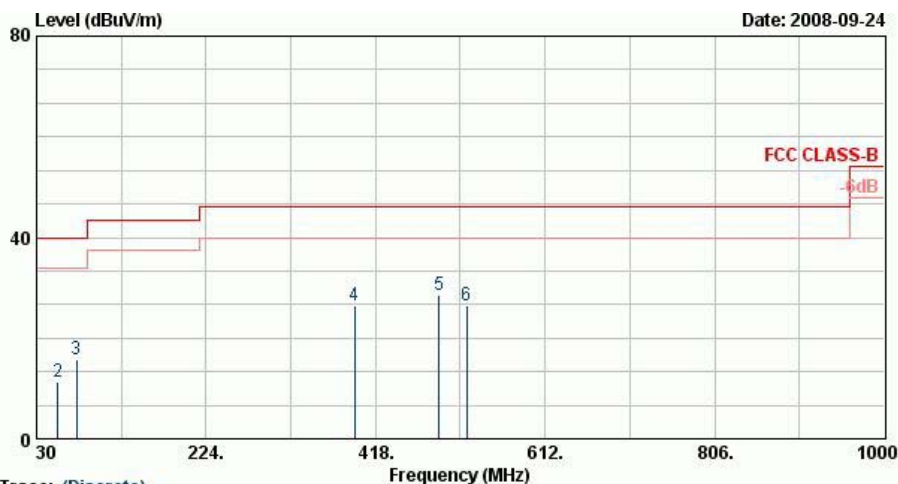
Trace: (Discrete)

Site : 03CH06-HY
Condition : FCC CLASS-B 3m LF-ANT(951121) HORIZONTAL
Model : FR 891114
Memo : Mode 2

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	30.54	18.76	-21.24	40.00	31.12	18.95	0.30	31.61	---	---	Peak
2	54.03	11.28	-28.72	40.00	35.33	7.50	0.38	31.92	---	---	Peak
3	75.63	15.80	-24.20	40.00	40.00	7.23	0.42	31.85	---	---	Peak
4	393.80	26.53	-19.47	46.00	41.95	15.61	0.84	31.87	---	---	Peak
5	490.40	28.65	-17.35	46.00	42.53	17.27	0.91	32.06	100	105	Peak
6	521.90	26.35	-19.65	46.00	39.81	17.65	0.98	32.09	---	---	Peak

Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :			

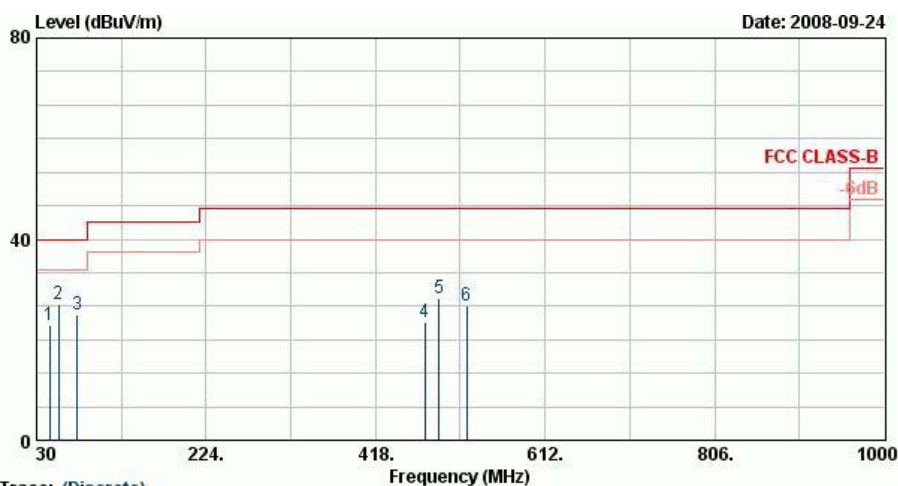


Trace: (Discrete)


Site : 03CH06-HY
Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
Model : FR 891114
Memo : Mode 2

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	44.58	22.88	-17.12	40.00	43.28	11.02	0.30	31.72	---	Peak
2	54.84	26.93	-13.07	40.00	51.08	7.35	0.40	31.90	100	245 Peak
3	76.44	25.00	-15.00	40.00	49.16	7.29	0.43	31.88	---	Peak
4	474.30	23.48	-22.52	46.00	37.60	17.00	0.94	32.05	---	Peak
5	490.40	28.33	-17.67	46.00	42.22	17.27	0.91	32.06	---	Peak
6	521.90	26.85	-19.15	46.00	40.31	17.65	0.98	32.09	---	Peak

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Horizontal
Remark :			

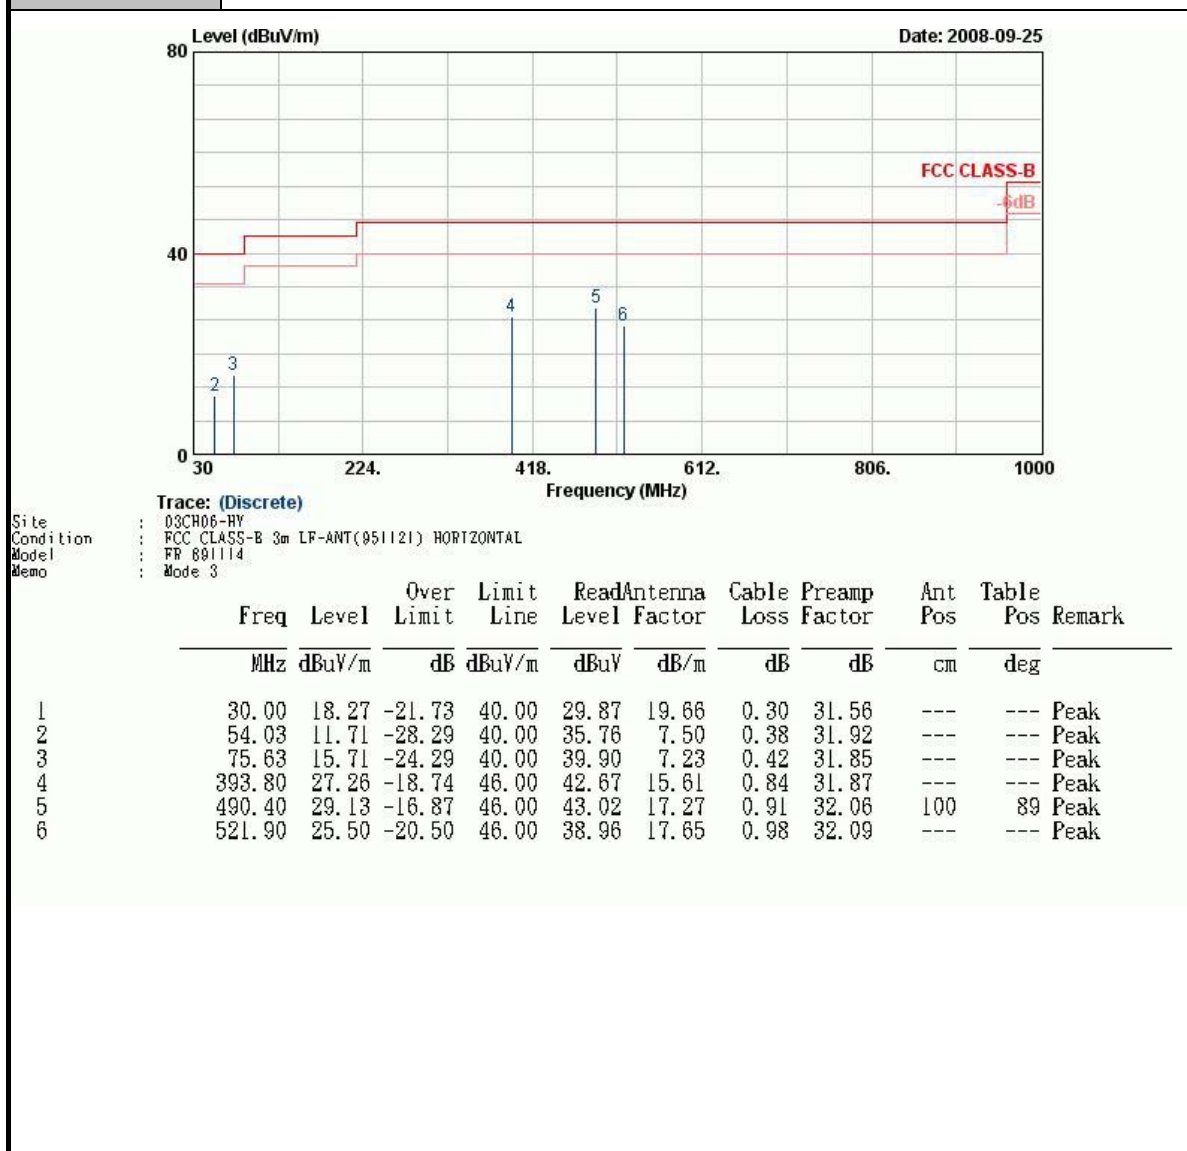

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :			

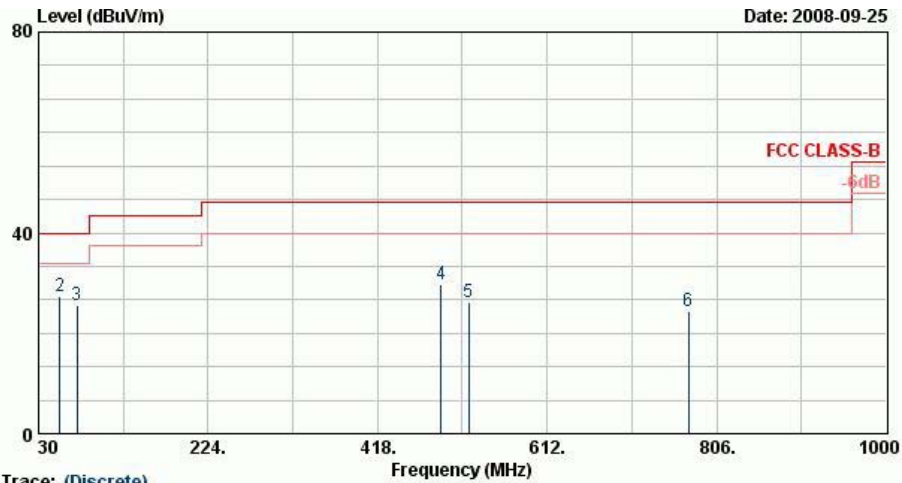


Trace: (Discrete)

Site : 03CH06-HY
Condition : FCC CLASS-B 3m LF-ANT(951121) VERTICAL
Model : FR 891114
Memo : Mode 3

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	30.00	19.01	-20.99	40.00	30.61	19.66	0.30	31.56	---	---
2	54.03	27.31	-12.69	40.00	51.35	7.50	0.38	31.92	100	305
3	74.28	25.47	-14.53	40.00	49.71	7.18	0.40	31.81	---	---
4	490.40	29.65	-16.35	46.00	43.54	17.27	0.91	32.06	---	---
5	521.90	26.19	-19.81	46.00	39.65	17.65	0.98	32.09	---	---
6	773.90	24.25	-21.75	46.00	35.65	19.58	1.14	32.12	---	---

3.9.6 Test Result of Radiated Emission $\geq 1\text{GHz}$


Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Horizontal
Remark :	#3 and #4 are Fundamental Signals		

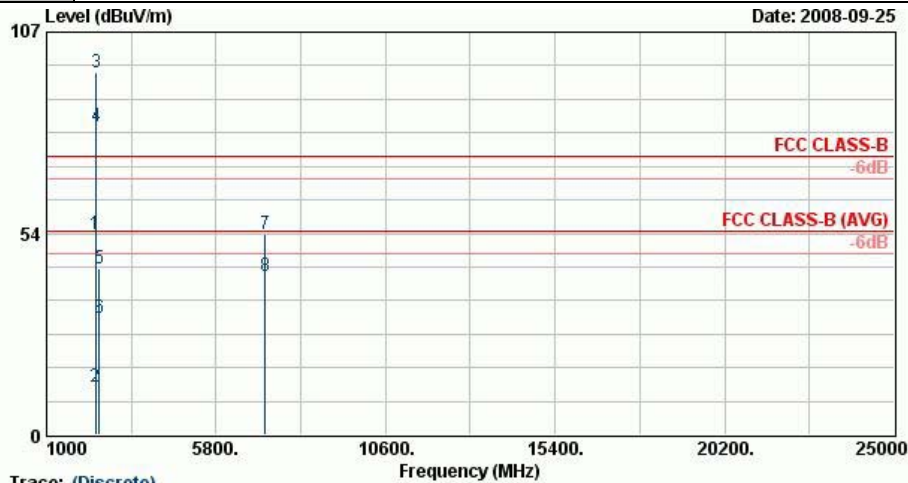


Site : 03CH06-RY
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Model : FR 891114
Memo : Mode 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2389.42	53.13	-20.87	74.00	52.91	31.98	3.92	35.68	100	0	Peak
2	2389.42	12.56	-41.44	54.00	12.34	31.98	3.92	35.68	138	336	Average
3 @	2402.00	96.18			95.94	32.00	3.92	35.68	100	0	Peak
4 @	2402.00	81.77			81.55	31.98	3.92	35.68	138	336	Average
5	2492.00	44.08	-29.92	74.00	43.63	32.10	4.05	35.70	100	0	Peak
6	2492.00	30.85	-23.15	54.00	30.40	32.10	4.05	35.70	138	336	Average
7	7191.00	53.42	-20.58	74.00	46.72	35.62	7.16	36.08	100	0	Peak
8 @	7191.00	42.32	-11.68	54.00	35.62	35.62	7.16	36.08	100	125	Average

Test Mode :	Mode 1	Temperature :	24~25°C
Test Channel :	00	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :	#3 and #4 are Fundamental Signals		

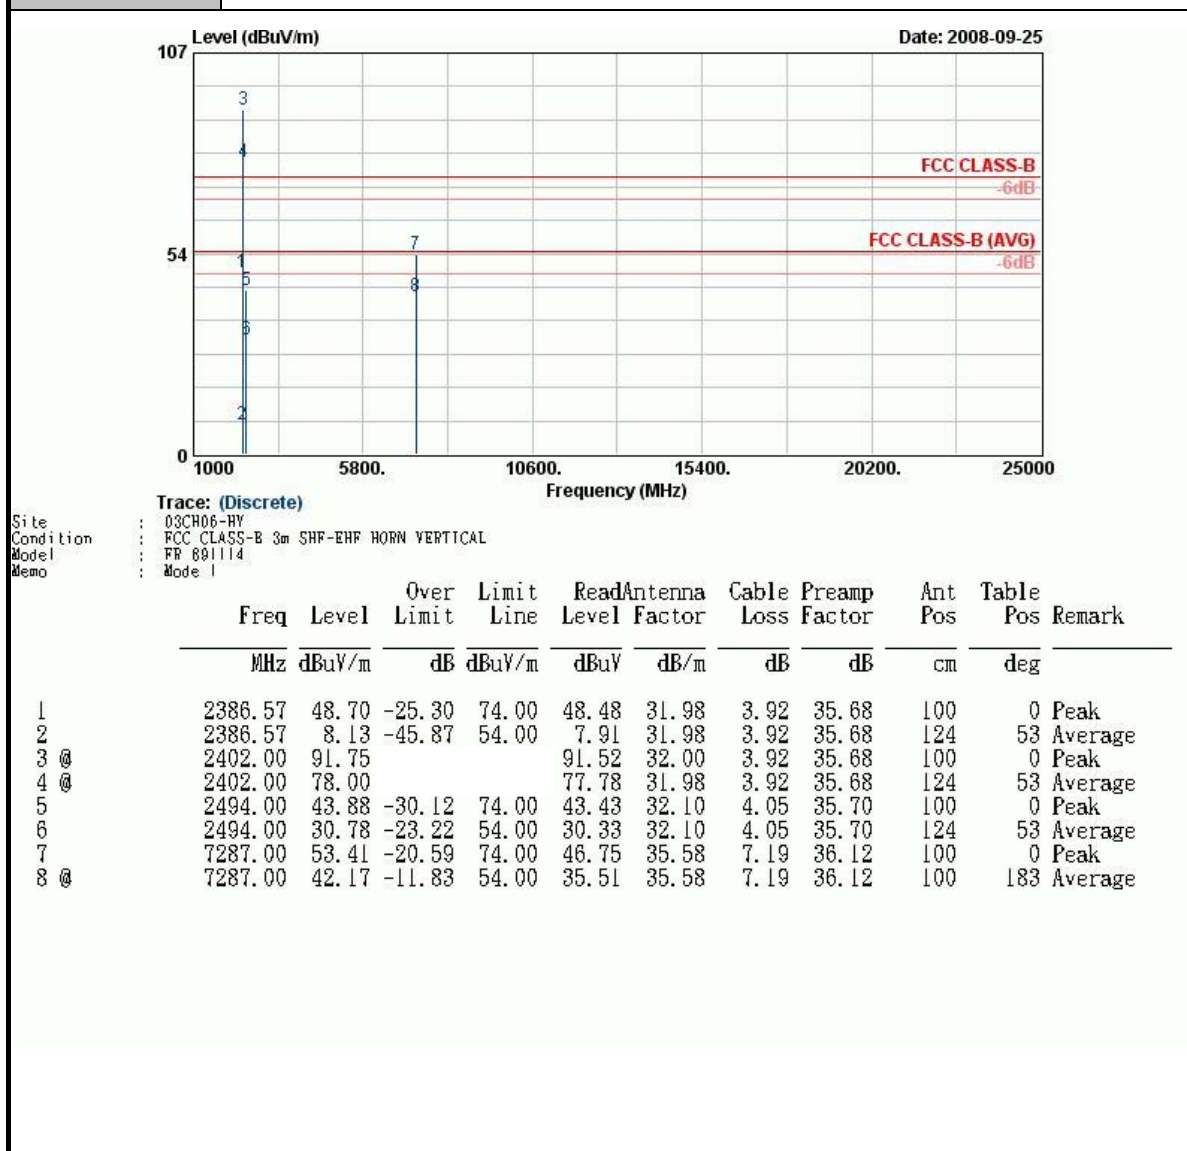

Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Horizontal
Remark :	#3 and #4 are Fundamental Signals		

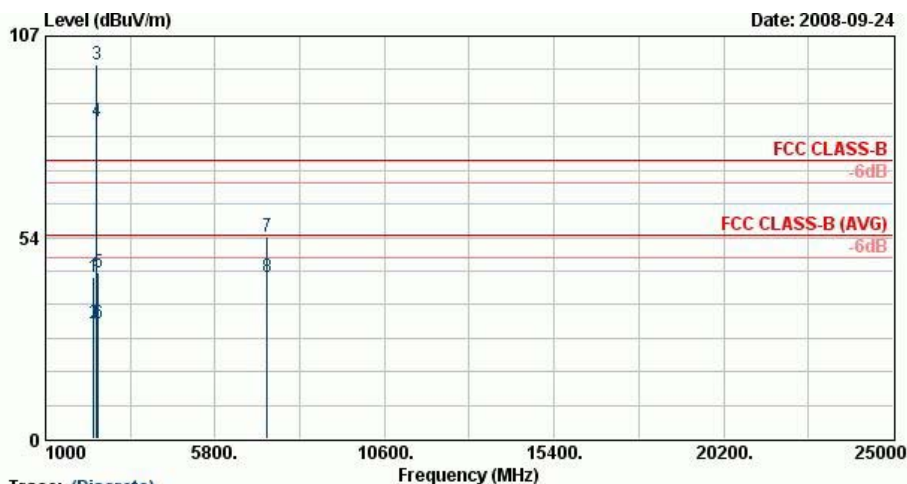


Trace: (Discrete)


Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Model : FR 891114
Memo : Mode 2

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2364.00	43.12	-30.88	74.00	42.97	31.93	3.89	35.67	100	0	Peak
2	2364.00	30.71	-23.29	54.00	30.56	31.93	3.89	35.67	154	354	Average
3 X	2441.00	99.56			99.23	32.04	3.99	35.69	100	0	Peak
4 @	2441.00	84.38			84.05	32.04	3.99	35.69	154	354	Average
5	2500.00	44.08	-29.92	74.00	43.63	32.10	4.05	35.70	100	0	Peak
6	2500.00	30.81	-23.19	54.00	30.36	32.10	4.05	35.70	154	354	Average
7	7281.00	53.90	-20.10	74.00	47.22	35.59	7.19	36.11	100	0	Peak
8	7281.00	42.82	-11.18	54.00	36.15	35.59	7.19	36.11	100	248	Average

Test Mode :	Mode 2	Temperature :	24~25°C
Test Channel :	39	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :	#3 and #4 are Fundamental Signals		

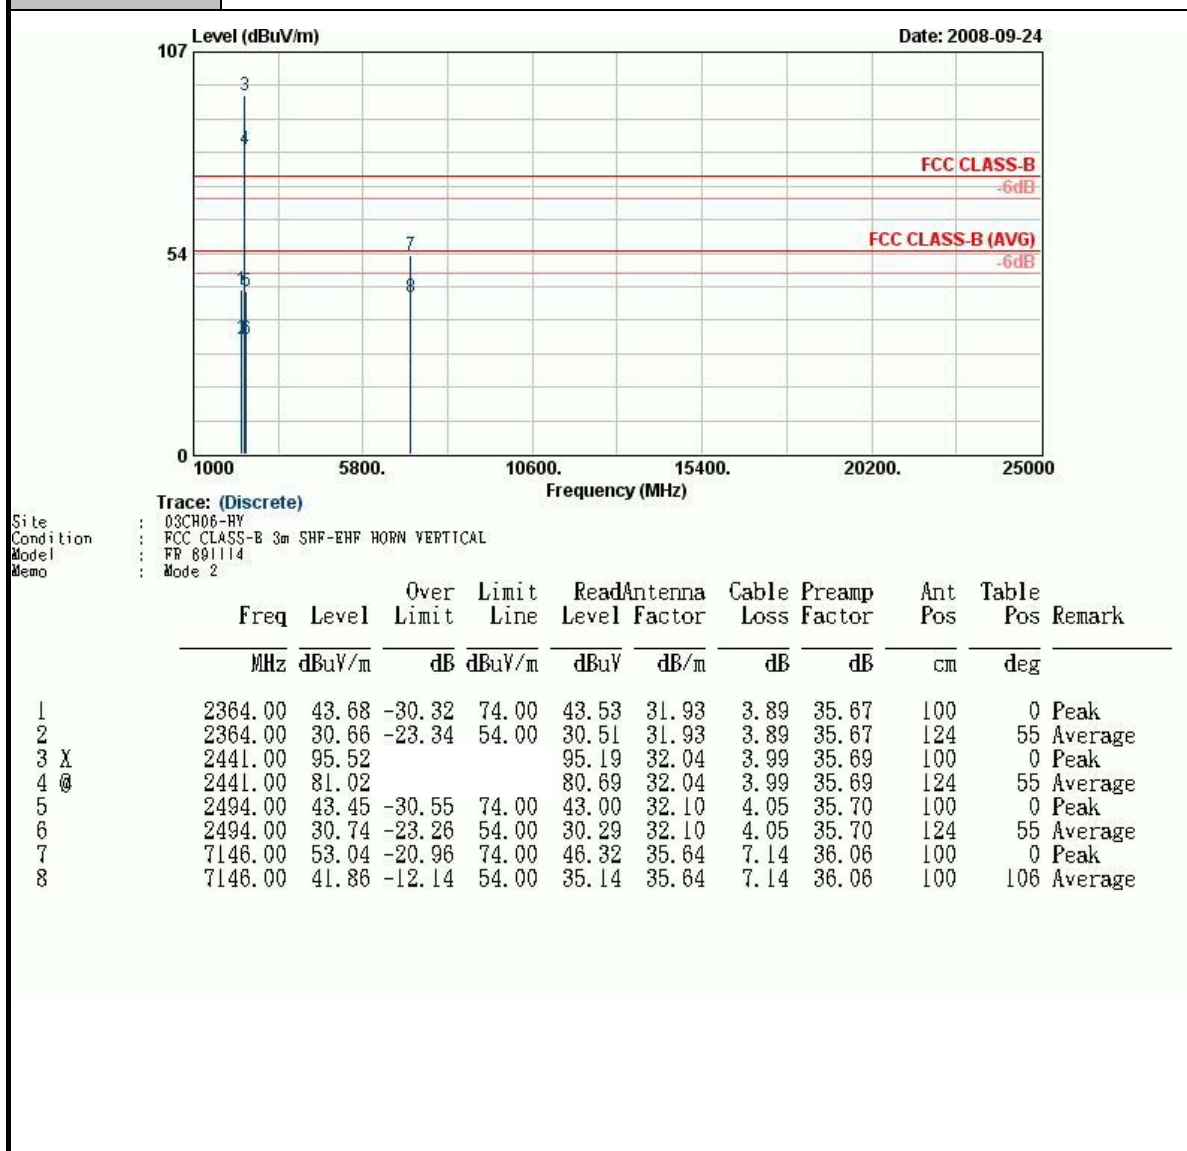

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Horizontal
Remark :	#3 and #4 are Fundamental Signals		

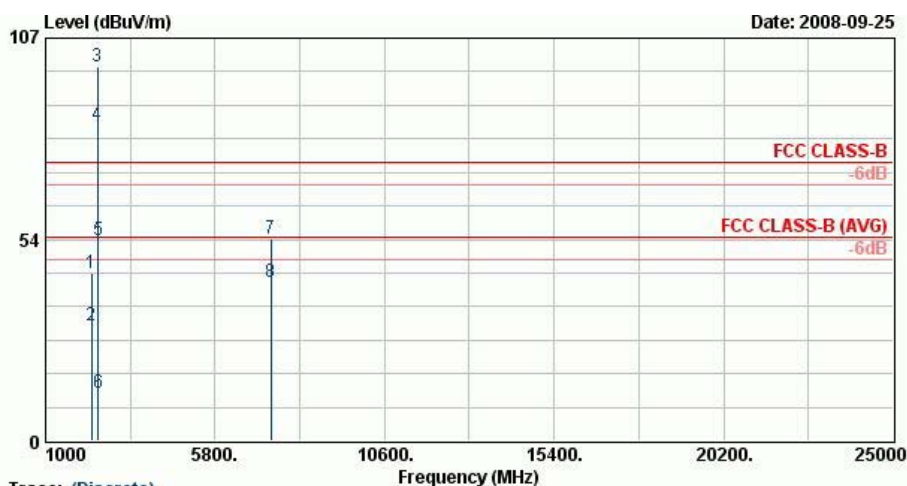


Trace: (Discrete)

Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN HORIZONTAL
Model : FR 891114
Memo : Mode 3

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Remark
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	
			dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2310.00	44.38	-29.62	74.00	44.35	31.87	3.82	35.66	100	0	Peak
2	2310.00	30.65	-23.35	54.00	30.62	31.87	3.82	35.66	100	5	Average
3 X	2480.00	99.26			98.82	32.08	4.05	35.70	100	0	Peak
4 @	2480.00	83.74			83.31	32.08	4.05	35.70	100	5	Average
5	2483.50	53.44	-20.56	74.00	53.01	32.08	4.05	35.70	100	0	Peak
6	2483.50	12.87	-41.13	54.00	12.44	32.08	4.05	35.70	100	5	Average
7	7386.00	53.50	-20.50	74.00	46.88	35.54	7.23	36.15	100	0	Peak
8	7386.00	42.33	-11.67	54.00	35.71	35.54	7.23	36.15	100	143	Average

Test Mode :	Mode 3	Temperature :	24~25°C
Test Channel :	78	Relative Humidity :	51~53%
Test Engineer :	Sun Wang	Polarization :	Vertical
Remark :	#3 and #4 are Fundamental Signals		

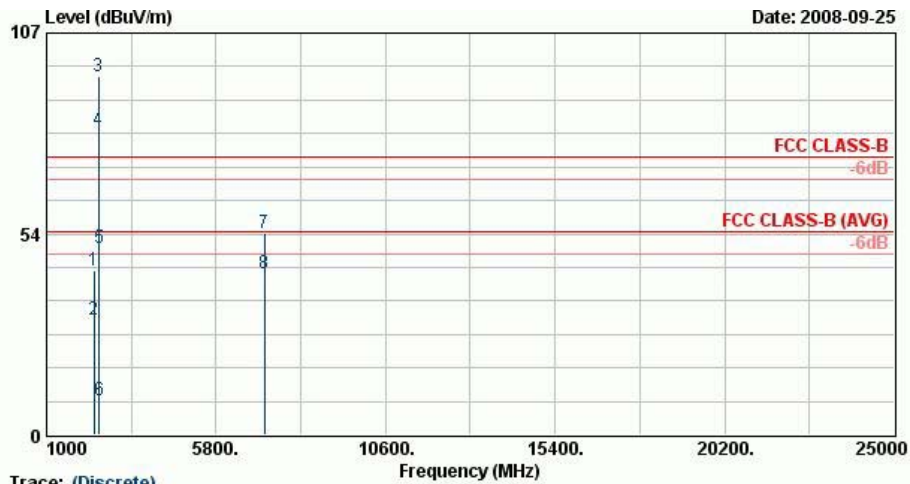

Trace: (Discrete)

Site : 03CH06-HY
Condition : FCC CLASS-B 3m SHF-EHF HORN VERTICAL
Model : FR 891114
Memo : Mode 3

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark
1	2350.00	43.71	-30.29	74.00	43.61	31.91	3.86	35.67	100	0	Peak
2	2350.00	30.63	-23.37	54.00	30.53	31.91	3.86	35.67	128	194	Average
3 X	2480.00	95.59			95.15	32.08	4.05	35.70	100	0	Peak
4 X	2480.00	81.19			80.76	32.08	4.05	35.70	128	194	Average
5	2483.50	49.77	-24.23	74.00	49.34	32.08	4.05	35.70	100	0	Peak
6	2483.50	9.20	-44.80	54.00	8.77	32.08	4.05	35.70	128	194	Average
7	7176.00	53.87	-20.13	74.00	47.16	35.63	7.15	36.07	100	0	Peak
8	7176.00	42.76	-11.24	54.00	36.05	35.63	7.15	36.07	100	295	Average

3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.10.2 Antenna Connected Construction

The antennas type used in this product is PIFA antenna without connector and it is considered to meet antenna requirement.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum	R&S	FSP40	100055	9KHz~40GHz	Jun. 26, 2008	Jun. 25, 2009	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 21, 2008	Feb. 20, 2009	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 21, 2008	Feb. 20, 2009	Conducted (TH02-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211028	9KHz-26.5GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/003	20MHz-1000MHz	Apr. 24, 2008	Apr. 23, 2009	Radiation (03CH06-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Dec. 01, 2007	Nov. 30, 2008	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1G~18GHz	Aug. 18, 2008	Aug. 17, 2009	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Training Research	AF-0801	95119	8G~18GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-251	14G - 40GHz	Oct. 17, 2007	Oct. 16, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1G - 26.5GHz	Nov. 22, 2007	Nov. 21, 2008	Radiation (03CH06-HY)
Pre Amplifier	Agilent	310N	186713	9KHz~1GHz	Apr. 21, 2008	Apr. 20, 2009	Radiation (03CH06-HY)
BT Base Station	Anritsu	MT8852B	6K00005722	N/A	Oct. 23, 2007	Oct. 22, 2008	Radiation (03CH06-HY))
EMI Receiver	R&S	ESCS 30	100356	9kHz – 2.75GHz	Aug. 01, 2008	Jul. 31, 2009	Conduction (CO05-HY)
EMI Receiver	R&S	ESCS 30	100356	9kHz – 2.75GHz	Aug. 01, 2008	Jul. 31, 2009	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz – 30MHz	Dec. 06, 2007	Dec. 05, 2008	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz – 30MHz	Dec. 06, 2007	Dec. 05, 2008	Conduction (CO05-HY)
DC- LISN	R&S	ESH3-26	1000485	0.1MHz-200MHz	Feb. 04, 2008	Feb. 03, 2009	Conduction (CO05-HY)
DC- LISN	R&S	ESH3-26	1000484	0.1MHz-200MHz	Feb. 04, 2008	Feb. 03, 2009	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.10	Normal(k=2)	0.05
Cable loss	0.10	Normal(k=2)	0.05
AMN insertion loss	2.50	Rectangular	0.63
Receiver Spec	1.50	Rectangular	0.43
Site imperfection	1.39	Rectangular	0.80
Mismatch	+0.34/-0.35	U-shape	0.24
Combined standard uncertainty Uc(y)	1.13		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.26		

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
Combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	± 0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	± 1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	± 0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty $U_c(y)$	2.36				
Measuring uncertainty for a level of confidence of 95% $U = 2U_c(y)$	4.72				

6 Certification of TAF Accreditation



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.



Appendix A. Photographs of EUT

Please refer to Sporton report number EP891114 as below.