

**FCC PART 15.247
TEST REPORT**

For

IDEAL LIFE INC.

2200 Yonge Street, Suite 1300, Toronto, ON M4S 2C6, Canada

FCC ID: O8V-BWM0002

Report Type: Original Report	Product Type: Body Weight Scale
Test Engineer: <u>Dean Liu</u>	<i>Dean Liu</i>
Report Number: <u>R2DG140303004-00A</u>	
Report Date: <u>2014-04-28</u>	
Reviewed By: <u>RF Leader</u>	<i>Ivan Cao</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	37

APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	53
APPLICABLE STANDARD	53
TEST PROCEDURE	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST DATA	53
FCC §15.247(d) - BAND EDGES TESTING	59
APPLICABLE STANDARD	59
TEST PROCEDURE	59
TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	59

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *IDEAL LIFE INC.*'s product, model number: *BWM0002 (FCC ID: 08V-BWM0002)* (the "EUT") in this report was a *Body Weight Scale*, which was measured approximately: 43.3 cm (L) x 37.0 cm (W) x 3.8 cm (H), rated input voltage: DC 6V from four AA batteries.

** All measurement and test data in this report was gathered from production sample serial number: 140303004 (Assigned by BACL Dongguan). The EUT was received on 2014-03-05.*

Objective

This report is prepared on behalf of *IDEAL LIFE INC.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related grants.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer. The engineering mode was controlled by the test software.

EUT Exercise Software


The software “EDR_RF_test_Customer_080812” was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

Test Software Version	EDR_RF_test_Customer_080812		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	3	3	3
4-DQPSK	3	3	3
8-DPSK	3	3	3

Equipment Modifications

No modification was made to the EUT.

Block Diagram of Test Setup

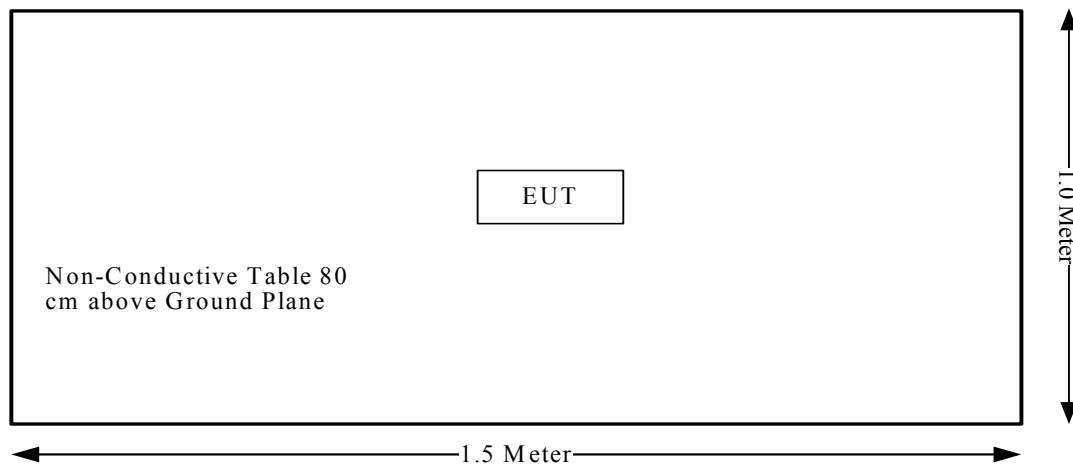

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable*
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

Not Applicable*: the EUT was powered by battery only.

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The maximum conducted output power= 11.42 dBm (13.87 mW) at 2441 MHz

For 10-g extremity SAR exclusion:

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 $= 13.87/5 \cdot (\sqrt{2.441}) = 4.334 < 7.5$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a printed antenna on the main board, and the maximum gain is 1.5dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB


Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

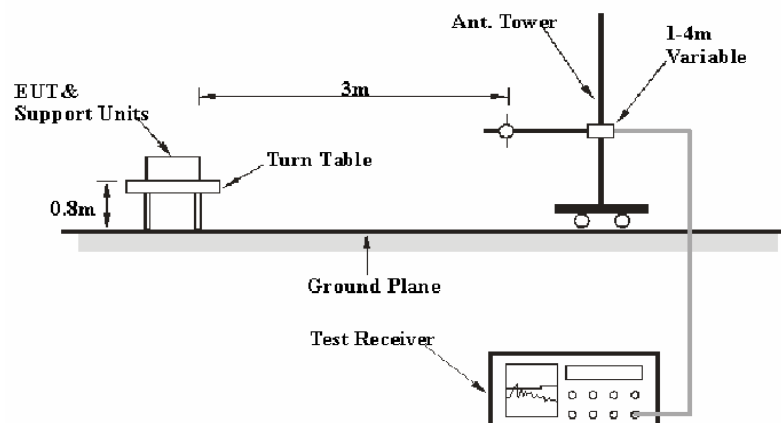

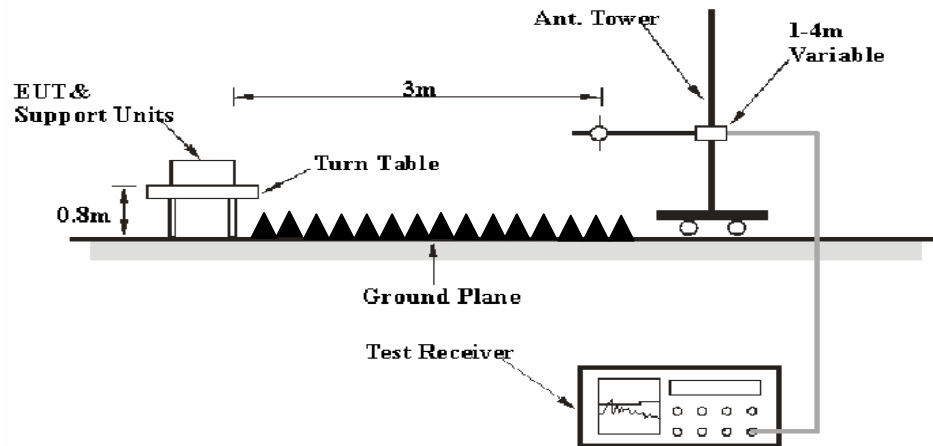Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-06	2014-05-05
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSEM	DE31388	2013-05-07	2014-05-06
ETS LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2013-06-16	2014-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2013-09-06	2014-09-05

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.08 dB at 4960 MHz in the Horizontal polarization of BDR Mode

Test Data**Environmental Conditions**

Temperature:	19.7 °C
Relative Humidity:	67 %
ATM Pressure:	101.5 kPa

The testing was performed by Dean Liu on 2014-03-11.

Mode: Transmitting

BDR Mode (GFSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	72.01	PK	V	25.65	4.42	0.00	102.08	N/A	N/A
2402	61.19	AV	V	25.65	4.42	0.00	91.26	N/A	N/A
2402	79.41	PK	H	25.65	4.42	0.00	109.48	N/A	N/A
2402	63.98	AV	H	25.65	4.42	0.00	94.05	N/A	N/A
2390	36.53	PK	H	25.61	4.39	0.00	66.53	74.00	7.47
2390	14.39	AV	H	25.61	4.39	0.00	44.39	54.00	9.61
4804	63.2	PK	H	30.59	5.98	27.41	72.36	74.00	1.64*
4804	31.23	AV	H	30.59	5.98	27.41	40.39	54.00	13.61
7206	39.62	PK	H	34.09	7.45	25.91	55.25	74.00	18.75
7206	20.85	AV	H	34.09	7.45	25.91	36.48	54.00	17.52
9608	33.29	PK	H	35.96	8.80	27.55	50.50	74.00	23.50
9608	19.04	AV	H	35.96	8.80	27.55	36.25	54.00	17.75
2271	32.14	PK	H	25.30	4.21	27.30	34.35	74.00	39.65
2271	15.18	AV	H	25.30	4.21	27.30	17.39	54.00	36.61
257	26.8	QP	H	12.39	1.93	21.49	19.63	46.00	26.37
Middle Channel: 2441(MHz)									
2441	71.25	PK	V	25.75	4.40	0.00	101.40	N/A	N/A
2441	61.15	AV	V	25.75	4.40	0.00	91.30	N/A	N/A
2441	78.65	PK	H	25.75	4.40	0.00	108.80	N/A	N/A
2441	63.57	AV	H	25.75	4.40	0.00	93.72	N/A	N/A
4882	63.38	PK	H	30.79	6.08	27.42	72.83	74.00	1.17*
4882	31.39	AV	H	30.79	6.08	27.42	40.84	54.00	13.16
7323	39.57	PK	H	34.38	7.51	25.88	55.58	74.00	18.42
7323	20.71	AV	H	34.38	7.51	25.88	36.72	54.00	17.28
9764	33.18	PK	H	36.33	8.83	27.20	51.14	74.00	22.86
9764	18.93	AV	H	36.33	8.83	27.20	36.89	54.00	17.11
3154	31.97	PK	H	27.69	7.59	27.41	39.84	74.00	34.16
3154	16.03	AV	H	27.69	7.59	27.41	23.90	54.00	30.10
2271	32.06	PK	H	25.30	4.21	27.30	34.27	74.00	39.73
2271	15.38	AV	H	25.30	4.21	27.30	17.59	54.00	36.41
257	26.8	QP	H	12.39	1.93	21.49	19.63	46.00	26.37
High Channel: 2480(MHz)									
2480	71.97	PK	V	25.85	4.48	0.00	102.30	N/A	N/A
2480	61.18	AV	V	25.85	4.48	0.00	91.51	N/A	N/A
2480	79.19	PK	H	25.85	4.48	0.00	109.52	N/A	N/A
2480	63.5	AV	H	25.85	4.48	0.00	93.83	N/A	N/A
2483.5	36.31	PK	H	25.86	4.49	0.00	66.66	74.00	7.34
2483.5	17.11	AV	H	25.86	4.49	0.00	47.46	54.00	6.54
4960	64.45	PK	H	31.00	5.90	27.43	73.92	74.00	0.08*
4960	31.46	AV	H	31.00	5.90	27.43	40.93	54.00	13.07
7440	39.6	PK	H	34.66	7.58	25.97	55.87	74.00	18.13
7440	20.68	AV	H	34.66	7.58	25.97	36.95	54.00	17.05
9760	32.85	PK	H	36.32	8.83	27.21	50.79	74.00	23.21
9760	18.89	AV	H	36.32	8.83	27.21	36.83	54.00	17.17
2271	31.95	PK	H	25.30	4.21	27.30	34.16	74.00	39.84
2271	15.2	AV	H	25.30	4.21	27.30	17.41	54.00	36.59
257	26.5	QP	H	12.39	1.93	21.49	19.33	46.00	26.67

*Within measurement uncertainty!

EDR Mode ($\pi/4$ -DQPSK):

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	72.02	PK	V	25.65	4.42	0.00	102.09	N/A	N/A
2402	61.24	AV	V	25.65	4.42	0.00	91.31	N/A	N/A
2402	79.46	PK	H	25.65	4.42	0.00	109.53	N/A	N/A
2402	63.99	AV	H	25.65	4.42	0.00	94.06	N/A	N/A
2390	36.56	PK	H	25.61	4.39	0.00	66.56	74.00	7.44
2390	14.40	AV	H	25.61	4.39	0.00	44.40	54.00	9.60
4804	63.24	PK	H	30.59	5.98	27.41	72.40	74.00	1.60*
4804	31.27	AV	H	30.59	5.98	27.41	40.43	54.00	13.58
7206	39.66	PK	H	34.09	7.45	25.91	55.29	74.00	18.71
7206	20.89	AV	H	34.09	7.45	25.91	36.52	54.00	17.49
9608	33.31	PK	H	35.96	8.80	27.55	50.52	74.00	23.48
9608	19.02	AV	H	35.96	8.80	27.55	36.23	54.00	17.77
2271	32.15	PK	H	25.30	4.21	27.30	34.36	74.00	39.65
2271	15.22	AV	H	25.30	4.21	27.30	17.43	54.00	36.57
257	26.30	QP	H	12.39	1.93	21.49	19.13	46.00	26.87
Middle Channel: 2441(MHz)									
2441	71.12	PK	V	25.75	4.40	0.00	101.27	N/A	N/A
2441	61.09	AV	V	25.75	4.40	0.00	91.24	N/A	N/A
2441	78.67	PK	H	25.75	4.40	0.00	108.82	N/A	N/A
2441	63.57	AV	H	25.75	4.40	0.00	93.72	N/A	N/A
4882	63.39	PK	H	30.79	6.08	27.42	72.84	74.00	1.16*
4882	31.40	AV	H	30.79	6.08	27.42	40.85	54.00	13.15
7323	39.59	PK	H	34.38	7.51	25.88	55.60	74.00	18.41
7323	20.76	AV	H	34.38	7.51	25.88	36.77	54.00	17.23
9764	33.22	PK	H	36.33	8.83	27.20	51.18	74.00	22.83
9764	18.97	AV	H	36.33	8.83	27.20	36.93	54.00	17.08
3154	31.98	PK	H	27.69	7.59	27.41	39.85	74.00	34.15
3154	16.03	AV	H	27.69	7.59	27.41	23.90	54.00	30.10
2271	32.07	PK	H	25.30	4.21	27.30	34.28	74.00	39.72
2271	15.13	AV	H	25.30	4.21	27.30	17.34	54.00	36.66
257	26.70	QP	H	12.39	1.93	21.49	19.53	46.00	26.47
High Channel: 2480(MHz)									
2480	72.01	PK	V	25.85	4.48	0.00	102.34	N/A	N/A
2480	61.22	AV	V	25.85	4.48	0.00	91.55	N/A	N/A
2480	79.22	PK	H	25.85	4.48	0.00	109.55	N/A	N/A
2480	63.51	AV	H	25.85	4.48	0.00	93.84	N/A	N/A
2483.5	36.32	PK	H	25.86	4.49	0.00	66.67	74.00	7.33
2483.5	17.14	AV	H	25.86	4.49	0.00	47.49	54.00	6.52
4960	64.12	PK	H	31.00	5.90	27.43	73.59	74.00	0.41*
4960	31.20	AV	H	31.00	5.90	27.43	40.67	54.00	13.33
7440	39.62	PK	H	34.66	7.58	25.97	55.89	74.00	18.12
7440	20.71	AV	H	34.66	7.58	25.97	36.98	54.00	17.02
9760	32.89	PK	H	36.32	8.83	27.21	50.83	74.00	23.18
9760	18.92	AV	H	36.32	8.83	27.21	36.86	54.00	17.15
2271	31.99	PK	H	25.30	4.21	27.30	34.20	74.00	39.80
2271	15.23	AV	H	25.30	4.21	27.30	17.44	54.00	36.57
257	26.50	QP	H	12.39	1.93	21.49	19.33	46.00	26.67

*Within measurement uncertainty!

EDR Mode (8-DPSK):


Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402(MHz)									
2402	72.04	PK	V	25.65	4.42	0.00	102.11	N/A	N/A
2402	61.42	AV	V	25.65	4.42	0.00	91.49	N/A	N/A
2402	79.51	PK	H	25.65	4.42	0.00	109.58	N/A	N/A
2402	64.21	AV	H	25.65	4.42	0.00	94.28	N/A	N/A
2390	36.67	PK	H	25.61	4.39	0.00	66.67	74.00	7.33
2390	14.57	AV	H	25.61	4.39	0.00	44.57	54.00	9.43
4804	64.39	PK	H	30.59	5.98	27.41	73.55	74.00	0.45*
4804	31.46	AV	H	30.59	5.98	27.41	40.62	54.00	13.38
7206	39.90	PK	H	34.09	7.45	25.91	55.53	74.00	18.47
7206	21.09	AV	H	34.09	7.45	25.91	36.72	54.00	17.28
9608	33.38	PK	H	35.96	8.80	27.55	50.59	74.00	23.41
9608	19.26	AV	H	35.96	8.80	27.55	36.47	54.00	17.53
2271	32.43	PK	H	25.30	4.21	27.30	34.64	74.00	39.36
2271	15.27	AV	H	25.30	4.21	27.30	17.48	54.00	36.52
257	26.52	QP	H	12.39	1.93	21.49	19.35	46.00	26.65
Middle Channel: 2441(MHz)									
2441	71.49	PK	V	25.75	4.40	0.00	101.64	N/A	N/A
2441	61.08	AV	V	25.75	4.40	0.00	91.23	N/A	N/A
2441	78.86	PK	H	25.75	4.40	0.00	109.01	N/A	N/A
2441	63.74	AV	H	25.75	4.40	0.00	93.89	N/A	N/A
4882	63.51	PK	H	30.79	6.08	27.42	72.96	74.00	1.04*
4882	31.54	AV	H	30.79	6.08	27.42	40.99	54.00	13.01
7323	39.92	PK	H	34.38	7.51	25.88	55.93	74.00	18.07
7323	20.04	AV	H	34.38	7.51	25.88	36.05	54.00	17.95
9764	33.40	PK	H	36.33	8.83	27.20	51.36	74.00	22.64
9764	19.23	AV	H	36.33	8.83	27.20	37.19	54.00	16.81
3154	32.09	PK	H	27.69	7.59	27.41	39.96	74.00	34.04
3154	16.11	AV	H	27.69	7.59	27.41	23.98	54.00	30.02
2271	31.14	PK	H	25.30	4.21	27.30	33.35	74.00	40.65
2271	15.21	AV	H	25.30	4.21	27.30	17.42	54.00	36.58
257	26.90	QP	H	12.39	1.93	21.49	19.73	46.00	26.27
High Channel: 2480(MHz)									
2480	72.20	PK	V	25.85	4.48	0.00	102.53	N/A	N/A
2480	61.40	AV	V	25.85	4.48	0.00	91.73	N/A	N/A
2480	79.38	PK	H	25.85	4.48	0.00	109.71	N/A	N/A
2480	63.80	AV	H	25.85	4.48	0.00	94.13	N/A	N/A
2483.5	36.41	PK	H	25.86	4.49	0.00	66.76	74.00	7.24
2483.5	17.40	AV	H	25.86	4.49	0.00	47.75	54.00	6.25
4960	64.25	PK	H	31.00	5.90	27.43	73.72	74.00	0.28*
4960	31.21	AV	H	31.00	5.90	27.43	40.68	54.00	13.32
7440	39.77	PK	H	34.66	7.58	25.97	56.04	74.00	17.96
7440	20.78	AV	H	34.66	7.58	25.97	37.05	54.00	16.95
9760	33.00	PK	H	36.32	8.83	27.21	50.94	74.00	23.06
9760	19.08	AV	H	36.32	8.83	27.21	37.02	54.00	16.98
2271	32.20	PK	H	25.30	4.21	27.30	34.41	74.00	39.59
2271	15.48	AV	H	25.30	4.21	27.30	17.69	54.00	36.31
257	26.65	QP	H	12.39	1.93	21.49	19.48	46.00	26.52

*Within measurement uncertainty!

Conducted Spurious Emissions at Antenna Port


BDR Mode (GFSK):

Low Channel

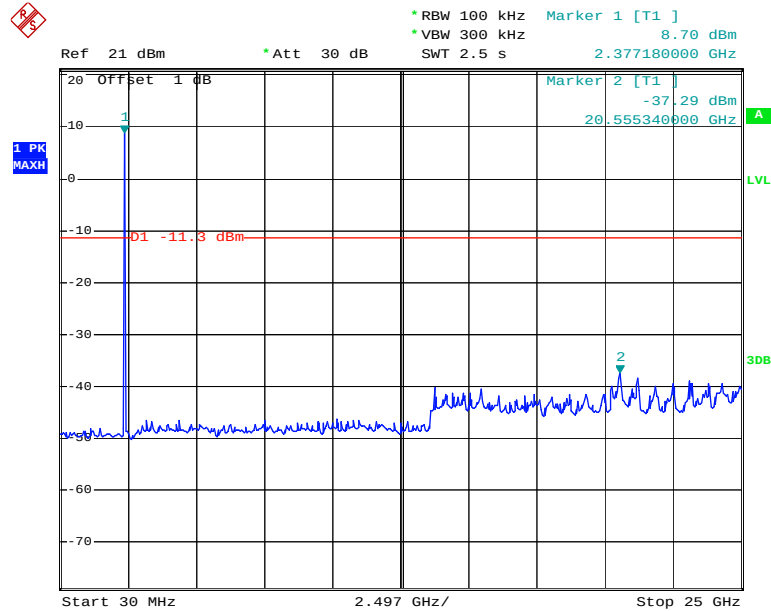


Date: 11.MAR.2014 15:01:49

Middle Channel

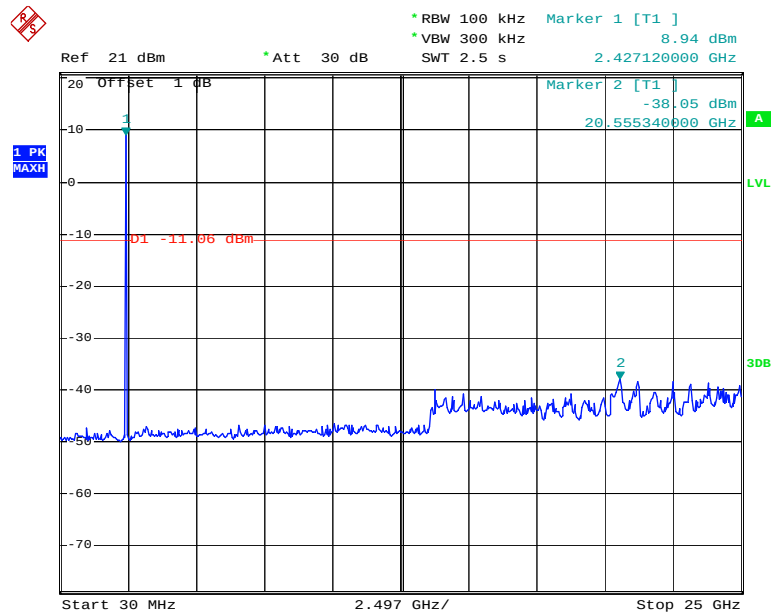

Date: 11.MAR.2014 15:01:17


High Channel

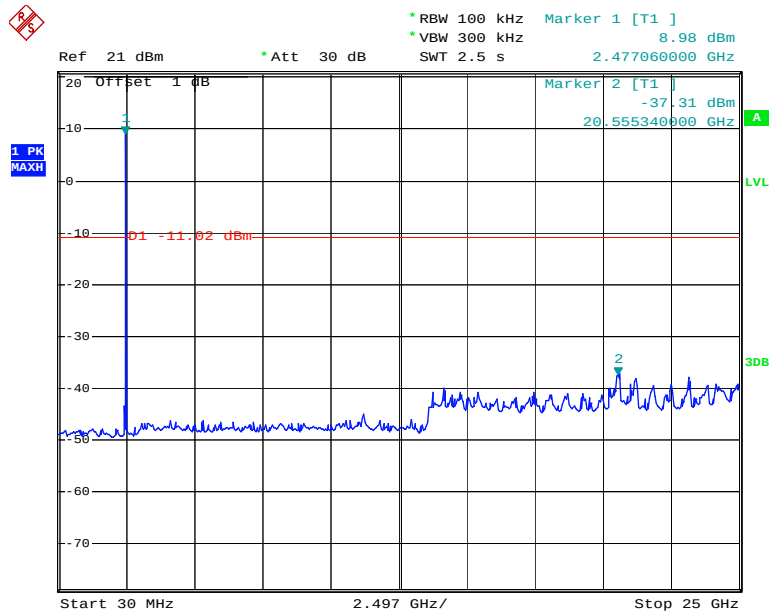

Date: 11.MAR.2014 15:00:34


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

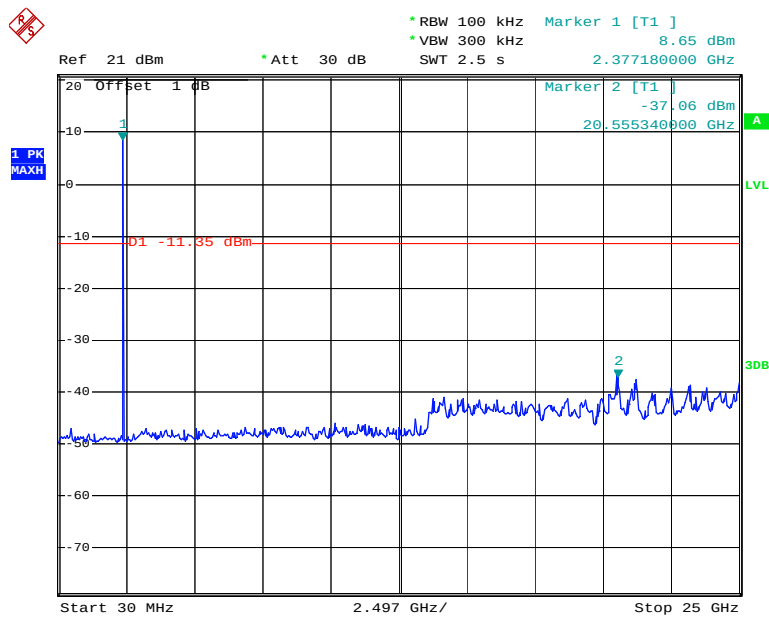


Date: 11.MAR.2014 15:07:22

Middle Channel

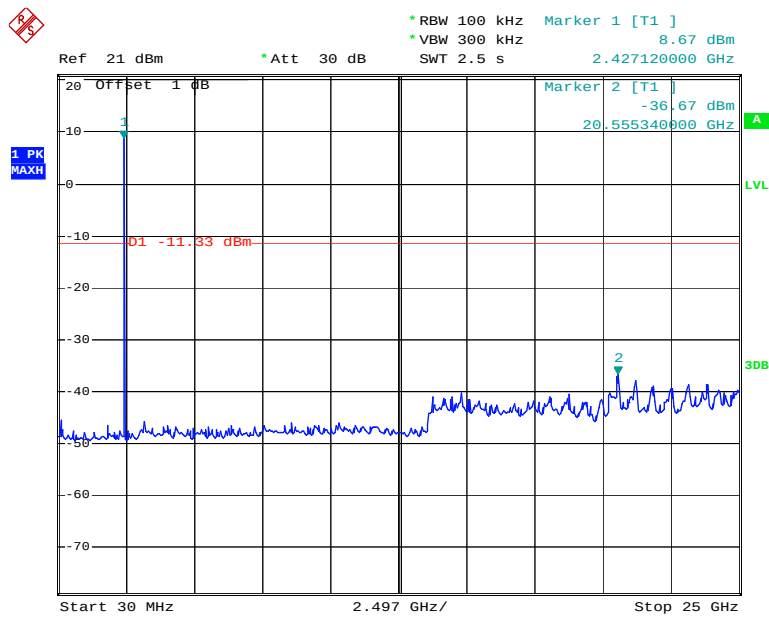

Date: 11.MAR.2014 15:18:20


High Channel

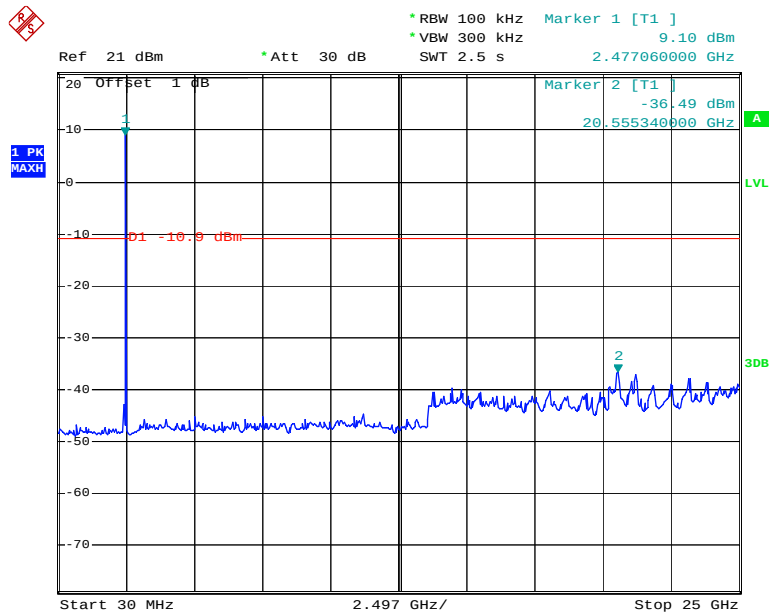

Date: 11.MAR.2014 15:11:45


EDR Mode (8-DPSK):

Low Channel

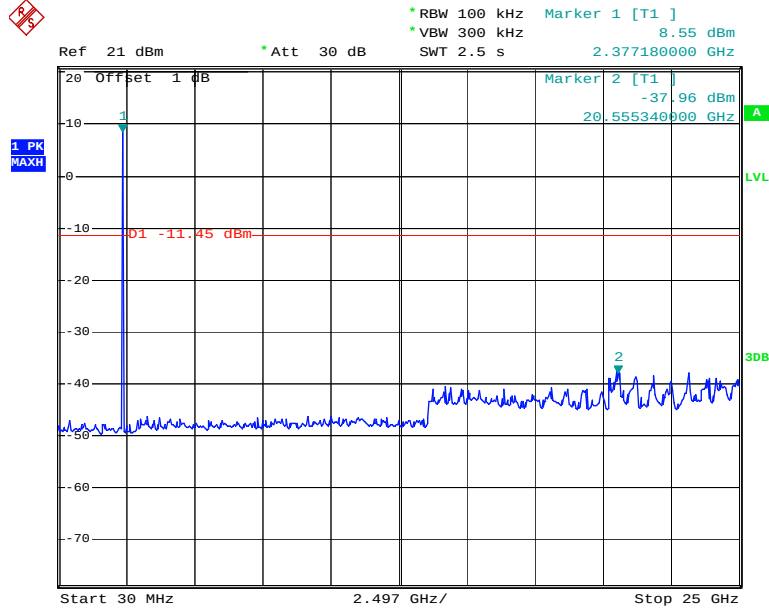


Date: 11.MAR.2014 15:13:59

Middle Channel

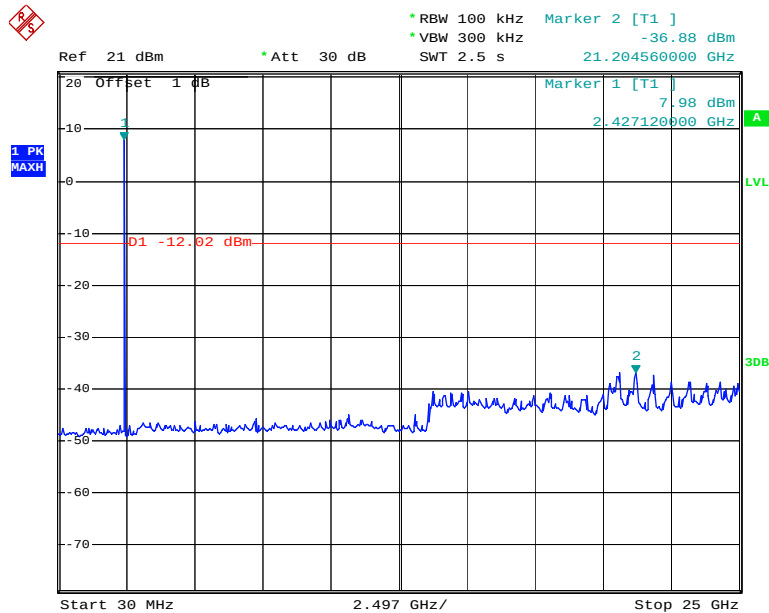

Date: 11.MAR.2014 15:16:01

High Channel

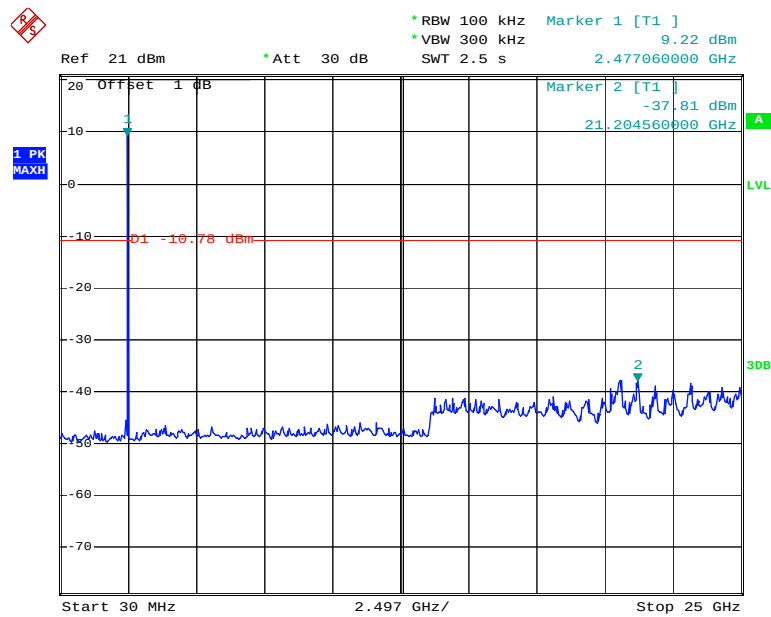

Date: 11.MAR.2014 15:16:48

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.5 kPa

* The testing was performed by Dean Liu on 2014-03-11

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR Mode (GFSK)	Low	2402	1.000	0.57	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.57	Pass
	Adjacent	2442			
	High	2480	1.000	0.56	Pass
	Adjacent	2479			
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.004	0.84	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.84	Pass
	Adjacent	2442			
	High	2480	1.000	0.84	Pass
	Adjacent	2479			
EDR Mode (8-DPSK):	Low	2402	1.000	0.82	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.82	Pass
	Adjacent	2442			
	High	2480	1.000	0.82	Pass
	Adjacent	2479			


BDR Mode (GFSK):

Low Channel

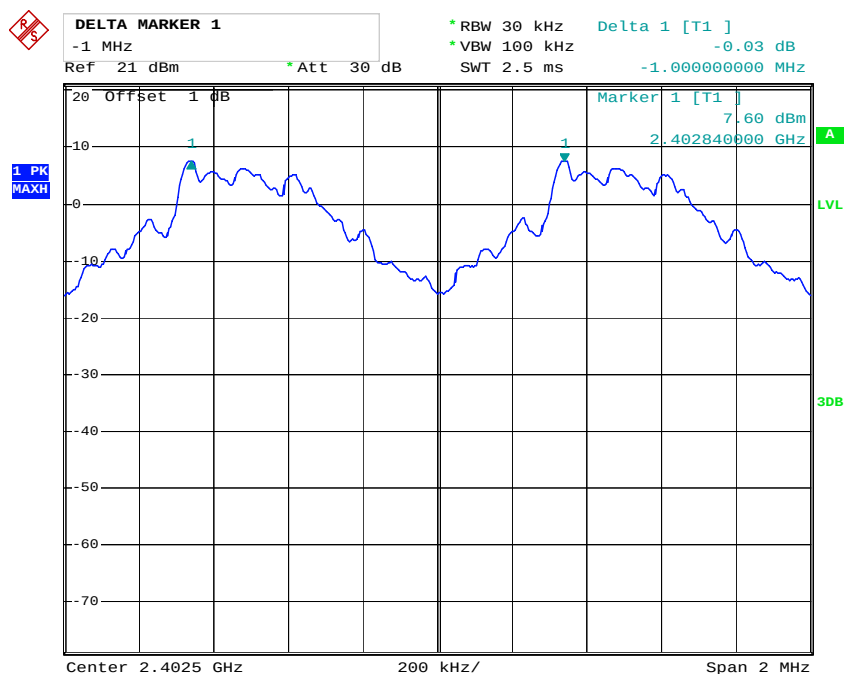


Date: 11.MAR.2014 13:32:25

Middle Channel

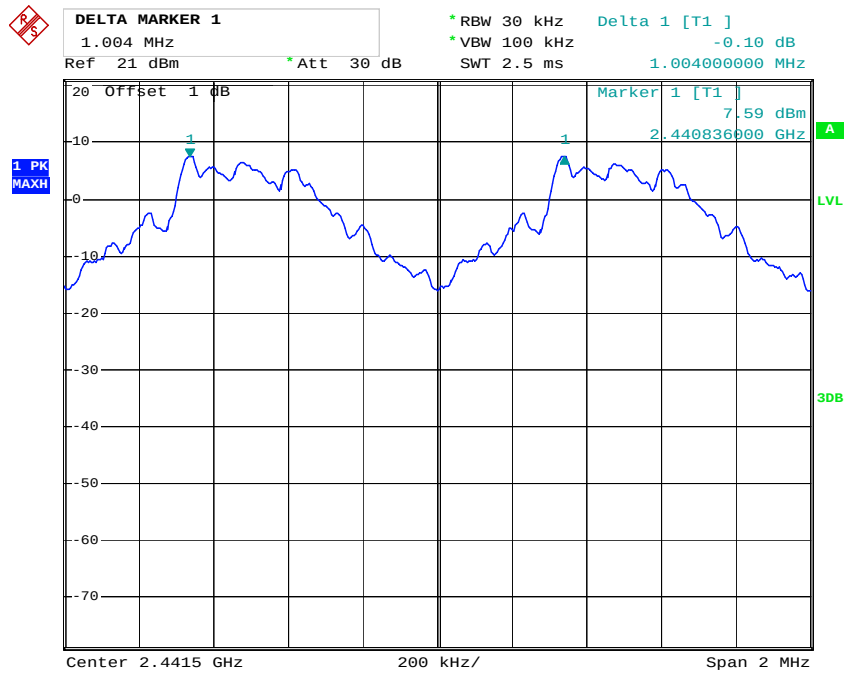

Date: 11.MAR.2014 13:33:14


High Channel

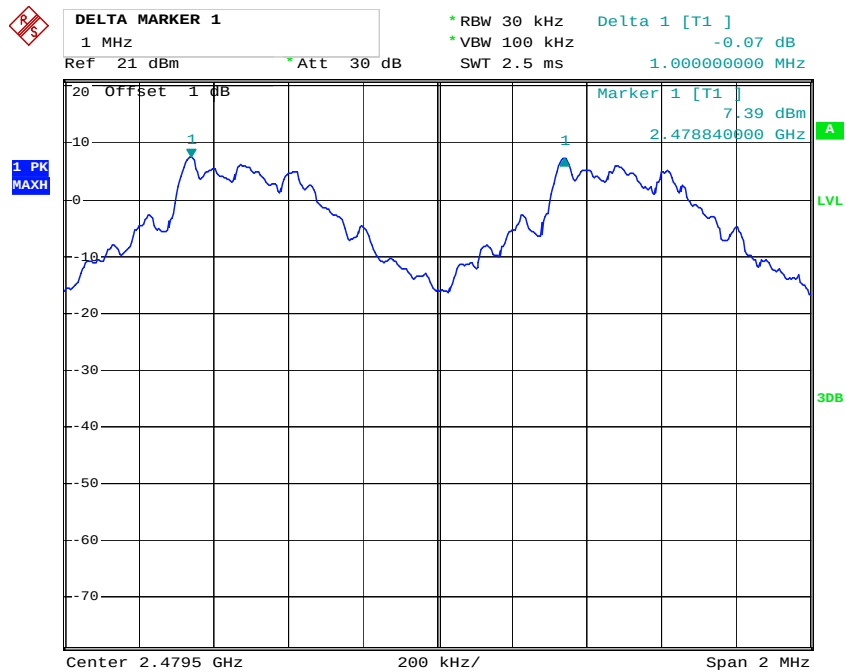

Date: 11.MAR.2014 13:34:08


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

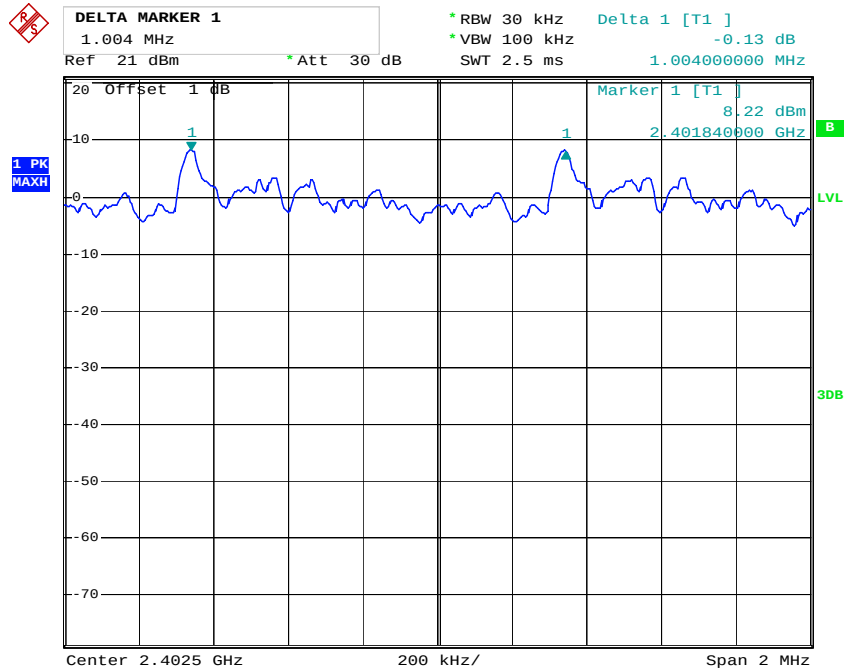


Date: 11.MAR.2014 17:26:06

Middle Channel

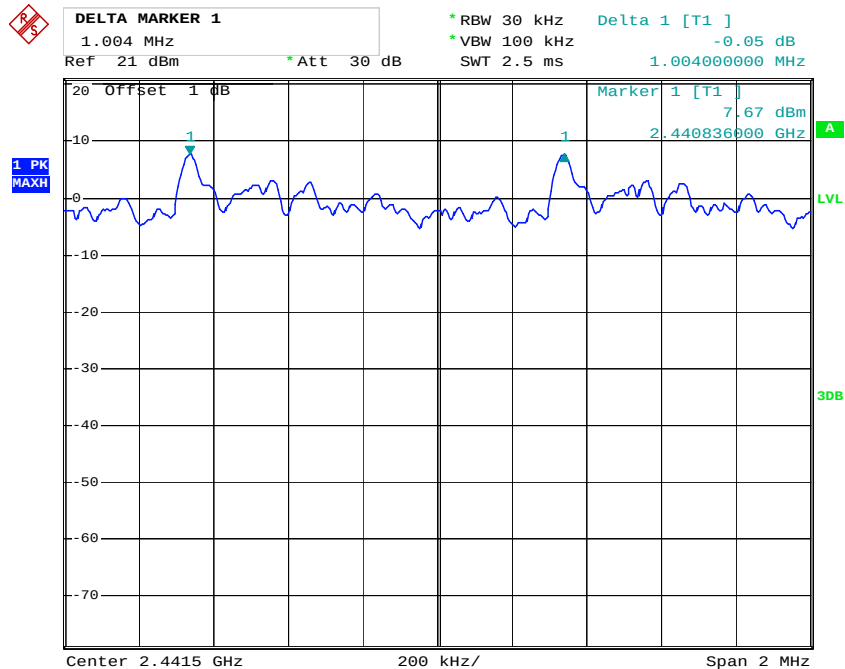

Date: 11.MAR.2014 13:36:37


High Channel

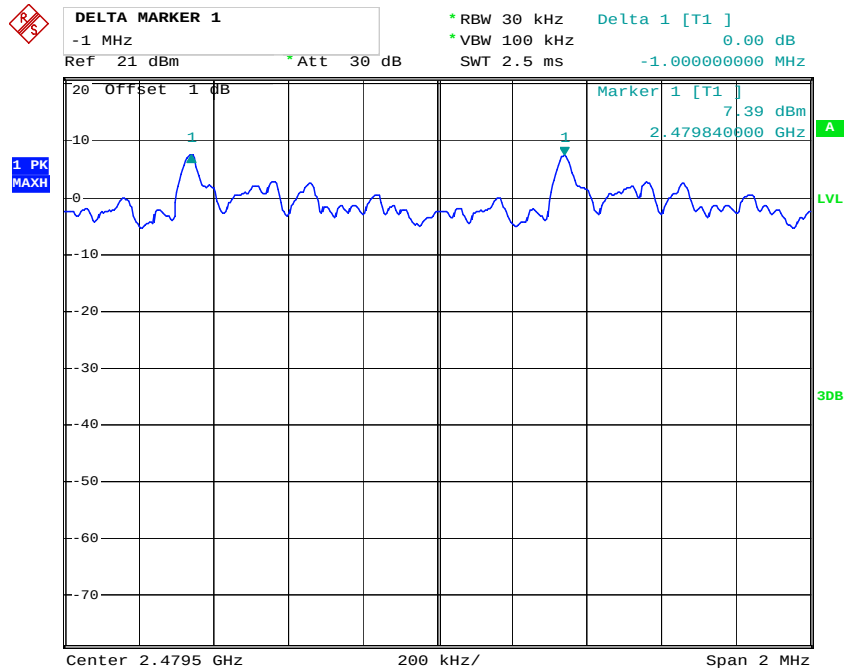

Date: 11.MAR.2014 13:34:56


EDR Mode (8-DPSK):

Low Channel

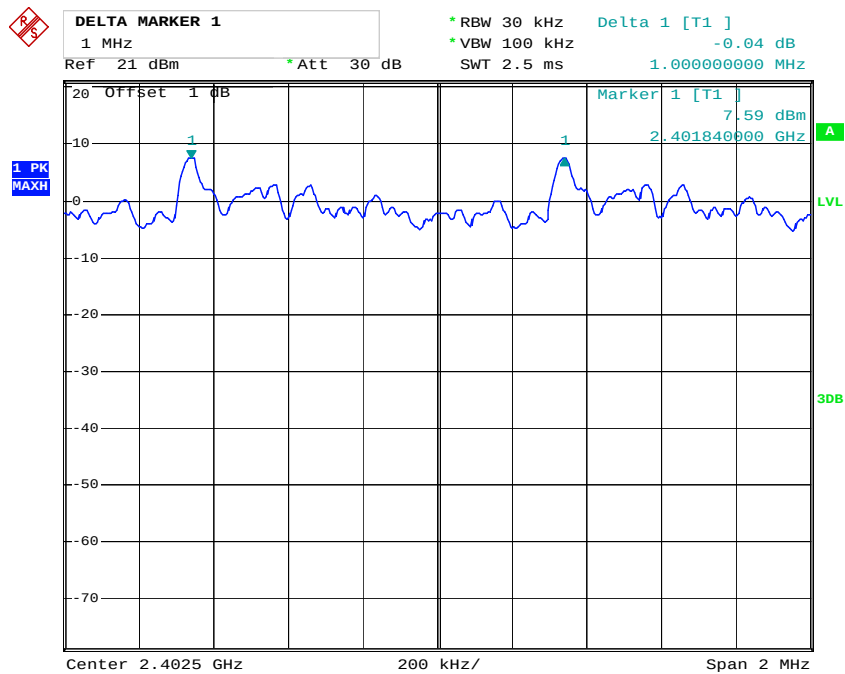


Date: 11.MAR.2014 13:37:46

Middle Channel

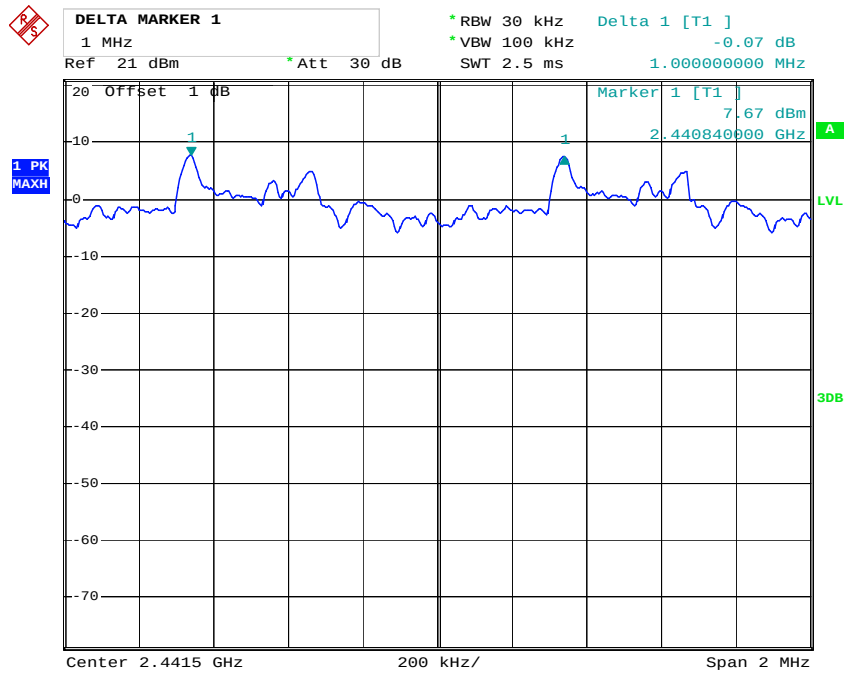

Date: 11.MAR.2014 13:39:51

High Channel

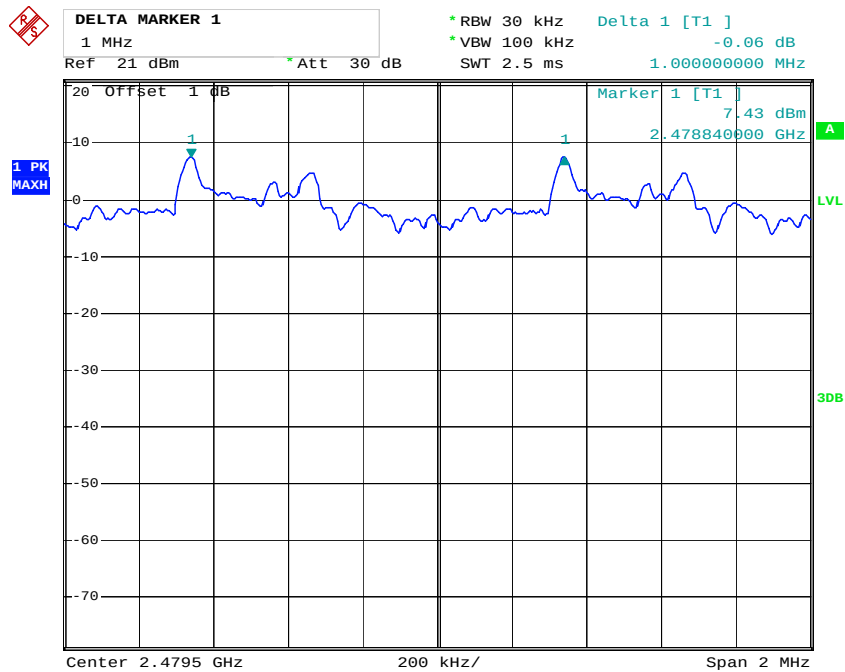

Date: 11.MAR.2014 13:40:58

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.5 kPa

* The testing was performed by Dean Liu on 2014-03-11

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.848
	Middle	2441	0.850
	High	2480	0.840
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.264
	Middle	2441	1.264
	High	2480	1.256
EDR Mode (8-DPSK):	Low	2402	1.224
	Middle	2441	1.228
	High	2480	1.228


Please refer to the following plots.

BDR Mode (GFSK):

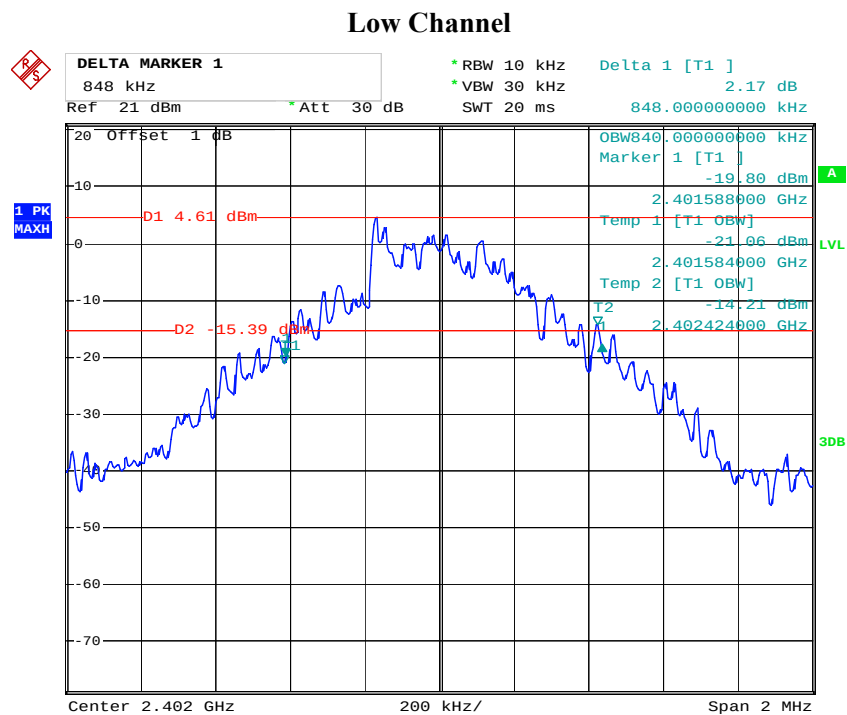


Date: 11.MAR.2014 13:13:28

Middle Channel

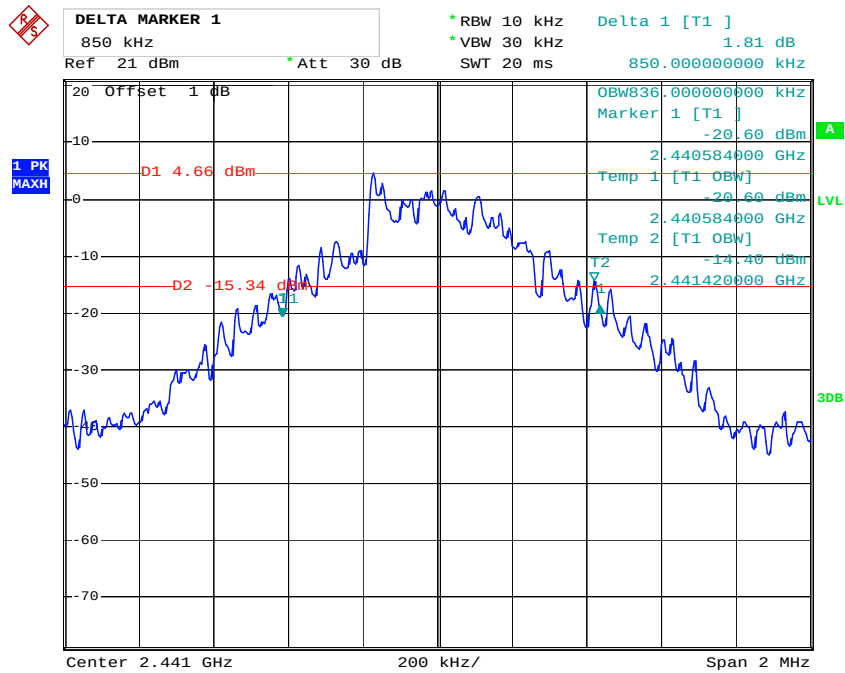


Date: 11.MAR.2014 13:14:46


High Channel

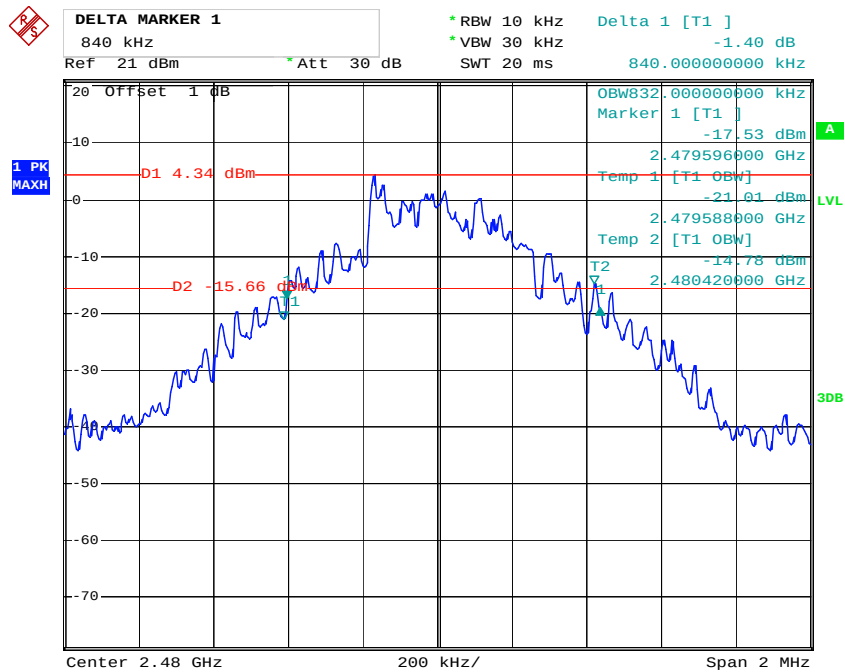

Date: 11.MAR.2014 13:18:24

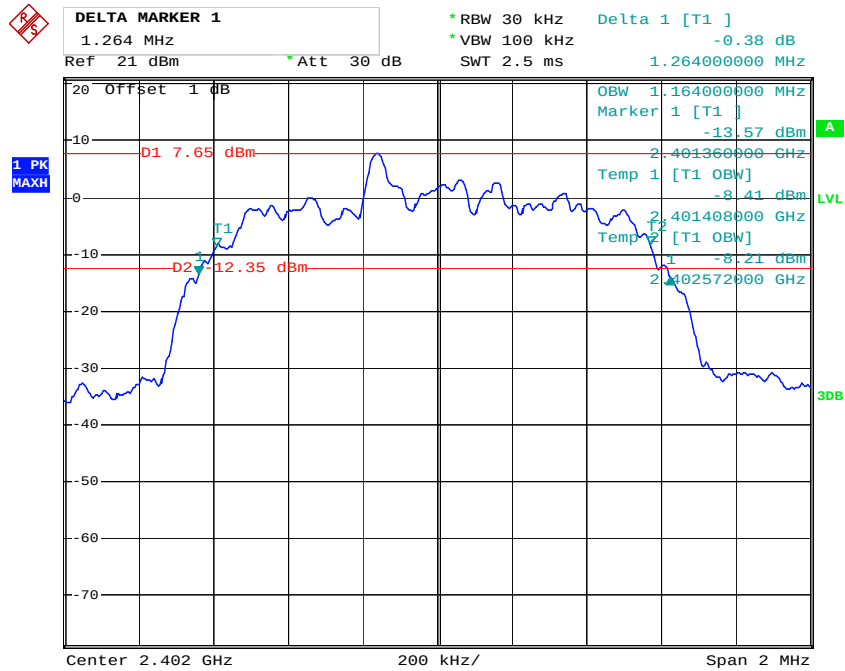
*EDR Mode ($\pi/4$ -DQPSK):***Low Channel**

Date: 11.MAR.2014 13:21:31

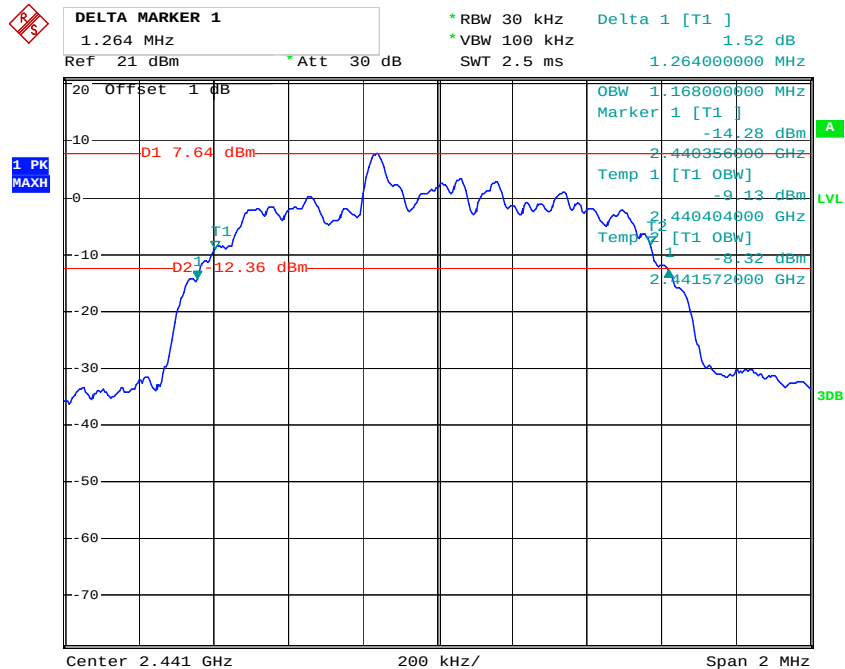Middle Channel

Date: 11.MAR.2014 13:23:35


High Channel

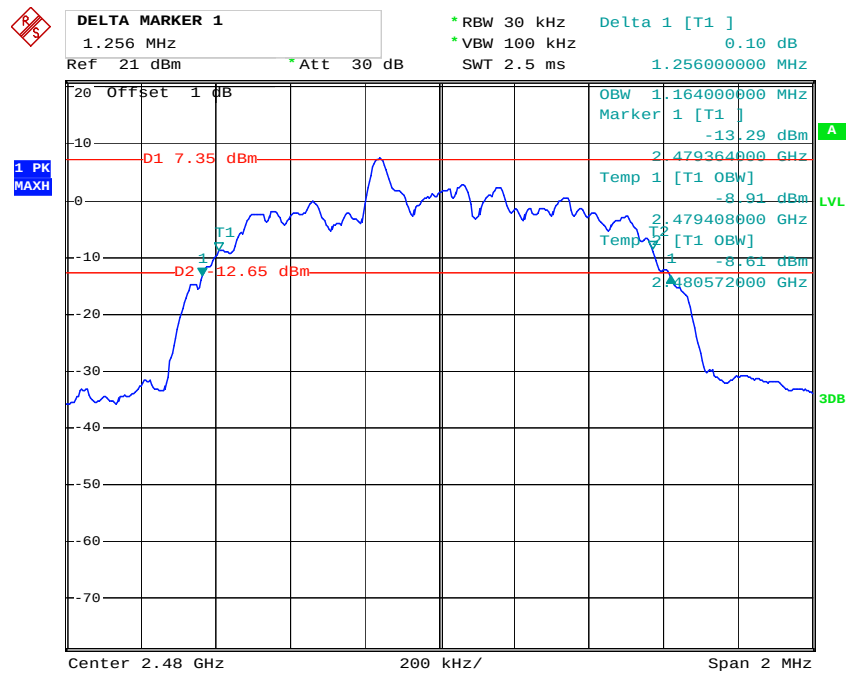

Date: 11.MAR.2014 13:20:29


EDR Mode (8-DPSK):

Low Channel

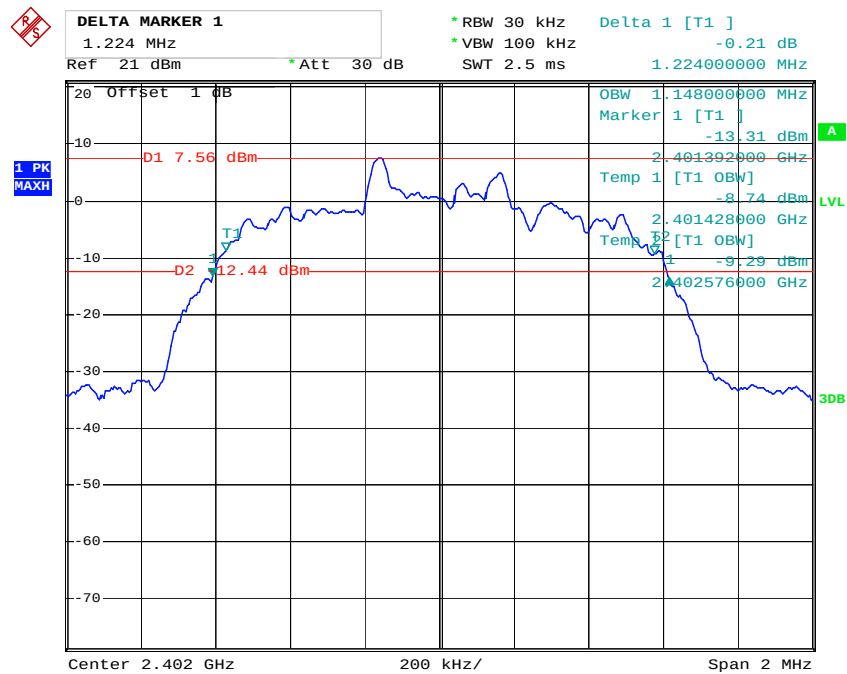


Date: 11.MAR.2014 13:27:59

Middle Channel

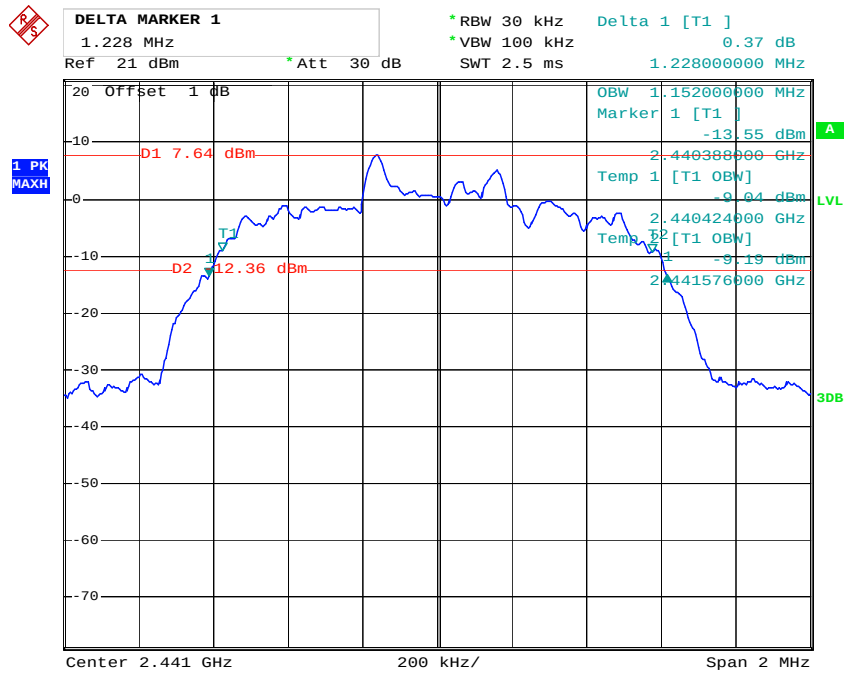

Date: 11.MAR.2014 13:29:03

High Channel

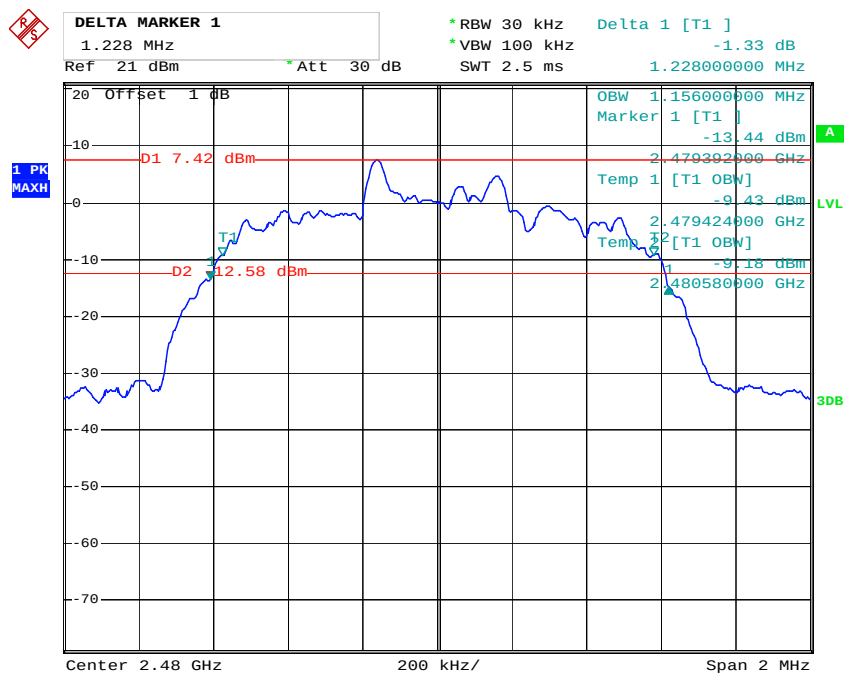

Date: 11.MAR.2014 13:30:56

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.5 kPa

* The testing was performed by Dean Liu on 2014-03-11

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

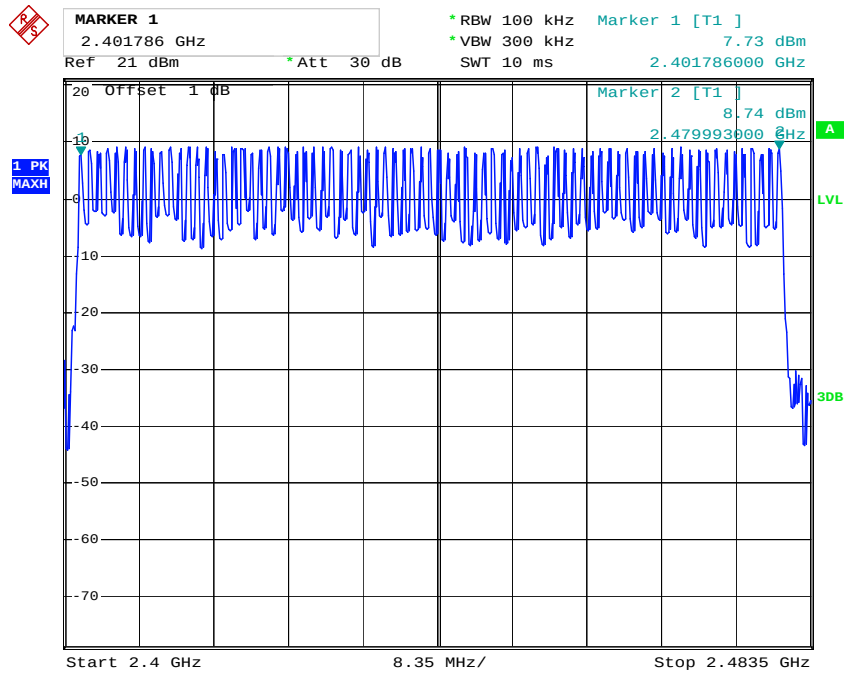


Date: 11.MAR.2014 14:06:25

EDR Mode ($\pi/4$ -DQPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

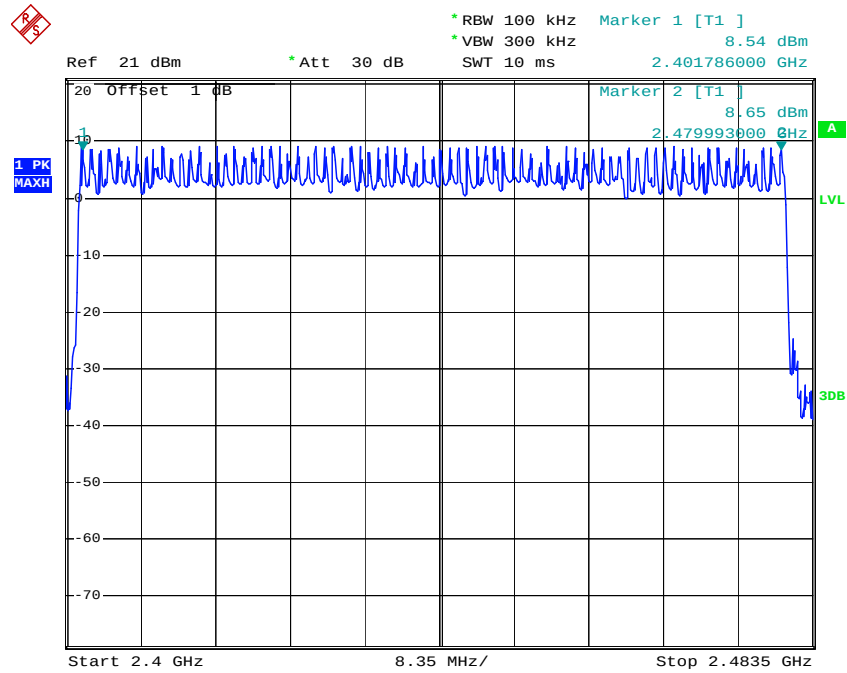


Date: 11.MAR.2014 14:08:12

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥ 15

Number of Hopping Channels

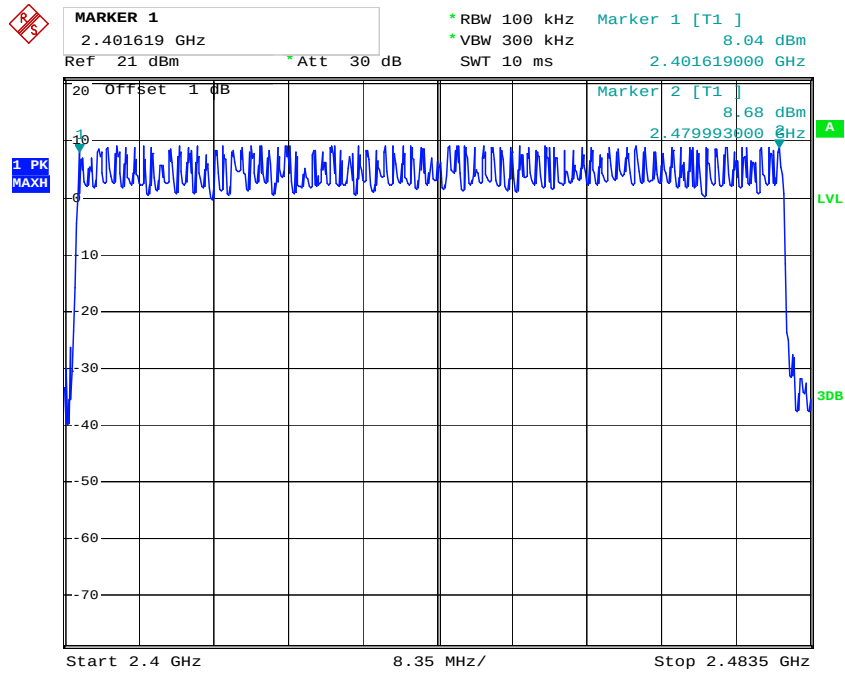

Date: 11.MAR.2014 14:10:48

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.5 kPa

* The testing was performed by Dean Liu on 2014-03-11

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.408	0.131	0.4	Pass
	Middle	0.408	0.131	0.4	Pass
	High	0.408	0.131	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.677	0.268	0.4	Pass
	Middle	1.677	0.268	0.4	Pass
	High	1.677	0.268	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.939	0.313	0.4	Pass
	Middle	2.939	0.313	0.4	Pass
	High	2.939	0.313	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

DH1: Low Channel

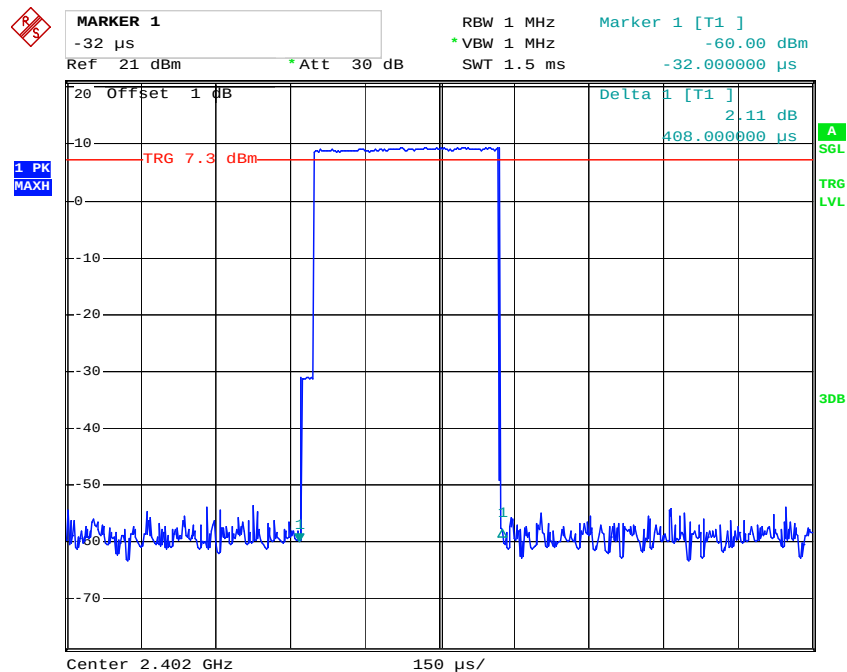


Date: 11.MAR.2014 14:13:37

DH1: Middle Channel

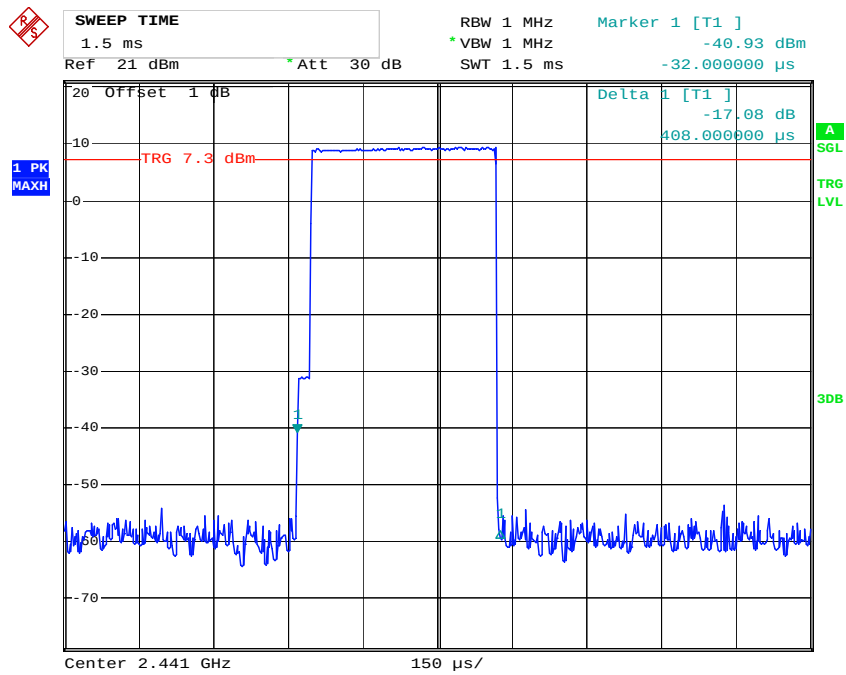


Date: 11.MAR.2014 14:13:43

DH1: High Channel

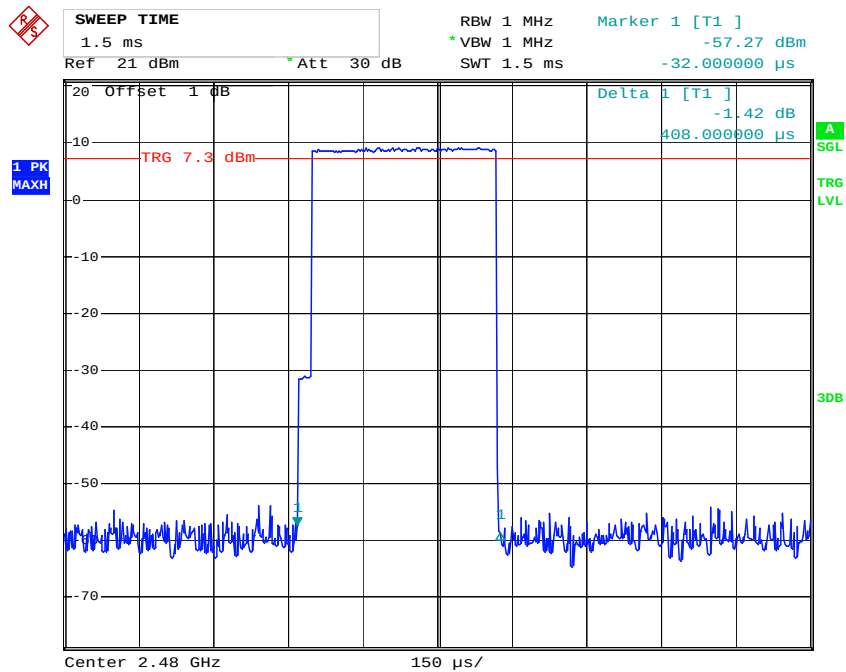


Date: 11.MAR.2014 14:13:48

DH3: Low Channel

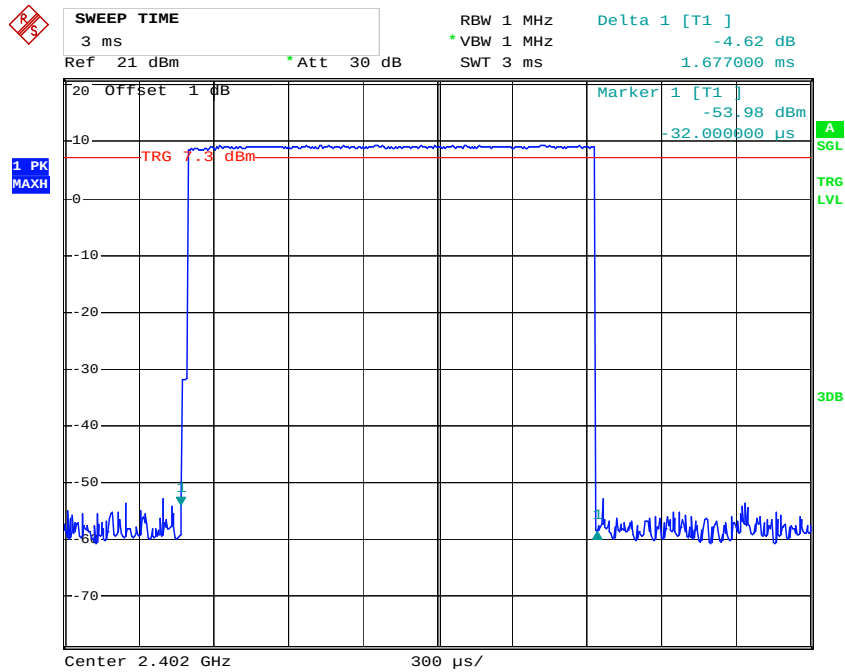


Date: 11.MAR.2014 14:15:16

DH3: Middle Channel

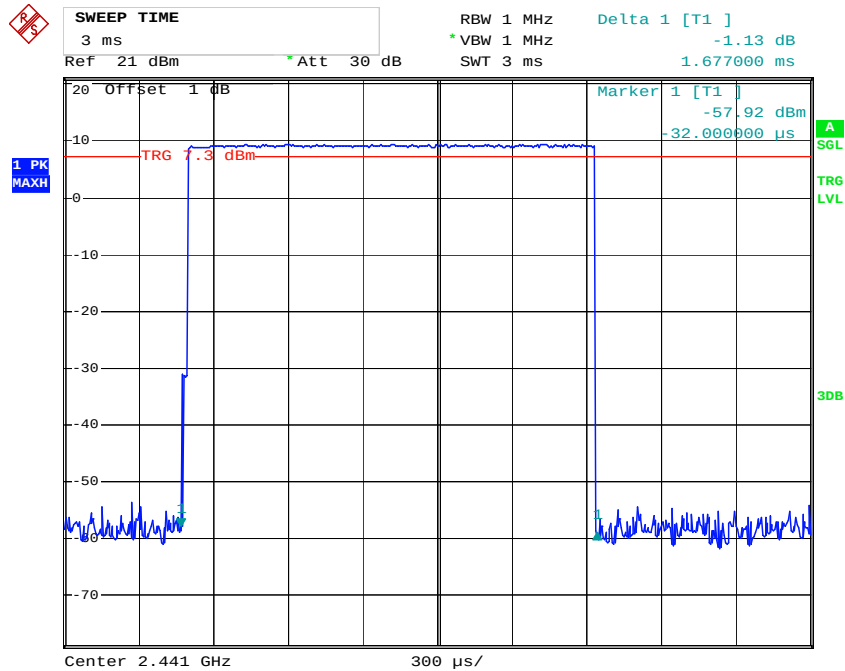


Date: 11.MAR.2014 14:15:10

DH3: High Channel

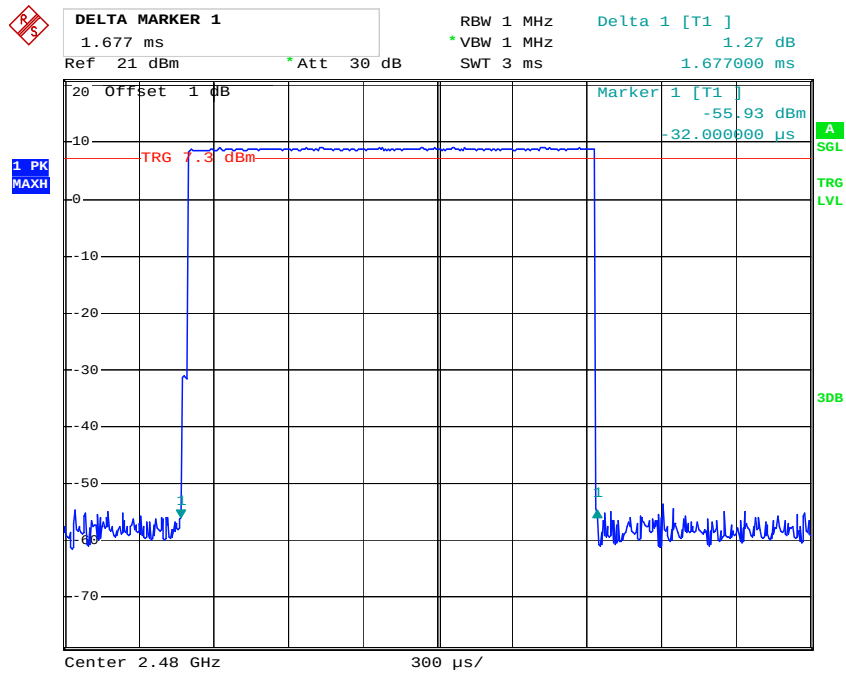


Date: 11.MAR.2014 14:15:05

DH5: Low Channel

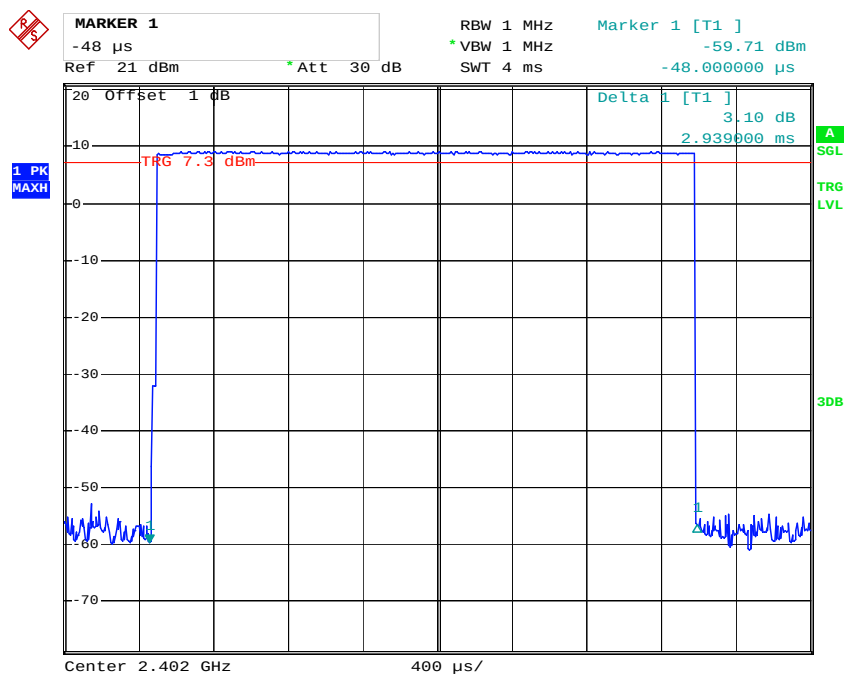


Date: 11.MAR.2014 14:17:23

DH5: Middle Channel

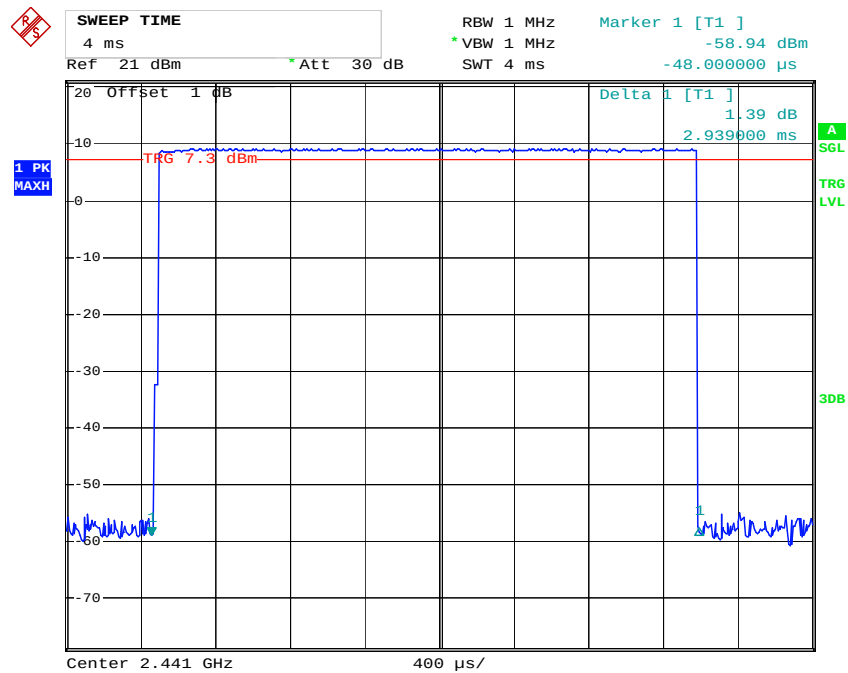

Date: 11.MAR.2014 14:17:40

DH5: High Channel

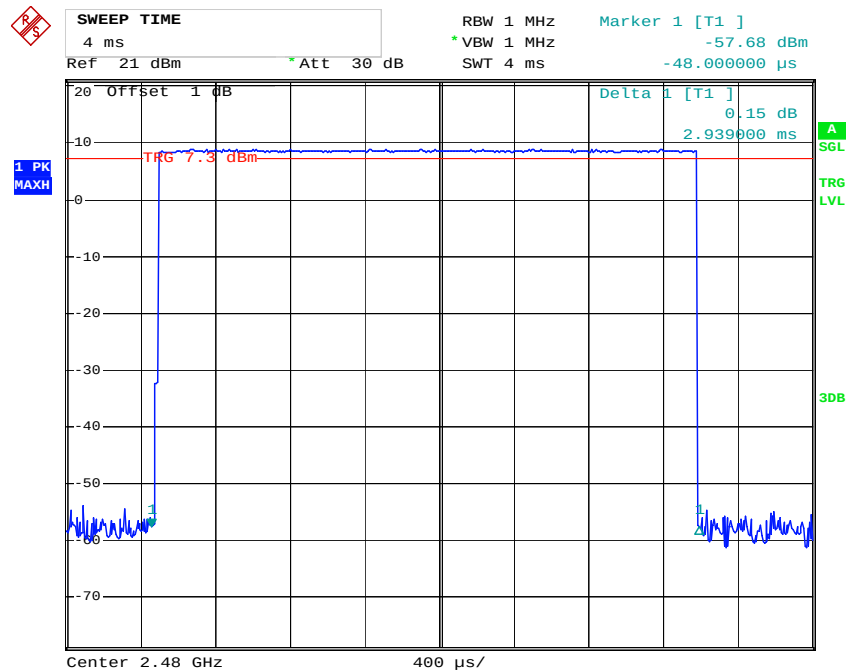


Date: 11.MAR.2014 14:17:47

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.417	0.133	0.4	Pass
	Middle	0.417	0.133	0.4	Pass
	High	0.417	0.133	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.683	0.269	0.4	Pass
	Middle	1.683	0.269	0.4	Pass
	High	1.683	0.269	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.939	0.313	0.4	Pass
	Middle	2.939	0.313	0.4	Pass
	High	2.939	0.313	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

DH1: Low Channel

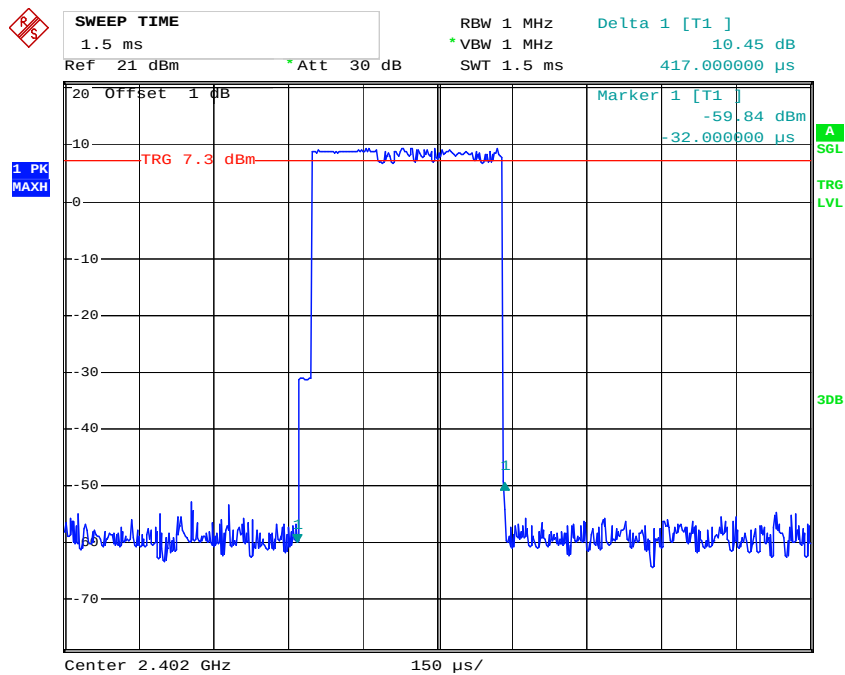


Date: 11.MAR.2014 14:14:16

DH1: Middle Channel

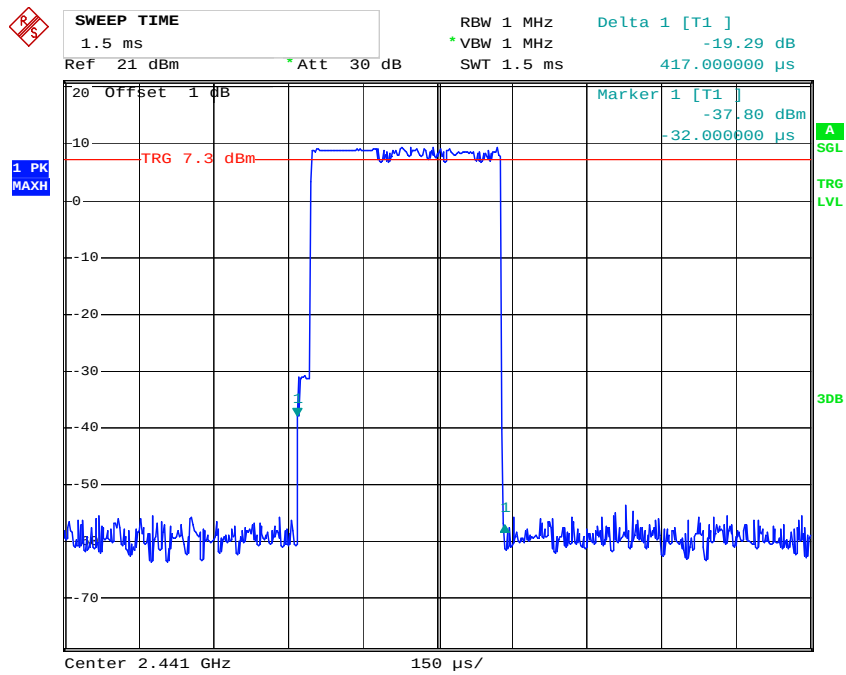


Date: 11.MAR.2014 14:14:10

DH1: High Channel

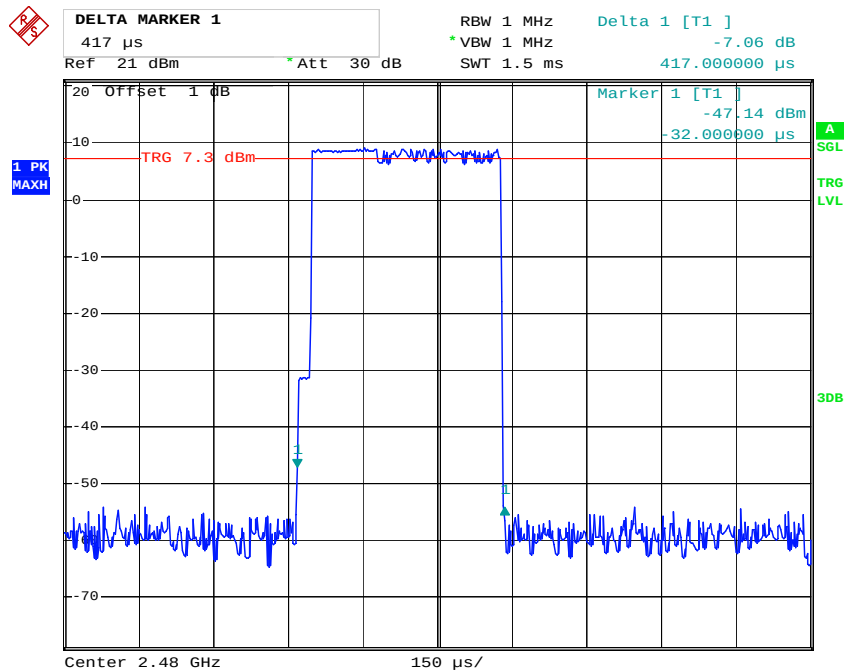


Date: 11.MAR.2014 14:14:06

DH3: Low Channel

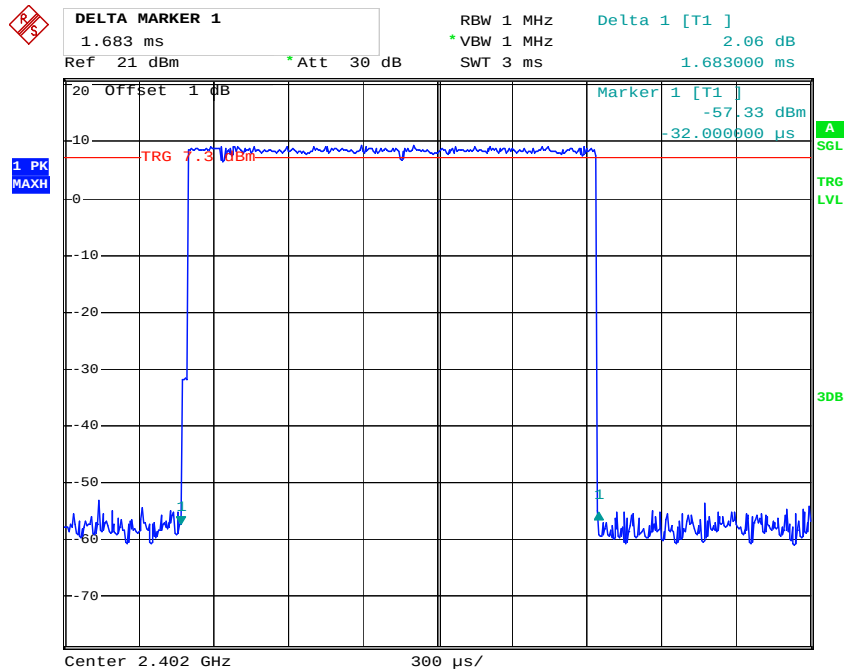


Date: 11.MAR.2014 14:15:34

DH3: Middle Channel

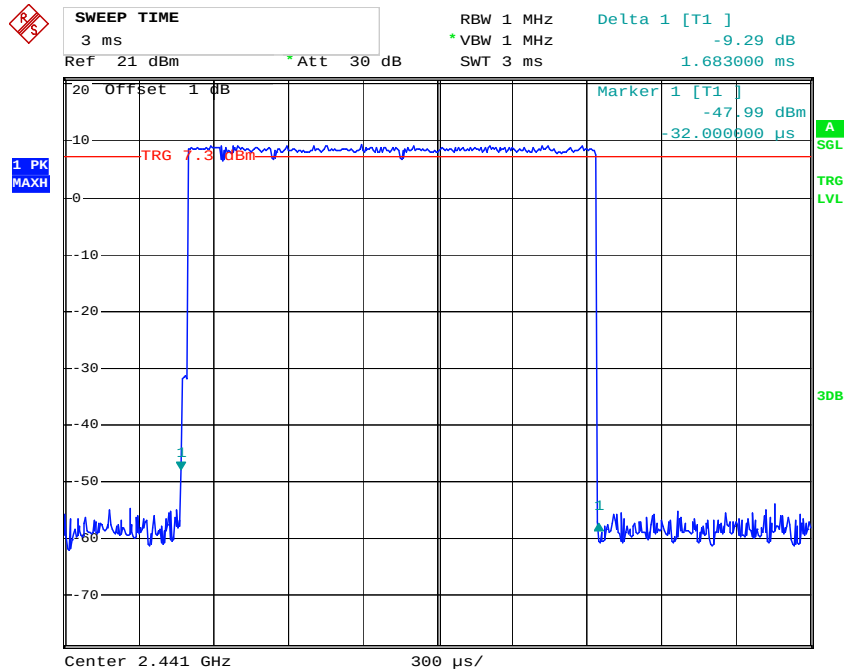


Date: 11.MAR.2014 14:15:38

DH3: High Channel

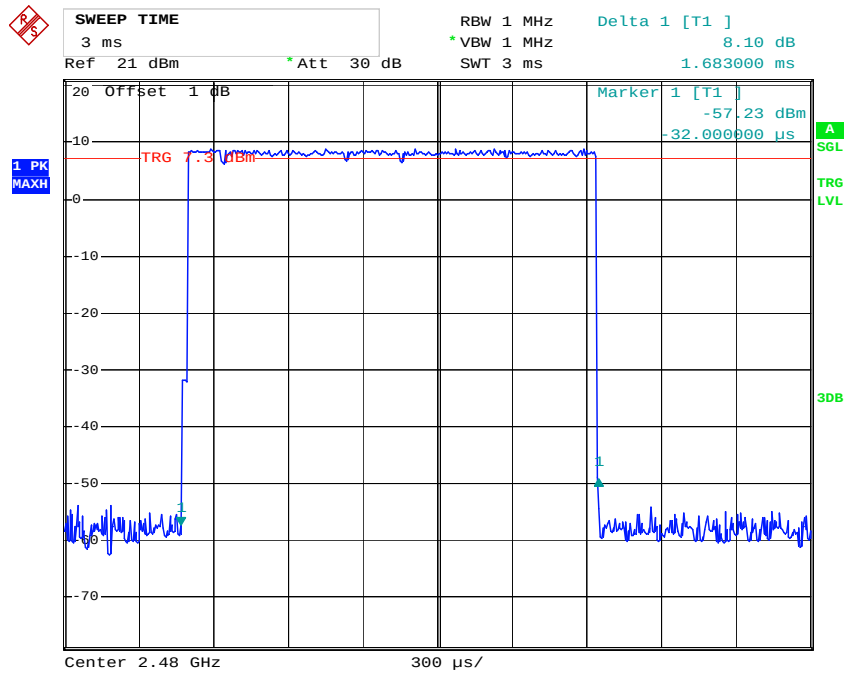


Date: 11.MAR.2014 14:16:13

DH5: Low Channel

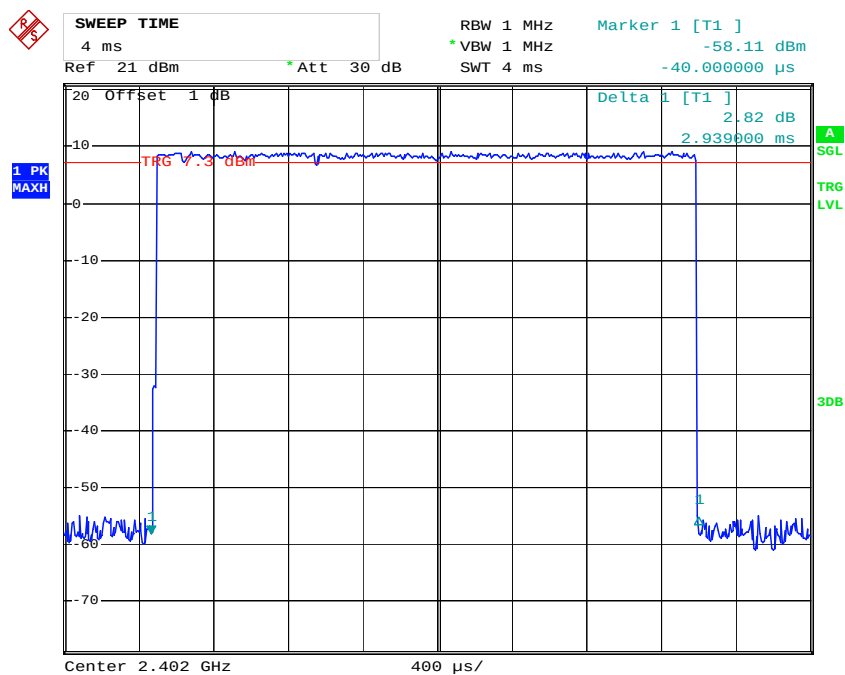


Date: 11.MAR.2014 14:18:27

DH5: Middle Channel

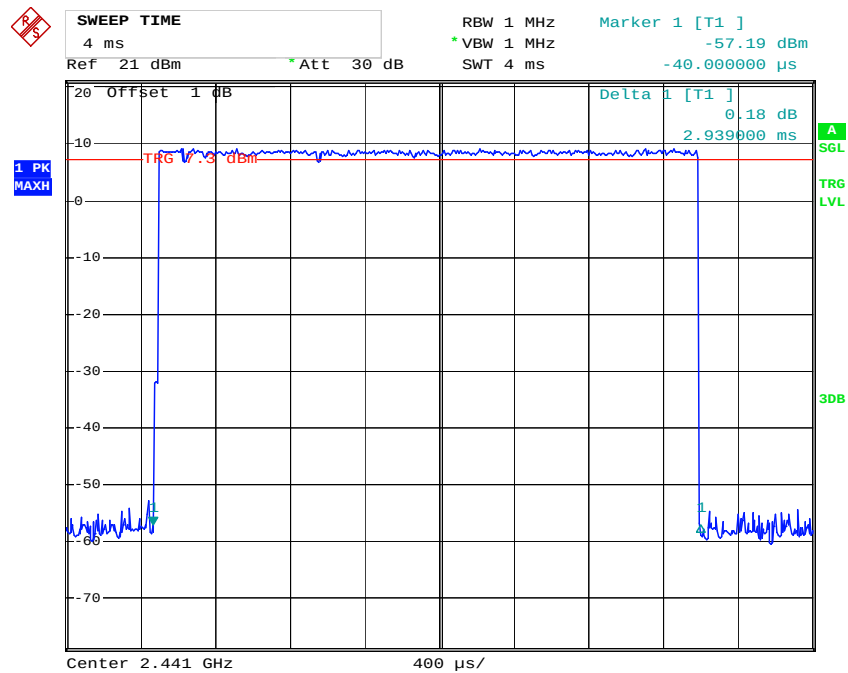

Date: 11.MAR.2014 14:18:20


DH5: High Channel

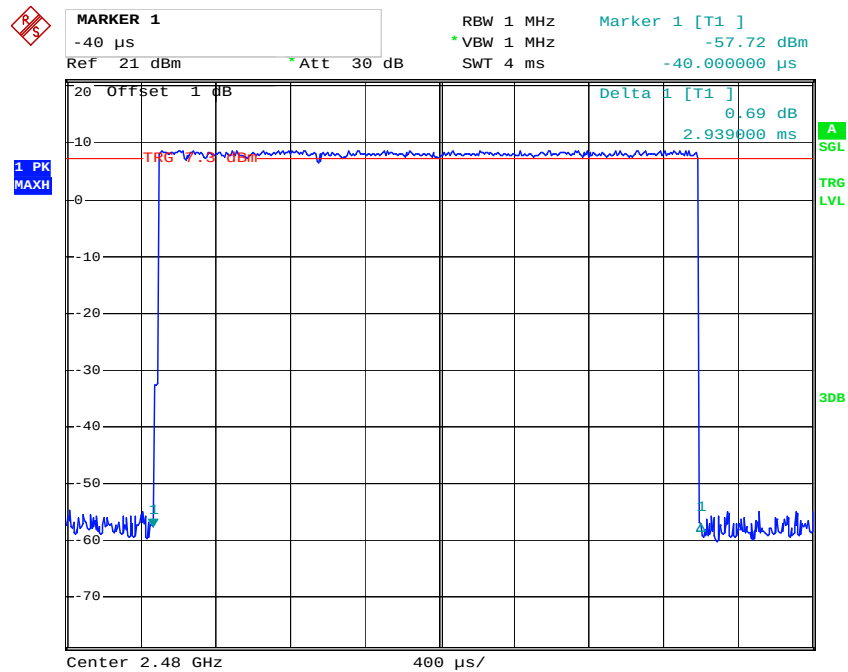

Date: 11.MAR.2014 14:18:13


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.417	0.133	0.4	Pass
	Middle	0.417	0.133	0.4	Pass
	High	0.417	0.133	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.683	0.269	0.4	Pass
	Middle	1.683	0.269	0.4	Pass
	High	1.683	0.269	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.939	0.313	0.4	Pass
	Middle	2.939	0.313	0.4	Pass
	High	2.939	0.313	0.4	Pass
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

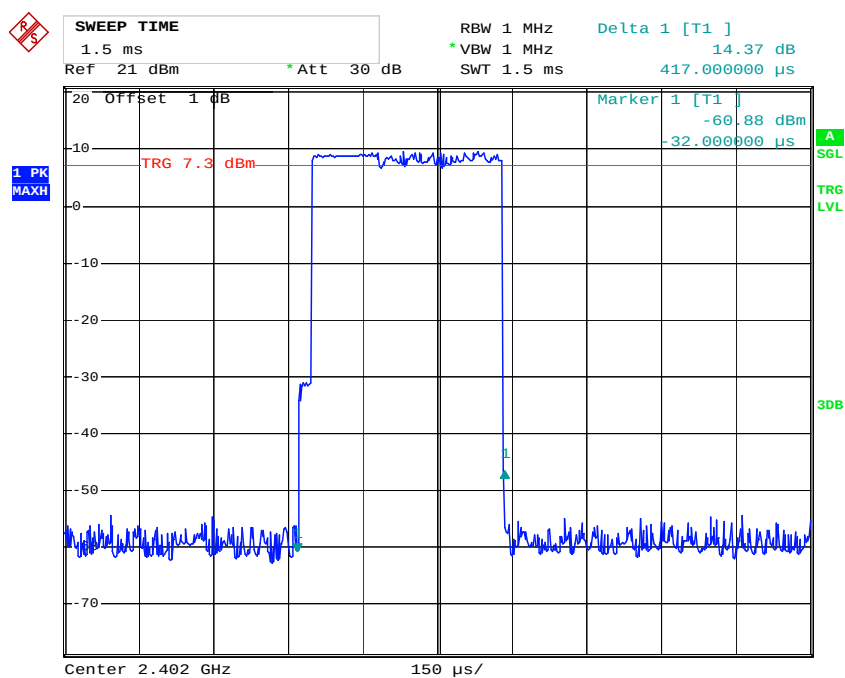DH1: Low Channel


Date: 11.MAR.2014 14:14:29

DH1: Middle Channel

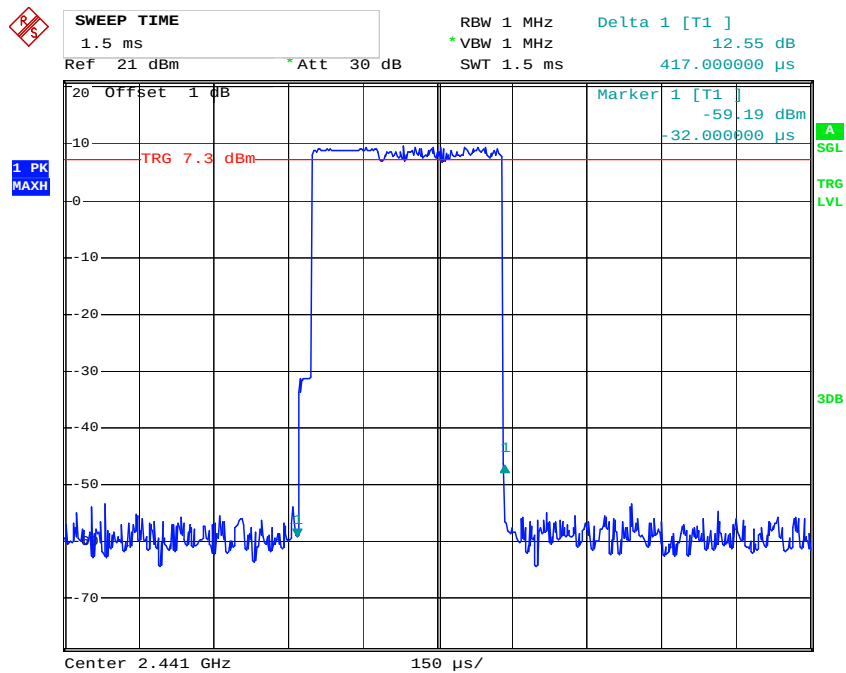


Date: 11.MAR.2014 14:14:35

DH1: High Channel

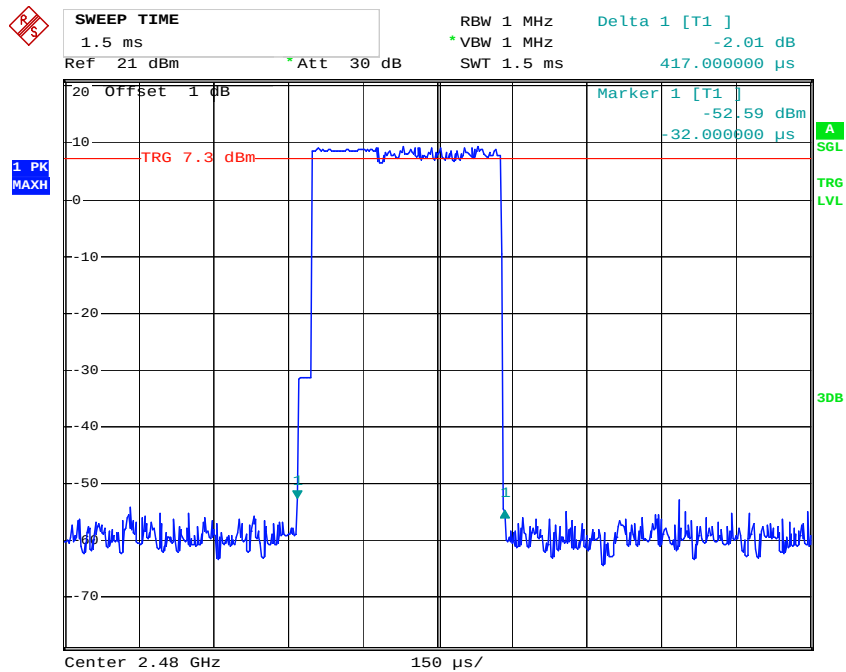


Date: 11.MAR.2014 14:14:40

DH3: Low Channel

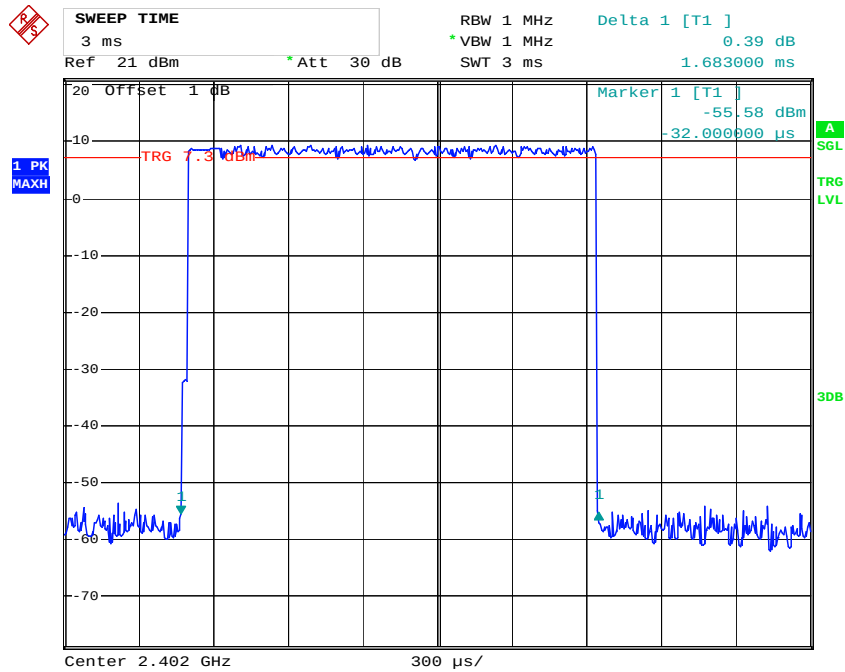


Date: 11.MAR.2014 14:16:48

DH3: Middle Channel

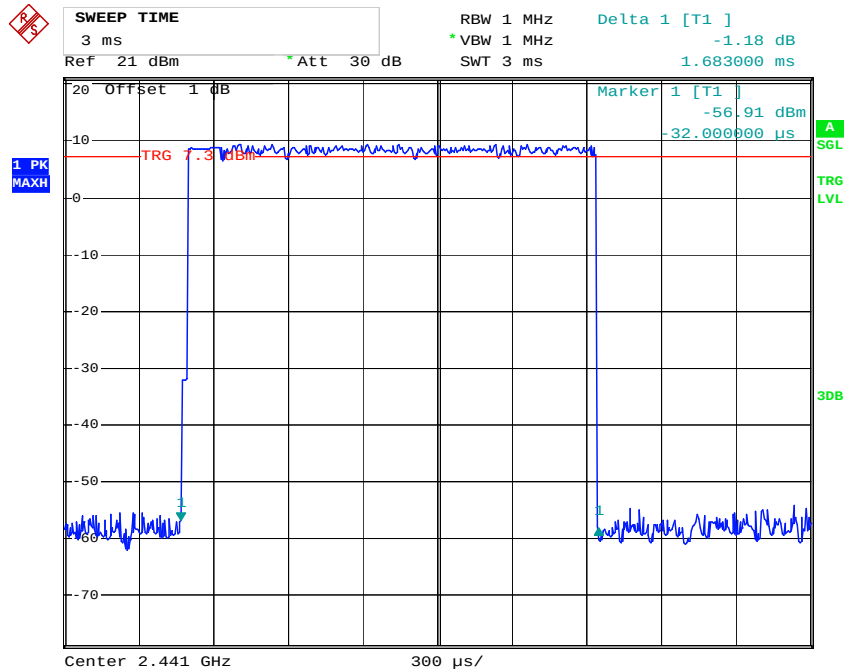


Date: 11.MAR.2014 14:16:43

DH3: High Channel

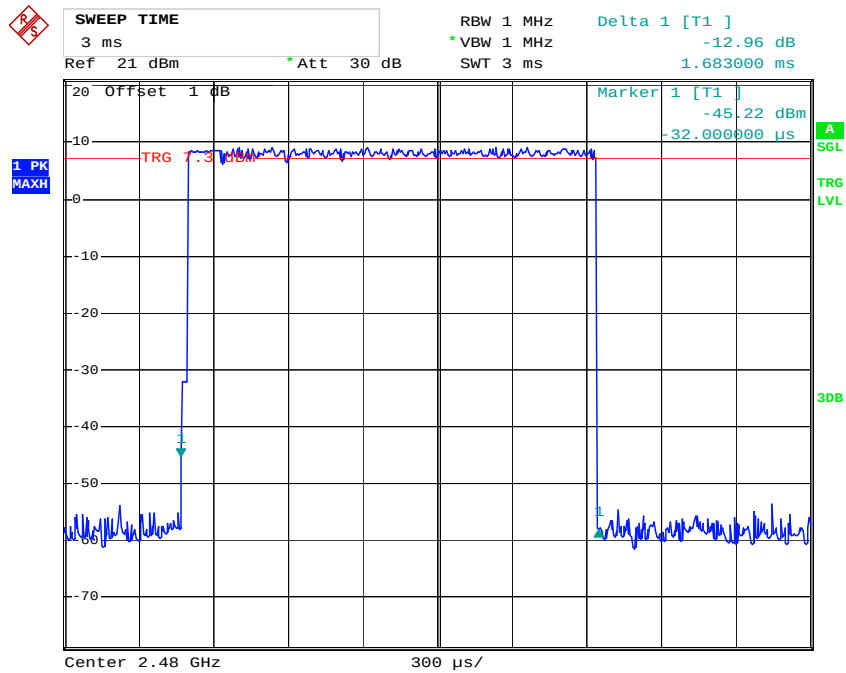


Date: 11.MAR.2014 14:16:36

DH5: Low Channel

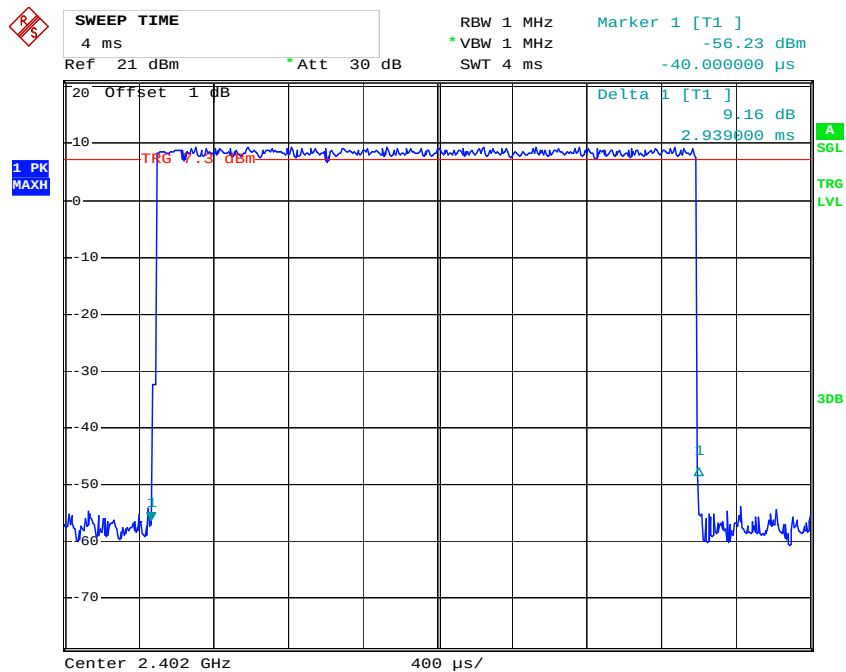


Date: 11.MAR.2014 14:18:39

DH5: Middle Channel

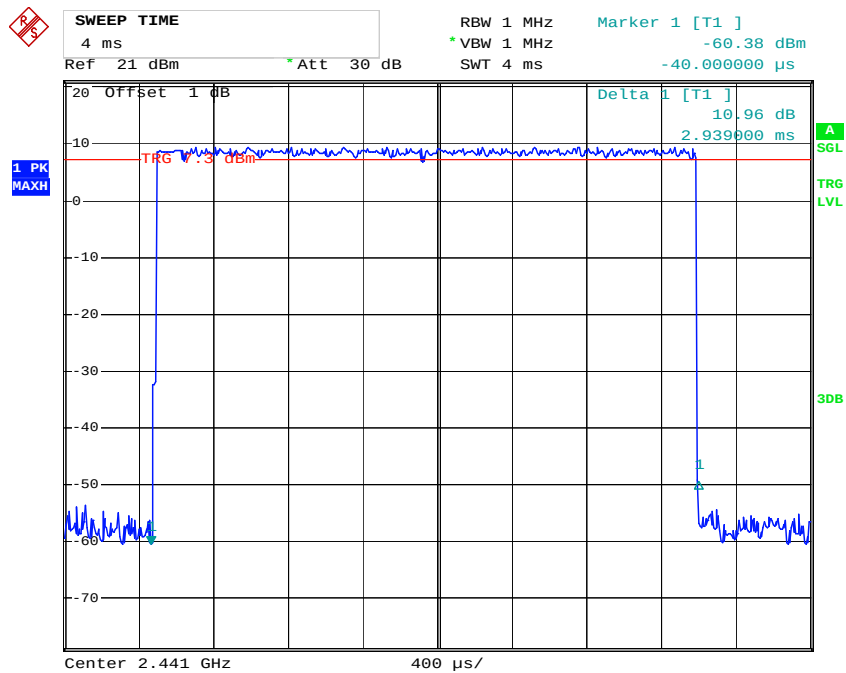

Date: 11.MAR.2014 14:18:46

DH5: High Channel

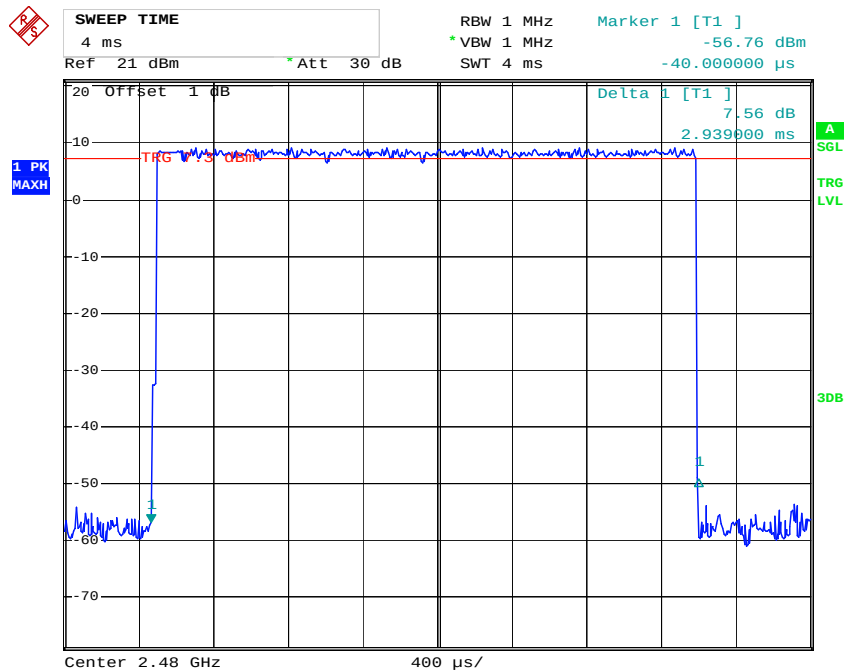

Date: 11.MAR.2014 14:18:51

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.2 kPa

* The testing was performed by Dean Liu on 2014-03-11.


Test Result: Compliance.

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	10.39	30
	Middle	2441	10.59	30
	High	2480	10.47	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	10.96	30
	Middle	2441	11.20	30
	High	2480	10.99	30
EDR Mode (8-DPSK)	Low	2402	11.29	30
	Middle	2441	11.42	30
	High	2480	11.39	30


Note: The data above was tested in conducted mode.

BDR Mode (GFSK):

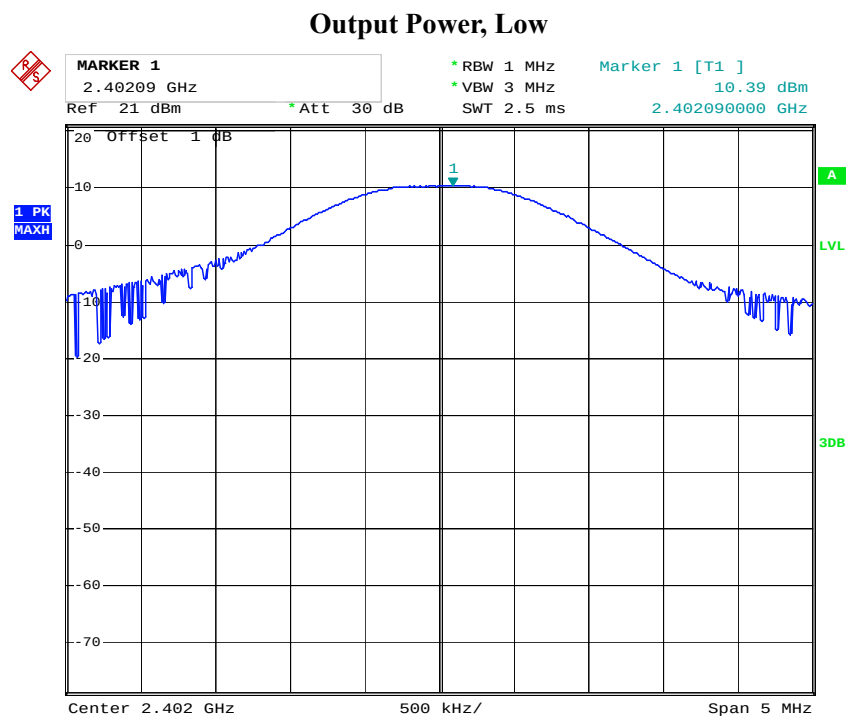


Date: 11.MAR.2014 13:17:11

Output Power, Middle

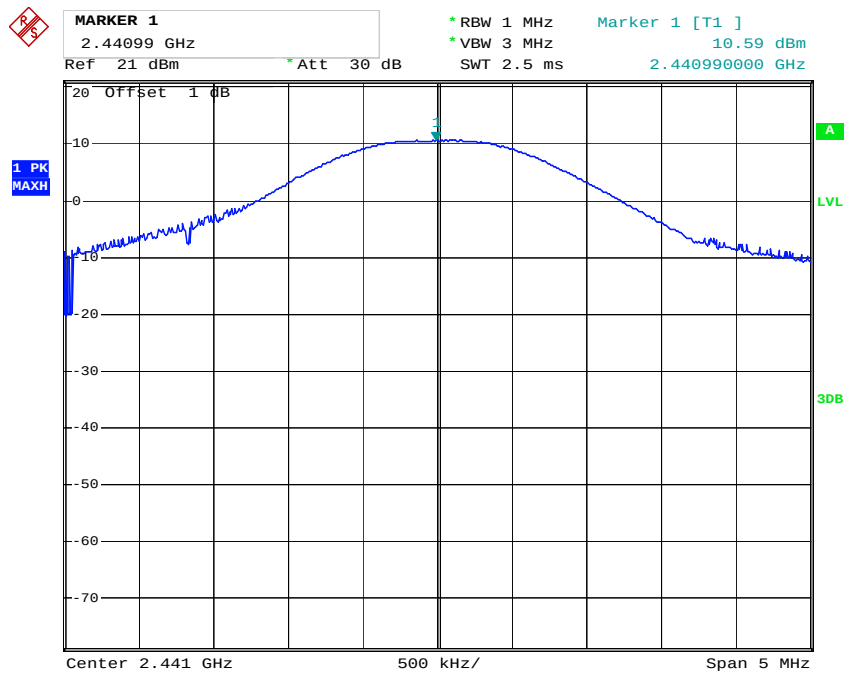

Date: 11.MAR.2014 13:16:34


Output Power, High

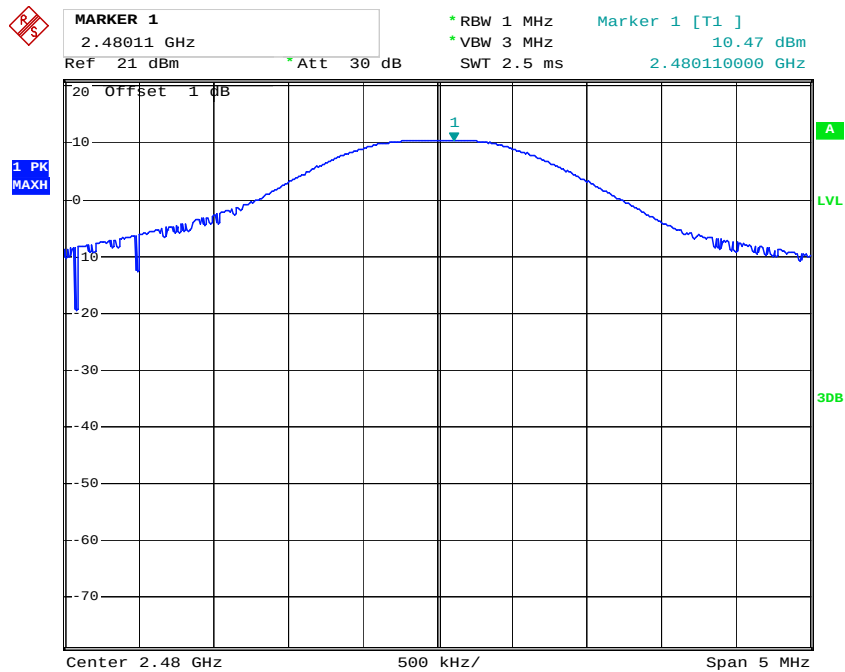

Date: 11.MAR.2014 13:17:46


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low

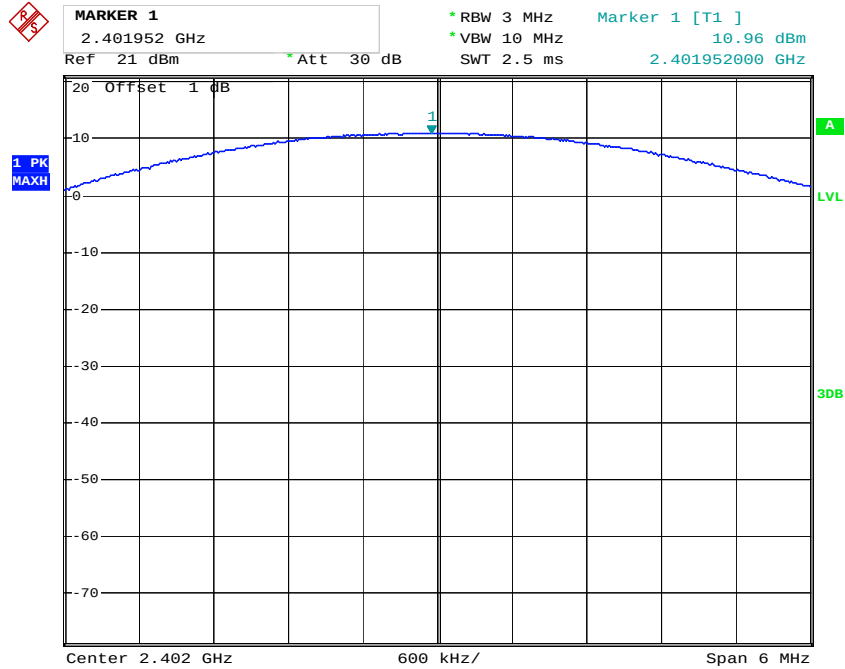


Date: 11.MAR.2014 13:25:11

Output Power, Middle

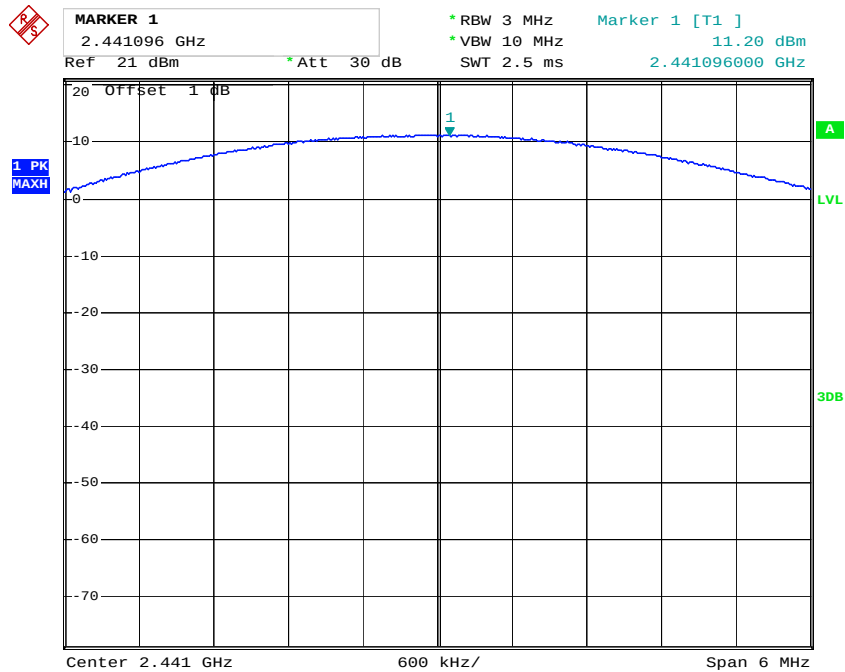

Date: 11.MAR.2014 13:24:34


Output Power, High

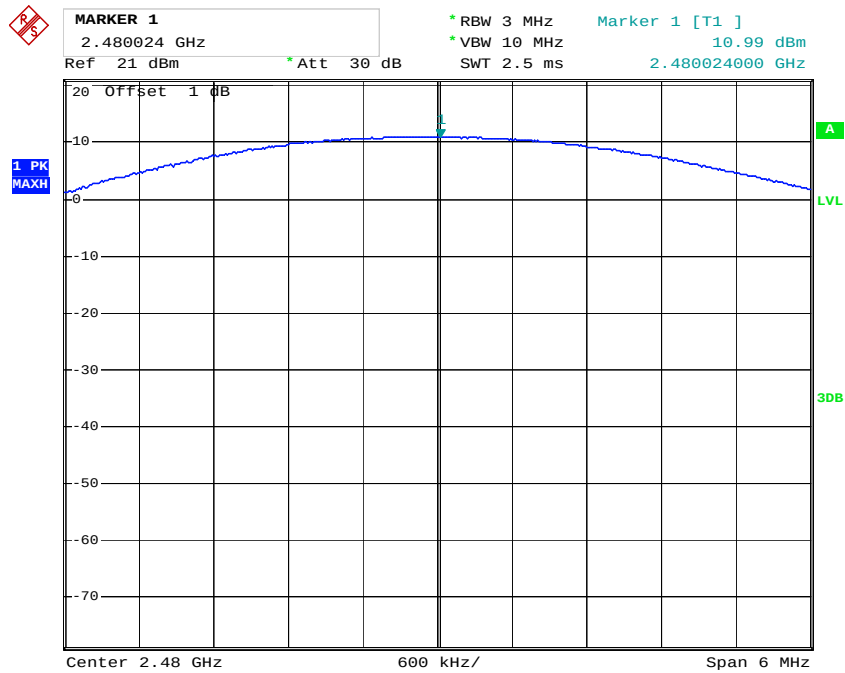

Date: 11.MAR.2014 13:25:31


EDR Mode (8-DPSK):

Output Power, Low

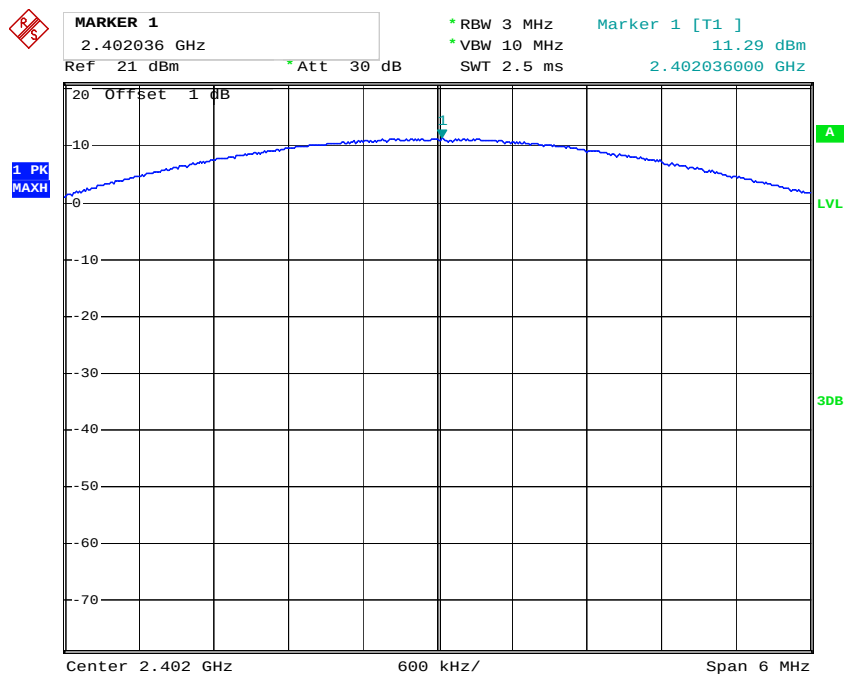


Date: 11.MAR.2014 13:27:07

Output Power, Middle

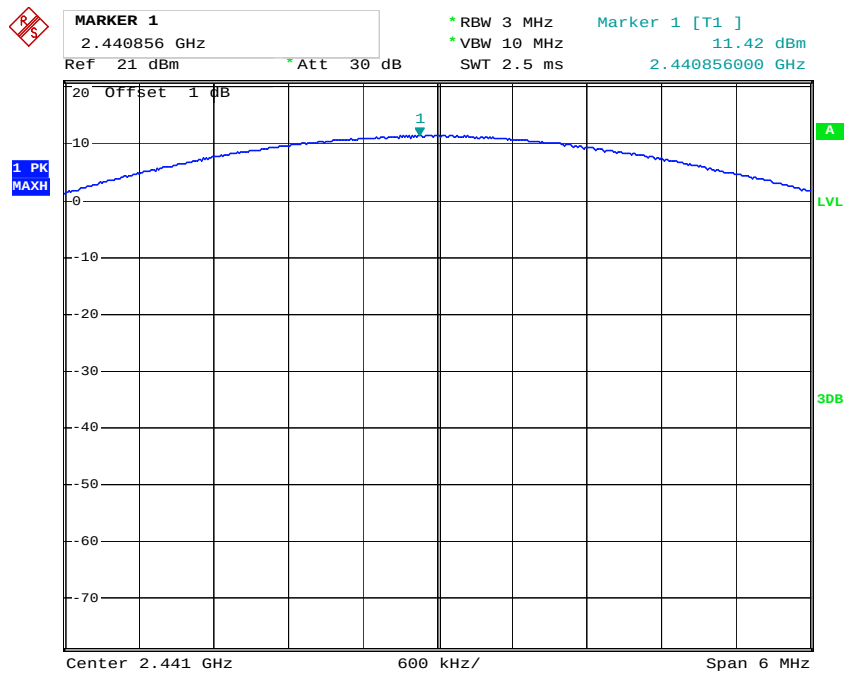

Date: 11.MAR.2014 13:26:49

Output Power, High

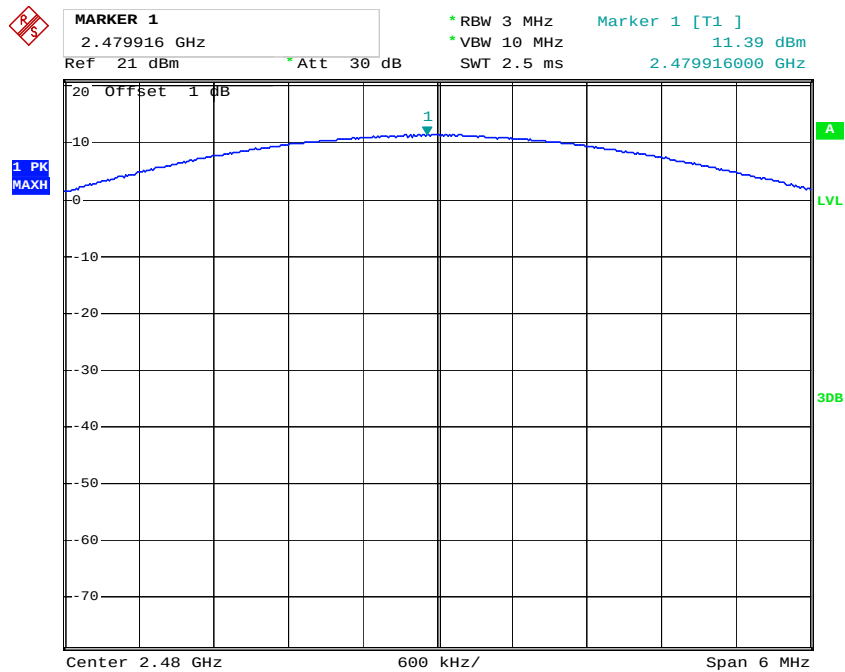

Date: 11.MAR.2014 13:26:08

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	23.2 °C
Relative Humidity:	49 %
ATM Pressure:	101.5 kPa

* The testing was performed by Dean Liu on 2014-03-11

Test Result: Compliance


BDR Mode (GFSK):

Band Edge, Left Side

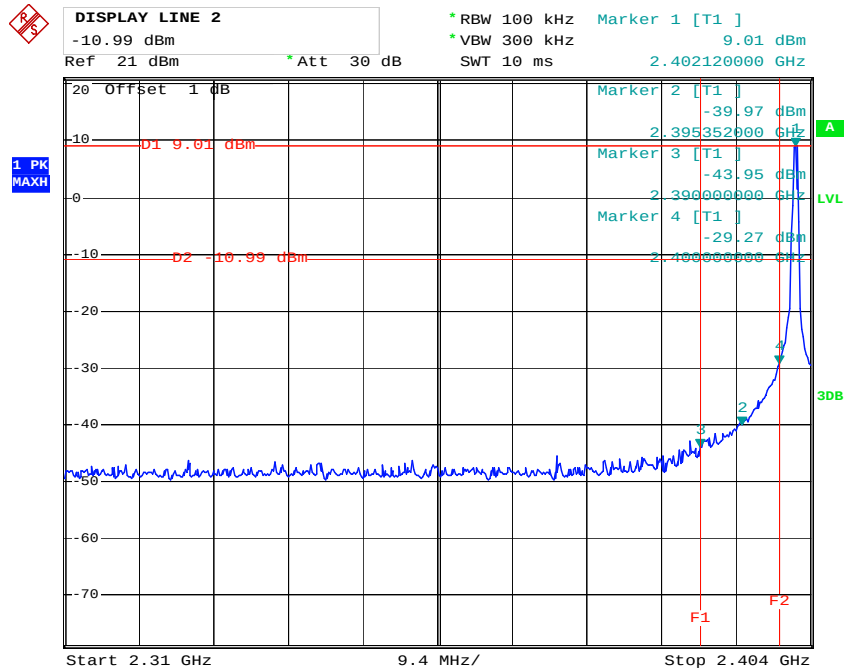


Date: 11.MAR.2014 13:56:53


Band Edge, Right Side

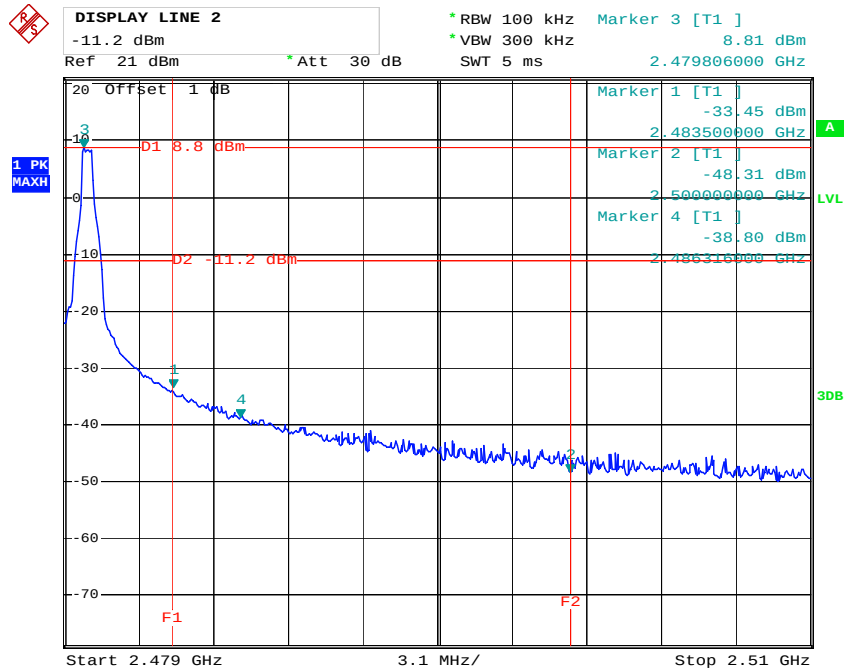

Date: 11.MAR.2014 13:55:47

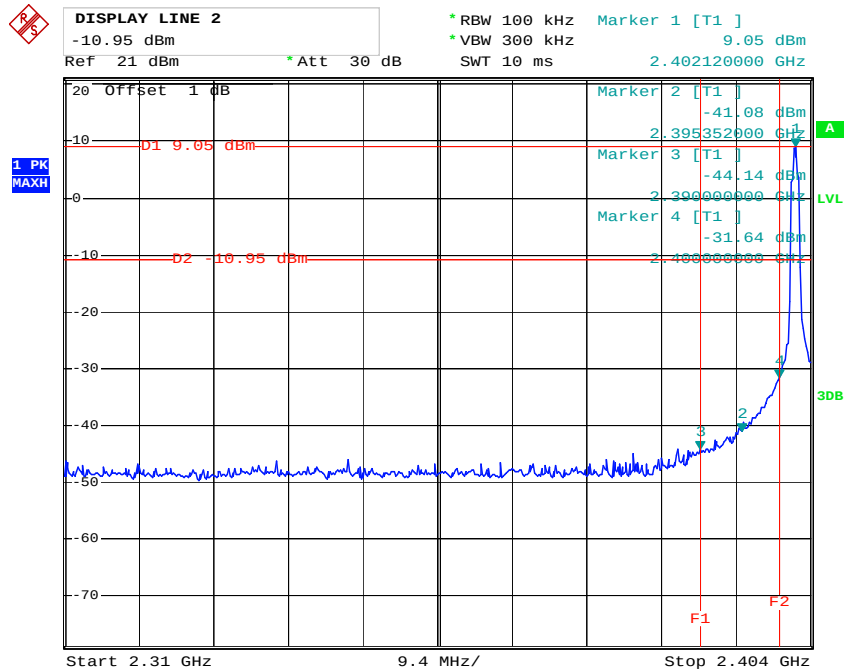*EDR Mode ($\pi/4$ -DQPSK):***Band Edge, Left Side**


Date: 11.MAR.2014 13:57:54

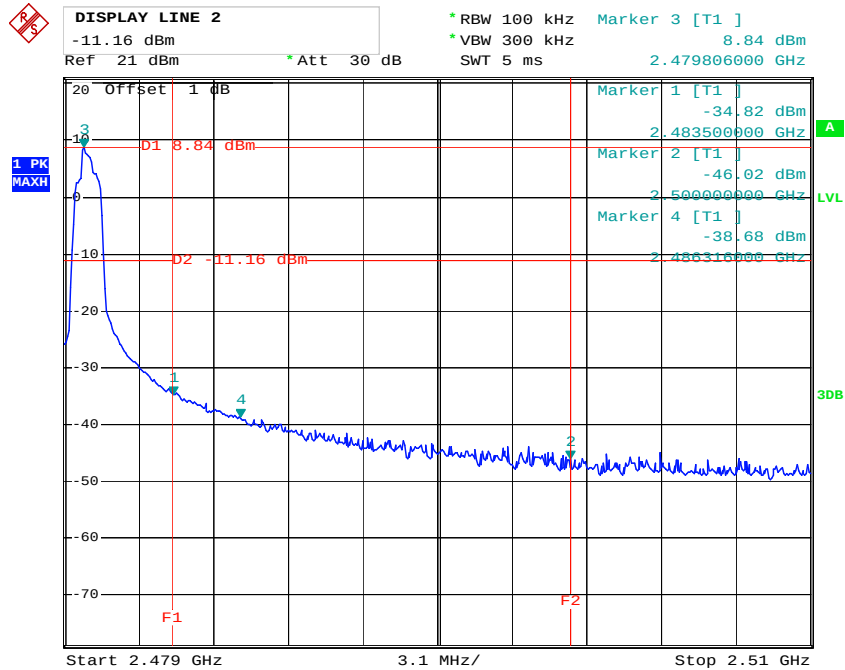Band Edge, Right Side

Date: 11.MAR.2014 13:55:09


EDR Mode (8-DPSK):

Band Edge, Left Side

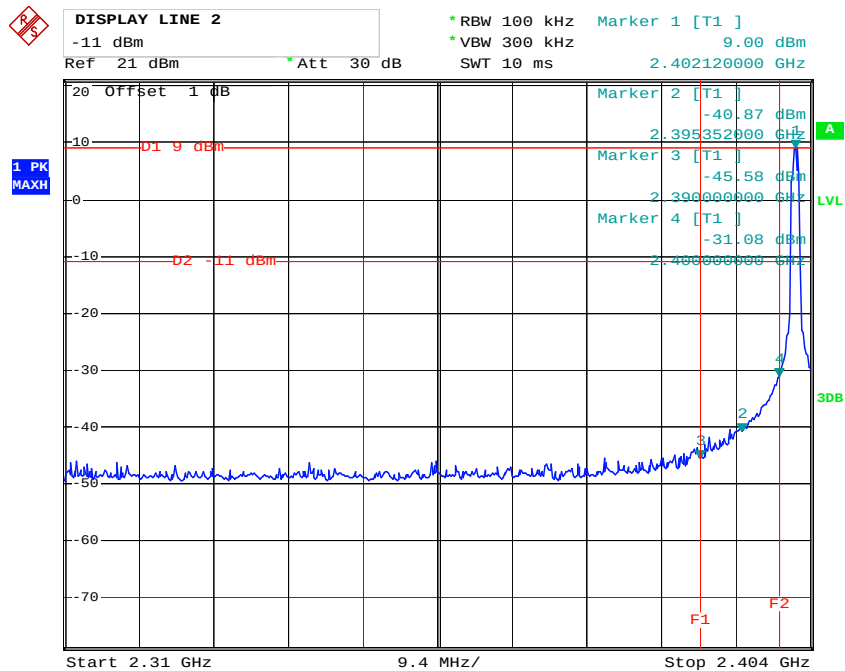

Date: 11.MAR.2014 13:58:47

Band Edge, Right Side

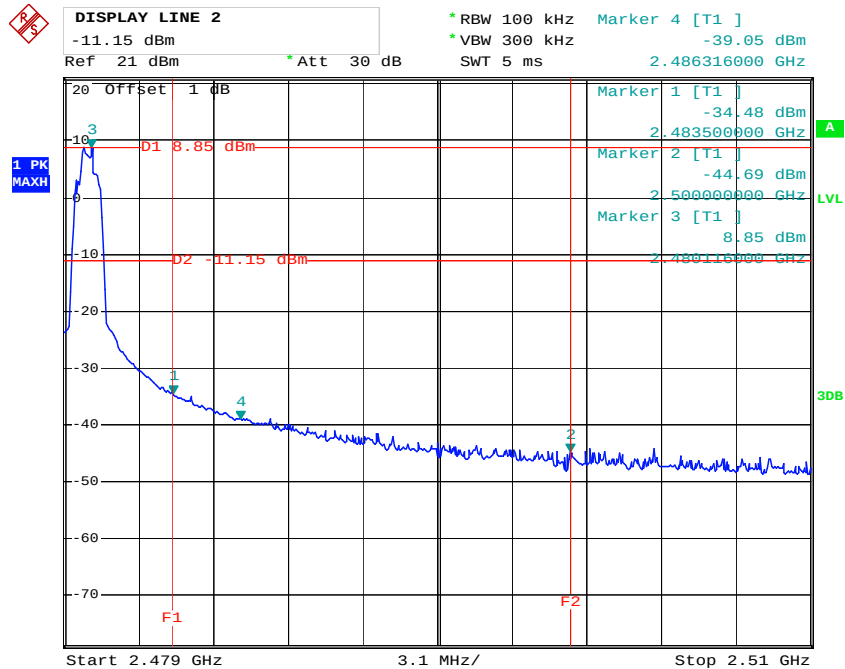

Date: 11.MAR.2014 13:54:18

***** END OF REPORT *****