


Horizontal

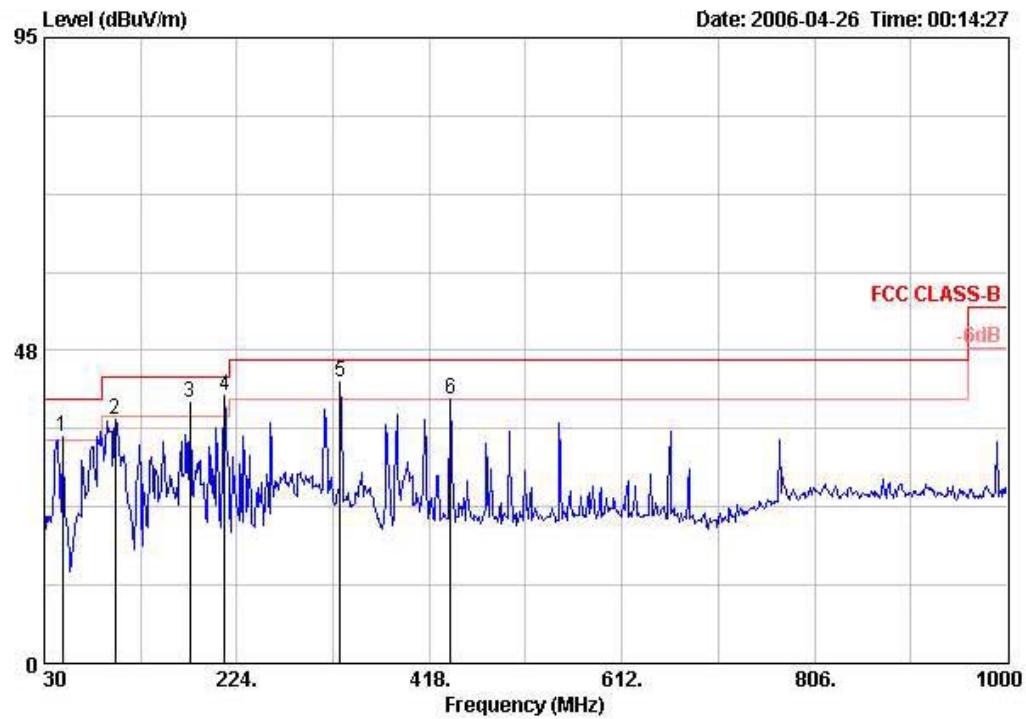

Freq	Level	Over Limit	Limit	Read		Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
				Line	Level						
MHz	dBuV/m	dB	dBuV/m								m
1 @	48.430	34.36	-5.64	40.00	54.30	10.79	1.10	31.83	Peak	HORIZONTAL	3
2 @	101.780	36.96	-6.54	43.50	55.81	11.37	1.50	31.71	Peak	HORIZONTAL	3
3 @	176.470	39.52	-3.98	43.50	59.25	9.89	2.00	31.62	Peak	HORIZONTAL	3
4 @	211.390	40.64	-2.86	43.50	59.55	10.45	2.06	31.42	Peak	HORIZONTAL	3
5 @	327.790	42.59	-3.41	46.00	56.54	15.02	2.31	31.28	Peak	HORIZONTAL	3
6 @	439.340	40.22	-5.79	46.00	50.80	17.50	2.86	30.94	Peak	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 2

Vertical

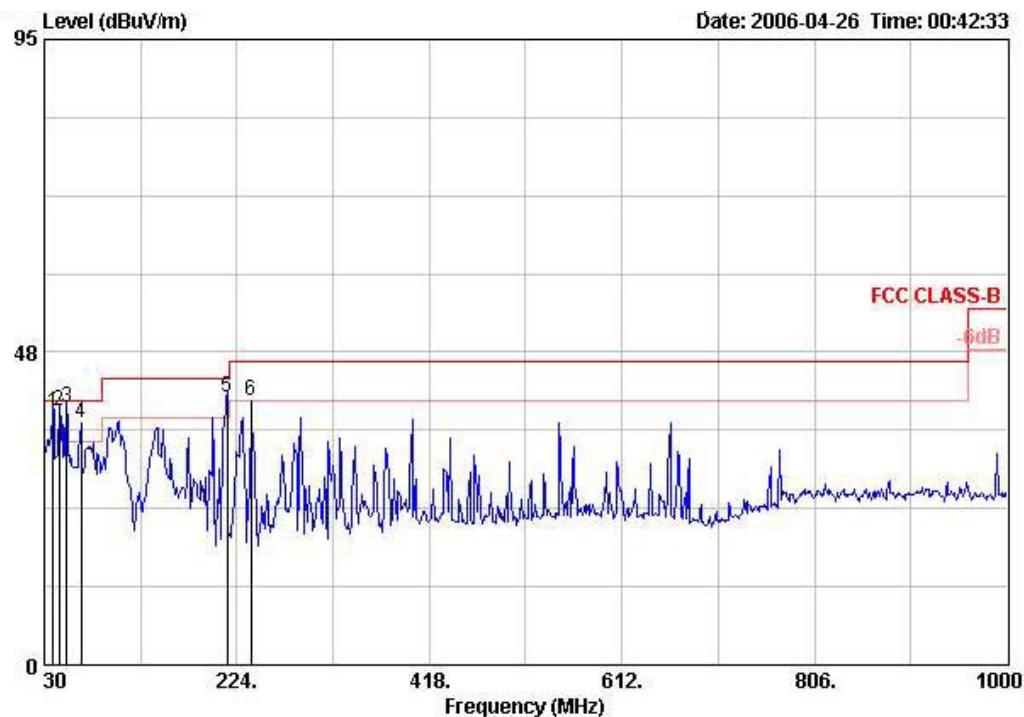

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
		Limit	Line	Level	Factor	Loss	Factor			
1 @	38.730	38.43	-1.57	40.00	54.29	14.74	1.15	31.75 QP	VERTICAL	3
2 @	44.550	38.70	-1.30	40.00	57.43	11.92	1.10	31.75 QP	VERTICAL	3
3 @	52.310	39.09	-0.91	40.00	60.08	9.63	1.17	31.78 QP	VERTICAL	3
4 @	66.860	36.75	-3.25	40.00	60.39	6.78	1.40	31.82 Peak	VERTICAL	3
5 @	214.300	40.63	-2.87	43.50	59.31	10.66	2.08	31.41 QP	VERTICAL	3
6 @	238.550	40.13	-5.87	46.00	56.79	12.42	2.28	31.37 Peak	VERTICAL	3

Horizontal

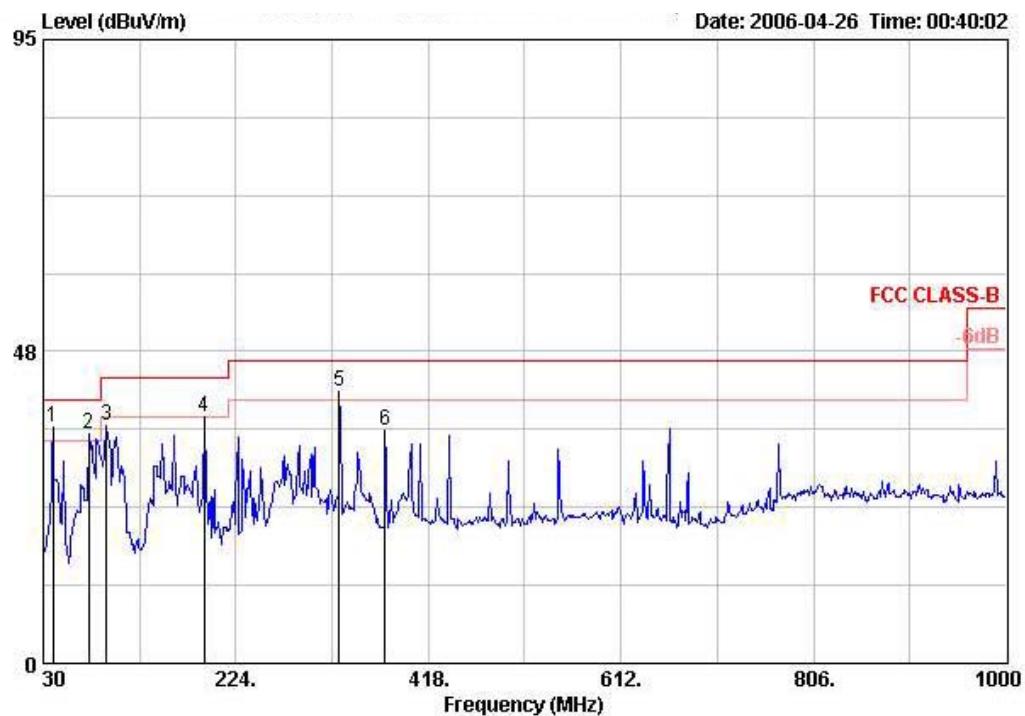

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
		Limit	Line	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 @	39.700	36.10	-3.90	40.00	52.36	14.41	1.10	31.77 Peak	HORIZONTAL	3
2 @	75.590	34.97	-5.03	40.00	57.82	7.40	1.30	31.55 Peak	HORIZONTAL	3
3 @	94.020	36.14	-7.36	43.50	56.25	10.13	1.47	31.72 Peak	HORIZONTAL	3
4 @	191.990	37.56	-5.94	43.50	57.49	9.66	1.93	31.52 Peak	HORIZONTAL	3
5 @	327.790	41.35	-4.65	46.00	55.30	15.02	2.31	31.28 Peak	HORIZONTAL	3
6 @	374.350	35.35	-10.65	46.00	47.18	16.76	2.55	31.14 Peak	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 3

Vertical

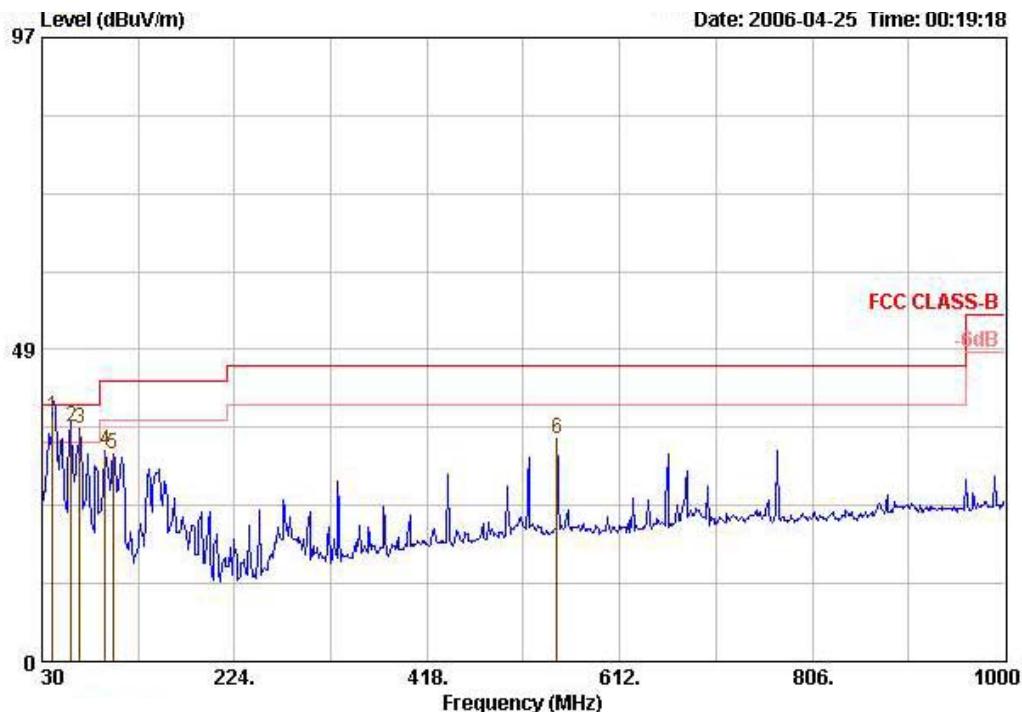

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table	
		Limit	Line Factor	dB/m	dB	dBuV/m	dB			
		MHz	dBuV/m		dB	dBuV/m	dB		cm	deg
1	40.670	38.03	-1.97	40.00	11.90	0.54	29.81	55.40	QP	---
2	59.100	36.39	-3.61	40.00	5.45	0.65	29.86	60.15	QP	---
3	67.830	36.08	-3.92	40.00	5.20	0.68	29.90	60.10	Peak	---
4	94.020	32.82	-10.68	43.50	9.60	0.79	30.11	52.54	Peak	---
5	101.780	32.17	-11.33	43.50	10.76	0.81	30.09	50.69	Peak	---
6	548.950	34.58	-11.42	46.00	18.28	1.87	30.63	45.06	Peak	---

Horizontal

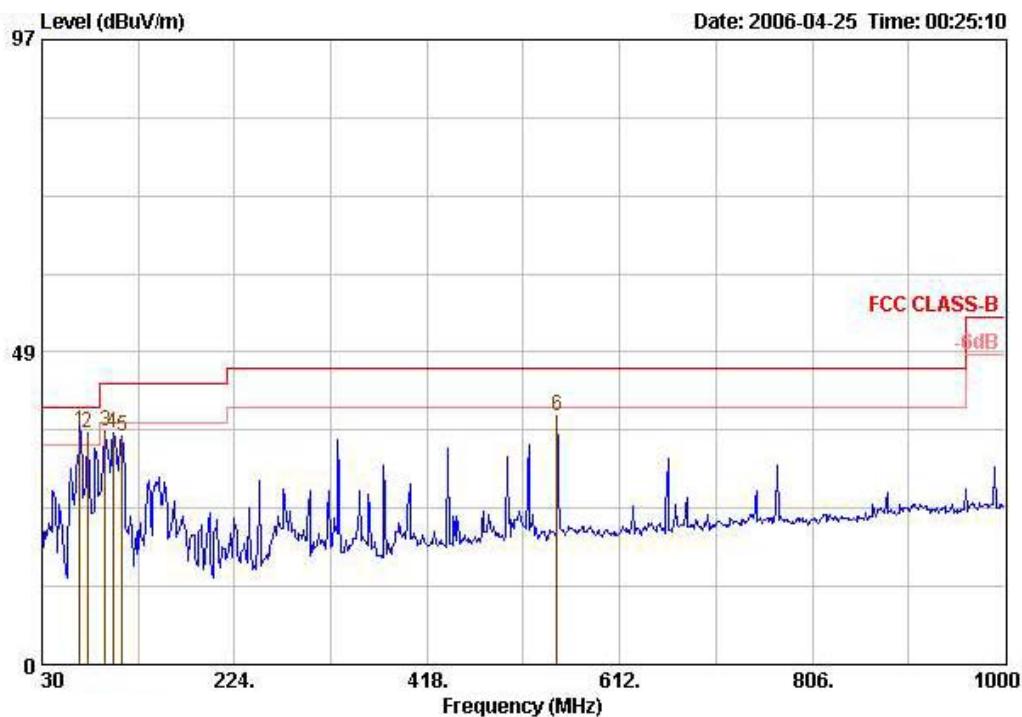

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line	Factor	Loss	Factor	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	67.830	36.25	-3.75	40.00	5.20	0.68	29.90	60.27	QP
2	75.590	35.90	-4.10	40.00	6.20	0.70	29.97	58.97	Peak
3	94.020	36.26	-7.24	43.50	9.60	0.79	30.11	55.98	Peak
4	101.780	36.07	-7.43	43.50	10.76	0.81	30.09	54.59	Peak
5	110.510	35.37	-8.13	43.50	11.50	0.84	30.07	53.09	Peak
6	548.950	38.72	-7.28	46.00	18.28	1.87	30.63	49.19	Peak

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 3

Vertical

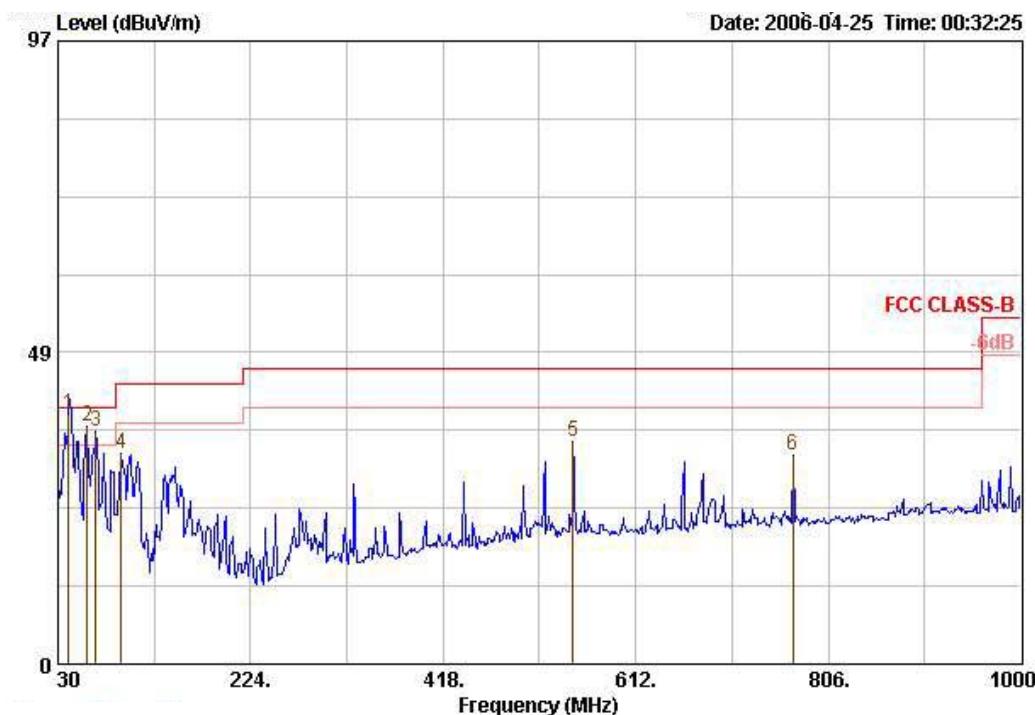

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Line	Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 !	40.670	38.74	-1.26	40.00	11.90	0.54	29.81	56.11 QP	---
2 !	59.100	36.98	-3.02	40.00	5.45	0.65	29.86	60.74 Peak	---
3 !	67.830	36.19	-3.81	40.00	5.20	0.68	29.90	60.21 Peak	---
4	94.020	32.80	-10.70	43.50	9.60	0.79	30.11	52.52 Peak	---
5	548.950	34.74	-11.26	46.00	18.28	1.87	30.63	45.22 Peak	---
6	770.110	32.51	-13.49	46.00	19.92	2.19	30.09	40.48 Peak	---

Horizontal

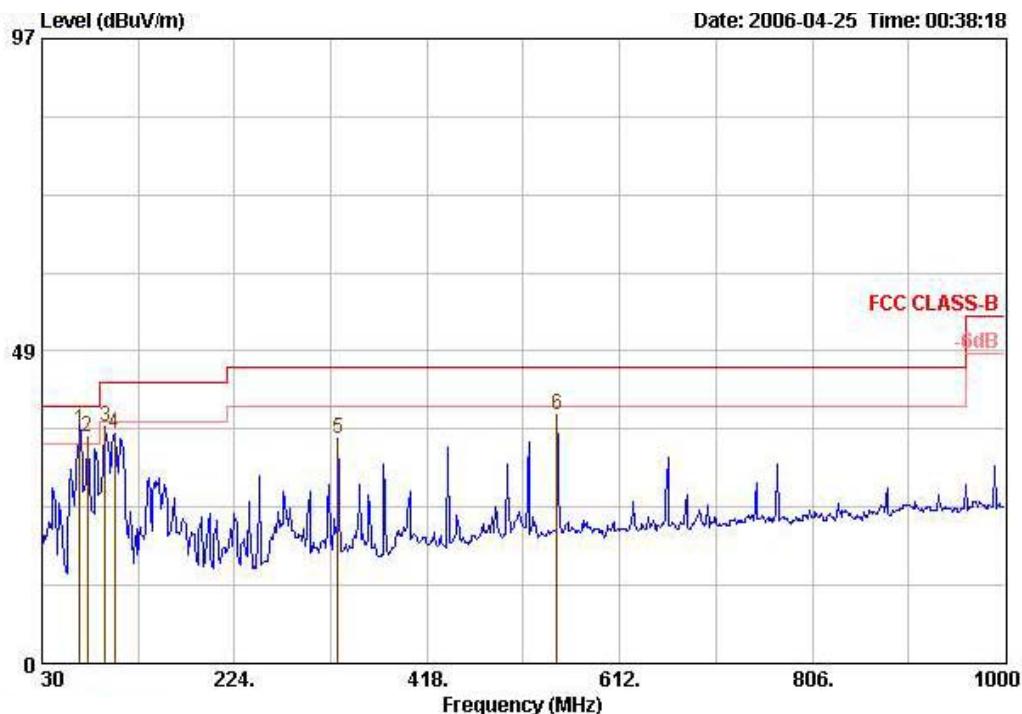

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line Factor	dB/m	dB	dB	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	67.830	36.30	-3.70	40.00	5.20	0.68	29.90	60.32	QP
2	75.590	35.24	-4.76	40.00	6.20	0.70	29.97	58.30	Peak
3	94.020	36.69	-6.81	43.50	9.60	0.79	30.11	56.41	Peak
4	102.750	35.68	-7.82	43.50	10.89	0.81	30.08	54.06	Peak
5	327.790	34.90	-11.10	46.00	13.82	1.43	30.48	50.13	Peak
6	548.950	38.64	-7.36	46.00	18.28	1.87	30.63	49.12	Peak

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 4

Vertical

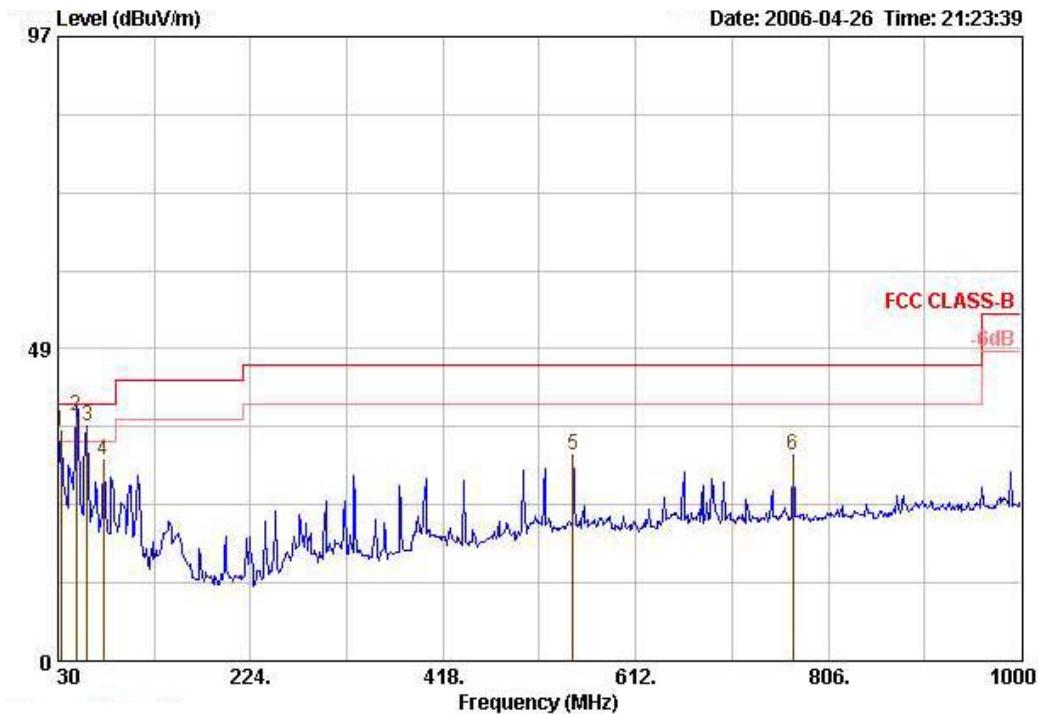

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line	Factor	Loss	Factor	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	32.910	35.71	-4.29	40.00	16.45	0.49	29.78	48.56 Peak	---
2	48.430	38.09	-1.91	40.00	8.50	0.59	29.83	58.83 QP	---
3	59.100	36.60	-3.40	40.00	5.45	0.65	29.86	60.36 Peak	---
4	75.590	31.18	-8.82	40.00	6.20	0.70	29.97	54.24 Peak	---
5	548.950	31.97	-14.03	46.00	18.28	1.87	30.63	42.45 Peak	---
6	770.110	32.00	-14.00	46.00	19.92	2.19	30.09	39.98 Peak	---

Horizontal

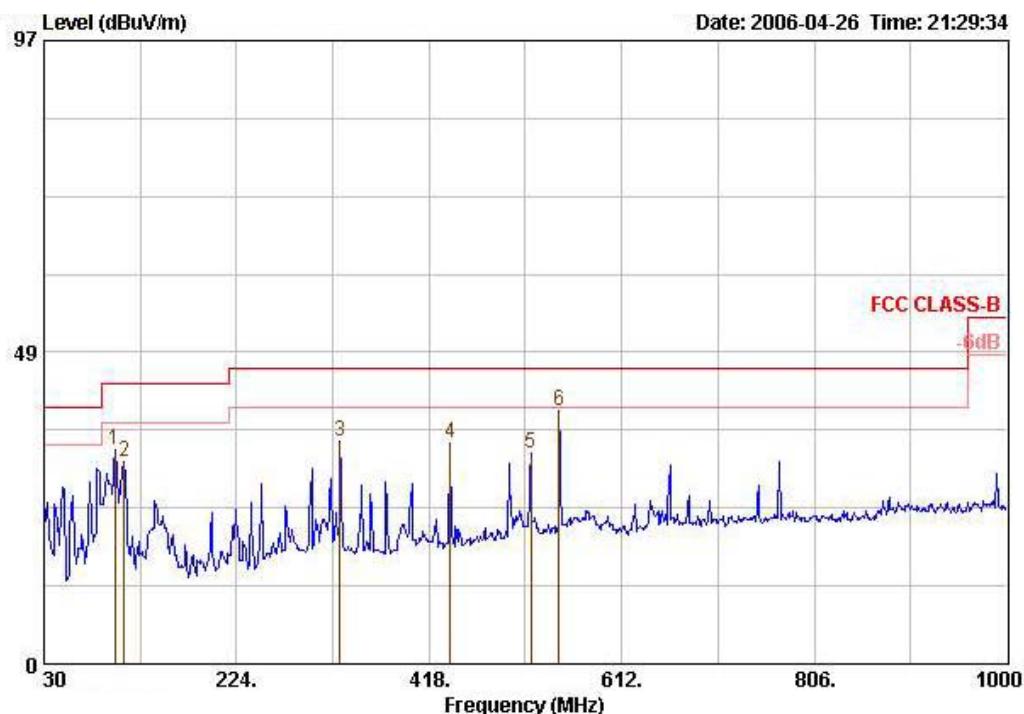

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	101.780	33.24	-10.26	43.50	10.76	0.81	30.09	51.76 Peak	---
2	110.510	31.55	-11.95	43.50	11.50	0.84	30.07	49.27 Peak	---
3	327.790	34.68	-11.32	46.00	13.82	1.43	30.48	49.91 Peak	---
4	439.340	34.48	-11.52	46.00	16.31	1.65	30.46	46.98 Peak	---
5	520.820	32.82	-13.18	46.00	17.70	1.81	30.57	43.87 Peak	---
6	548.950	39.30	-6.70	46.00	18.28	1.87	30.63	49.78 Peak	---

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.




Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 4

Vertical

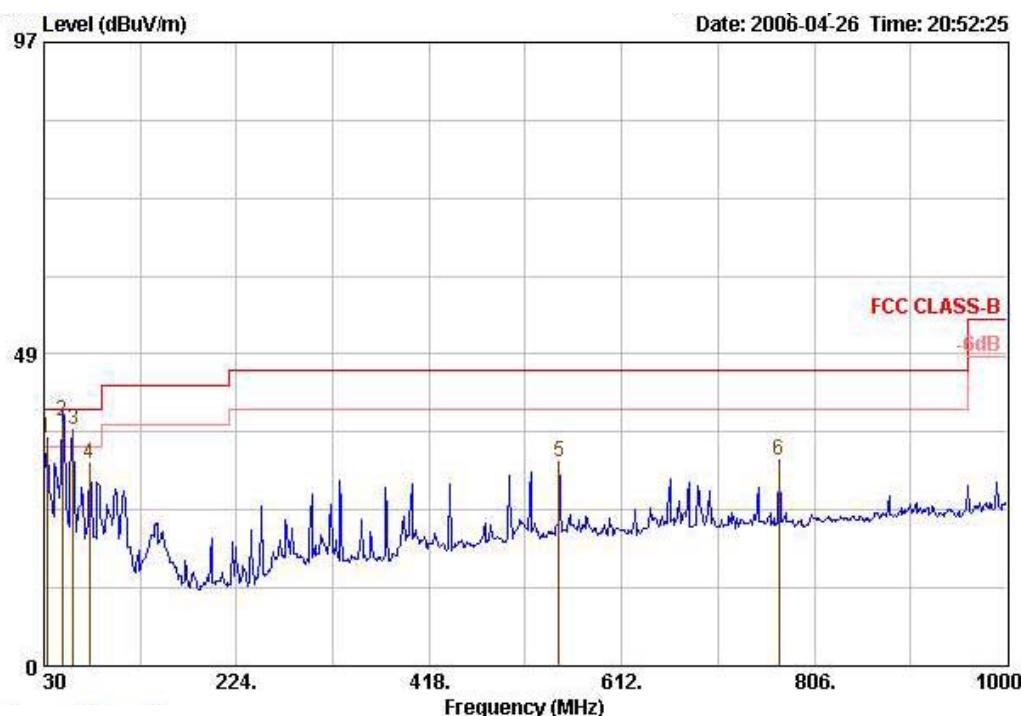

Freq	Level	Limit	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
			Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 !	32.910	35.53	-4.47	40.00	16.45	0.49	29.78	48.37 Peak	---	---
2 !	48.430	38.03	-1.97	40.00	8.50	0.59	29.83	58.77 QP	---	---
3 !	59.100	36.69	-3.31	40.00	5.45	0.65	29.86	60.46 Peak	---	---
4	75.590	31.58	-8.42	40.00	6.20	0.70	29.97	54.64 Peak	---	---
5	548.950	31.72	-14.28	46.00	18.28	1.87	30.63	42.20 Peak	---	---
6	770.110	32.02	-13.98	46.00	19.92	2.19	30.09	40.00 Peak	---	---

Horizontal

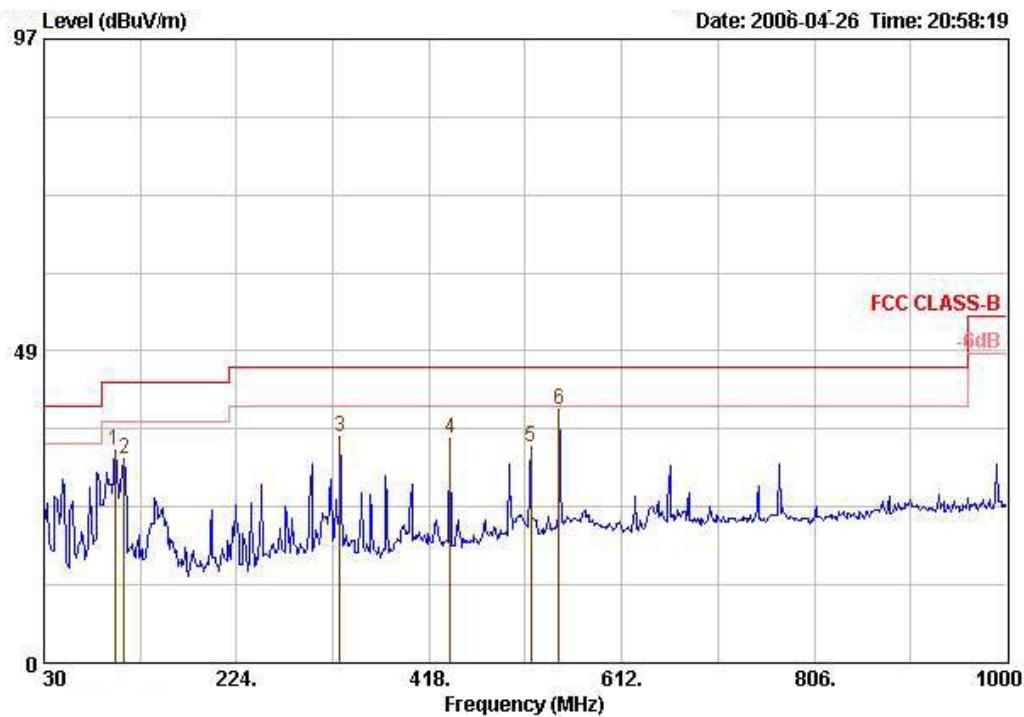

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm deg	
1	101.780	33.12	-10.38	43.50	10.76	0.81	30.09	51.64 Peak	---	---
2	110.510	31.78	-11.72	43.50	11.50	0.84	30.07	49.51 Peak	---	---
3	327.790	35.05	-10.95	46.00	13.82	1.43	30.48	50.28 Peak	---	---
4	439.340	34.94	-11.06	46.00	16.31	1.65	30.46	47.44 Peak	---	---
5	520.820	33.59	-12.41	46.00	17.70	1.81	30.57	44.64 Peak	---	---
6	548.950	39.25	-6.75	46.00	18.28	1.87	30.63	49.73 Peak	---	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 5

Vertical

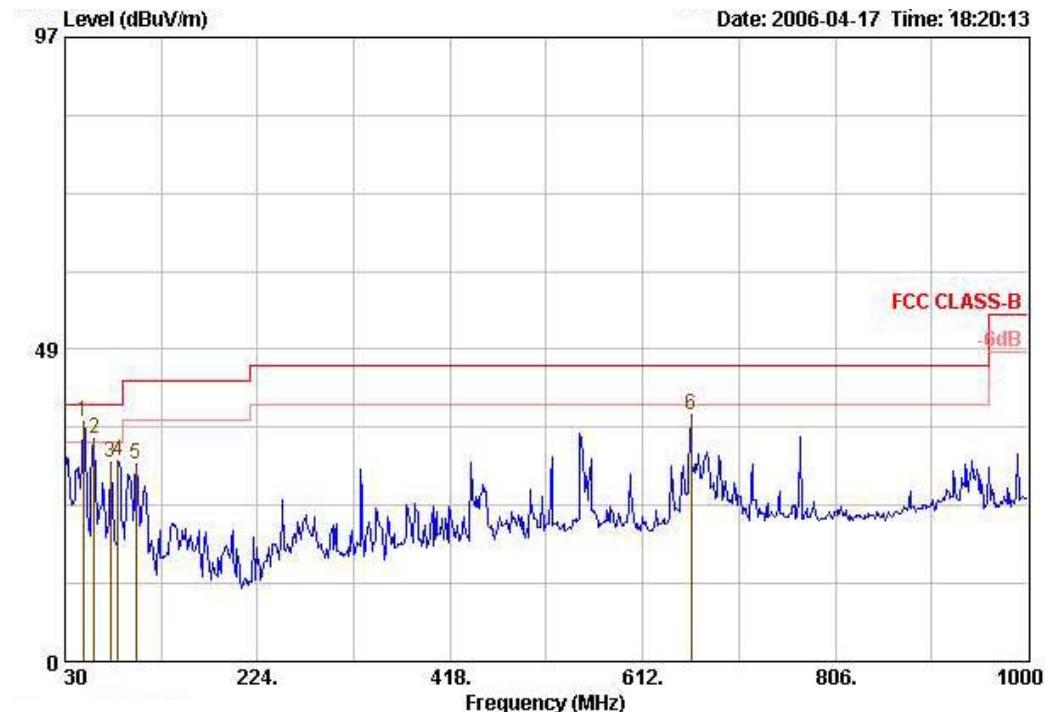

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table	
		Limit	Line Factor	dB/m	dB	dB	Level			
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	48.430	37.36	-2.64	40.00	8.50	0.59	29.83	58.10	QP	---
2	59.100	34.53	-5.47	40.00	5.45	0.65	29.86	58.29	Peak	---
3	75.590	31.01	-8.99	40.00	6.20	0.70	29.97	54.08	Peak	---
4	83.350	31.31	-8.69	40.00	7.40	0.73	29.97	53.14	Peak	---
5	101.780	30.75	-12.75	43.50	10.76	0.81	30.09	49.27	Peak	---
6	660.500	38.43	-7.57	46.00	18.90	2.05	30.34	47.83	Peak	---

Horizontal

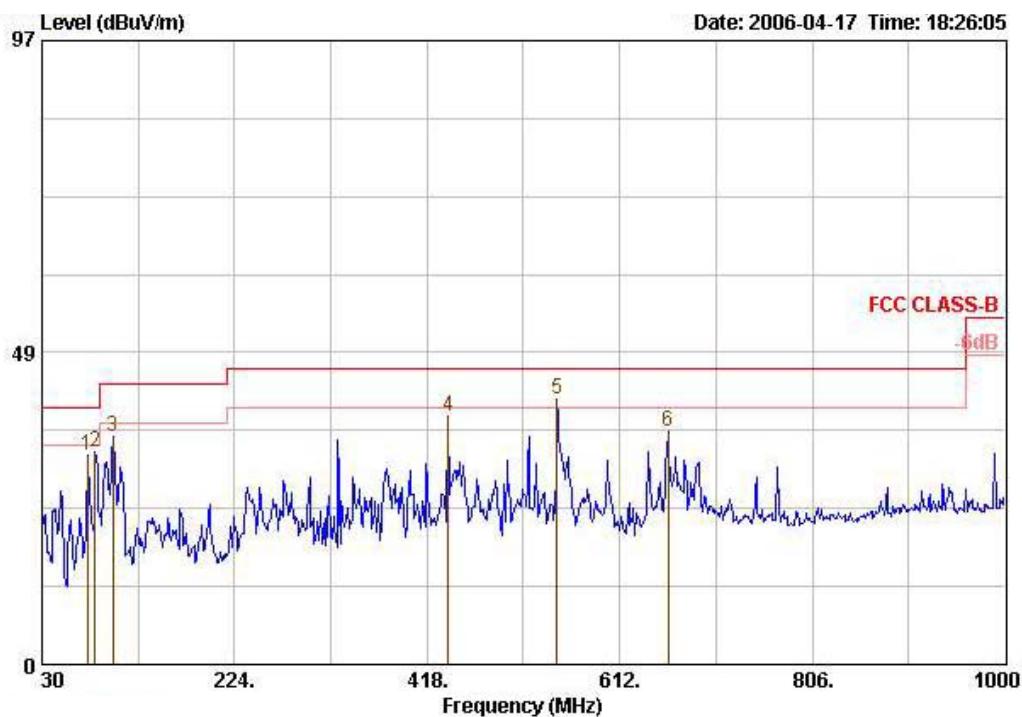

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line Factor	Loss	Factor	Level	Remark		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	75.590	32.56	-7.44	40.00	6.20	0.70	29.97	55.63 Peak	---
2	83.350	32.97	-7.03	40.00	7.40	0.73	29.97	54.80 Peak	---
3	101.780	35.45	-8.05	43.50	10.76	0.81	30.09	53.96 Peak	---
4	439.340	38.57	-7.43	46.00	16.31	1.65	30.46	51.07 Peak	---
5	548.950	41.16	-4.84	46.00	18.28	1.87	30.63	51.63 Peak	---
6	660.500	36.15	-9.85	46.00	18.90	2.05	30.34	45.55 Peak	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 5

Vertical

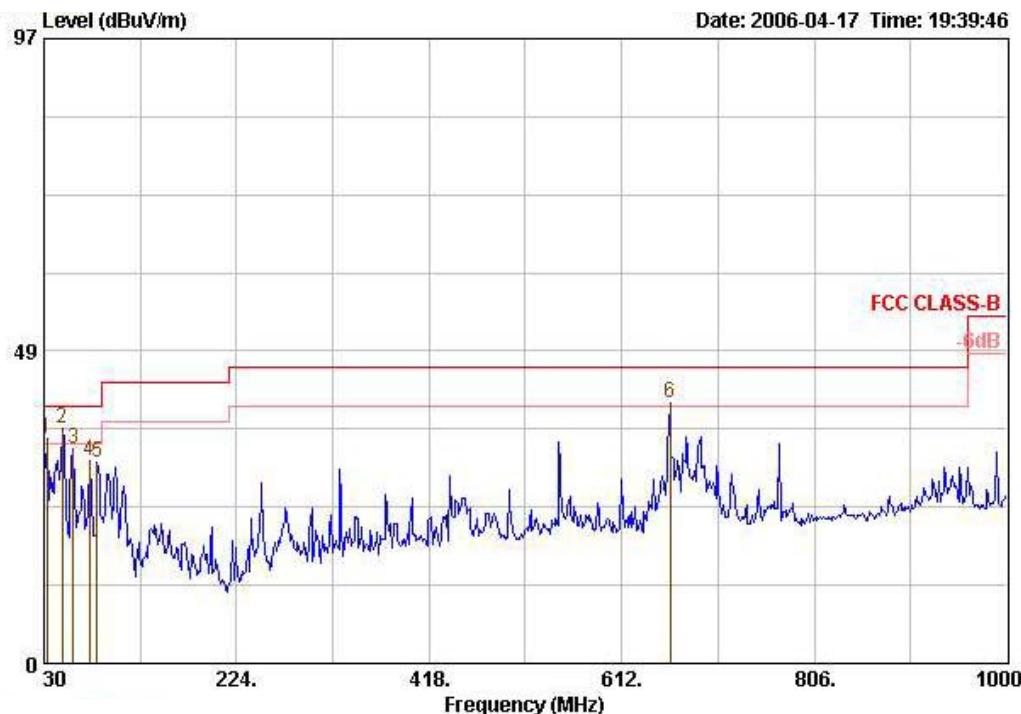

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table	
		Line	Factor	Loss	Factor	Level	Remark			
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 !	32.910	35.00	-5.00	40.00	16.45	0.49	29.78	47.85 Peak	---	---
2 !	48.430	36.42	-3.58	40.00	8.50	0.59	29.83	57.16 Peak	---	---
3	59.100	33.27	-6.73	40.00	5.45	0.65	29.86	57.03 Peak	---	---
4	75.590	31.53	-8.47	40.00	6.20	0.70	29.97	54.60 Peak	---	---
5	83.350	31.29	-8.71	40.00	7.40	0.73	29.97	53.12 Peak	---	---
6 !	660.500	40.31	-5.69	46.00	18.90	2.05	30.34	49.70 Peak	---	---

Horizontal

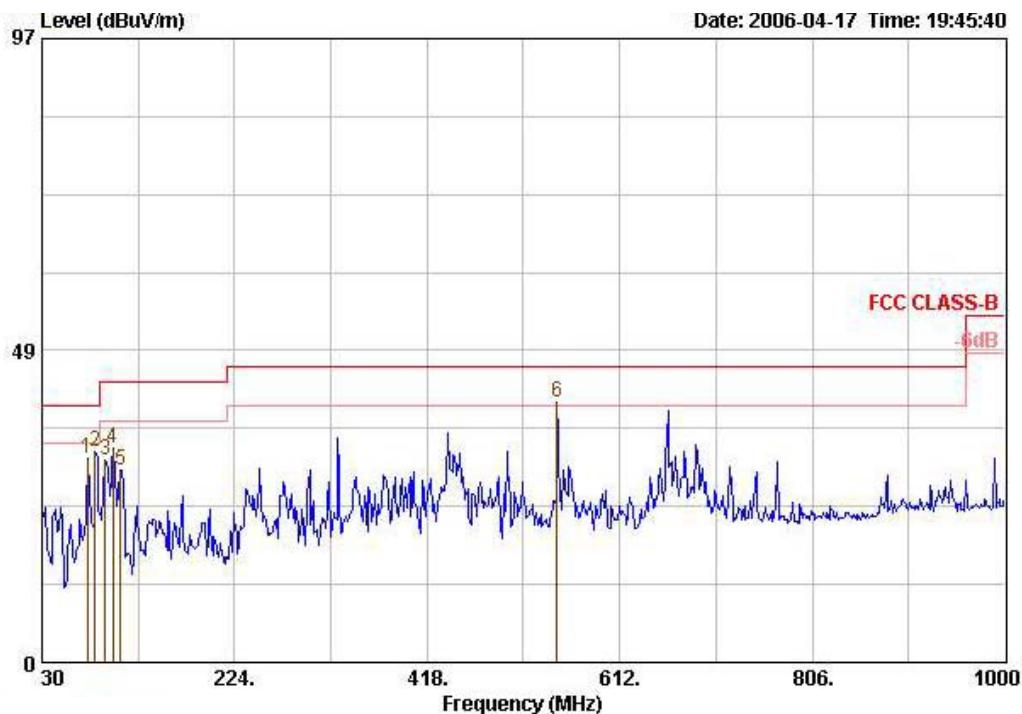

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table		
		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	Pos	Pos
1	75.590	31.81	-8.19	40.00	6.20	0.70	29.97	54.87	Peak	---	---
2	83.350	32.69	-7.31	40.00	7.40	0.73	29.97	54.52	Peak	---	---
3	94.020	31.51	-11.99	43.50	9.60	0.79	30.11	51.23	Peak	---	---
4	101.780	33.23	-10.27	43.50	10.76	0.81	30.09	51.75	Peak	---	---
5	109.540	29.87	-13.63	43.50	11.50	0.84	30.07	47.60	Peak	---	---
6	548.950	40.41	-5.59	46.00	18.28	1.87	30.63	50.89	Peak	---	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 6

Vertical

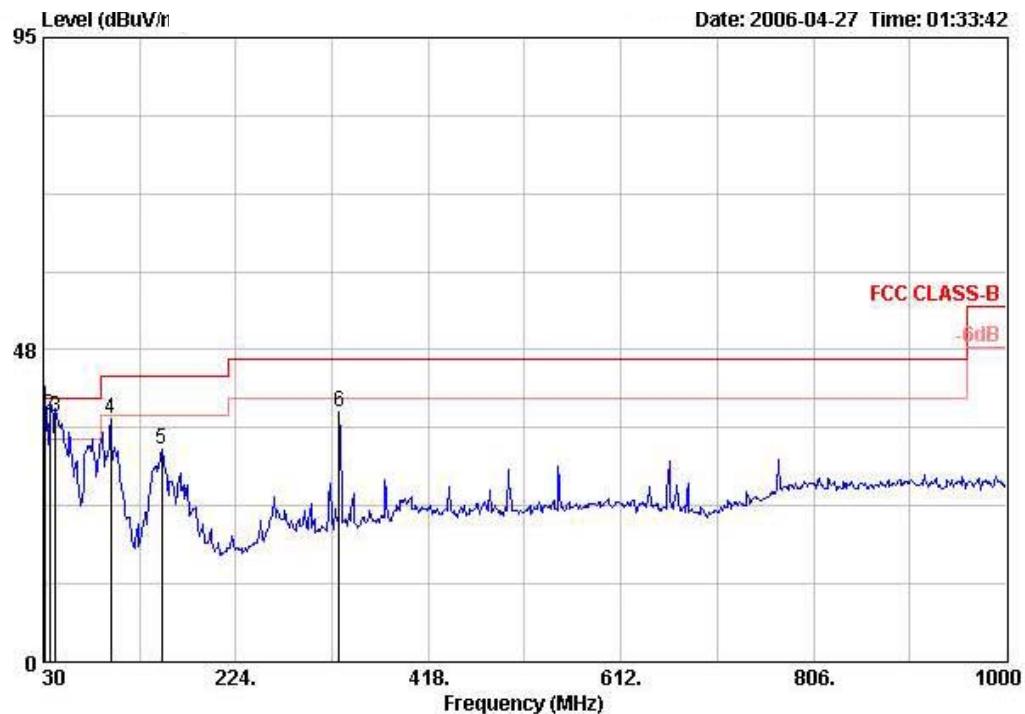

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
		Limit	Line	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 0	31.940	38.76	-1.24	40.00	53.16	16.34	0.93	31.67 QP	VERTICAL	3
2 0	36.790	37.50	-2.50	40.00	52.60	15.41	1.20	31.72 QP	VERTICAL	3
3 0	42.610	37.15	-2.85	40.00	54.89	12.92	1.10	31.76 QP	VERTICAL	3
4	97.900	36.93	-6.57	43.50	56.32	10.84	1.50	31.73 Peak	VERTICAL	3
5	149.310	32.46	-11.04	43.50	50.47	11.63	1.90	31.54 Peak	VERTICAL	3
6	327.790	38.13	-7.87	46.00	52.07	15.02	2.31	31.28 Peak	VERTICAL	3

Horizontal

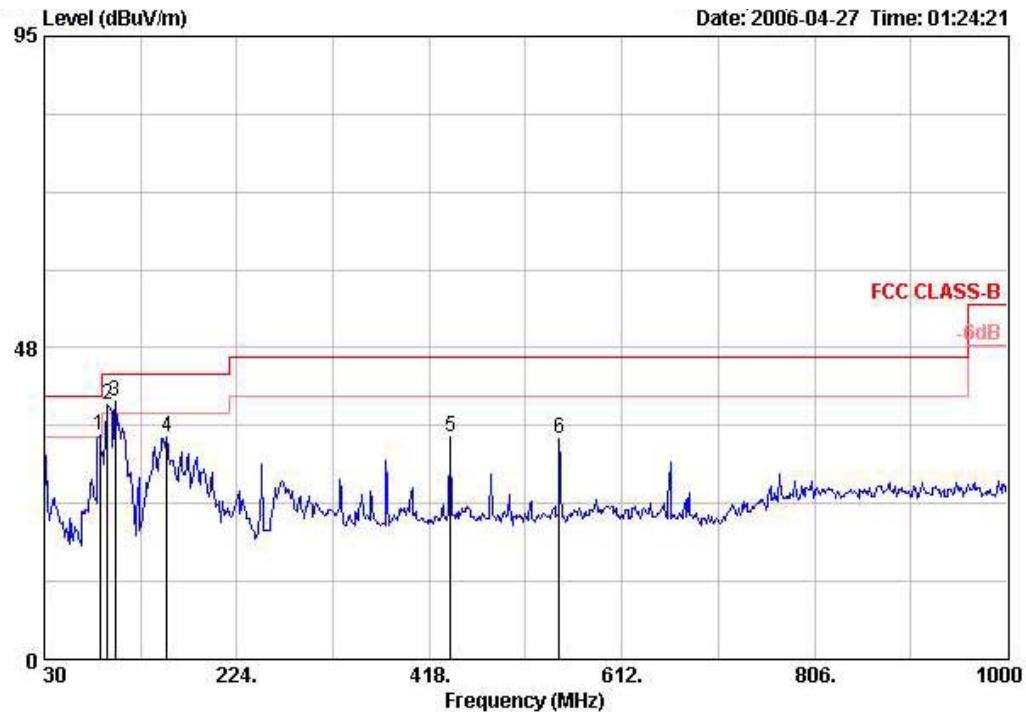

Freq	Level	Over Limit	Line	ReadAntenna		Cable Preamp		Remark	Pol/Phase	Distance	
				MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1 !	86.260	34.28	-5.72	40.00	55.60	8.89	1.45	31.65	Peak	HORIZONTAL	3
2 !	94.020	38.83	-4.67	43.50	58.94	10.13	1.47	31.72	Peak	HORIZONTAL	3
3 @	101.780	39.25	-4.25	43.50	58.09	11.37	1.50	31.71	Peak	HORIZONTAL	3
4	153.190	33.83	-9.67	43.50	51.98	11.48	1.90	31.53	Peak	HORIZONTAL	3
5	439.340	33.86	-12.14	46.00	44.44	17.50	2.86	30.94	Peak	HORIZONTAL	3
6	548.950	33.76	-12.24	46.00	43.35	17.95	3.20	30.75	Peak	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 6

Vertical

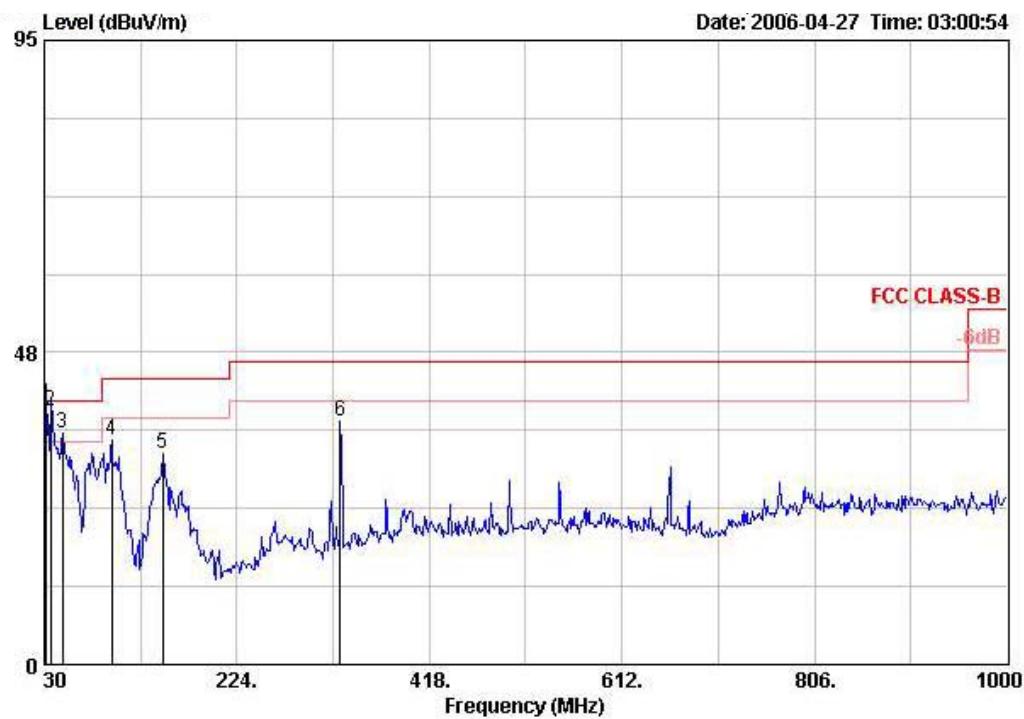

Freq	Level	Over Limit	Limit Line	Read		Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
				MHz	dBuV/m						
1 @	31.940	39.67	-0.33	40.00	54.07	16.34	0.93	31.67	QP	VERTICAL	3
2 @	36.790	38.54	-1.46	40.00	53.65	15.41	1.20	31.72	QP	VERTICAL	3
3 !	48.430	35.29	-4.71	40.00	55.22	10.79	1.10	31.83	Peak	VERTICAL	3
4	97.900	34.28	-9.22	43.50	53.68	10.84	1.50	31.73	Peak	VERTICAL	3
5	149.310	32.04	-11.46	43.50	50.05	11.63	1.90	31.54	Peak	VERTICAL	3
6	327.790	37.06	-8.94	46.00	51.01	15.02	2.31	31.28	Peak	VERTICAL	3

Horizontal

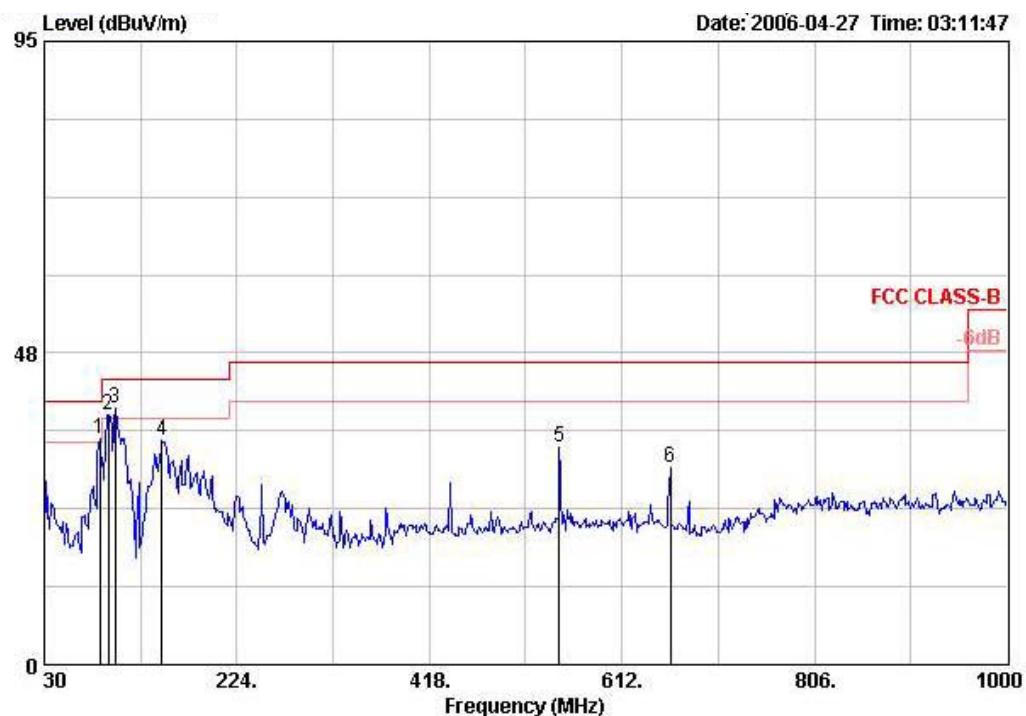

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
		Limit	Line	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	86.260	34.52	-5.48	40.00	55.84	8.89	1.45	31.65 Peak	HORIZONTAL	3
2 !	94.990	38.15	-5.35	43.50	58.10	10.31	1.50	31.76 Peak	HORIZONTAL	3
3 @	101.780	39.16	-4.34	43.50	58.00	11.37	1.50	31.71 Peak	HORIZONTAL	3
4	148.340	34.24	-9.26	43.50	52.35	11.60	1.83	31.54 Peak	HORIZONTAL	3
5	548.950	33.04	-12.96	46.00	42.63	17.95	3.20	30.75 Peak	HORIZONTAL	3
6	660.500	29.99	-16.01	46.00	39.27	17.55	3.52	30.35 Peak	HORIZONTAL	3

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 1

Vertical

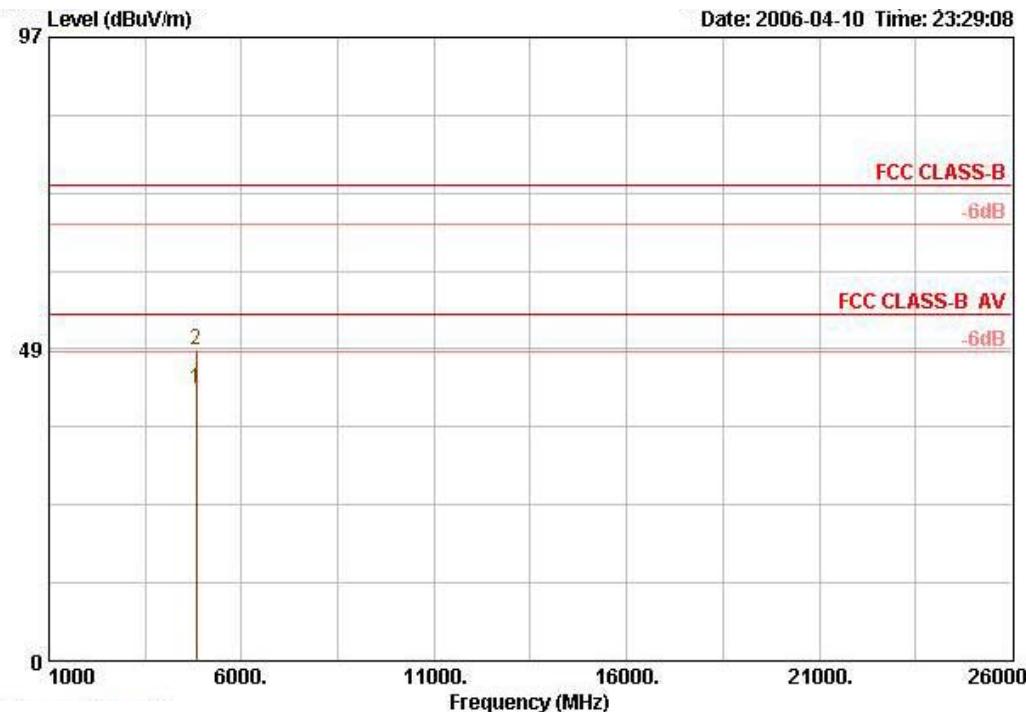

Freq	Level	Over Limit	Antenna	Cable			Read Level	Remark	Ant Pos	Table Pos
				Line	Factor	Preamp				
MHz	dB _{uV/m}	dB	dB _{uV/m}	dB/m			dB _{uV}		cm	deg
1 @	4824.000	42.35	-11.65	54.00	33.22	4.68	35.10	39.55 AVERAGE	114	337
2 @	4824.000	48.36	-25.64	74.00	33.22	4.68	35.10	45.57 PEAK	114	337


Horizontal

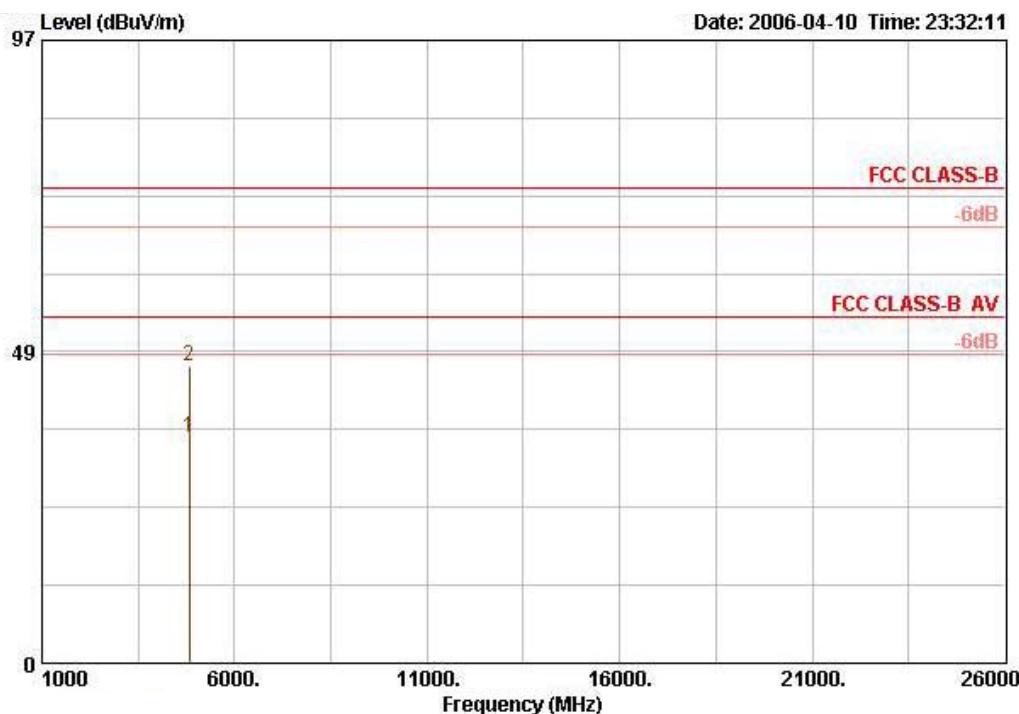

Freq	Level	Over Limit		Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos	
		MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	4823.960	35.04	-18.96	54.00	33.22	4.68	35.10	32.24	AVERAGE	100	310
2 @	4823.960	46.35	-27.65	74.00	33.22	4.68	35.10	43.56	PEAK	100	310


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 1

Vertical

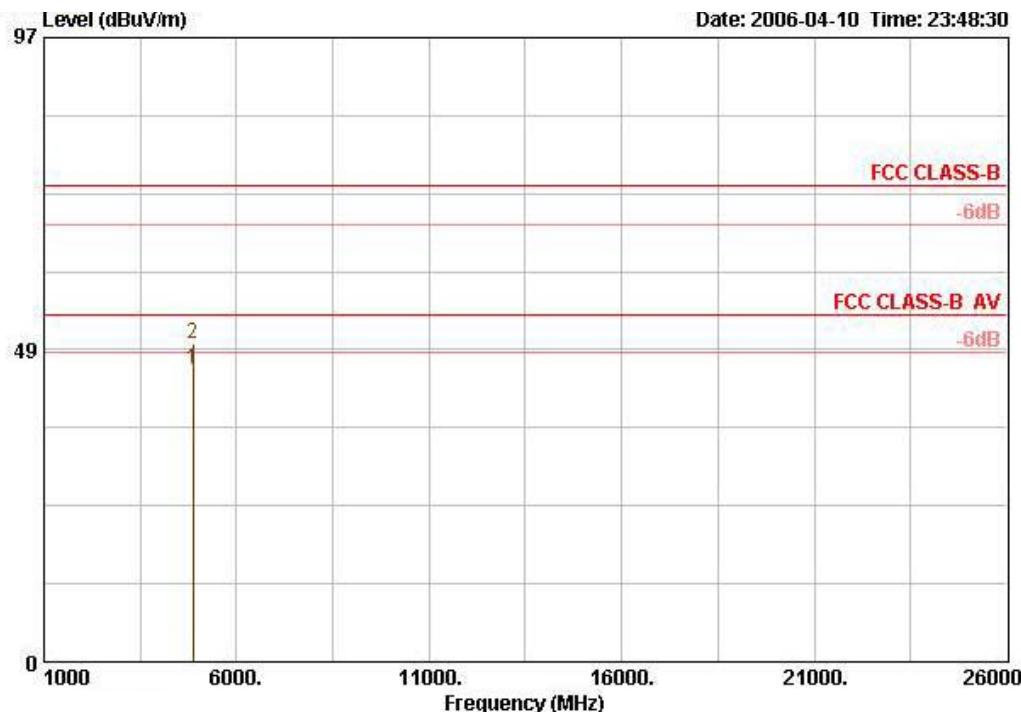

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	4874.060	45.38	-8.62	54.00	33.33	4.69	35.10	42.45 AVERAGE	125	341
2 @	4874.060	49.45	-24.55	74.00	33.33	4.69	35.10	46.52 PEAK	125	341


Horizontal

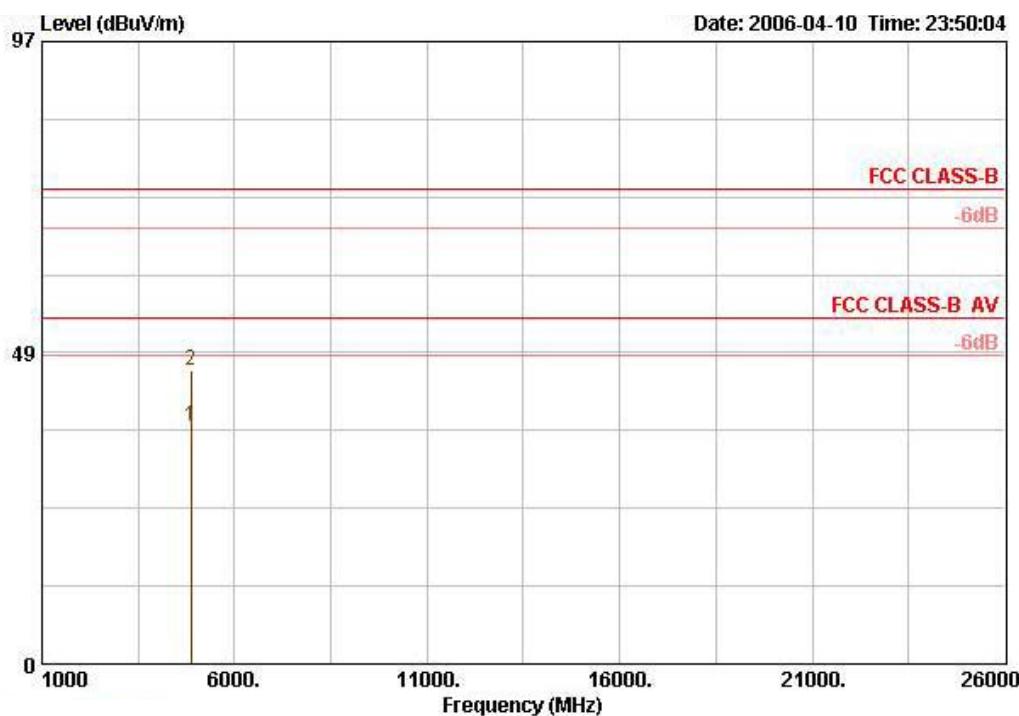

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line	Factor	Loss	Factor	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	4874.000	37.01	-16.99	54.00	33.33	4.69	35.10	34.09	AVERAGE
2 @	4874.000	45.73	-28.27	74.00	33.33	4.69	35.10	42.80	PEAK


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 1

Vertical

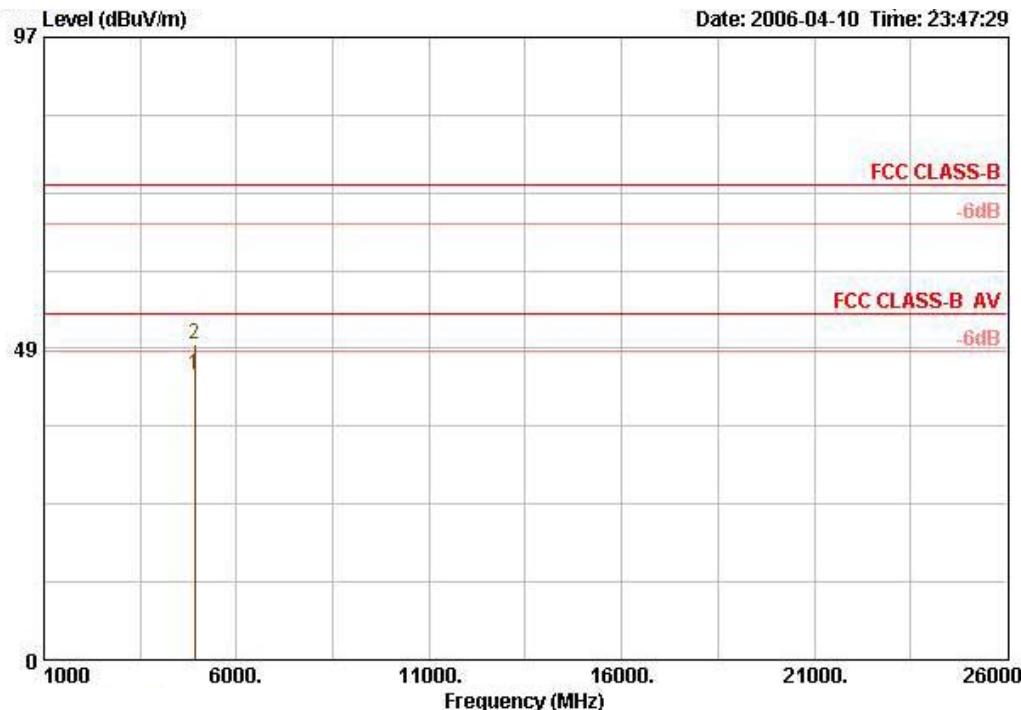

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level			Ant Pos	Table Pos	
							dB	dBuV/m	cm	deg	
1 @	4924.000	44.39	-9.61	54.00	33.45	4.73	35.10	41.31	AVERAGE	124	340
2 @	4924.000	49.24	-24.76	74.00	33.45	4.73	35.10	46.17	PEAK	124	340


Horizontal

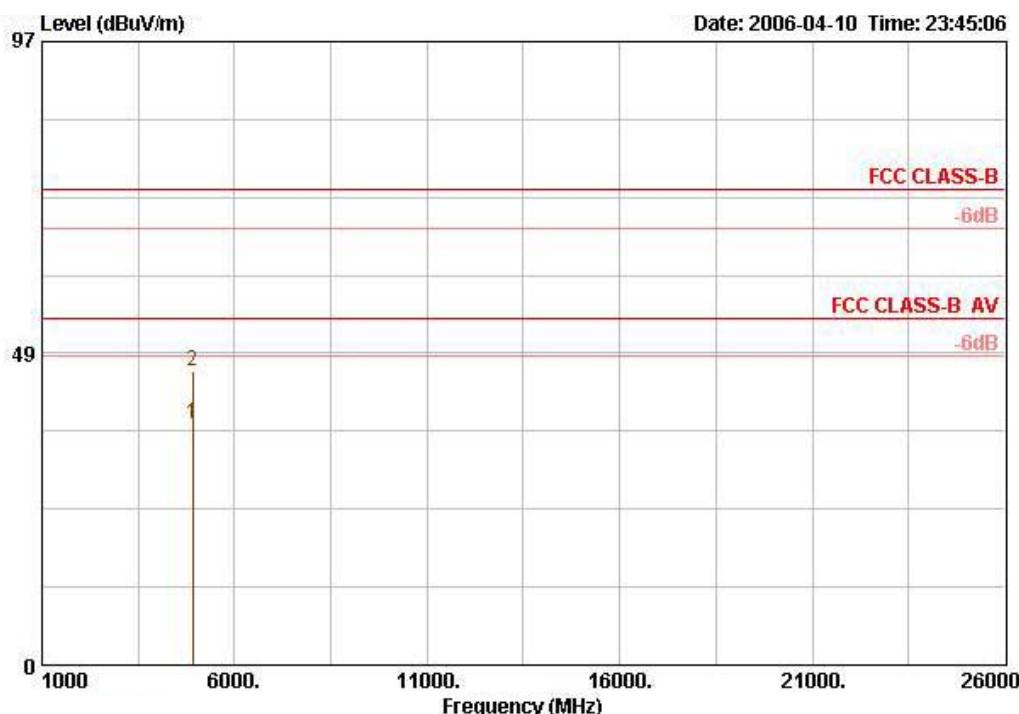

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level		Ant Pos	Table Pos
						dB	dBuV/m		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @ 4924.000	37.49	-16.51	54.00	33.45	4.73	35.10	34.42	AVERAGE	113 309
2 @ 4924.000	45.72	-28.28	74.00	33.45	4.73	35.10	42.64	PEAK	113 309


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 1

Vertical

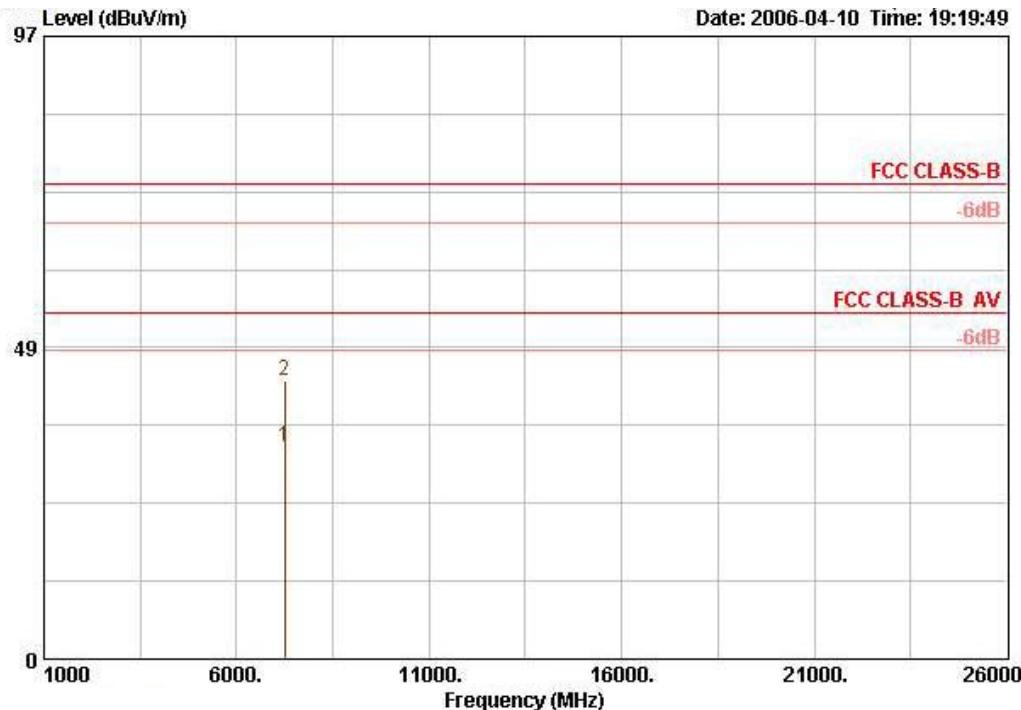

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Ant Table	
							Pos	Pos
							cm	deg
1 @	7246.900	33.10	-20.90	54.00	33.22	4.68	35.10	30.30 AVERAGE
2 @	7246.900	43.36	-30.65	74.00	33.22	4.68	35.10	40.56 PEAK


Horizontal

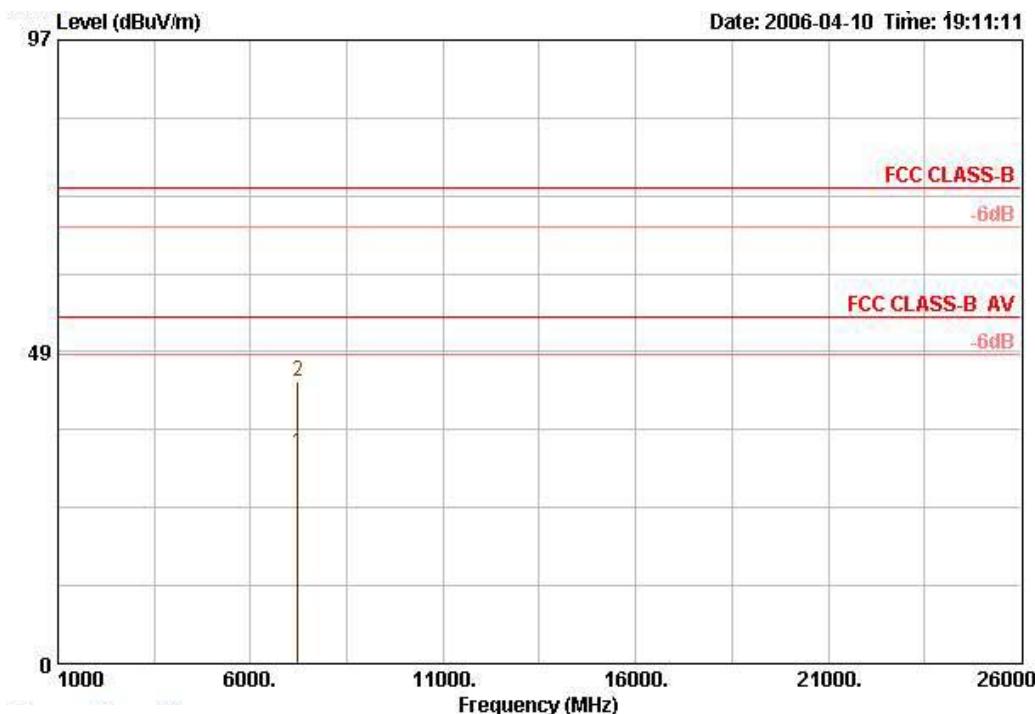

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table
								Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @ 7238.200	32.88	-21.12	54.00	33.22	4.68	35.10	30.09	AVERAGE	133 0
2 @ 7238.200	43.97	-30.03	74.00	33.22	4.68	35.10	41.18	PEAK	133 0


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 1

Vertical

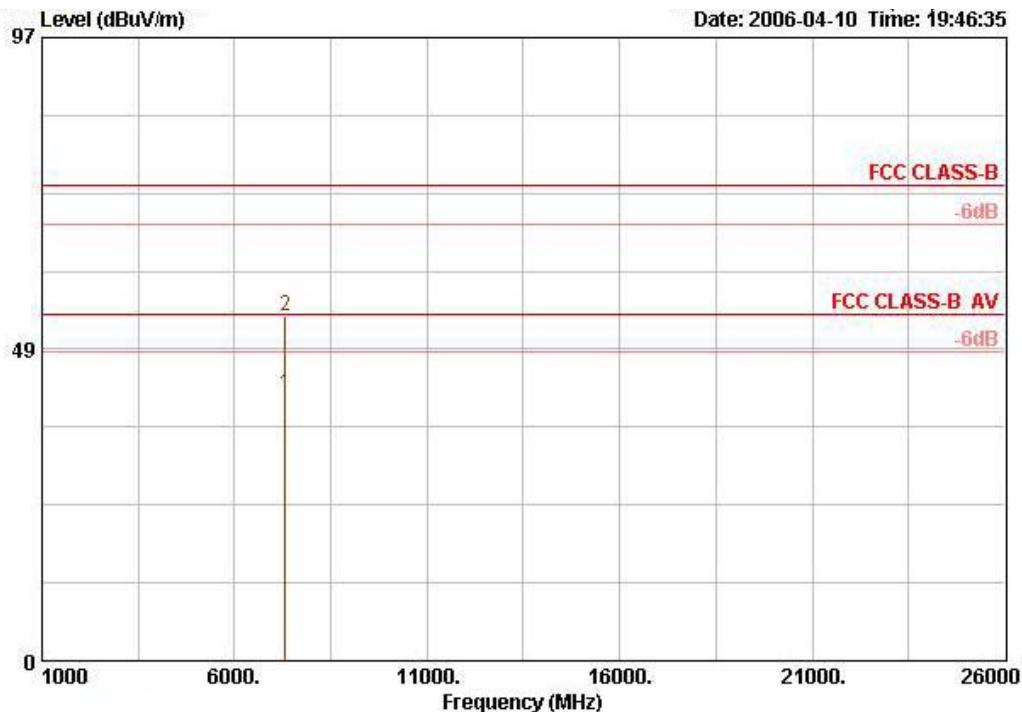

Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
		Limit	Line	Factor	Loss	Factor	Level		
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	7311.000	41.46	-12.54	54.00	36.24	5.39	35.32	35.14	AVERAGE
2 @	7311.000	53.67	-20.33	74.00	36.24	5.39	35.32	47.35	PEAK


Horizontal

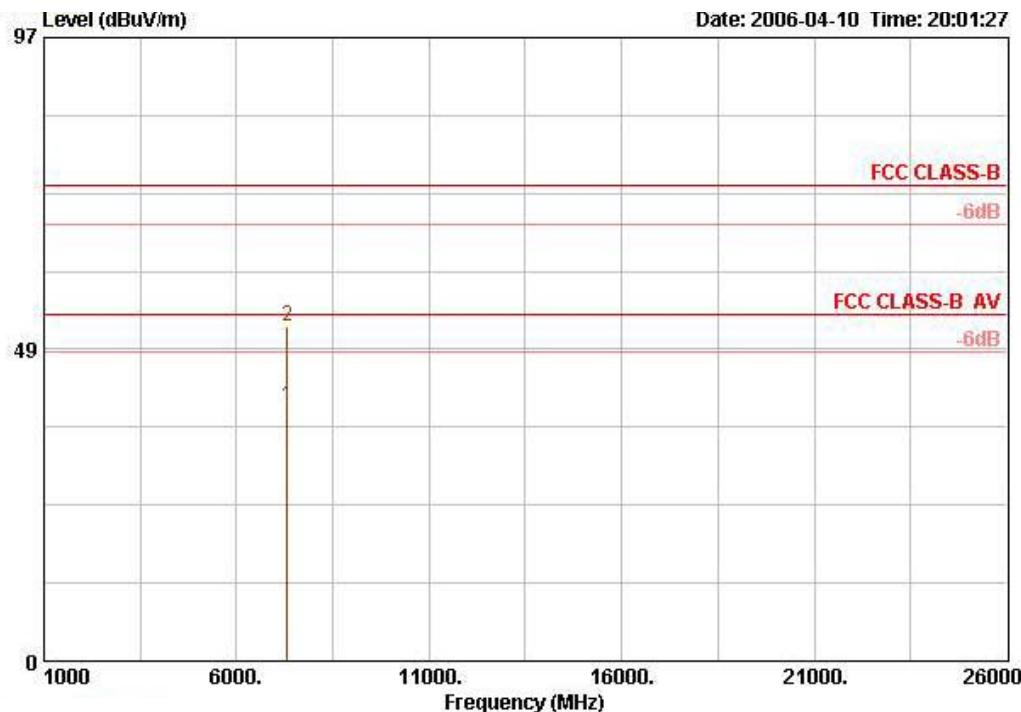

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Table		
							Ant Pos	Table Pos	
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	7310.600	39.62	-14.38	54.00	36.24	5.39	35.32	33.30	AVERAGE
2 @	7310.600	51.97	-22.03	74.00	36.24	5.39	35.32	45.66	PEAK


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 1

Vertical

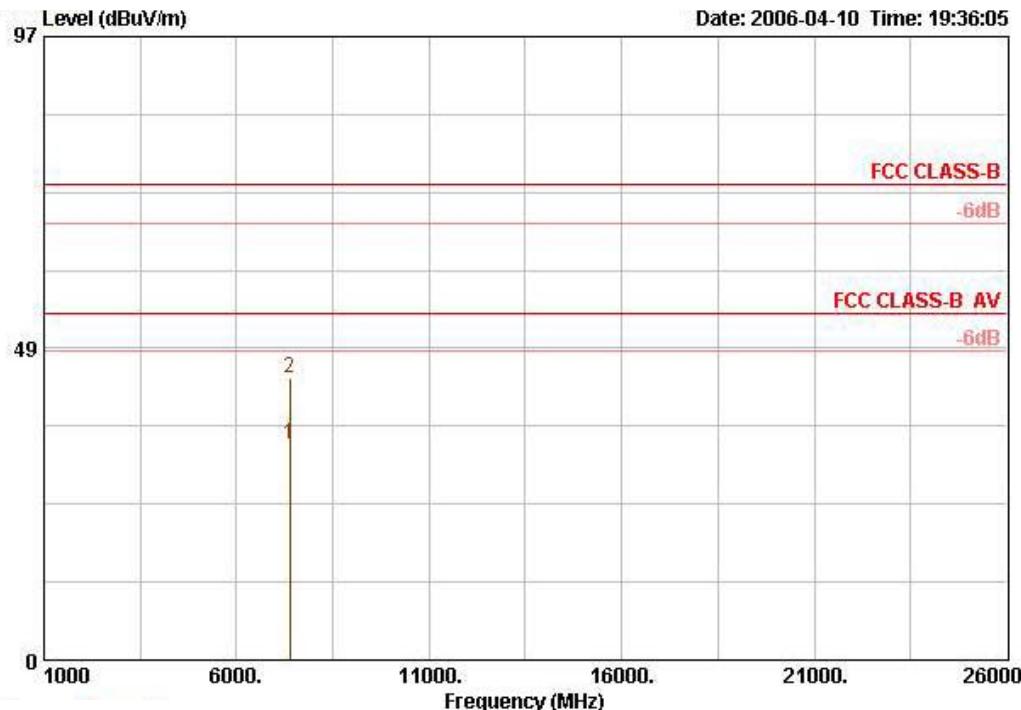

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Table	
							Ant Pos	Table Pos
							cm	deg
1 @	7386.200	33.51	-20.49	54.00	33.45	4.73	35.10	30.44 AVERAGE
2 @	7386.200	43.78	-30.22	74.00	33.45	4.73	35.10	40.71 PEAK


Horizontal

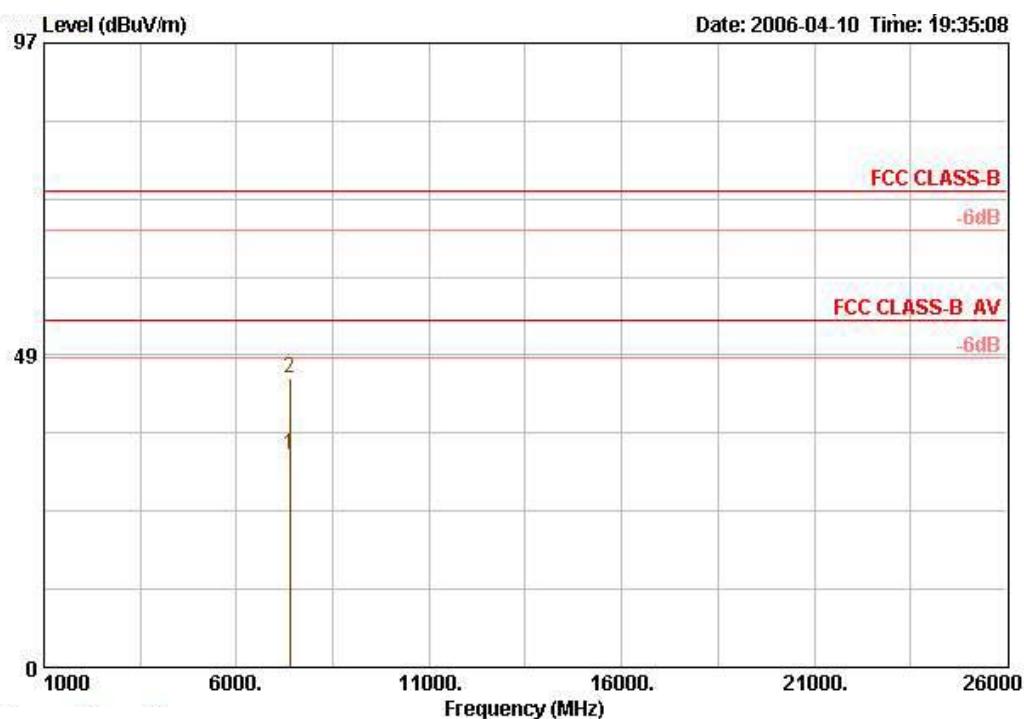

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table
								Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	7386.100	33.14	-20.86	54.00	33.45	4.73	35.10	30.06	AVERAGE
2 @	7386.100	44.82	-29.18	74.00	33.45	4.73	35.10	41.75	PEAK

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 1


Vertical

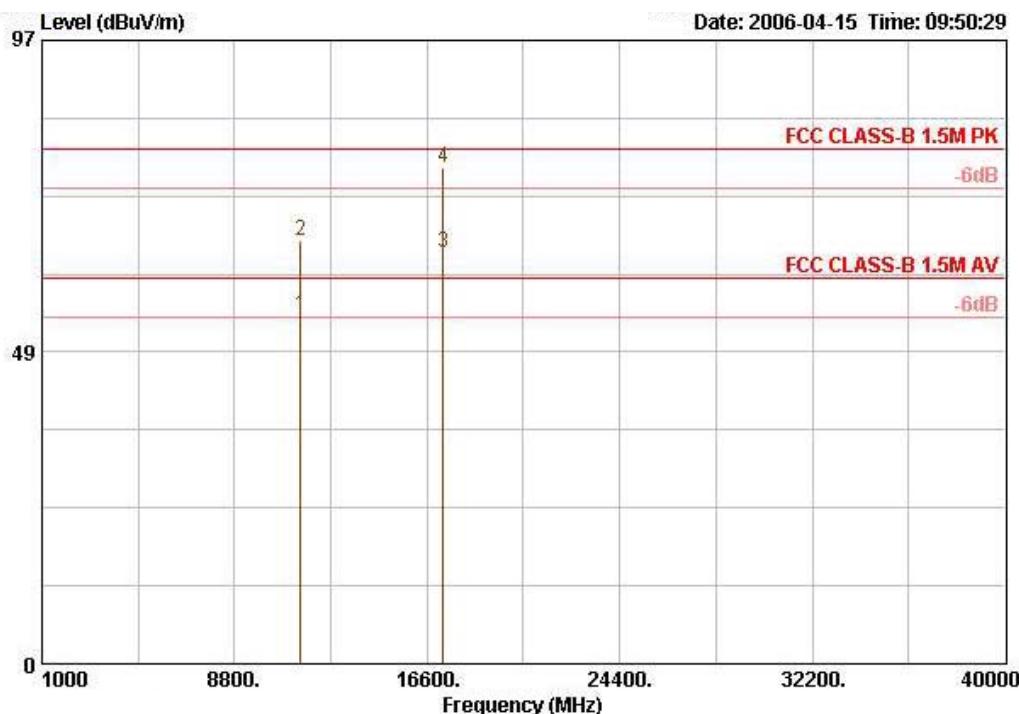

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	11489.360	54.19	-5.81	60.00	39.20	6.96	35.10	43.13 AVERAGE	117	234
2 @	11489.360	65.77	-14.23	80.00	39.20	6.96	35.10	54.71 PEAK	117	234
4 @	17236.560	77.30			40.93	18.15	35.00	53.22 PEAK	100	237

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.
(126.16dBuV/m)

Horizontal

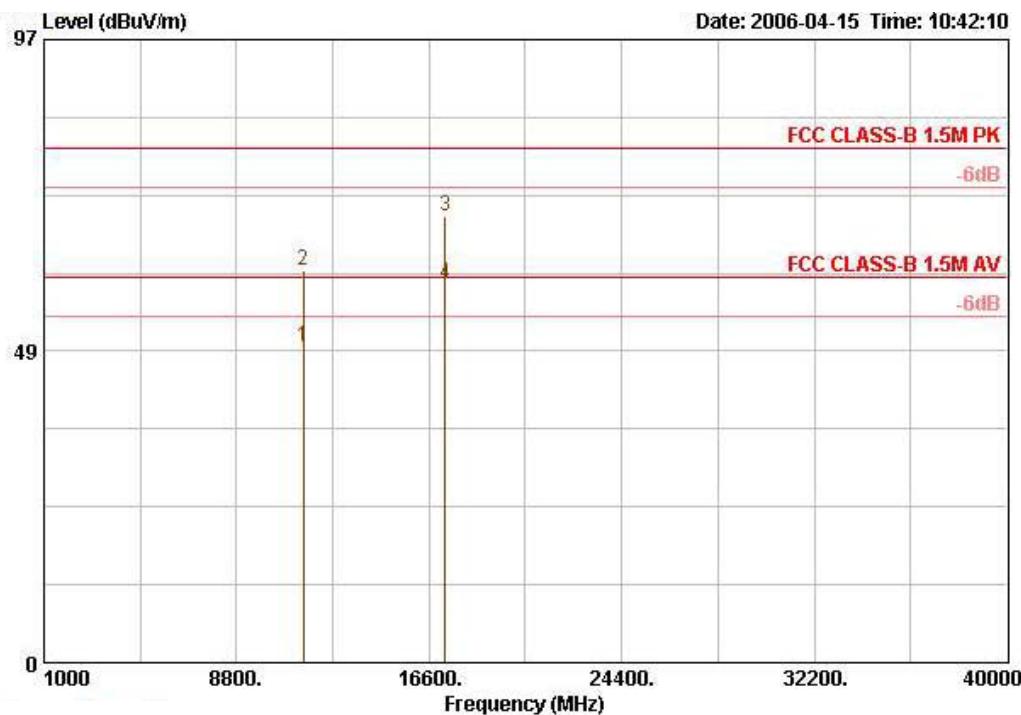


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Table		
							Ant Pos	Table Pos	
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11489.920	49.17	-10.83	60.00	39.20	6.96	35.10	38.11	AVERAGE
2 @	11489.920	61.10	-18.90	80.00	39.20	6.96	35.10	50.04	PEAK
3 @	17234.120	69.52	-10.48	80.00	40.93	18.15	35.00	45.44	PEAK
4 @	17234.120	59.03	-0.97	60.00	40.93	18.15	35.00	34.95	AVERAGE



Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 1


Vertical

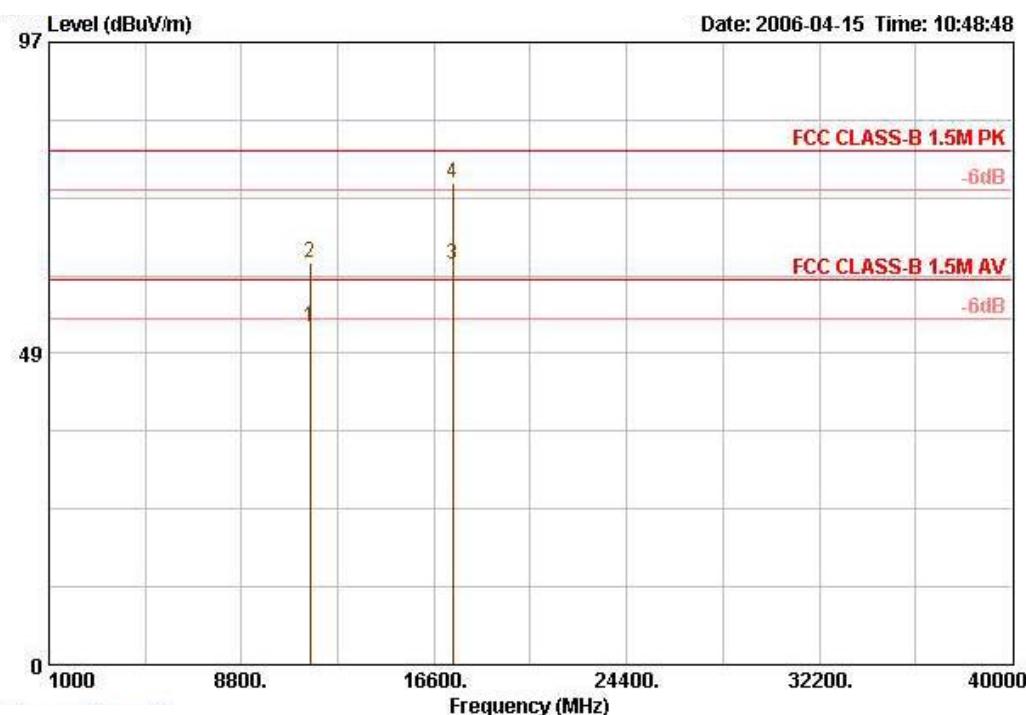

Freq	Level	Limit	Over	Limit	Antenna	Cable	Preamp	Read	Ant	Table
			Line	Factor	Loss	Factor	Level	Remark		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11570.000	52.48	-7.52	60.00	39.21	7.06	35.13	41.34 AVERAGE	115	230
2 @	11570.000	62.52	-17.48	80.00	39.21	7.06	35.13	51.39 PEAK	115	230
4 @	17352.760	74.95			41.44	17.41	35.04	51.14 PEAK	100	231

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission. (125.78dBuV/m)

Horizontal

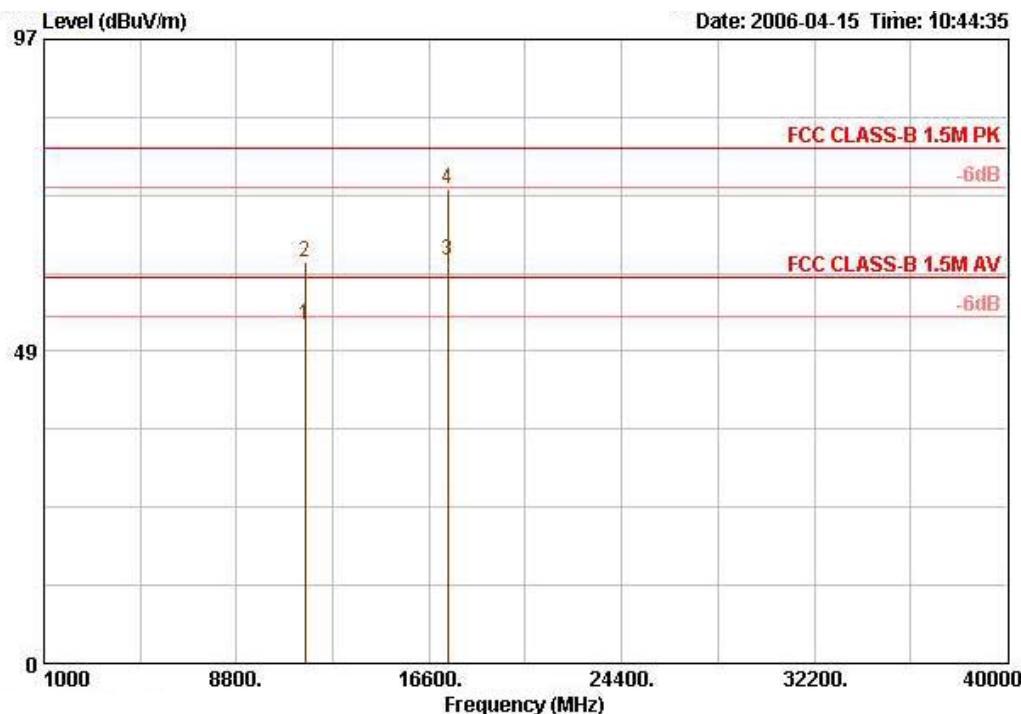


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	11569.760	52.53	-7.47	60.00	39.21	7.06	35.13	41.39 AVERAGE	114	253
2 @	11569.760	62.43	-17.57	80.00	39.21	7.06	35.13	51.29 PEAK	114	253
4 @	17352.520	73.67			41.44	17.41	35.04	49.86 PEAK	117	235

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(125.78dBuV /m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 1


Vertical

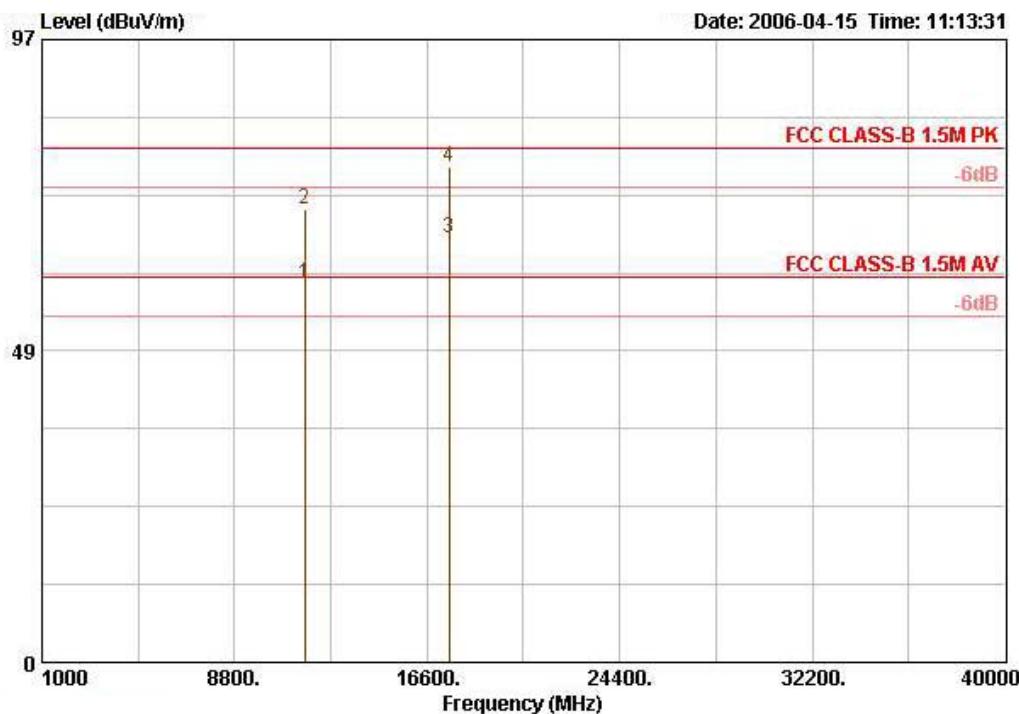

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	11652.320	58.90	-1.10	60.00	39.23	7.15	35.16	47.68 AVERAGE	115	246
2 @	11652.320	70.47	-9.53	80.00	39.23	7.15	35.16	59.25 PEAK	115	246
4 @	17474.480	77.10			41.95	16.66	35.09	53.58 PEAK	100	229

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(126.03dBuV /m)

Horizontal

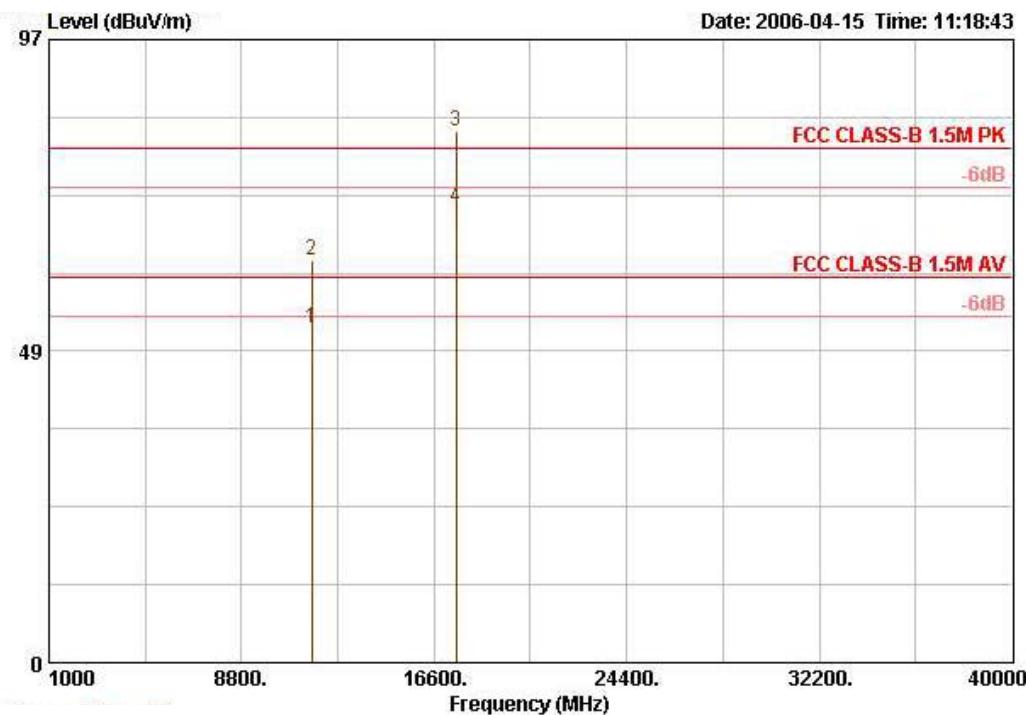


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table	
								Pos	Pos	
								cm	deg	
1 @	11650.960	52.06	-7.94	60.00	39.23	7.15	35.16	40.84 AVERAGE	116	252
2 @	11650.960	62.74	-17.26	80.00	39.23	7.15	35.16	51.52 PEAK	116	252
4 @	17474.520	70.89			41.95	16.66	35.09	47.36 AVERAGE	119	243

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(126.03dBuV /m)


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 1

Vertical

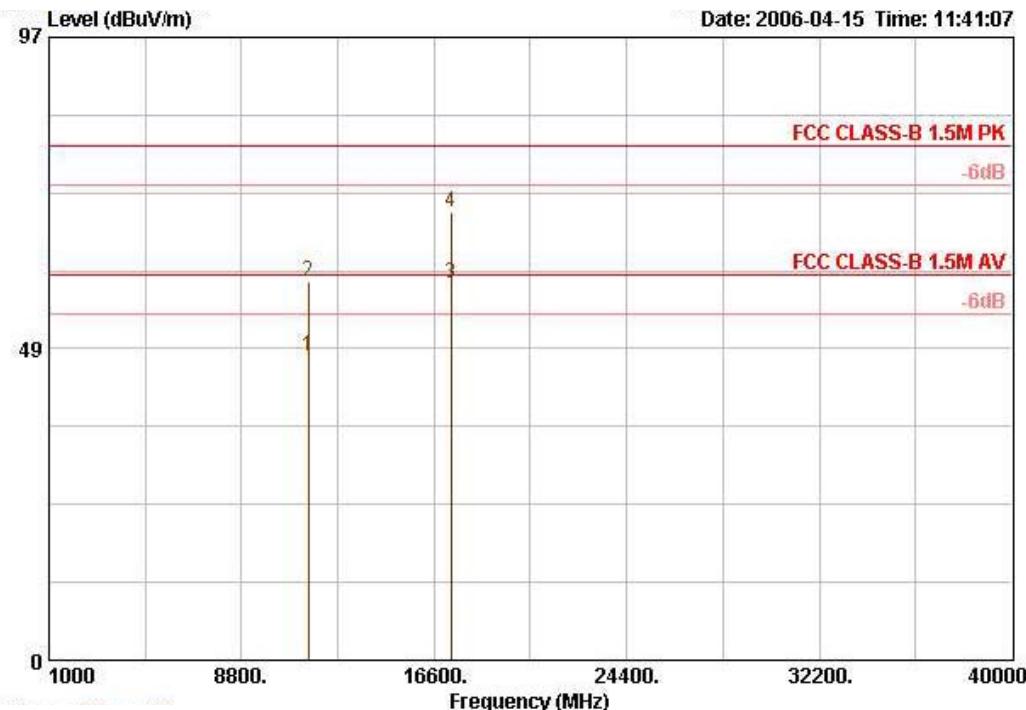

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table
								Pos	Pos
								cm	deg
1 @	11522.520	47.34	-12.66	60.00	39.20	7.01	35.11	36.24	AVERAGE
2 @	11522.520	59.03	-20.97	80.00	39.20	7.01	35.11	47.93	PEAK
3 @	17280.160	58.80	-1.20	60.00	41.15	17.90	35.01	34.76	AVERAGE
4 @	17280.160	69.85	-10.15	80.00	41.15	17.90	35.01	45.81	PEAK

Horizontal

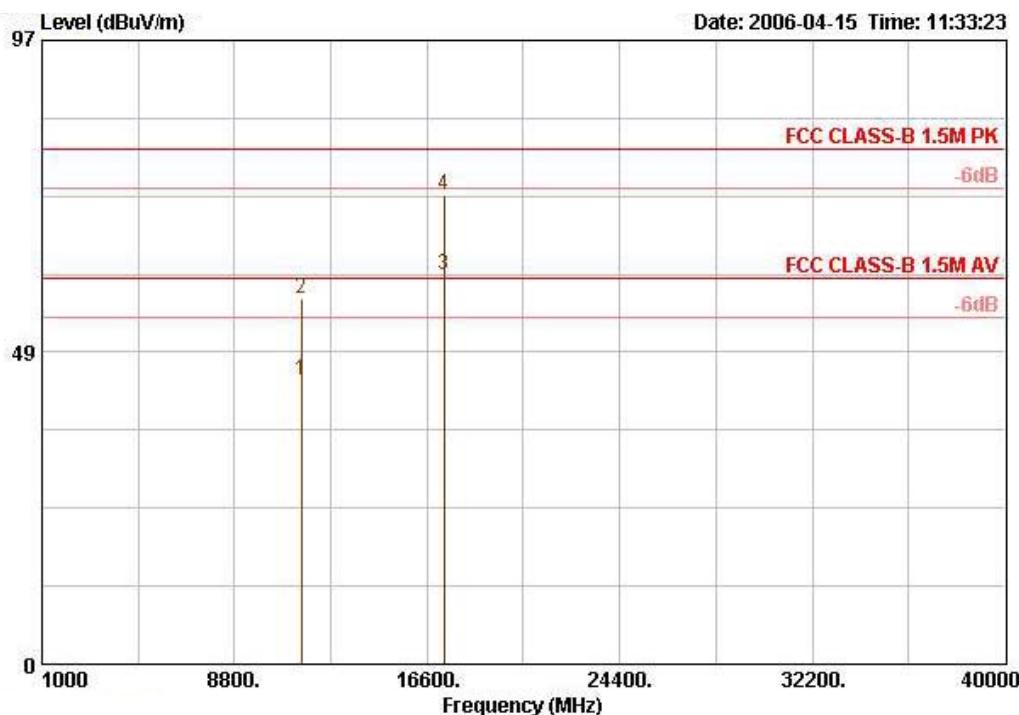


Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Remark	Ant	Table
								Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	11522.640	44.08	-15.92	60.00	39.20	7.01	35.11	32.98	AVERAGE
2 @	11522.640	56.84	-23.16	80.00	39.20	7.01	35.11	45.74	PEAK
4 @	17280.160	72.84			41.15	17.90	35.01	48.80	PEAK

Note: Item 4 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.(119.27dBuV /m)

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 1

Vertical

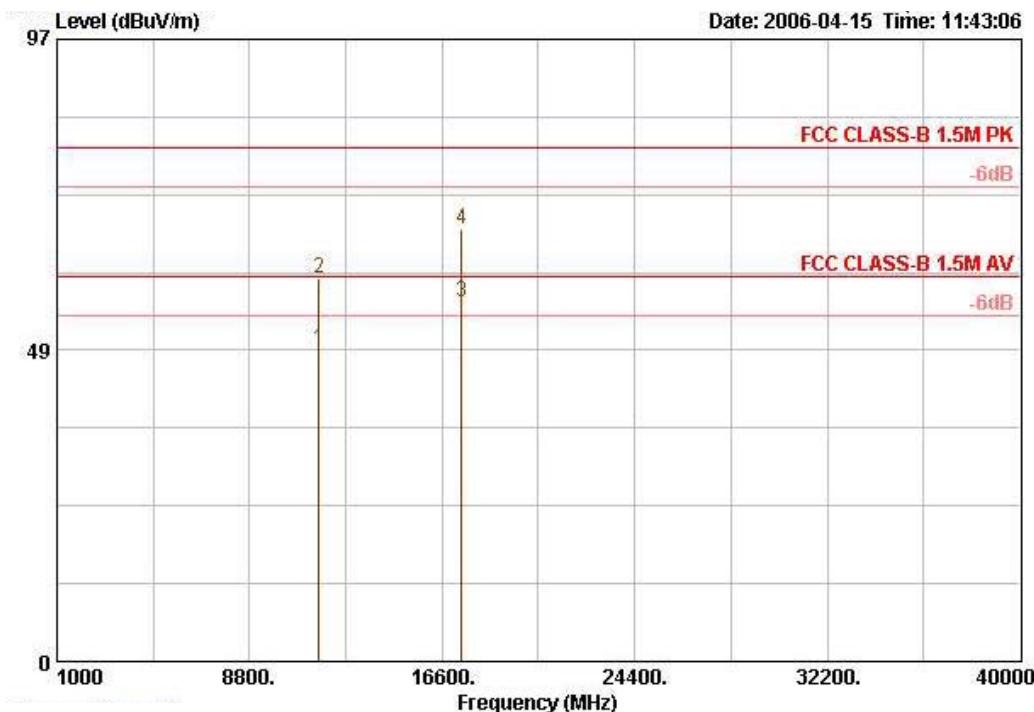

Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Factor	Read Level	Table	
							Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV
								cm deg
1 @	11596.480	48.68	-11.32	60.00	39.22	7.10	35.14	37.50 AVERAGE
2 @	11596.480	59.64	-20.36	80.00	39.22	7.10	35.14	48.46 PEAK
3 @	17401.720	56.11	-3.89	60.00	41.66	16.91	35.06	32.60 AVERAGE
4 @	17401.720	67.29	-12.71	80.00	41.66	16.91	35.06	43.78 PEAK