



Horizontal

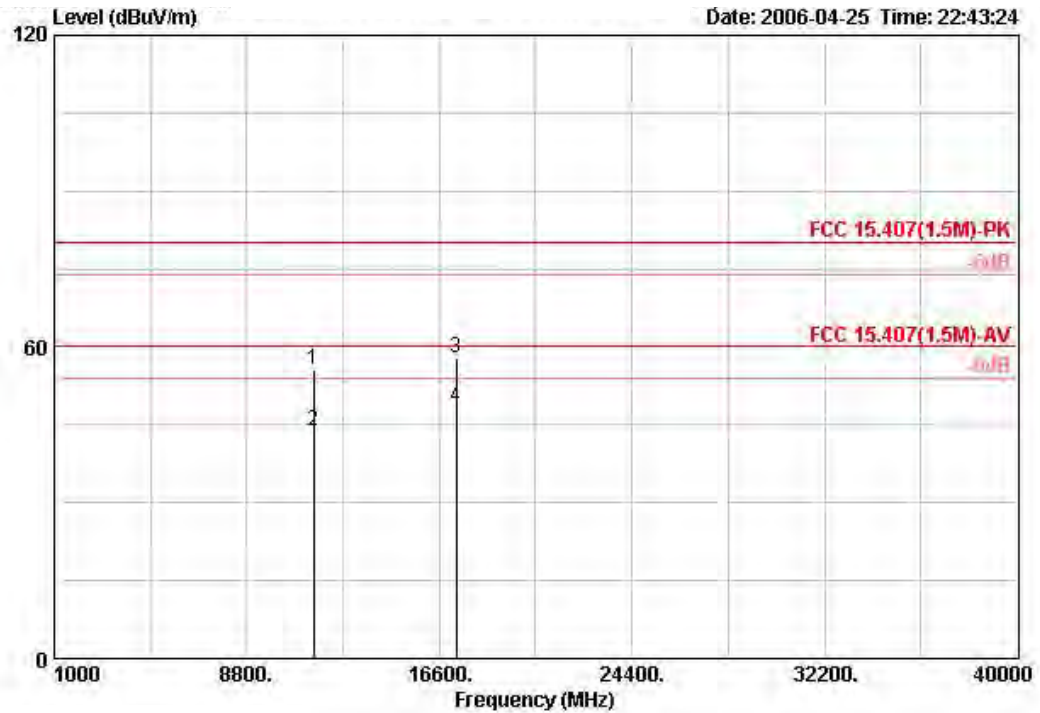

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11521.440	55.64	-24.36	80.00	44.26	38.73	7.65	35.00	PEAK	HORIZONTAL	3
2	11522.400	43.66	-16.34	60.00	32.28	38.73	7.65	35.00	AVERAGE	HORIZONTAL	3
3	17278.960	57.93	-22.07	80.00	41.28	42.72	8.87	34.93	PEAK	HORIZONTAL	3
4	17281.080	48.55	-11.45	60.00	31.90	42.72	8.87	34.93	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 2

Vertical

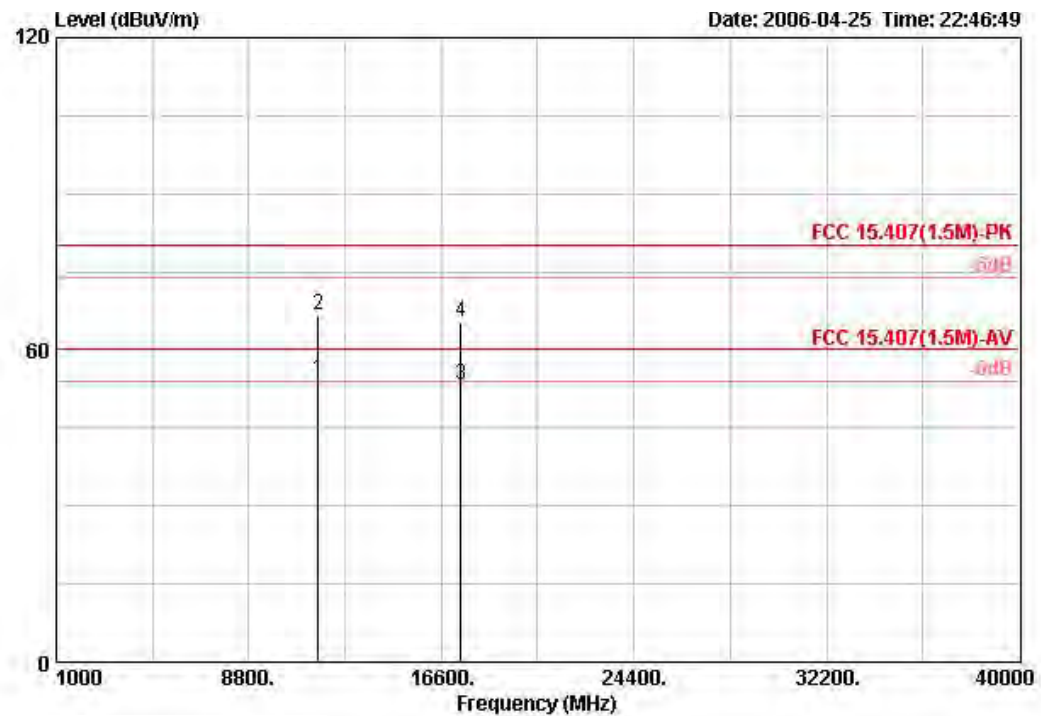

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	11601.400	54.28	-5.72	60.00	42.75	38.87	7.67	35.01	AVERAGE	VERTICAL	3
2	11602.520	66.64	-13.36	80.00	55.11	38.87	7.67	35.01	PEAK	VERTICAL	3
3	17396.800	53.40	-6.60	60.00	36.21	43.30	8.86	34.97	AVERAGE	VERTICAL	3
4	17400.280	65.52	-14.48	80.00	48.33	43.30	8.86	34.97	PEAK	VERTICAL	3

Horizontal

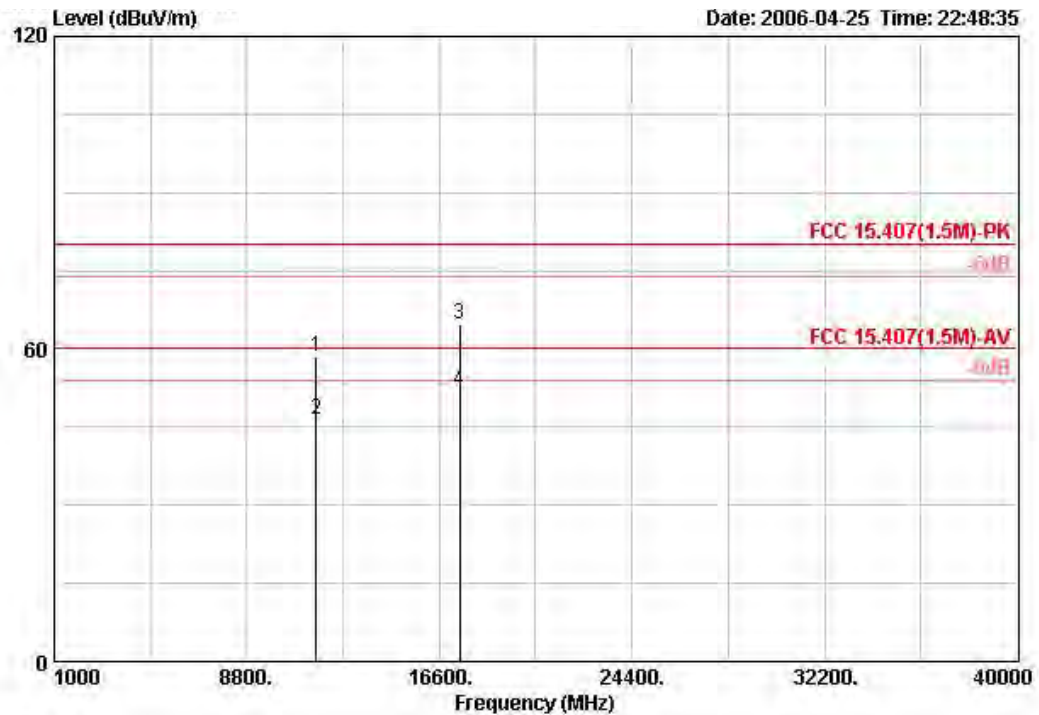

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11597.680	58.44	-21.56	80.00	46.94	38.84	7.67	35.01	PEAK	HORIZONTAL	3
2	11603.760	46.37	-13.63	60.00	34.84	38.87	7.67	35.01	AVERAGE	HORIZONTAL	3
3	17407.560	64.77	-15.23	80.00	47.58	43.30	8.86	34.97	PEAK	HORIZONTAL	3
4	17408.760	52.05	-7.95	60.00	34.86	43.30	8.86	34.97	AVERAGE	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 3

Vertical

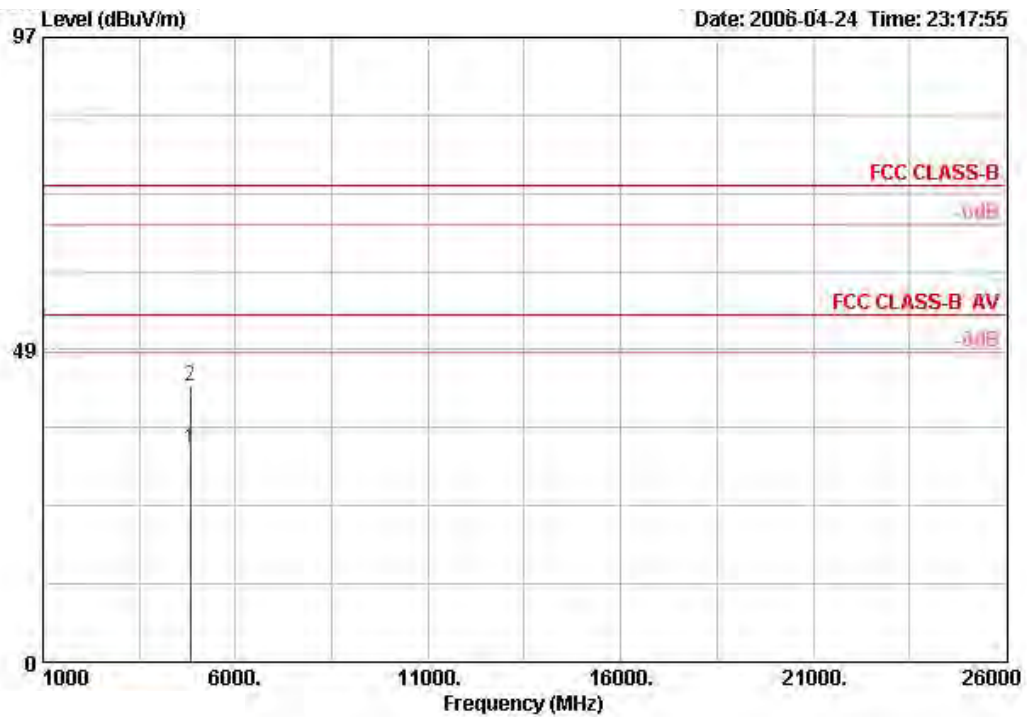

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.400	32.99	-21.01	54.00	33.22	4.68	35.10	30.20	AVERAGE	100	8
2	4818.400	42.78	-31.22	74.00	33.22	4.68	35.10	39.98	PEAK	100	8


Horizontal

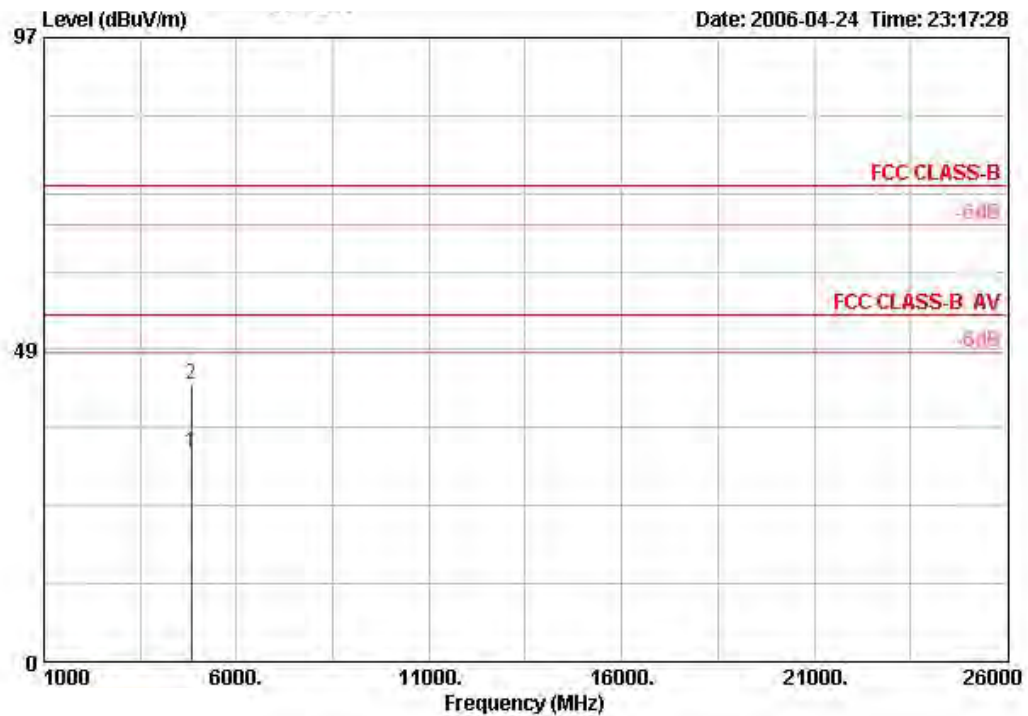

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.400	32.58	-21.42	54.00	33.22	4.68	35.10	29.79	AVERAGE	100	12
2	4818.400	43.07	-30.93	74.00	33.22	4.68	35.10	40.27	PEAK	100	12


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 3

Vertical

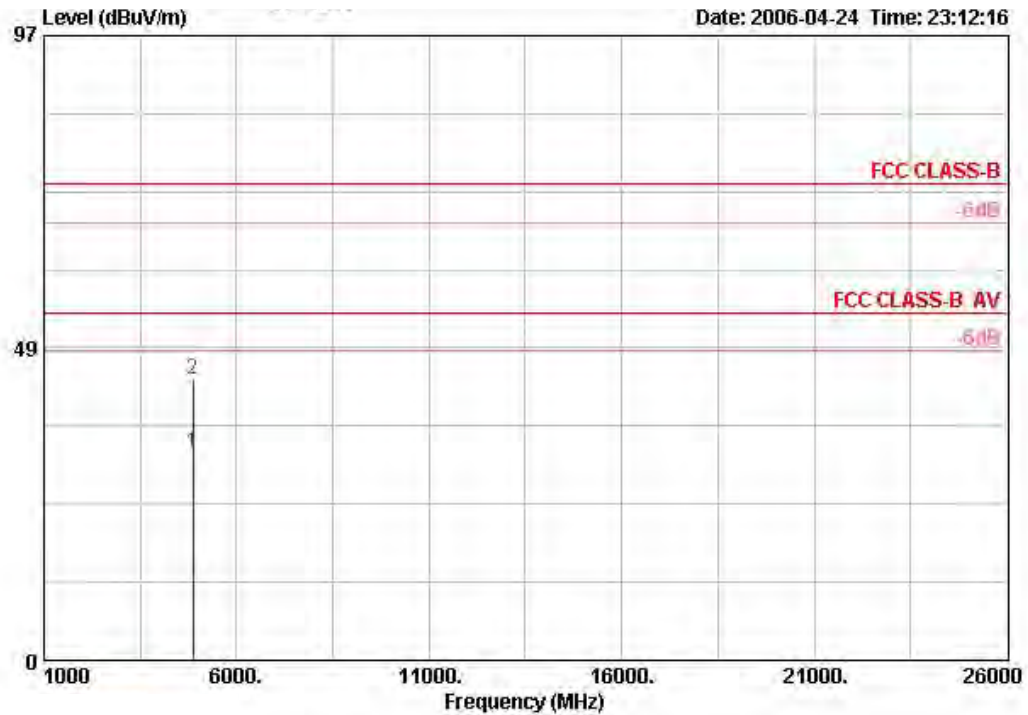

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4878.320	32.28	-21.72	54.00	33.33	4.69	35.10	29.36 AVERAGE	100	16
2	4878.320	43.60	-30.40	74.00	33.33	4.69	35.10	40.67 PEAK	100	16


Horizontal

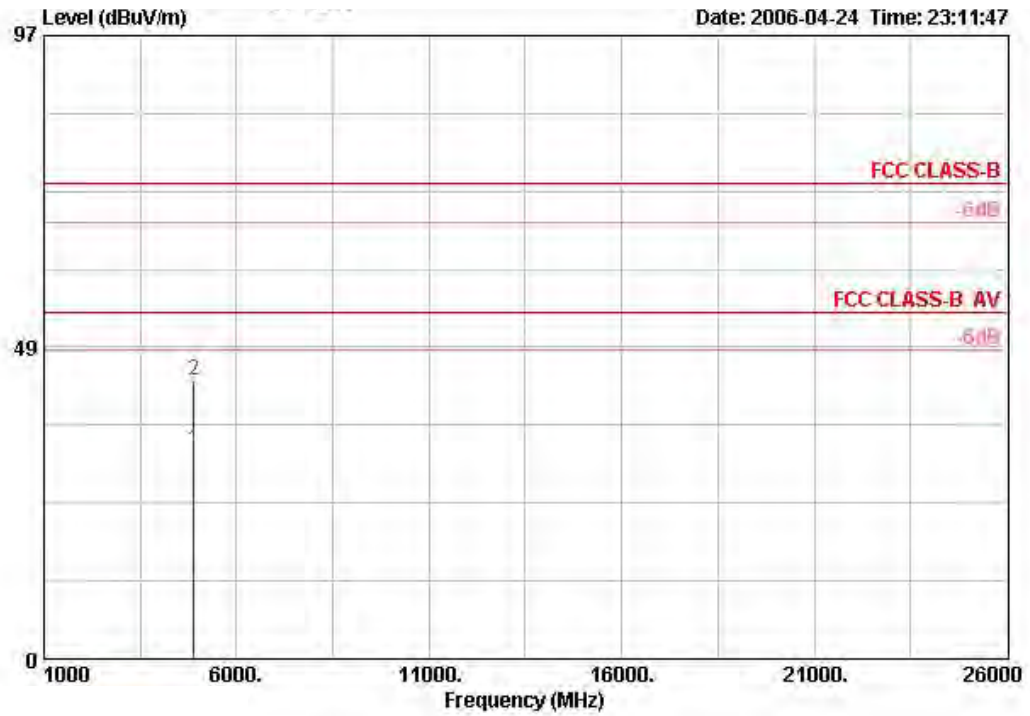

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1	4880.160	32.54	-21.46	54.00	33.33	4.69	35.10	29.62 AVERAGE	102	26
2	4880.160	43.39	-30.61	74.00	33.33	4.69	35.10	40.46 PEAK	102	26


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 3

Vertical

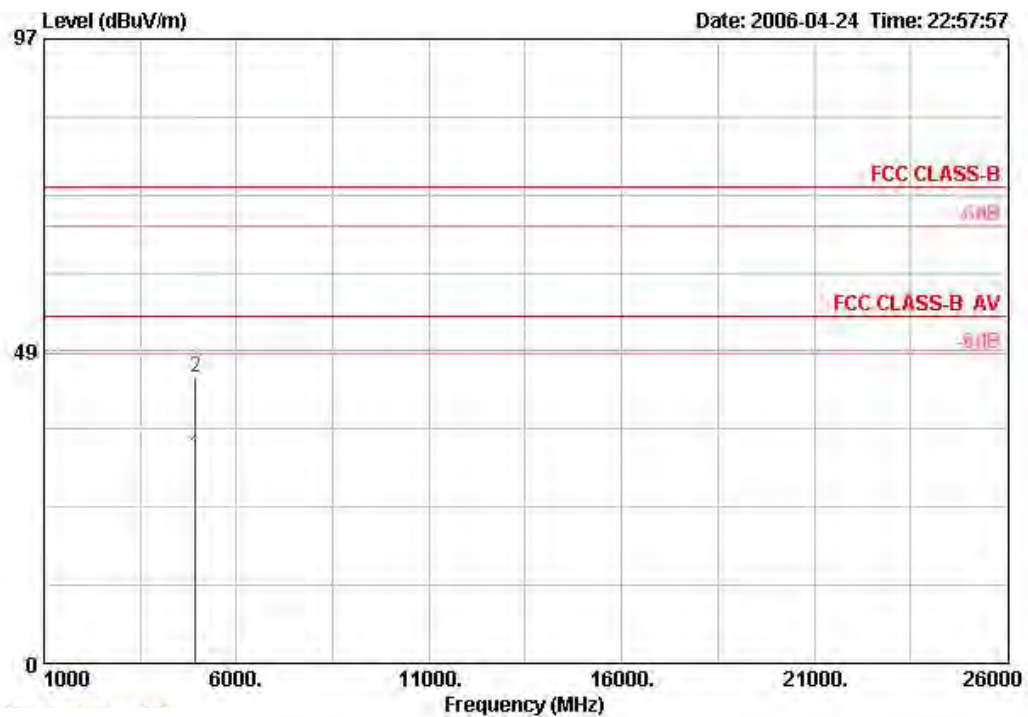

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4929.280	32.19	-21.81	54.00	33.45	4.73	35.10	29.11	AVERAGE	100	8
2	4929.280	44.43	-29.57	74.00	33.45	4.73	35.10	41.36	PEAK	100	8


Horizontal

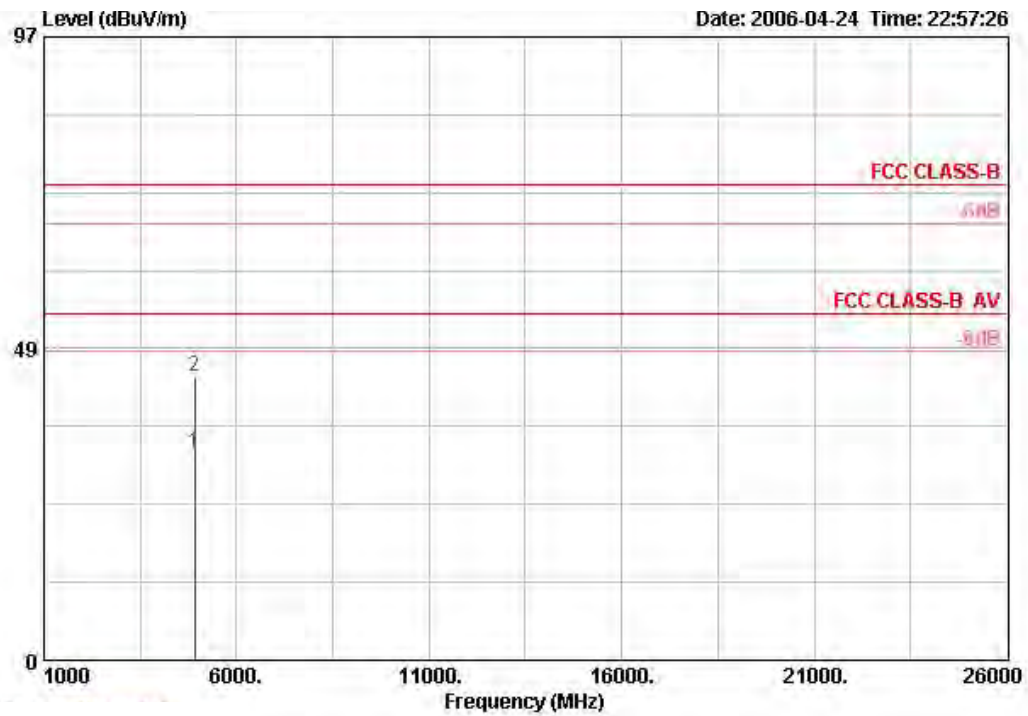

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4917.960	32.26	-21.74	54.00	33.41	4.71	35.10	29.24	AVERAGE	107	9
2	4917.960	44.05	-29.95	74.00	33.41	4.71	35.10	41.03	PEAK	107	9


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 3

Vertical

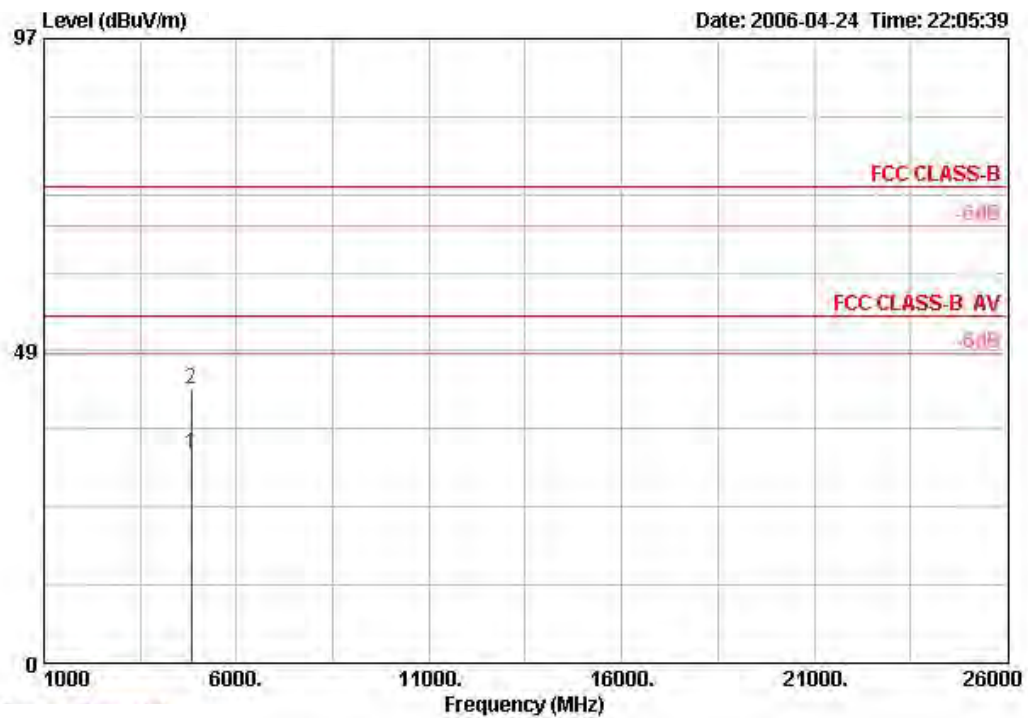

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4831.560	32.53	-21.47	54.00	33.22	4.68	35.10	29.74 AVERAGE	100	0
2	4831.560	42.48	-31.52	74.00	33.22	4.68	35.10	39.69 PEAK	100	0


Horizontal

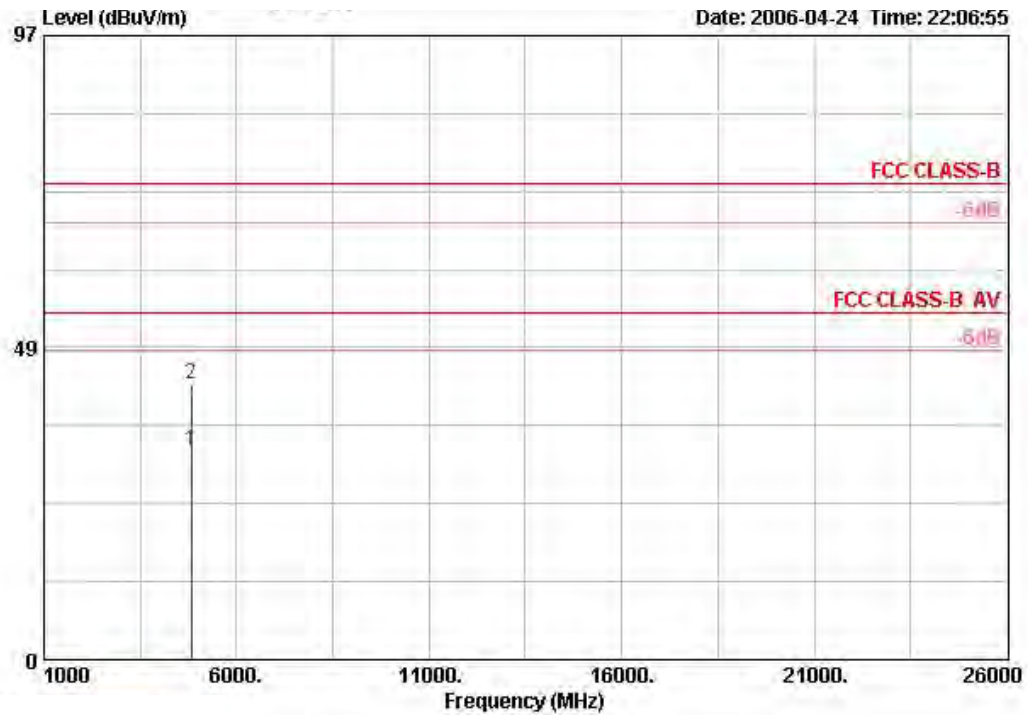

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4831.560	32.51	-21.49	54.00	33.22	4.68	35.10	29.72 AVERAGE	100	0
2	4831.560	42.85	-31.15	74.00	33.22	4.68	35.10	40.06 PEAK	100	0


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 3

Vertical

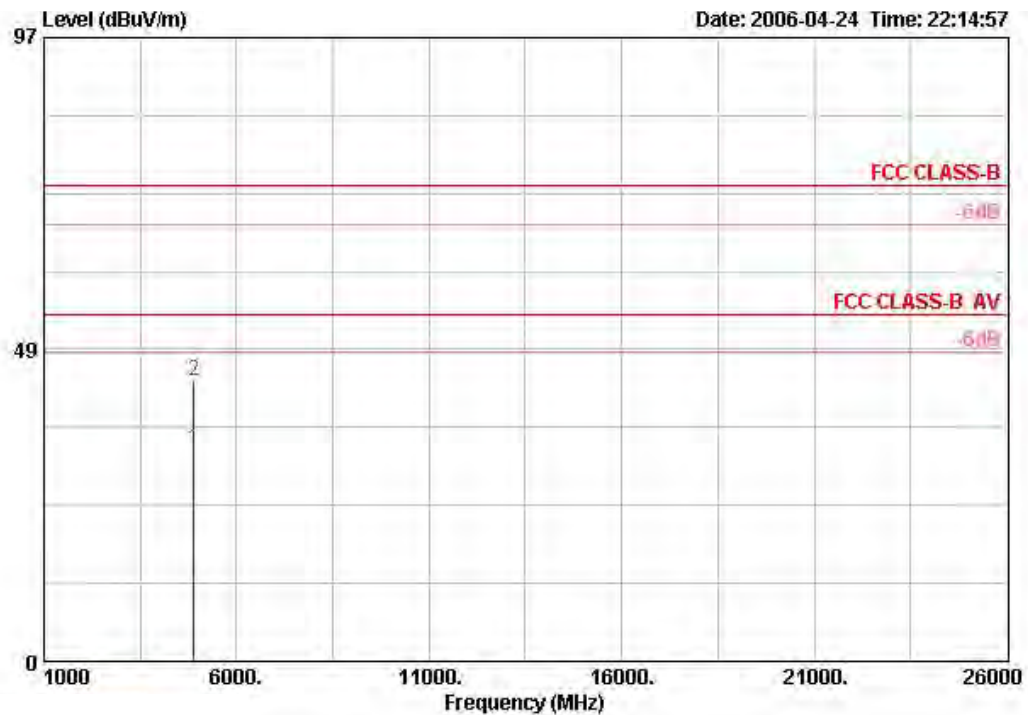

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1	4881.400	33.09	-20.91	54.00	33.33	4.71	35.10	30.15 AVERAGE	100	6
2	4881.400	43.66	-30.34	74.00	33.33	4.71	35.10	40.71 PEAK	100	6


Horizontal

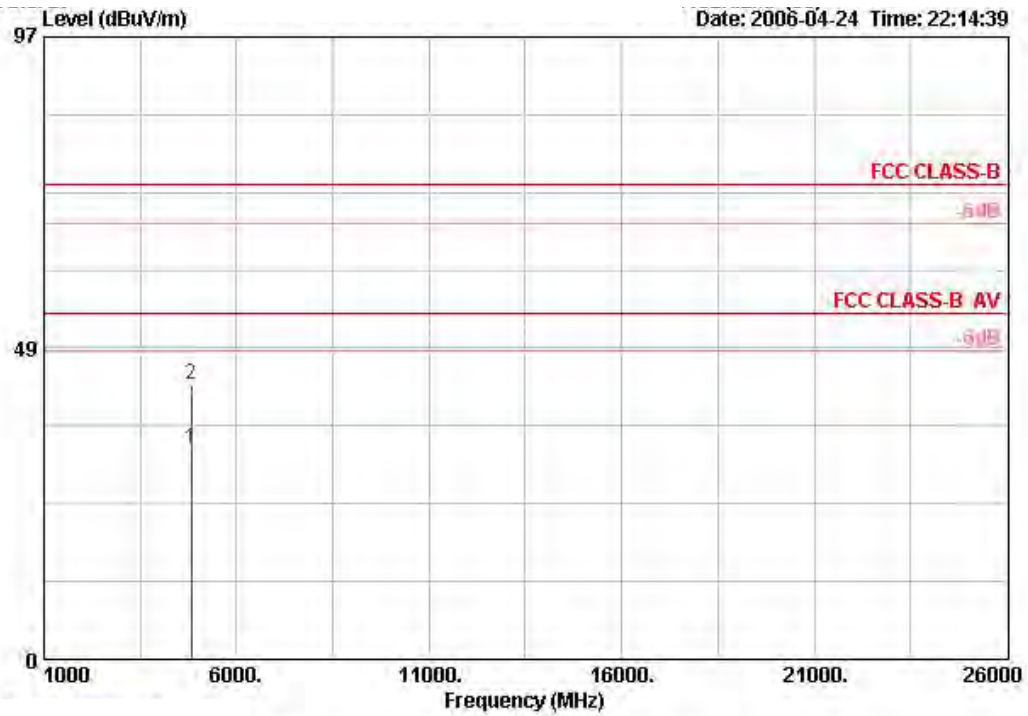

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4830.800	32.68	-21.32	54.00	33.22	4.68	35.10	29.89	AVERAGE	100	6
2	4830.800	42.91	-31.09	74.00	33.22	4.68	35.10	40.11	PEAK	100	6


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 3

Vertical

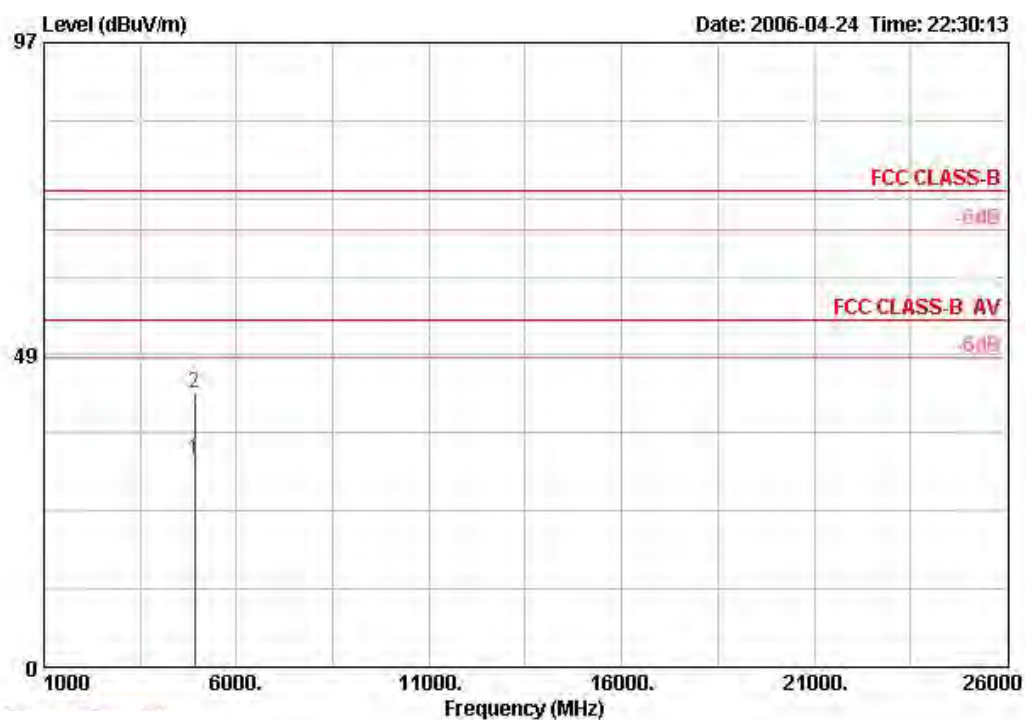

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4917.000	32.25	-21.75	54.00	33.41	4.71	35.10	29.23 AVERAGE	100	0
2	4917.000	42.62	-31.38	74.00	33.41	4.71	35.10	39.60 PEAK	100	0


Horizontal

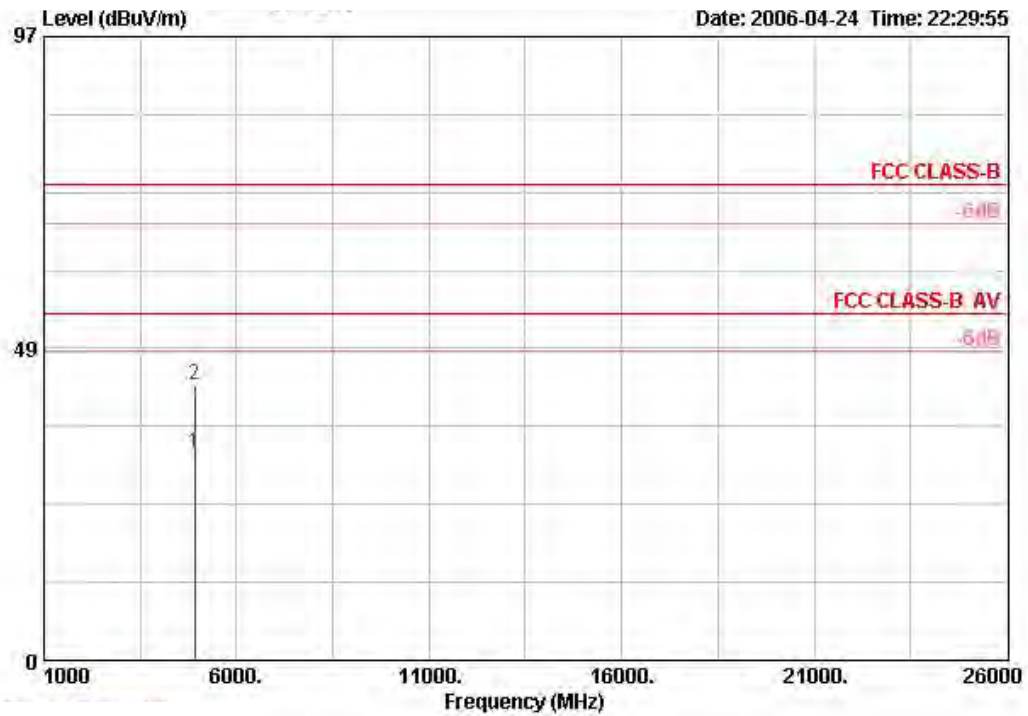

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4917.000	32.28	-21.72	54.00	33.41	4.71	35.10	29.26	AVERAGE	100	0
2	4917.000	42.86	-31.14	74.00	33.41	4.71	35.10	39.84	PEAK	100	0

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 3


Vertical

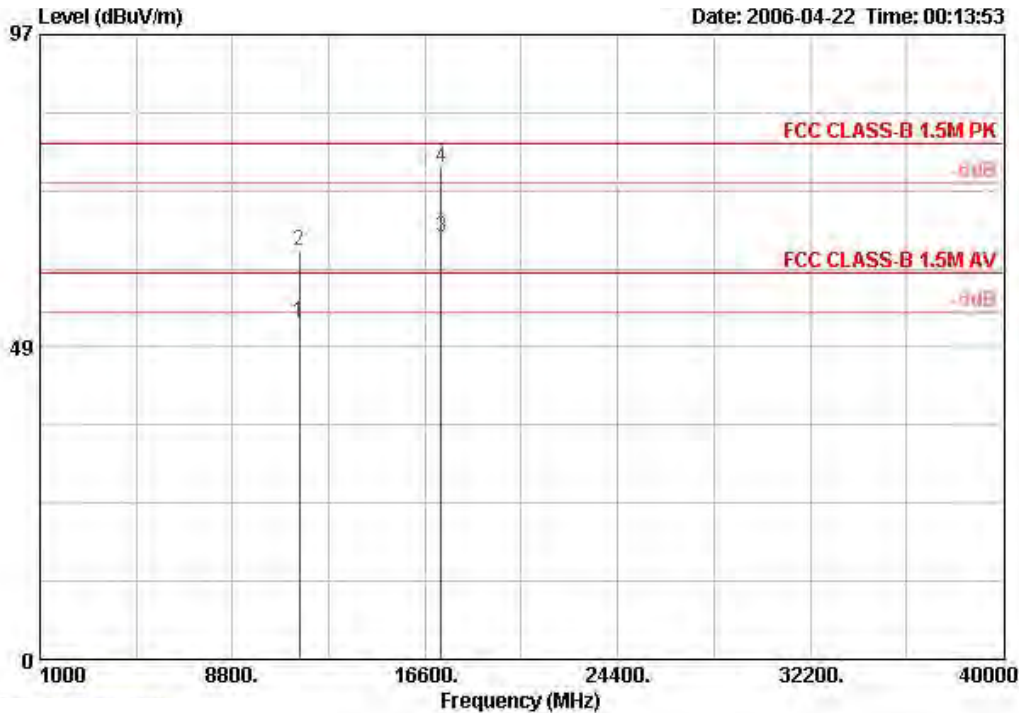

	Freq	Level	Over Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11489.560	52.37	-7.63	60.00	39.20	6.96	35.10	41.31 AVERAGE	119	276
2	11489.560	63.57	-16.43	80.00	39.20	6.96	35.10	52.51 PEAK	119	276
3 @	17237.000	65.45			40.93	18.15	35.00	41.38 AVERAGE	100	250
4	17237.000	76.50	-3.50	80.00	40.93	18.15	35.00	52.42 PEAK	100	250

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

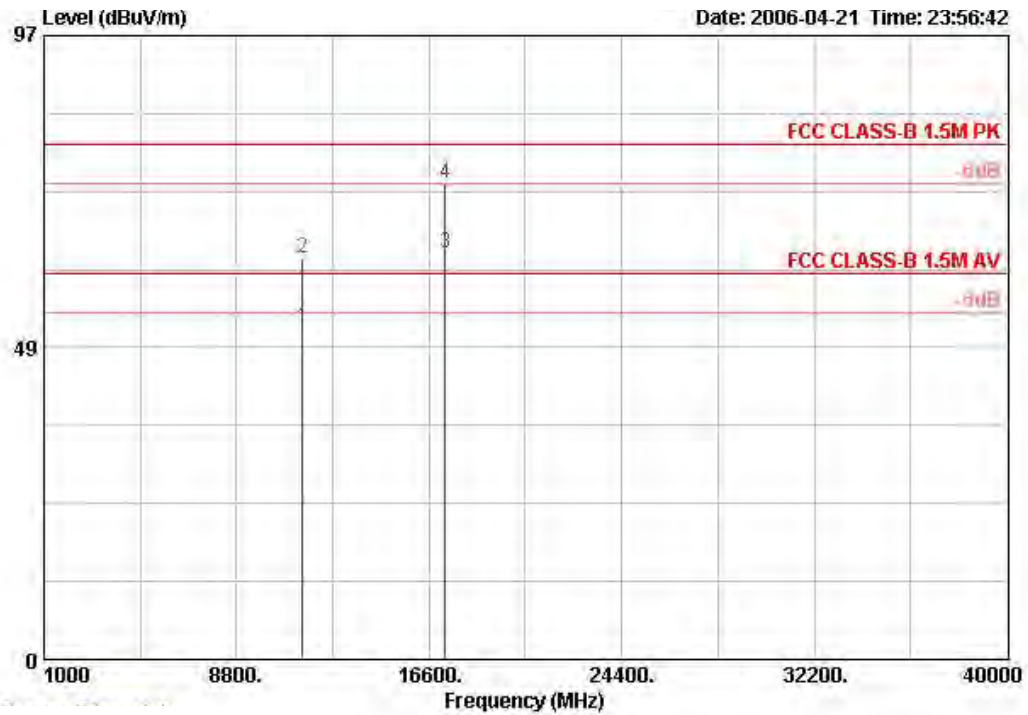


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11483.200	51.44	-8.56	60.00	39.20	6.96	35.10	40.38	AVERAGE	107	327
2	11483.200	62.47	-17.53	80.00	39.20	6.96	35.10	51.41	PEAK	107	327
3 @	17236.200	63.27			40.93	18.15	35.00	39.19	AVERAGE	123	261
4 !	17236.200	74.13	-5.87	80.00	40.93	18.15	35.00	50.05	PEAK	123	261

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 3


Vertical

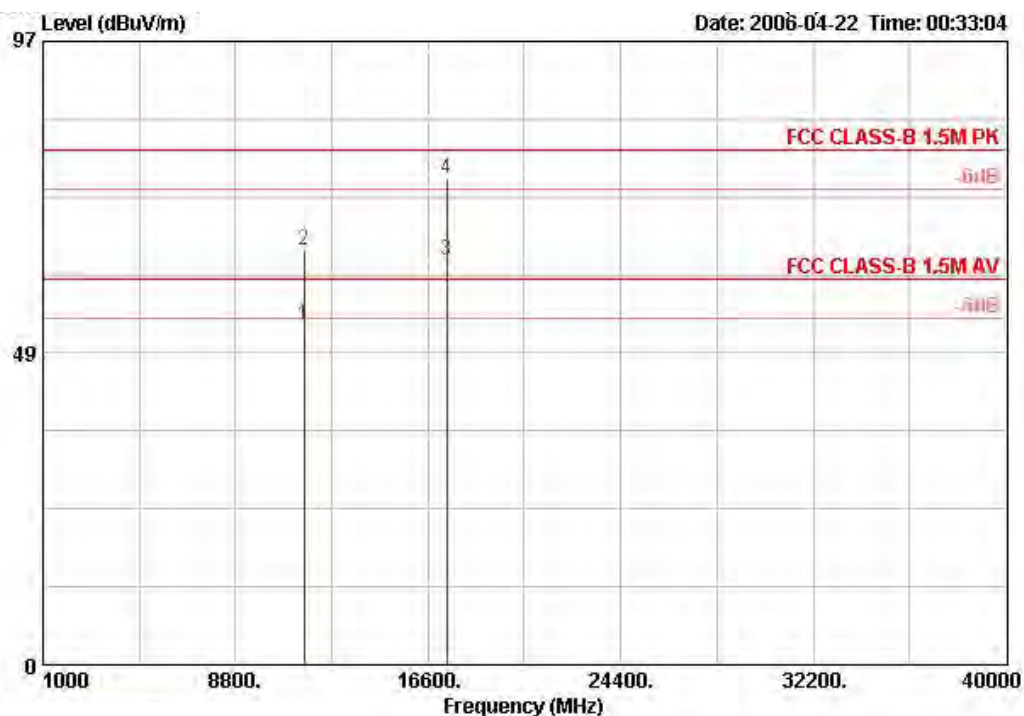

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11568.900	52.84	-7.16	60.00	39.21	7.06	35.12	41.69	AVERAGE	114	273
2	11568.900	64.52	-15.48	80.00	39.21	7.06	35.12	53.37	PEAK	114	273
3 @	17352.200	62.97			41.44	17.41	35.04	39.16	AVERAGE	113	251
4)	17352.200	75.48	-4.52	80.00	41.44	17.41	35.04	51.67	PEAK	113	251

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

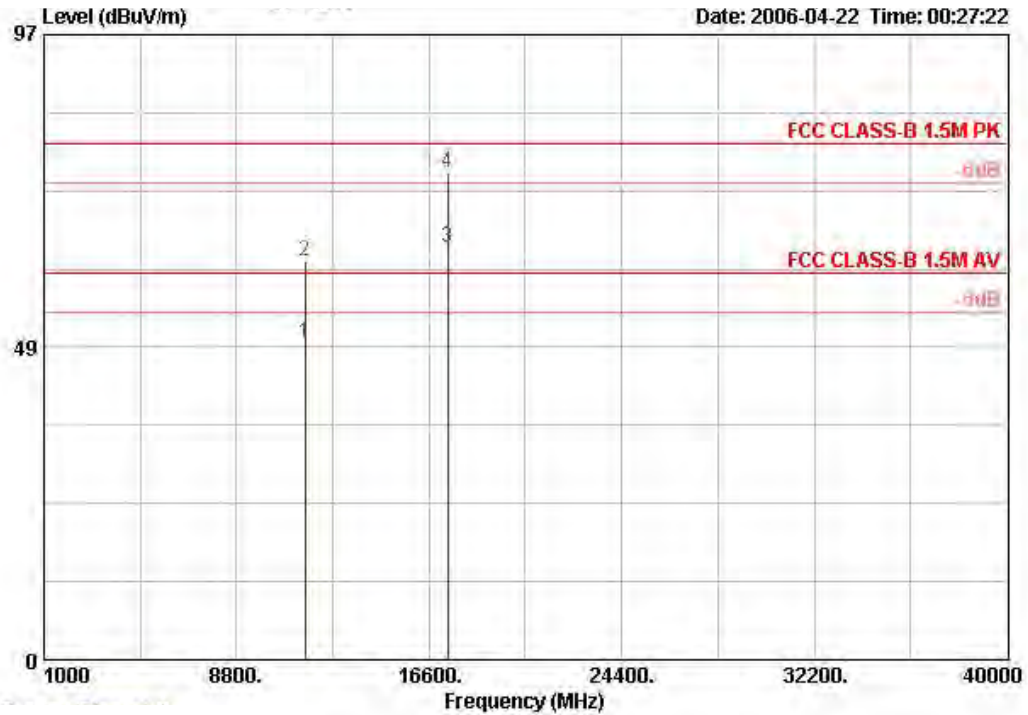


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11569.900	49.22	-10.78	60.00	39.21	7.06	35.13	38.09	AVERAGE	110	244
2	11569.900	61.80	-18.20	80.00	39.21	7.06	35.13	50.67	PEAK	110	244
3 @	17352.600	64.02			41.44	17.41	35.04	40.22	AVERAGE	120	249
4 !	17352.600	75.72	-4.28	80.00	41.44	17.41	35.04	51.92	PEAK	120	249

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 3


Vertical

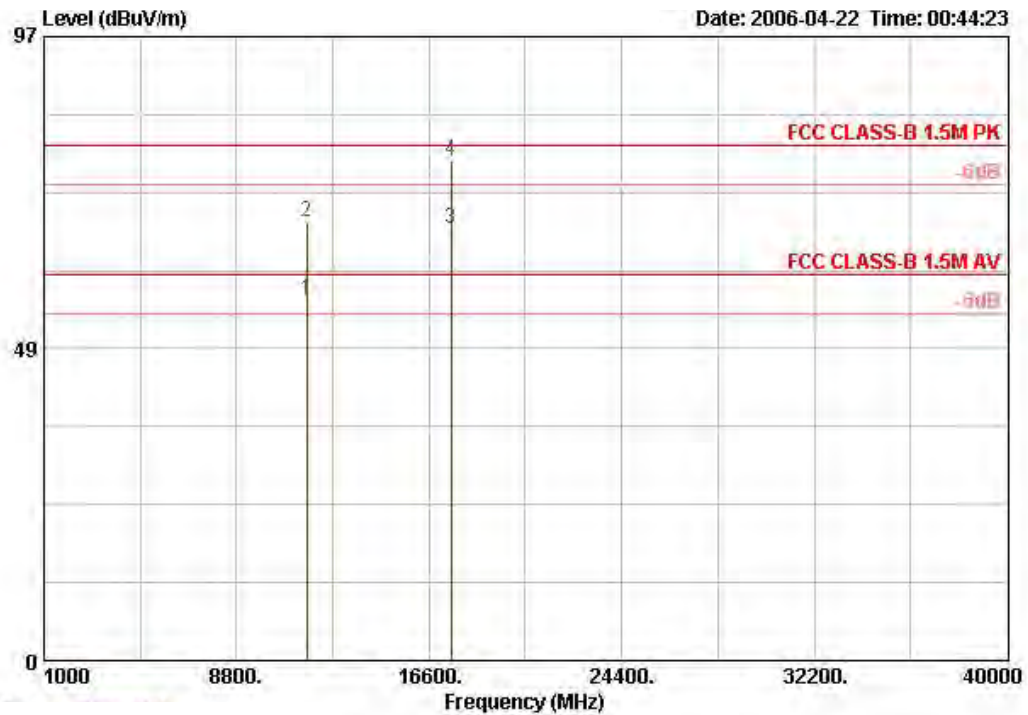

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 !	11651.300	56.08	-3.92	60.00	39.23	7.15	35.16	44.86 AVERAGE	125	294
2	11651.300	68.10	-11.90	80.00	39.23	7.15	35.16	56.88 PEAK	125	294
3 @	17474.000	67.26			41.95	16.66	35.09	43.73 AVERAGE	130	286
4 !	17474.000	77.66	-2.34	80.00	41.95	16.66	35.09	54.13 PEAK	130	286

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

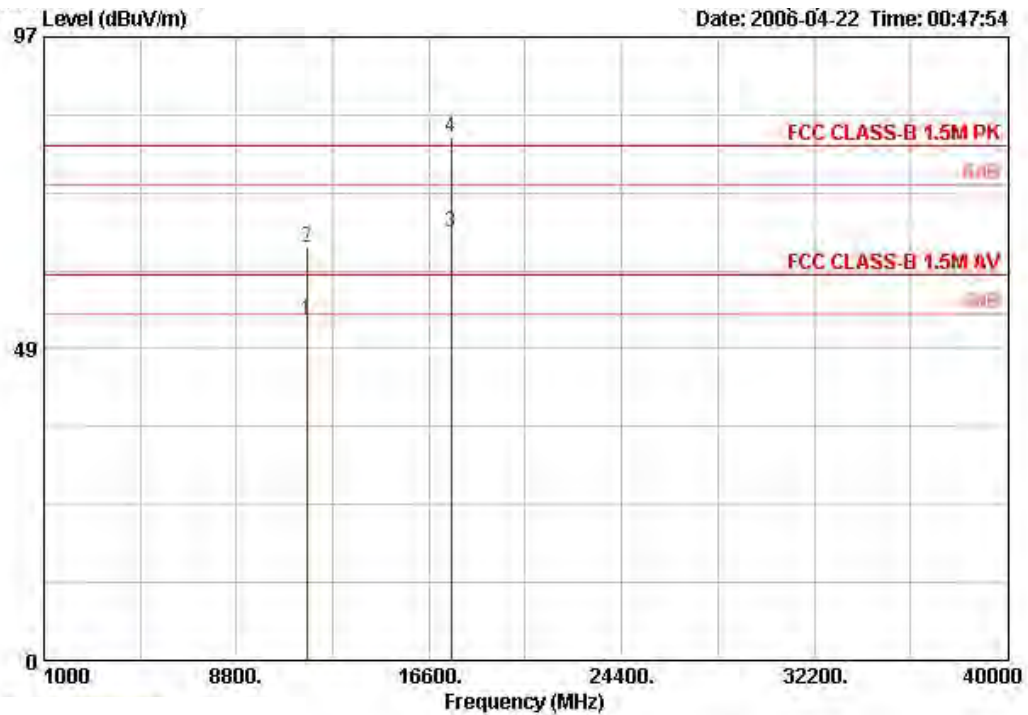


	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11650.300	52.78	-7.22	60.00	39.23	7.15	35.16	41.57 AVERAGE	118	246
2	11650.300	64.13	-15.87	80.00	39.23	7.15	35.16	52.92 PEAK	118	246
3 @	17474.200	66.69			41.95	16.66	35.09	43.16 AVERAGE	120	249
4 @	17487.500	81.31			42.03	16.42	35.10	57.97 PEAK	120	249

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 3


Vertical

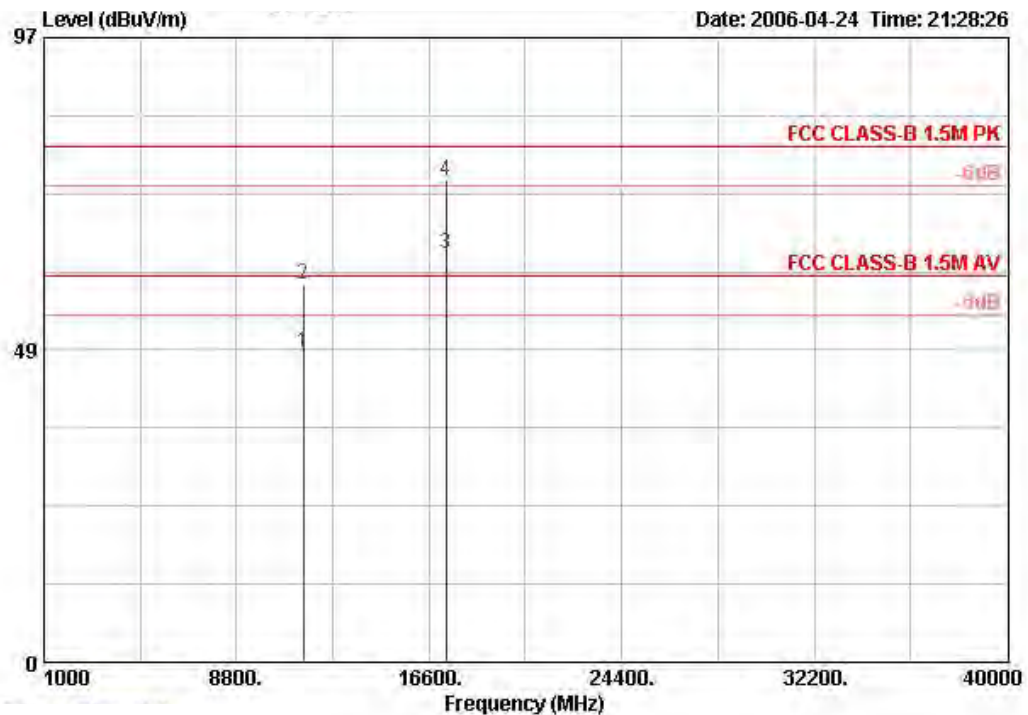

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11520.600	47.97	-12.03	60.00	39.20	7.01	35.11	36.87	AVERAGE	100	244
2	11520.600	58.56	-21.44	80.00	39.20	7.01	35.11	47.46	PEAK	100	244
3 @	17281.000	63.45			41.15	17.90	35.01	39.41	AVERAGE	100	239
4 !	17281.000	74.71	-5.29	80.00	41.15	17.90	35.01	50.67	PEAK	100	239

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

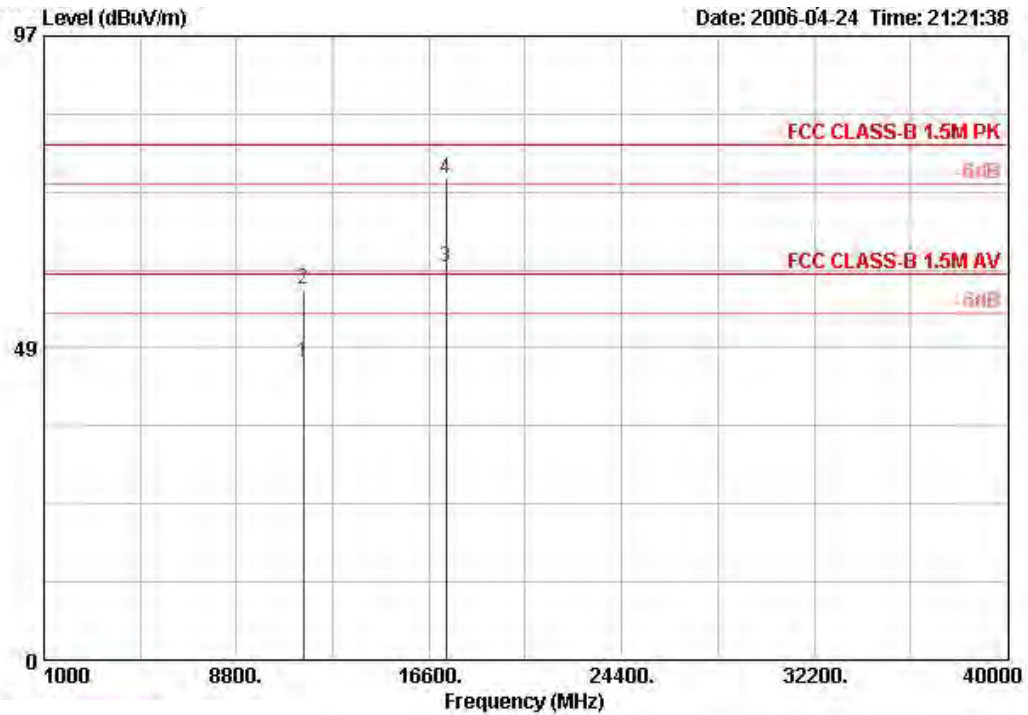


	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11520.800	46.27	-13.73	60.00	39.20	7.01	35.11	35.17	AVERAGE	107	328
2	11520.800	57.63	-22.37	80.00	39.20	7.01	35.11	46.53	PEAK	107	328
3	17281.120	60.99			41.15	17.90	35.01	36.95	AVERAGE	122	250
4	17282.320	74.75	-5.25	80.00	41.15	17.90	35.02	50.72	PEAK	122	250

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 3


Vertical

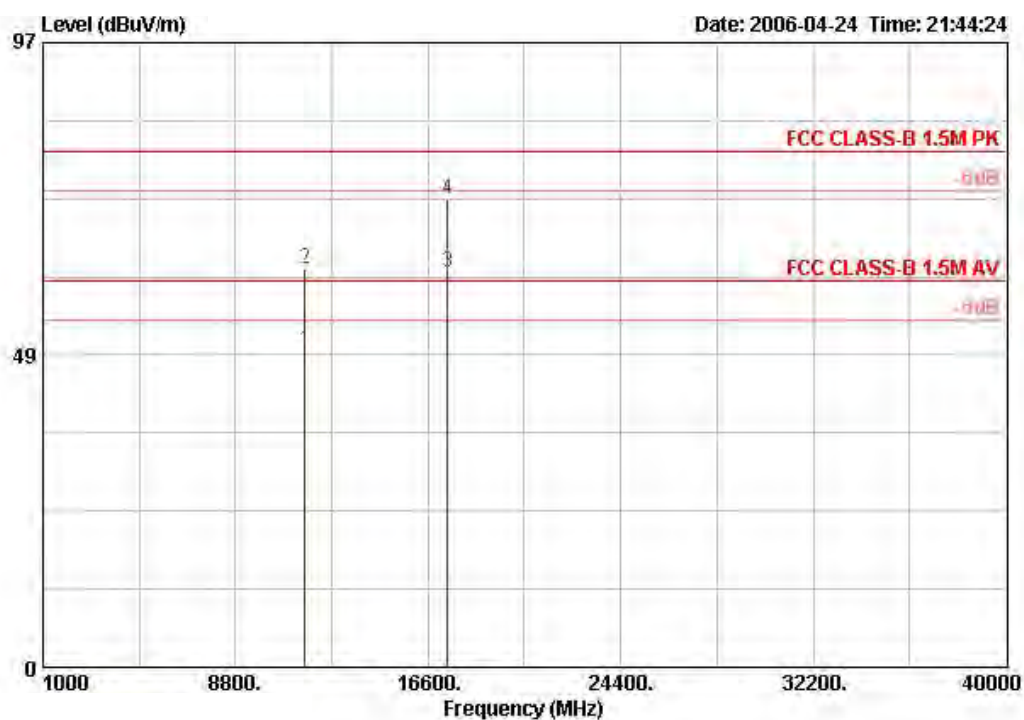

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11599.900	49.25	-10.75	60.00	39.22	7.10	35.14	38.07	AVERAGE	111	243
2	11599.900	61.96	-18.04	80.00	39.22	7.10	35.14	50.78	PEAK	111	243
3 @	17387.700	61.33			41.59	17.16	35.06	37.65	AVERAGE	103	238
4	17387.700	72.80	-7.20	80.00	41.59	17.16	35.06	49.11	PEAK	103	238

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

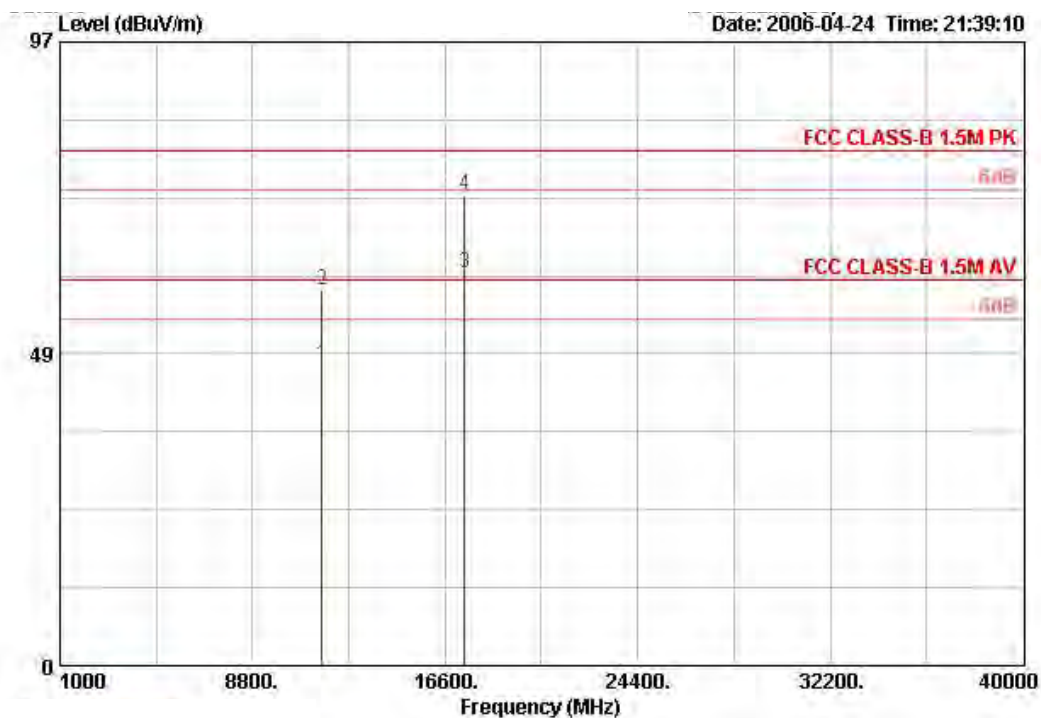

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	11598.300	46.78	-13.22	60.00	39.22	7.10	35.14	35.60	AVERAGE	110	242
2	11598.300	58.40	-21.60	80.00	39.22	7.10	35.14	47.22	PEAK	110	242
3 @	17393.100	61.03			41.59	17.16	35.06	37.34	AVERAGE	119	246
4	17393.100	73.16	-6.84	80.00	41.59	17.16	35.06	49.47	PEAK	119	246

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 4

Vertical

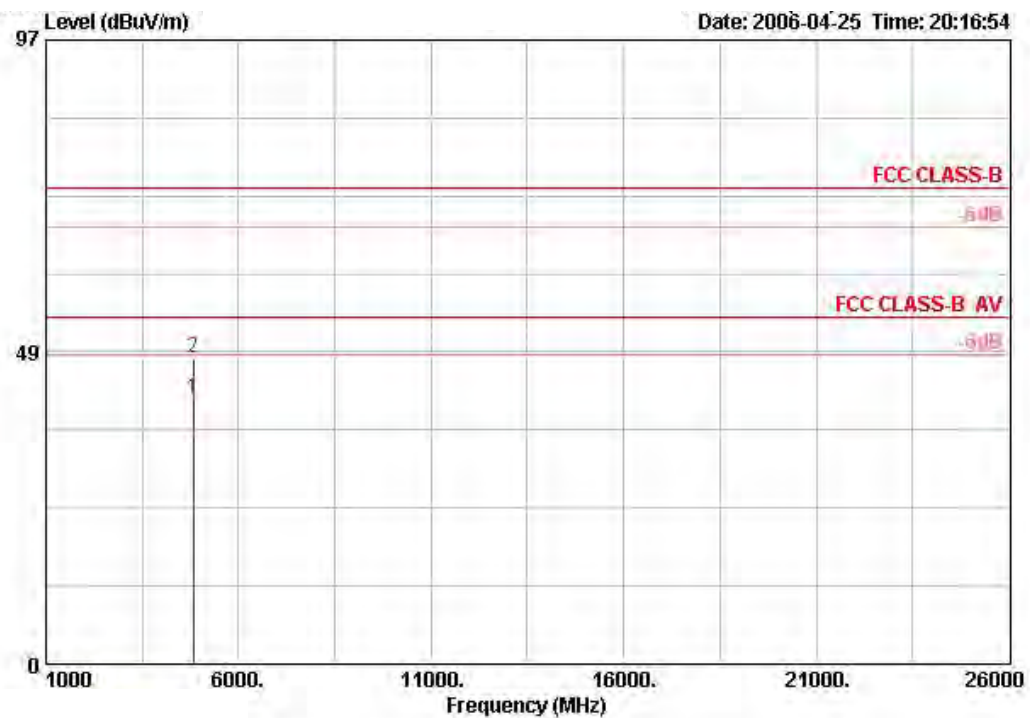

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4824.000	41.14	-12.86	54.00	33.22	4.68	35.10	38.35	AVERAGE	134	283
2	4824.000	47.61	-26.39	74.00	33.22	4.68	35.10	44.82	PEAK	134	283


Horizontal

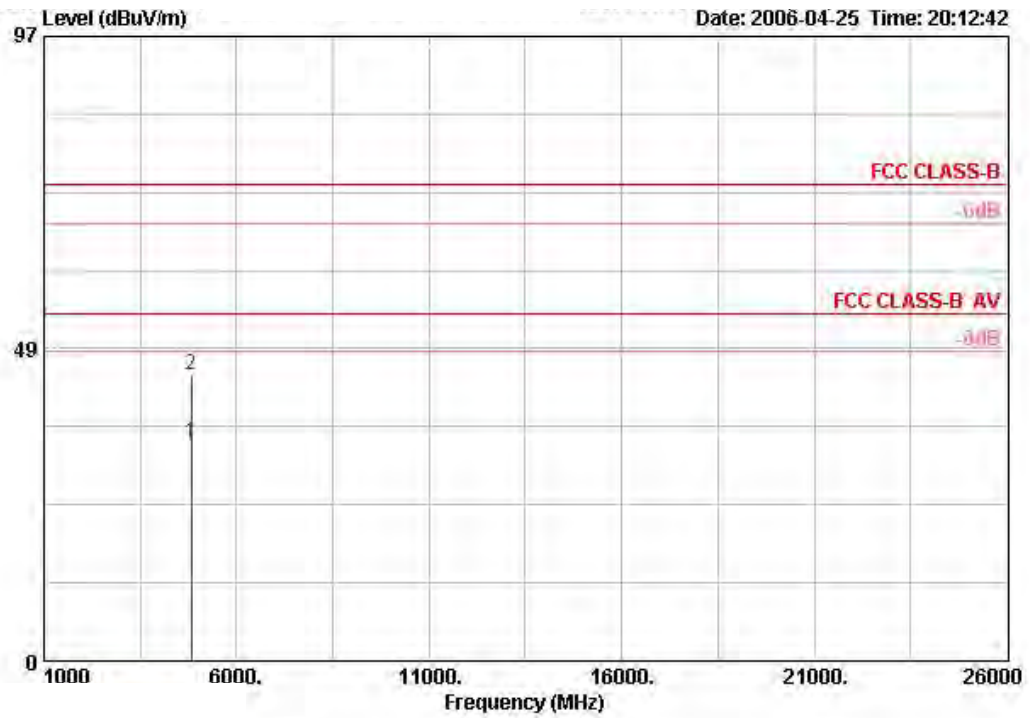

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dB/m	dB	dB	dBuV		cm	deg
1	4824.120	33.80	-20.20	54.00	33.22	4.68	35.10	31.00 AVERAGE	133	268
2	4824.120	44.49	-29.51	74.00	33.22	4.68	35.10	41.69 PEAK	133	268


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 4

Vertical

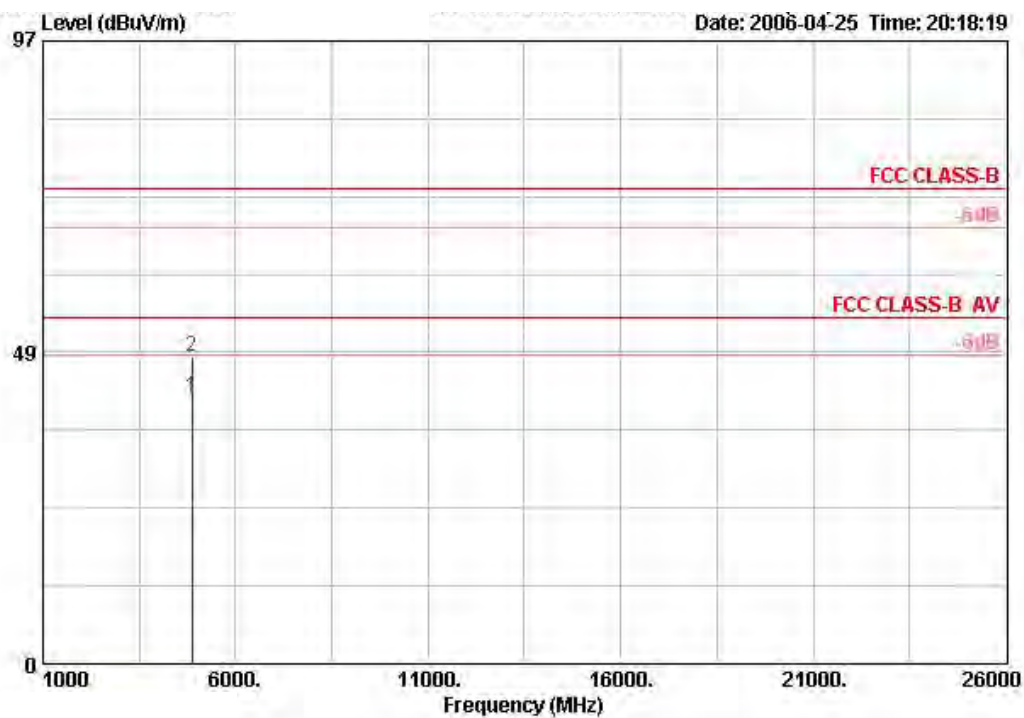

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
			dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4874.080	41.53	-12.47	54.00	33.33	4.69	35.10	38.60	AVERAGE	131	277
2	4874.080	47.93	-26.07	74.00	33.33	4.69	35.10	45.00	PEAK	131	277


Horizontal

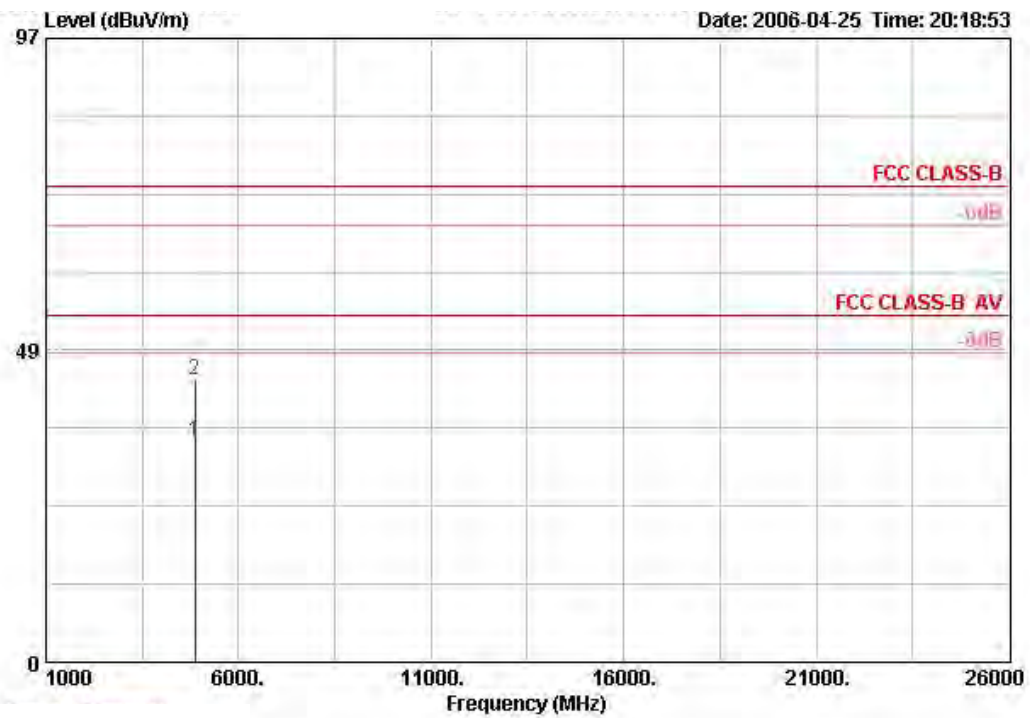

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4874.080	34.40	-19.60	54.00	33.33	4.69	35.10	31.47	AVERAGE	133	268
2	4874.080	43.93	-30.07	74.00	33.33	4.69	35.10	41.01	PEAK	133	268


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 4

Vertical

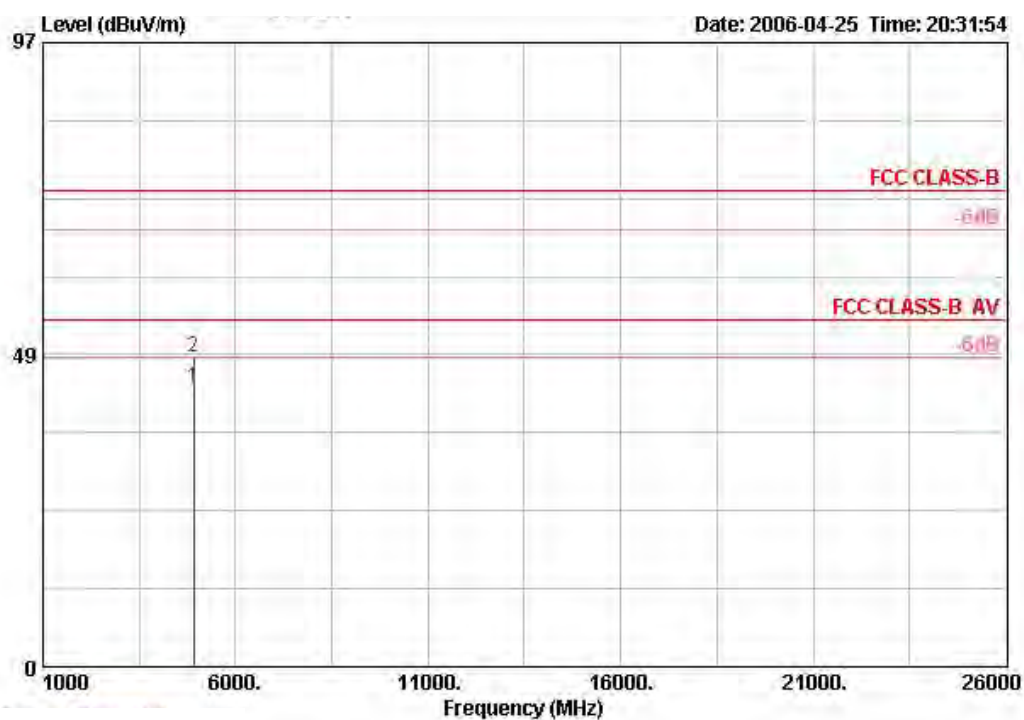

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss Factor	Preamp Loss Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4924.000	43.23	-10.77	54.00	33.45	4.73	35.10	40.16 AVERAGE	131	277
2	4924.000	48.08	-25.92	74.00	33.45	4.73	35.10	45.00 PEAK	131	277


Horizontal

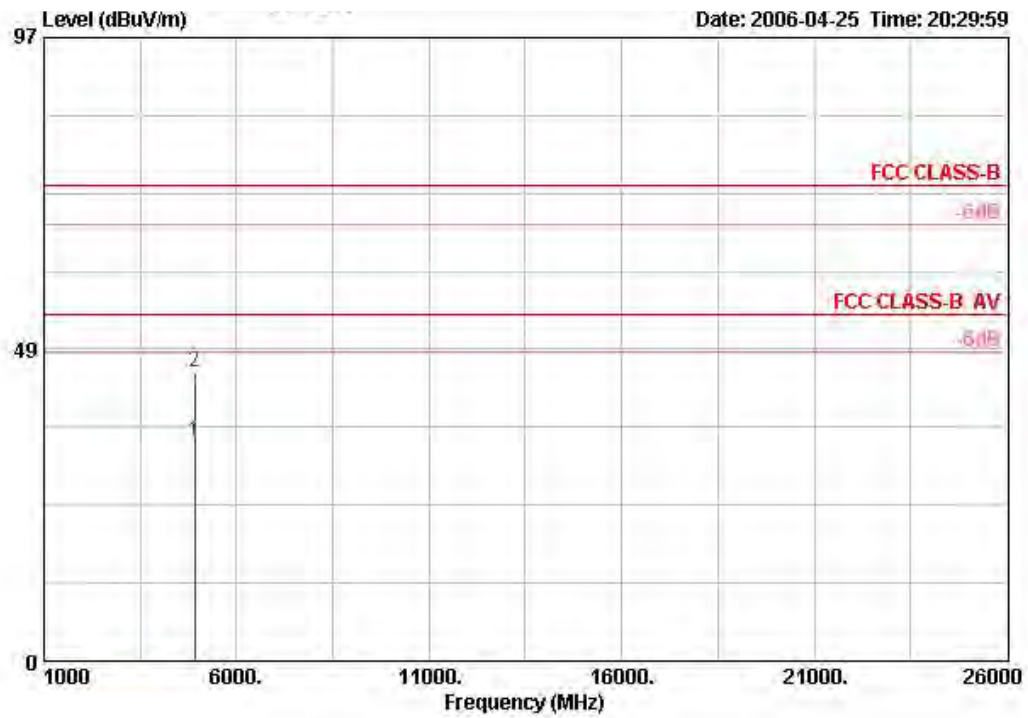

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dB	dB	dBUV		cm	deg
1	4923.920	34.07	-19.93	54.00	33.45	4.73	35.10	31.00 AVERAGE	133	268
2	4923.920	44.98	-29.02	74.00	33.45	4.73	35.10	41.91 PEAK	133	268


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 4

Vertical

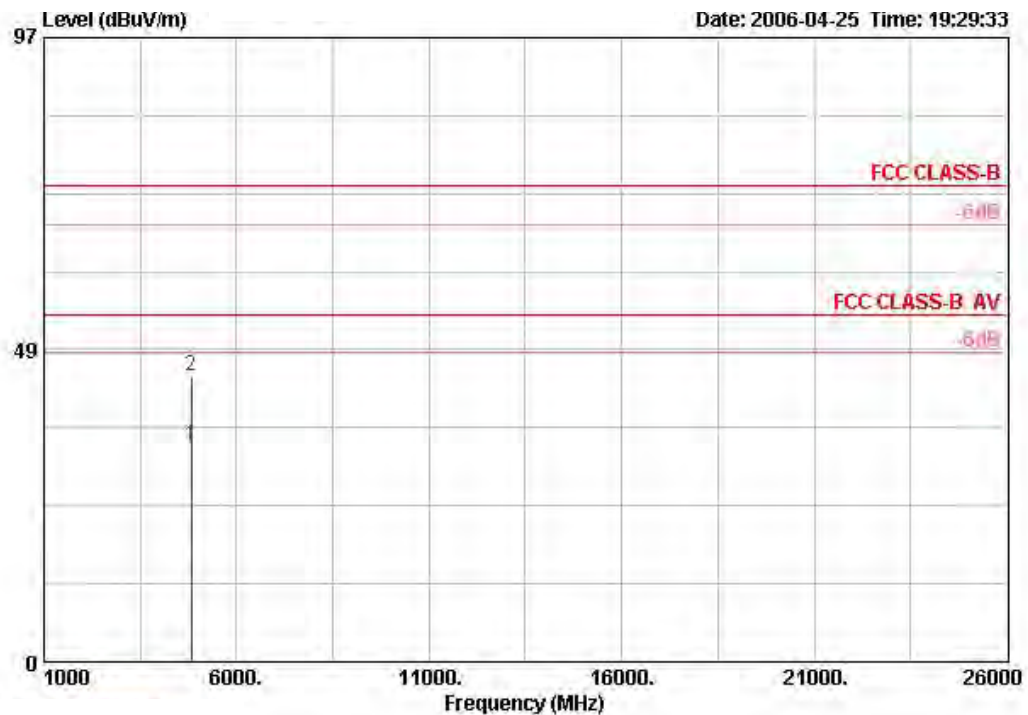

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4818.200	33.60	-20.40	54.00	33.22	4.68	35.10	30.81	AVERAGE	101	94
2	4818.200	44.48	-29.52	74.00	33.22	4.68	35.10	41.69	PEAK	101	87


Horizontal

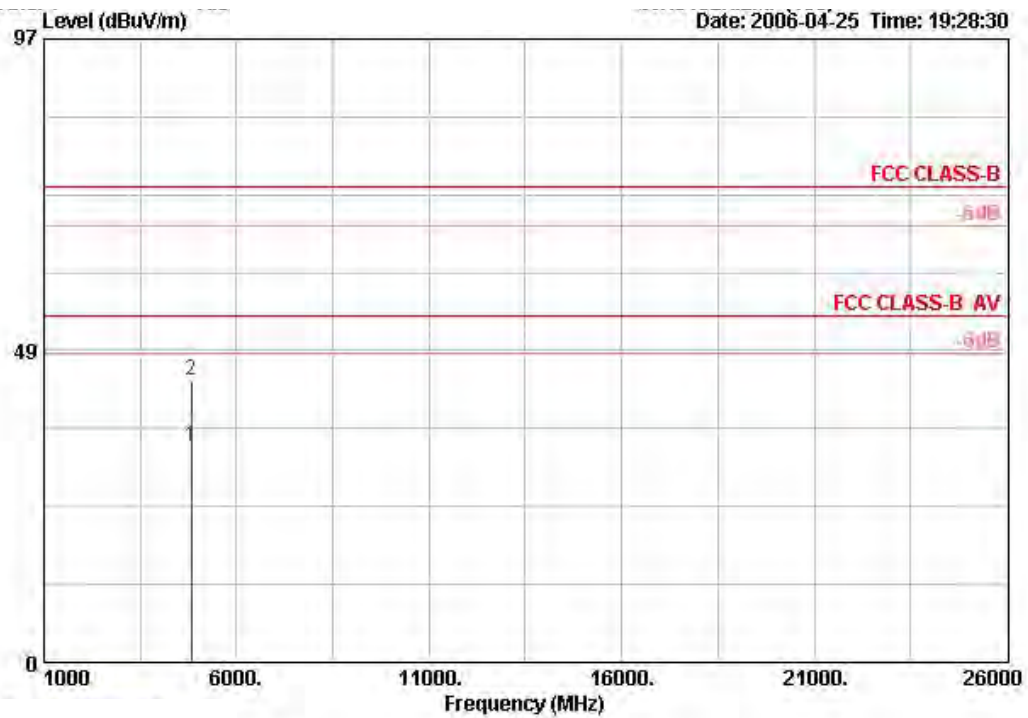

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4817.560	33.47	-20.53	54.00	33.22	4.68	35.10	30.67 AVERAGE	109	360
2	4817.560	43.90	-30.10	74.00	33.22	4.68	35.10	41.11 PEAK	109	360


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 4

Vertical

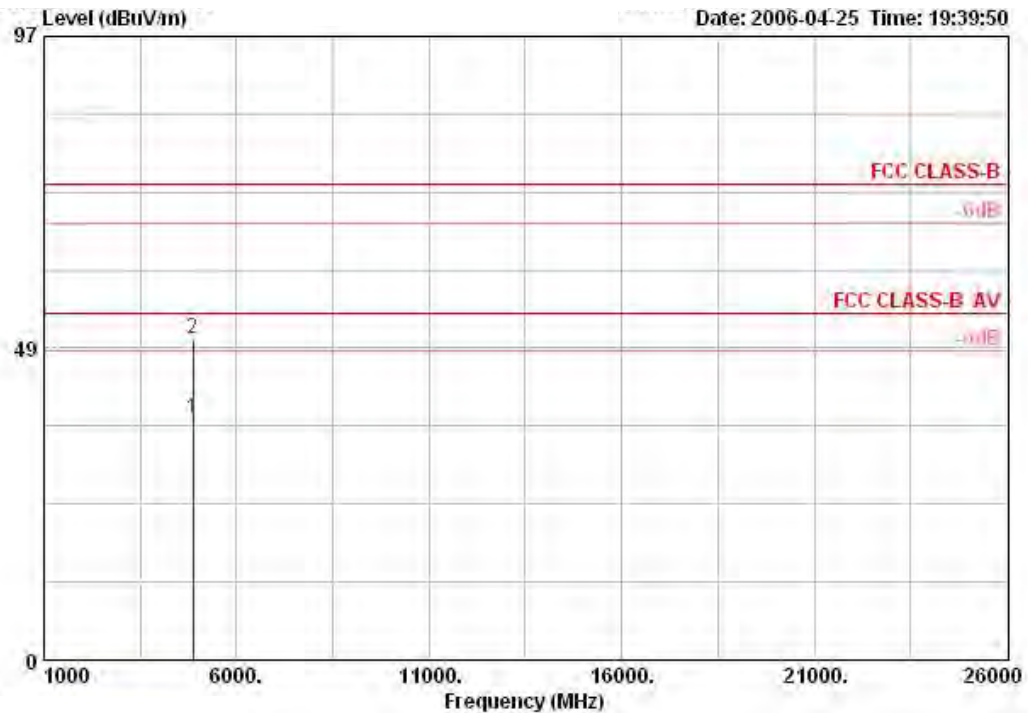

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1 @	4879.000	37.50	-16.50	54.00	33.33	4.69	35.10	34.57 AVERAGE	113	2
2	4879.000	49.93	-24.07	74.00	33.33	4.69	35.10	47.01 PEAK	113	1


Horizontal

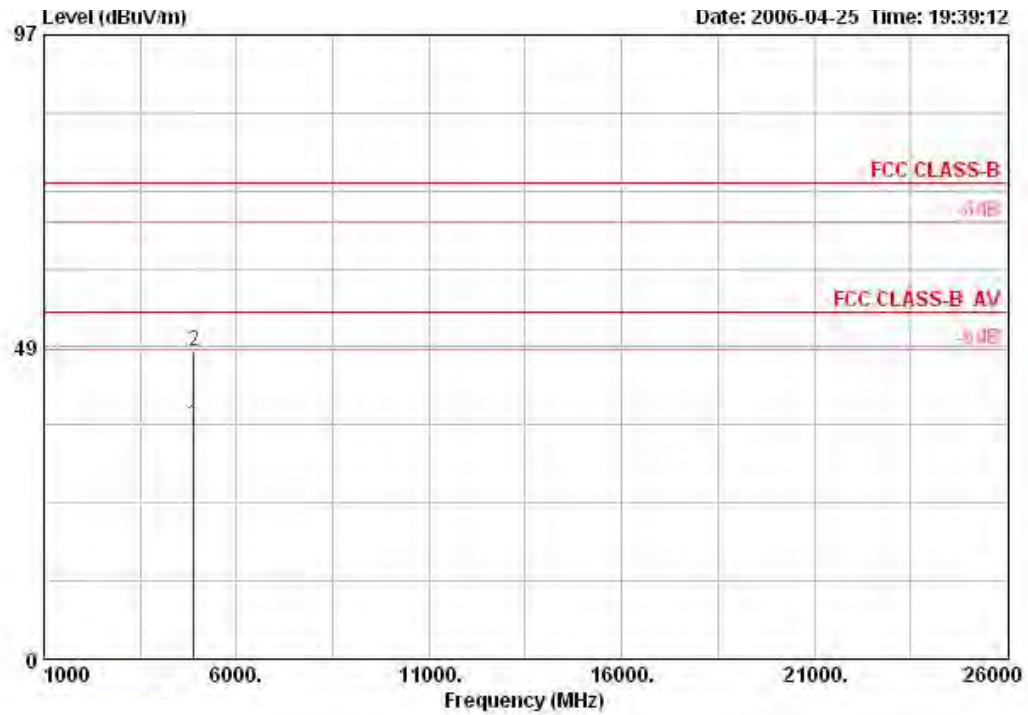

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4893.200	36.43	-17.57	54.00	33.37	4.71	35.10	33.45	AVERAGE	100	52
2	4893.200	47.85	-26.15	74.00	33.37	4.71	35.10	44.87	PEAK	100	52


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 4

Vertical

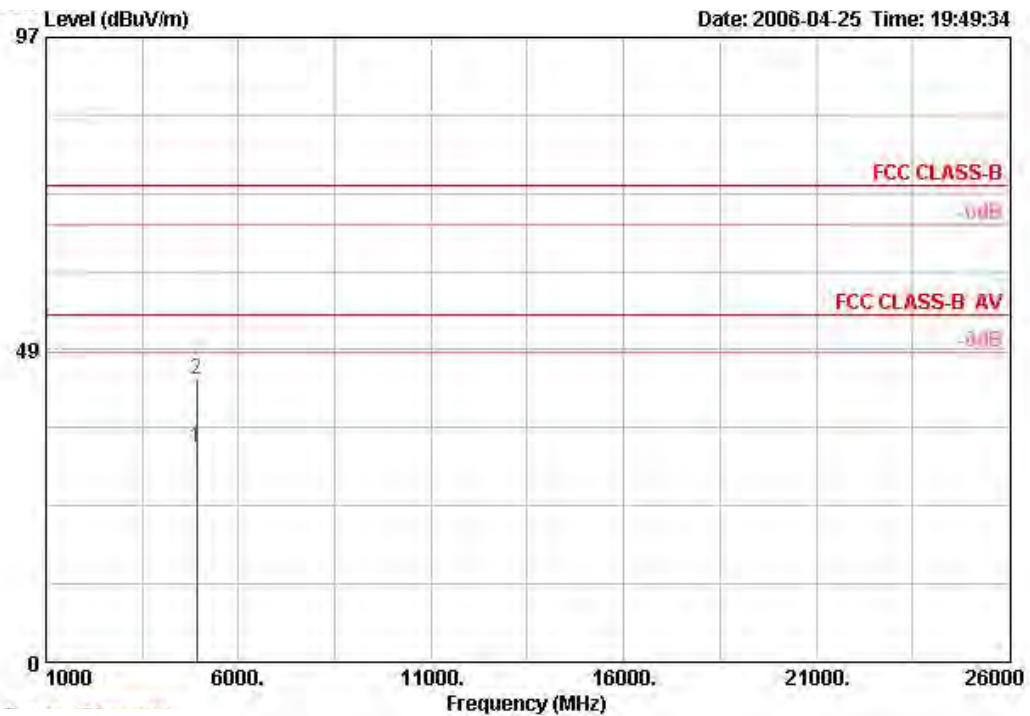

	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	4916.600	33.33	-20.67	54.00	33.41	4.71	35.10	30.31 AVERAGE	100	27
2	4916.600	43.93	-30.07	74.00	33.41	4.71	35.10	40.91 PEAK	100	27


Horizontal

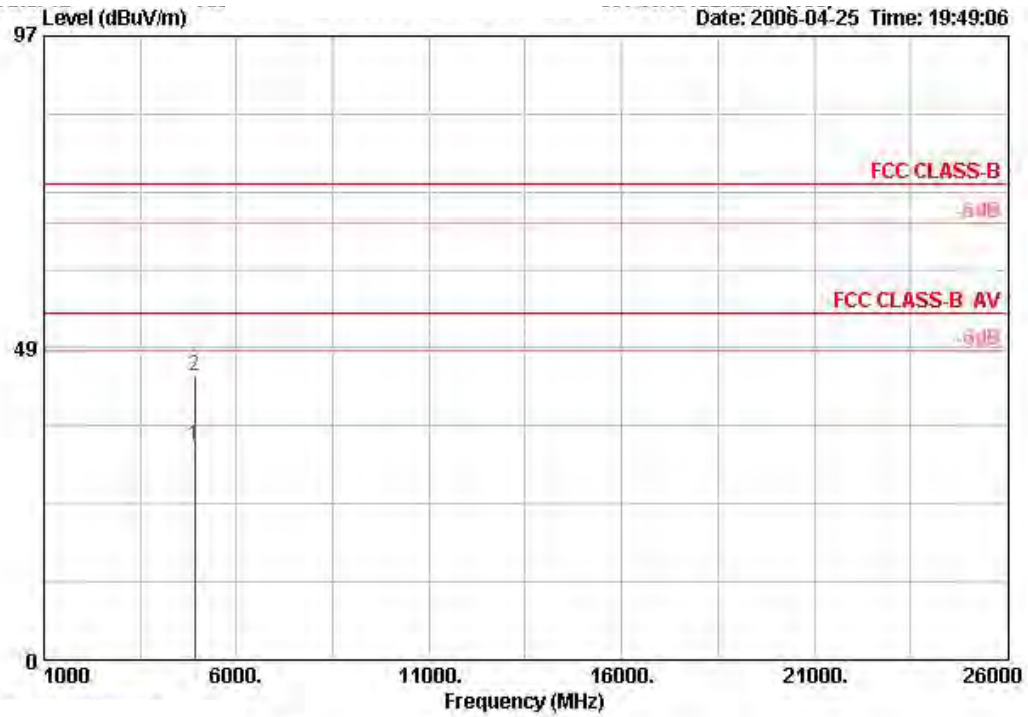

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1	4916.600	33.21	-20.79	54.00	33.41	4.71	35.10	30.19	AVERAGE	122	27
2	4916.600	44.16	-29.84	74.00	33.41	4.71	35.10	41.14	PEAK	122	27

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 4


Vertical

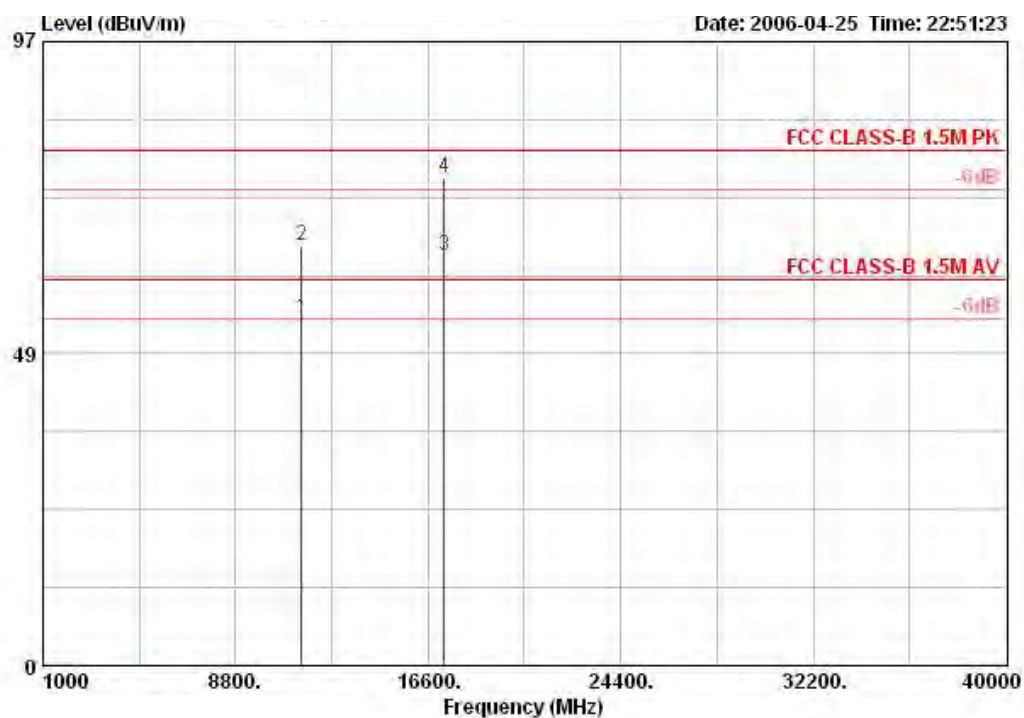

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 !	11488.240	54.03	-5.97	60.00	39.20	6.96	35.10	42.97	AVERAGE	131	228
2	11488.240	65.18	-14.82	80.00	39.20	6.96	35.10	54.12	Peak	131	228
3	17234.840	63.75			40.93	18.15	35.00	39.67	AVERAGE	132	290
4 !	17234.840	75.89	-4.11	80.00	40.93	18.15	35.00	51.82	PEAK	132	290

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Horizontal

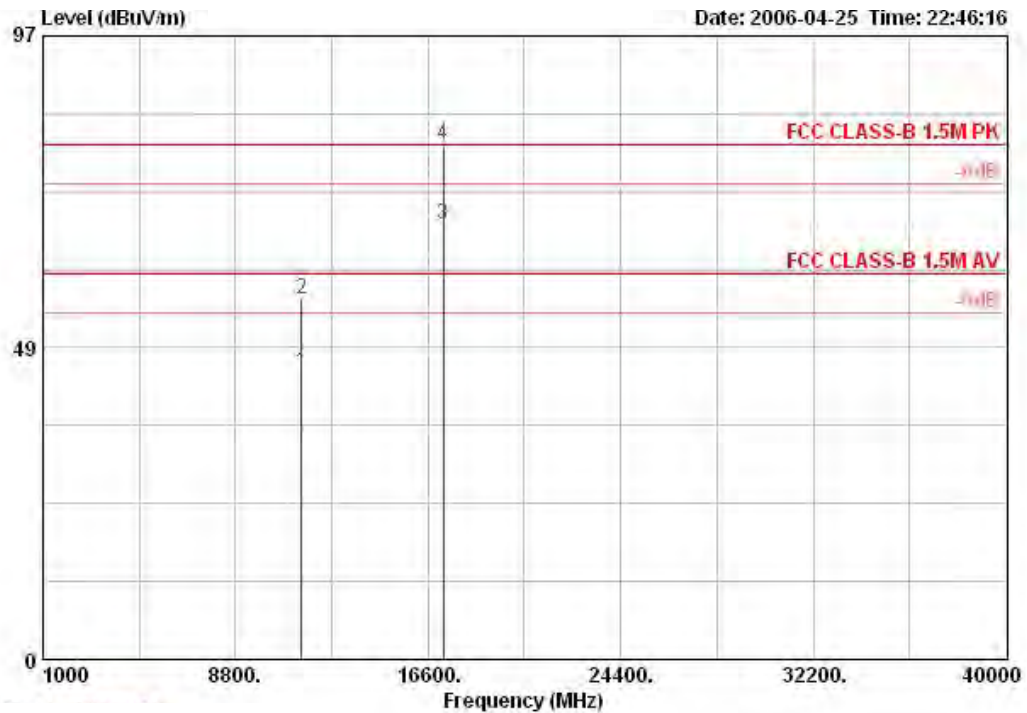


	Freq	Level	Over Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	cm	deg
1	11488.440	44.71	-15.29	60.00	39.20	6.96	35.10	33.65 AVERAGE	123	5
2	11488.440	55.91	-24.09	80.00	39.20	6.96	35.10	44.85 PEAK	123	5
3	17232.200	67.60			40.93	18.15	35.00	43.53 AVERAGE	128	246
4	17232.200	80.17			40.93	18.15	35.00	56.10 PEAK	128	246

Note: Item 3, 4 are on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.

Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 4

Vertical

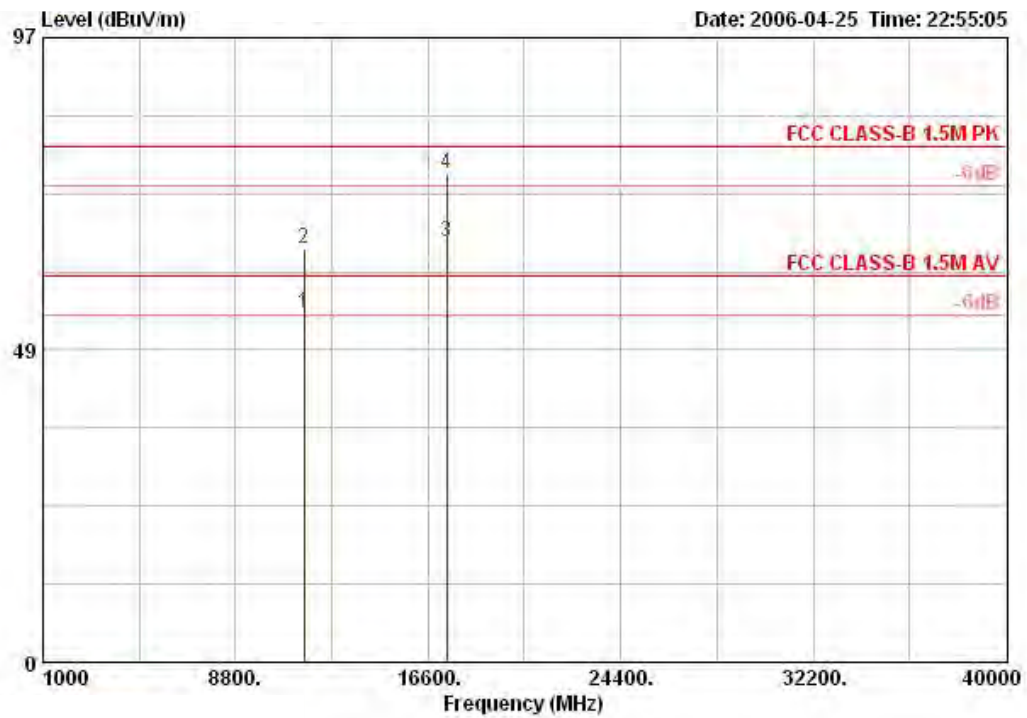

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Ant	Table
	MHz	dBuV/m	Limit	Line	Factor	Loss	Factor	Level	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		cm	deg
1 !	11569.080	54.17	-5.83	60.00	39.21	7.06	35.12	43.02	AVERAGE	125	229
2	11569.080	64.11	-15.89	80.00	39.21	7.06	35.12	52.97	PEAK	125	229
3	17353.920	65.26			41.44	17.41	35.04	41.45	AVERAGE	144	290
4 !	17353.920	75.76	-4.24	80.00	41.44	17.41	35.04	51.95	PEAK	144	290

Note: Item 3 is on un-restricted band, so the limit is -20dBc for the field strength of fundamental emission.