



Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 1

Vertical

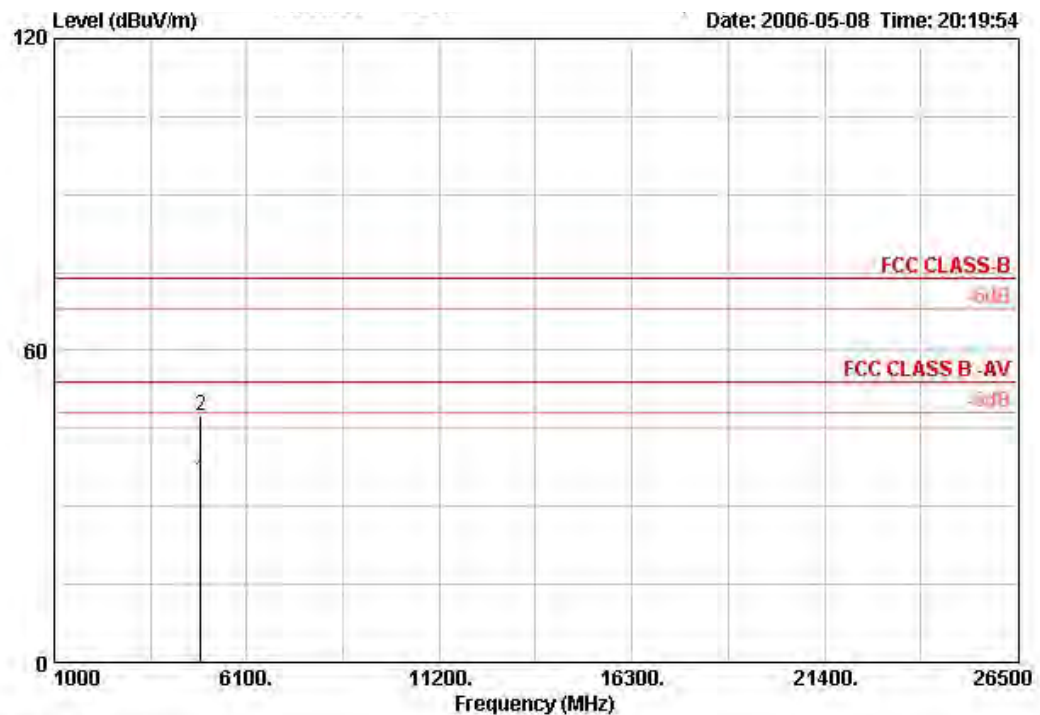

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	m
			dB	dBUV/m	dBuV	dB/m	dB	dB		
1	4873.616	34.98	-19.02	54.00	32.95	32.88	4.30	35.15	AVERAGE	3
2	4874.656	47.29	-26.71	74.00	45.26	32.88	4.30	35.15	PEAK	3


Horizontal

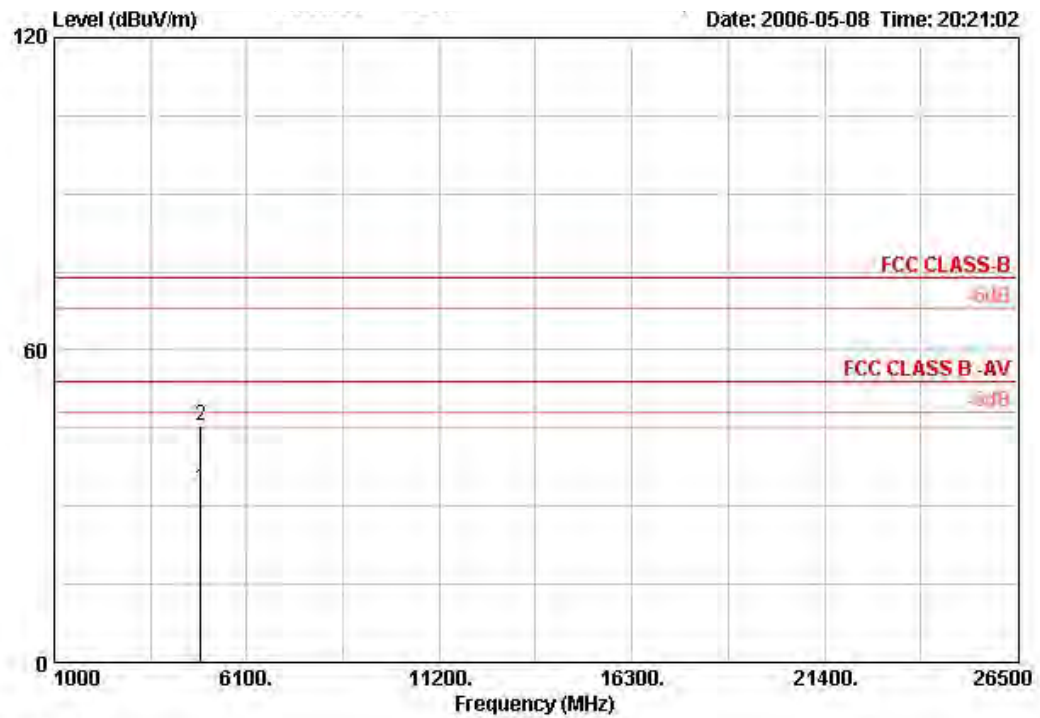

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m	
1	4873.088	33.37	-20.63	54.00	31.35	32.88	4.30	35.15	AVERAGE	HORIZONTAL	3
2	4874.908	45.55	-28.45	74.00	43.52	32.88	4.30	35.15	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 1

Vertical

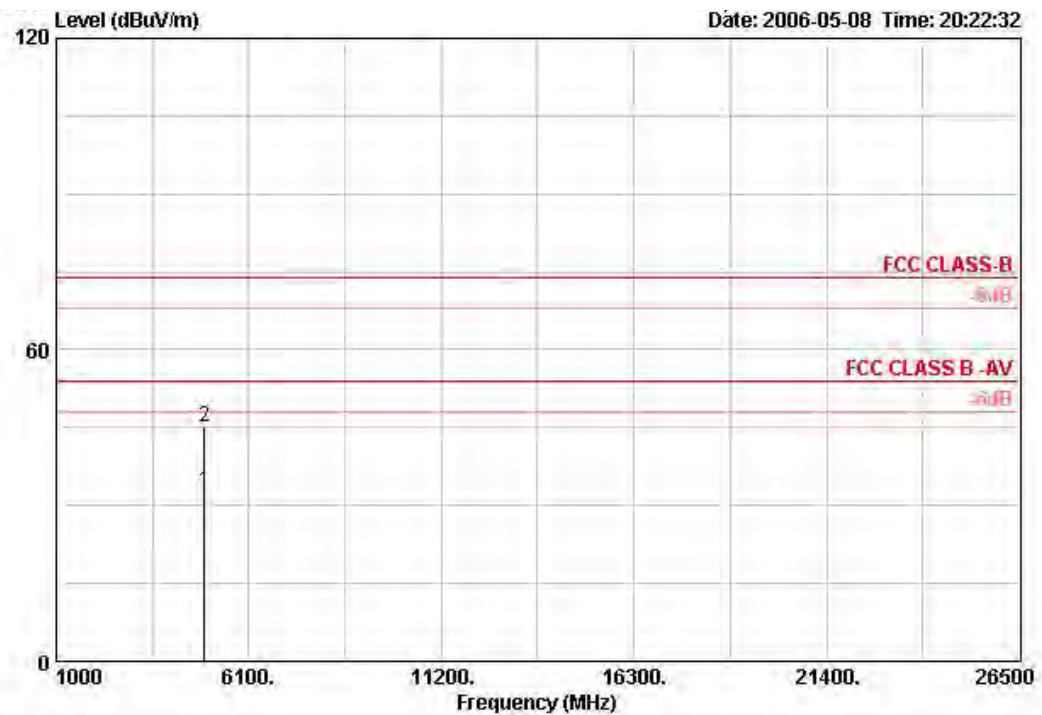

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1	4923.776	32.59	-21.41	54.00	30.50	32.93	4.30	35.14	AVERAGE	VERTICAL
2	4924.068	45.04	-28.96	74.00	42.95	32.93	4.30	35.14	PEAK	VERTICAL


Horizontal

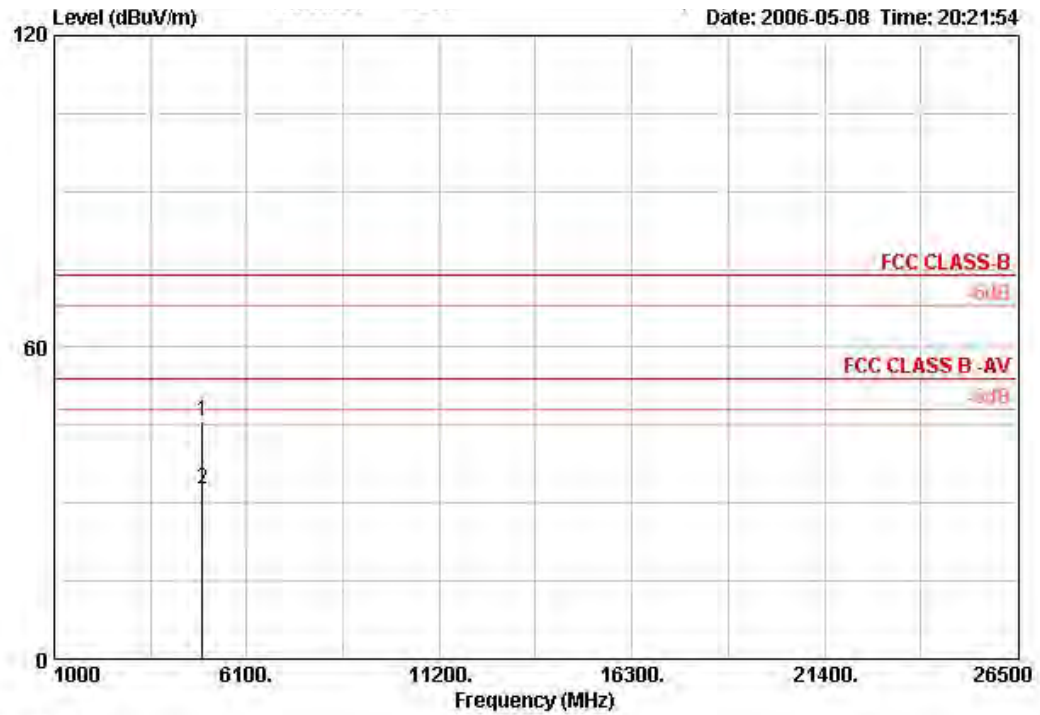

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	4923.040	45.72	-28.28	74.00	43.63	32.93	4.30	35.14	PEAK	3
2	4923.292	32.55	-21.45	54.00	30.46	32.93	4.30	35.14	AVERAGE	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Turbo Channel 6 / Ant. 1

Vertical

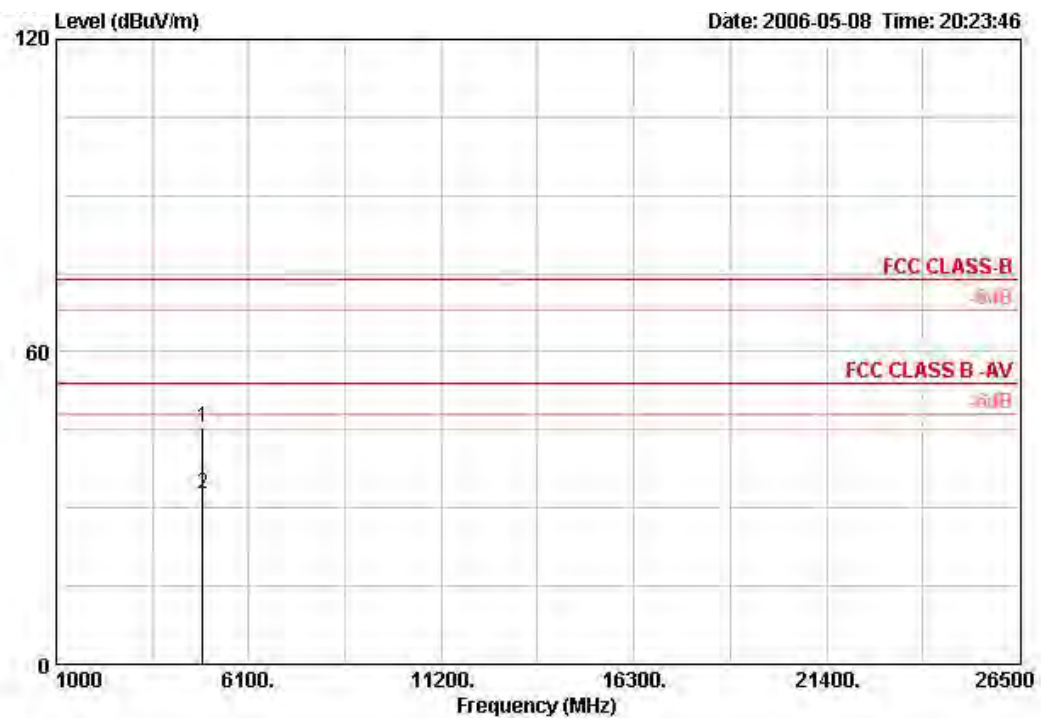

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	4873.248	45.33	-28.67	74.00	43.30	32.88	4.30	35.15	PEAK	3
2	4873.372	32.84	-21.16	54.00	30.82	32.88	4.30	35.15	AVERAGE	3

Horizontal

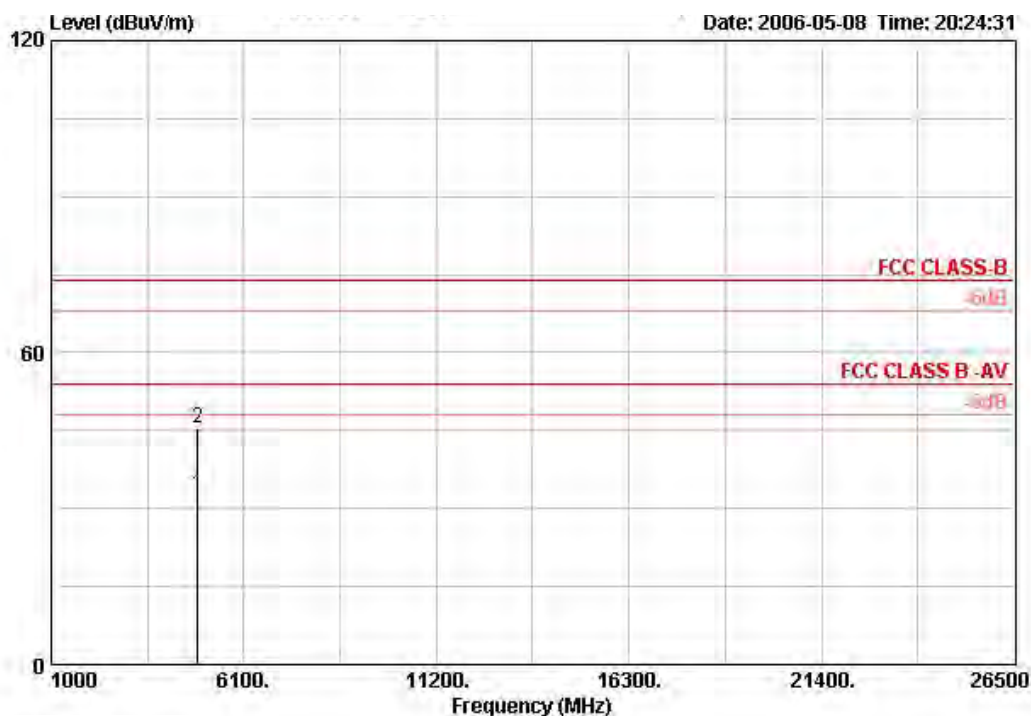

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	4873.484	32.85	-21.15	54.00	30.83	32.88	4.30	35.15	AVERAGE	HORIZONTAL	3
2	4873.964	45.37	-28.63	74.00	43.34	32.88	4.30	35.15	PEAK	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 1

Vertical

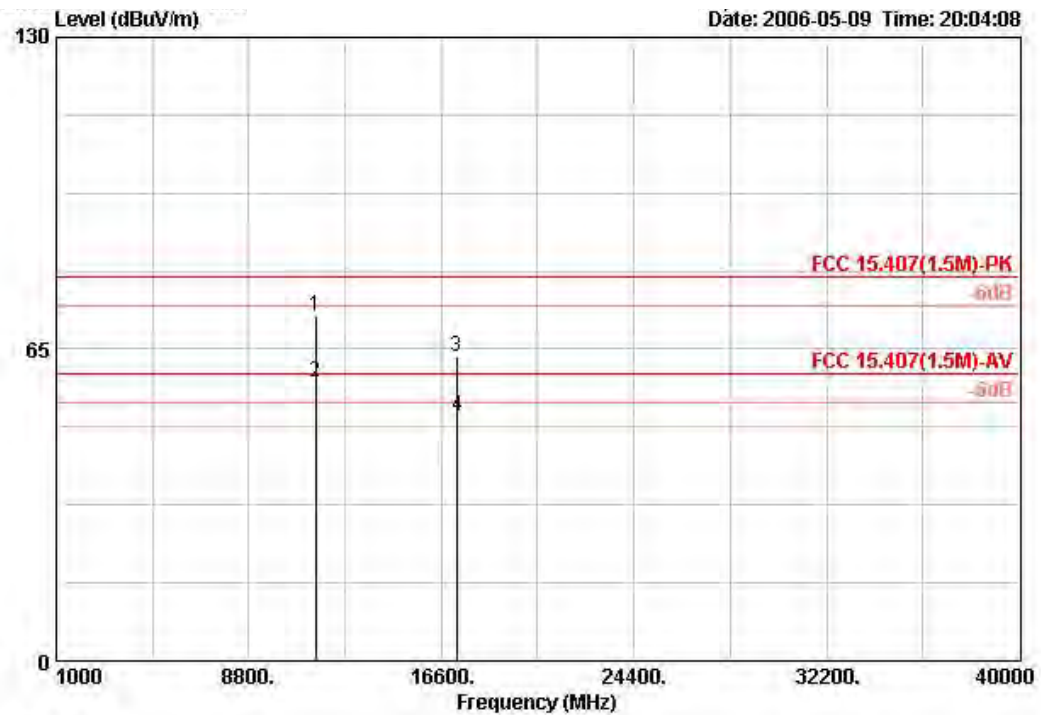

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11490.880	71.91	-8.09	80.00	60.54	38.69	7.66	34.98	PEAK	VERTICAL	3
2	11491.760	58.20	-1.80	60.00	46.84	38.69	7.65	34.98	AVERAGE	VERTICAL	3
3	17226.360	63.51	-16.49	80.00	47.17	42.38	8.87	34.91	PEAK	VERTICAL	3
4	17233.400	51.12	-8.88	60.00	34.70	42.47	8.87	34.92	AVERAGE	VERTICAL	3


Horizontal

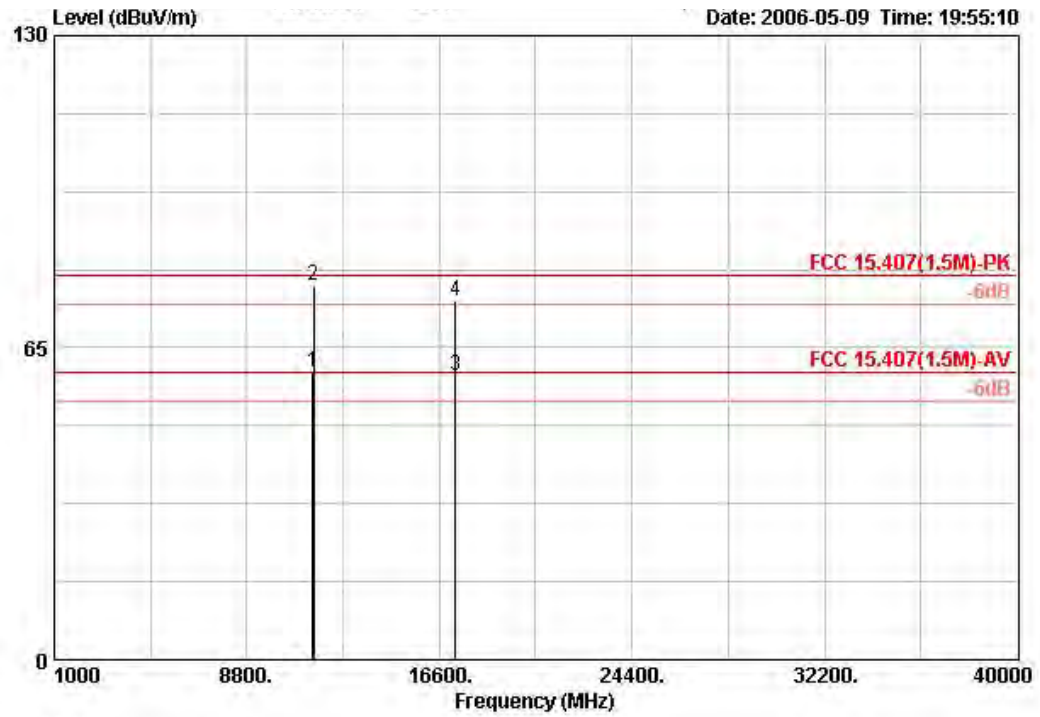

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	11489.400	59.77	-0.23	60.00	48.40	38.69	7.66	34.98	AVERAGE	HORIZONTAL	3
2 !	11491.000	78.04	-1.96	80.00	66.68	38.69	7.66	34.98	PEAK	HORIZONTAL	3
3 !	17233.400	59.25	-0.75	60.00	42.83	42.47	8.87	34.92	AVERAGE	HORIZONTAL	3
4 !	17233.400	74.62	-5.38	80.00	58.20	42.47	8.87	34.92	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 1

Vertical

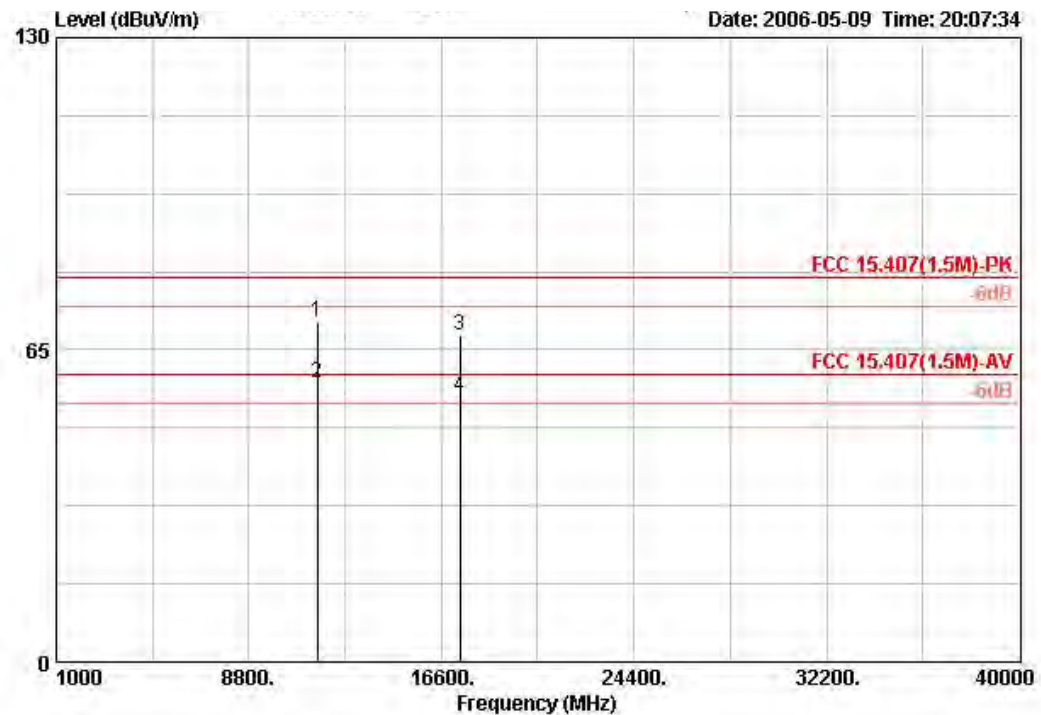

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1	11571.120	70.98	-9.02	80.00	59.50	38.81	7.67	35.00	PEAK	VERTICAL
2 !	11572.280	57.98	-2.02	60.00	46.51	38.81	7.67	35.00	AVERAGE	VERTICAL
3	17346.240	67.96	-12.04	80.00	51.00	43.05	8.86	34.96	PEAK	VERTICAL
4 !	17357.200	55.14	-4.86	60.00	38.19	43.05	8.86	34.96	AVERAGE	VERTICAL


Horizontal

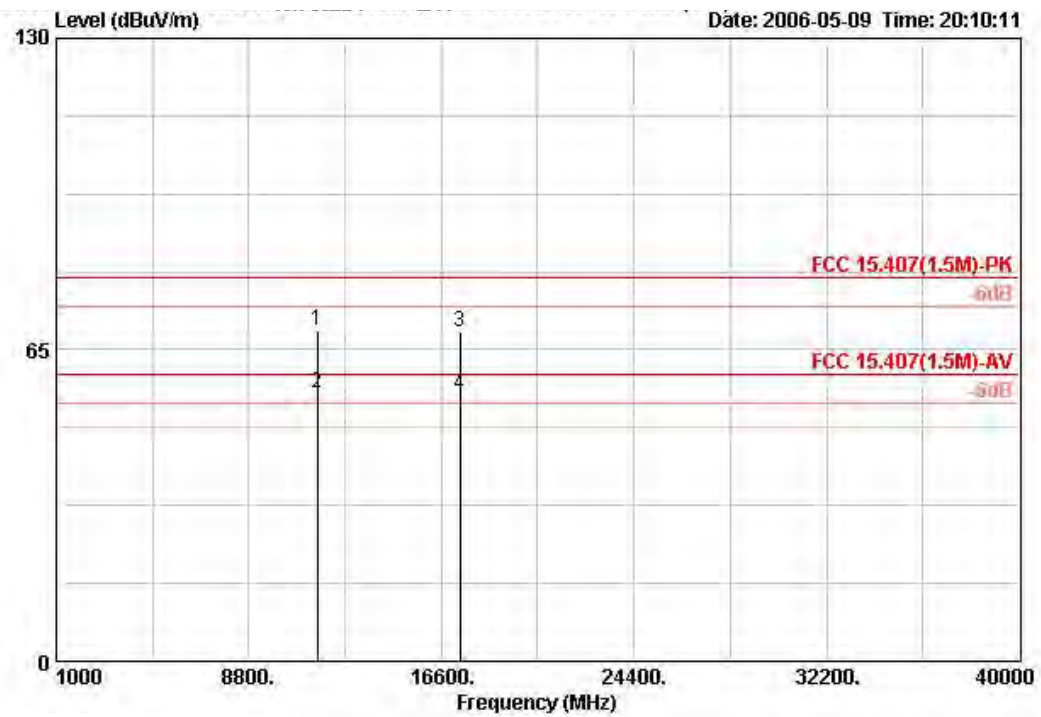

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBUV/m	dBuV	dB/m	dB	dB		Distance
										m
1	11568.520	68.94	-11.06	80.00	57.46	38.81	7.67	35.00	PEAK	HORIZONTAL
2 !	11569.680	55.89	-4.11	60.00	44.41	38.81	7.67	35.00	AVERAGE	HORIZONTAL
3	17356.600	68.58	-11.43	80.00	51.62	43.05	8.86	34.96	PEAK	HORIZONTAL
4 !	17357.160	55.64	-4.36	60.00	38.69	43.05	8.86	34.96	AVERAGE	HORIZONTAL


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 1

Vertical

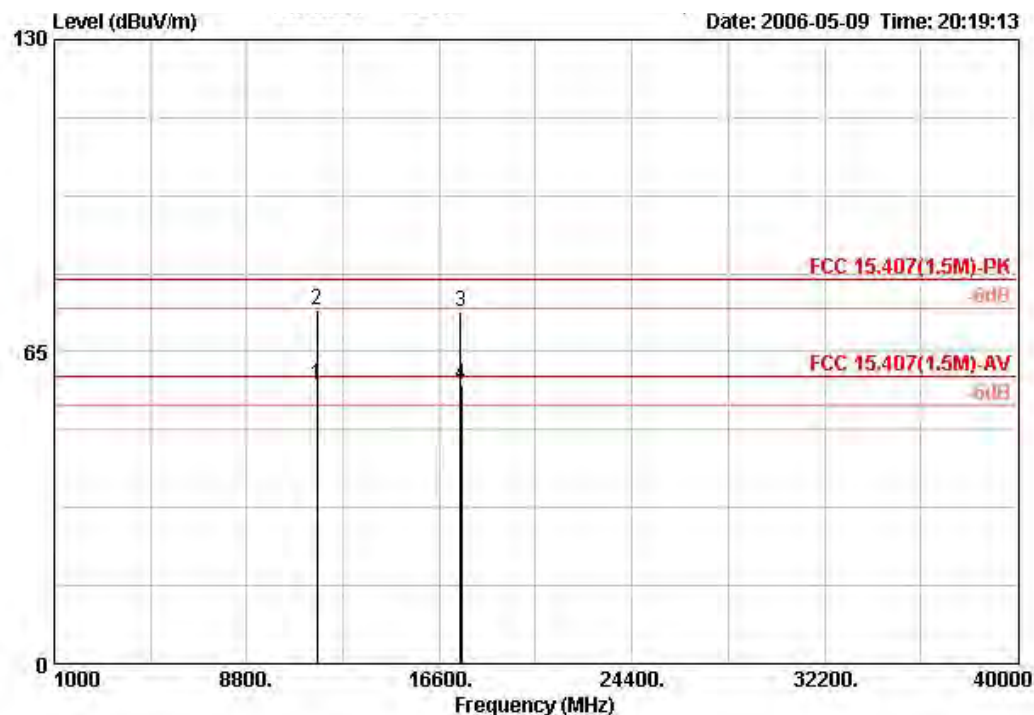

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBUV/m	dBUV	dB/m	dB	dB			m
1 !	11650.400	58.08	-1.92	60.00	46.48	38.92	7.69	35.01	AVERAGE	VERTICAL	3
2	11650.600	73.72	-6.28	80.00	62.10	38.95	7.69	35.01	PEAK	VERTICAL	3
3	17473.120	73.50	-6.50	80.00	56.01	43.63	8.85	35.00	PEAK	VERTICAL	3
4 !	17479.040	58.04	-1.96	60.00	40.56	43.63	8.85	35.00	AVERAGE	VERTICAL	3


Horizontal

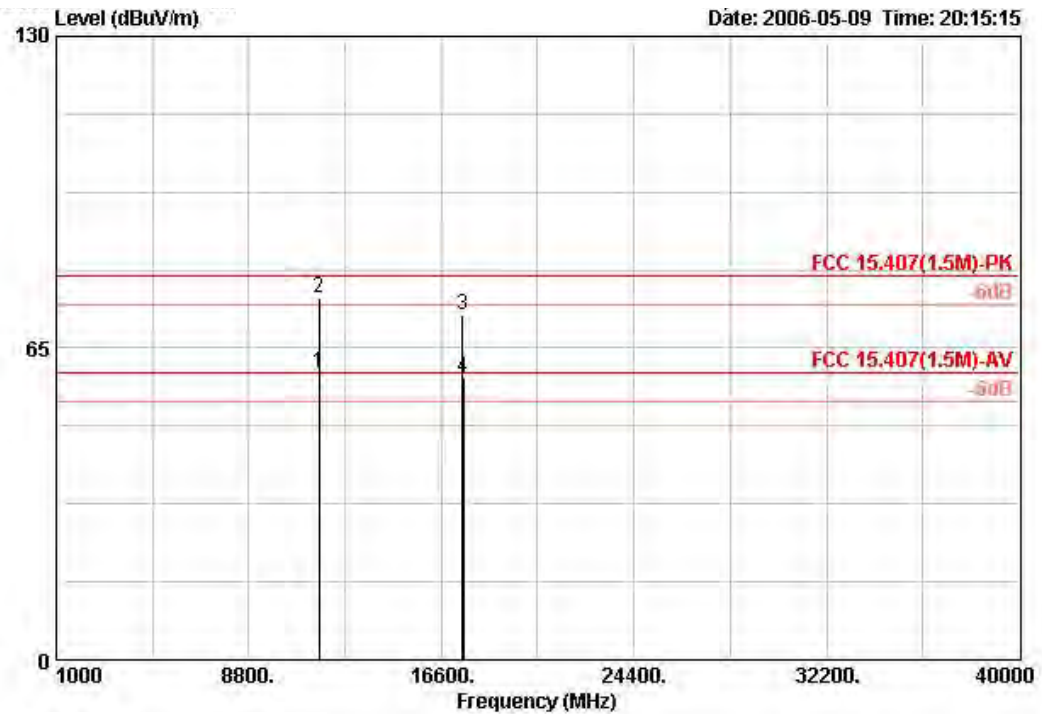

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBUV/m	dBuV	dB/m	dB	dB		m
1 !	11650.640	59.73	-0.27	60.00	48.11	38.95	7.69	35.01	AVERAGE	3
2 !	11655.400	75.56	-4.44	80.00	63.94	38.95	7.69	35.01	PEAK	3
3	17472.800	72.01	-7.99	80.00	54.53	43.63	8.85	35.00	PEAK	3
4 !	17476.640	58.63	-1.37	60.00	41.14	43.63	8.85	35.00	AVERAGE	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 1

Vertical

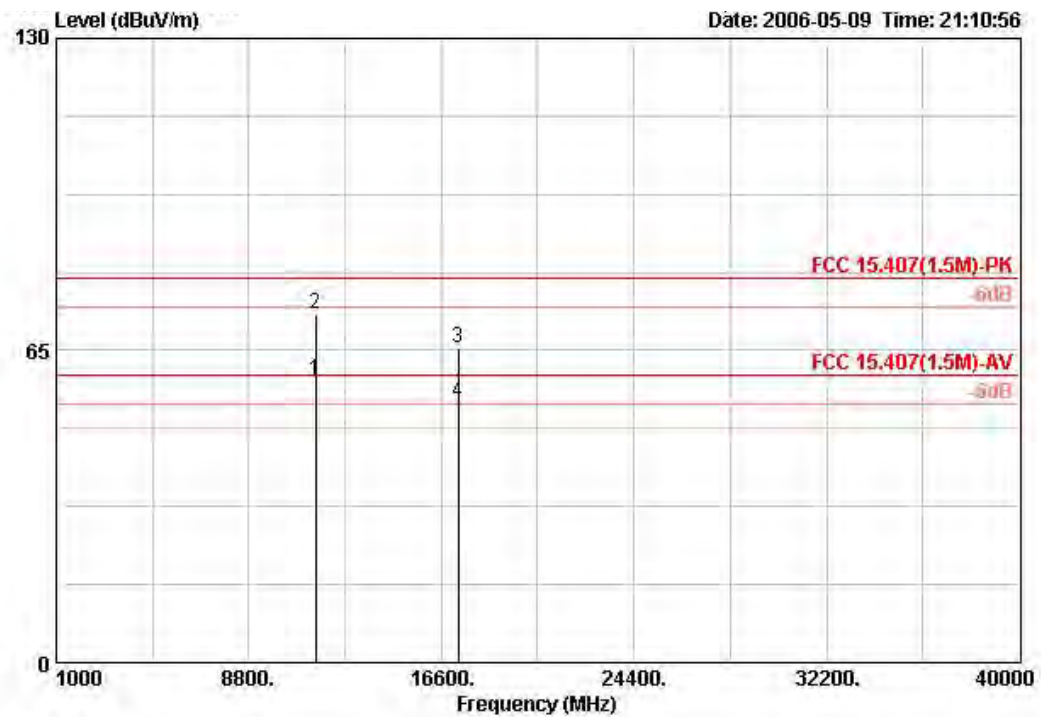

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBUV/m	dBuV	dB/m	dB	dB		m
1 !	11517.160	58.85	-1.15	60.00	47.46	38.73	7.65	35.00	AVERAGE	3
2	11518.400	72.62	-7.38	80.00	61.23	38.73	7.65	35.00	PEAK	3
3	17281.400	65.63	-14.37	80.00	48.98	42.72	8.87	34.93	PEAK	3
4 !	17282.040	54.37	-5.63	60.00	37.72	42.72	8.87	34.94	AVERAGE	3


Horizontal

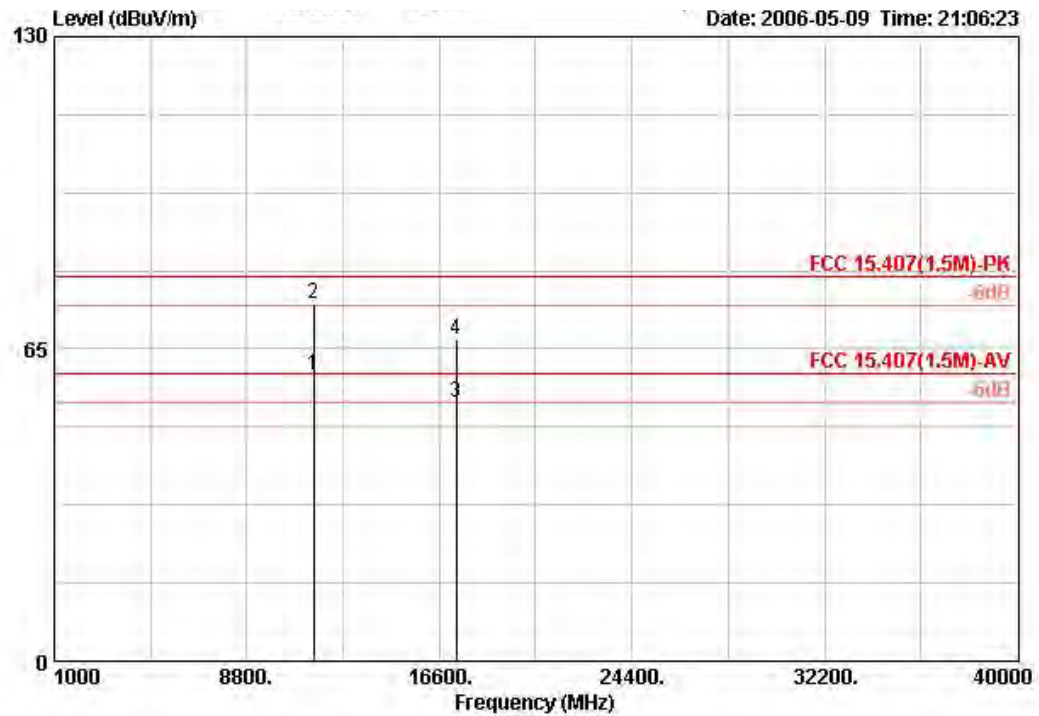

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1 !	11519.600	59.44	-0.56	60.00	48.06	38.73	7.65	35.00	AVERAGE	HORIZONTAL
2 !	11520.800	74.33	-5.67	80.00	62.95	38.73	7.65	35.00	PEAK	HORIZONTAL
3	17282.040	53.98	-6.02	60.00	37.34	42.72	8.87	34.94	AVERAGE	HORIZONTAL
4	17282.480	66.92	-13.08	80.00	50.27	42.72	8.87	34.94	PEAK	HORIZONTAL


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 1

Vertical

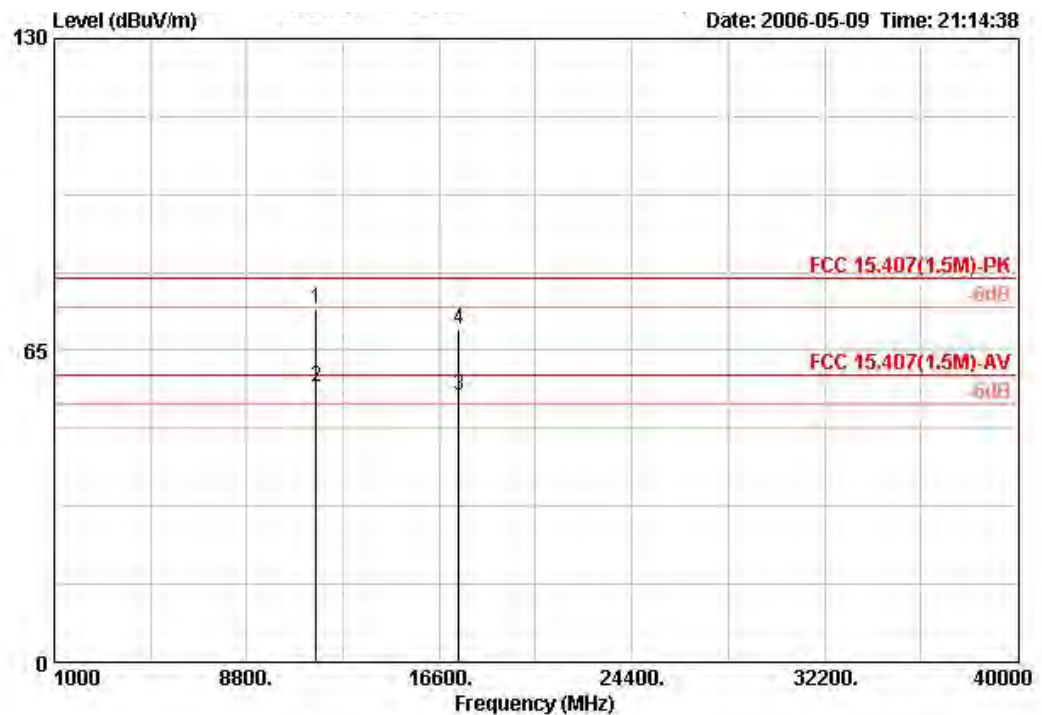

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	m
			dB	dBUV/m	dBuV	dB/m	dB	dB		
1	11600.680	73.66	-6.34	80.00	62.13	38.87	7.67	35.01	PERK	3
2 !	11600.680	57.44	-2.56	60.00	45.91	38.87	7.67	35.01	AVERAGE	3
3 !	17396.320	55.63	-4.37	60.00	38.53	43.22	8.86	34.97	AVERAGE	3
4	17396.320	69.27	-10.73	80.00	52.17	43.22	8.86	34.97	PEAK	3

Horizontal

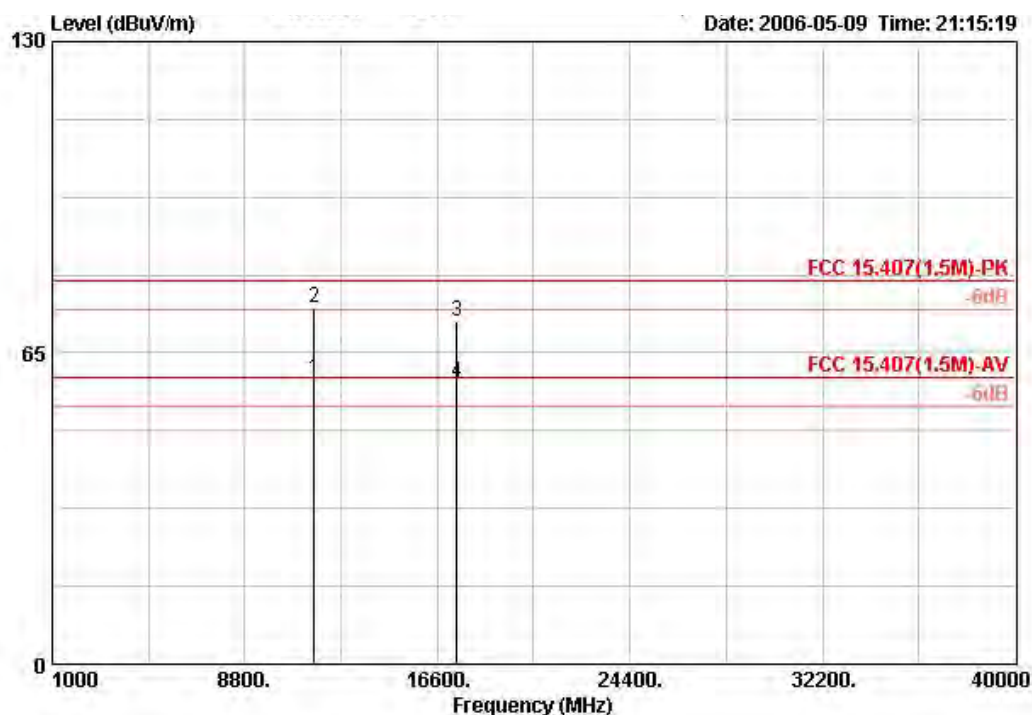

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBUV/m	dBuV	dB/m	dB	dB			m
1 !	11600.100	59.40	-0.60	60.00	47.88	38.87	7.67	35.01	AVERAGE	HORIZONTAL	3
2 !	11600.100	74.29	-5.71	80.00	62.76	38.87	7.67	35.01	PEAK	HORIZONTAL	3
3	17402.500	71.65	-8.35	80.00	54.46	43.30	8.86	34.97	PEAK	HORIZONTAL	3
4 !	17402.500	58.65	-1.35	60.00	41.46	43.30	8.86	34.97	AVERAGE	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 1 / Ant. 2

Vertical

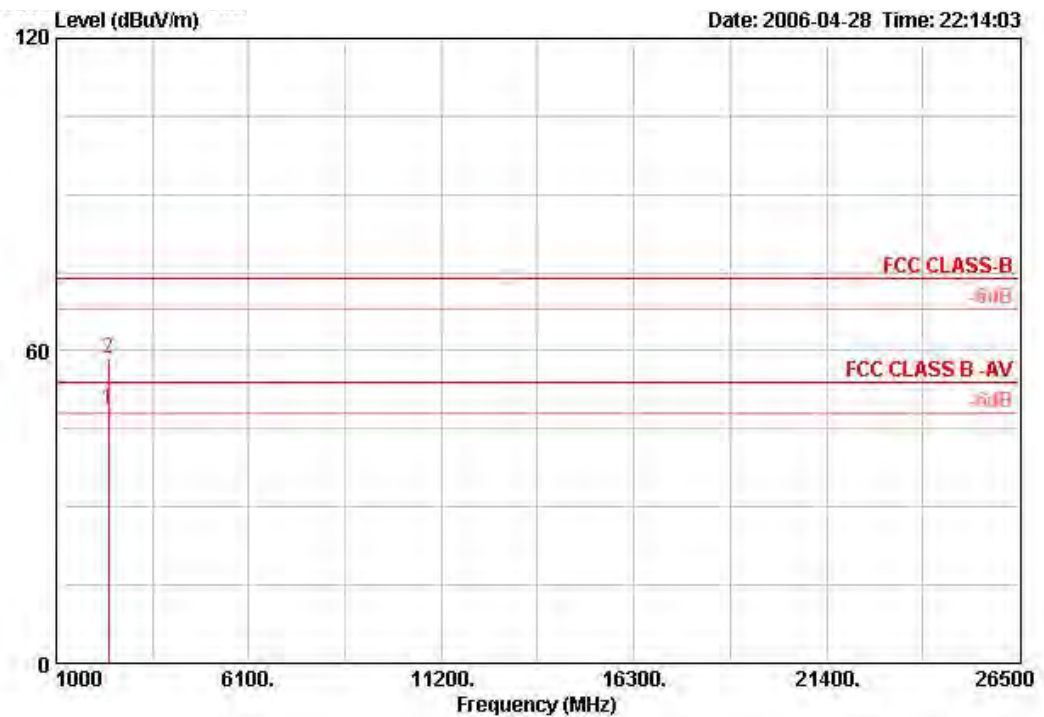

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1 !	2374.700	48.60	-5.40	54.00	52.08	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2374.700	58.53	-15.47	74.00	62.01	28.86	2.76	35.10	PEAK	VERTICAL	3


Horizontal

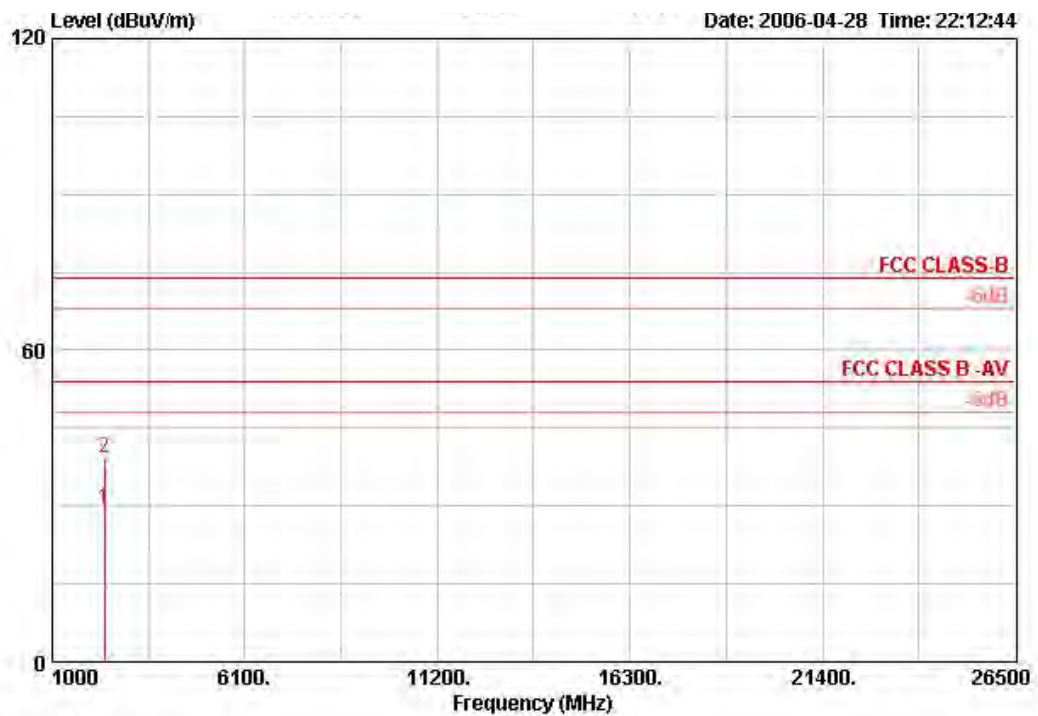

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB			m
1	2373.900	29.47	-24.53	54.00	32.95	28.86	2.76	35.10	AVERAGE	HORIZONTAL	3
2	2373.900	39.36	-34.64	74.00	42.84	28.86	2.76	35.10	PERK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 6 / Ant. 2

Vertical

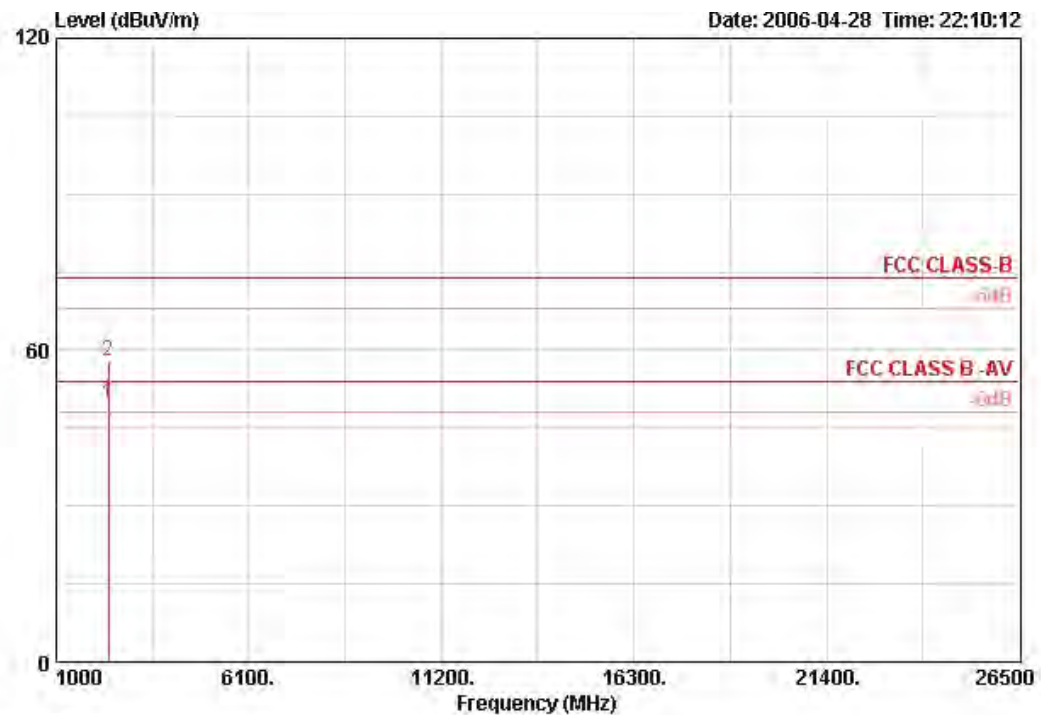

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	2375.800	49.54	-4.46	54.00	53.02	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2375.800	58.01	-15.99	74.00	61.49	28.86	2.76	35.10	PEAK	VERTICAL	3


Horizontal

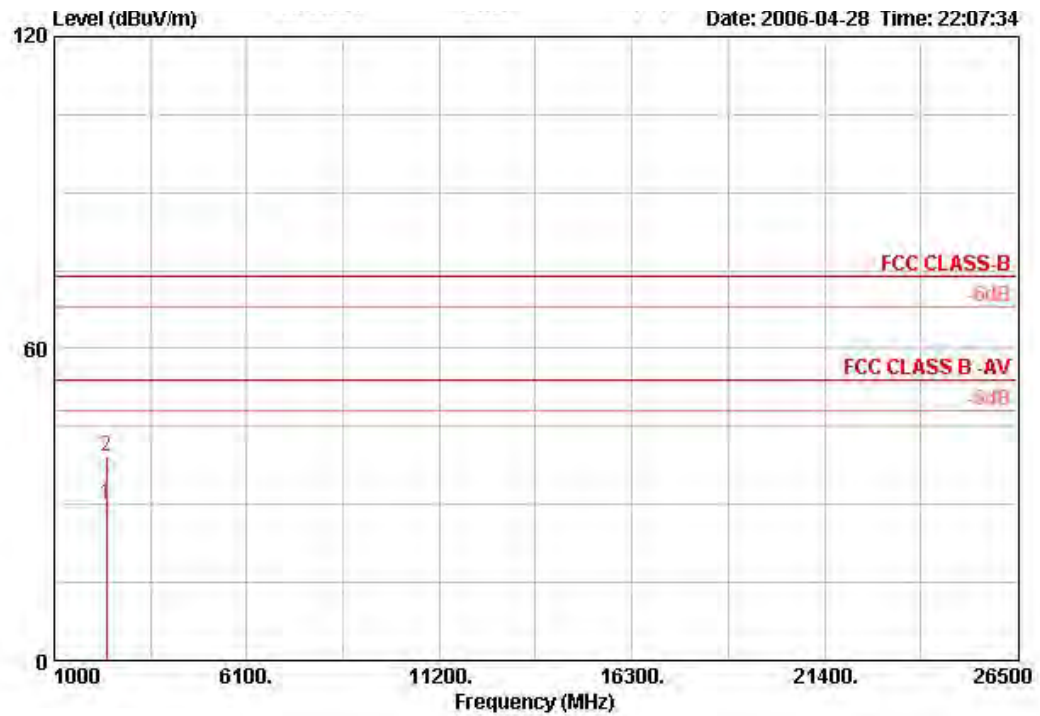

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark		m
1	2372.000	30.03	-23.97	54.00	33.51	28.86	2.76	35.10 AVERAGE	HORIZONTAL	3
2	2372.000	39.13	-34.87	74.00	42.61	28.86	2.76	35.10 PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11b Channel 11 / Ant. 2

Vertical

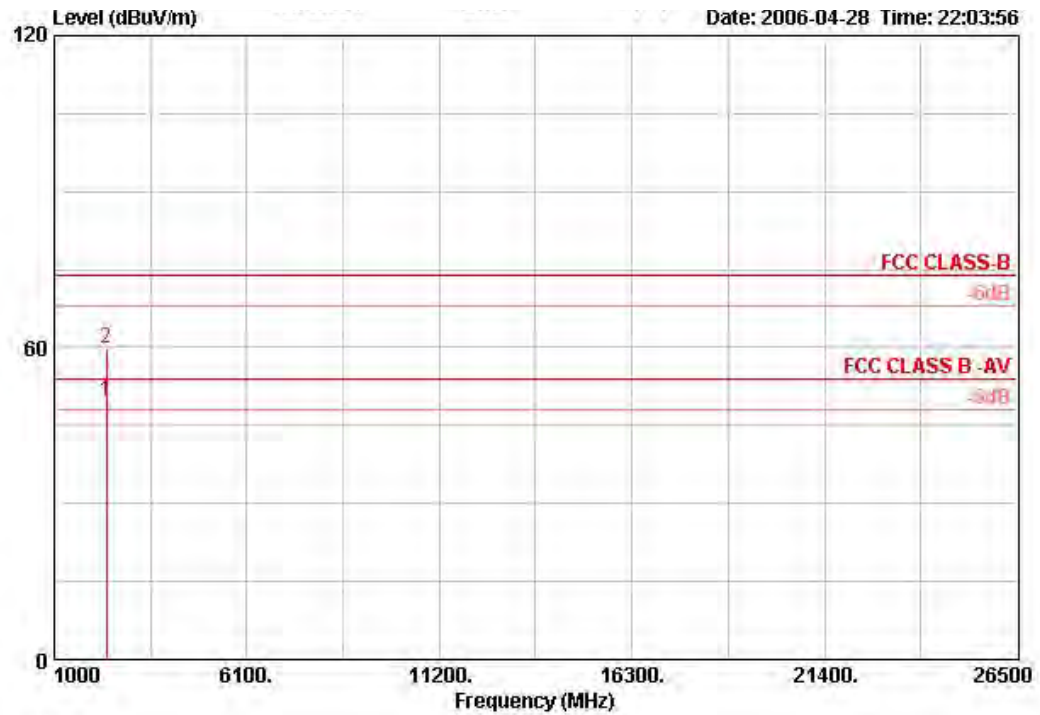

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Pol/Phase	Distance
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor			m
1 !	2376.000	49.77	-4.23	54.00	53.25	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2376.000	59.97	-14.03	74.00	63.45	28.86	2.76	35.10	PEAK	VERTICAL	3


Horizontal

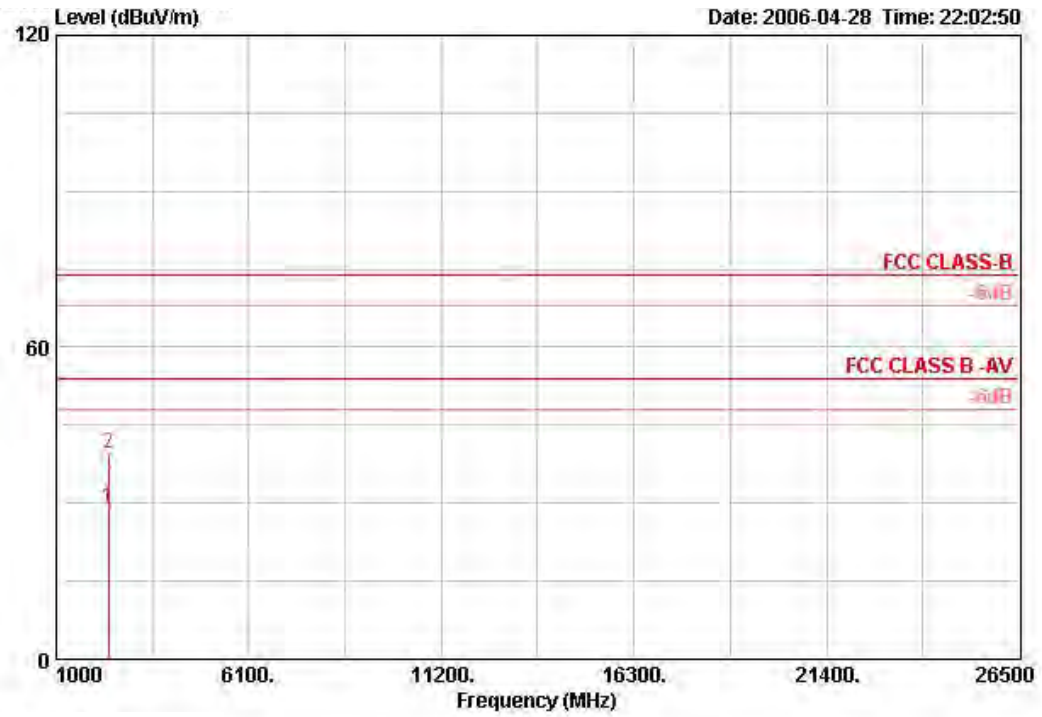

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1	2378.000	29.15	-24.85	54.00	32.63	28.86	2.76	35.10	AVERAGE	HORIZONTAL
2	2378.000	39.49	-34.51	74.00	42.97	28.86	2.76	35.10	PEAK	HORIZONTAL


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 1 / Ant. 2

Vertical

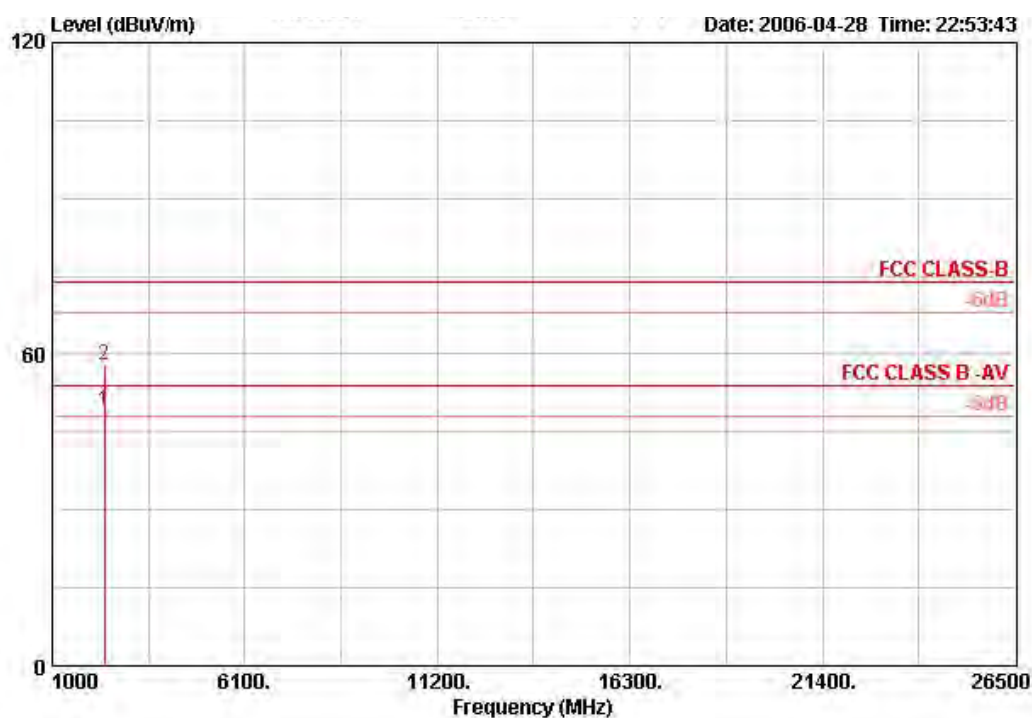

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	2376.520	49.13	-4.87	54.00	52.61	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2376.520	57.89	-16.11	74.00	61.37	28.86	2.76	35.10	PEAK	VERTICAL	3


Horizontal

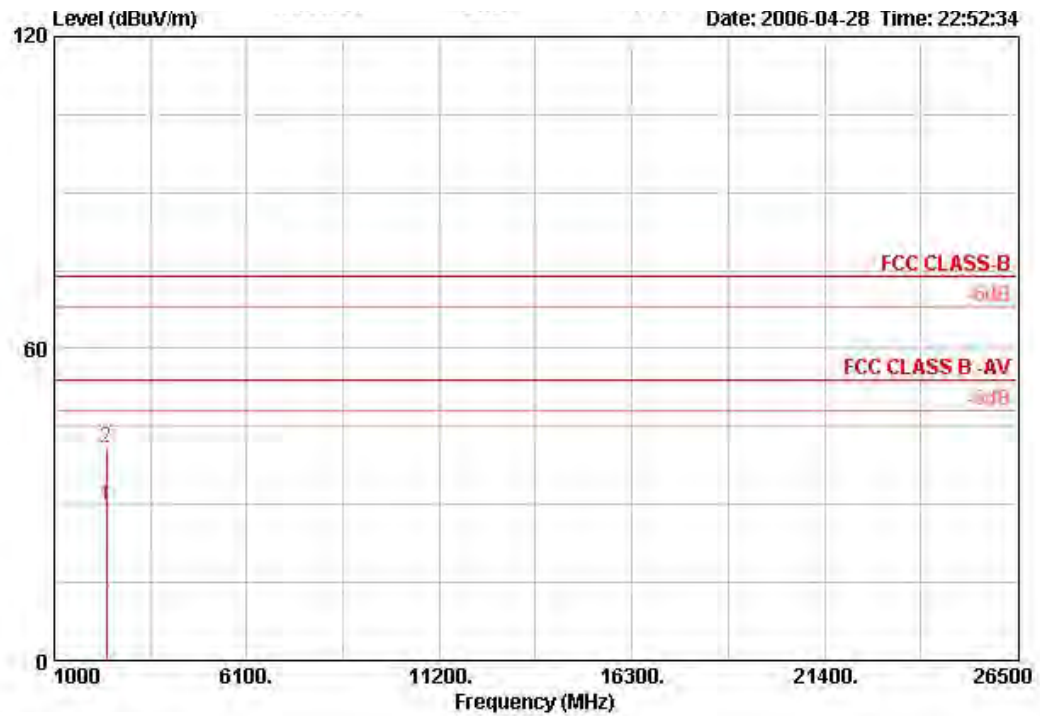

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase
			dB	dBuV/m	dBuV	dB/m	dB	dB		Distance
										m
1	2372.000	29.89	-24.11	54.00	33.37	28.86	2.76	35.10	AVERAGE	HORIZONTAL
2	2372.000	40.87	-33.13	74.00	44.35	28.86	2.76	35.10	PERK	HORIZONTAL


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 6 / Ant. 2

Vertical

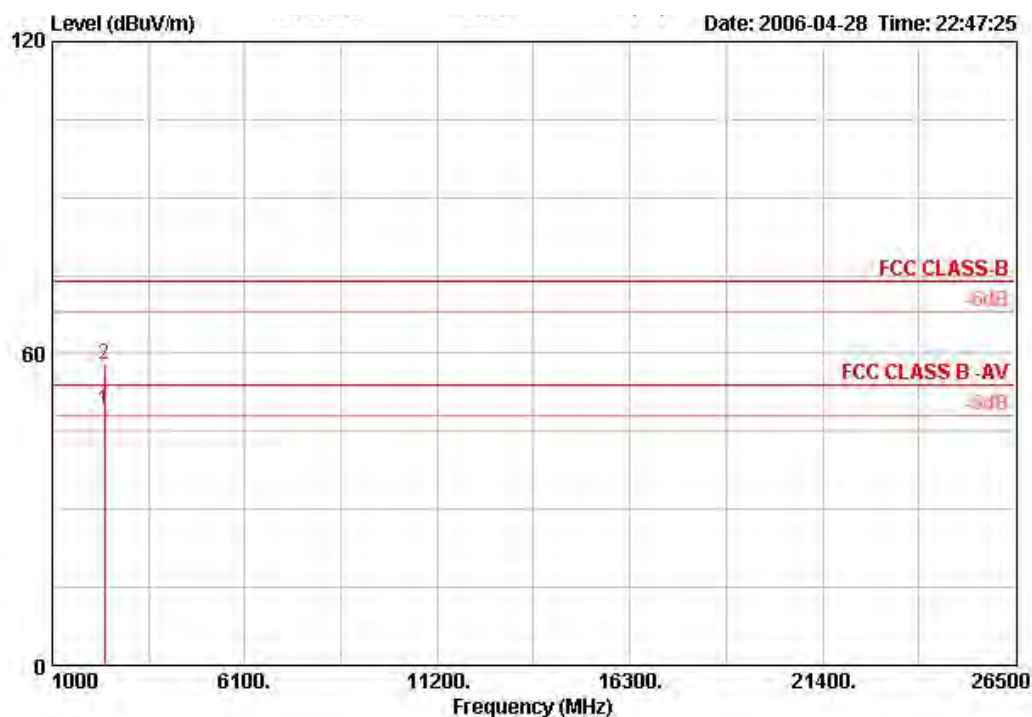

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	m
			dB	dBuV/m	dBuV	dB/m	dB	dB		
1 !	2374.000	48.95	-5.05	54.00	52.43	28.86	2.76	35.10	AVERAGE	3
2	2374.000	57.77	-16.23	74.00	61.25	28.86	2.76	35.10	PEAK	3


Horizontal

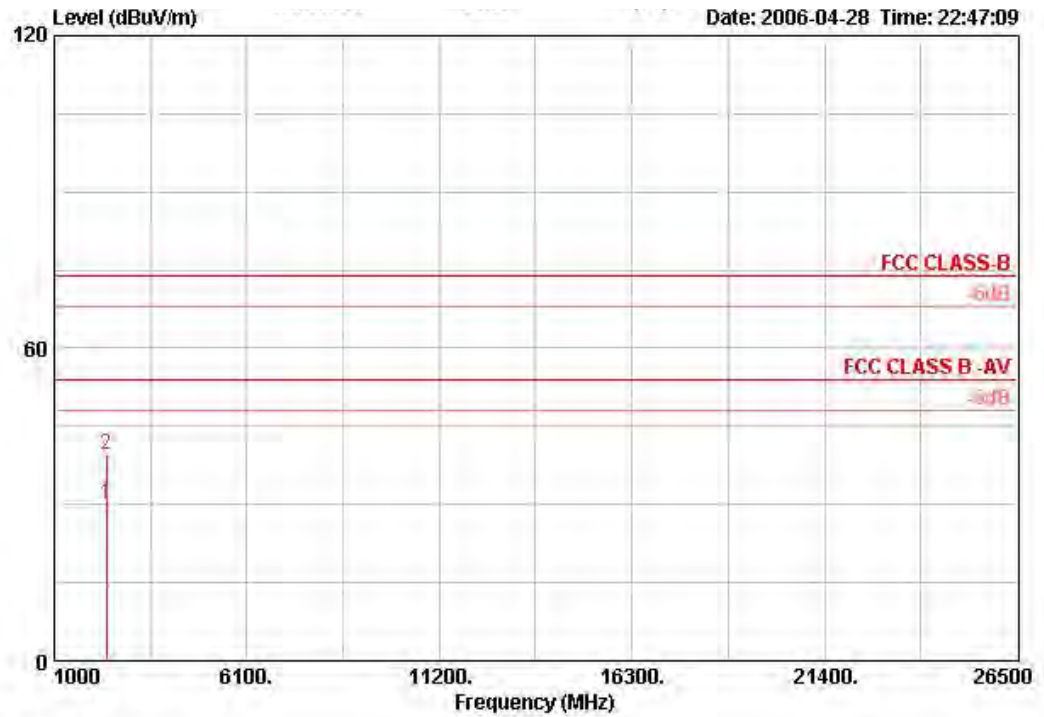

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	2376.500	29.95	-24.05	54.00	33.43	28.86	2.76	35.10	AVERAGE	3
2	2376.500	39.58	-34.42	74.00	43.06	28.86	2.76	35.10	PEAK	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Channel 11 / Ant. 2

Vertical

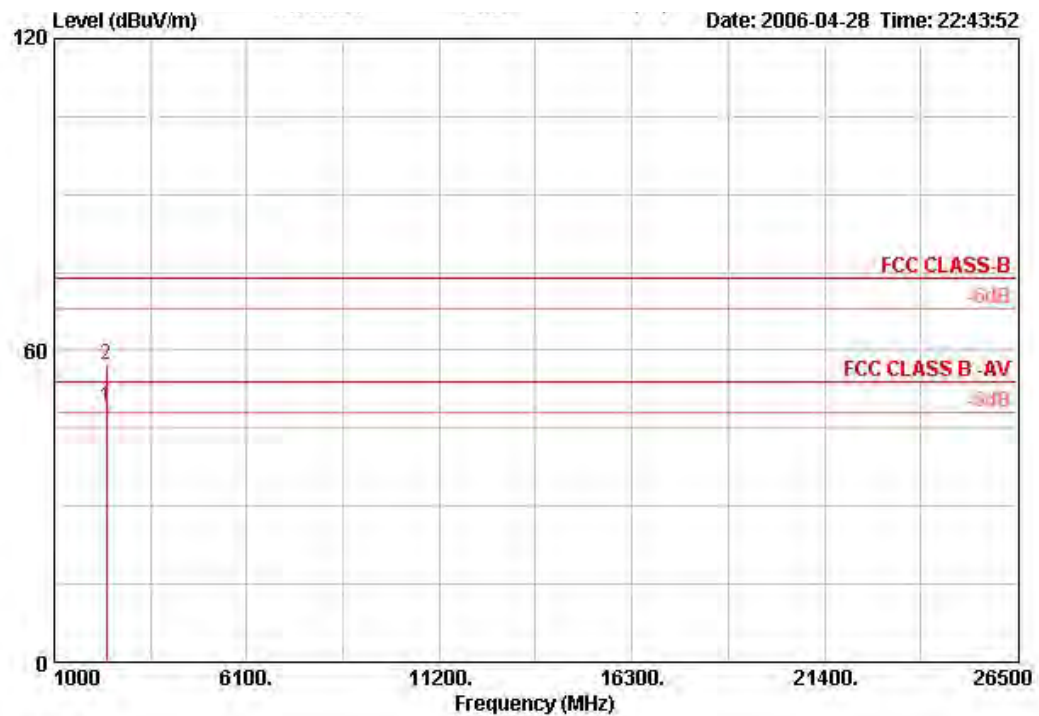

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 !	2372.000	49.02	-4.98	54.00	52.50	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2372.000	57.24	-16.76	74.00	60.72	28.86	2.76	35.10	PEAK	VERTICAL	3


Horizontal

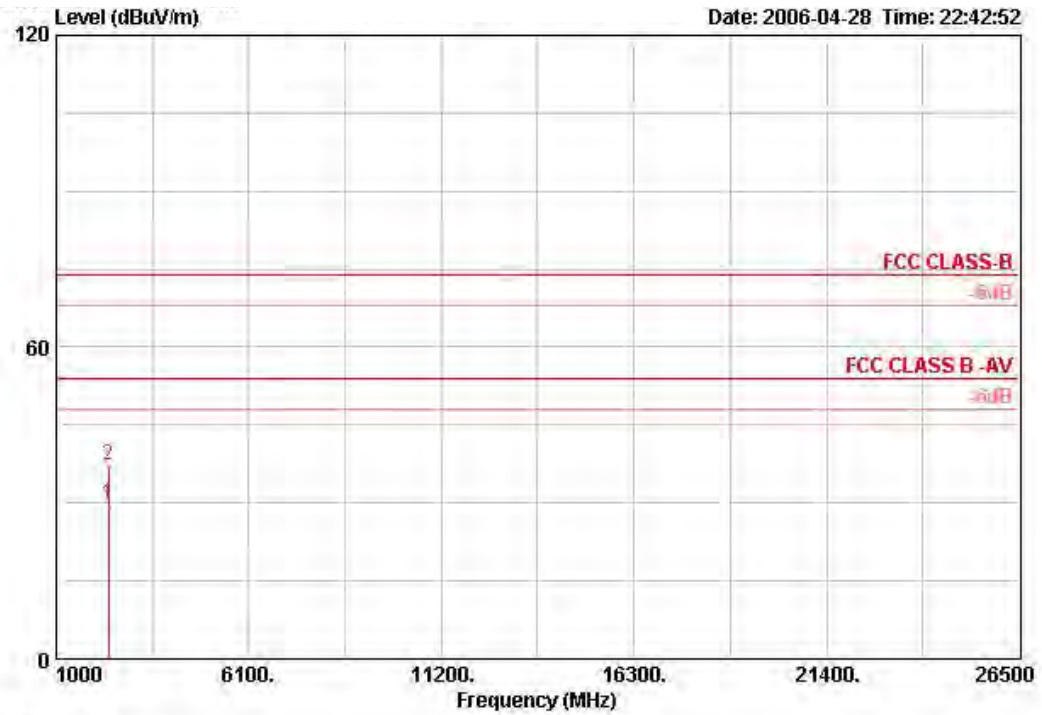

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	2375.960	29.73	-24.27	54.00	33.21	28.86	2.76	35.10	AVERAGE	HORIZONTAL	3
2	2375.960	37.12	-36.88	74.00	40.60	28.86	2.76	35.10	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11g Turbo Channel 6 / Ant. 2

Vertical

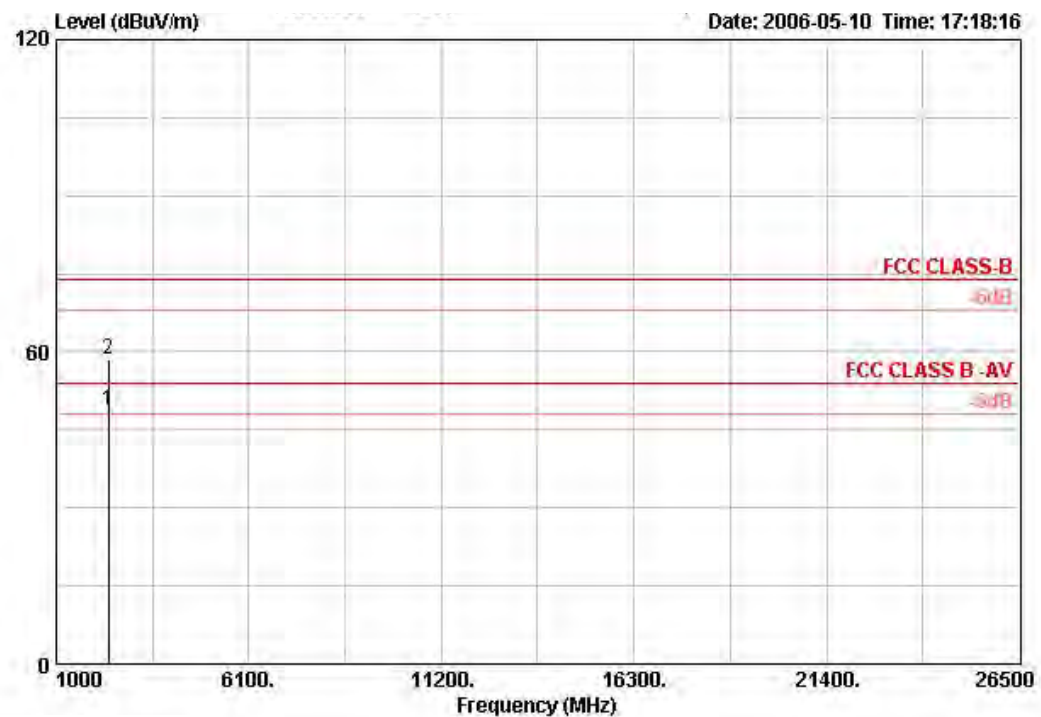

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	2372.200	48.81	-5.19	54.00	52.29	28.86	2.76	35.10	AVERAGE	VERTICAL	3
2	2372.200	58.63	-15.37	74.00	62.11	28.86	2.76	35.10	PEAK	VERTICAL	3

Horizontal

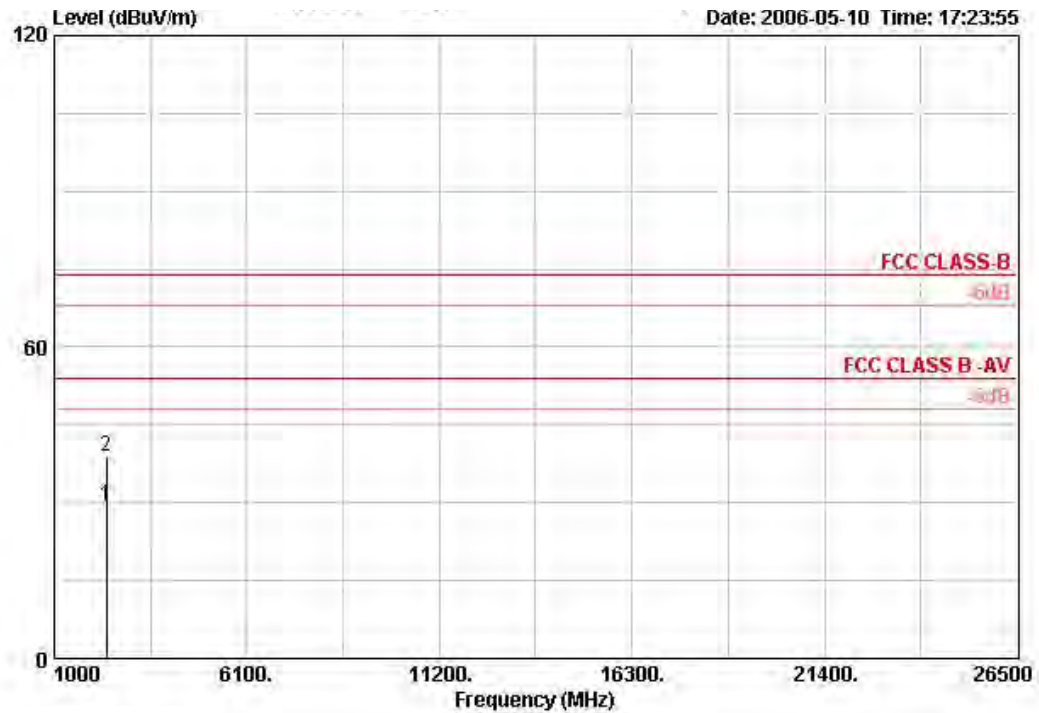

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	2375.400	29.39	-24.61	54.00	32.87	28.86	2.76	35.10	AVERAGE	HORIZONTAL	3
2	2375.400	38.93	-35.07	74.00	42.41	28.86	2.76	35.10	PEAK	HORIZONTAL	3

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 149 / Ant. 2

Vertical

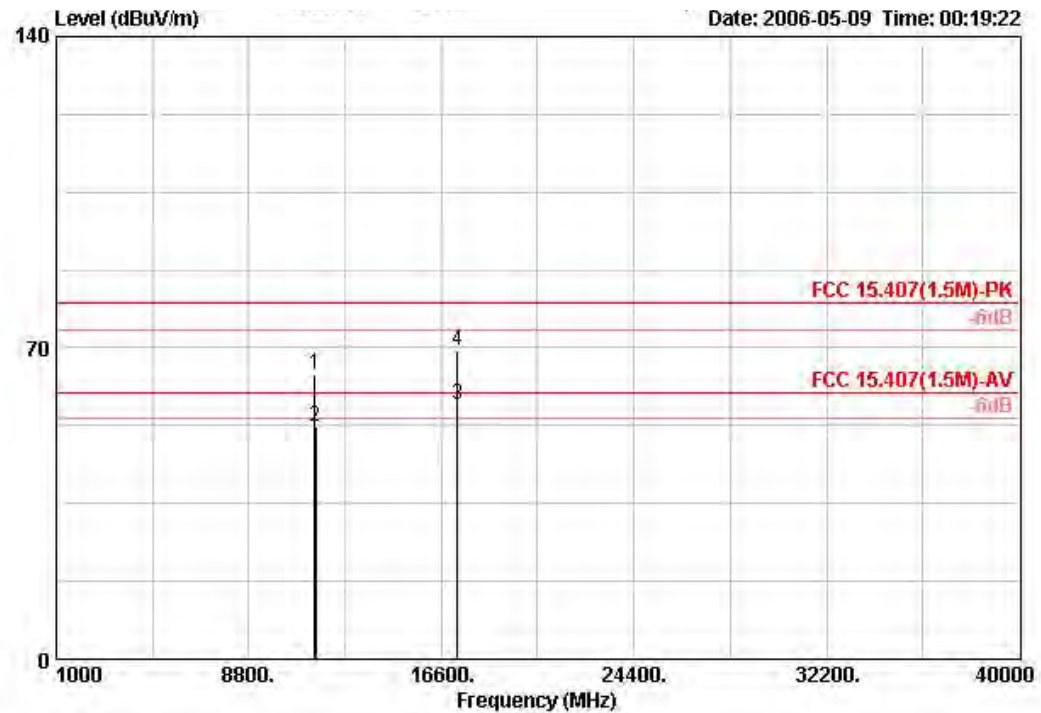

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark		m
1	11489.400	64.13	-15.87	80.00	52.77	38.69	7.66	34.98	PEAK	VERTICAL	3
2	11492.400	52.40	-7.60	60.00	41.04	38.69	7.65	34.98	AVERAGE	VERTICAL	3
3	17240.900	57.04	-2.96	60.00	40.62	42.47	8.87	34.92	AVERAGE	VERTICAL	3
4	17245.700	69.39	-10.61	80.00	52.89	42.55	8.87	34.92	PEAK	VERTICAL	3


Horizontal

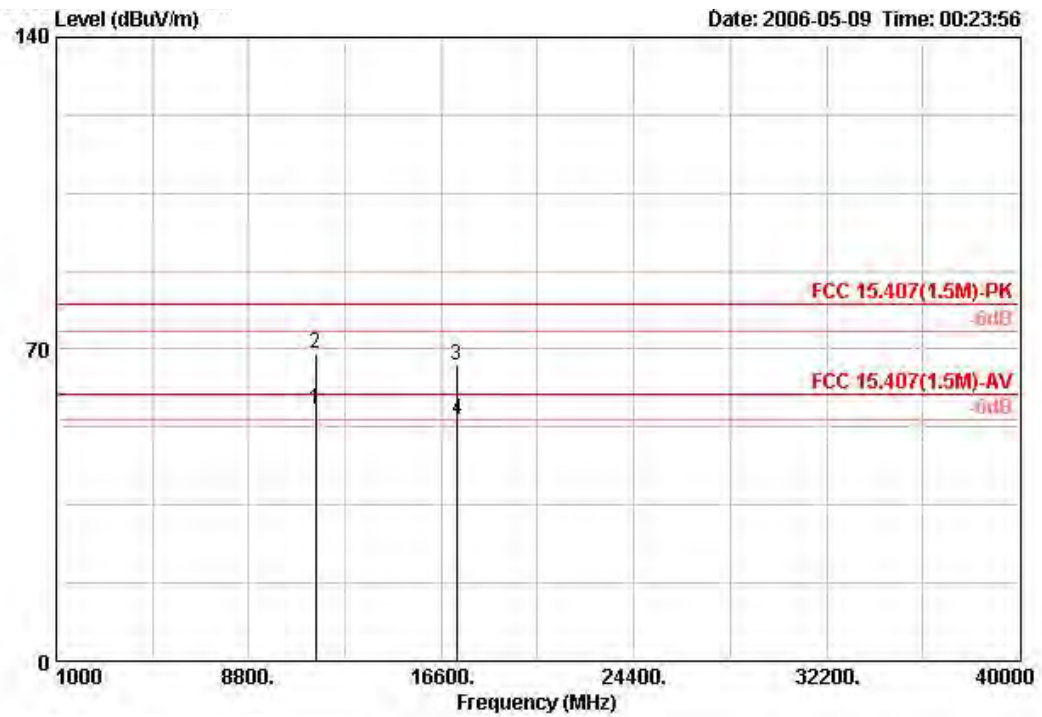

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pol/Phase	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11489.800	56.50	-3.50	60.00	45.14	38.69	7.66	34.98	AVERAGE	HORIZONTAL	3
2	11491.600	69.13	-10.87	80.00	57.77	38.69	7.65	34.98	PEAK	HORIZONTAL	3
3	17231.300	66.35	-13.65	80.00	49.93	42.47	8.87	34.92	PEAK	HORIZONTAL	3
4	17239.900	53.99	-6.01	60.00	37.57	42.47	8.87	34.92	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 157 / Ant. 2

Vertical

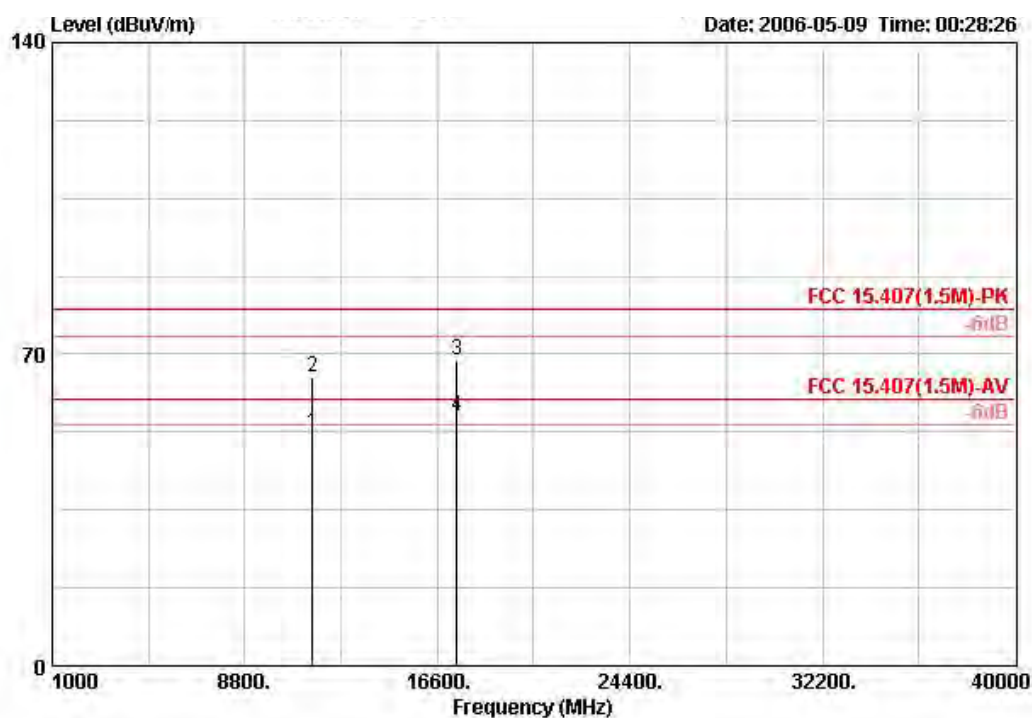

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	m
1	11547.500	52.33	-7.67	60.00	40.92	38.76	7.66	35.00 AVERAGE	VERTICAL 3
2	11547.500	65.00	-15.00	80.00	53.58	38.76	7.66	35.00 PEAK	VERTICAL 3
3	17377.600	68.48	-11.52	80.00	51.45	43.13	8.86	34.97 PEAK	VERTICAL 3
4	17377.600	56.01	-3.99	60.00	38.98	43.13	8.86	34.97 AVERAGE	VERTICAL 3


Horizontal

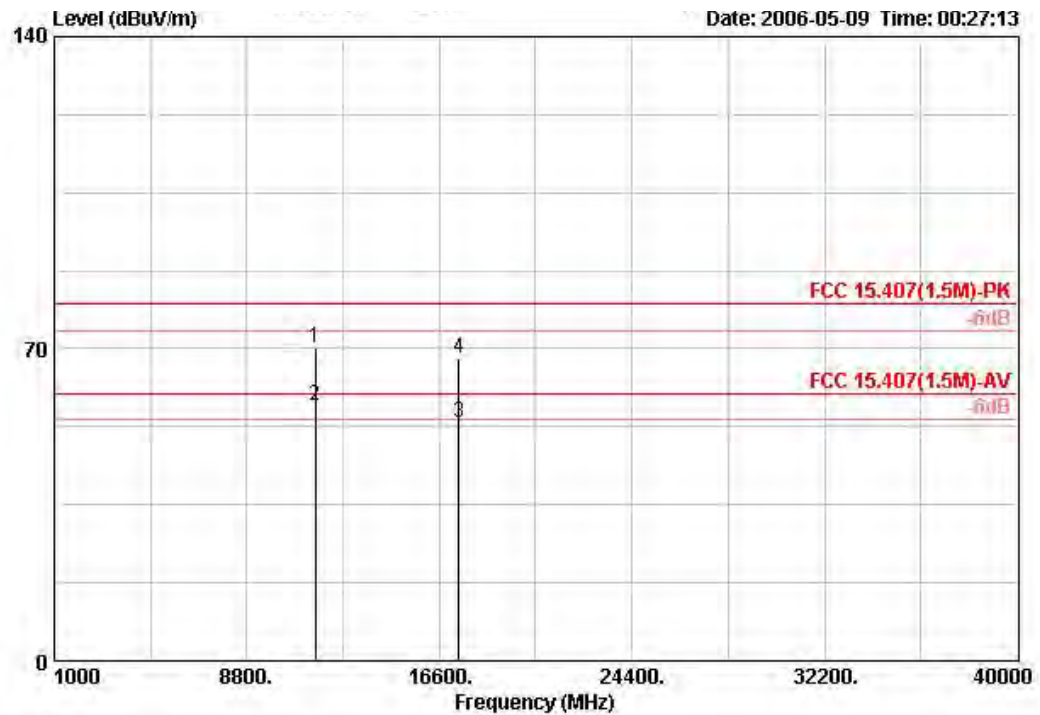

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB		m
1	11582.200	70.10	-9.90	80.00	58.62	38.81	7.67	35.00	PEAK	3
2	11582.200	57.27	-2.73	60.00	45.79	38.81	7.67	35.00	AVERAGE	3
3	17377.600	53.48	-6.52	60.00	36.45	43.13	8.86	34.97	AVERAGE	3
4	17377.600	67.87	-12.13	80.00	50.84	43.13	8.86	34.97	PEAK	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Channel 165 / Ant. 2

Vertical

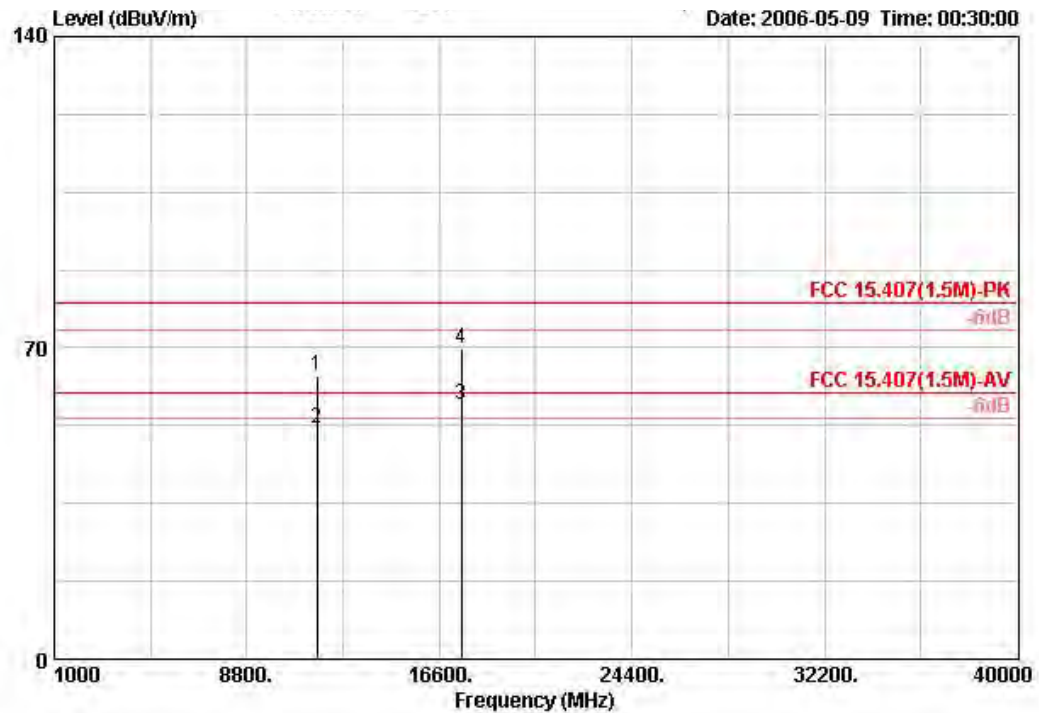

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark		m
1	11651.700	63.68	-16.32	80.00	52.06	38.95	7.69	35.01	PEAK	VERTICAL	3
2	11651.700	51.89	-8.11	60.00	40.27	38.95	7.69	35.01	AVERAGE	VERTICAL	3
3	17476.100	57.08	-2.92	60.00	39.59	43.63	8.85	35.00	AVERAGE	VERTICAL	3
4	17476.100	69.68	-10.32	80.00	52.20	43.63	8.85	35.00	PEAK	VERTICAL	3


Horizontal

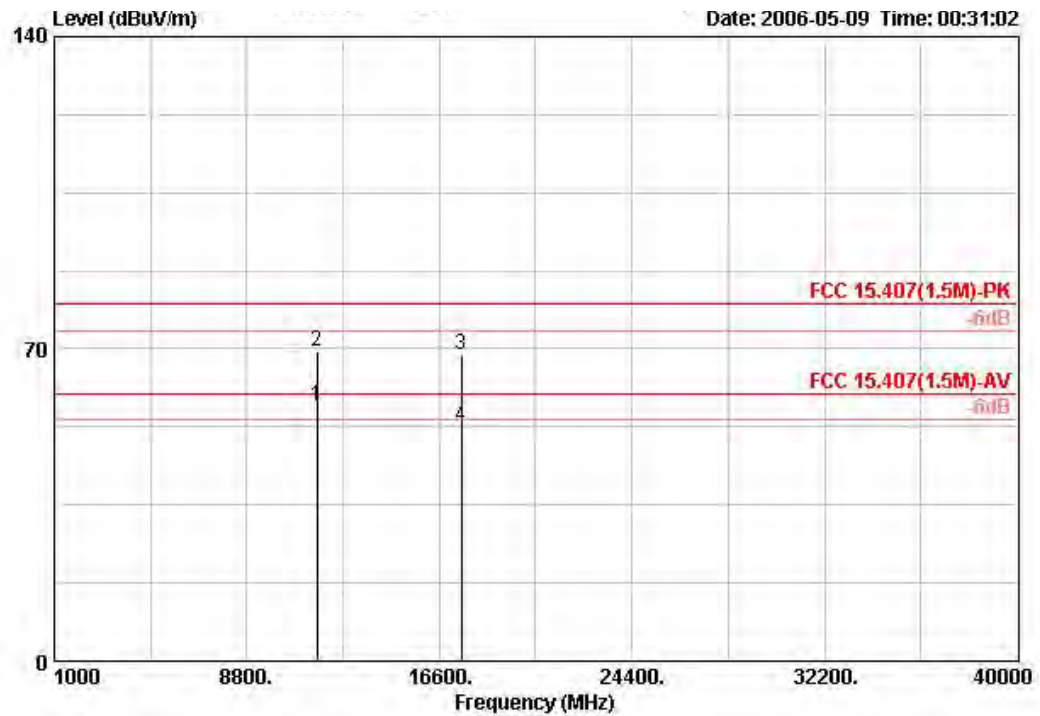

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1 @	11652.000	57.12	-2.88	60.00	45.50	38.95	7.69	35.01	AVERAGE	HORIZONTAL	3
2	11652.000	69.54	-10.46	80.00	57.92	38.95	7.69	35.01	PEAK	HORIZONTAL	3
3	17476.100	68.81	-11.19	80.00	51.33	43.63	8.85	35.00	PEAK	HORIZONTAL	3
4	17476.100	52.63	-7.37	60.00	35.15	43.63	8.85	35.00	AVERAGE	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 152 / Ant. 2

Vertical

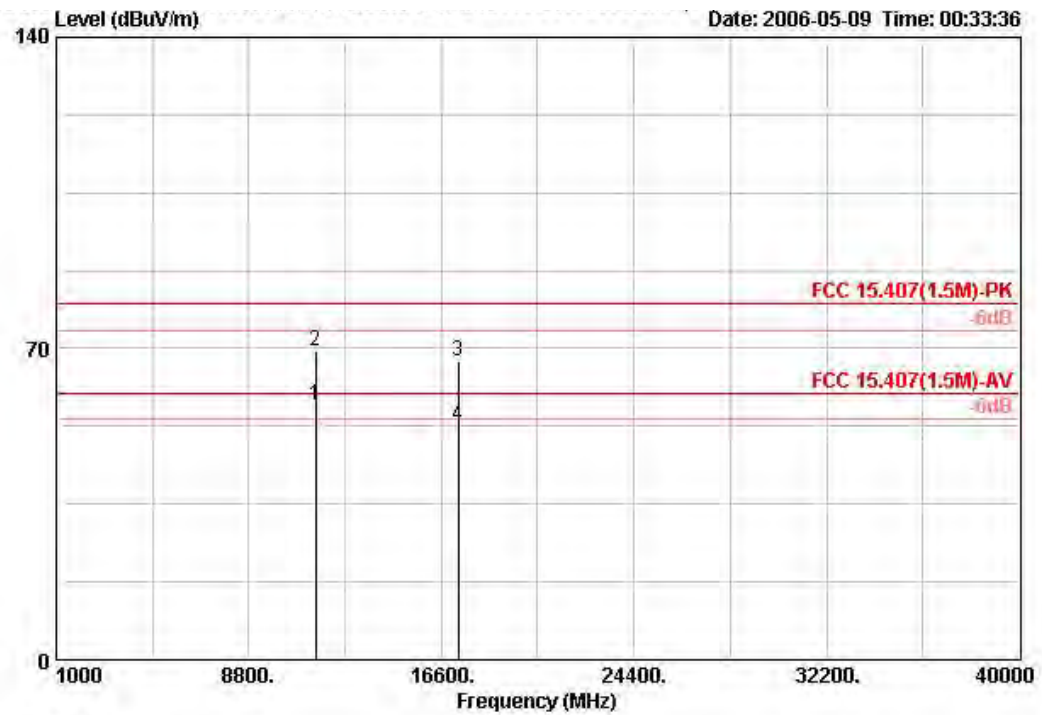

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Distance
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			m
1	11516.280	57.36	-2.64	60.00	45.97	38.73	7.65	35.00	AVERAGE	VERTICAL	3
2	11516.280	69.61	-10.39	80.00	58.23	38.73	7.65	35.00	PEAK	VERTICAL	3
3	17277.940	67.20	-12.80	80.00	50.54	42.72	8.87	34.93	PEAK	VERTICAL	3
4	17277.940	52.83	-7.17	60.00	36.18	42.72	8.87	34.93	AVERAGE	VERTICAL	3


Horizontal

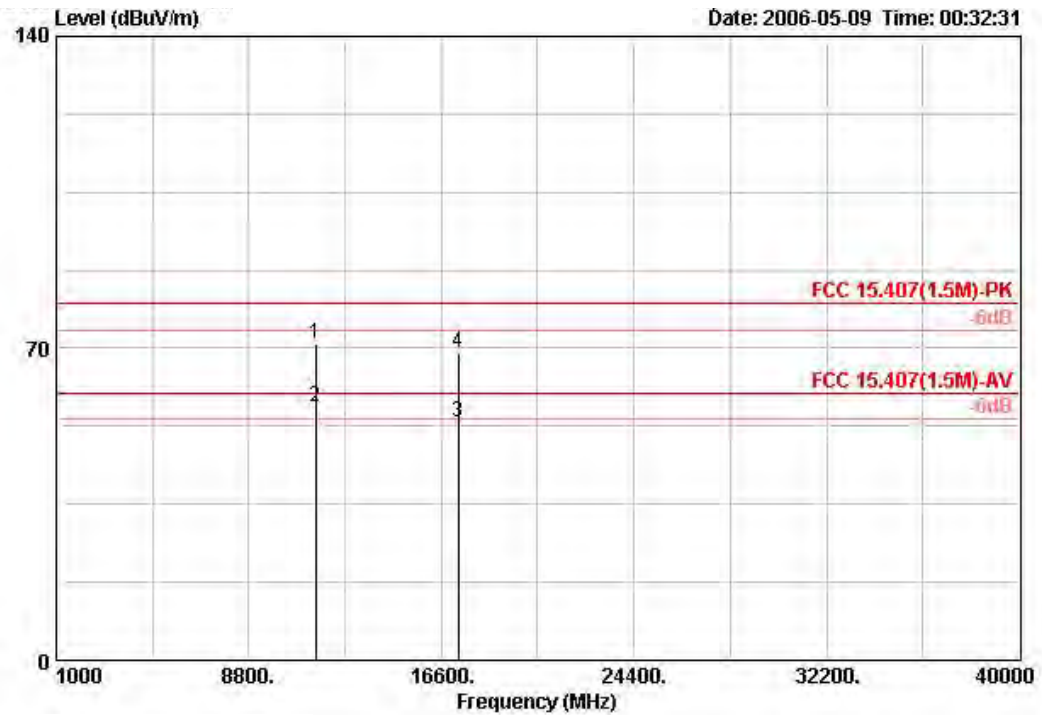

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark		m
1	11519.700	70.95	-9.05	80.00	59.57	38.73	7.65	35.00	PEAK	HORIZONTAL	3
2	11519.700	56.76	-3.24	60.00	45.38	38.73	7.65	35.00	AVERAGE	HORIZONTAL	3
3	17277.940	53.36	-6.64	60.00	36.70	42.72	8.87	34.93	AVERAGE	HORIZONTAL	3
4	17277.940	69.11	-10.89	80.00	52.45	42.72	8.87	34.93	PEAK	HORIZONTAL	3


Temperature	24°C	Humidity	63%
Test Engineer	Leo Hung	Configurations	802.11a Turbo Channel 160 / Ant. 2

Vertical

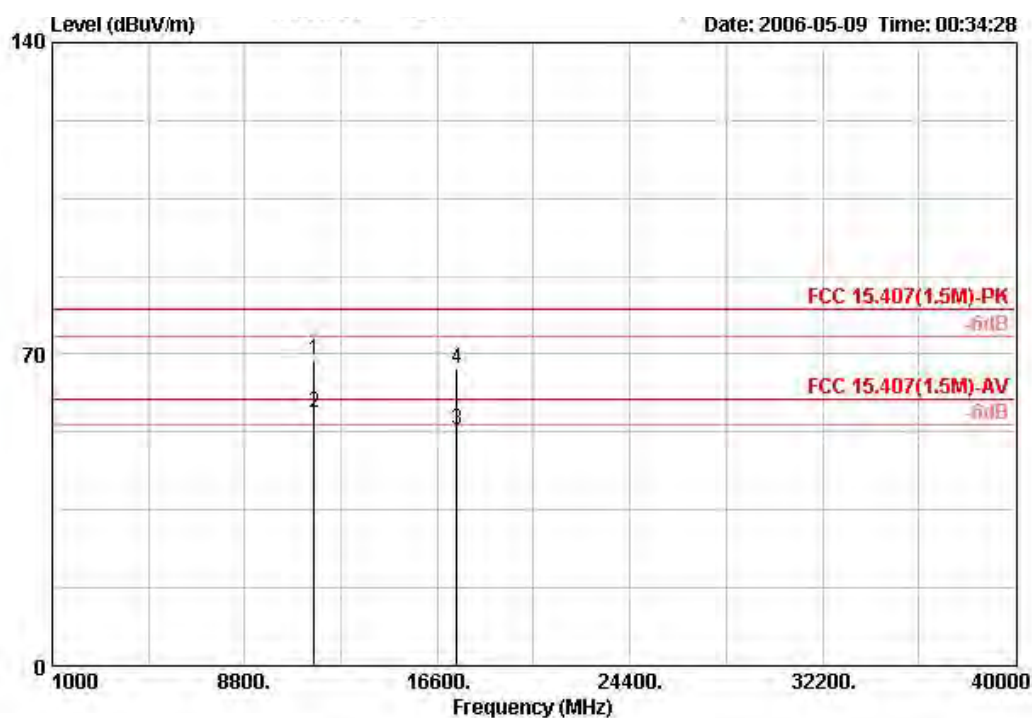

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Pol/Phase	Distance
	MHz	dBUV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	m
			dB	dBUV/m	dBuV	dB/m	dB	dB		
1	11602.780	68.52	-11.48	80.00	56.99	38.87	7.67	35.01	PEAK	3
2	11602.780	56.84	-3.16	60.00	45.31	38.87	7.67	35.01	AVERAGE	3
3	17403.360	52.88	-7.12	60.00	35.69	43.30	8.86	34.97	AVERAGE	3
4	17403.360	66.77	-13.23	80.00	49.59	43.30	8.86	34.97	PEAK	3

Horizontal

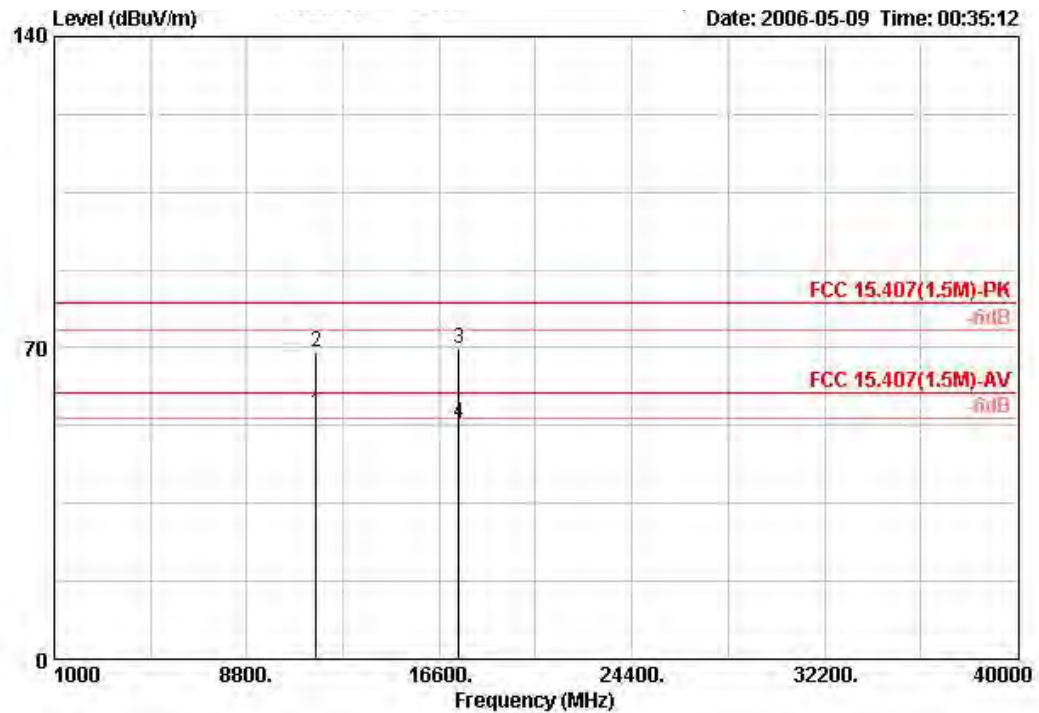

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Distance
			dB	dBuV/m	dBuV	dB/m	dB	dB		m
1 @	11605.000	55.34	-4.66	60.00	43.81	38.87	7.67	35.01	AVERAGE	3
2	11605.000	69.09	-10.91	80.00	57.57	38.87	7.67	35.01	PEAK	3
3	17403.360	69.78	-10.22	80.00	52.59	43.30	8.86	34.97	PEAK	3
4	17403.360	52.93	-7.07	60.00	35.74	43.30	8.86	34.97	AVERAGE	3

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.