



Retlif Testing Laboratories

101 New Boston Road, Goffstown, NH 03045
603-497-4600 - Fax: 603-497-5281

CORPORATE OFFICE
795 Marconi Avenue
Ronkonkoma, NY 11779
631-737-1500 Fax 631-737-1497
(A NY Corporation)

BRANCH LABORATORIES
3131 Detwiler Road
Harleysville, PA 19438
215-256-4133 Fax 215-256-4130

WASHINGTON
REGULATORY OFFICE
703-533-1614 Fax 703-533-1612

MEMBER
ACIL

FCC Part 15 Report of Measurements on

Wireless Bodylan Enabler Module
FCC ID: O9DWM

Customer Name:	Fitsense Technology
Customer P.O.:	070412
Date of Report:	July 12, 2007
Test Results No.:	R-4815N-2
Test Start Date:	June 5, 2007
Test Finish Date:	June 7, 2007
Test Technician:	Matthew Seamans
Laboratory Supervisor:	Todd Hannemann
Branch Manager:	Scott Wentworth
Report Prepared By:	Jamie Ramsey
Government Source Inspection:	N/A


Our letters, procedures and reports are for the exclusive use of the customer to whom they are addressed and their communication or the use of the name of Retlif Testing Laboratories must receive our prior written approval. Our letters, procedures and reports apply only to the sample tested and are not necessarily indicative of the qualities of apparently identical or similar products. The letters, procedures and reports and the name of Retlif Testing Laboratories or insignia are not to be used under any circumstances in advertising to the public. This report shall not be reproduced, except in full, without the prior written approval of Retlif Testing Laboratories. The only official copy of this document is the signed original provided by Retlif Testing Laboratories.

Certification and Signatures

We certify that these Test Results are true results obtained from the tests of the equipment stated, and relates only to the equipment tested. We further certify that the measurements shown in this Test Results package were made in accordance with the procedures indicated and vouch for the qualifications of all Retlif Testing Laboratories personnel taking them.



Todd Hannemann
Laboratory Supervisor



Scott Wentworth
Branch Manager

Non-Warranty Provision

The testing services have been performed, findings obtained and reports prepared in accordance with generally accepted laboratory principles and practices. This warranty is in lieu of all others, either expressed or implied.

Non-Endorsement

This test report contains only findings and results arrived at after employing the specific test procedures and standards listed herein. It is not intended to constitute a recommendation, endorsement or certification of the product or material tested. This test report may not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the U.S. Government.



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Revision History

Revisions to this document are listed below; the latest revised document supersedes all previous issues of this document.

Revision	Date	Pages Affected
-	July 12, 2007	Original Release



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Test Program Summary

Job Number: R-4815N-2
Applicant: Fitsense Technology
Address: 21 Boston Road
Southborough, MA 01772
Manufacturer: Fitsense Technology
Test Sample: Wireless Bodylan Enabler Module
Brand Name: Fitsense
Part Number: 701-00002-01
Model Number: N/A
Serial Number: N/A
Type: RF Module
Power Requirements: 5VDC via host
Frequency Band of Operation: 2400 to 2483.5MHz
Frequency of Operation: 2429MHz
FCC ID: O9DWM
Applicable Rule Section: 15.249
Modular Requirements: FCC Public Notice DA 00-1407

Test Specification:

FCC Rules and Regulations Part 15, Subpart C, Paragraph 15.249

Test Procedure:

ANSI C63.4:2003

Purpose:

The objective of this test program was to demonstrate compliance of the Wireless Bodylan Enabler Module to the requirements of FCC Part 15.249 and FCC Public Notice DA 00-1407 for the purpose of obtaining FCC Modular Certification.

Test Methods:

The following table depicts the test methods that were performed on the EUT and the corresponding test results:

Testing Date(s)	Test Method	Test Results
6/6/07 & 6/7/07	15.249 (a) Fundamental & Harmonic Emissions	Complied
6/7/07	15.249 (d) Out of Band/Bandedge Emissions	Complied
6/7/07	15.249 (e) Peak Field Strength	Complied
6/7/07	15.207 (a) Conducted Emissions	Complied



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Test Sample Description:

The Wireless Bodylan Enabler Module is designed as a remote or local access point to plug into a PC (internal or external) with a USB interface running windows XP. Its purpose is to receive and transmit data packets via a 2.4GHz radio link and pass data packets between the PC and an external device equipped with the same radio link.

Antenna Description:

The antenna is an external antenna with ~6dB gain. The antenna connection on the device is a reverse polarity sma and meets the requirements of 15.203

Test Sample/Test Results Summary:

- The maximized fundamental field strength at 2429 MHz did not exceed 50 m V/M (94dB μ V) at a test distance of 3 meters. The measured maximized average field strength was 92.48dB μ V.
- The field strength of observed harmonic emissions did not exceed 500 μ V/M. The worst case harmonic emission measured was the second harmonic (4858MHz) with a maximum average field strength of 392.19uV/M.
- The field strength of non-harmonic out of band/bandedge emissions were attenuated more than 50dB below the level of the fundamental or to the limits of 15.209 as applicable. No out of band spurious emissions were observed within 10dB of the specified limit at 3 meter or 1 meter test distances.
- The maximized peak field strength of the emissions did not exceed the maximum permitted average field strength by more than 20 dB.
- Radiated Emissions from the EUT were measured with the EUT oriented in all 3 axis. Data for the worst case orientation is supplied.

Modular Requirements:

The device meets the requirements for Modular Certification as specified in FCC Public Notice DA 00-1407. See attached Modular Certification Letter Exhibit for information detailing how these requirements are met.



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Measurement Procedures:

15.249 (a/d) Field Strength of Fundamental, Harmonic and Out of Band/Band Edge Emissions

The field strength of the fundamental, harmonic and out of band/bandedge emissions were measured. The EUT was placed on a 80cm high wooden test stand located 3 meters from the test antenna on a FCC listed open area test site. Emissions from the EUT were maximized field strength of each observed emissions was measured, recorded and compared to the specified limits of 15.249 (a), (d)/15.209 as appropriate. Peak field strength of emissions were measured, recorded and verified to meet the specified limit (limit corresponds to 20dB above the maximum permitted average limit). When necessary, the marker/delta method was used to verify bandedge compliance.

15.207 (a) AC Line Conducted Emissions

The test sample was placed on a 0.8m high wooden test stand above the floor of the test area (ground plane). The rear of the EUT was aligned flush with the rear of the test stand. The test stand was situated such that the EUT was located 0.4m from all other grounded surfaces. The dc power cables of the EUT were extended to a minimum length of 10cm and connected to an artificial mains network (LISN). The spectrum analyzer was connected to the RF port of the LISN and peak/quasi-peak and average measurements were taken in the frequency range of 150 kHz to 30 MHz on each the hot and return.

Test Results: The measured DC line conducted emissions met the limit specified in 15.207 (a).



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Test Setup Photographs



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

**Test Photographs
Radiated Emissions Setup Photographs**



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

**Test Photographs
Radiated Emissions Setup Photographs**



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

**Test Photographs
Radiated Emissions Setup Photographs**



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

**Test Photographs
Radiated Emissions Setup Photographs**



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Equipment Lists

EQUIPMENT LIST

Fundamental & Harmonic Emissions

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due
3116	Pre-Amplifier	Miteq	0.1 GHz - 18 GHz	AFS42-35	8/25/2006	8/25/2007
3117	Power Supply	B&K Precision	0-30 Vdc, 3.0 A	1630	1/23/2007	1/23/2008
3129	6.0 dB Attenuator	Weinschel	DC - 18 GHz	2	6/6/2007	6/6/2008
3430	Horn Antenna	MCS Corporation	18 GHz - 26.5 GHz	K-5039	1/23/2007	1/23/2008
4984A	High Gain Horn	Microlab/FXR	1.0 - 1.7 GHz	L638A	1/24/2007	1/24/2008
4984B	High Gain Horn	Microlab/FXR	1.7 - 2.6 GHz	R638A	1/24/2007	1/24/2008
4984C	High Gain Horn	Microlab/FXR	2.6 - 3.95 GHz	S638A	1/24/2007	1/24/2008
4984D	High Gain Horn	Microlab/FXR	3.95 - 5.85 GHz	H638A	1/24/2007	1/24/2008
4984E	High Gain Horn	Microlab/FXR	5.8 - 8.2 GHz	C638A	1/24/2007	1/24/2008
4984F	High Gain Horn	Microlab/FXR	8.2 - 12.4 GHz	X638A	1/24/2007	1/24/2008
4984G	High Gain Horn	Microlab/FXR	12.4 GHz - 18 GHz	Y638A	1/24/2007	1/24/2008
5030B	10 DB Atten. (50 ohm)	Narda	DC - 12.4 GHz	757C-10	11/8/2006	11/8/2007
5070	EMI Test Receiver	Rohde & Schwarz	20Hz - 40GHz	ESIB40	11/22/2006	11/22/2007
5072	Preamplifier	Miteq	18 GHz-40 GHz	JS4-18004000-30	1/10/2007	1/10/2008

Conducted Emissions

EN	Type	Manufacturer	Description	Model No.	Cal Date	Due Date
5030B	10 DB Atten. (50 ohm)	Narda	DC - 12.4 GHz	757C-10	11/8/2006	11/8/2007
5070	EMI Test Receiver	Rohde & Schwarz	20 Hz - 40 GHz	ESIB40	11/22/2006	11/22/2007
7032	LISN	Rohde & Schwarz	N/A	ESH 3-Z5	10/19/2006	10/19/2007



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

Test Data



Retlif Testing Laboratories

Test Report No. R-4815N-2
FCC ID: O9DWM

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Fundamental Field Strength & Harmonics		
Customer:	FitSense Technology	Job No:	R-4815N-2
Test Sample:	Wireless BodyLAN Enabler 2.429 GHz Transceiver Module		
Model No:	701-00002-01	Serial No:	N/A
Test Specification:	FCC Part 15 Paragraph: 15.249 (a)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	Date:	6/7/2007
Notes:	Average Readings to Average Limits		

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Peak Field Strength		
Customer:	FitSense Technology	Job No:	R-4815N-2
Test Sample:	Wireless Bodylan Enabler 2.429 GHz Transceiver Module		
Model No:	701-00002-01	Serial No:	N/A
Test Specification:	FCC Part 15 Paragraph: 15.249 (e)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	Date:	6/7/2007
Notes:	Peak Readings to Peak Limits(20dB above average limits)		

At the harmonic frequencies where no meter reading is recorded, there was no harmonic observer above the baseline of the spectrum analyzer which was a minimum of 10 dB below the limit.

RETLIF TESTING LABORATORIES

TABULAR DATA SHEET

Test Method:	Band Edge						
Customer:	FitSense Technology	Job No:	R-4815N-2				
Test Sample:	Wireless BodyLAN Enabler 2.429 GHz Transceiver Module						
Model No:	701-00002-01	Serial No:	N/A				
Test Specification:	FCC Part 15 Paragraph: 15.249 (d)						
Operating Mode:	Continuously Transmitting						
Technician:	M.Seamans	Date:	6/7/2007				
Notes:	Peak Readings Test Distance 3 Meters						
Test	Meter	Correction	Corrected				

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Out of Band Radiated Emissions 25 MHz to 26.5 GHz		
Customer	FitSense Technology	Job No.	R-4815N-2
Test Sample	Wireless BodyLAN Enabler 2.429 GHz Transceiver Module		
Model No.	701-00002-01	Serial No.	N/A
Test Specification:	FCC Part 15 Subpart C Paragraph: 15.249 (d)		
Operating Mode:	Continuously Transmitting		
Technician:	M.Seamans	Date:	June 7, 2007
Notes:	Test Distance: 3 Meters		


No EUT emissions within 10 dB of the specified test limit were observed at the specified test distance throughout the given frequency spectrum.

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Conducted Emissions 150 kHz to 30 MHz		
Customer:	Fitsense Technology	Test Sample:	Wireless Bodylan Enabler Module
Model No:	701-00002-01	Serial No:	N/A
Test Specification:	FCC Part 15	15.207, paragraphs (A)(C)	Job No: R-4815N-2
Operating Mode:	Continuously Transmitting	Technician:	M. Seamans
Notes:	Lead Tested: 5VDC Positive Peak Readings to Average Limits.		
Date:	June 7, 2007		

Level [dB μ V]

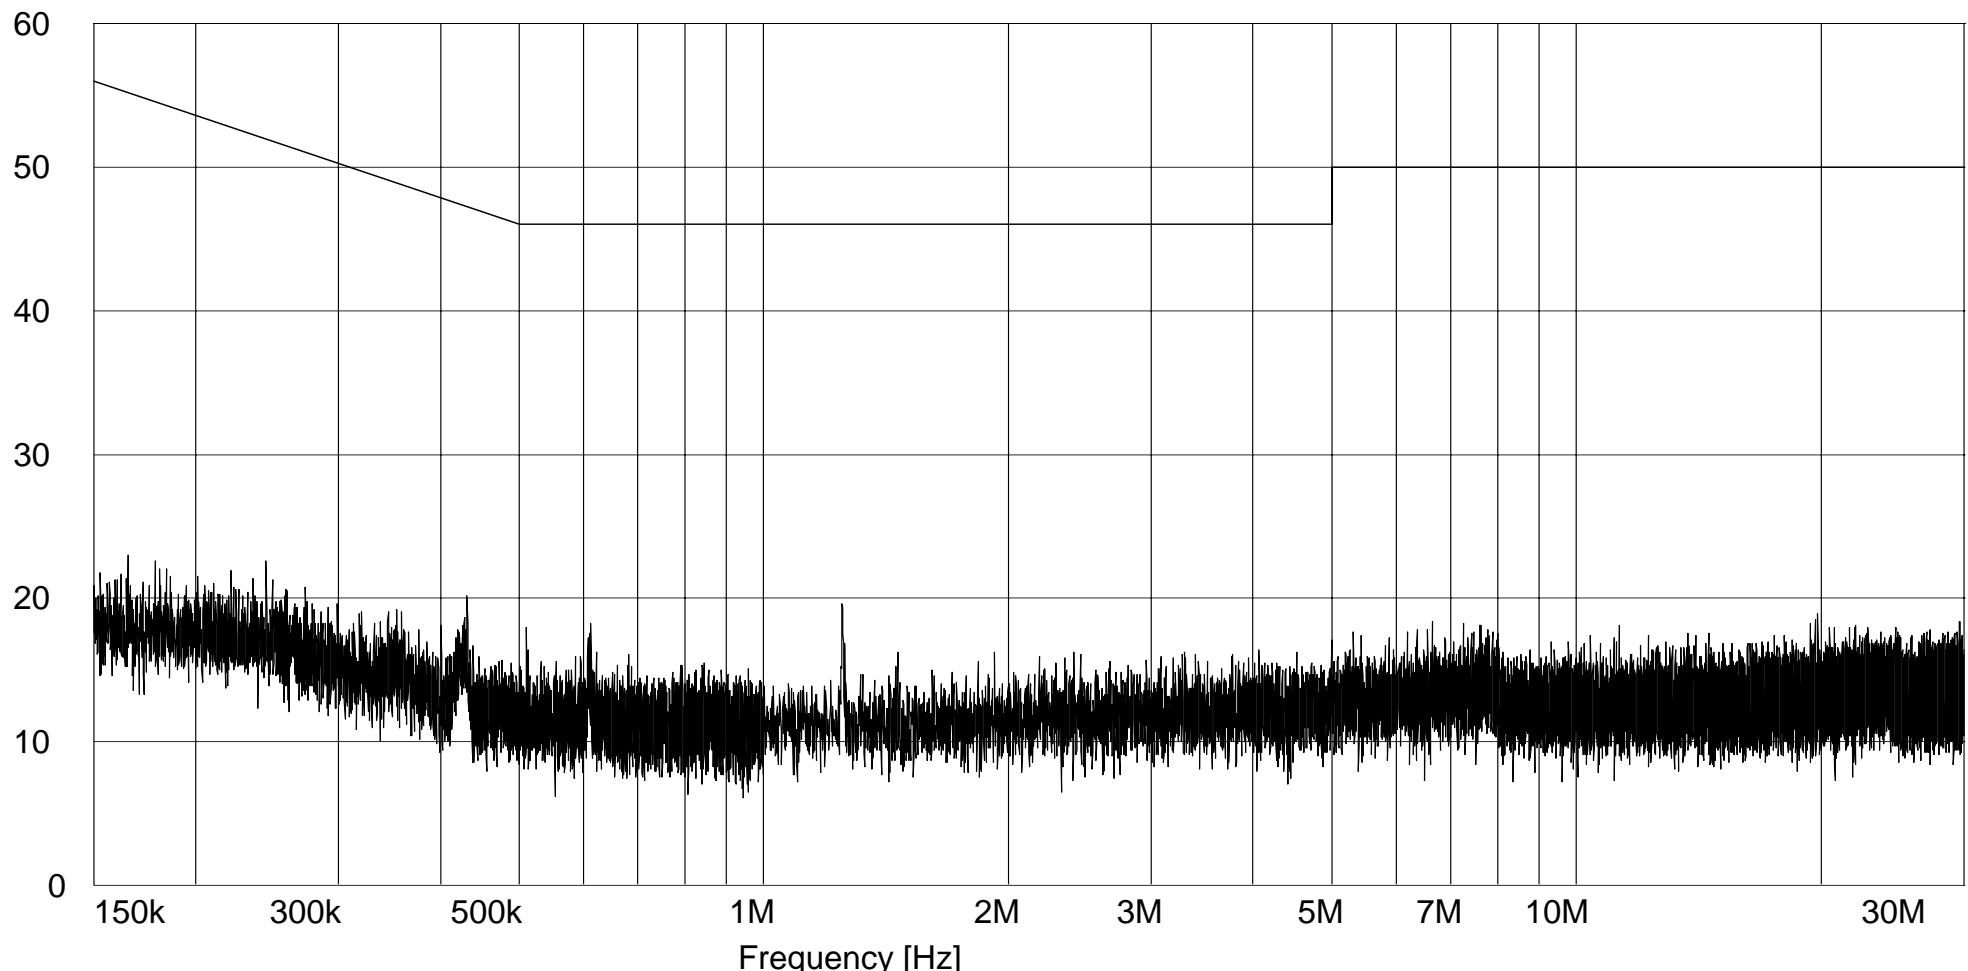

RETLIF TESTING LABORATORIES

EMISSIONS DATA SHEET

Test Method:	Conducted Emissions 150 kHz to 30 MHz		
Customer:	Fitsense Technology	Test Sample:	Wireless Bodylan Enabler Module
Model No:	701-00002-01	Serial No:	N/A
Test Specification:	FCC Part 15	15.207, paragraphs (A)(C)	Job No: R-4815N-2
Operating Mode:	Continuously Transmitting	Technician:	M. Seamans
Notes:	Lead Tested: 5VDC Return Peak Readings to Average Limits.		
Date:	June 7, 2007		

Level [dB μ V]

