

FCC Test Report

(PART 24)

Report No.: RF180613E05-1

FCC ID: O9YJKS2

Test Model: JKS2, JKS2A, JKS2B, JKS2C, JKS2D, ATS100-A, ATS100-T, ATS100-Y-A, ATS100-Y-T, ATS100-Z-A, ATS100-Z-T, ATS100-YZ-A, ATS100-YZ-T
(Refer to item 3.1 for the more details)

Received Date: Mar. 26, 2018

Test Date: Apr. 17, 2018 ~ Aug. 23, 2018

Issued Date: Sep. 05, 2018

Applicant: Spireon Inc.

Address: 9724 Kingston Pike, Suite 800 Knoxville, TN 37922 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan,
R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	13
3.5 General Description of Applied Standards.....	13
4 Test Types and Results	14
4.1 Output Power Measurement.....	14
4.1.1 Limits of Output Power Measurement	14
4.1.2 Test Procedures.....	14
4.1.3 Test Setup.....	15
4.1.4 Test Results	16
4.2 Modulation Characteristics Measurement	21
4.2.1 Limits of Modulation Characteristics	21
4.2.2 Test Setup.....	21
4.2.3 Test Procedure	21
4.2.4 Test Results	22
4.3 Frequency Stability Measurement	23
4.3.1 Limits of Frequency Stability Measurement	23
4.3.2 Test Procedure	23
4.3.3 Test Setup.....	23
4.3.4 Test Results	24
4.4 Occupied Bandwidth Measurement.....	31
4.4.1 Test Procedure	31
4.4.2 Test Setup.....	31
4.4.3 Test Result.....	32
4.5 Band Edge Measurement	36
4.5.1 Limits of Band Edge Measurement	36
4.5.2 Test Setup.....	36
4.5.3 Test Procedures.....	36
4.5.4 Test Results	37
4.6 Peak to Average Ratio	43
4.6.1 Limits of Peak to Average Ratio Measurement	43
4.6.2 Test Setup.....	43
4.6.3 Test Procedures.....	43
4.6.4 Test Results	44
4.7 Conducted Spurious Emissions	48
4.7.1 Limits of Conducted Spurious Emissions Measurement	48
4.7.2 Test Setup.....	48
4.7.3 Test Procedure	48
4.7.4 Test Results	49
4.8 Radiated Emission Measurement.....	70
4.8.1 Limits of Radiated Emission Measurement	70
4.8.2 Test Procedure	70
4.8.3 Deviation from Test Standard	70
4.8.4 Test Setup.....	71
4.8.5 Test Results	72

5 Pictures of Test Arrangements.....	96
Appendix – Information on the Testing Laboratories	97

Release Control Record

Issue No.	Description	Date Issued
RF180613E05-1	Original Release	Sep. 05, 2018

1 Certificate of Conformity

Product: GPS Tracker

Brand: Spireon

Test Model: JKS2, JKS2A, JKS2B, JKS2C, JKS2D, ATS100-A, ATS100-T, ATS100-Y-A, ATS100-Y-T, ATS100-Z-A, ATS100-Z-T, ATS100-YZ-A, ATS100-YZ-T
(Refer to item 3.1 for the more details)

Sample Status: ENGINEERING SAMPLE

Applicant: Spireon Inc.

Test Date: Apr. 17, 2018 ~ Aug. 23, 2018

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Sep. 05, 2018
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Sep. 05, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1046 24.232(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
2.1055 24.235	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 24.238(b)	Occupied Bandwidth	Pass	Meet the requirement of limit.
24.238(b)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 24.238	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -26.03 dB at 5580.00 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
			Aug. 20, 2018	Aug. 19, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
			Jan. 11, 2018	Jan. 10, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 06, 2017	Dec. 05, 2018
HORN Antenna ETS-Lindgren	3117	00143293	Dec. 13, 2017	Dec. 12, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 01, 2017	Nov. 30, 2018
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
			Jun. 19, 2018	Jun. 18, 2019
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
			Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-400)	Jun. 23, 2017	Jun. 22, 2018
			Jun. 19, 2018	Jun. 18, 2019
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SMS-100-SMS-24)	Jun. 23, 2017	Jun. 22, 2018
			Jun. 19, 2018	Jun. 18, 2019
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Communications Tester-Wireless Agilent	8960 Series 10	MY53201073	Jun. 28, 2017	Jun. 27, 2019
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018
			Jun. 29, 2018	Jun. 28, 2019

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HsinTien Chamber 1.
 3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
 4. The IC Site Registration No. is IC7450I-1.

3 General Information

3.1 General Description of EUT

Product	GPS Tracker	
Brand	Spireon	
Test Model	JKS2, JKS2A, JKS2B, JKS2C, JKS2D, ATS100-A, ATS100-T, ATS100-Y-A, ATS100-Y-T, ATS100-Z-A, ATS100-Z-T, ATS100-YZ-A, ATS100-YZ-T	
Status of EUT	ENGINEERING SAMPLE	
Power Supply Rating	9~16 Vdc	
Modulation Type	WCDMA	QPSK
	LTE	QPSK, 16QAM
Frequency Range	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
Max. EIRP Power	WCDMA	524.81 mW
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	469.89 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	473.15 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	477.53 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	481.95 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	486.41 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	490.91 mW
Emission Designator	WCDMA	4M15F9W
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 2 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 2 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 2 (Channel Bandwidth: 10 MHz)	8M96G7D
	LTE Band 2 (Channel Bandwidth: 15 MHz)	13M4G7D
	LTE Band 2 (Channel Bandwidth: 20 MHz)	17M9G7D
Antenna Type	PIFA Antenna with 3.6 dBi gain	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:

1. The maximum bandwidth for 16QAM of the EUT is 5 MHz.
2. The module was installed in the EUT. The module information is listed as below.


Model name	Description of change	Support Spec.			
		LTE	UMTS	GPS	APGS
M14Q2FG	FW: M14Q2_v16.01 HW: v1.1 MCP 2Gb NAND Flash+1Gb LPDDR2	Cat 1LTE B2/4/5/12	UMTS B2/5	supported	supported

3. All models are listed as below.

Model	Description
ATS100-YZ-A	w/ battery, w/ buzzer
ATS100-YZ-T	
JKS2A	
JKS2	w/ battery, w/ buzzer (Test Model)
ATS100-Y-A	w/ battery, w/o buzzer
ATS100-Y-T	
JKS2B	
ATS100-Z-A	w/o battery, w/ buzzer
ATS100-Z-T	
JKS2C	
ATS100-A	w/o battery, w/o buzzer
ATS100-T	
JKS2D	

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

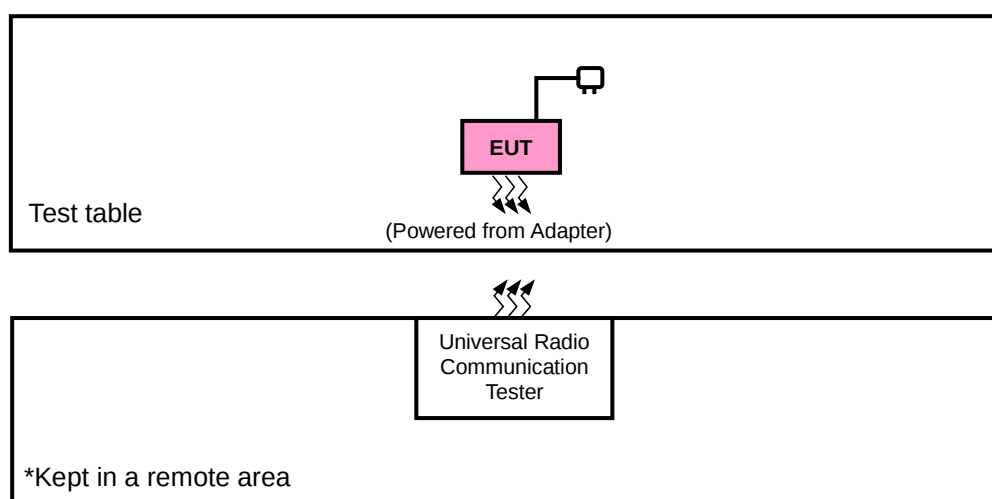

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	Z-plane	Z-axis
LTE Band 2	Z-plane	Y-axis

WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Modulation Characteristics	9262 to 9538	9400	WCDMA
-	Frequency Stability	9262 to 9538	9262, 9538	WCDMA
-	Occupied Bandwidth	9262 to 9538	9262, 9400, 9538	WCDMA
-	Band Edge	9262 to 9538	9262, 9538	WCDMA
-	Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA
-	Conducted Emission	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission below 1GHz	9262 to 9538	9262	WCDMA
-	Radiated Emission above 1GHz	9262 to 9538	9262, 9400, 9538	WCDMA

LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Modulation Characteristics	18700 to 19100	18900	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
-	Frequency Stability	18607 to 19193	18607, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Occupied Bandwidth	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	50 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	75 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	100 RB / 0 RB Offset
-	Peak to Average Ratio	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Band Edge	18607 to 19193	18607	1.4 MHz	QPSK	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
			19193	1.4 MHz	QPSK	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
		18615 to 19185	18615	3 MHz	QPSK	1 RB / 0 RB Offset
						15 RB / 0 RB Offset
			19185	3 MHz	QPSK	1 RB / 14 RB Offset
						15 RB / 0 RB Offset
		18625 to 19175	18625	5 MHz	QPSK	1 RB / 0 RB Offset
						25 RB / 0 RB Offset
			19175	5 MHz	QPSK	1 RB / 24 RB Offset
						25 RB / 0 RB Offset
		18650 to 19150	18650	10 MHz	QPSK	1 RB / 0 RB Offset
						50 RB / 0 RB Offset
			19150	10 MHz	QPSK	1 RB / 49 RB Offset
						50 RB / 0 RB Offset
		18675 to 19125	18675	15 MHz	QPSK	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
			19125	15 MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
		18700 to 19100	18700	20 MHz	QPSK	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
			19100	20 MHz	QPSK	1 RB / 99 RB Offset
						100 RB / 0 RB Offset

-	Conducted Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission below 1GHz	18700 to 19100	18700	20 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission above 1GHz	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	14.2 Vdc	Karl Lee
Modulation Characteristics	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Frequency Stability	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Occupied Bandwidth	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Band Edge	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Peak to Average Ratio	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Conducted Emission	26 deg. C, 58 % RH	14.2 Vdc	Han Wu
Radiated Emission	25 deg. C, 65 % RH	14.2 Vdc	Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1 MHz for GSM, GPRS & EDGE, 5 MHz for WCDMA and CDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

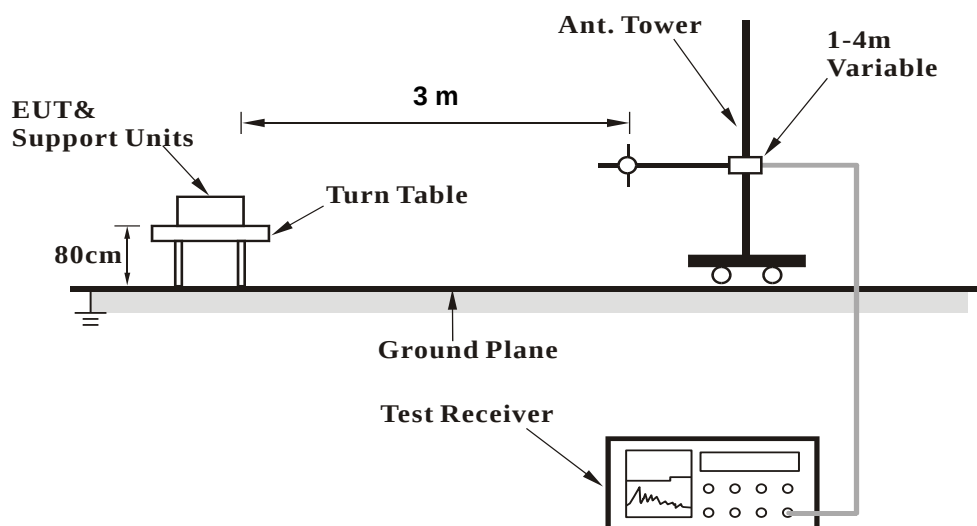


<Radiated Emission above 1 GHz>

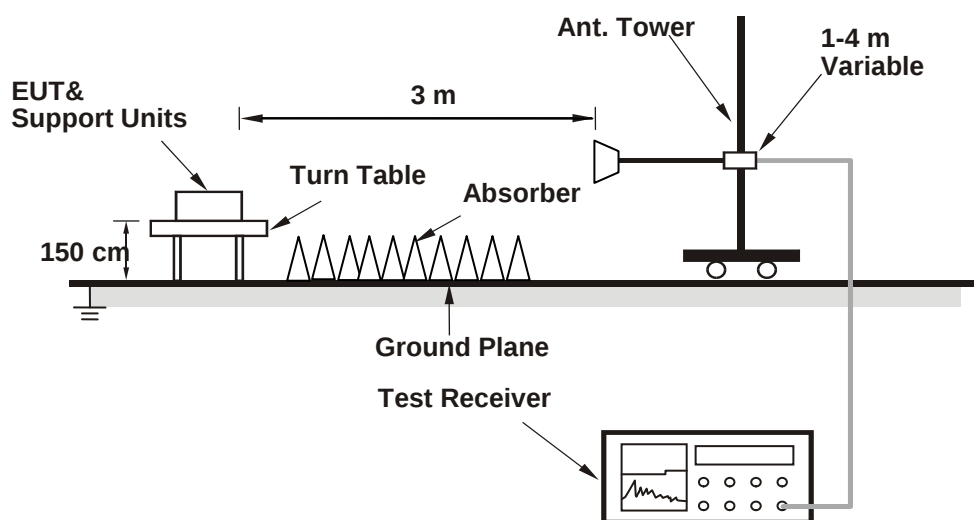

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
RMC 12.2K	23.77	23.83	23.72
HSDPA Subtest-1	22.54	22.57	22.46
HSDPA Subtest-2	22.59	22.61	22.49
HSDPA Subtest-3	22.11	22.15	22.05
HSDPA Subtest-4	22.16	22.14	22.06
HSUPA Subtest-1	22.18	22.12	22.04
HSUPA Subtest-2	21.12	21.05	21.01
HSUPA Subtest-3	21.40	21.34	21.28
HSUPA Subtest-4	21.64	21.60	21.51
HSUPA Subtest-5	22.74	22.72	22.59

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18607	Mid Ch 18900	High Ch 19193		Low Ch 18607	Mid Ch 18900	High Ch 19193	
			1850.7 MHz	1880.0 MHz	1909.3 MHz		1850.7 MHz	1880.0 MHz	1909.3 MHz	
2 / 1.4M	1	0	22.90	22.91	22.72	0	21.87	21.83	21.67	1
	1	2	22.91	22.87	22.58	0	21.74	21.73	21.50	1
	1	5	22.70	22.70	22.54	0	21.64	21.60	21.40	1
	3	0	22.75	22.74	22.46	0	21.61	21.56	21.40	1
	3	1	22.61	22.55	22.42	0	21.50	21.43	21.25	1
	3	3	22.61	22.58	22.31	0	21.45	21.42	21.32	1
	6	0	21.79	21.71	21.65	1	20.78	20.79	20.58	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18615	Mid Ch 18900	High Ch 19185		Low Ch 18615	Mid Ch 18900	High Ch 19185	
			1851.5 MHz	1880.0 MHz	1908.5 MHz		1851.5 MHz	1880.0 MHz	1908.5 MHz	
2 / 3M	1	0	23.04	23.09	22.83	0	21.97	22.08	21.77	1
	1	7	22.91	22.94	22.72	0	21.92	22.00	21.64	1
	1	14	22.81	22.81	22.45	0	21.61	21.75	21.44	1
	8	0	21.97	22.00	21.75	1	20.77	20.95	20.64	2
	8	3	21.70	21.76	21.57	1	20.70	20.74	20.48	2
	8	7	21.69	21.55	21.41	1	20.59	20.66	20.34	2
	15	0	21.94	21.91	21.65	1	20.88	20.86	20.63	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18625	Mid Ch 18900	High Ch 19175		Low Ch 18625	Mid Ch 18900	High Ch 19175	
			1852.5 MHz	1880.0 MHz	1907.5 MHz		1852.5 MHz	1880.0 MHz	1907.5 MHz	
2 / 5M	1	0	23.17	23.14	22.97	0	22.08	22.25	21.93	1
	1	12	23.14	23.06	22.81	0	22.01	21.89	21.87	1
	1	24	22.84	22.84	22.72	0	21.81	21.82	21.61	1
	12	0	22.02	22.04	21.82	1	20.97	20.97	20.75	2
	12	6	21.80	21.94	21.62	1	20.90	20.82	20.56	2
	12	13	21.72	21.84	21.66	1	20.87	20.78	20.45	2
	25	0	22.05	22.06	21.90	1	21.08	20.87	20.77	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18650	Mid Ch 18900	High Ch 19150		Low Ch 18650	Mid Ch 18900	High Ch 19150	
			1855.0 MHz	1880.0 MHz	1905.0 MHz		1855.0 MHz	1880.0 MHz	1905.0 MHz	
2 / 10M	1	0	23.30	23.37	23.11	0				1
	1	24	23.22	23.22	22.98	0				1
	1	49	23.11	23.03	22.86	0				1
	25	0	22.21	22.18	21.93	1				2
	25	12	21.98	21.99	21.71	1				2
	25	25	21.98	21.96	21.69	1				2
	50	0	22.20	22.06	21.91	1				2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18675	Mid Ch 18900	High Ch 19125		Low Ch 18675	Mid Ch 18900	High Ch 19125	
			1857.5 MHz	1880.0 MHz	1902.5 MHz		1857.5 MHz	1880.0 MHz	1902.5 MHz	
2 / 15M	1	0	23.45	23.46	23.23	0				1
	1	37	23.32	23.33	23.10	0				1
	1	74	23.09	23.19	22.85	0				1
	36	0	22.34	22.29	22.07	1				2
	36	19	22.10	22.16	21.91	1				2
	36	39	22.00	22.06	21.82	1				2
	75	0	22.33	22.35	22.11	1				2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 18700	Mid Ch 18900	High Ch 19100		Low Ch 18700	Mid Ch 18900	High Ch 19100	
			1860.0 MHz	1880.0 MHz	1900.0 MHz		1860.0 MHz	1880.0 MHz	1900.0 MHz	
2 / 20M	1	0	23.56	23.58	23.33	0				1
	1	50	23.41	23.42	23.23	0				1
	1	99	23.24	23.37	23.01	0				1
	50	0	22.45	22.45	22.17	1				2
	50	25	22.24	22.25	21.95	1				2
	50	50	22.13	22.18	21.92	1				2
	100	0	22.36	23.33	22.19	1				2

EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	9262	1852.4	-11.32	38.19	26.87	486.41	H
	9400	1880.0	-11.88	38.70	26.82	480.84	
	9538	1907.6	-12.15	39.35	27.20	524.81	
	9262	1852.4	-12.89	38.48	25.59	362.24	V
	9400	1880.0	-12.78	38.59	25.81	381.24	
	9538	1907.6	-12.91	38.87	25.96	394.46	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18607	1850.7	-17.98	44.70	26.72	469.89	H
	18900	1880.0	-18.02	44.70	26.68	465.59	
	19193	1909.3	-17.93	44.57	26.64	461.64	
	18607	1850.7	-19.60	44.27	24.67	293.09	V
	18900	1880.0	-20.23	44.87	24.64	291.07	
	19193	1909.3	-20.00	44.61	24.61	289.27	
Channel Bandwidth: 1.4 MHz / 16QAM							
Z	18607	1850.7	-18.99	44.70	25.71	372.39	H
	18900	1880.0	-19.03	44.70	25.67	368.98	
	19193	1909.3	-18.94	44.57	25.63	365.85	
	18607	1850.7	-20.61	44.27	23.66	232.27	V
	18900	1880.0	-21.23	44.87	23.64	231.21	
	19193	1909.3	-21.00	44.61	23.61	229.77	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18615	1851.5	-17.95	44.70	26.75	473.15	H
	18900	1880.0	-17.97	44.70	26.73	470.98	
	19185	1908.5	-17.87	44.57	26.70	468.06	
	18615	1851.5	-19.56	44.27	24.71	295.80	V
	18900	1880.0	-20.20	44.87	24.67	293.09	
	19185	1908.5	-19.97	44.61	24.64	291.27	
Channel Bandwidth: 3 MHz / 16QAM							
Z	18615	1851.5	-18.95	44.70	25.75	375.84	H
	18900	1880.0	-18.98	44.70	25.72	373.25	
	19185	1908.5	-18.88	44.57	25.69	370.94	
	18615	1851.5	-20.57	44.27	23.70	234.42	V
	18900	1880.0	-21.21	44.87	23.66	232.27	
	19185	1908.5	-20.97	44.61	23.64	231.37	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18625	1852.5	-17.91	44.70	26.79	477.53	H
	18900	1880.0	-17.94	44.70	26.76	474.24	
	19175	1907.5	-17.84	44.57	26.73	471.30	
	18625	1852.5	-19.52	44.27	24.75	298.54	V
	18900	1880.0	-20.16	44.87	24.71	295.80	
	19175	1907.5	-19.93	44.61	24.68	293.97	
Channel Bandwidth: 5 MHz / 16QAM							
Z	18625	1852.5	-18.91	44.70	25.79	379.31	H
	18900	1880.0	-18.94	44.70	25.76	376.70	
	19175	1907.5	-18.85	44.57	25.72	373.51	
	18625	1852.5	-20.53	44.27	23.74	236.59	V
	18900	1880.0	-21.16	44.87	23.71	234.96	
	19175	1907.5	-20.94	44.61	23.67	232.97	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18650	1855.0	-17.87	44.70	26.83	481.95	H
	18900	1880.0	-17.91	44.70	26.79	477.53	
	19150	1905.0	-17.81	44.57	26.76	474.57	
	18650	1855.0	-19.48	44.27	24.79	301.30	V
	18900	1880.0	-20.12	44.87	24.75	298.54	
	19150	1905.0	-19.90	44.61	24.71	296.01	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18675	1857.5	-17.83	44.70	26.87	486.41	H
	18900	1880.0	-17.87	44.70	26.83	481.95	
	19125	1902.5	-17.78	44.57	26.79	477.86	
	18675	1857.5	-19.44	44.27	24.83	304.09	V
	18900	1880.0	-20.08	44.87	24.79	301.30	
	19125	1902.5	-19.87	44.61	24.74	298.06	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	18700	1860.0	-17.79	44.70	26.91	490.91	H
	18900	1880.0	-17.83	44.70	26.87	486.41	
	19100	1900.0	-17.74	44.57	26.83	482.28	
	18700	1860.0	-19.40	44.27	24.87	306.90	V
	18900	1880.0	-20.05	44.87	24.82	303.39	
	19100	1900.0	-19.83	44.61	24.78	300.82	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Modulation Characteristics Measurement

4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Setup



4.2.3 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector. The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.4 Test Results

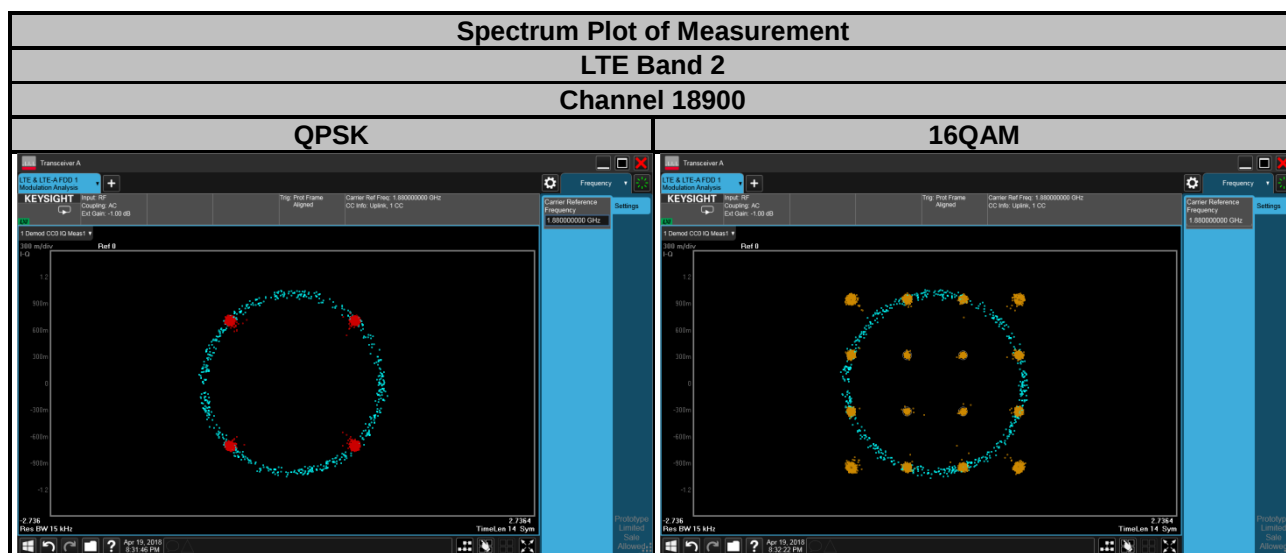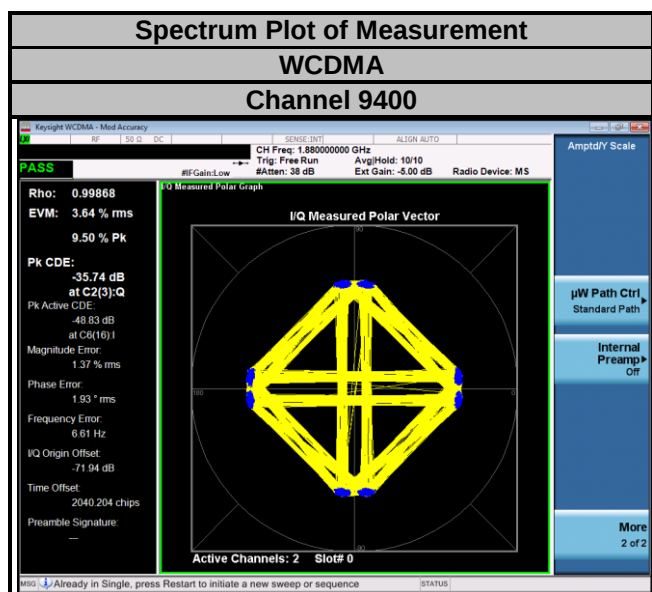

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

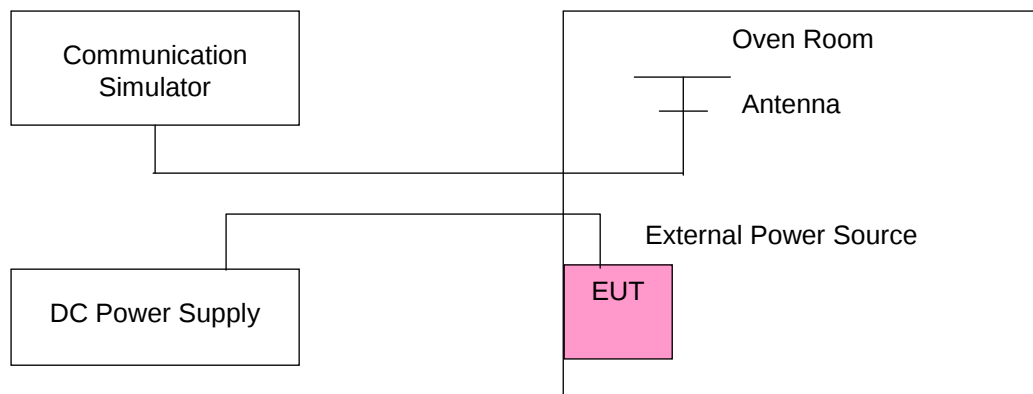

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1852.400003	0.002	1907.600004	0.002	2.5
9	1852.400003	0.002	1907.600001	0.001	2.5
16	1852.400001	0.001	1907.600002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	WCDMA				Limit (ppm)
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1852.400003	0.001	1907.600002	0.001	2.5
-20	1852.400003	0.002	1907.600001	0.001	2.5
-10	1852.400002	0.001	1907.600002	0.001	2.5
0	1852.400003	0.002	1907.600002	0.001	2.5
10	1852.400001	0.001	1907.600002	0.001	2.5
20	1852.399999	-0.001	1907.599999	-0.001	2.5
30	1852.399998	-0.001	1907.599999	-0.001	2.5
40	1852.399999	-0.001	1907.599997	-0.001	2.5
50	1852.399997	-0.002	1907.599997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1850.700003	0.002	1909.300002	0.001	2.5
9	1850.700004	0.002	1909.300003	0.001	2.5
16	1850.700002	0.001	1909.300004	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1850.700002	0.001	1909.300002	0.001	2.5
-20	1850.700003	0.002	1909.300001	0.001	2.5
-10	1850.700003	0.002	1909.300002	0.001	2.5
0	1850.700004	0.002	1909.300001	0.001	2.5
10	1850.700003	0.002	1909.300003	0.001	2.5
20	1850.699999	-0.001	1909.299996	-0.002	2.5
30	1850.699999	-0.001	1909.299997	-0.002	2.5
40	1850.699997	-0.002	1909.299999	-0.001	2.5
50	1850.699998	-0.001	1909.299997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1851.500001	0.001	1908.500001	0.001	2.5
9	1851.500004	0.002	1908.500001	0.001	2.5
16	1851.500004	0.002	1908.500003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1851.500002	0.001	1908.500004	0.002	2.5
-20	1851.500001	0.001	1908.500003	0.002	2.5
-10	1851.500002	0.001	1908.500003	0.001	2.5
0	1851.500004	0.002	1908.500004	0.002	2.5
10	1851.500003	0.001	1908.500004	0.002	2.5
20	1851.499997	-0.002	1908.499996	-0.002	2.5
30	1851.499998	-0.001	1908.499997	-0.002	2.5
40	1851.499998	-0.001	1908.499999	-0.001	2.5
50	1851.499998	-0.001	1908.499999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1852.500002	0.001	1907.500003	0.002	2.5
9	1852.500001	0.001	1907.500003	0.001	2.5
16	1852.500002	0.001	1907.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1852.500001	0.001	1907.500001	0.001	2.5
-20	1852.500003	0.002	1907.500001	0.001	2.5
-10	1852.500003	0.002	1907.500003	0.001	2.5
0	1852.500002	0.001	1907.500003	0.001	2.5
10	1852.500001	0.001	1907.500004	0.002	2.5
20	1852.499999	-0.001	1907.499997	-0.002	2.5
30	1852.499998	-0.001	1907.499998	-0.001	2.5
40	1852.499998	-0.001	1907.499996	-0.002	2.5
50	1852.499998	-0.001	1907.499997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1855.000002	0.001	1905.000002	0.001	2.5
9	1855.000002	0.001	1905.000002	0.001	2.5
16	1855.000001	0.001	1905.000004	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1855.000003	0.002	1905.000001	0.001	2.5
-20	1855.000003	0.002	1905.000003	0.002	2.5
-10	1855.000001	0.001	1905.000004	0.002	2.5
0	1855.000003	0.001	1905.000004	0.002	2.5
10	1855.000003	0.002	1905.000003	0.002	2.5
20	1854.999996	-0.002	1904.999998	-0.001	2.5
30	1854.999997	-0.002	1904.999999	-0.001	2.5
40	1854.999997	-0.002	1904.999997	-0.002	2.5
50	1854.999997	-0.002	1904.999996	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1857.500003	0.002	1902.500004	0.002	2.5
9	1857.500003	0.001	1902.500002	0.001	2.5
16	1857.500002	0.001	1902.500003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1857.500002	0.001	1902.500002	0.001	2.5
-20	1857.500001	0.001	1902.500002	0.001	2.5
-10	1857.500002	0.001	1902.500003	0.001	2.5
0	1857.500002	0.001	1902.500003	0.002	2.5
10	1857.500003	0.001	1902.500001	0.001	2.5
20	1857.499996	-0.002	1902.499997	-0.002	2.5
30	1857.499999	-0.001	1902.499998	-0.001	2.5
40	1857.499997	-0.002	1902.499997	-0.001	2.5
50	1857.499999	-0.001	1902.499996	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
14.2	1860.000004	0.002	1900.000003	0.002	2.5
9	1860.000003	0.002	1900.000001	0.001	2.5
16	1860.000003	0.002	1900.000004	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 9 Vdc to 16 Vdc.

Frequency Error vs. Temperature


Temp. (°C)	LTE Band 2				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	1860.000003	0.002	1900.000004	0.002	2.5
-20	1860.000002	0.001	1900.000002	0.001	2.5
-10	1860.000002	0.001	1900.000003	0.002	2.5
0	1860.000003	0.002	1900.000004	0.002	2.5
10	1860.000002	0.001	1900.000003	0.002	2.5
20	1859.999997	-0.002	1899.999996	-0.002	2.5
30	1859.999998	-0.001	1899.999998	-0.001	2.5
40	1859.999996	-0.002	1899.999996	-0.002	2.5
50	1859.999996	-0.002	1899.999998	-0.001	2.5

4.4 Occupied Bandwidth Measurement

4.4.1 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.2 Test Setup

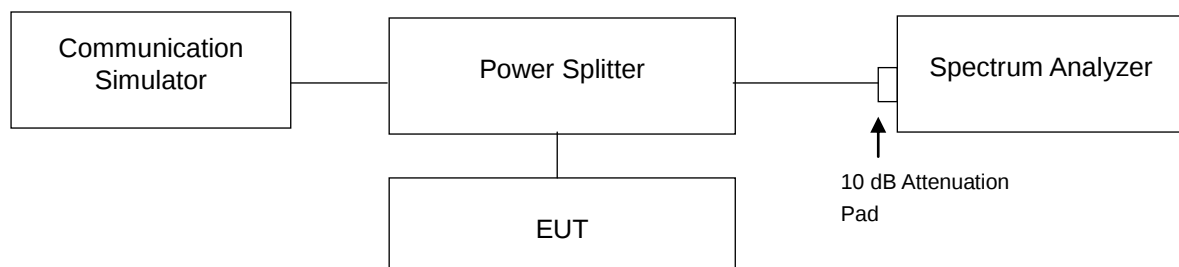

4.4.3 Test Result

Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)
		WCDMA
9262	1852.4	4.15
9400	1880.0	4.15
9538	1907.6	4.14

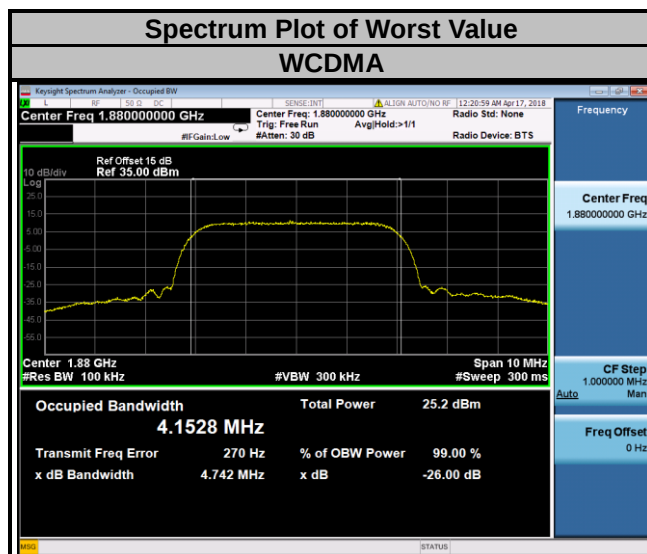


LTE Band 2


Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	1.09	1.09	18615	1851.5	2.70	2.70
18900	1880.0	1.09	1.09	18900	1880.0	2.70	2.70
19193	1909.3	1.09	1.09	19185	1908.5	2.70	2.70

Spectrum Plot of Worst Value


1.4 MHz / 16QAM

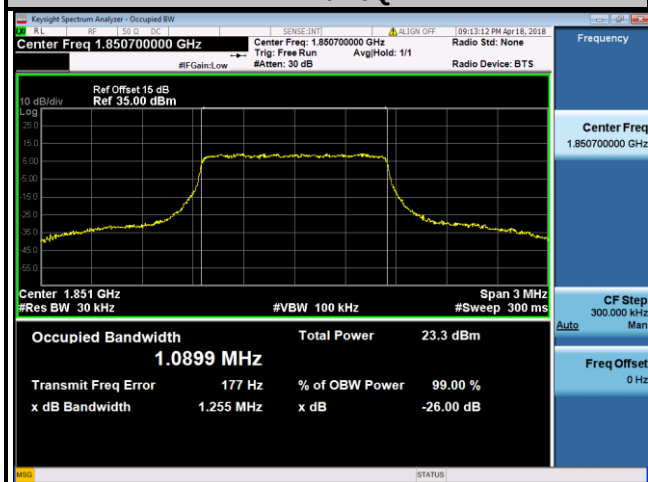


3 MHz / QPSK

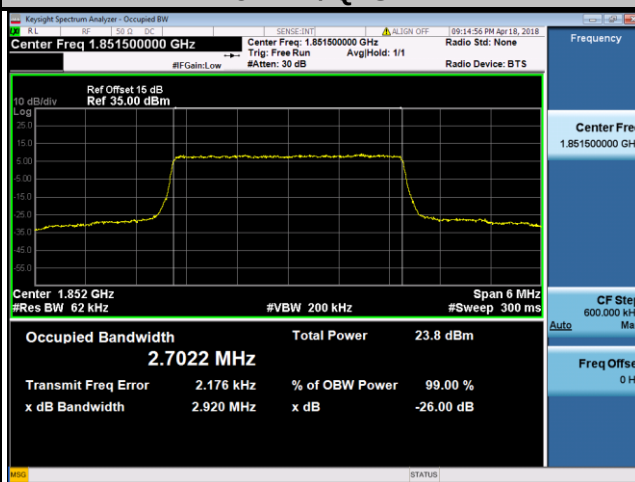

LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.49	4.49	18650	1855.0	8.95	NA
18900	1880.0	4.49	4.49	18900	1880.0	8.95	NA
19175	1907.5	4.49	4.49	19150	1905.0	8.96	NA

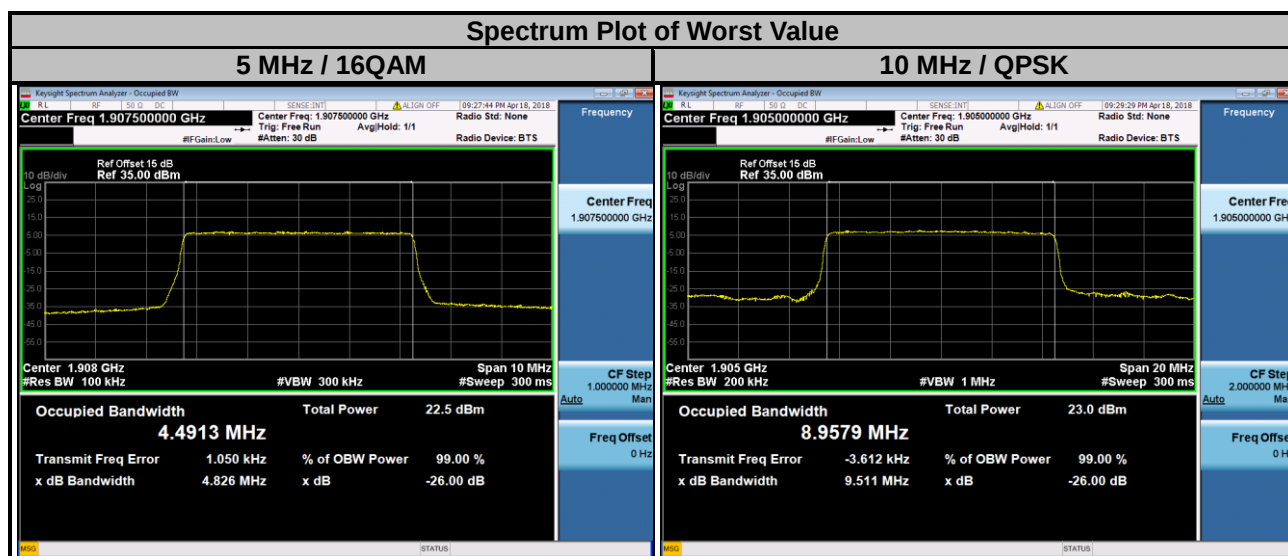

LTE Band 2							
Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	13.43	NA	18700	1860.0	17.91	NA
18900	1880.0	13.44	NA	18900	1880.0	17.91	NA
19125	1902.5	13.43	NA	19100	1900.0	17.91	NA

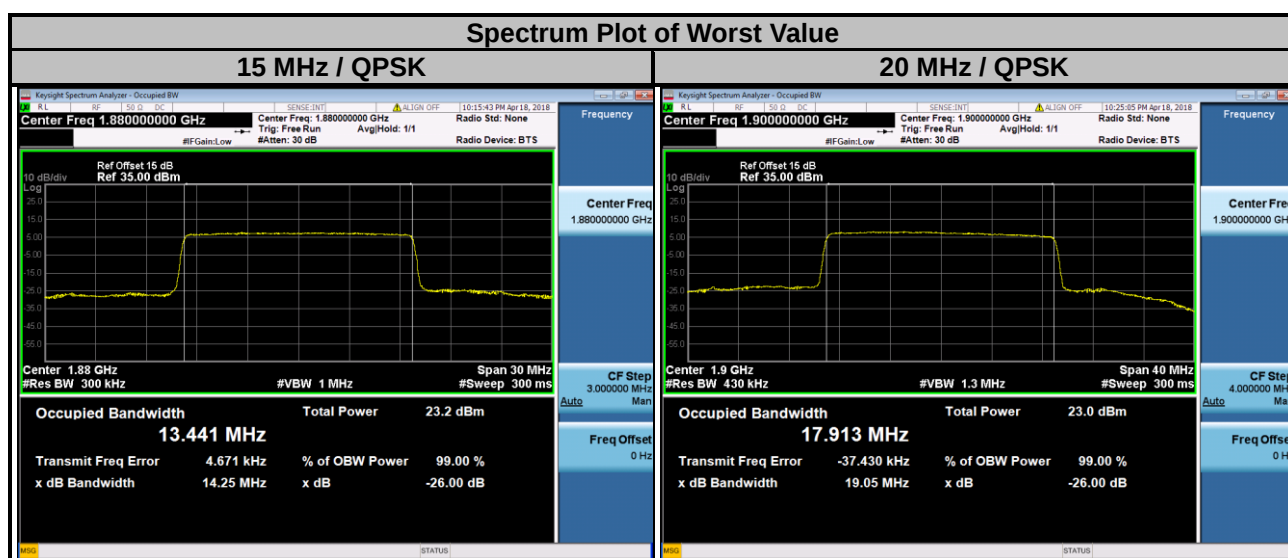


4.5 Band Edge Measurement

4.5.1 Limits of Band Edge Measurement

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.



4.5.2 Test Setup

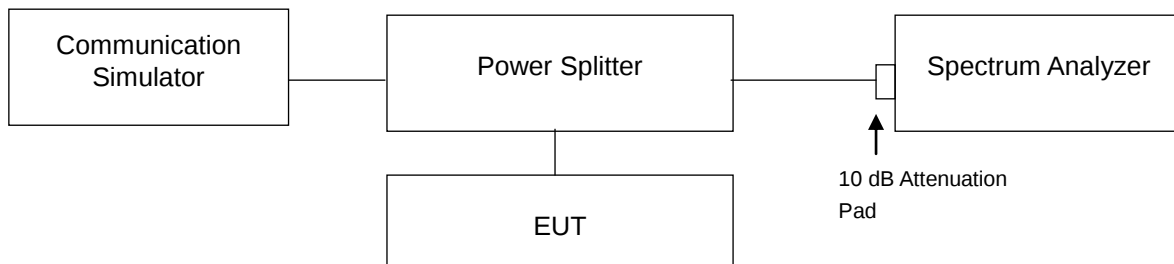



4.5.3 Test Procedures


- All measurements were done at low and high operational frequency range.
- The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (WCDMA).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 1.4 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 62 kHz and VB of the spectrum is 200 kHz (LTE Bandwidth 3 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 200 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 10 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 15 MHz).
- The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 300 kHz and VB of the spectrum is 1 MHz (LTE Bandwidth 20 MHz).
- Record the max trace plot into the test report.


4.5.4 Test Results

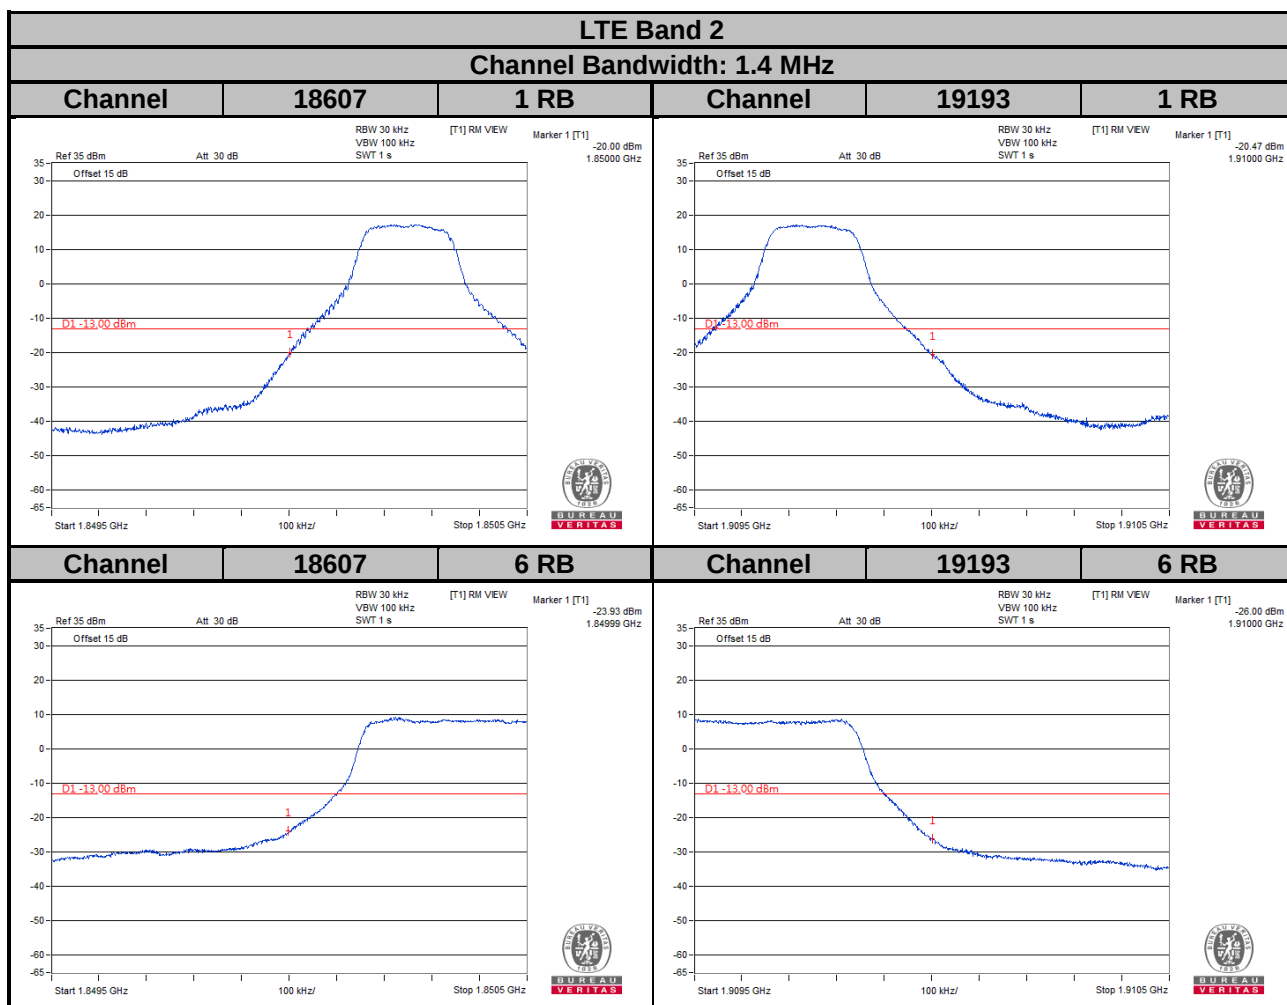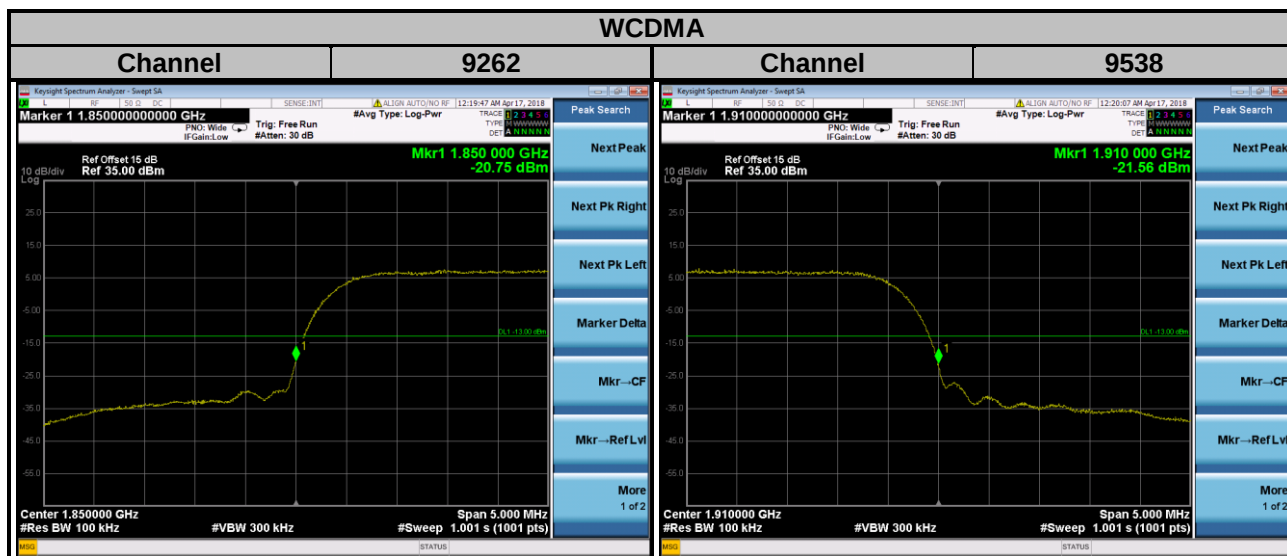

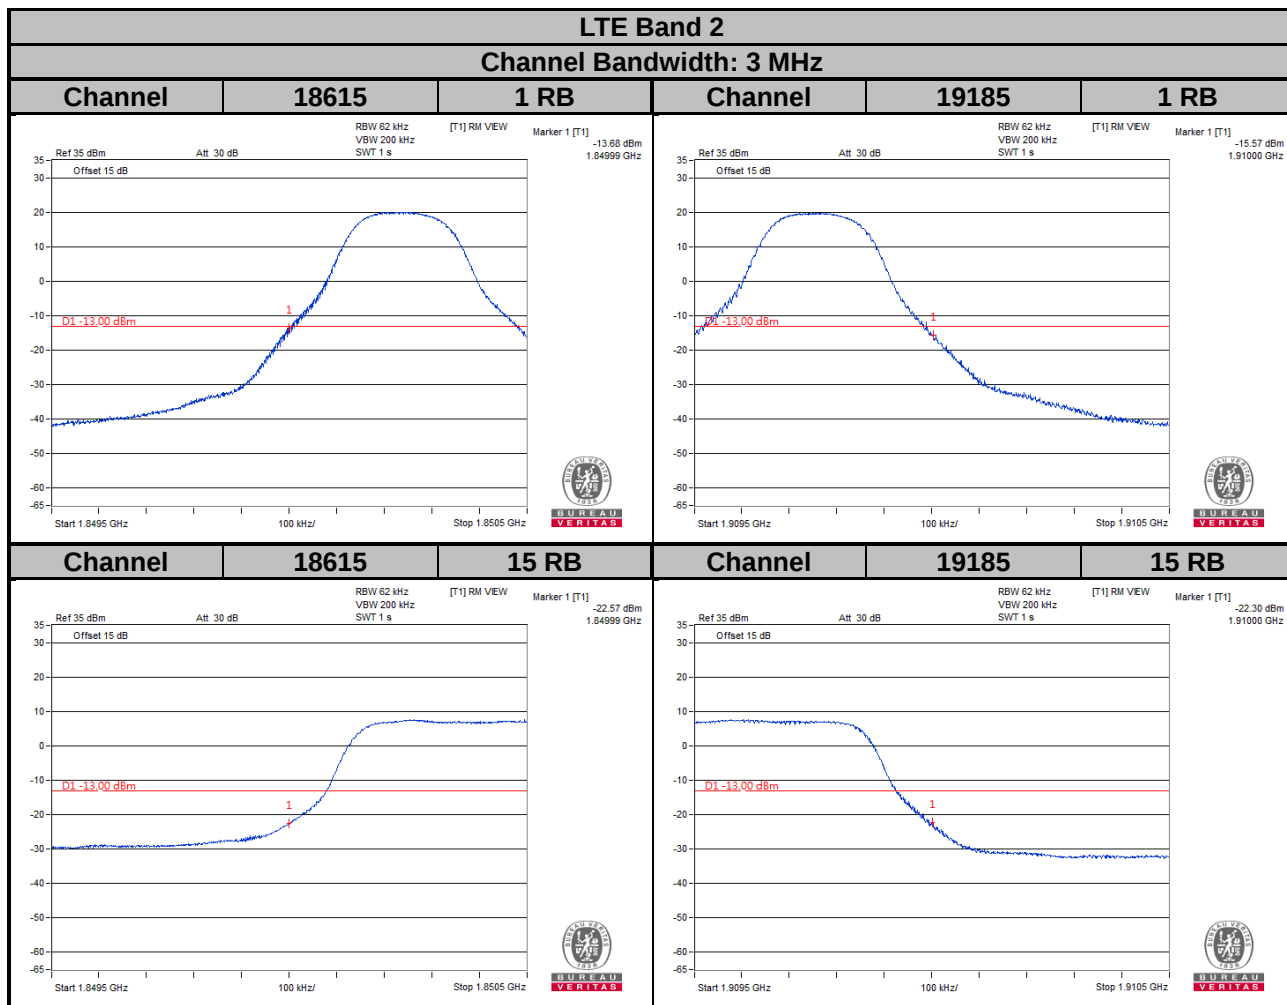

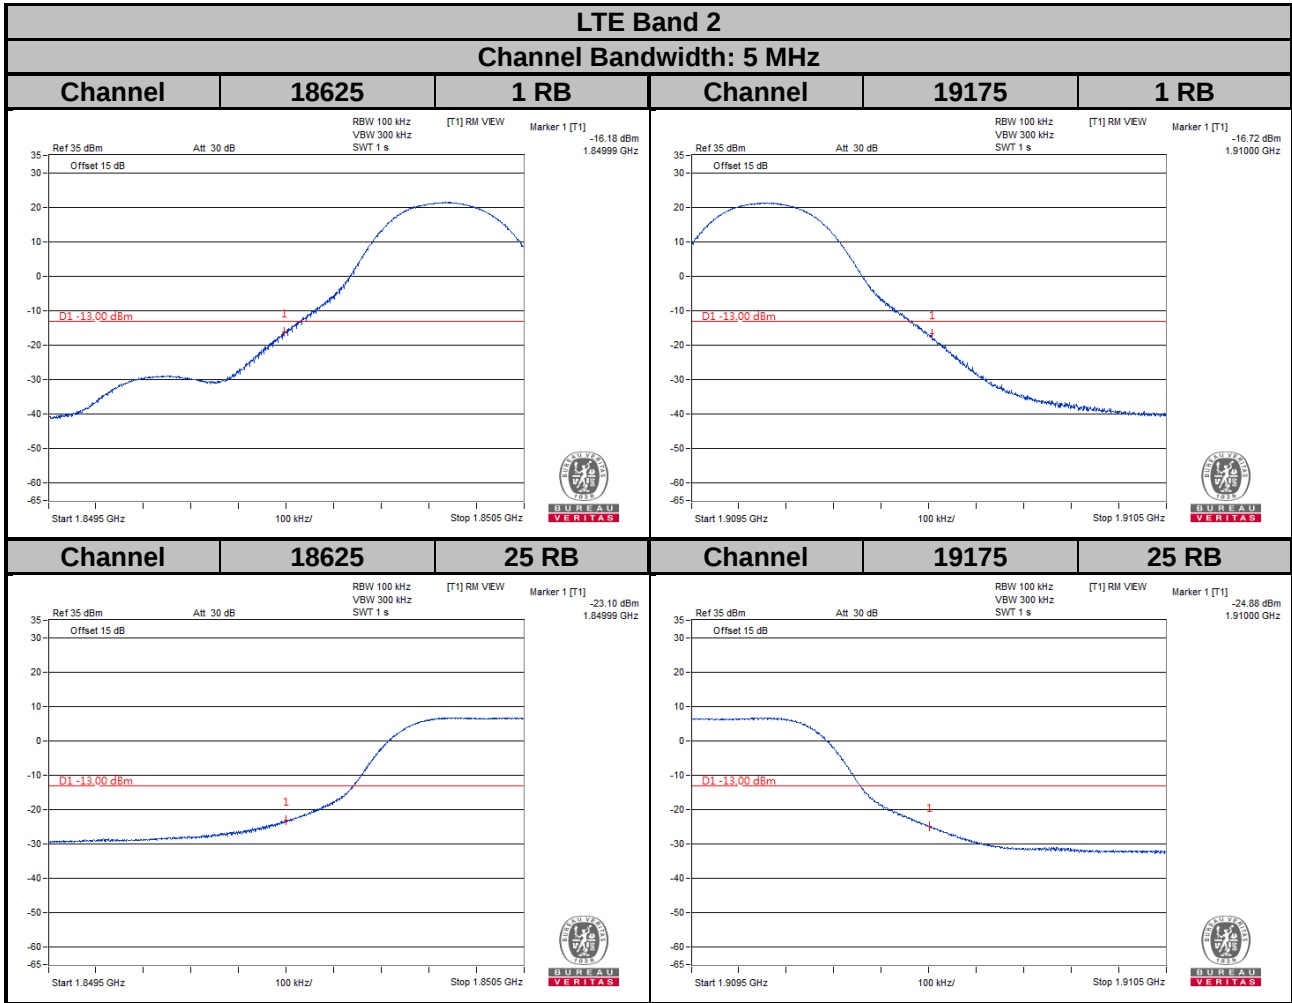


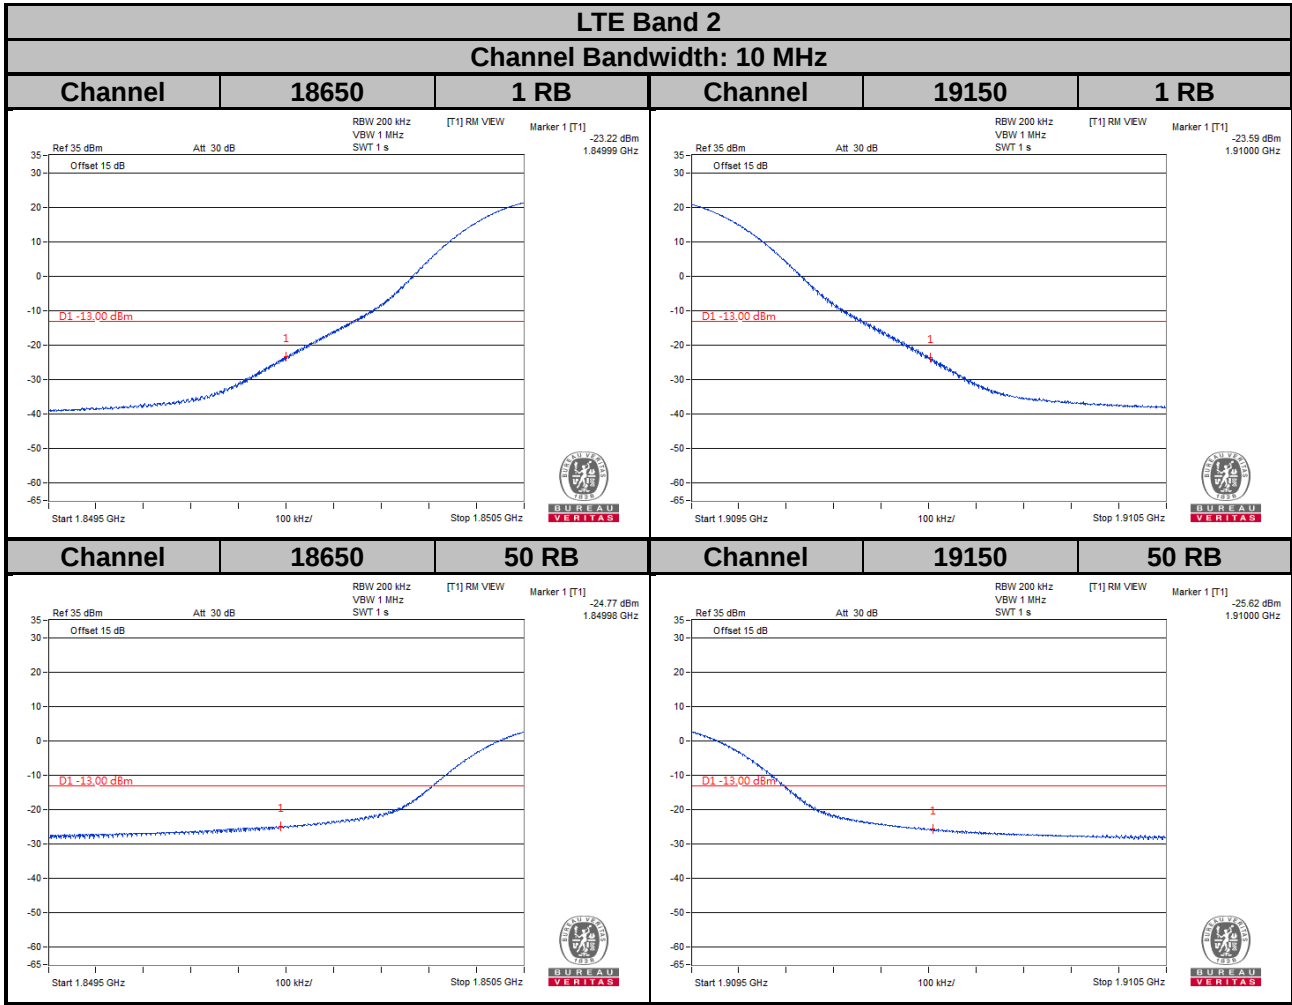

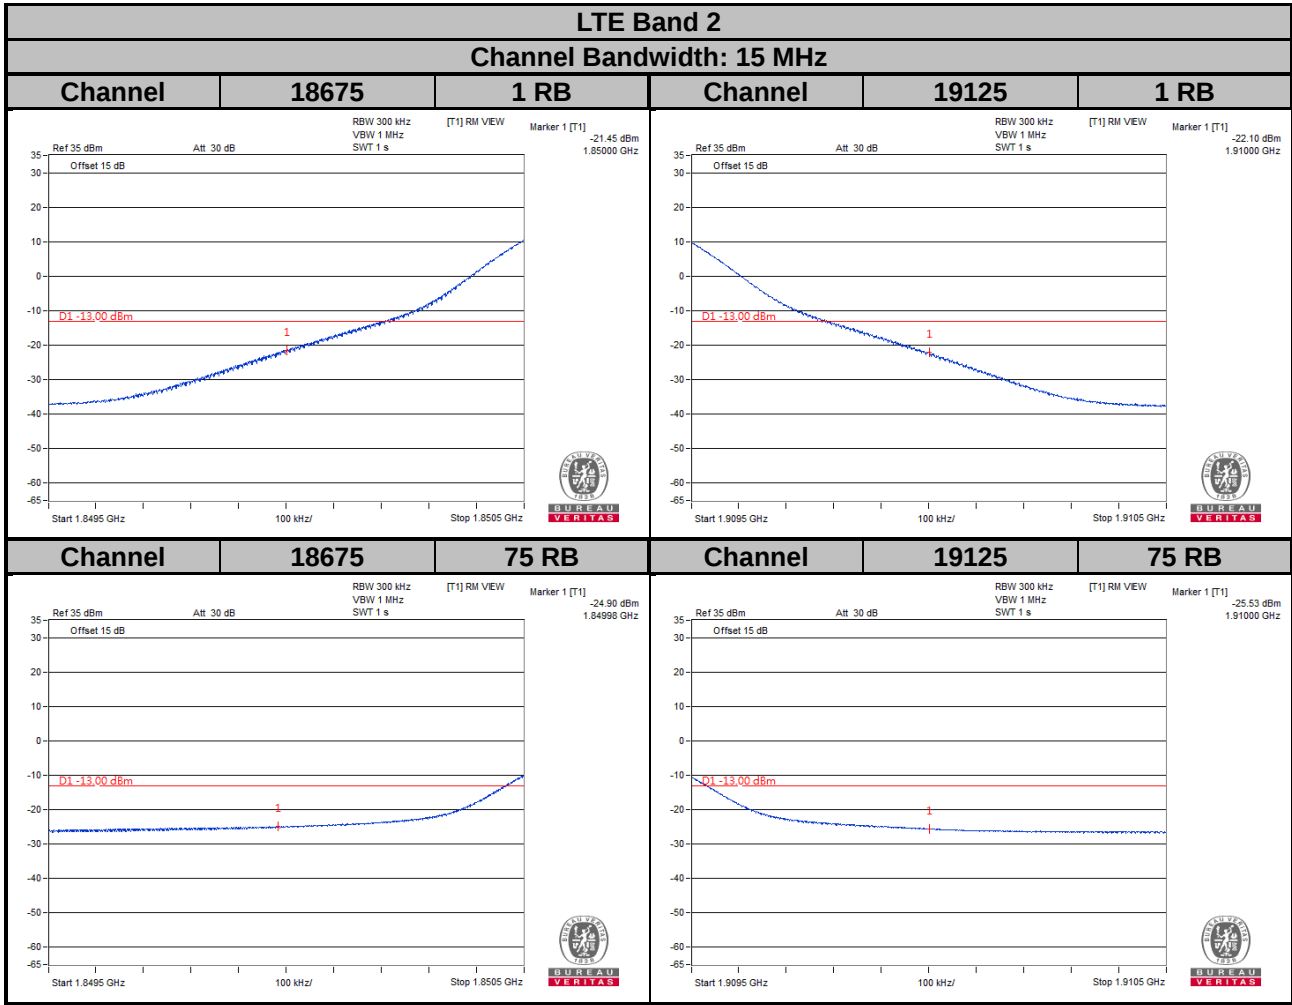

LTE Band 2

Channel Bandwidth: 20 MHz

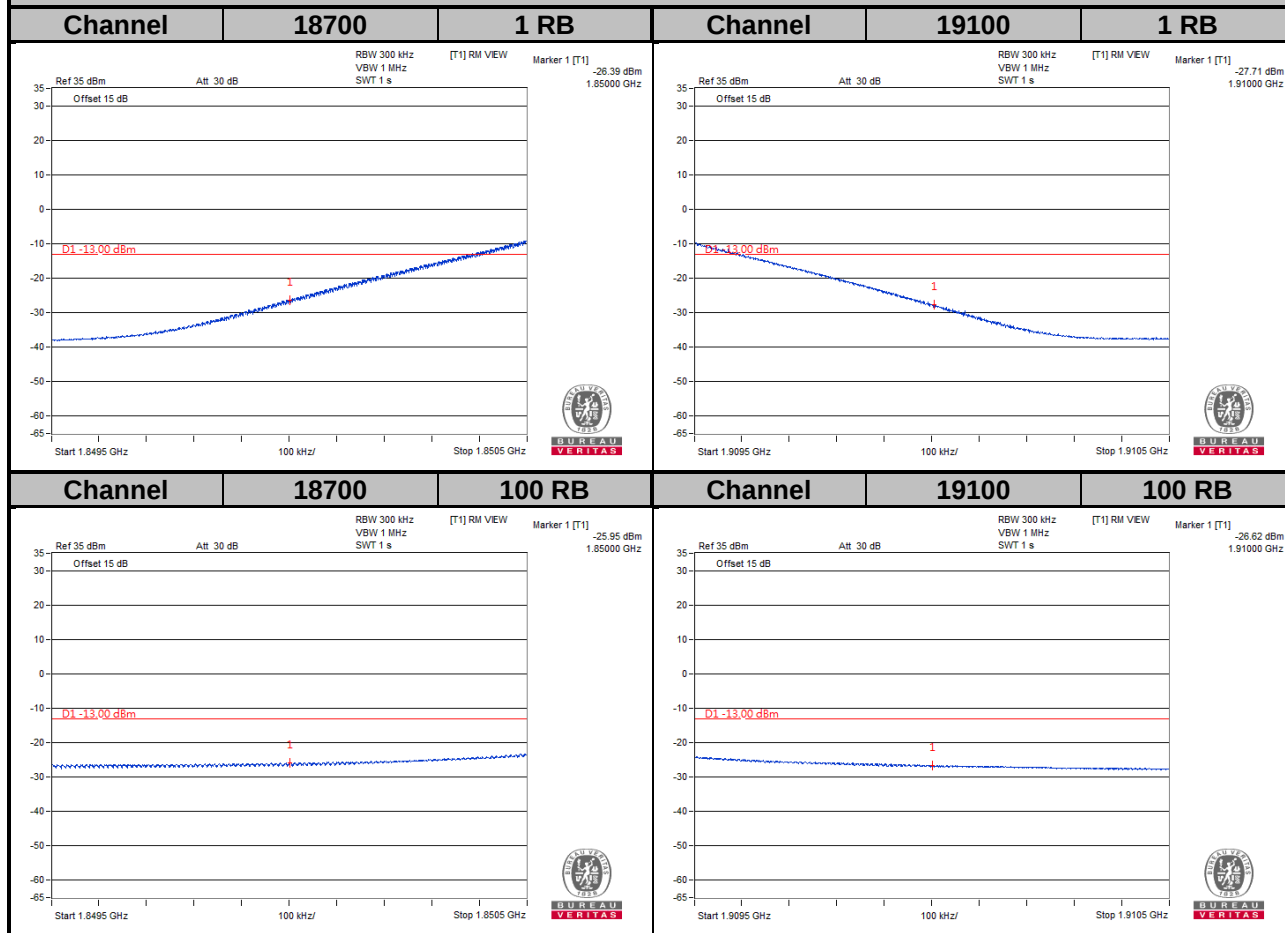


4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

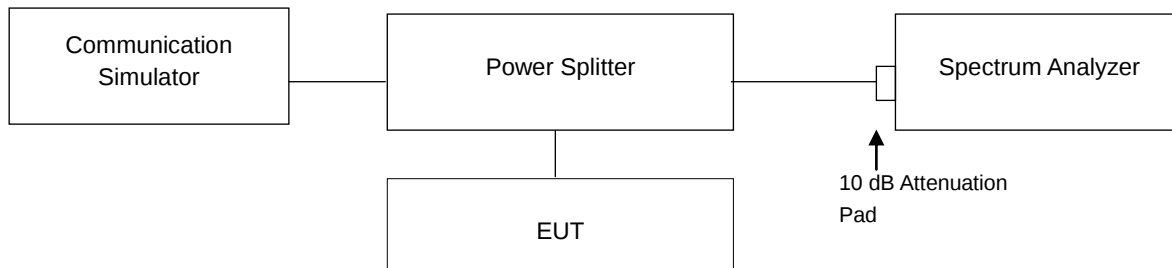


4.6.3 Test Procedures


1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


Channel	Frequency (MHz)	Peak to Average Ratio (dB)
		WCDMA
9262	1852.4	2.76
9400	1880.0	2.87
9538	1907.6	3.00

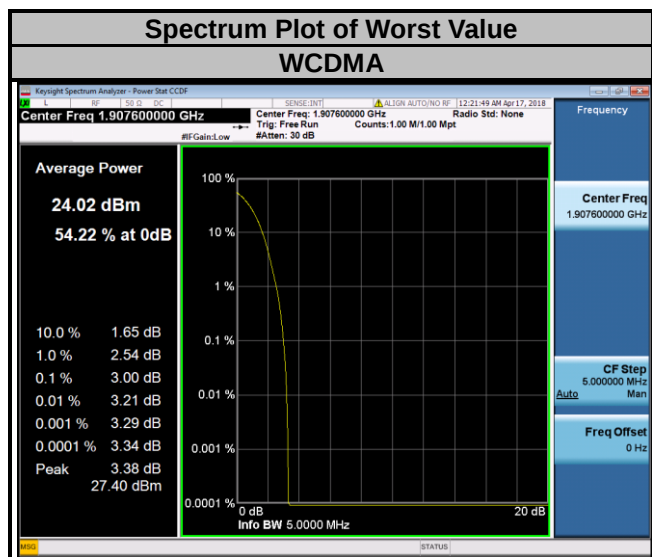

LTE Band 2							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18607	1850.7	4.19	4.93	18615	1851.5	4.12	5.08
18900	1880.0	4.26	5.04	18900	1880.0	4.22	5.12
19193	1909.3	4.47	5.31	19185	1908.5	4.38	5.26

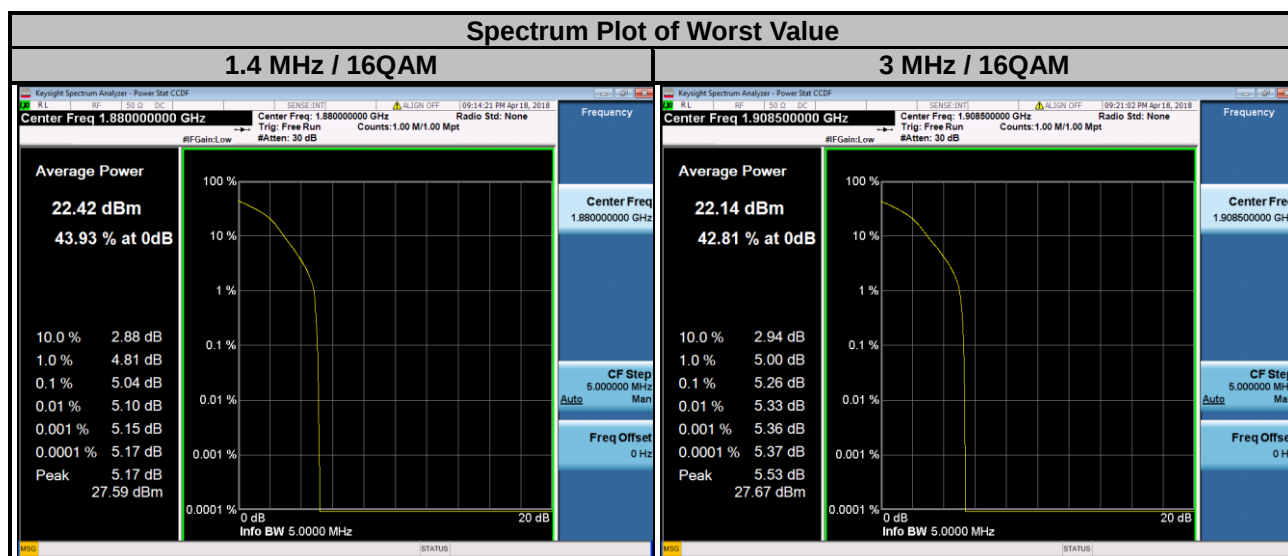

LTE Band 2							
Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18625	1852.5	4.15	4.96	18650	1855.0	4.10	NA
18900	1880.0	4.28	5.13	18900	1880.0	4.19	NA
19175	1907.5	4.31	5.15	19150	1905.0	4.01	NA

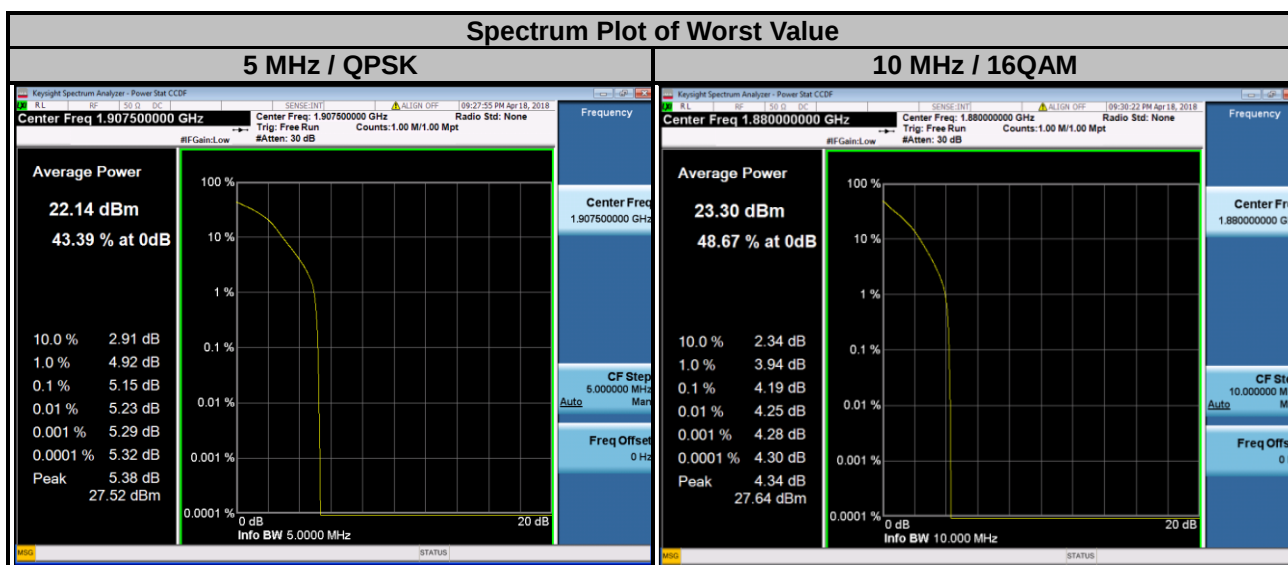


LTE Band 2


Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
18675	1857.5	4.02	NA	18700	1860.0	4.01	NA
18900	1880.0	4.14	NA	18900	1880.0	4.07	NA
19125	1902.5	3.80	NA	19100	1900.0	3.97	NA

Spectrum Plot of Worst Value

15 MHz / 16QAM

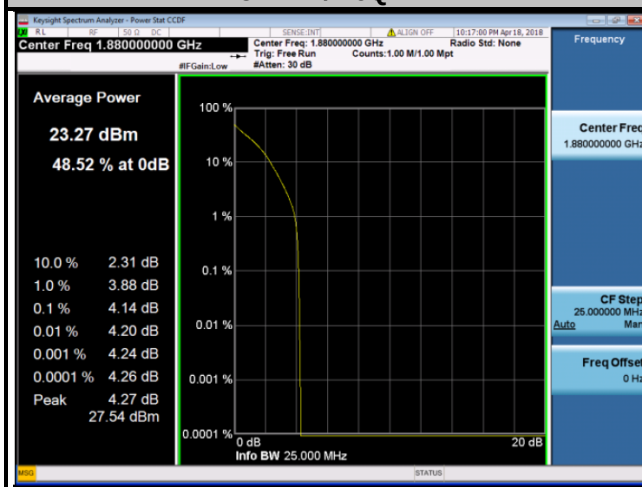

20 MHz / 16QAM

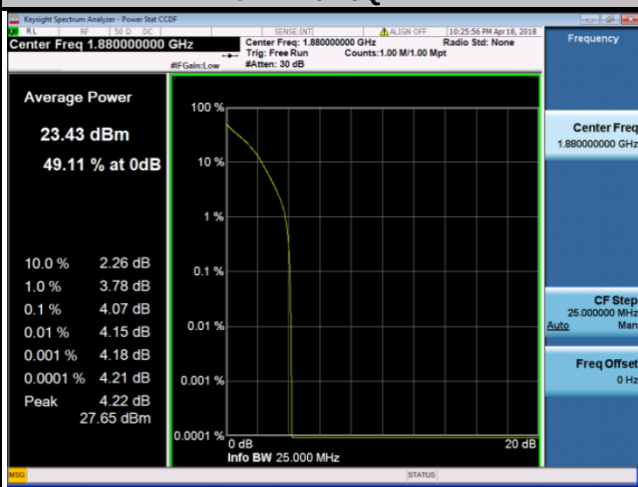


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.


4.7.2 Test Setup

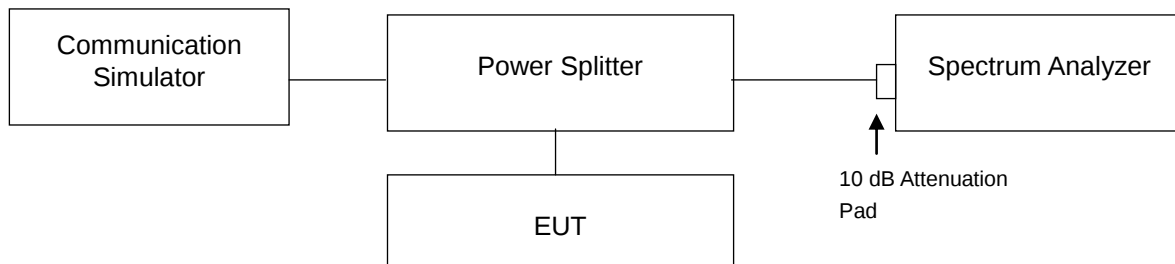

4.7.3 Test Procedure


- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- For WCDM, measuring frequency range is from 30 MHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz is used for conducted emission measurement.
- For WCDM, measuring frequency range is from 1 GHz to 26.5 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.
- For LTE, measuring frequency range is from 30 MHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 MHz is used for conducted emission measurement.
- For LTE, measuring frequency range is from 1 GHz to 27 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz is used for conducted emission measurement.

4.7.4 Test Results

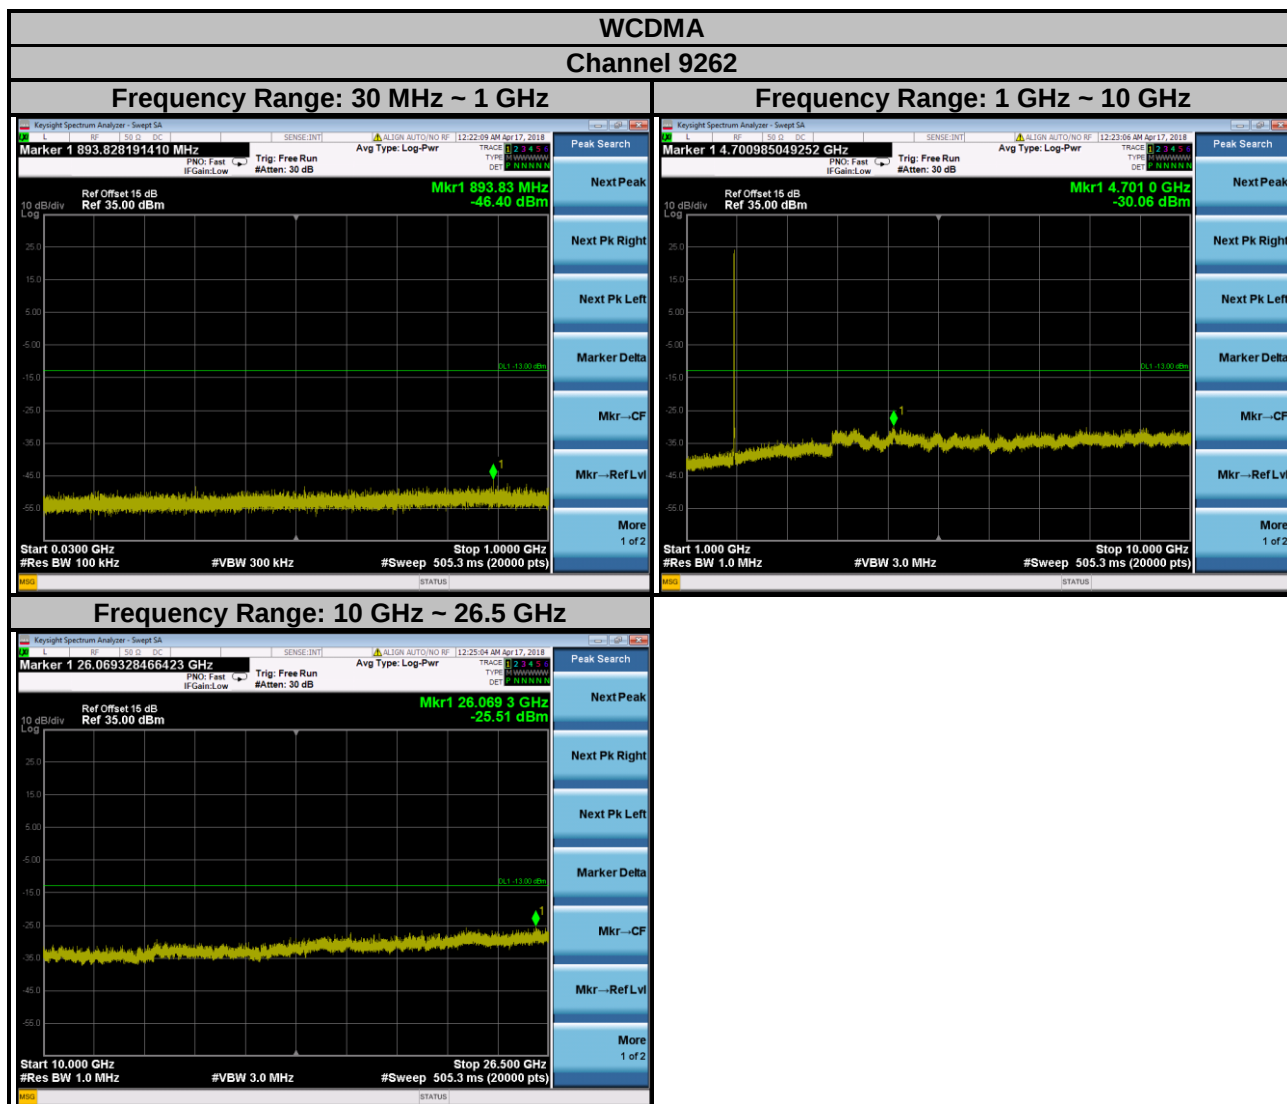


WCDMA Channel 9400


Frequency Range: 30 MHz ~ 1 GHz

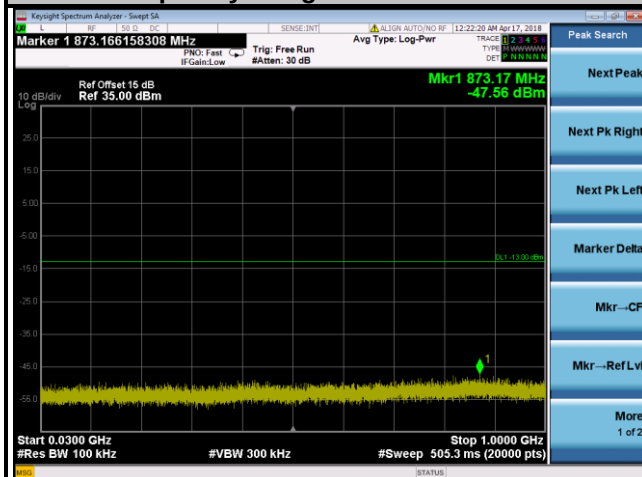

Frequency Range: 1 GHz ~ 10 GHz

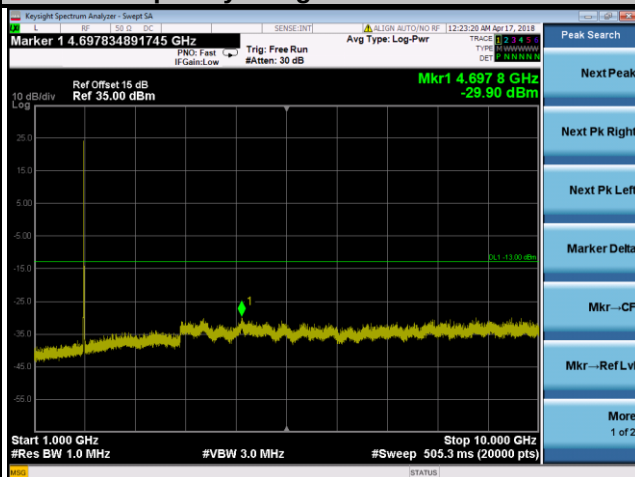


Frequency Range: 10 GHz ~ 26.5 GHz

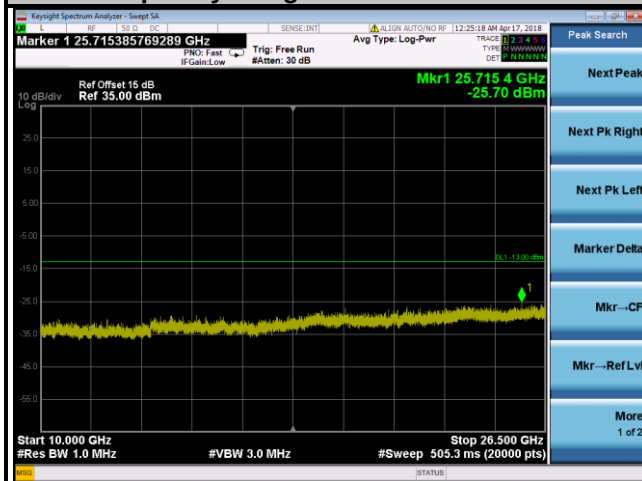


WCDMA Channel 9538


Frequency Range: 30 MHz ~ 1 GHz

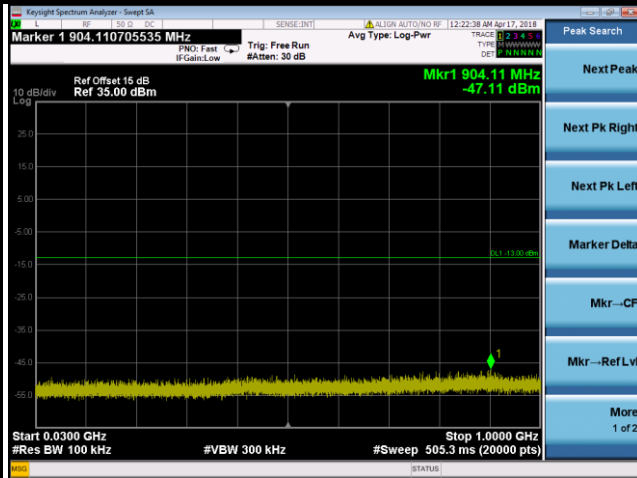

Frequency Range: 1 GHz ~ 10 GHz

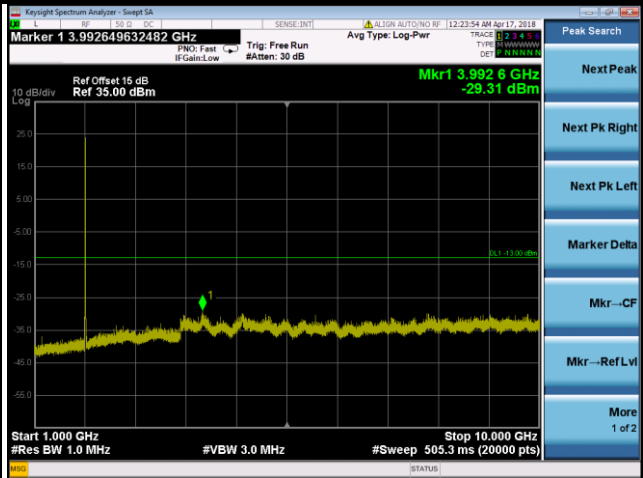

Frequency Range: 10 GHz ~ 26.5 GHz

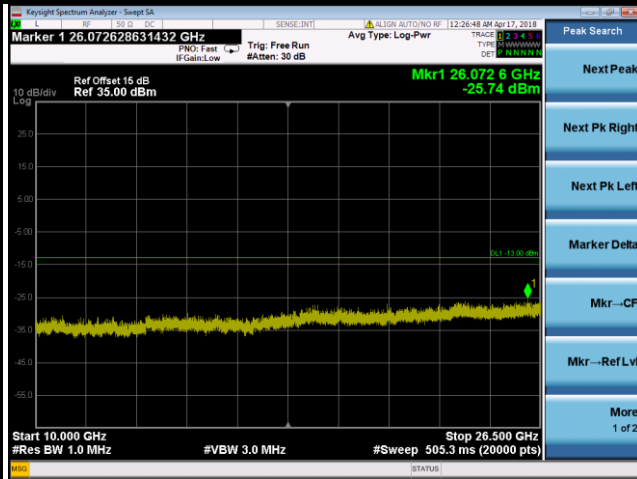


LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 18607


Frequency Range: 30 MHz ~ 1 GHz

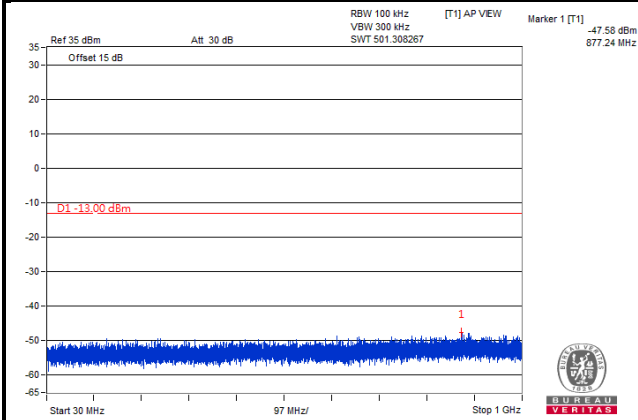

Frequency Range: 1 GHz ~ 10 GHz

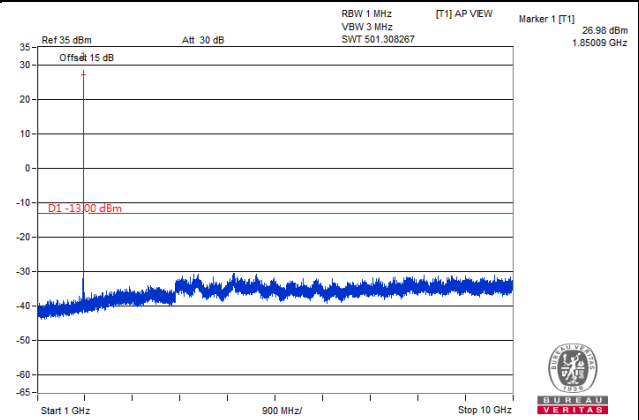

Frequency Range: 10 GHz ~ 27 GHz

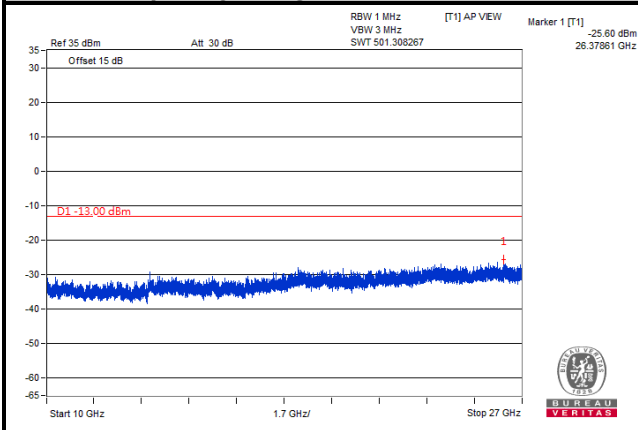


LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

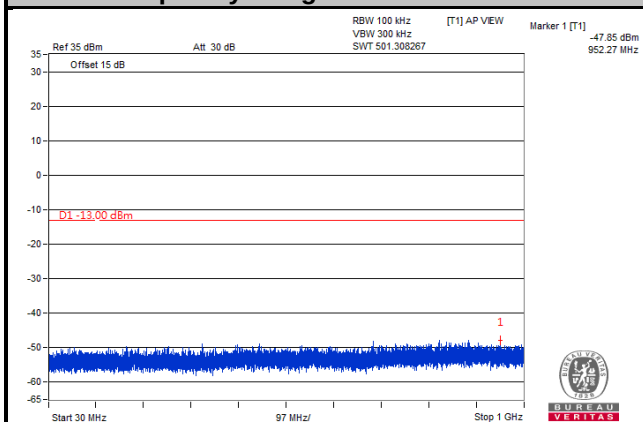

Frequency Range: 1 GHz ~ 10 GHz

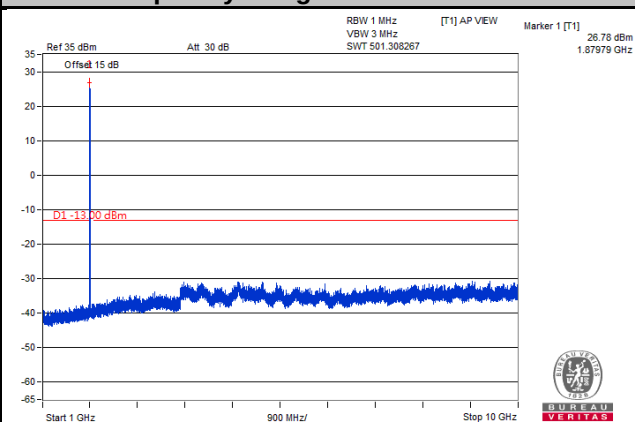

Frequency Range: 10 GHz ~ 27 GHz

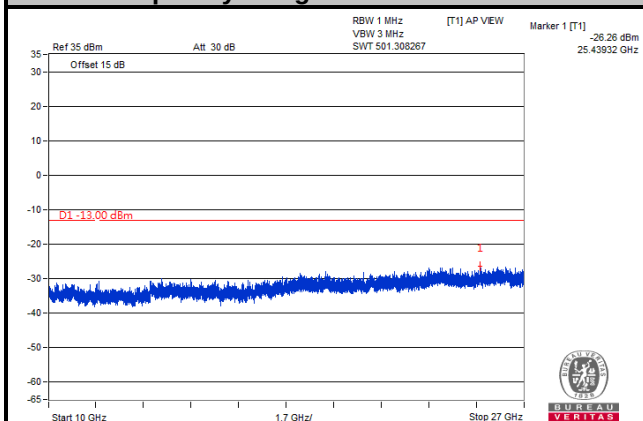


LTE Band 2


Channel Bandwidth: 1.4 MHz

Channel 19193


Frequency Range: 30 MHz ~ 1 GHz

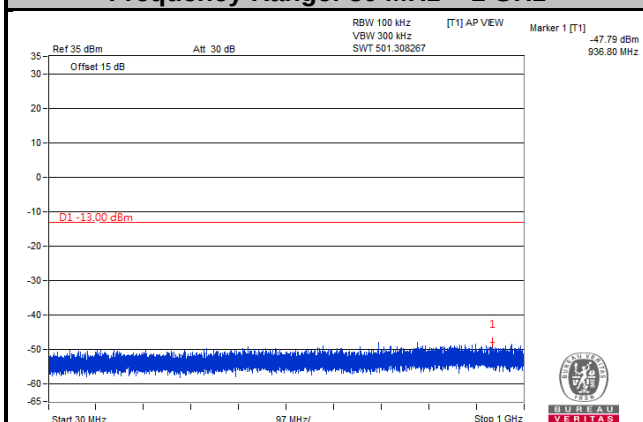

Frequency Range: 1 GHz ~ 10 GHz

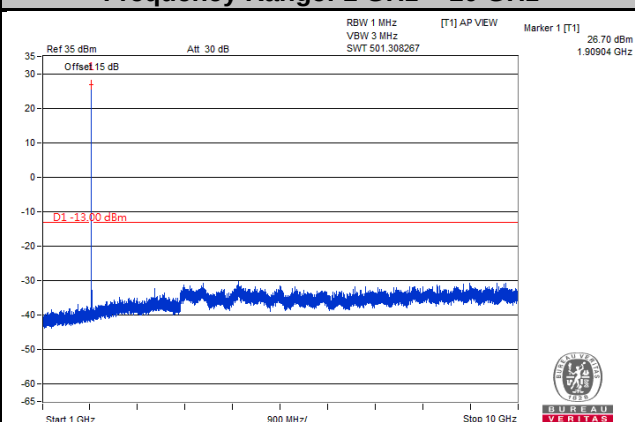

Frequency Range: 10 GHz ~ 27 GHz

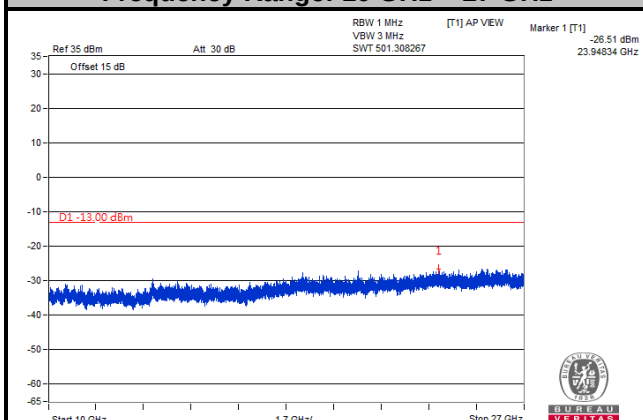


LTE Band 2


Channel Bandwidth: 3 MHz

Channel 18615


Frequency Range: 30 MHz ~ 1 GHz

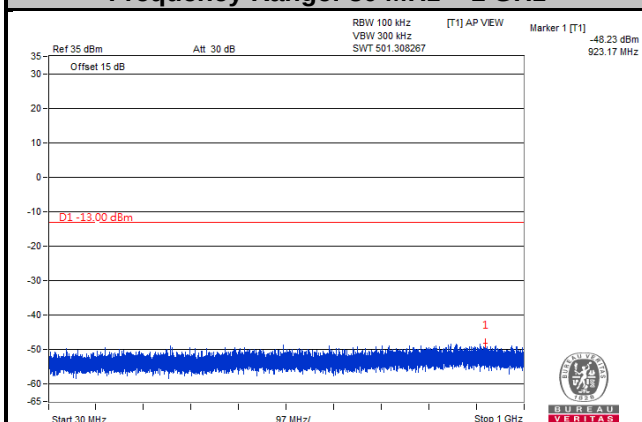

Frequency Range: 1 GHz ~ 10 GHz

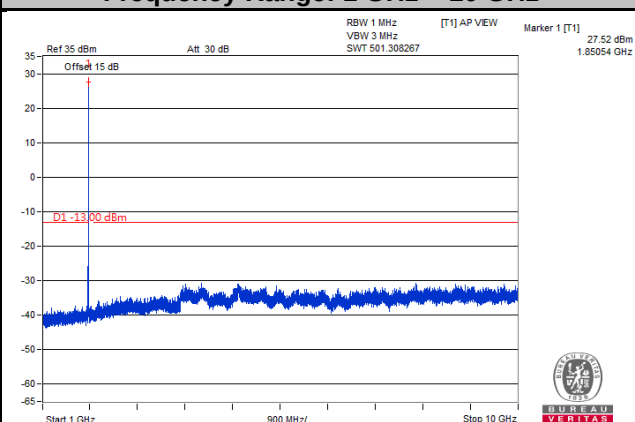

Frequency Range: 10 GHz ~ 27 GHz

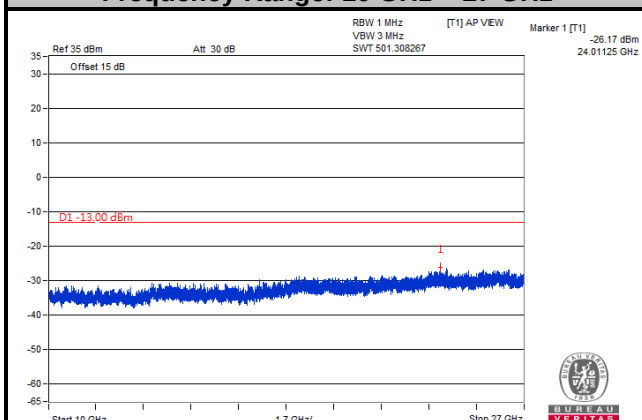


LTE Band 2


Channel Bandwidth: 3 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

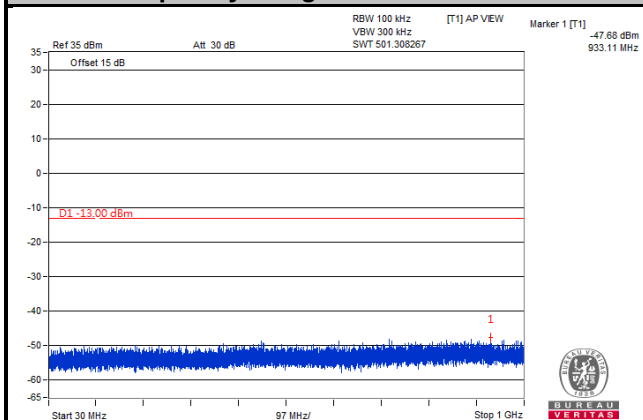

Frequency Range: 1 GHz ~ 10 GHz

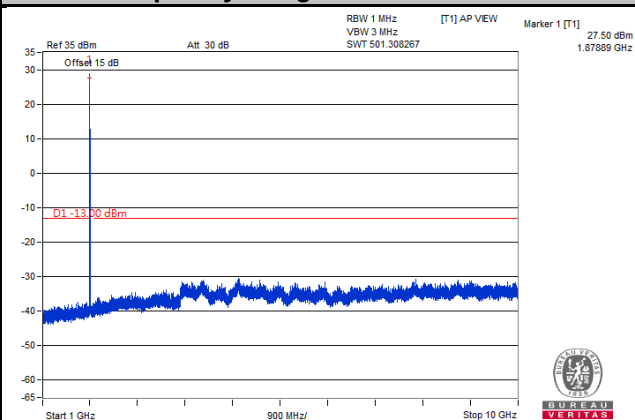

Frequency Range: 10 GHz ~ 27 GHz

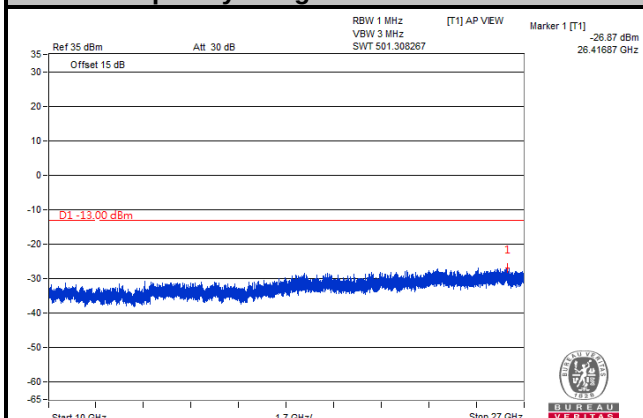


LTE Band 2


Channel Bandwidth: 3 MHz

Channel 19185


Frequency Range: 30 MHz ~ 1 GHz

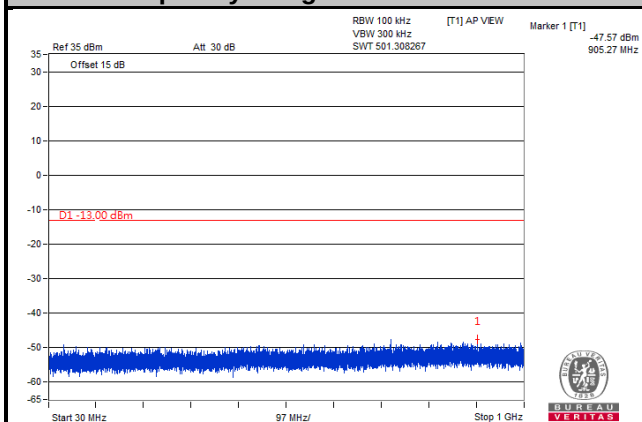

Frequency Range: 1 GHz ~ 10 GHz

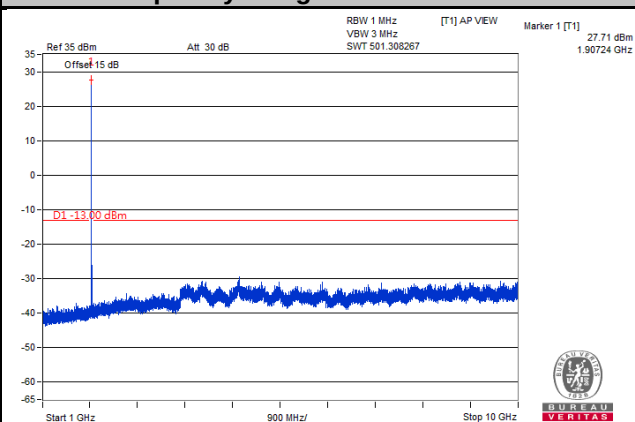

Frequency Range: 10 GHz ~ 27 GHz

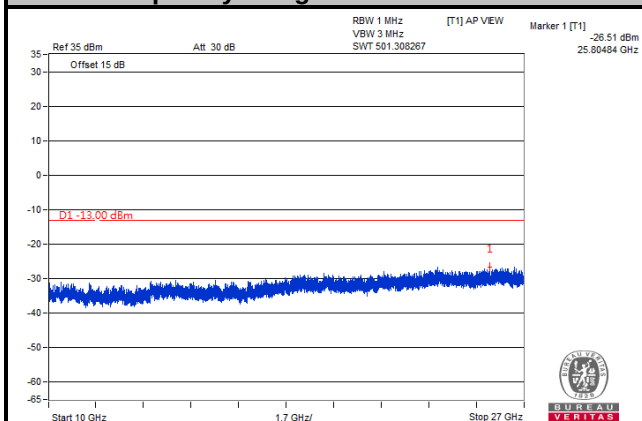


LTE Band 2


Channel Bandwidth: 5 MHz

Channel 18625


Frequency Range: 30 MHz ~ 1 GHz

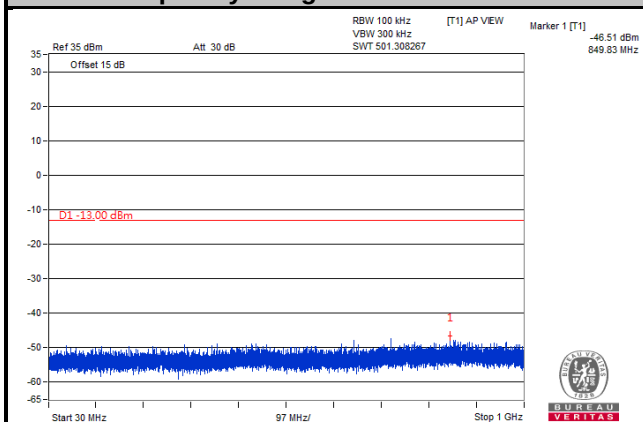

Frequency Range: 1 GHz ~ 10 GHz

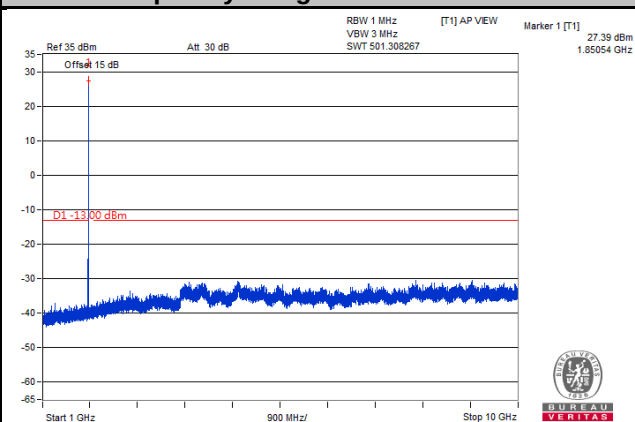

Frequency Range: 10 GHz ~ 27 GHz

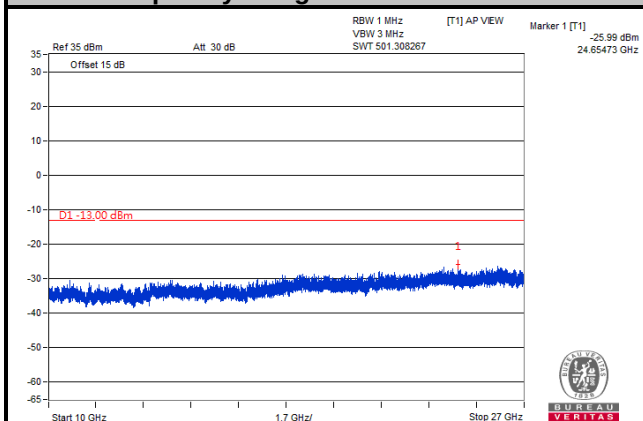


LTE Band 2


Channel Bandwidth: 5 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

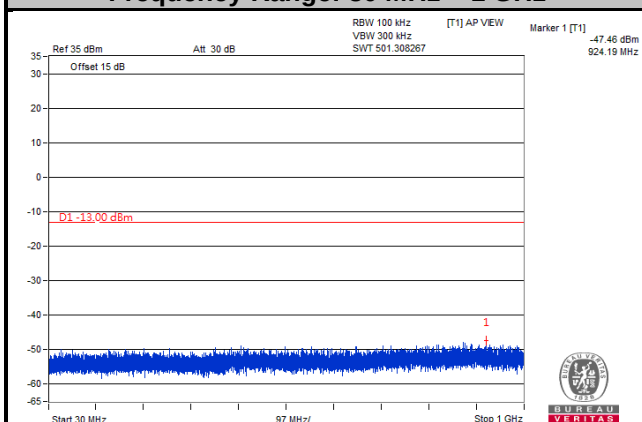

Frequency Range: 1 GHz ~ 10 GHz

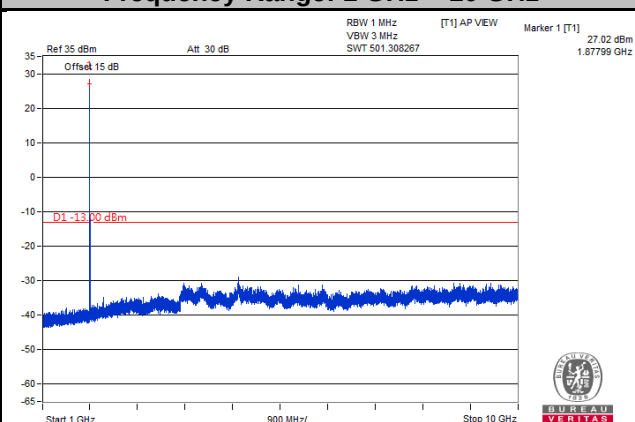

Frequency Range: 10 GHz ~ 27 GHz

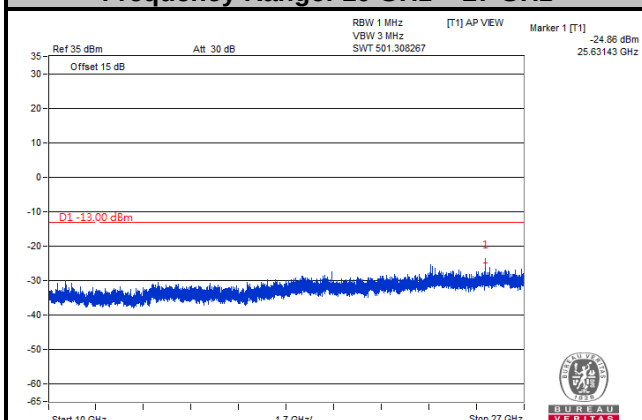


LTE Band 2


Channel Bandwidth: 5 MHz

Channel 19175


Frequency Range: 30 MHz ~ 1 GHz

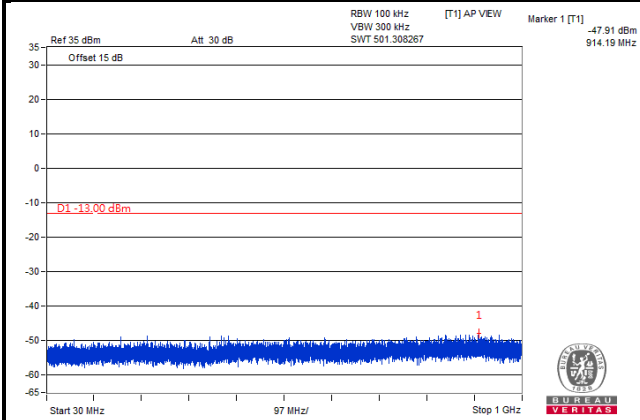

Frequency Range: 1 GHz ~ 10 GHz

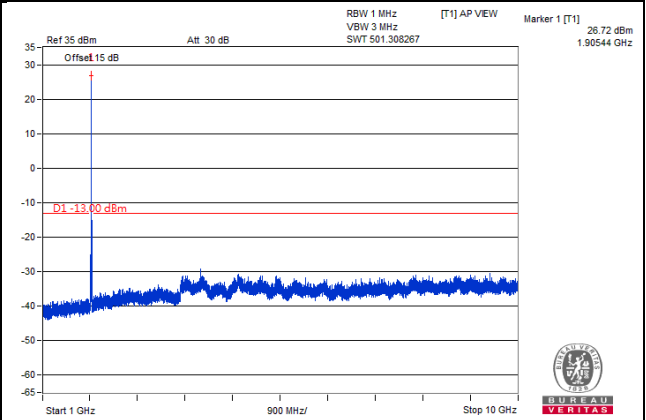

Frequency Range: 10 GHz ~ 27 GHz

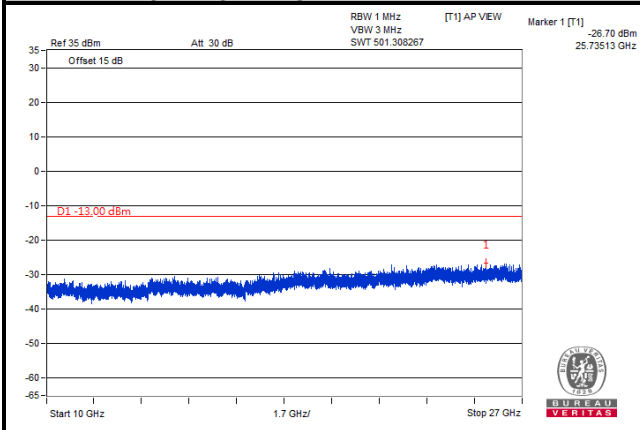


LTE Band 2


Channel Bandwidth: 10 MHz

Channel 18650


Frequency Range: 30 MHz ~ 1 GHz

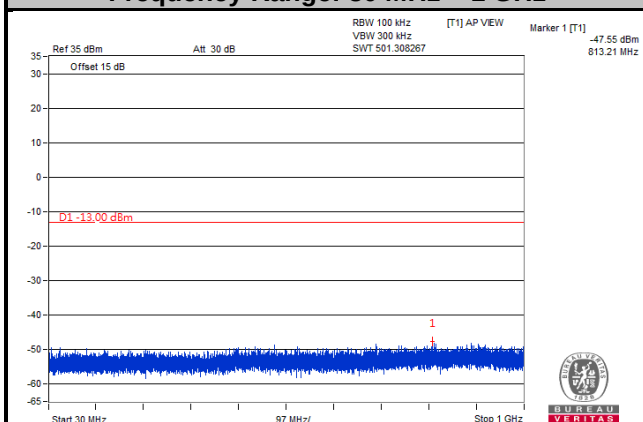

Frequency Range: 1 GHz ~ 10 GHz

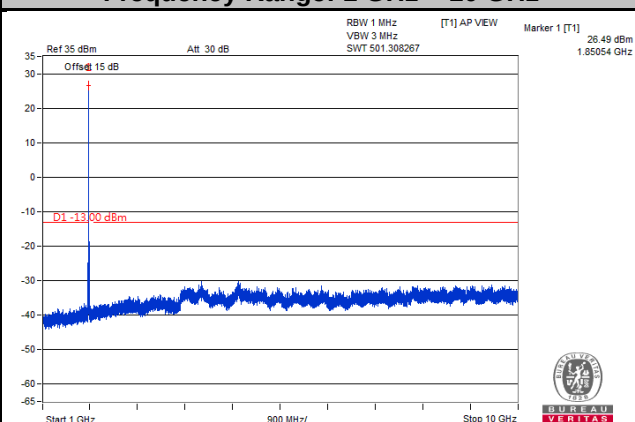

Frequency Range: 10 GHz ~ 27 GHz

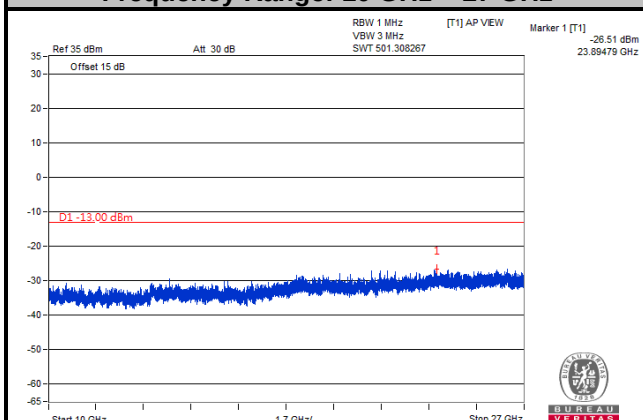


LTE Band 2


Channel Bandwidth: 10 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

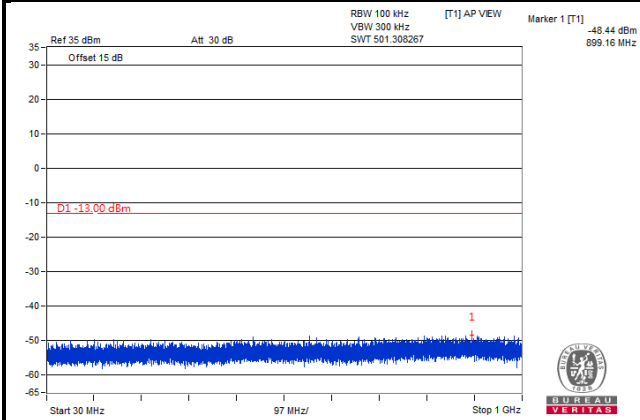

Frequency Range: 1 GHz ~ 10 GHz

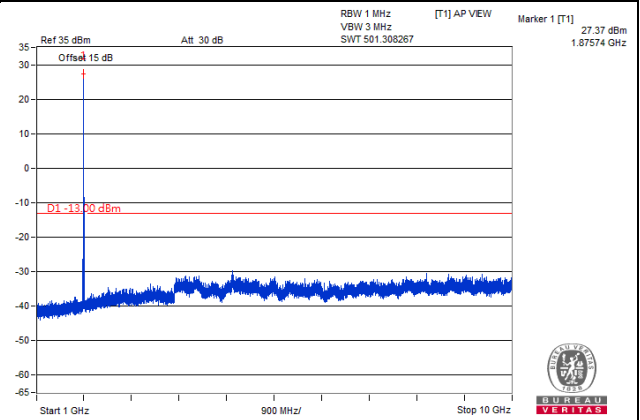

Frequency Range: 10 GHz ~ 27 GHz

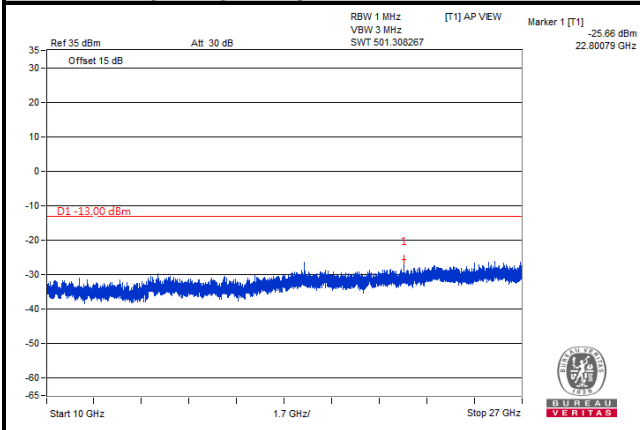


LTE Band 2


Channel Bandwidth: 10 MHz

Channel 19150


Frequency Range: 30 MHz ~ 1 GHz

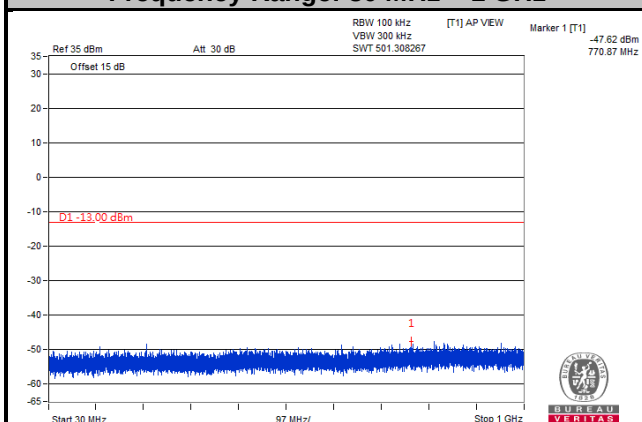

Frequency Range: 1 GHz ~ 10 GHz

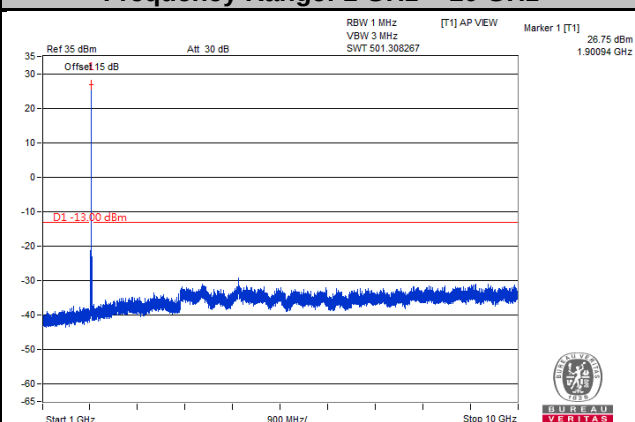

Frequency Range: 10 GHz ~ 27 GHz

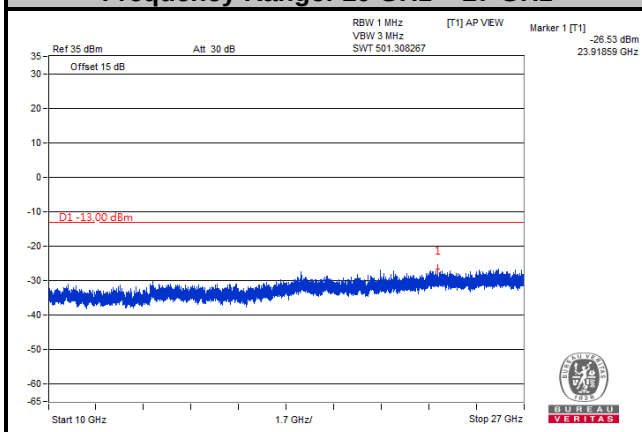


LTE Band 2


Channel Bandwidth: 15 MHz

Channel 18675


Frequency Range: 30 MHz ~ 1 GHz

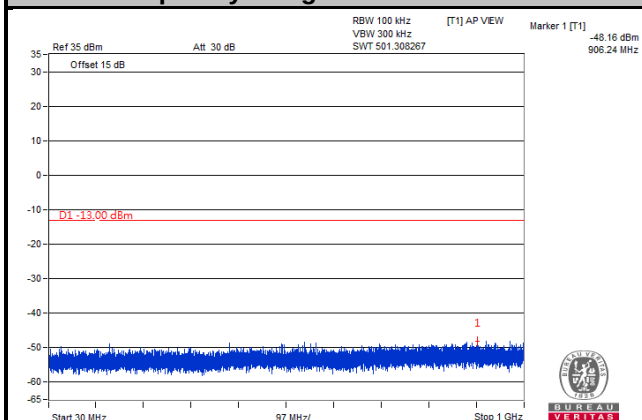

Frequency Range: 1 GHz ~ 10 GHz

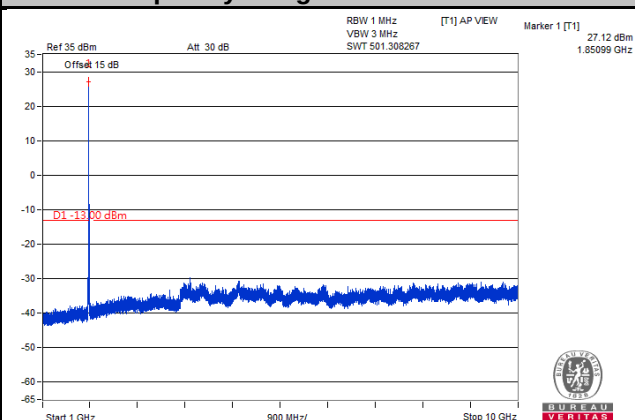

Frequency Range: 10 GHz ~ 27 GHz

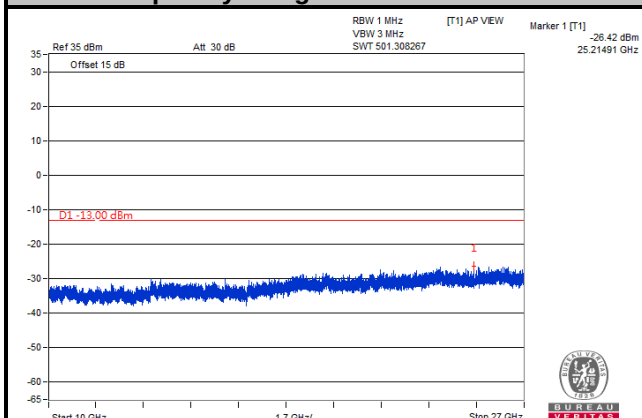


LTE Band 2


Channel Bandwidth: 15 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

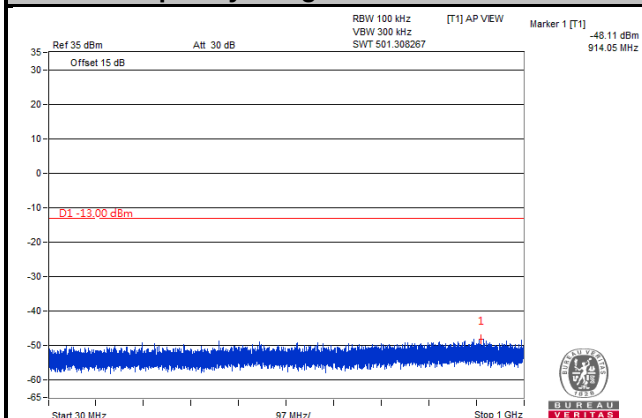

Frequency Range: 1 GHz ~ 10 GHz

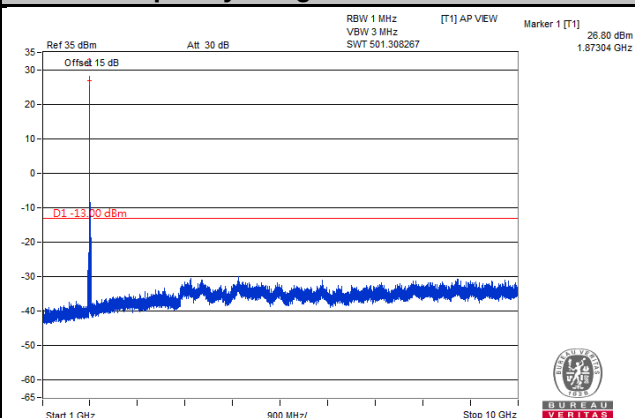

Frequency Range: 10 GHz ~ 27 GHz

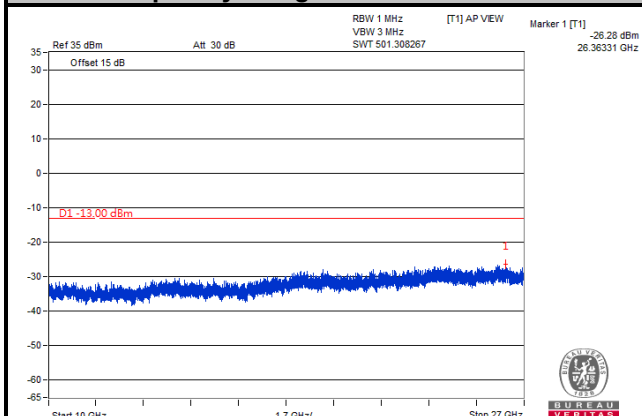


LTE Band 2


Channel Bandwidth: 15 MHz

Channel 19125


Frequency Range: 30 MHz ~ 1 GHz

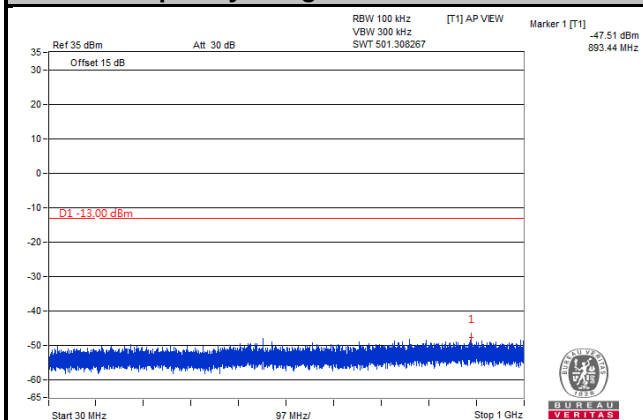

Frequency Range: 1 GHz ~ 10 GHz

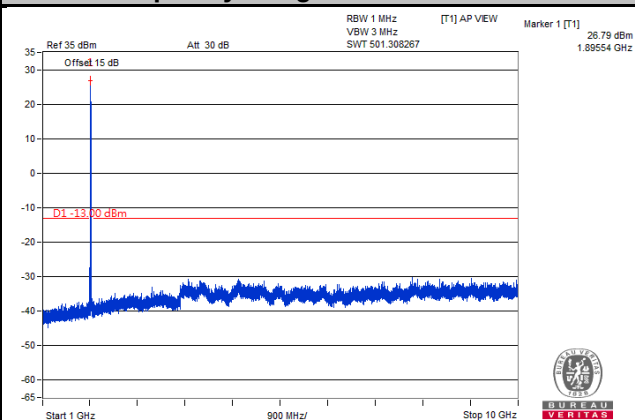

Frequency Range: 10 GHz ~ 27 GHz

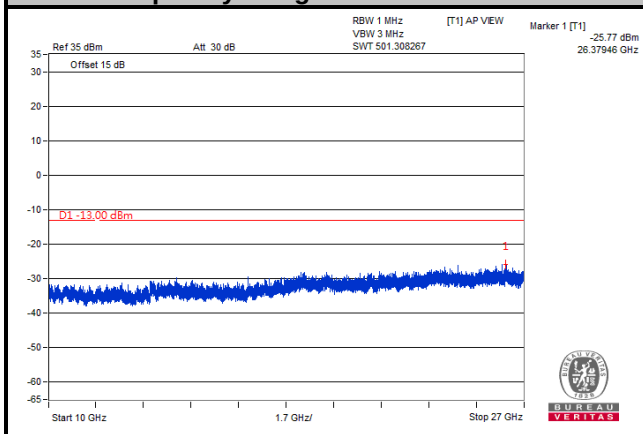


LTE Band 2


Channel Bandwidth: 20 MHz

Channel 18700


Frequency Range: 30 MHz ~ 1 GHz

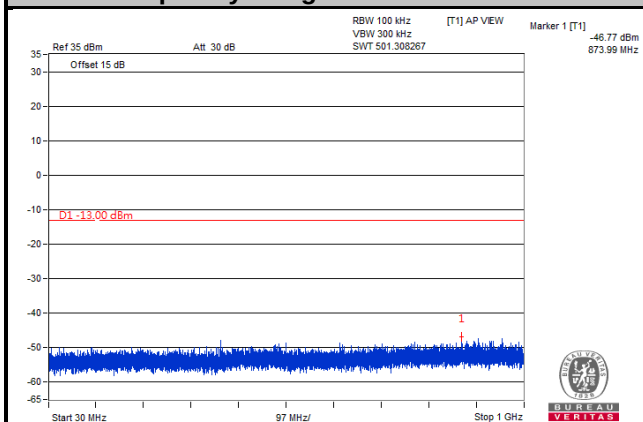

Frequency Range: 1 GHz ~ 10 GHz

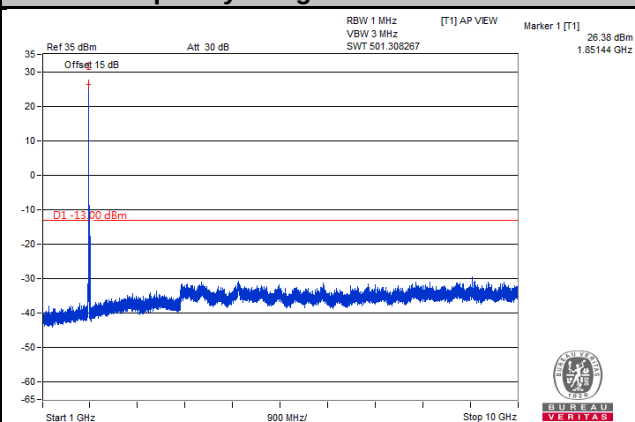

Frequency Range: 10 GHz ~ 27 GHz

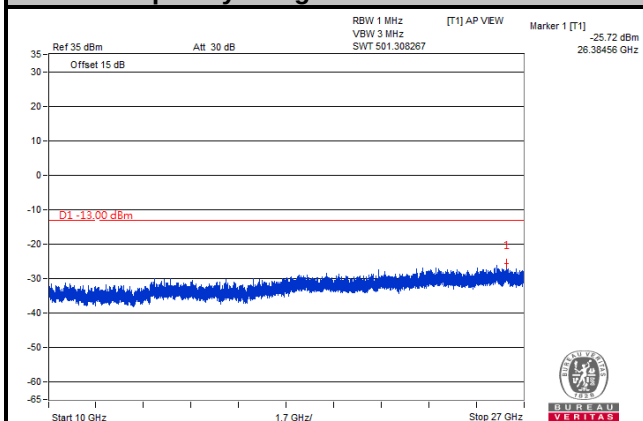


LTE Band 2


Channel Bandwidth: 20 MHz

Channel 18900


Frequency Range: 30 MHz ~ 1 GHz

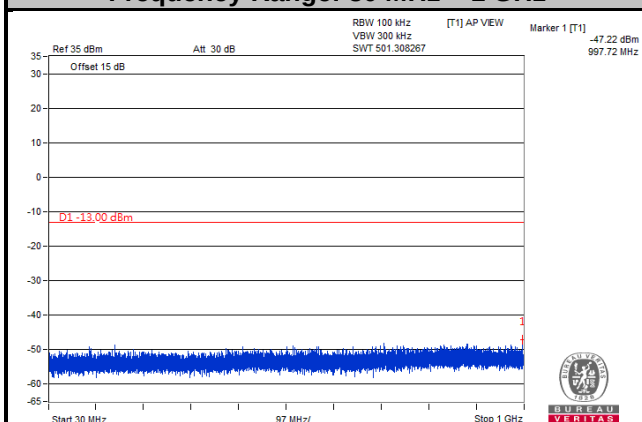

Frequency Range: 1 GHz ~ 10 GHz

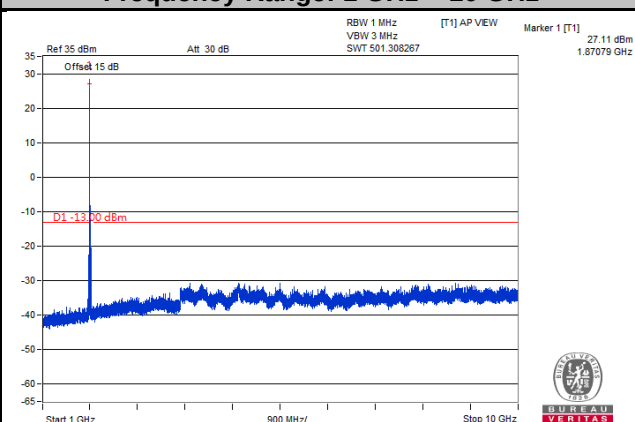

Frequency Range: 10 GHz ~ 27 GHz

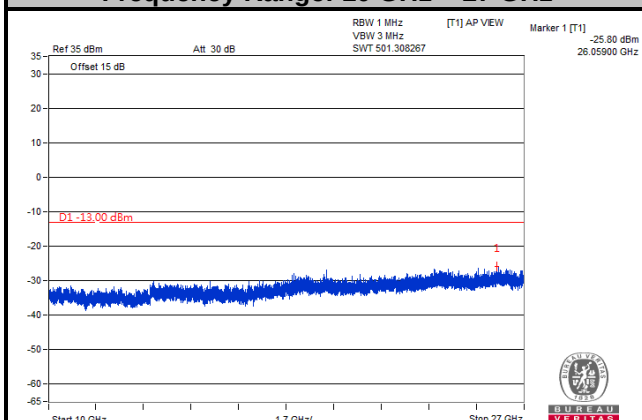


LTE Band 2


Channel Bandwidth: 20 MHz

Channel 19100


Frequency Range: 30 MHz ~ 1 GHz

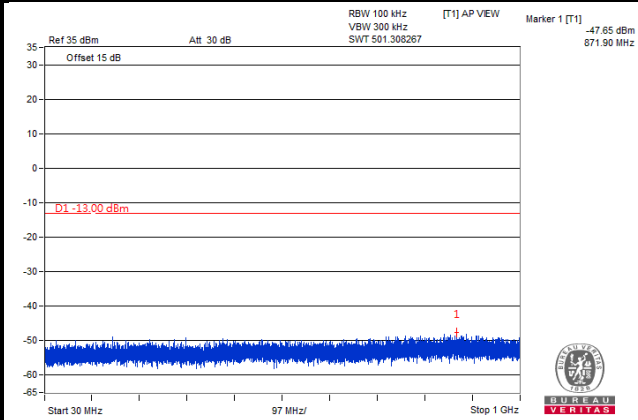

Frequency Range: 1 GHz ~ 10 GHz

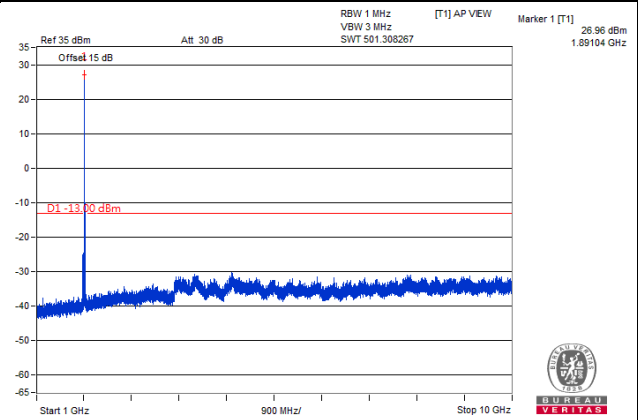

Frequency Range: 10 GHz ~ 27 GHz

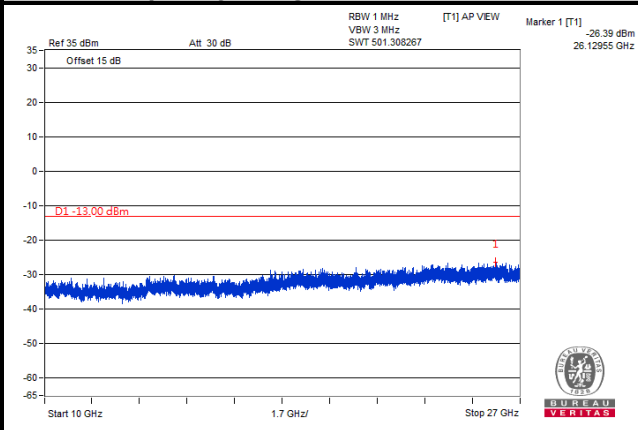

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit is equal to -13 dBm.

4.8.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.R.P power - 2.15 dB.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

<Radiated Emission below or equal 1 GHz>

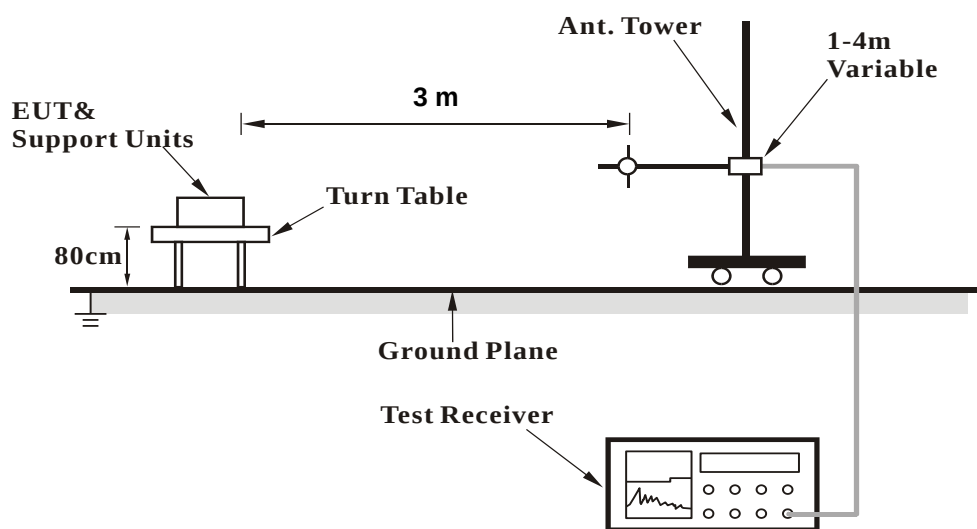

<Radiated Emission above 1 GHz>

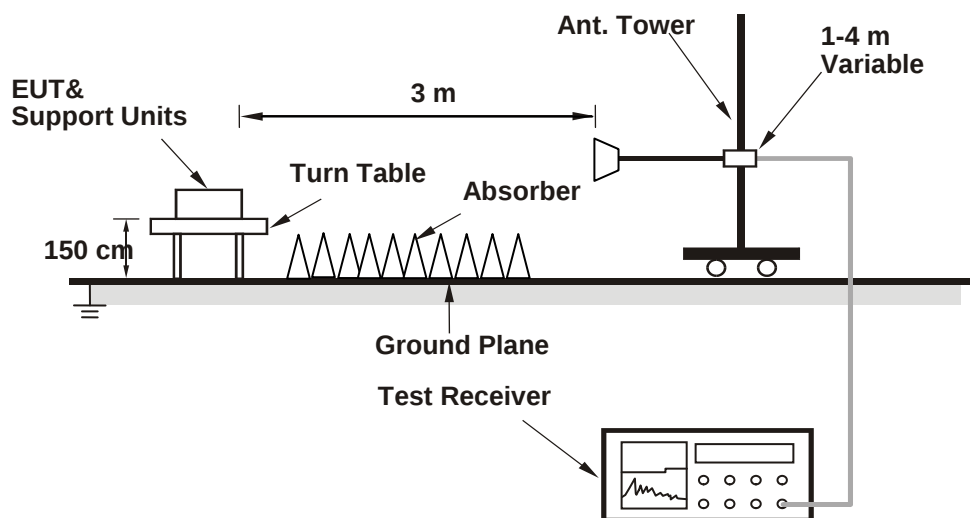

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

WCDMA:

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2018-08-22

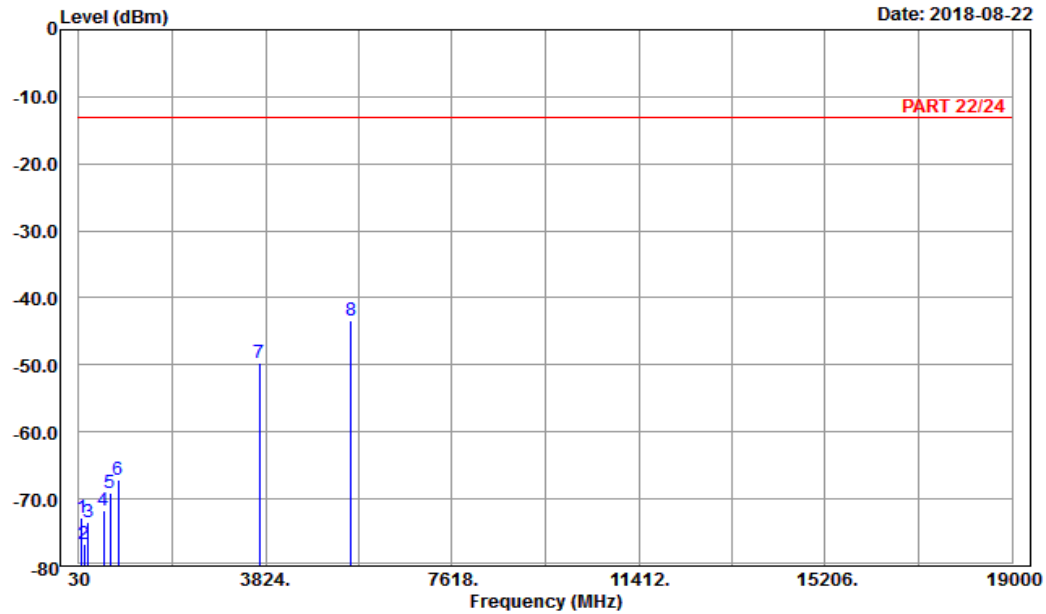

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band II_Link_CH9262
 Tested by: Karl Lee


	Freq	Level	Read	Limit	Over	
	MHz	dBm	Level	Line	Limit	Factor Remark
	MHz	dBm	dBm	dBm	dB	dB
1	85.08	-72.90	-61.68	-13.00	-59.90	-11.22 Peak
2	136.65	-76.71	-69.03	-13.00	-63.71	-7.68 Peak
3	226.29	-73.43	-67.60	-13.00	-60.43	-5.83 Peak
4	529.60	-71.82	-68.67	-13.00	-58.82	-3.15 Peak
5	659.80	-69.03	-68.85	-13.00	-56.03	-0.18 Peak
6	834.10	-67.12	-68.74	-13.00	-54.12	1.62 Peak
7	3704.80	-49.73	-65.61	-13.00	-36.73	15.88 Peak
8 pp	5557.20	-43.47	-63.81	-13.00	-30.47	20.34 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

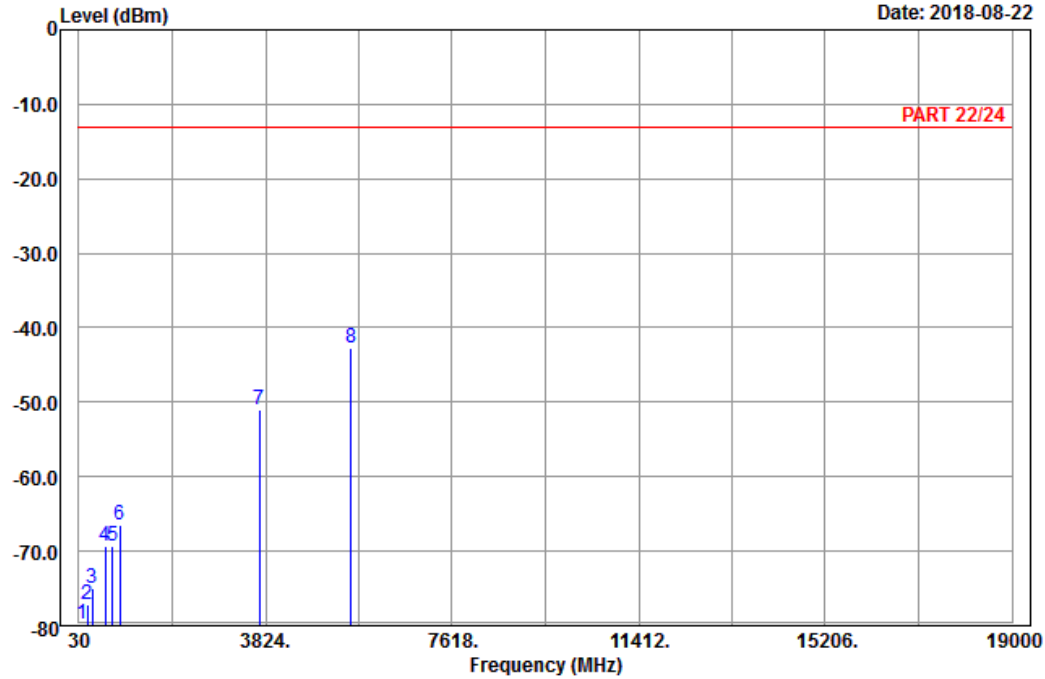

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band II_Link_CH9262
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	87.78	-79.74	-68.85	-13.00	-66.74	-10.89	Peak
2	206.31	-77.18	-71.09	-13.00	-64.18	-6.09	Peak
3	300.00	-74.94	-68.98	-13.00	-61.94	-5.96	Peak
4	567.40	-69.42	-68.48	-13.00	-56.42	-0.94	Peak
5	719.30	-69.40	-68.66	-13.00	-56.40	-0.74	Peak
6	856.50	-66.43	-68.07	-13.00	-53.43	1.64	Peak
7	3704.80	-50.91	-66.79	-13.00	-37.91	15.88	Peak
8 pp	5557.20	-42.68	-63.02	-13.00	-29.68	20.34	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

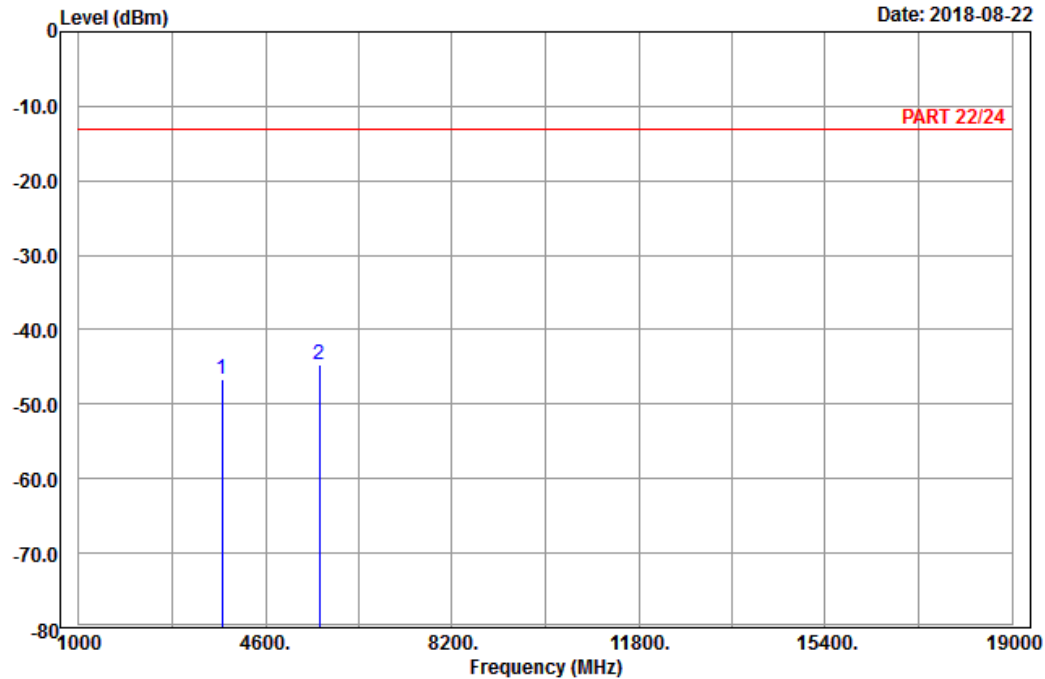

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : Band II_Link_CH9400
 Tested by: Karl Lee


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-46.56	-62.70	-13.00	-33.56	16.14 Peak
2 pp	5640.00	-44.78	-65.25	-13.00	-31.78	20.47 Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

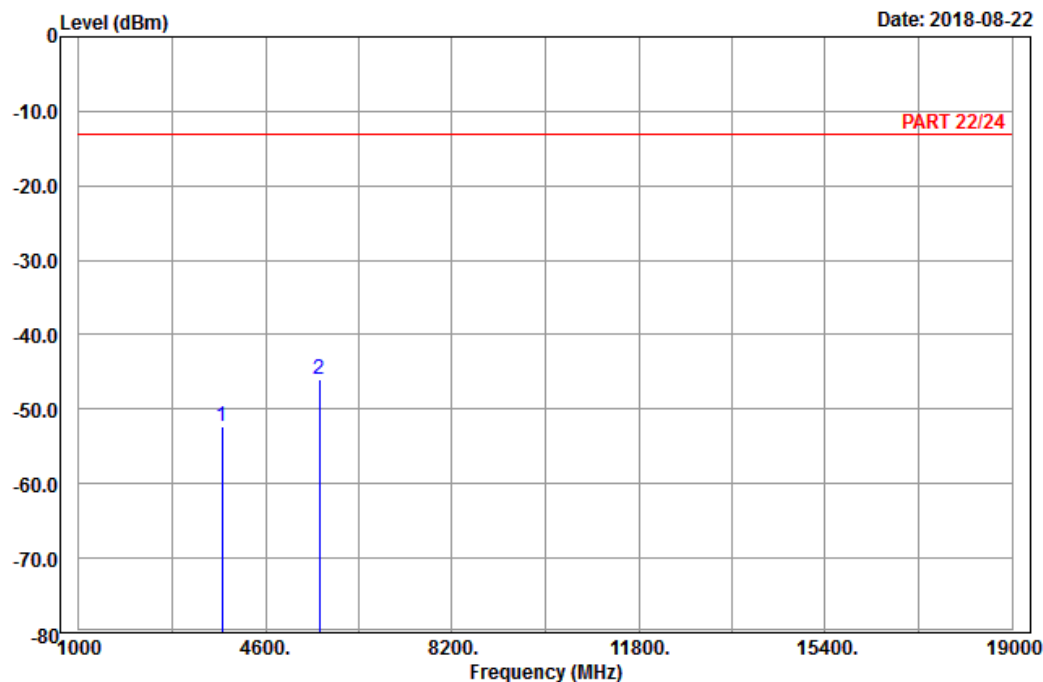

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : Band II_Link_CH9400
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-52.25	-68.39	-13.00	-39.25	16.14	Peak
2 pp	5640.00	-46.07	-66.54	-13.00	-33.07	20.47	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

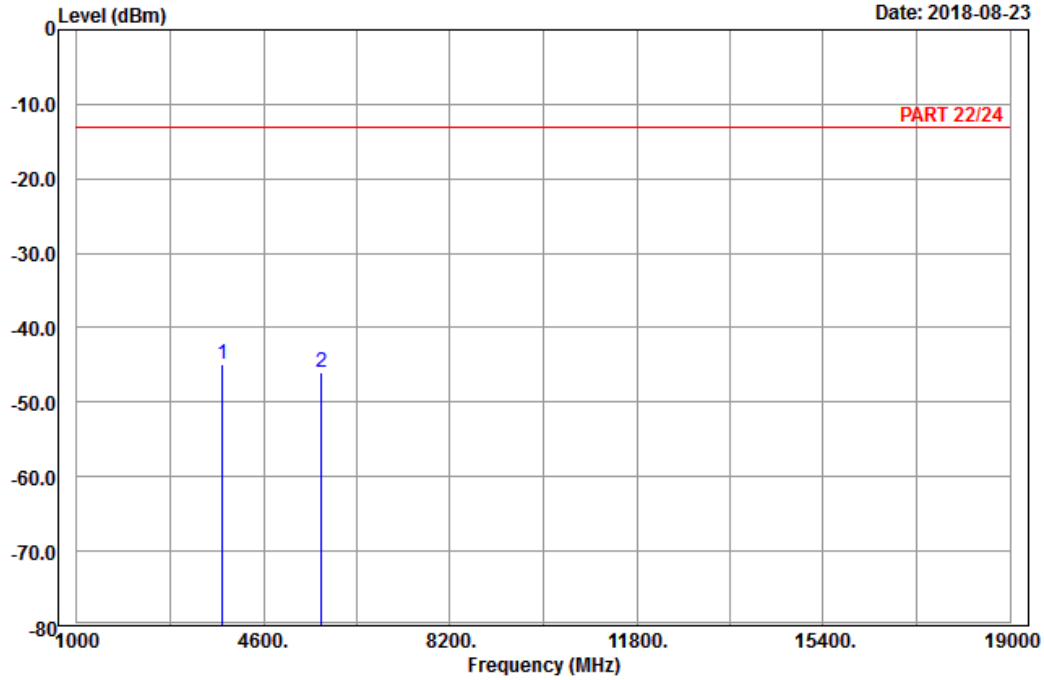

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : Band II_Link_CH9538
Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	3815.20	-44.98	-61.39	-13.00	-31.98	16.41	Peak
2	5722.80	-45.91	-66.18	-13.00	-32.91	20.27	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

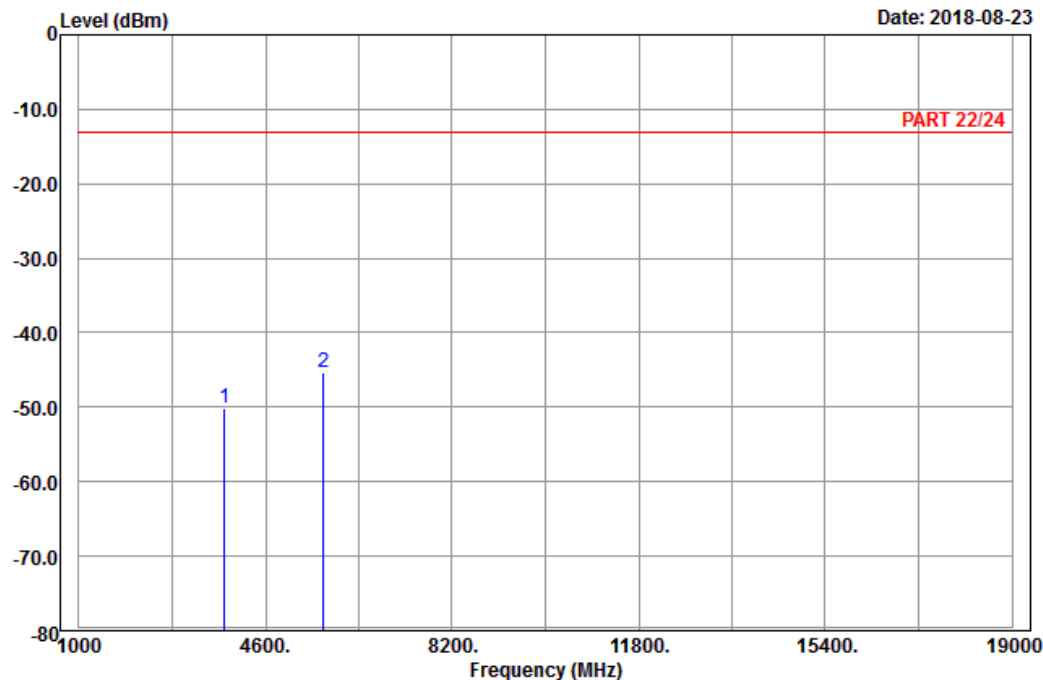

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : Band II_Link_CH9538
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3815.20	-50.23	-66.64	-13.00	-37.23	16.41	Peak
2 pp	5722.80	-45.28	-65.55	-13.00	-32.28	20.27	Peak

LTE Band 2
Channel Bandwidth: 1.4 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

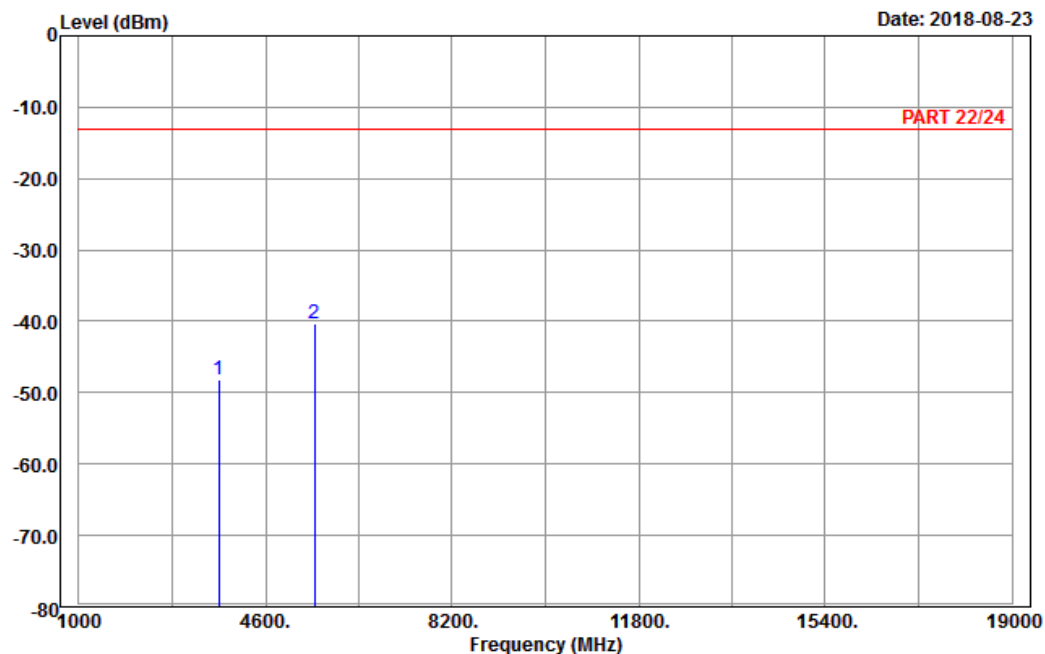

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH18607
Tested by: Karl Lee


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3701.40	-48.25	-64.13	-13.00	-35.25	15.88	Peak
2 pp	5552.10	-40.30	-60.64	-13.00	-27.30	20.34	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

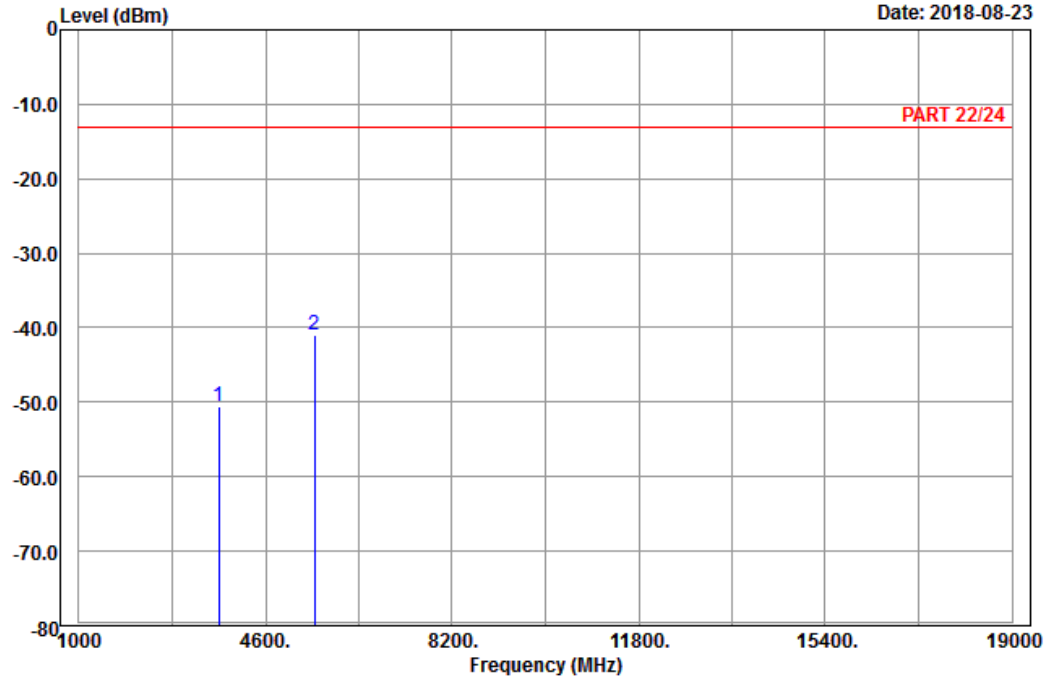

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 2_Link_CH18607
 Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3701.40	-50.67	-66.55	-13.00	-37.67	15.88	Peak
2 pp	5552.10	-40.90	-61.24	-13.00	-27.90	20.34	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

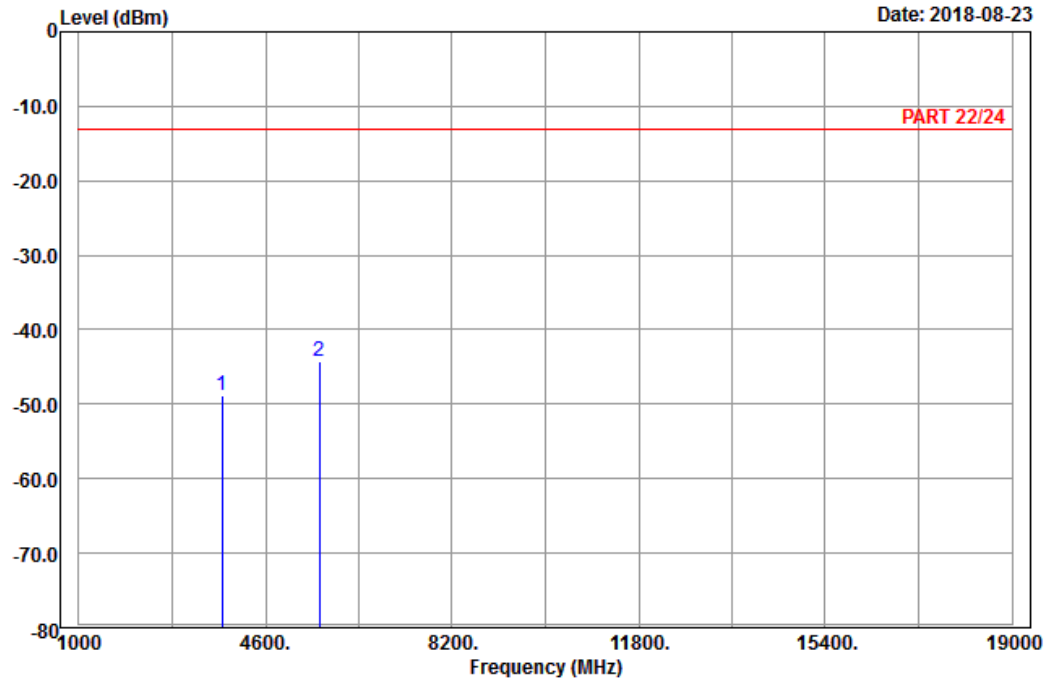

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 2_Link_CH18900
 Tested by: Karl Lee

			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3760.00	-48.81	-64.95	-13.00	-35.81	16.14	Peak
2	5640.00	-44.21	-64.68	-13.00	-31.21	20.47	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

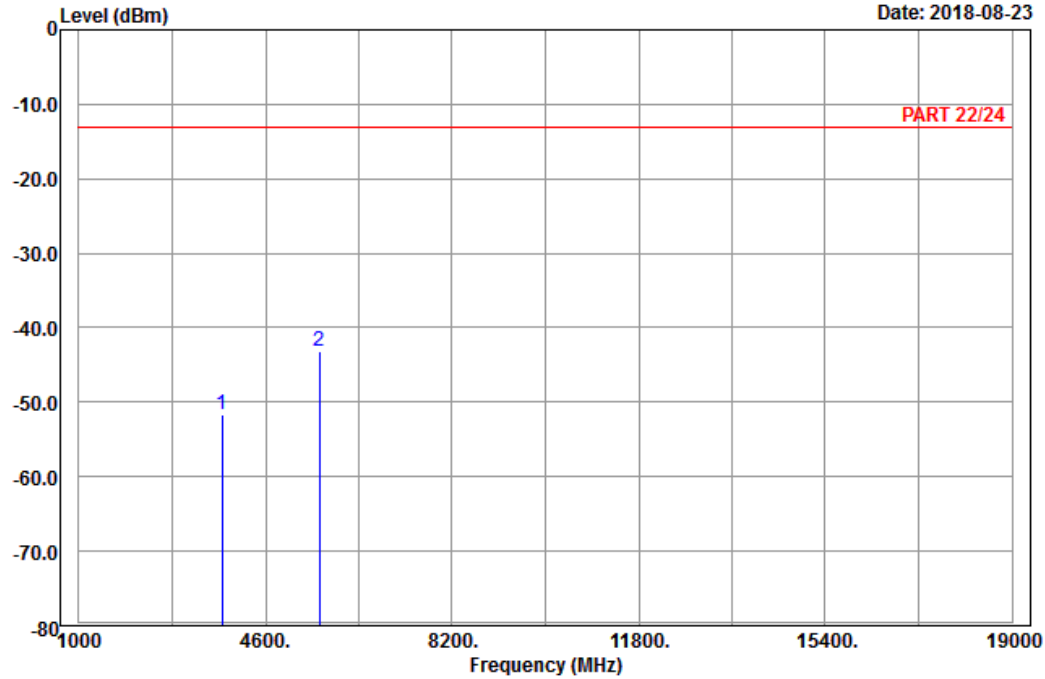

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH18900
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-51.60	-67.74	-13.00	-38.60	16.14	Peak
2 pp	5640.00	-43.26	-63.73	-13.00	-30.26	20.47	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

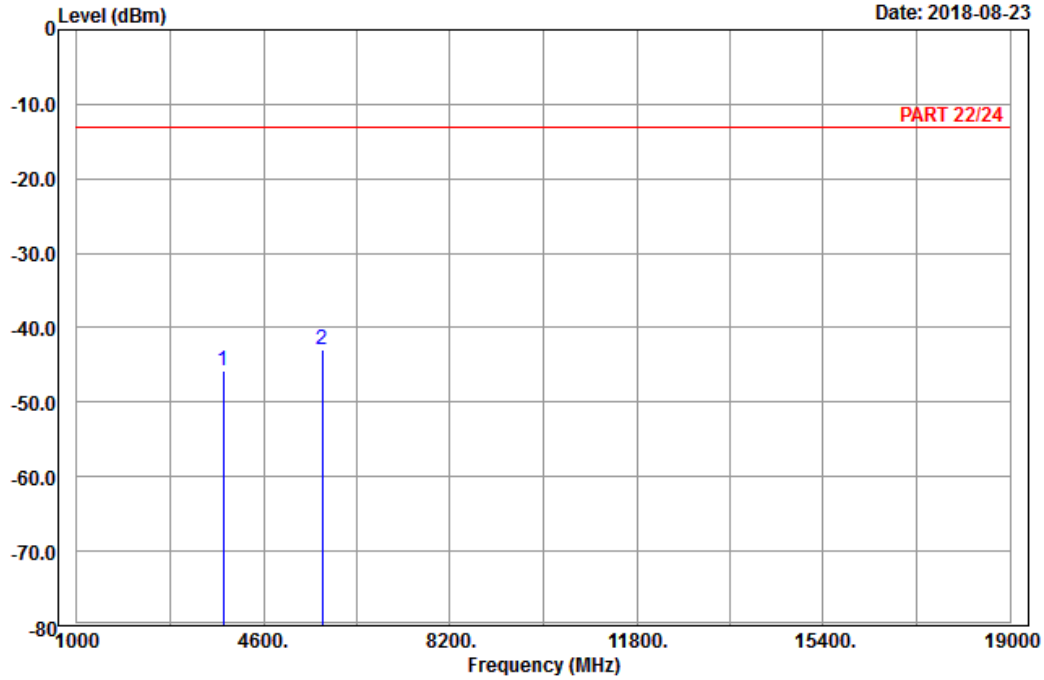

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH19193
Tested by: Karl Lee


			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3818.60	-45.84	-62.34	-13.00	-32.84	16.50	Peak
2 pp	5727.90	-42.97	-63.31	-13.00	-29.97	20.34	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

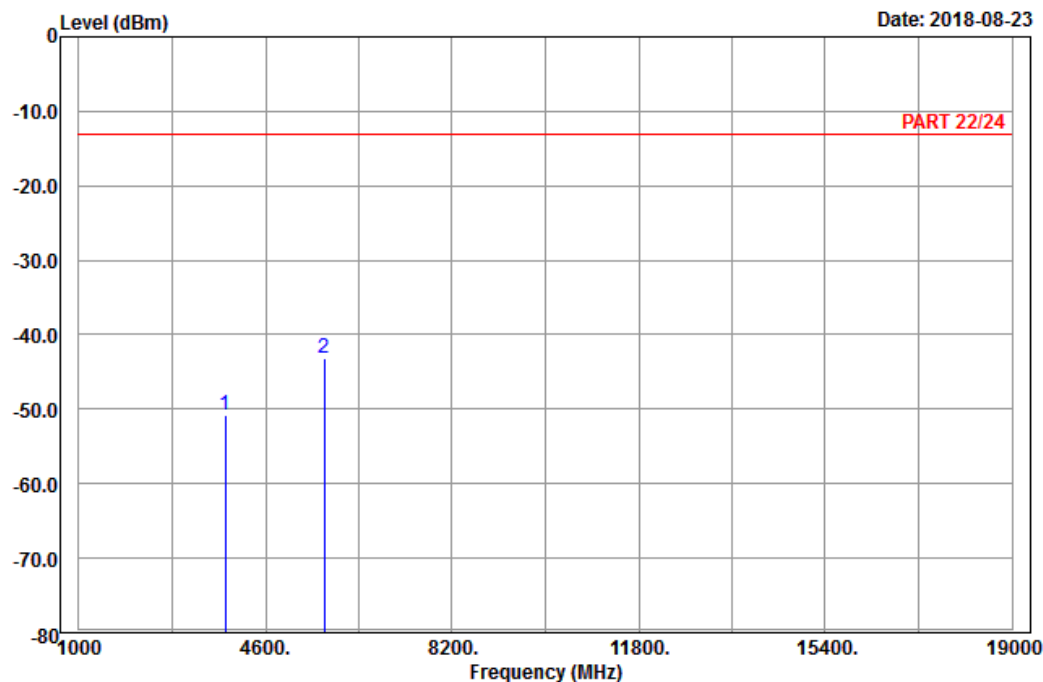

Site : 966 chamber 1
 Condition: PART 22/24 Vertical
 Remark : LTE_Band 2_Link_CH19193
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3818.60	-50.74	-67.24	-13.00	-37.74	16.50	Peak
2 pp	5727.90	-43.07	-63.41	-13.00	-30.07	20.34	Peak

Channel Bandwidth: 5 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

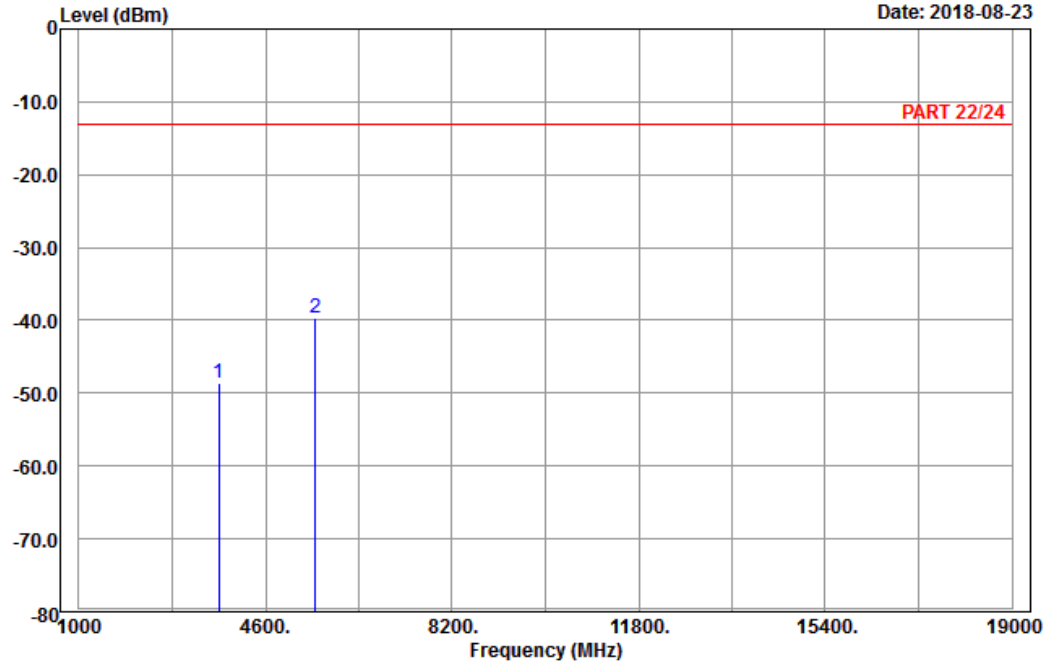

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH18625
Tested by: Harry Hsueh

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3705.00	-48.55	-64.43	-13.00	-35.55	15.88	Peak
2 pp	5557.50	-39.68	-60.02	-13.00	-26.68	20.34	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

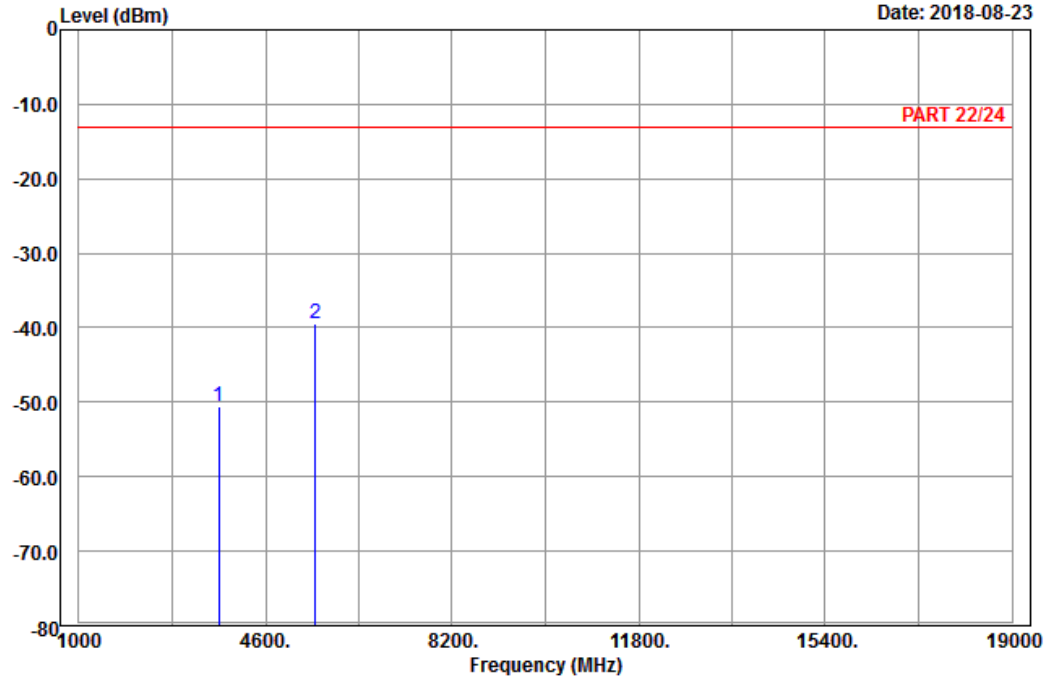

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH18625
Tested by: Harry Hsueh

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3705.00	-50.64	-66.52	-13.00	-37.64	15.88	Peak
2 pp	5557.50	-39.39	-59.73	-13.00	-26.39	20.34	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

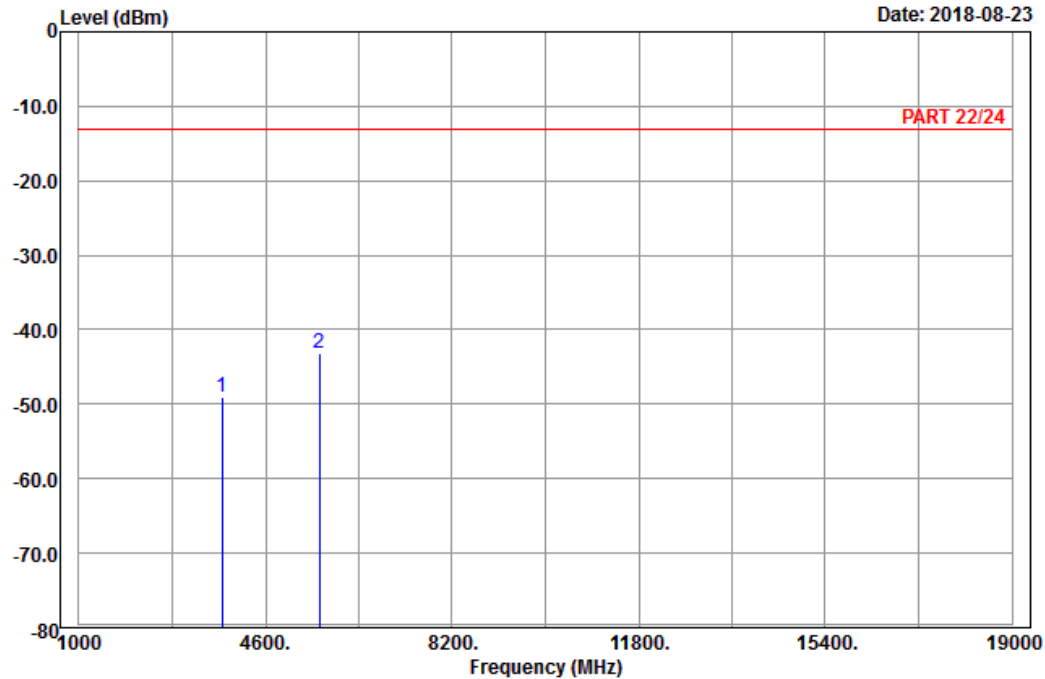

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 2_Link_CH18900
 Tested by: Harry Hsueh

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-49.13	-65.27	-13.00	-36.13	16.14 Peak
2	5640.00	-43.08	-63.55	-13.00	-30.08	20.47 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

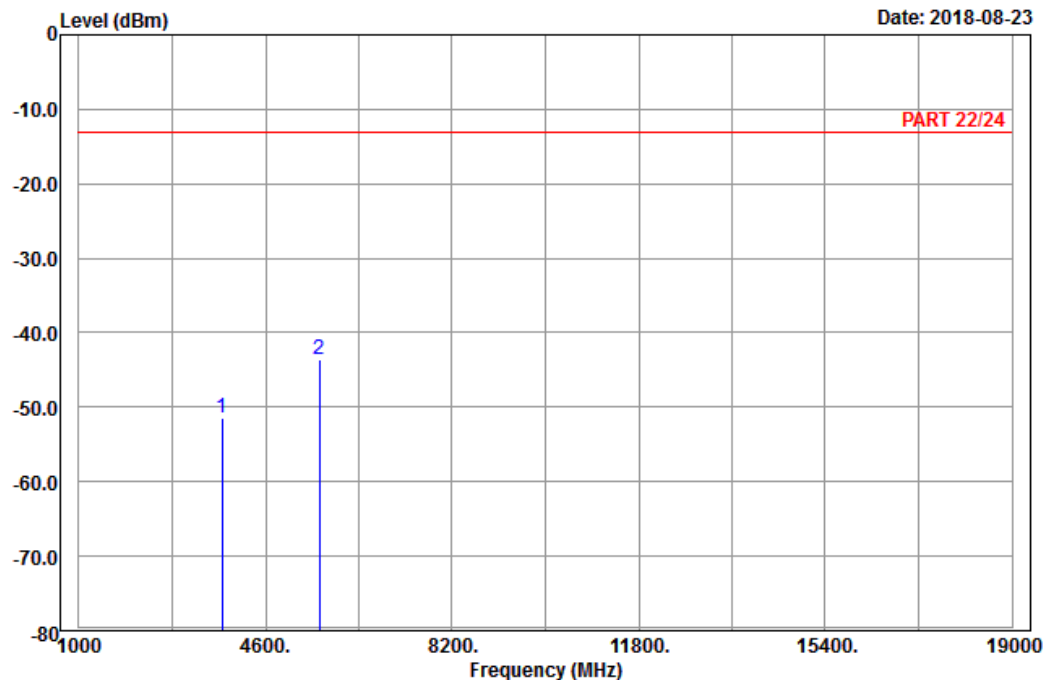

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH18900
Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-51.43	-67.57	-13.00	-38.43	16.14	Peak
2 pp	5640.00	-43.61	-64.08	-13.00	-30.61	20.47	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

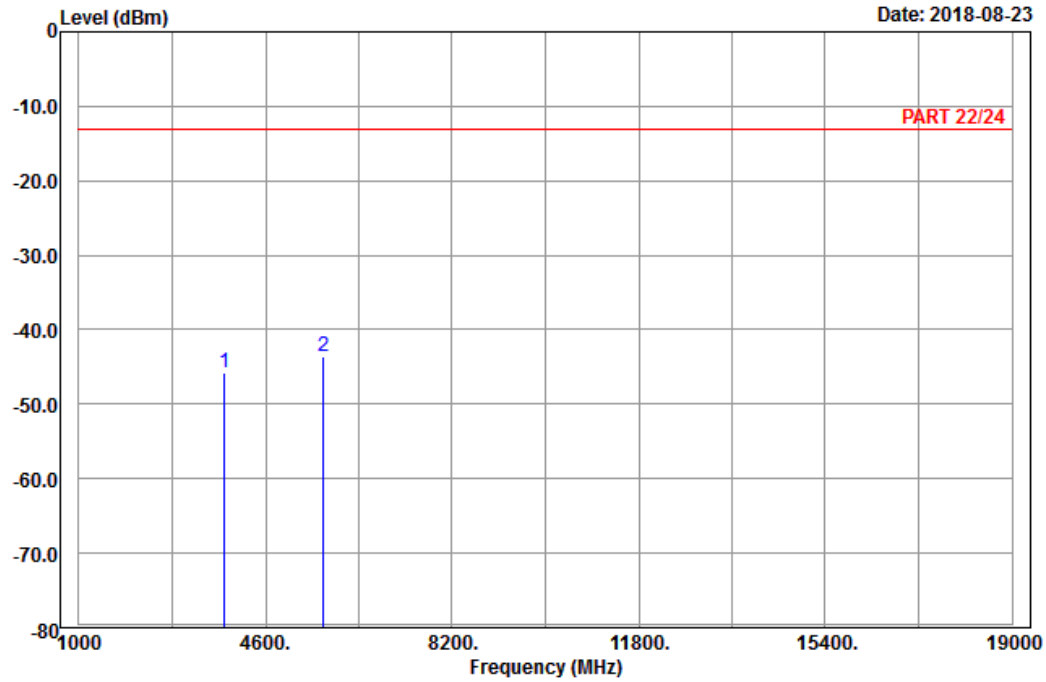

Site : 966 chamber 1
 Condition: PART 22/24 Horizontal
 Remark : LTE_Band 2_Link_CH19175
 Tested by: Harry Hsueh

			Read	Limit	Over		
Freq	Level	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dBm	dB	dB	
1	3815.00	-45.70	-62.11	-13.00	-32.70	16.41	Peak
2 pp	5722.50	-43.52	-63.79	-13.00	-30.52	20.27	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

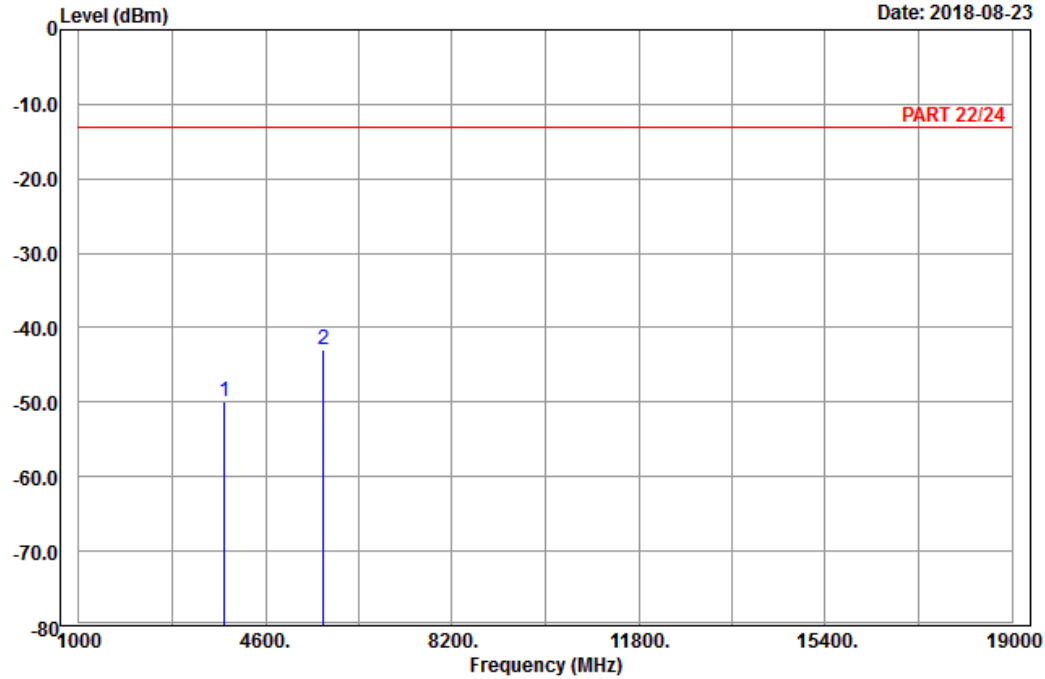

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH19175
Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3815.00	-49.90	-66.31	-13.00	-36.90	16.41	Peak
2 pp	5722.50	-42.89	-63.16	-13.00	-29.89	20.27	Peak

Channel Bandwidth: 20 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2018-08-23

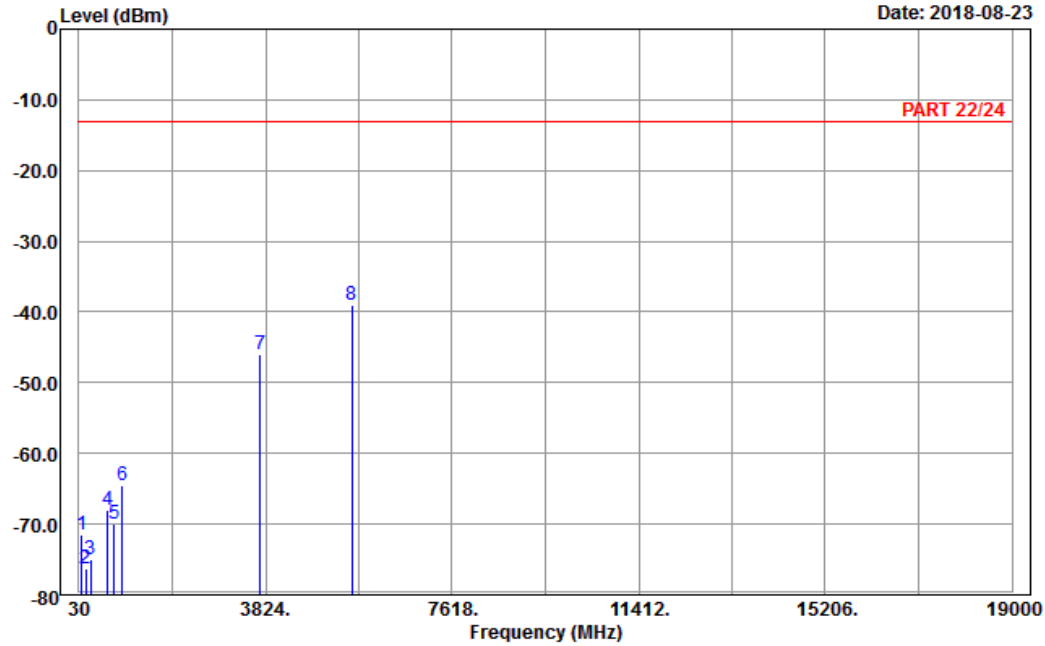

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH18700
Tested by: Karl Lee

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	85.89	-71.56	-60.45	-13.00	-58.56	-11.11	Peak
2	173.37	-76.21	-69.91	-13.00	-63.21	-6.30	Peak
3	267.87	-74.98	-69.31	-13.00	-61.98	-5.67	Peak
4	622.00	-67.96	-68.14	-13.00	-54.96	0.18	Peak
5	744.50	-70.03	-68.81	-13.00	-57.03	-1.22	Peak
6	908.30	-64.53	-67.77	-13.00	-51.53	3.24	Peak
7	3720.00	-45.98	-61.95	-13.00	-32.98	15.97	Peak
8 pp	5580.00	-39.03	-59.40	-13.00	-26.03	20.37	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 14

Date: 2018-08-23

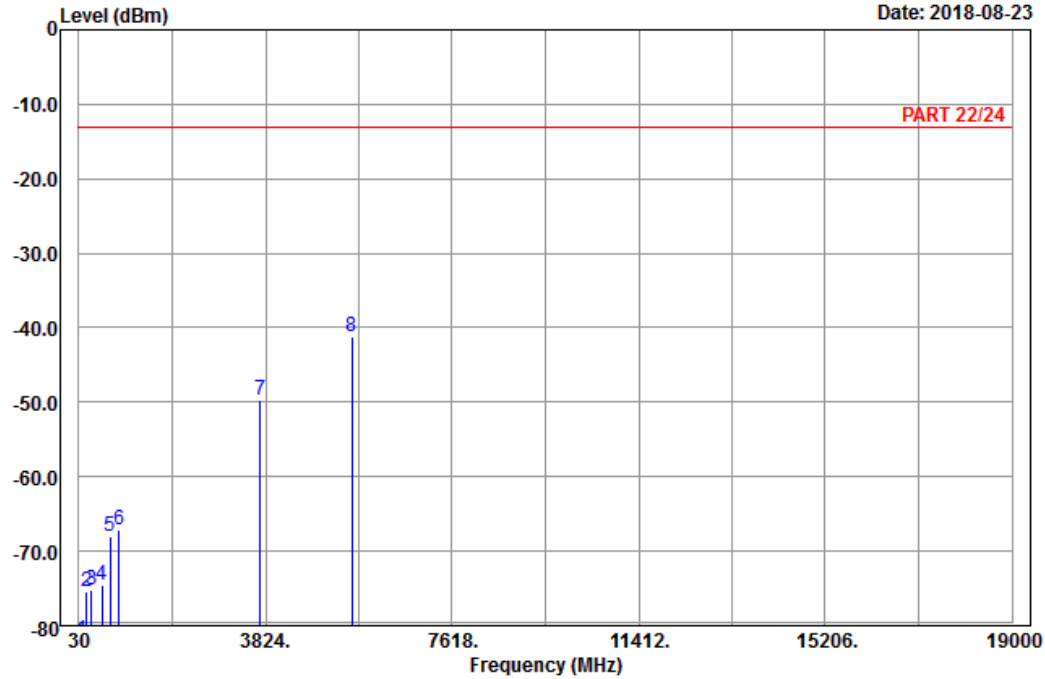

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH18700
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	88.32	-81.86	-70.97	-13.00	-68.86	-10.89	Peak
2	182.28	-75.33	-69.72	-13.00	-62.33	-5.61	Peak
3	278.40	-75.18	-69.42	-13.00	-62.18	-5.76	Peak
4	499.50	-74.63	-69.37	-13.00	-61.63	-5.26	Peak
5	659.80	-68.10	-67.92	-13.00	-55.10	-0.18	Peak
6	838.30	-67.08	-68.66	-13.00	-54.08	1.58	Peak
7	3720.00	-49.75	-65.72	-13.00	-36.75	15.97	Peak
8 pp	5580.00	-41.18	-61.55	-13.00	-28.18	20.37	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

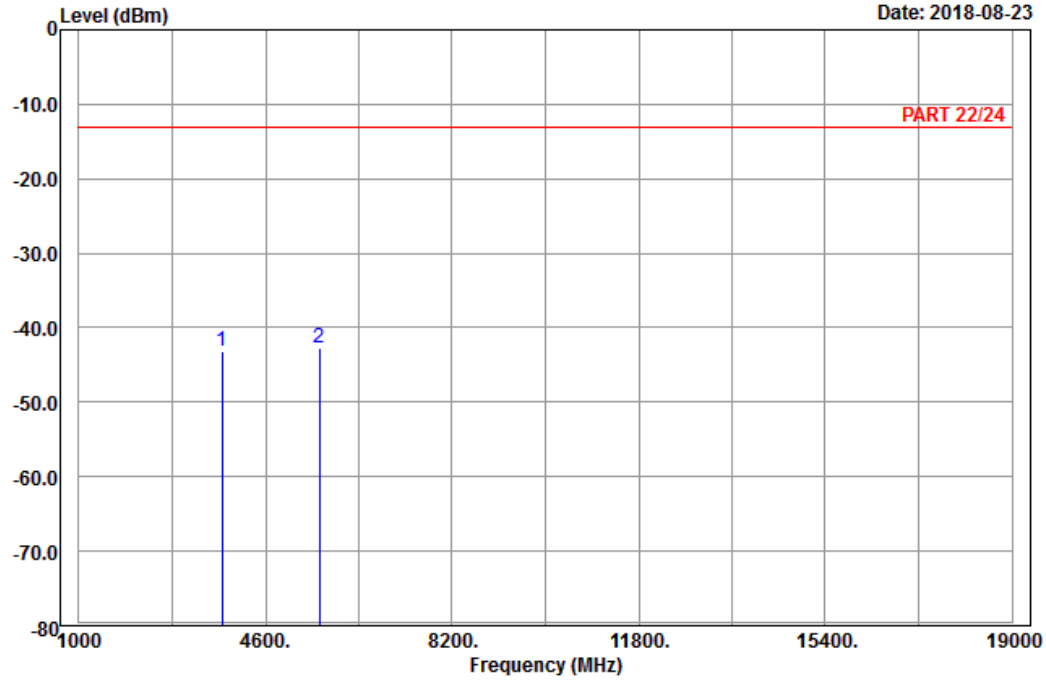

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH18900
Tested by: Karl Lee


			Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	3760.00	-43.06	-59.20	-13.00	-30.06	16.14	Peak
2 pp	5640.00	-42.74	-63.21	-13.00	-29.74	20.47	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

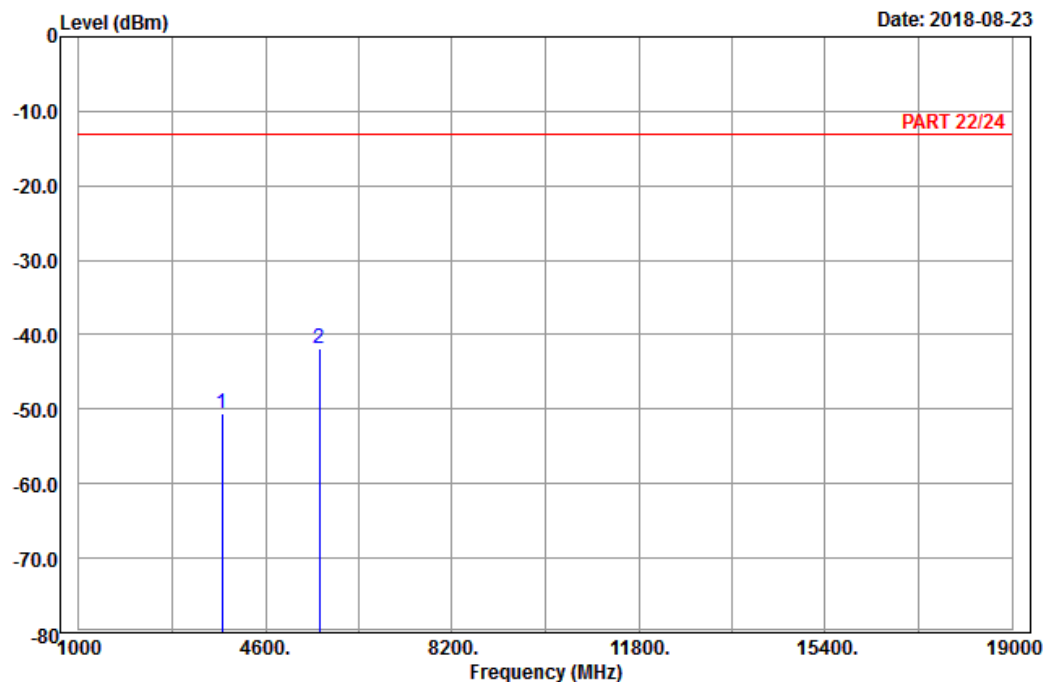

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH18900
Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3760.00	-50.67	-66.81	-13.00	-37.67	16.14	Peak
2 pp	5640.00	-41.91	-62.38	-13.00	-28.91	20.47	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 9

Date: 2018-08-23

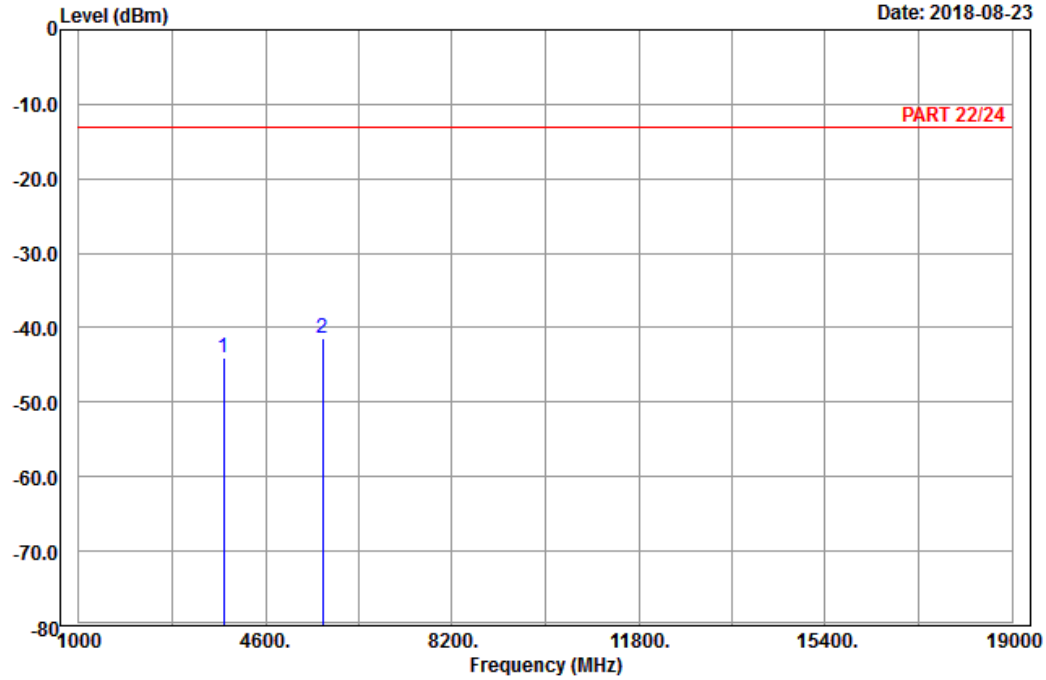

Site : 966 chamber 1
Condition: PART 22/24 Horizontal
Remark : LTE_Band 2_Link_CH19100
Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-44.14	-60.55	-13.00	-31.14	16.41	Peak
2	5700.00	-41.48	-61.69	-13.00	-28.48	20.21	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

Date: 2018-08-23

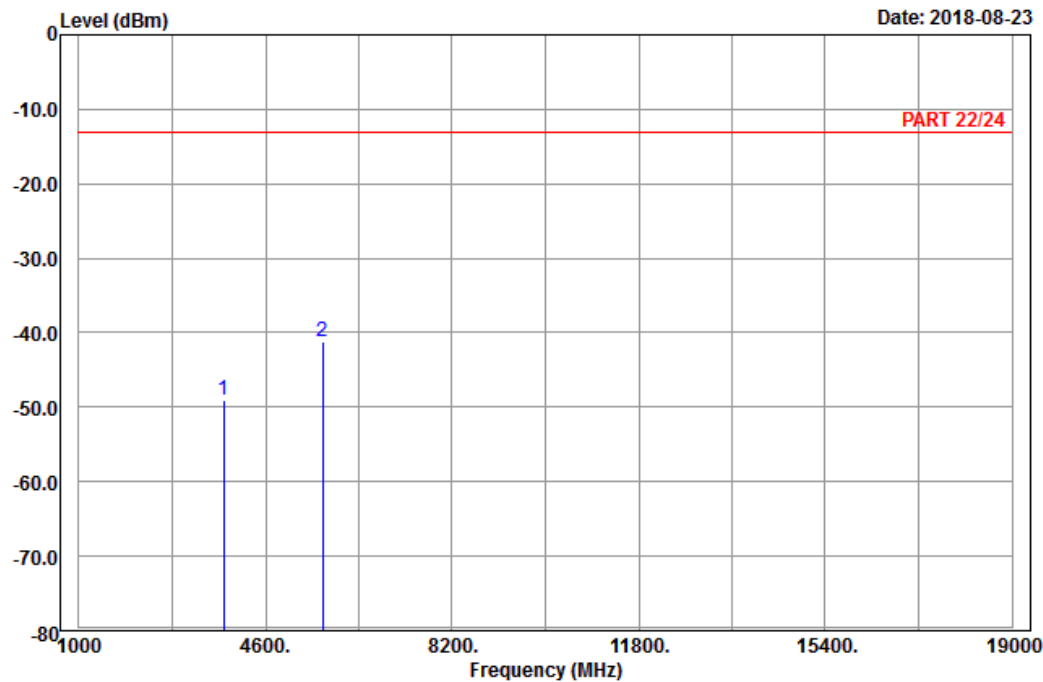

Site : 966 chamber 1
Condition: PART 22/24 Vertical
Remark : LTE_Band 2_Link_CH19100
Tested by: Harry Hsueh

			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3800.00	-48.99	-65.40	-13.00	-35.99	16.41	Peak
2 pp	5700.00	-41.19	-61.40	-13.00	-28.19	20.21	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---