



FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.: TRE1205010801 R/C:89247

FCC ID: OAASPR7928AEW

Compiled by

(position+printed name+signature): File administrators Eric Zhang

Eric Zhang

Supervised by

(position+printed name+signature): Test Engineer Tim Zhang

Tim Zhang

Approved by

(position+printed name+signature): Manager Wenliang Li

Wenliang Li

Date of issue: Jun 14, 2012

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd

Address: Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

Applicant's name: SHENZHEN SCOPE SCIENTIFIC DEVELOPMENT CO.,LTD

Address: Building NO.1&4 The West haosi Industry.Shajing Town.Baoan District,Shenzhen

Test specification:

Standard: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

TRF Originator: Shenzhen Huatongwei International Inspection CO., Ltd

Master TRF: Dated 2006-06

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Tablet Computer(TABLET PC)

Trade Mark: /

Model/Type reference: SP-R79XXX-XW

Listed Models: /

Operation Frequency: From 2400MHz to 2483.5MHz

Result: Positive

TEST REPORT

Test Report No. : TRE1205010801	Jun 14, 2012 Date of issue
--	-------------------------------

Equipment under Test : Tablet Computer(TABLET PC)

Model /Type : SP-R79XXX-XW

Listed Models : /

Applicant : SHENZHEN SCOPE SCIENTIFIC DEVELOPMENT CO.,LTD

Address : Building NO.1&4 The West haosi Industry.Shajing Town.Baoan District,Shenzhen

Manufacturer SHENZHEN SCOPE SCIENTIFIC DEVELOPMENT CO.,LTD

Address : Building NO.1&4 The West haosi Industry.Shajing Town.Baoan District,Shenzhen

Test Result according to the standards on page 4:	Positive
--	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>TEST STANDARDS</u>	<u>4</u>
<u>2.</u>	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Adapter information:	5
2.4.	Description of the test mode	5
2.5.	Short description of the Equipment under Test (EUT)	5
2.6.	EUT operation mode	5
2.7.	EUT configuration	6
2.8.	Related Submittal(s) / Grant (s)	6
2.9.	Modifications	6
2.10.	NOTE	6
<u>3.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	8
3.4.	Configuration of Tested System	8
3.5.	Test Description	8
3.6.	Statement of the measurement uncertainty	9
3.7.	Equipments Used during the Test	10
<u>4.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>11</u>
4.1.	AC Power Conducted Emission	11
4.2.	Radiated Emission	14
4.3.	Maximum Peak Output Power	27
4.4.	Power Spectral Density	34
4.5.	Band Edge Compliance of RF Emission	42
4.6.	Spurious RF Conducted Emission	50
4.7.	6dB Bandwidth	57
4.8.	Antenna Requirement	64
<u>5.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>65</u>
<u>6.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>67</u>

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

ANSI C63.10: American National Standard for Testing Unlicensed Wireless Devices

KDB558074: DTS Meas Guidance v01 of Measurement Procedure

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Mar 30, 2012
Testing commenced on	:	Mar 30, 2012
Testing concluded on	:	Jun 14, 2012

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☒ 120V / 60 Hz	☐ 115V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.3. Adapter information:

- AC Adapter

MODEL:GP302D-050-200
 INPUT:100-240V~50/60Hz 0.5A
 OUTPUT: 5.0V DC 2.0A
 Power Cable: 80cm
☐ Shielded ☒ Unshielded

2.4. Description of the test mode

IEEE 802.11b/g/n: Eleven channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

2.5. Short description of the Equipment under Test (EUT)

2.4GHz (Tablet Computer(TABLET PC) (M/N:SP-R79XXX-XW))

For more details, refer to the user's manual of
the EUT. Serial number: Prototype

2.6. EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides command to control the EUT for staying in continuous transmitting and receiving mode for testing.

2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○	Power Cable	Length (m) :	/
		Shield :	/
		Detachable :	/
○	Multimeter	Manufacturer :	/
		Model No. :	/

2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: OAASPR7928AEW** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.9. Modifications

No modifications were implemented to meet testing criteria.

2.10. NOTE

1. The EUT is a 802.11b/g/n Tablet Computer(TABLET PC),The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g/n	FCC Part 15 Subpart C (Section15.247)	TRE1205010801
RF Exposure Report	FCC Per 47 CFR 2.1093(d)	TRE1205010802

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	✓	—	—	—
802.11g	✓	—	—	—
802.11n(20MHz)	✓	—	—	—
802.11n(40MHz)	✓	—	—	—

3. The EUT incorporates a SISO function,Physically,the EUT provides one completed transmitter and one completed receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Huatongwei International Inspection Co., Ltd
Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China
Phone: 86-755-26715686 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: Mar. 29, 2012. Valid time is until Feb. 28, 2015.

A2LA-Lab Cert. No. 2243.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until Sept. 30, 2013.

FCC-Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 662850, Renewal date Jun. 01, 2012, valid time is until Jun. 01, 2015.

IC-Registration No.: 5377A

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Jan. 25, 2011, valid time is until Jan. 24, 2014.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

NEMKO-Aut. No.: ELA125

Shenzhen Huatongwei International Inspection Co., Ltd has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10, the authorization is valid through July 07, 2013

VCCI

The 3m Semi-anechoic chamber (12.2m×7.95m×6.7m) and Shielded Room (8m×4m×3m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2010. Valid time is until Dec. 23, 2013.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2009. Valid time is until Dec. 19, 2012.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2010. Valid time is until May 06, 2013.

DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of DNV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Directives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the DNV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2013.


3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Configuration of Tested System

Fig. 2-1 Configuration of Tested System



3.5. Test Description

FCC PART 15		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS
FCC Part 1.1307 (b)	RF Exposure	PASS

Remark: The measurement uncertainty is not included in the test result.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	11 Mbps	1/6/11
	11g/OFDM	54 Mbps	1/6/11
	11n(20MHz)/OFDM	65Mbps	1/6/11
	11n(40MHz)/OFDM	135 Mbps	3/6/9
Band Edge	11b/DSSS	11 Mbps	1/11
	11g/OFDM	54 Mbps	1/11
	11n(20MHz)/OFDM	65Mbps	1/11
	11n(40MHz)/OFDM	135 Mbps	3/9

Note1: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

3.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	150 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-12.75 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

3.7. Equipments Used during the Test

AC Power Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2011/10/23
2	EMI Test Receiver	Rohde&Schwarz	ESCS 30	100038	2011/10/23
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2011/10/23
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	2011/10/23


Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2011/10/23
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2011/10/23
3	RF TEST PANEL	Rohde&Schwarz	TS / RSP	335015/ 0017	2011/10/23
4	TURNTABLE	ETS	2088	2149	2011/10/23
5	ANTENNA MAST	ETS	2075	2346	2011/10/23
6	EMI TEST SOFTWARE	Rohde&Schwarz	ESK1	N/A	2011/10/23
7	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2011/10/23
8	Amplifer	Sonoma	310N	E009-13	2011/10/23
9	JS amplifier	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2011/10/23
10	High pass filter	Compliance Direction systems	BSU-6	34202	2011/10/23
11	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2011/10/23
12	Amplifer	Compliance Direction systems	PAP-1G-26	48	2011/10/23
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2011/10/23

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2011/10/23
2	Power Meter	Anritsu	ML2487A	6K00001568	2011/10/23
3	Power Meter Sensor	Anritsu	ML2491A	0630989	2011/10/23
4	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2011/10/23

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

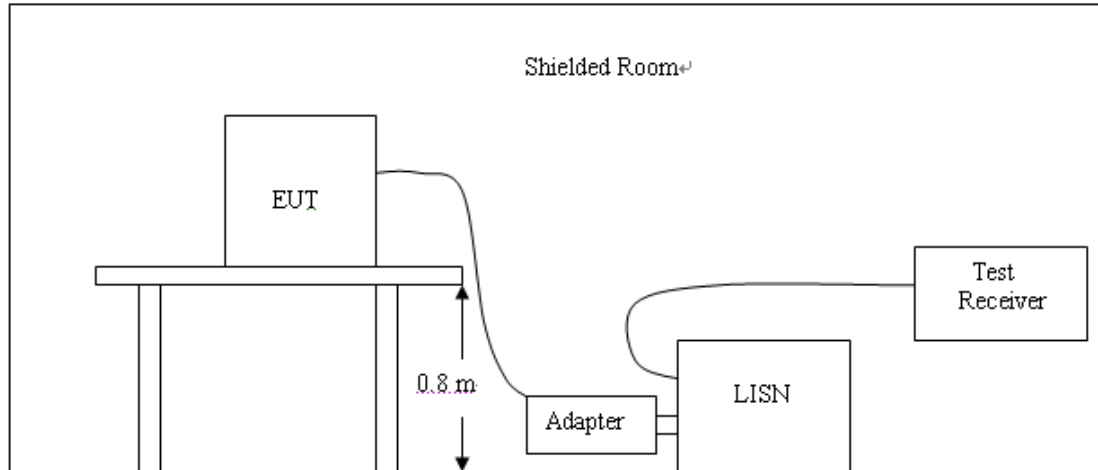

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2009.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2009
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2009
- 4 The EUT received DC12V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


* Decreasing linearly with the logarithm of the frequency

TEST RESULTS

The AC Power Conducted Emission measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test modes and channels.

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

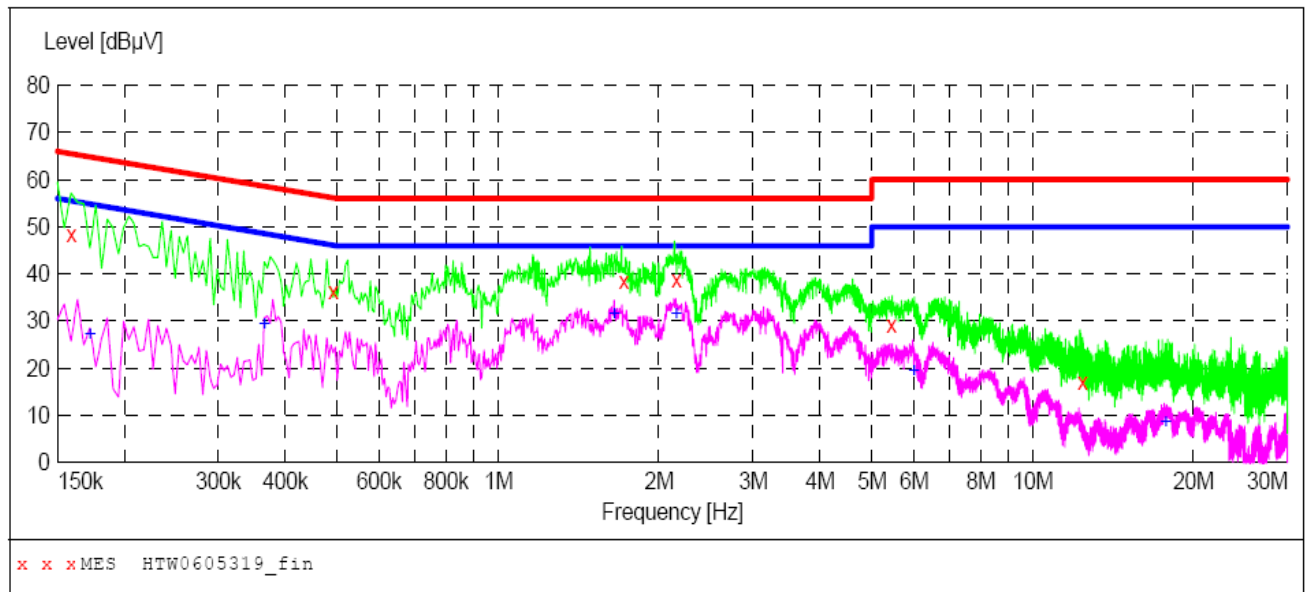**MEASUREMENT RESULT: "HTW0605319_fin"**

6/5/2012 3:56PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.159000	48.50	10.1	66	17.0	QP	N	GND
0.492000	36.30	10.1	56	19.8	QP	N	GND
1.720500	38.40	10.2	56	17.6	QP	N	GND
2.157000	38.90	10.2	56	17.1	QP	N	GND
5.451000	29.20	10.2	60	30.8	QP	N	GND
12.412500	17.10	10.4	60	42.9	QP	N	GND


MEASUREMENT RESULT: "HTW0605319_fin2"

6/5/2012 3:56PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.172500	27.30	10.1	55	27.5	AV	N	GND
0.366000	29.40	10.1	49	19.2	AV	N	GND
1.653000	31.60	10.2	46	14.4	AV	N	GND
2.157000	31.50	10.2	46	14.5	AV	N	GND
6.000000	19.50	10.2	50	30.5	AV	N	GND
17.745000	8.90	10.4	50	41.1	AV	N	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

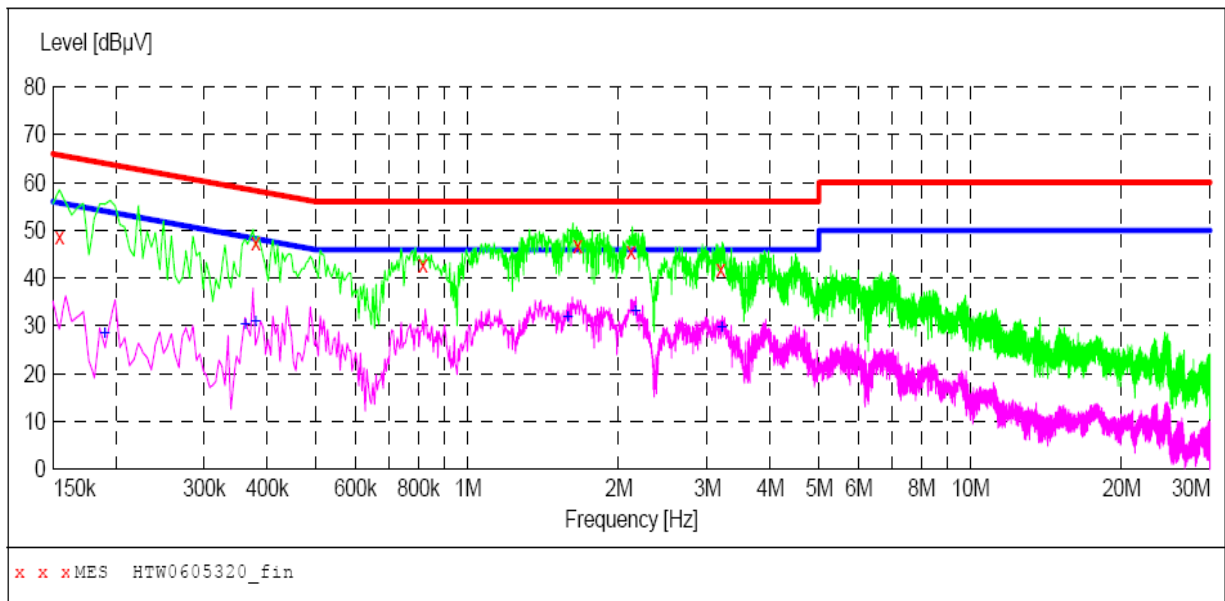**MEASUREMENT RESULT: "HTW0605320_fin"**

6/5/2012 3:59PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	48.80	10.1	66	17.0	QP	L1	GND
0.379500	47.60	10.1	58	10.7	QP	L1	GND
0.816000	42.90	10.1	56	13.1	QP	L1	GND
1.657500	46.90	10.2	56	9.1	QP	L1	GND
2.116500	45.50	10.2	56	10.5	QP	L1	GND
3.196500	42.00	10.2	56	14.0	QP	L1	GND

MEASUREMENT RESULT: "HTW0605320_fin2"

6/5/2012 3:59PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	28.50	10.1	54	25.5	AV	L1	GND
0.361500	30.60	10.1	49	18.1	AV	L1	GND
0.379500	30.90	10.1	48	17.4	AV	L1	GND
1.585500	32.10	10.2	46	13.9	AV	L1	GND
2.161500	33.10	10.2	46	12.9	AV	L1	GND
3.214500	29.80	10.2	46	16.2	AV	L1	GND

4.2. Radiated Emission


TEST CONFIGURATION

Radiated Emission Test Set-Up


Frequency range 9KHz – 30MHz

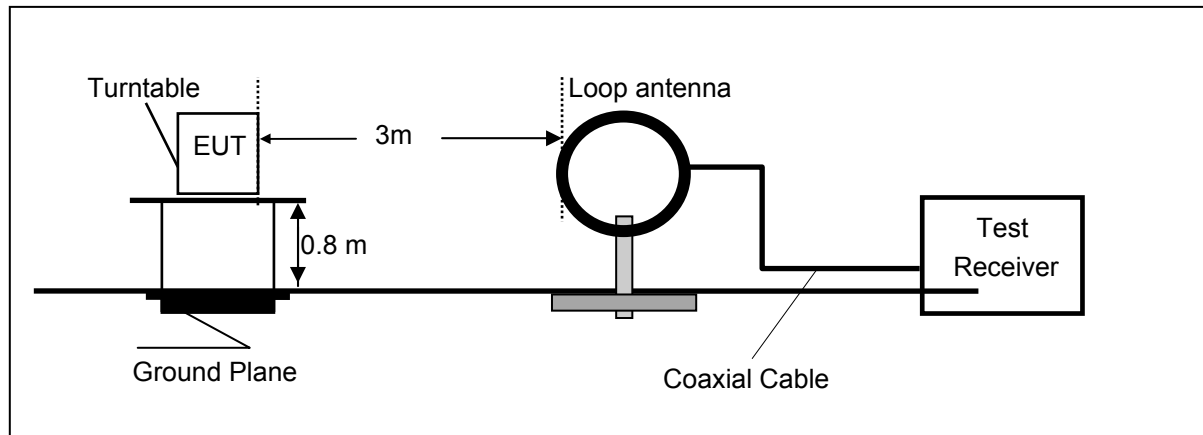

Frequency range 30MHz – 1000MHz

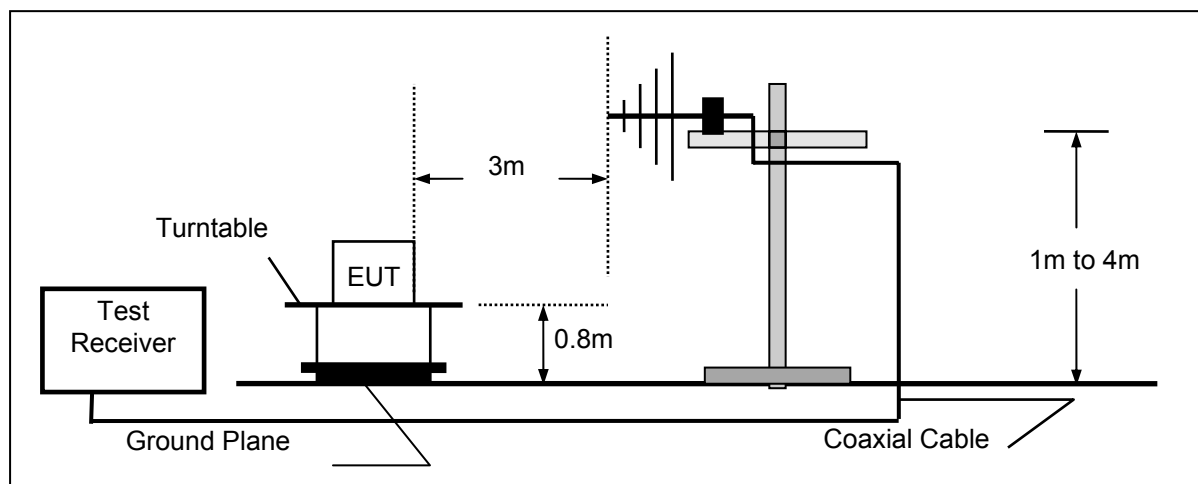

Frequency range above 1GHz-25GHz

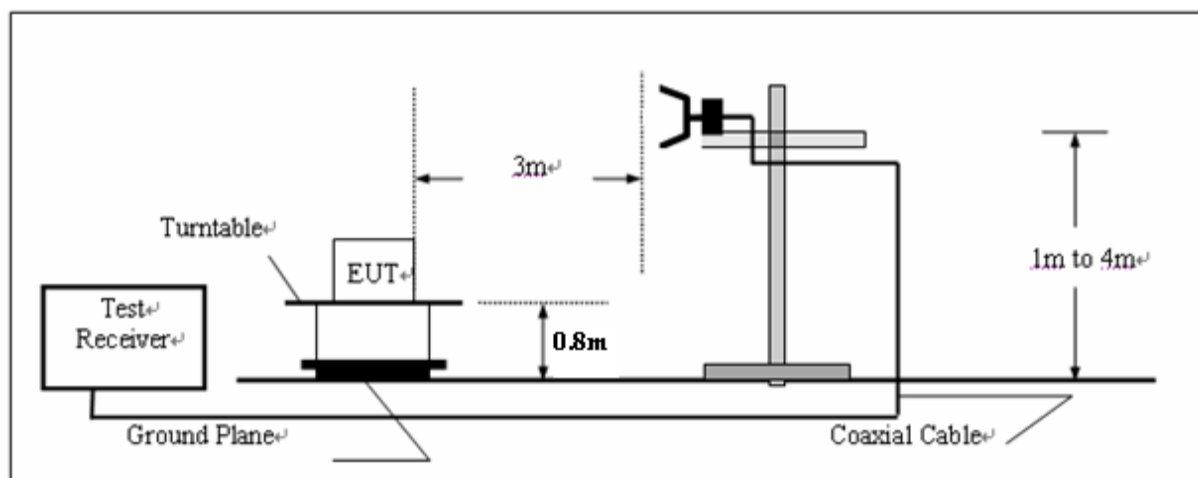

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Test Frequency band from 9KHz until to 10th harmonic.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL + AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The frequency spectrum above 1 GHz for Transmitter was investigated. All emission not reported are much lower than the prescribed limits. Set the RBW=1MHz,VBW=3MHz for Peak Detector while the RBW=1MHz,VBW=10Hz for Average Detector,Readings are both peak and average values.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Radiated emission in frequency band below 30MHz

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
802.11 b					
24	31.56	49.54	17.98	QP	/
802.11 g					
24	30.94	49.54	18.60	QP	/
802.11 n20					
24	31.37	49.54	18.17	QP	/
802.11 n40					
24	30.62	49.54	18.92	QP	/


Note: 1.The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode,the middle channel) is the worst case for all the test mode and channel.

2. Loop Antenna for the radiation emission test below 30MHz.

Radiated emission in frequency band from 30MHz to 1GHz

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562 201106

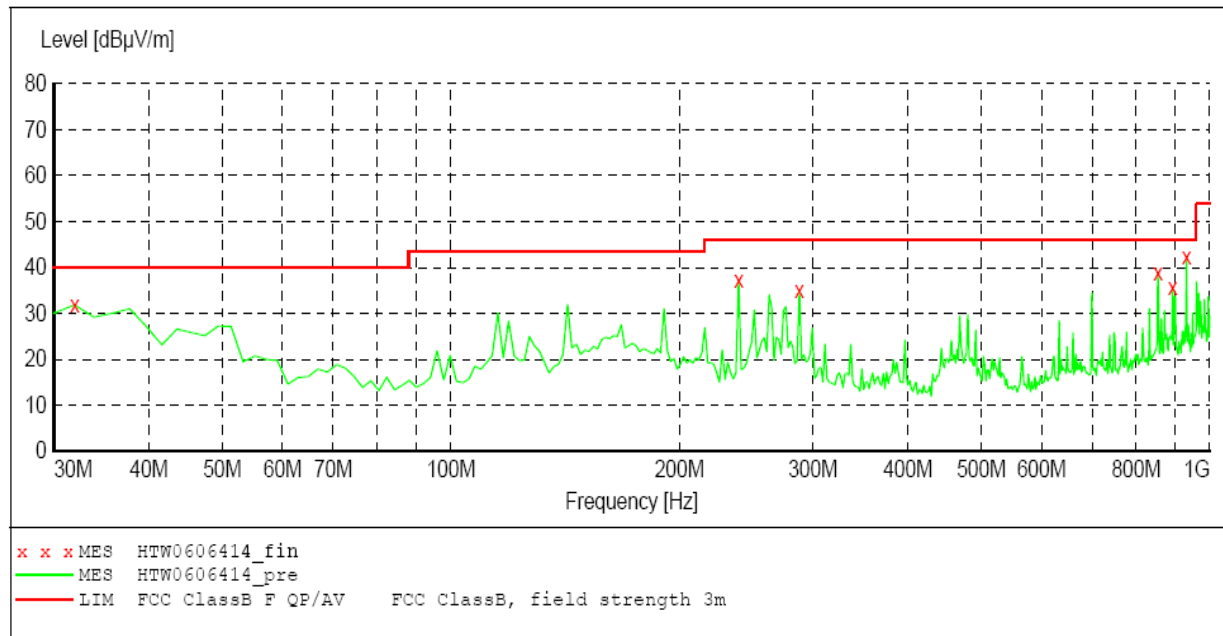
***MEASUREMENT RESULT: "HTW0606414_fin"***

3/7/2012 9:11AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	31.90	-12.3	40.0	8.1	QP	100.0	86.00	VERTICAL
239.520000	37.20	-18.9	46.0	8.8	QP	100.0	211.00	VERTICAL
288.020000	34.90	-17.7	46.0	11.1	QP	100.0	211.00	VERTICAL
854.500000	38.90	-7.5	46.0	7.1	QP	100.0	197.00	VERTICAL
893.300000	35.80	-6.8	46.0	10.2	QP	100.0	205.00	VERTICAL
932.100000	42.40	-7.2	46.0	3.6	QP	100.0	187.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562 201106

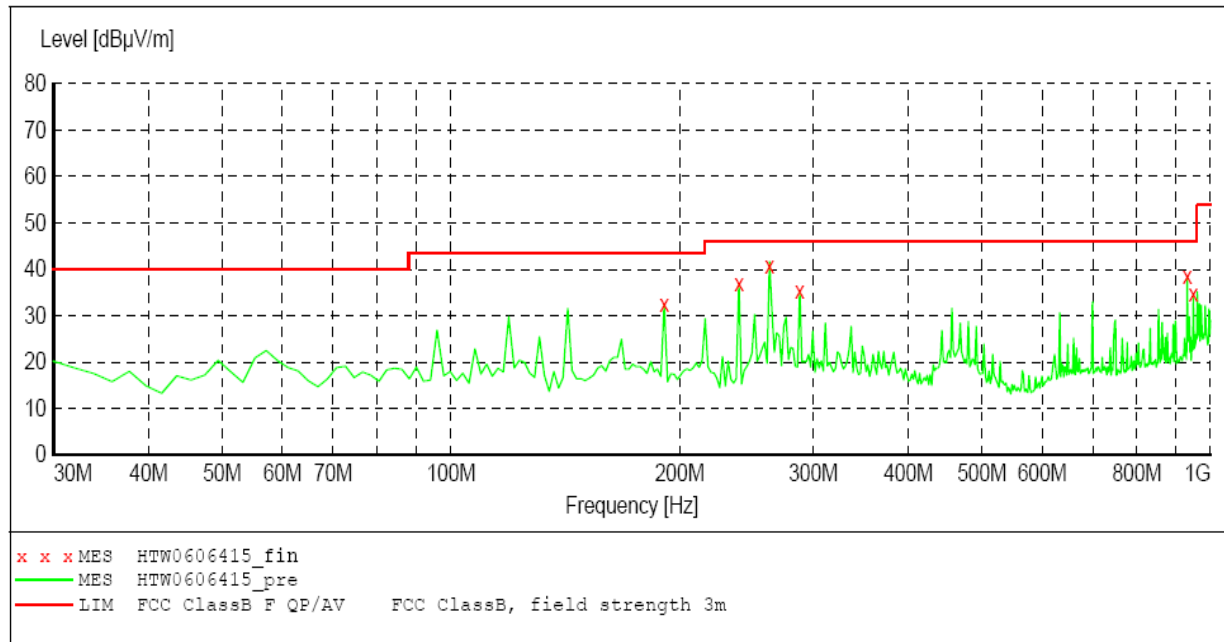**MEASUREMENT RESULT: "HTW0606415_fin"**

6/7/2012 9:29AM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
191.020000	32.50	-22.2	43.5	11.0	QP	100.0	49.00	HORIZONTAL
239.520000	37.00	-18.9	46.0	9.0	QP	100.0	0.00	HORIZONTAL
262.800000	40.70	-18.1	46.0	5.3	QP	100.0	346.00	HORIZONTAL
288.020000	35.40	-17.7	46.0	10.6	QP	100.0	275.00	HORIZONTAL
932.100000	38.60	-7.2	46.0	7.4	QP	100.0	65.00	HORIZONTAL
949.560000	34.60	-7.4	46.0	11.4	QP	100.0	39.00	HORIZONTAL

Note: 1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.

**Radiated emission in frequency band above 1GHz
802.11b Mode**

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	55.75 PK	74.00	18.25	1.00 H	216	59.15	28.3	4.90	-36.6	-3.40
1	2390.00	46.91 AV	54.00	7.09	1.00 H	216	50.31	28.3	4.90	-36.6	-3.40
2	*2412.00	91.64 PK			1.00 H	360	95.04	28.3	4.90	-36.6	-3.40
2	*2412.00	85.21 AV			1.00 H	360	88.61	28.3	4.90	-36.6	-3.40
3	4824.00	49.61 PK	74.00	24.39	1.00 H	359	46.41	32.7	7.00	-36.5	3.20
3	4824.00	40.63 AV	54.00	13.37	1.00 H	359	37.43	32.7	7.00	-36.5	3.20
4	7236.00	51.99 PK	74.00	22.01	1.00 H	152	42.59	35.8	8.90	-35.3	9.40
4	7236.00	44.30 AV	54.00	9.70	1.00 H	152	34.90	35.8	8.90	-35.3	9.40
5	9648.00	51.40 PK	74.00	22.60	1.00 H	140	38.80	37.2	10.20	-34.8	12.60
5	9648.00	43.72 AV	54.00	10.28	1.00 H	140	31.12	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2412MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	55.55 PK	74.00	18.45	1.00 V	192	58.95	28.3	4.90	-36.6	-3.40
1	2390.00	46.35 AV	54.00	7.65	1.00 V	192	49.75	28.3	4.90	-36.6	-3.40
2	*2412.00	95.87 PK			1.00 V	124	97.27	28.3	4.90	-36.6	-3.40
2	*2412.00	86.82 AV			1.00 V	124	90.22	28.3	4.90	-36.6	-3.40
3	4824.00	53.32 PK	74.00	20.68	1.00 V	339	50.12	32.7	7.00	-36.5	3.20
3	4824.00	43.74 AV	54.00	10.26	1.00 V	339	40.54	32.7	7.00	-36.5	3.20
4	7236.00	53.01 PK	74.00	20.99	1.00 V	340	43.61	35.8	8.90	-35.3	9.40
4	7236.00	42.20 AV	54.00	11.80	1.00 V	340	32.80	35.8	8.90	-35.3	9.40
5	9648.00	54.02 PK	74.00	19.98	1.00 V	20	41.42	37.2	10.20	-34.8	12.60
5	9648.00	44.04 AV	54.00	9.96	1.00 V	20	31.44	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	94.84 PK			1.00 H	153	98.04	28.3	5.10	-36.6	-3.20
1	*2437.00	85.79 AV			1.00 H	153	88.99	28.3	5.10	-36.6	-3.20
2	4874.00	46.75 PK	74.00	27.25	1.00 H	202	43.35	32.3	7.60	-36.5	3.40
2	4874.00	35.54 AV	54.00	18.46	1.00 H	202	32.14	32.3	7.60	-36.5	3.40
3	7311.00	52.18 PK	74.00	21.82	1.00 H	355	42.78	36.1	8.60	-35.3	9.40
3	7311.00	40.16 AV	54.00	13.84	1.00 H	355	30.76	36.1	8.60	-35.3	9.40
4	9748.00	54.01 PK	74.00	19.99	1.00 H	28	41.41	37.2	10.20	-34.8	12.60
4	9748.00	41.67 AV	54.00	12.33	1.00 H	28	29.07	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2437MHz)

No.	Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	96.23 PK			1.00 V	121	99.43	28.3	5.10	-36.6	-3.20
1	*2437.00	85.81 AV			1.00 V	121	89.01	28.3	5.10	-36.6	-3.20
2	4874.00	47.86 PK	74.00	26.14	1.00 V	97	44.46	32.3	7.60	-36.5	3.40
2	4874.00	35.61 AV	54.00	18.39	1.00 V	97	32.21	32.3	7.60	-36.5	3.40
3	7311.00	60.34 PK	74.00	13.66	1.00 V	288	50.94	36.1	8.60	-35.3	9.40
3	7311.00	40.46 AV	54.00	13.54	1.00 V	288	31.06	36.1	8.60	-35.3	9.40
4	9748.00	50.23 PK	74.00	23.77	1.00 V	89	37.63	37.2	10.20	-34.8	12.60
4	9748.00	39.02 AV	54.00	14.98	1.00 V	89	26.42	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11b--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	90.45	PK			1.00 H	154	93.75	28.6	4.70	-36.6	-3.30
1	*2462.00	82.41	AV			1.00 H	154	85.71	28.6	4.70	-36.6	-3.30
2	2483.50	65.80	PK	74.00	8.20	1.00 H	146	69.10	28.6	4.70	-36.6	-3.30
2	2483.50	50.43	AV	54.00	3.57	1.00 H	146	53.73	28.6	4.70	-36.6	-3.30
3	4924.00	50.50	PK	74.00	23.50	1.00 H	100	46.70	33.0	7.00	-36.2	3.80
3	4924.00	34.87	AV	54.00	19.13	1.00 H	100	31.07	33.0	7.00	-36.2	3.80
4	7386.00	57.43	PK	74.00	16.57	1.00 H	190	48.03	36.2	8.50	-35.3	9.40
4	7386.00	43.98	AV	54.00	10.02	1.00 H	190	34.58	36.2	8.50	-35.3	9.40
5	9848.00	51.32	PK	74.00	22.68	1.00 H	113	38.72	37.2	10.20	-34.8	12.60
5	9848.00	38.46	AV	54.00	15.54	1.00 H	113	25.86	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11b--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	94.46	PK			1.00 V	247	97.76	28.6	4.70	-36.6	-3.30
1	*2462.00	86.90	AV			1.00 V	247	90.20	28.6	4.70	-36.6	-3.30
2	2483.50	60.13	PK	74.00	13.87	1.00 V	150	63.43	28.6	4.70	-36.6	-3.30
2	2483.50	45.02	AV	54.00	8.98	1.00 V	150	48.32	28.6	4.70	-36.6	-3.30
3	4924.00	56.19	PK	74.00	17.81	1.00 V	90	52.39	33.0	7.00	-36.2	3.80
3	4924.00	48.79	AV	54.00	5.21	1.00 V	90	44.99	33.0	7.00	-36.2	3.80
4	7386.00	65.24	PK	74.00	8.76	1.00 V	29	55.84	36.2	8.50	-35.3	9.40
4	7386.00	43.93	AV	54.00	10.07	1.00 V	29	34.53	36.2	8.50	-35.3	9.40
5	9848.00	56.98	PK	74.00	17.02	1.00 V	222	44.38	37.2	10.20	-34.8	12.60
5	9848.00	41.51	AV	54.00	12.49	1.00 V	222	28.91	37.2	10.20	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) +Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. The limit value is defined as per 15.247
 6. “* “: Fundamental frequency
 7. For Wireless 802.11b mode at 11Mbps.
 8. the radiated spurious measurements were performed till the 10th harmonic ,but the test values lower than the limit values 20dB ,so we are not record in the report.

802.11g Mode**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2412MHz)**

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	65.24	PK	74.00	8.76	1.00 H	142	68.54	28.3	5.00	-36.6	-3.30
1	2390.00	50.47	AV	54.00	3.53	1.00 H	142	53.77	28.3	5.00	-36.6	-3.30
2	*2412.00	91.78	PK			1.00 H	123	95.08	28.3	5.00	-36.6	-3.30
2	*2412.00	85.47	AV			1.00 H	123	88.77	28.3	5.00	-36.6	-3.30
3	4824.00	49.92	PK	74.00	24.08	1.00 H	216	46.12	32.7	7.30	-36.2	3.80
3	4824.00	42.10	AV	54.00	11.90	1.00 H	216	38.30	32.7	7.30	-36.2	3.80
4	7236.00	56.30	PK	74.00	17.70	1.00 H	176	46.90	35.8	8.90	-35.3	9.40
4	7236.00	42.03	AV	54.00	11.97	1.00 H	176	32.63	35.8	8.90	-35.3	9.40
5	9648.00	51.18	PK	74.00	22.82	1.00 H	72	38.58	37.2	10.20	-34.8	12.60
5	9648.00	42.41	AV	54.00	11.59	1.00 H	72	29.81	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	65.18	PK	74.00	8.82	1.00 V	199	68.48	28.3	5.00	-36.6	-3.30
1	2390.00	53.40	AV	54.00	0.60	1.00 V	199	56.70	28.3	5.00	-36.6	-3.30
2	*2412.00	96.76	PK			1.00 V	127	100.06	28.3	5.00	-36.6	-3.30
2	*2412.00	86.69	AV			1.00 V	127	89.99	28.3	5.00	-36.6	-3.30
3	4824.00	57.35	PK	74.00	16.65	1.00 V	95	53.55	32.7	7.30	-36.2	3.80
3	4824.00	45.54	AV	54.00	8.46	1.00 V	95	41.74	32.7	7.30	-36.2	3.80
4	7236.00	62.93	PK	74.00	11.07	1.00 V	0	53.53	35.8	8.90	-35.3	9.40
4	7236.00	48.83	AV	54.00	5.17	1.00 V	0	39.43	35.8	8.90	-35.3	9.40
5	9648.00	61.30	PK	74.00	12.70	1.00 V	264	48.70	37.2	10.20	-34.8	12.60
5	9648.00	52.51	AV	54.00	1.49	1.00 V	264	39.91	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	94.12	PK			1.00 H	100	97.32	28.3	5.10	-36.6	-3.20
1	*2437.00	80.01	AV			1.00 H	100	83.21	28.3	5.10	-36.6	-3.20
2	4874.00	65.12	PK	74.00	8.88	1.00 H	214	61.72	32.8	7.10	-36.5	3.40
2	4874.00	47.53	AV	54.00	6.47	1.00 H	214	44.13	32.8	7.10	-36.5	3.40
3	7311.00	60.05	PK	74.00	13.95	1.00 H	0	50.65	36.1	8.60	-35.3	9.40
3	7311.00	47.27	AV	54.00	6.73	1.00 H	0	37.87	36.1	8.60	-35.3	9.40
4	9748.00	51.16	PK	74.00	22.84	1.00 H	163	38.56	37.2	10.20	-34.8	12.60
4	9748.00	40.72	AV	54.00	13.28	1.00 H	163	28.12	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	95.79	PK			1.00 V	122	98.99	28.3	5.10	-36.6	-3.20
1	*2437.00	85.34	AV			1.00 V	122	88.54	28.3	5.10	-36.6	-3.20
2	4874.00	59.98	PK	74.00	14.02	1.00 V	100	56.58	32.8	7.10	-36.5	3.40
2	4874.00	43.11	AV	54.00	10.89	1.00 V	100	39.71	32.8	7.10	-36.5	3.40
3	7311.00	54.85	PK	74.00	19.15	1.00 V	356	45.45	36.1	8.60	-35.3	9.40
3	7311.00	44.36	AV	54.00	9.64	1.00 V	356	34.96	36.1	8.60	-35.3	9.40
4	9748.00	50.63	PK	74.00	23.37	1.00 V	26	38.03	37.2	10.20	-34.8	12.60
4	9748.00	42.86	AV	54.00	11.14	1.00 V	26	30.26	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	90.14	PK			1.00 H	156	93.44	28.2	5.10	-36.6	-3.30
1	*2462.00	83.24	AV			1.00 H	156	86.54	28.2	5.10	-36.6	-3.30
2	2483.50	55.98	PK	74.00	18.02	1.00 H	191	59.28	28.2	5.10	-36.6	-3.30
2	2483.50	48.35	AV	54.00	5.65	1.00 H	191	51.65	28.2	5.10	-36.6	-3.30
3	4924.00	52.24	PK	74.00	21.76	1.00 H	198	48.44	33.0	7.00	-36.2	3.80
3	4924.00	39.43	AV	54.00	14.57	1.00 H	198	35.63	33.0	7.00	-36.2	3.80
4	7386.00	56.77	PK	74.00	17.23	1.00 H	90	47.37	36.2	8.50	-35.3	9.40
4	7386.00	43.93	AV	54.00	10.07	1.00 H	90	34.53	36.2	8.50	-35.3	9.40
5	9848.00	54.23	PK	74.00	19.77	1.00 H	124	41.63	37.3	10.10	-34.8	12.60
5	9848.00	47.05	AV	54.00	6.95	1.00 H	124	34.45	37.3	10.10	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11g--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	89.34	PK			1.00 V	125	92.64	28.2	5.10	-36.6	-3.30
1	*2462.00	81.15	AV			1.00 V	125	84.45	28.2	5.10	-36.6	-3.30
2	2483.50	57.63	PK	74.00	16.37	1.00 V	348	60.93	28.2	5.10	-36.6	-3.30
2	2483.50	44.33	AV	54.00	9.67	1.00 V	348	47.63	28.2	5.10	-36.6	-3.30
3	4924.00	47.97	PK	74.00	26.03	1.00 V	96	44.17	33.0	7.00	-36.2	3.80
3	4924.00	36.54	AV	54.00	17.46	1.00 V	96	32.74	33.0	7.00	-36.2	3.80
4	7386.00	55.99	PK	74.00	18.01	1.00 V	35	46.59	36.2	8.50	-35.3	9.40
4	7386.00	44.23	AV	54.00	9.77	1.00 V	35	34.83	36.2	8.50	-35.3	9.40
5	9848.00	47.28	PK	74.00	26.72	1.00 V	37	34.68	37.3	10.10	-34.8	12.60
5	9848.00	40.80	AV	54.00	13.20	1.00 V	37	28.20	37.3	10.10	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) + Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency
 7. For Wireless 802.11g mode at 54Mbps.
 8. the radiated spurious measurements were performed till the 10th harmonic ,but the test values lower than the limit values 20dB ,so we are not record in the report.

802.11n20 Mode

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	51.76	PK	74.00	22.24	1.00 H	248	55.06	28.3	5.00	-36.6	-3.30
1	2390.00	40.03	AV	54.00	13.97	1.00 H	248	43.33	28.3	5.00	-36.6	-3.30
2	*2412.00	95.20	PK			1.00 H	100	98.50	28.3	5.00	-36.6	-3.30
2	*2412.00	85.25	AV			1.00 H	100	88.55	28.3	5.00	-36.6	-3.30
3	4824.00	57.19	PK	74.00	16.81	1.00 H	204	53.39	32.7	7.30	-36.2	3.80
3	4824.00	43.37	AV	54.00	10.63	1.00 H	204	39.57	32.7	7.30	-36.2	3.80
4	7236.00	58.34	PK	74.00	15.66	1.00 H	114	48.94	35.8	8.90	-35.3	9.40
4	7236.00	42.81	AV	54.00	11.19	1.00 H	114	33.41	35.8	8.90	-35.3	9.40
5	9648.00	50.59	PK	74.00	23.41	1.00 H	93	37.99	37.2	10.20	-34.8	12.60
5	9648.00	42.16	AV	54.00	11.84	1.00 H	93	29.56	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2412MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	53.28	PK	74.00	20.72	1.00 V	123	56.58	28.3	5.00	-36.6	-3.30
1	2390.00	40.99	AV	54.00	13.01	1.00 V	123	44.29	28.3	5.00	-36.6	-3.30
2	*2412.00	96.16	PK			1.00 V	123	99.46	28.3	5.00	-36.6	-3.30
2	*2412.00	88.10	AV			1.00 V	123	92.40	28.3	5.00	-36.6	-3.30
3	4824.00	59.05	PK	74.00	14.95	1.00 V	100	55.25	32.7	7.30	-36.2	3.80
3	4824.00	45.05	AV	54.00	8.95	1.00 V	100	41.25	32.7	7.30	-36.2	3.80
4	7236.00	60.96	PK	74.00	13.04	1.00 V	236	51.56	35.8	8.90	-35.3	9.40
4	7236.00	46.55	AV	54.00	7.45	1.00 V	236	37.15	35.8	8.90	-35.3	9.40
5	9648.00	57.25	PK	74.00	16.75	1.00 V	1163	44.65	37.2	10.20	-34.8	12.60
5	9648.00	47.04	AV	54.00	6.96	1.00 V	116	34.44	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	92.16	PK			1.00 H	120	95.36	28.3	5.10	-36.6	-3.20
1	*2437.00	85.08	AV			1.00 H	120	88.28	28.3	5.10	-36.6	-3.20
2	4874.00	51.25	PK	74.00	22.75	1.00 H	194	47.85	32.3	7.60	-36.5	3.40
2	4874.00	41.10	AV	54.00	12.90	1.00 H	194	37.70	32.3	7.60	-36.5	3.40
3	7311.00	53.94	PK	74.00	20.06	1.00 H	248	44.54	36.1	8.60	-35.3	9.40
3	7311.00	45.37	AV	54.00	8.63	1.00 H	248	35.97	36.1	8.60	-35.3	9.40
4	9748.00	50.43	PK	74.00	23.57	1.00 H	36	37.83	37.2	10.20	-34.8	12.60
4	9748.00	43.01	AV	54.00	10.99	1.00 H	36	30.41	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	95.10	PK			1.00 V	122	98.30	28.3	5.10	-36.6	-3.20
1	*2437.00	87.22	AV			1.00 V	122	90.42	28.3	5.10	-36.6	-3.20
2	4874.00	53.27	PK	74.00	20.73	1.00 V	181	49.87	32.3	7.60	-36.5	3.40
2	4874.00	42.00	AV	54.00	12.00	1.00 V	181	38.60	32.3	7.60	-36.5	3.40
3	7311.00	60.38	PK	74.00	13.62	1.00 V	346	50.98	36.1	8.60	-35.3	9.40
3	7311.00	43.24	AV	54.00	10.76	1.00 V	346	33.84	36.1	8.60	-35.3	9.40
4	9748.00	53.63	PK	74.00	20.37	1.00 V	335	41.03	37.2	10.20	-34.8	12.60
4	9748.00	47.03	AV	54.00	6.97	1.00 V	335	34.43	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n20--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	92.88	PK			1.00 H	122	96.18	28.2	5.10	-36.6	-3.30
1	*2462.00	84.10	AV			1.00 H	122	87.40	28.2	5.10	-36.6	-3.30
2	2483.50	59.40	PK	74.00	14.60	1.00 H	354	62.70	28.2	5.10	-36.6	-3.30
2	2483.50	47.77	AV	54.00	6.23	1.00 H	354	51.07	28.2	5.10	-36.6	-3.30
3	4924.00	51.52	PK	74.00	22.48	1.00 H	217	47.72	33.0	7.00	-36.2	3.80
3	4924.00	39.00	AV	54.00	15.00	1.00 H	217	35.20	33.0	7.00	-36.2	3.80
4	7386.00	56.04	PK	74.00	17.96	1.00 H	0	46.64	36.2	8.50	-35.3	9.40
4	7386.00	44.89	AV	54.00	9.11	1.00 H	0	35.49	36.2	8.50	-35.3	9.40
5	9848.00	51.59	PK	74.00	22.41	1.00 H	118	38.99	37.3	10.10	-34.8	12.60
5	9848.00	44.32	AV	54.00	9.68	1.00 H	118	31.72	37.3	10.10	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n20--2462MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2462.00	95.10	PK			1.00 V	125	98.40	28.2	5.10	-36.6	-3.30
1	*2462.00	85.12	AV			1.00 V	125	88.42	28.2	5.10	-36.6	-3.30
2	2483.50	61.05	PK	74.00	12.95	1.00 V	153	64.35	28.2	5.10	-36.6	-3.30
2	2483.50	47.77	AV	54.00	6.23	1.00 V	153	51.07	28.2	5.10	-36.6	-3.30
3	4924.00	47.14	PK	74.00	26.86	1.00 V	100	43.34	33.0	7.00	-36.2	3.80
3	4924.00	35.04	AV	54.00	18.96	1.00 V	100	31.24	33.0	7.00	-36.2	3.80
4	7386.00	55.17	PK	74.00	18.83	1.00 V	0	45.77	36.2	8.50	-35.3	9.40
4	7386.00	43.24	AV	54.00	10.76	1.00 V	0	33.84	36.2	8.50	-35.3	9.40
5	9848.00	50.18	PK	74.00	23.82	1.00 V	187	37.58	37.3	10.10	-34.8	12.60
5	9848.00	39.42	AV	54.00	14.58	1.00 V	187	26.82	37.3	10.10	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) + Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value - Emission level.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency
 7. For Wireless 802.11n (20MHz) mode at 65Mbps.
 8. the radiated spurious measurements were performed till the 10th harmonic ,but the test values lower than the limit values 20dB ,so we are not record in the report.

802.11n40 Mode

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2422MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	52.77	PK	74.00	21.23	1.00 H	222	56.07	28.3	5.00	-36.6	-3.30
1	2390.00	41.46	AV	54.00	12.54	1.00 H	222	44.76	28.3	5.00	-36.6	-3.30
2	*2422.00	95.10	PK			1.00 H	123	98.40	28.3	5.00	-36.6	-3.30
2	*2422.00	84.97	AV			1.00 H	123	88.27	28.3	5.00	-36.6	-3.30
3	4844.00	53.27	PK	74.00	20.73	1.00 H	91	49.47	32.7	7.30	-36.2	3.80
3	4844.00	38.33	AV	54.00	15.67	1.00 H	91	34.53	32.7	7.30	-36.2	3.80
4	7266.00	46.77	PK	74.00	27.23	1.00 H	266	37.37	35.8	8.90	-35.3	9.40
4	7266.00	38.37	AV	54.00	15.63	1.00 H	266	28.97	35.8	8.90	-35.3	9.40
5	9688.00	52.97	PK	74.00	21.03	1.00 H	337	40.37	37.2	10.20	-34.8	12.60
5	9688.00	43.32	AV	54.00	10.68	1.00 H	337	30.72	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2422MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2390.00	57.23	PK	74.00	16.77	1.00 V	80	60.53	28.3	5.00	-36.6	-3.30
1	2390.00	43.33	AV	54.00	10.67	1.00 V	80	46.63	28.3	5.00	-36.6	-3.30
2	*2422.00	95.08	PK			1.00 V	127	98.38	28.3	5.00	-36.6	-3.30
2	*2422.00	86.64	AV			1.00 V	127	89.94	28.3	5.00	-36.6	-3.30
3	4844.00	52.12	PK	74.00	21.88	1.00 V	211	48.32	32.7	7.30	-36.2	3.80
3	4844.00	39.67	AV	54.00	14.33	1.00 V	211	35.87	32.7	7.30	-36.2	3.80
4	7266.00	61.34	PK	74.00	12.66	1.00 V	57	51.94	35.8	8.90	-35.3	9.40
4	7266.00	46.57	AV	54.00	7.43	1.00 V	57	37.17	35.8	8.90	-35.3	9.40
5	9688.00	51.07	PK	74.00	22.93	1.00 V	249	38.47	37.2	10.20	-34.8	12.60
5	9688.00	42.35	AV	54.00	11.65	1.00 V	249	29.75	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	94.73	PK			1.00 H	100	97.93	28.3	5.10	-36.6	-3.20
1	*2437.00	86.72	AV			1.00 H	100	89.92	28.3	5.10	-36.6	-3.20
2	4874.00	53.24	PK	74.00	20.76	1.00 H	198	49.84	32.3	7.60	-36.5	3.40
2	4874.00	41.00	AV	54.00	13.00	1.00 H	198	37.60	32.3	7.60	-36.5	3.40
3	7311.00	57.04	PK	74.00	16.96	1.00 H	203	47.64	36.1	8.60	-35.3	9.40
3	7311.00	42.24	AV	54.00	11.76	1.00 H	203	32.84	36.1	8.60	-35.3	9.40
4	9748.00	50.48	PK	74.00	23.52	1.00 H	56	37.88	37.2	10.20	-34.8	12.60
4	9748.00	42.46	AV	54.00	11.54	1.00 H	56	29.86	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2437MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2437.00	96.43	PK			1.00 V	122	99.63	28.3	5.10	-36.6	-3.20
1	*2437.00	88.07	AV			1.00 V	122	91.27	28.3	5.10	-36.6	-3.20
2	4874.00	51.25	PK	74.00	22.75	1.00 V	96	47.85	32.3	7.60	-36.5	3.40
2	4874.00	44.14	AV	54.00	9.86	1.00 V	96	40.74	32.3	7.60	-36.5	3.40
3	7311.00	56.40	PK	74.00	17.60	1.00 V	26	47.00	36.1	8.60	-35.3	9.40
3	7311.00	42.93	AV	54.00	11.07	1.00 V	26	33.53	36.1	8.60	-35.3	9.40
4	9748.00	48.90	PK	74.00	25.10	1.00 V	299	36.30	37.2	10.20	-34.8	12.60
4	9748.00	38.67	AV	54.00	15.33	1.00 V	299	26.07	37.2	10.20	-34.8	12.60

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (802.11n40--2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2452.00	95.19	PK			1.00 H	153	98.39	28.2	5.20	-36.6	-3.20
1	*2452.00	84.70	AV			1.00 H	153	87.90	28.2	5.20	-36.6	-3.20
2	2483.50	58.58	PK	74.00	15.42	1.00 H	127	61.88	28.2	5.10	-36.6	-3.30
2	2483.50	44.46	AV	54.00	9.54	1.00 H	127	47.76	28.2	5.10	-36.6	-3.30
3	4904.00	51.21	PK	74.00	22.79	1.00 H	204	47.41	33.0	7.00	-36.2	3.80
3	4904.00	38.63	AV	54.00	15.37	1.00 H	204	34.83	33.0	7.00	-36.2	3.80
4	7356.00	57.56	PK	74.00	16.44	1.00 H	301	48.16	36.2	8.50	-35.3	9.40
4	7356.00	43.93	AV	54.00	10.07	1.00 H	301	34.53	36.2	8.50	-35.3	9.40
5	9808.00	50.64	PK	74.00	23.36	1.00 H	118	38.04	37.3	10.10	-34.8	12.60
5	9808.00	41.05	AV	54.00	12.95	1.00 H	118	28.45	37.3	10.10	-34.8	12.60


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (802.11n40--2452MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	*2452.00	96.24	PK			1.00 V	125	99.44	28.2	5.20	-36.6	-3.20
1	*2452.00	86.12	AV			1.00 V	125	89.32	28.2	5.20	-36.6	-3.20
2	2483.50	50.15	PK	74.00	23.85	1.00 V	143	53.45	28.2	5.10	-36.6	-3.30
2	2483.50	38.83	AV	54.00	15.17	1.00 V	143	42.13	28.2	5.10	-36.6	-3.30
3	4904.00	55.77	PK	74.00	18.23	1.00 V	177	51.97	33.0	7.00	-36.2	3.80
3	4904.00	40.95	AV	54.00	13.05	1.00 V	177	37.15	33.0	7.00	-36.2	3.80
4	7356.00	60.91	PK	74.00	13.09	1.00 V	0	51.51	36.2	8.50	-35.3	9.40
4	7356.00	44.99	AV	54.00	9.01	1.00 V	0	35.59	36.2	8.50	-35.3	9.40
5	9808.00	53.06	PK	74.00	20.94	1.00 V	315	40.46	37.3	10.10	-34.8	12.60
5	9808.00	38.02	AV	54.00	15.98	1.00 V	315	25.42	37.3	10.10	-34.8	12.60

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) + Pre-amplifier Factor
 3. The other emission levels were very low against the limit.
 4. Margin value = Limit value- Emission level.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency
 7. For Wireless 802.11n (40MHz) mode at 135Mbps.
 8. the radiated spurious measurements were performed till the 10th harmonic ,but the test values lower than the limit values 20dB ,so we are not record in the report.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

LIMIT


The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Channel	Frequency (MHz)	Reading Power Output(dBm)	Limit (dBm)	Pass / Fail
802.11b				
Low	2412	10.98	30	PASS
Middle	2437	10.92	30	PASS
High	2462	10.99	30	PASS
802.11g				
Low	2412	10.31	30	PASS
Middle	2437	10.34	30	PASS
High	2462	10.47	30	PASS
802.11n20				
Low	2412	9.96	30	PASS
Middle	2437	9.97	30	PASS
High	2462	9.93	30	PASS
802.11n40				
Low	2422	9.76	30	PASS
Middle	2437	9.37	30	PASS
High	2452	9.33	30	PASS


Photos of Maximum Peak Output Power

802.11b Mode channel 1

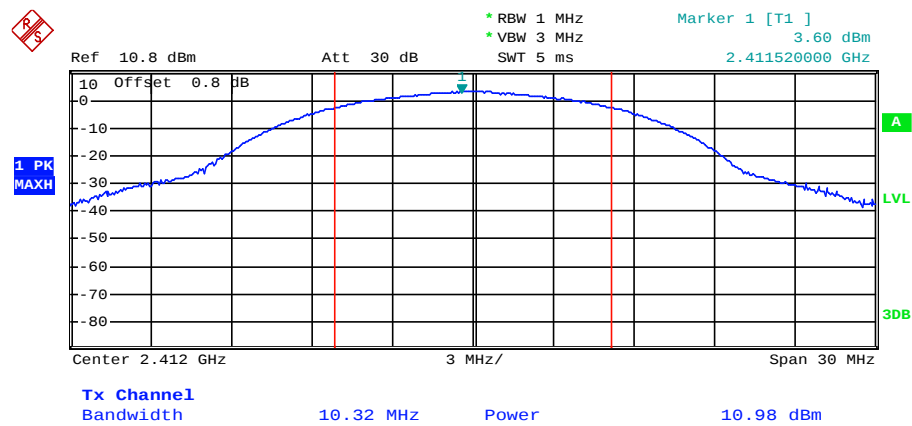


Date: 11.JUN.2012 13:45:12

802.11b Mode channel 6

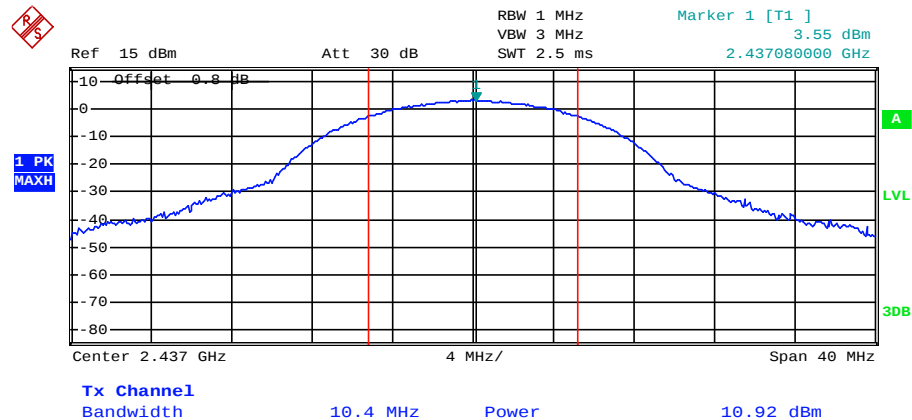


Date: 11.JUN.2012 15:00:31

802.11b Mode channel 11

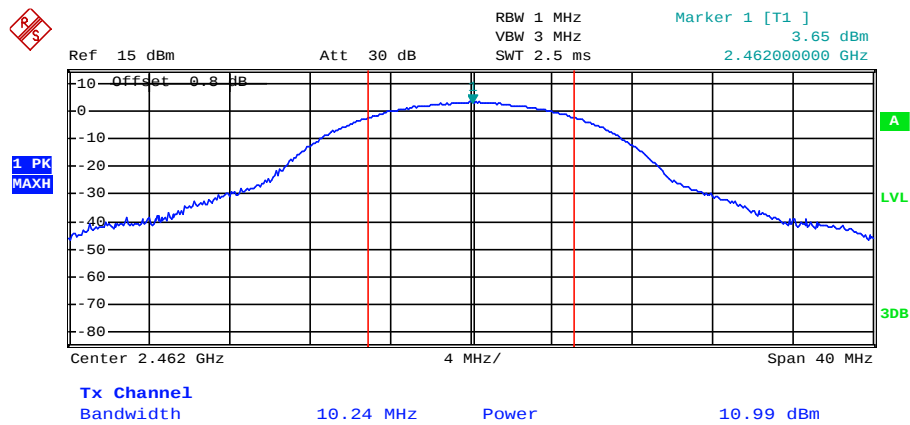


Date: 11.JUN.2012 15:01:39

802.11g Mode channel 1

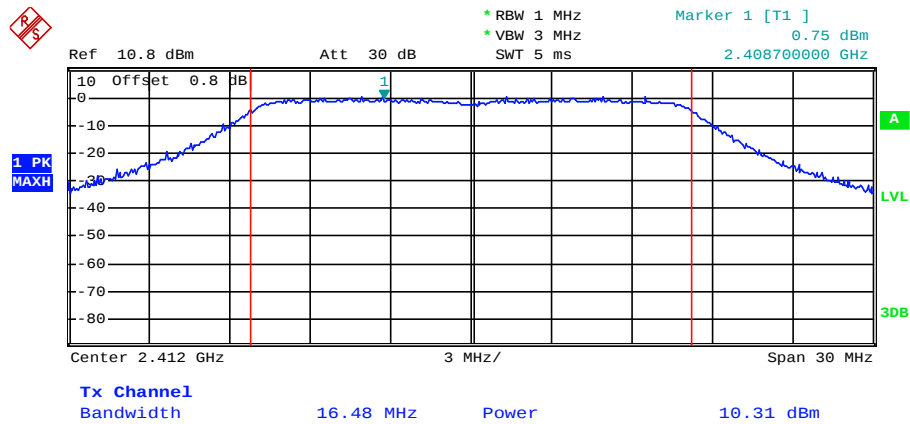


Date: 11.JUN.2012 13:47:28

802.11g Mode channel 6

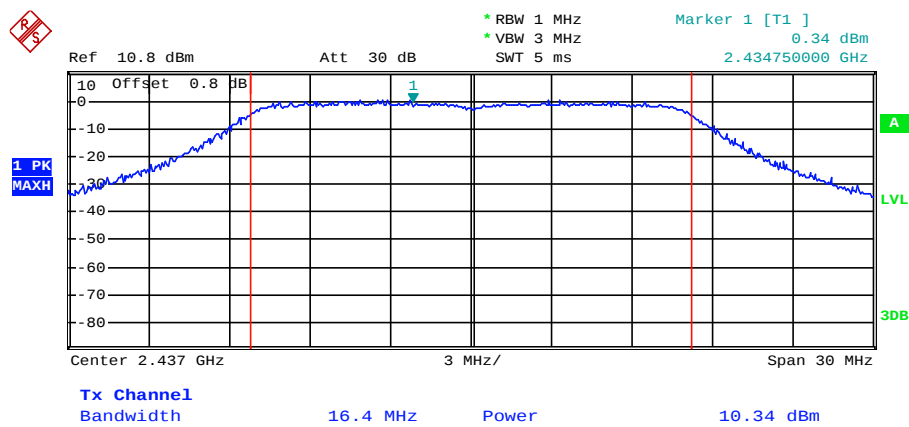


Date: 11.JUN.2012 13:48:43

802.11g Mode channel 11

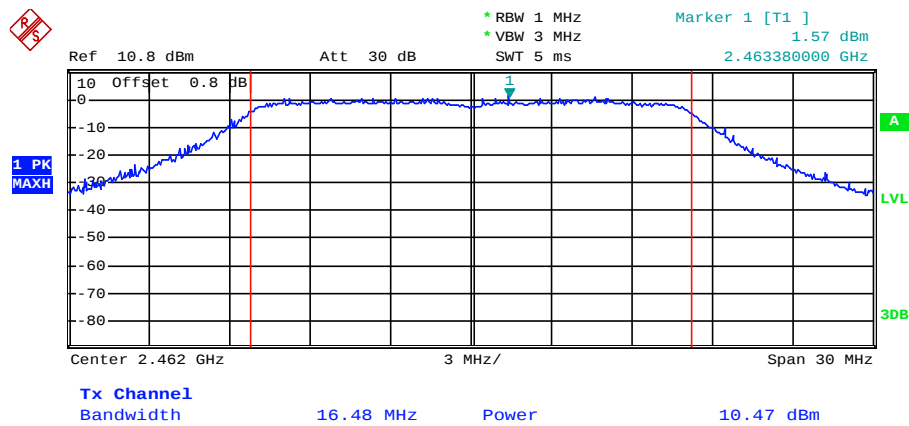


Date: 11.JUN.2012 13:50:18

802.11n20 Mode channel 1

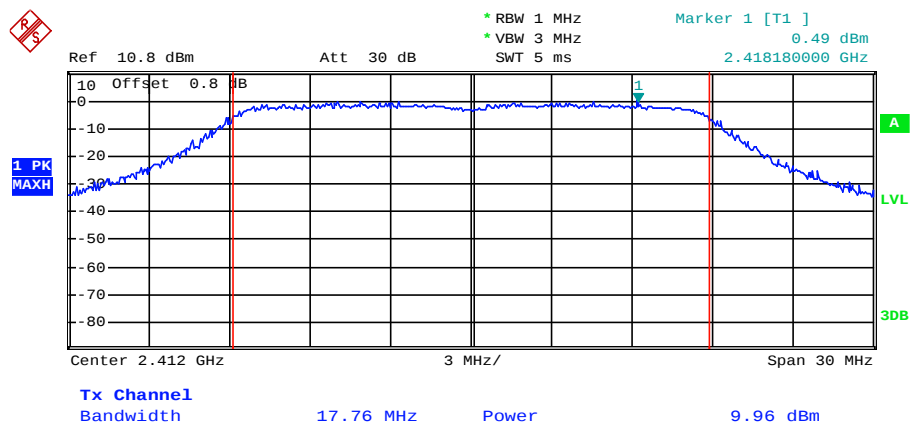


Date: 11.JUN.2012 13:54:25

802.11n20 Mode channel 6

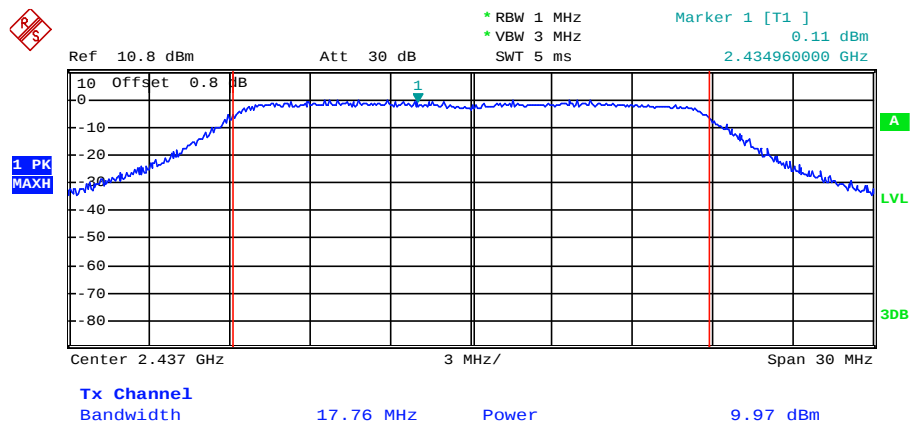


Date: 11.JUN.2012 13:53:00

802.11n20 Mode channel 11

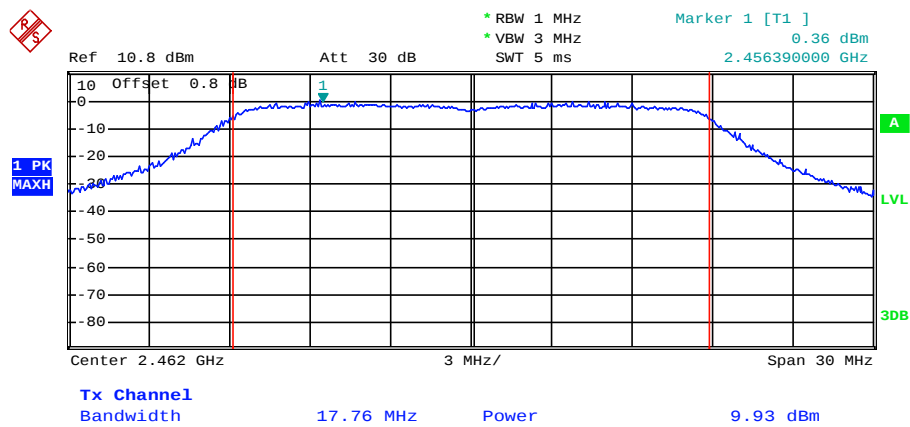


Date: 11.JUN.2012 13:52:06

802.11n40 Mode channel 3

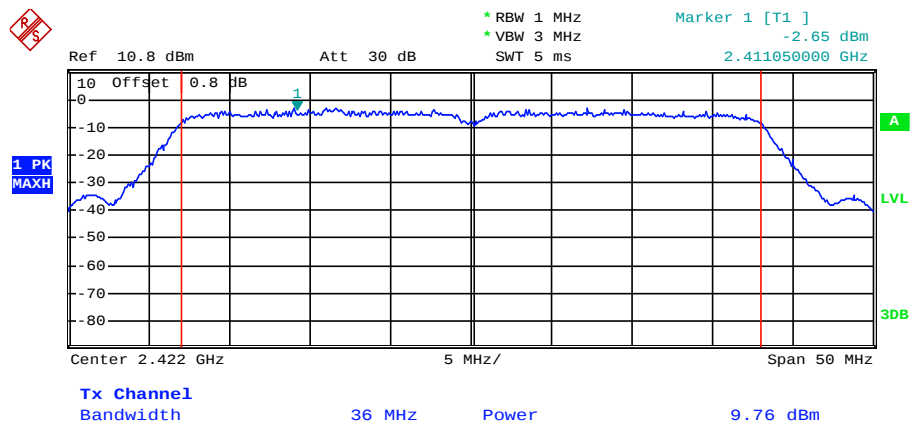


Date: 11.JUN.2012 13:56:04

802.11n40 Mode channel 6

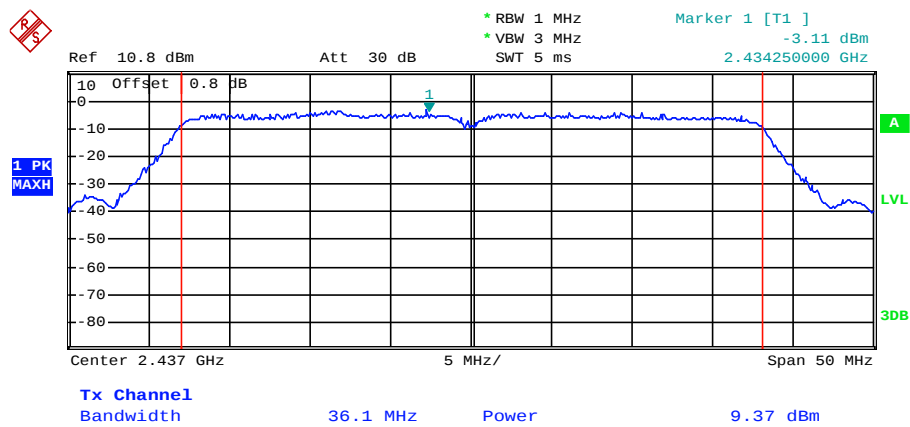

Date: 11.JUN.2012 13:59:57


802.11n40 Mode channel 9

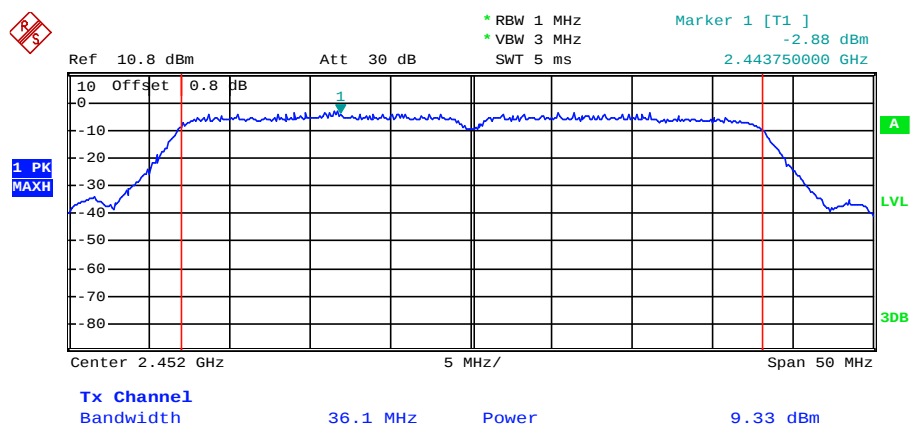

Date: 11.JUN.2012 13:58:48

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW = 100 kHz.
3. Set the VBW 300 kHz.
4. Set the span to 5-30 % greater than the EBW
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
10. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$.
11. The resulting peak PSD level must be 8 dBm.

Follow KDB 558074 D01 DTS Meas Guidance v01 of measurement procedure PKPSD

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/100KHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
1	2412	-2.58	-17.78	8	PASS
6	2437	-2.62	-17.82	8	PASS
11	2462	-3.48	-18.68	8	PASS

Note: 1. For 802.11b mode at final test to get the worst-case emission at 11Mbps.
2. The test results including the cable loss.

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/100KHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
1	2412	-9.66	-24.86	8	PASS
6	2437	-10.05	-25.25	8	PASS
11	2462	-10.60	-25.8	8	PASS

Note: 1. For 802.11g mode at final test to get the worst-case emission at 54Mbps.
2. The test results including the cable loss.

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/100KHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
1	2412	-9.73	-24.93	8	PASS
6	2437	-10.03	-25.23	8	PASS
11	2462	-10.62	-25.82	8	PASS


Note: 1. For 802.11n(20MHz) mode at final test to get the worst-case emission at 65 Mbps.
2. The test results including the cable lose.

CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/100KHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
3	2422	-12.87	-28.07	8	PASS
6	2437	-12.91	-28.11	8	PASS
9	2452	-13.18	-28.38	8	PASS

Note: 1. For 802.11n(40MHz) mode at final test to get the worst-case emission at 135Mbps.
2. The test results including the cable lose.


Photos of Power Spectral Density Measurement

802.11b Mode channel 1

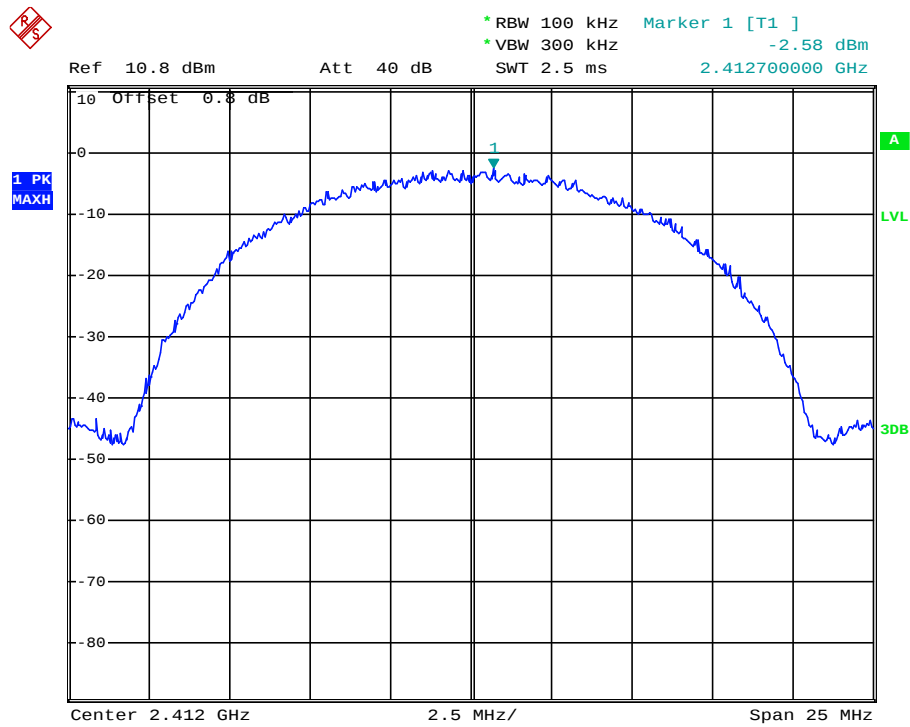


Date: 11.JUN.2012 14:12:22

802.11b Mode channel 6

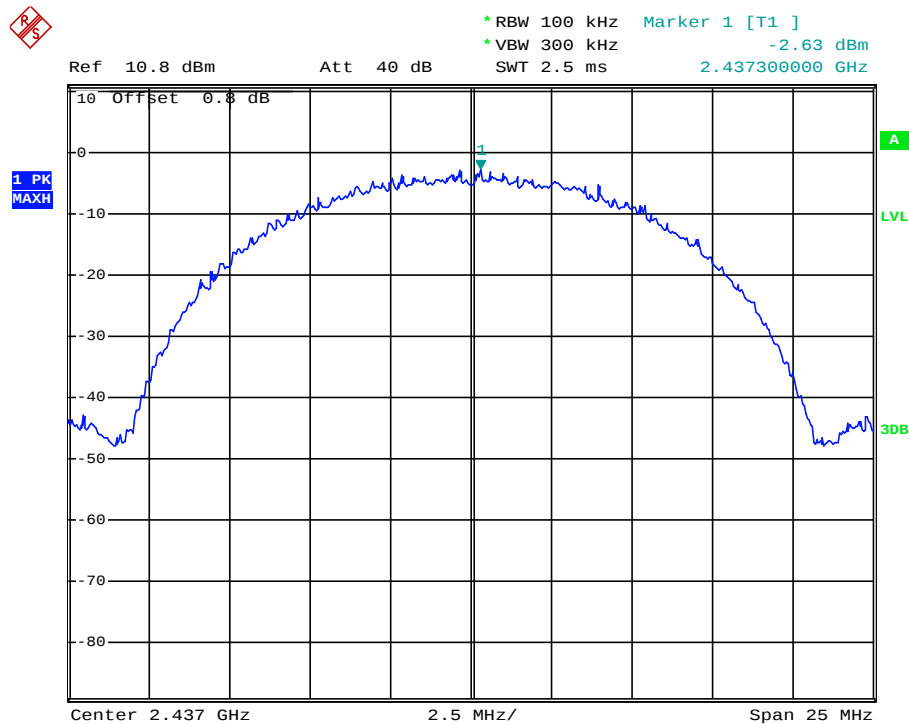


Date: 11.JUN.2012 14:13:22

802.11b Mode channel 11

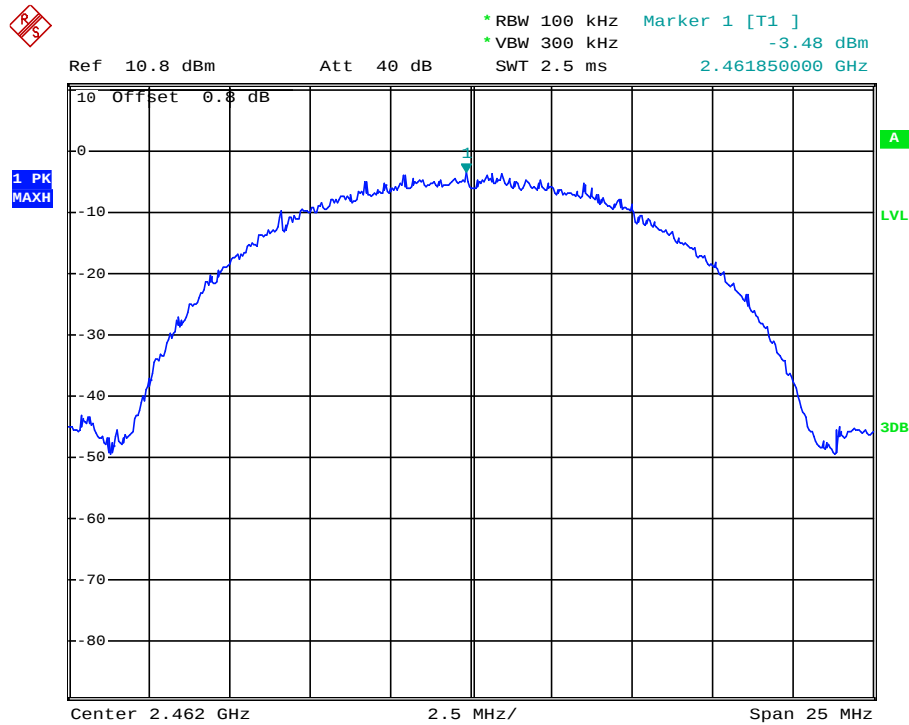


Date: 11.JUN.2012 14:14:49

802.11g Mode channel 1

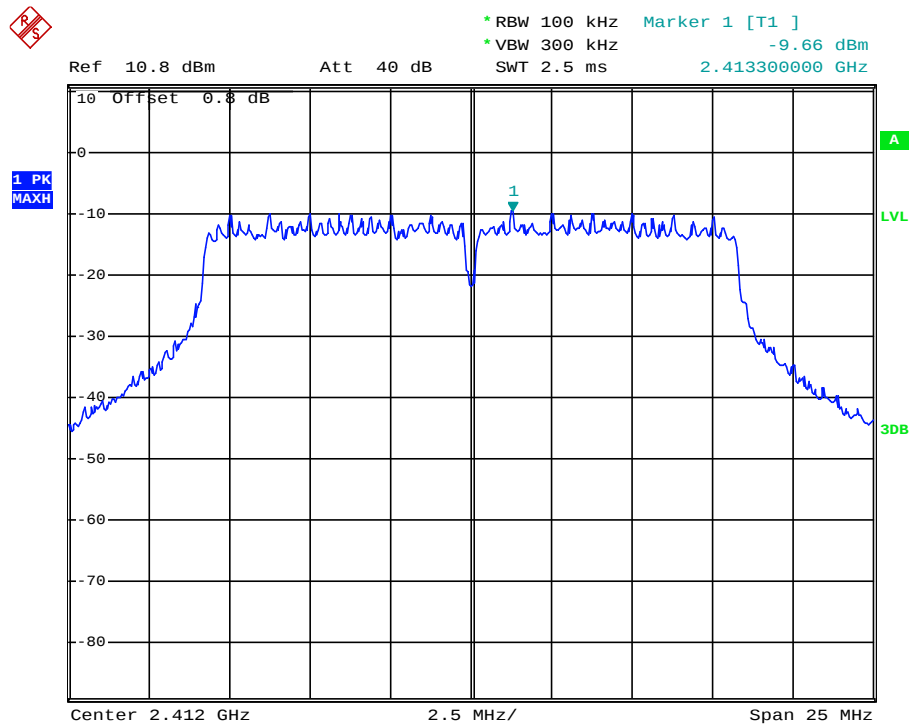


Date: 11.JUN.2012 14:11:10

802.11g Mode channel 6

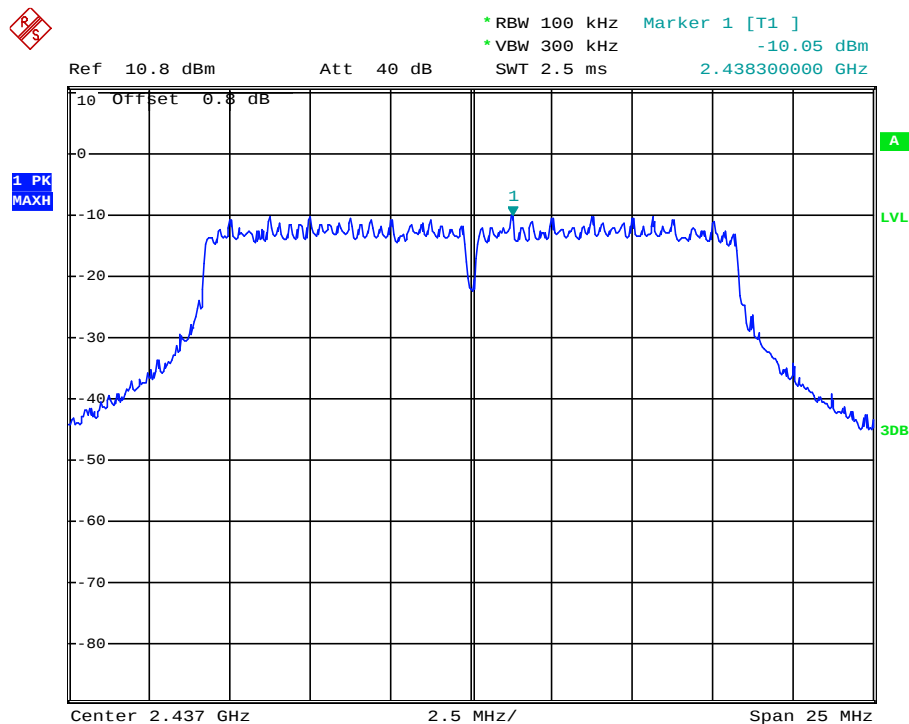


Date: 11.JUN.2012 14:10:00

802.11g Mode channel 11

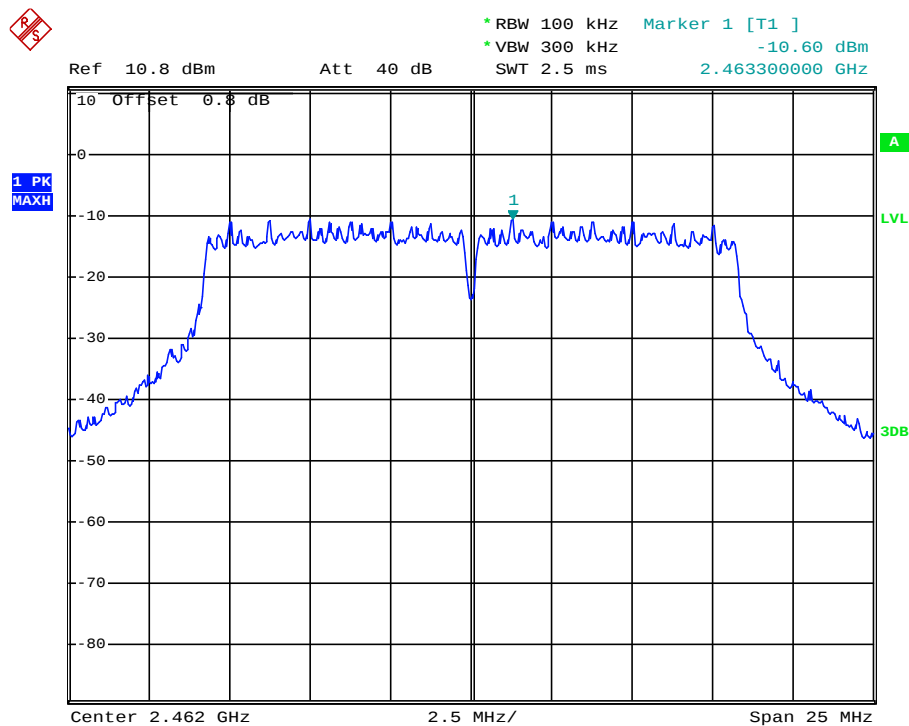


Date: 11.JUN.2012 14:08:51

802.11n20 Mode channel 1

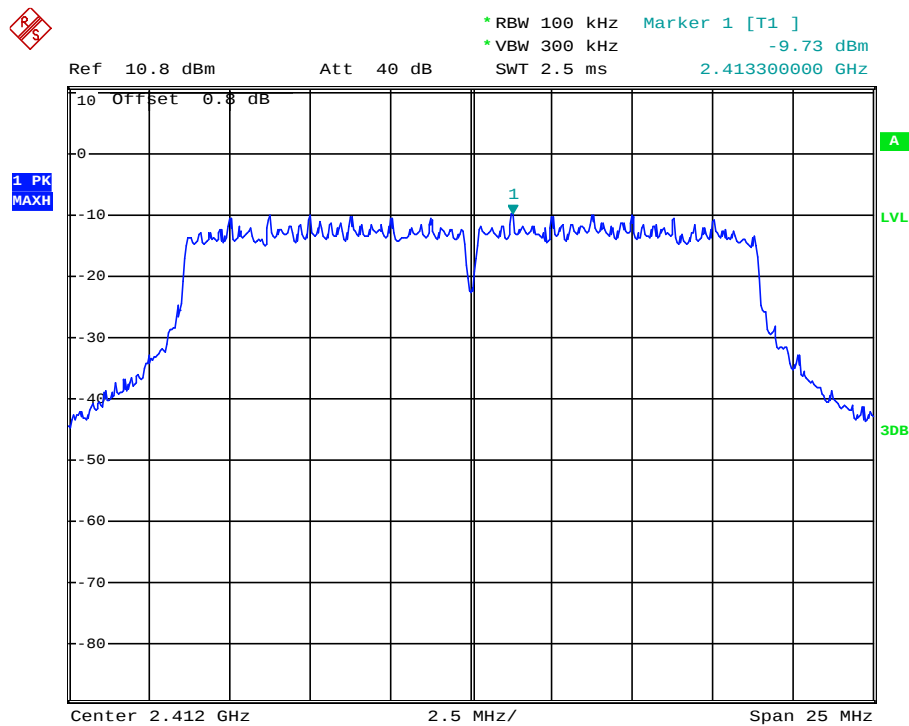


Date: 11.JUN.2012 14:05:43

802.11n20 Mode channel 6

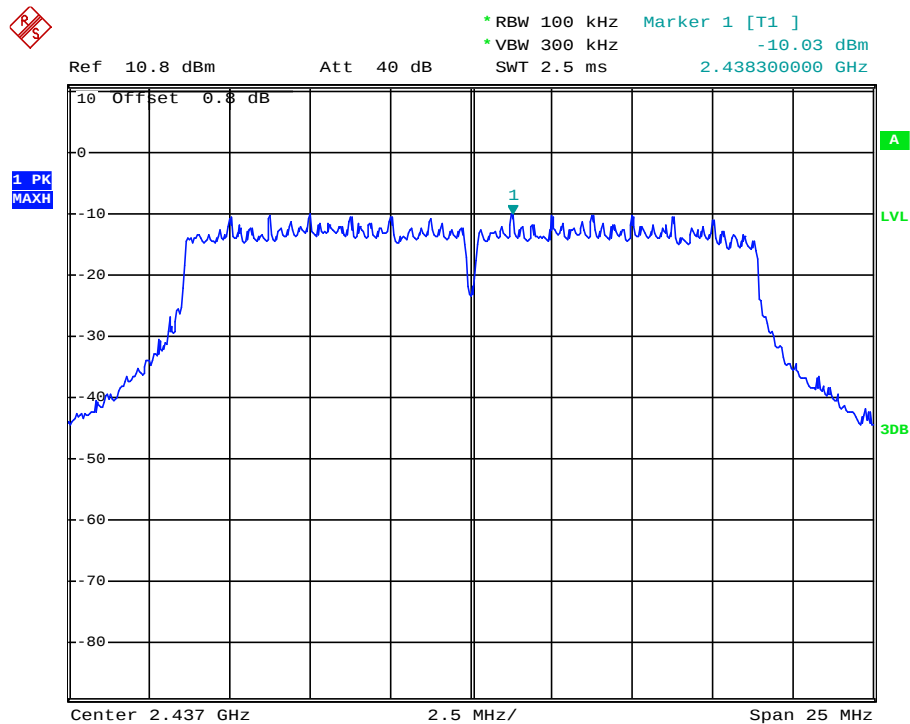


Date: 11.JUN.2012 14:06:53

802.11n20 Mode channel 11

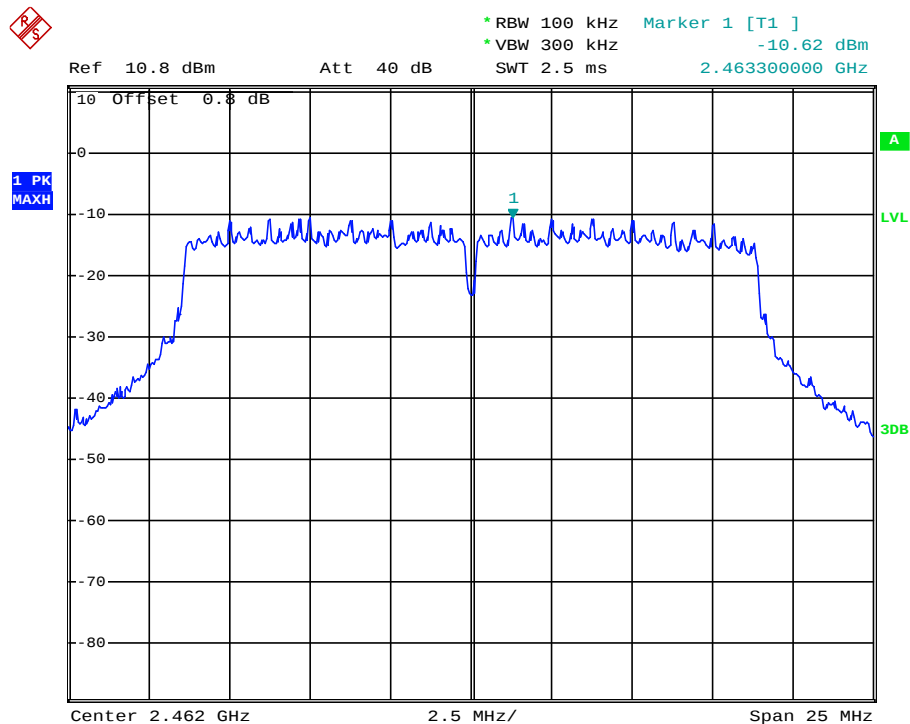


Date: 11.JUN.2012 14:07:54

802.11n40 Mode channel 3

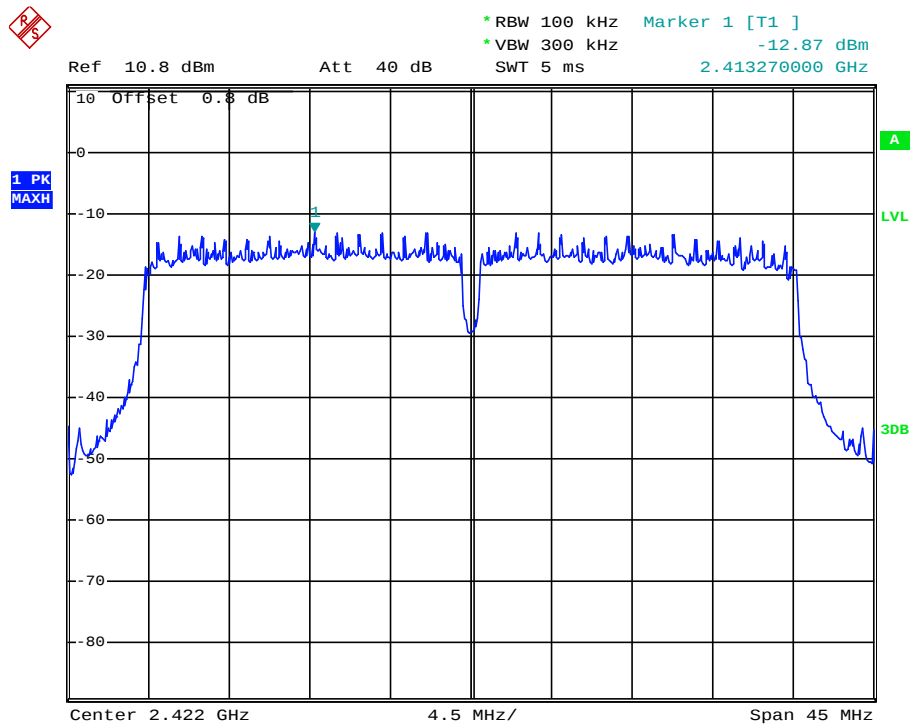


Date: 11.JUN.2012 14:15:51

802.11n40 Mode channel 6

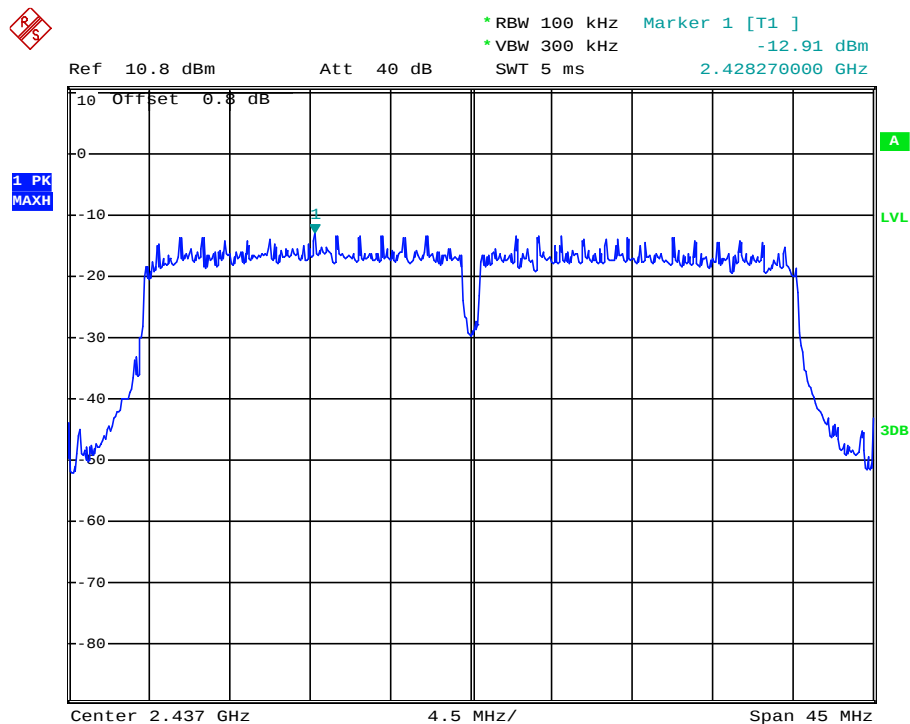

Date: 11.JUN.2012 14:16:33

802.11n40 Mode channel 9

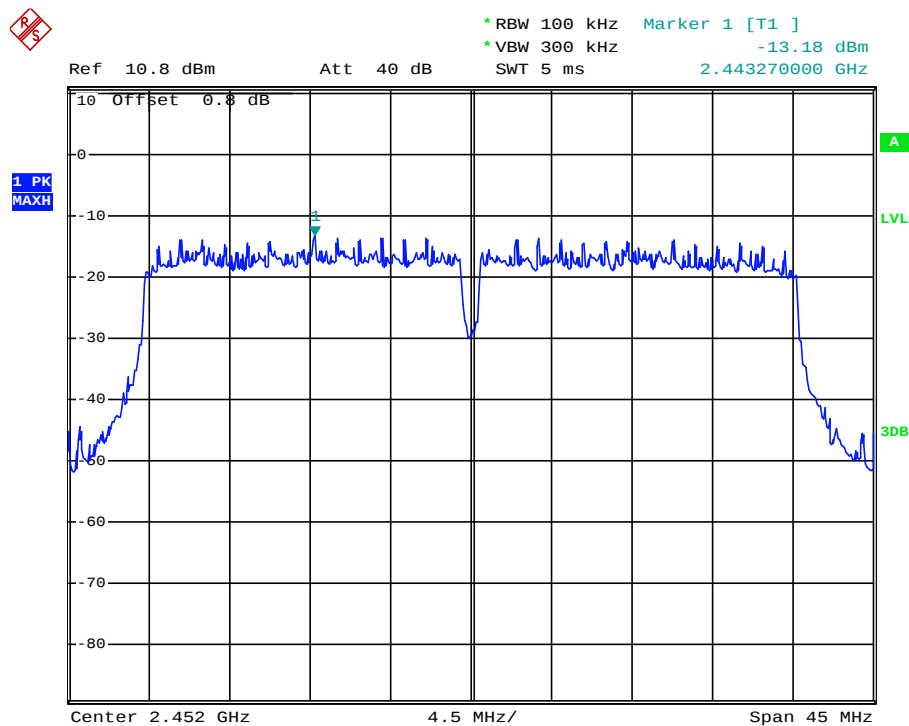

Date: 11.JUN.2012 14:17:21

4.5. Band Edge Compliance of RF Emission

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Both radiated and conducted band edge were measurement for 802.11b,802.11g,802.11n(20MHz) and 802.11n(40MHz) mode,recording worst case in test report.

802.11b

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	55.75	74	18.25	PK	Horizontal
2390.00	46.91	54	7.09	AV	Horizontal
2390.00	55.55	74	18.45	PK	Vertical
2390.00	46.35	54	7.65	AV	Vertical
Out of right side band					
2483.50	65.80	74	8.20	PK	Horizontal
2483.50	50.43	54	3.57	AV	Horizontal
2483.50	60.13	74	13.87	PK	Vertical
2483.50	45.02	54	8.98	AV	Vertical

802.11g

Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	65.24	74	8.76	PK	Horizontal
2390.00	50.47	54	3.53	AV	Horizontal
2390.00	61.18	74	12.82	PK	Vertical
2390.00	49.40	54	4.60	AV	Vertical
Out of right side band					
2483.50	55.98	74	18.02	PK	Horizontal
2483.50	48.35	54	5.65	AV	Horizontal
2483.50	57.63	74	16.37	PK	Vertical
2483.50	44.33	54	9.67	AV	Vertical

802.11n(20MHz)


Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	51.76	74	22.24	PK	Horizontal
2390.00	40.03	54	13.97	AV	Horizontal
2390.00	53.28	74	20.72	PK	Vertical
2390.00	40.99	54	13.01	AV	Vertical
Out of right side band					
2483.50	59.40	74	14.60	PK	Horizontal
2483.50	47.77	54	6.23	AV	Horizontal
2483.50	61.05	74	12.95	PK	Vertical
2483.50	47.77	54	6.23	AV	Vertical

802.11n(40MHz)


Frequency (MHz)	Corrected Reading (dBμV/m)@3m	FCC Limit (dBμV/m) @3m	Margin (dB)	Detector	Polarization
Out of left side band					
2390.00	52.77	74	21.23	PK	Horizontal
2390.00	41.46	54	12.54	AV	Horizontal
2390.00	57.23	74	16.77	PK	Vertical
2390.00	43.33	54	10.67	AV	Vertical
Out of right side band					
2483.50	58.58	74	15.42	PK	Horizontal
2483.50	44.46	54	9.54	AV	Horizontal
2483.50	50.15	74	23.85	PK	Vertical
2483.50	38.83	54	15.17	AV	Vertical

Photos of Conducted Band Edge Measurement

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	Delta Peak to Band emission (dBc)	LIMIT (dBc)	PASS/FAIL
802.11b				
Low	2400.00	40.64	20	PASS
High	2483.50	56.18	20	PASS
802.11g				
Low	2400.00	33.64	20	PASS
High	2483.50	49.51	20	PASS
802.11n20				
Low	2400.00	32.55	20	PASS
High	2483.50	47.93	20	PASS
802.11n40				
Low	2400.00	32.40	20	PASS
High	2483.50	40.90	20	PASS

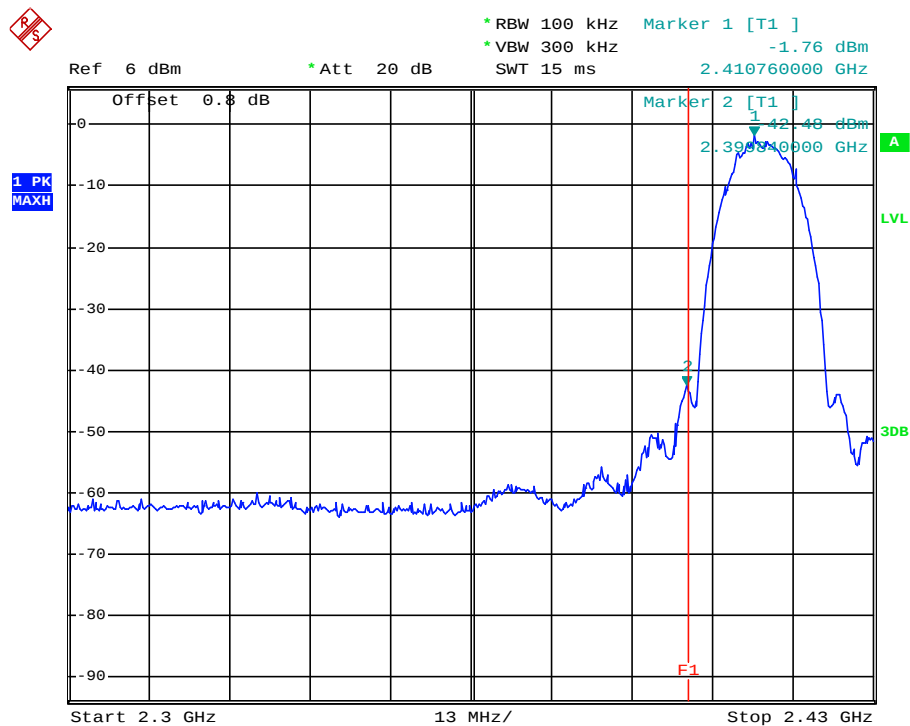
For 802.11b Mode

Date: 11.JUN.2012 16:46:16

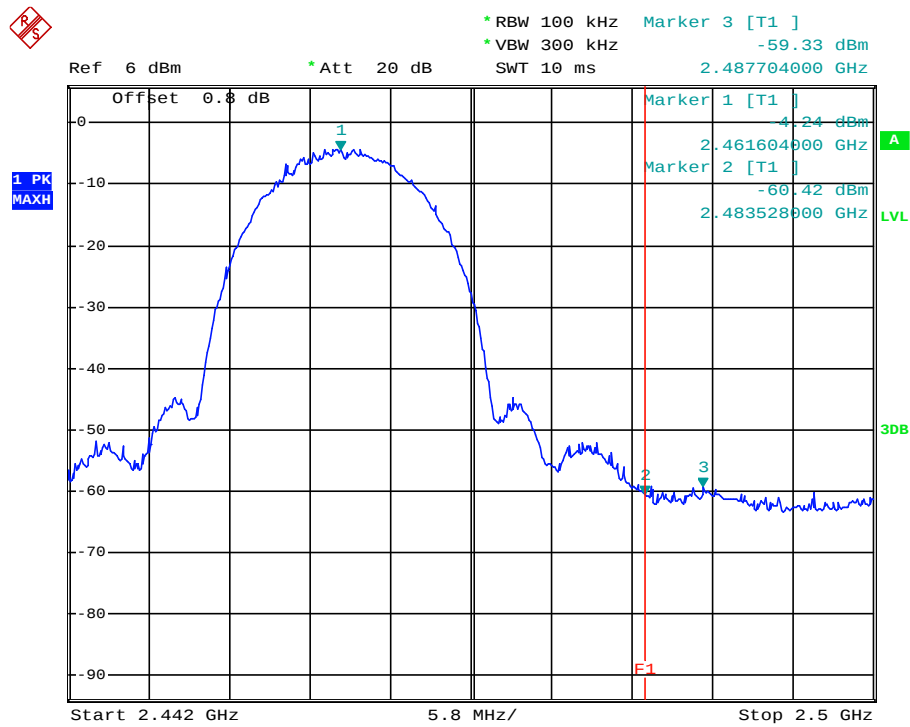


Date: 11.JUN.2012 16:48:21

For 802.11g Mode

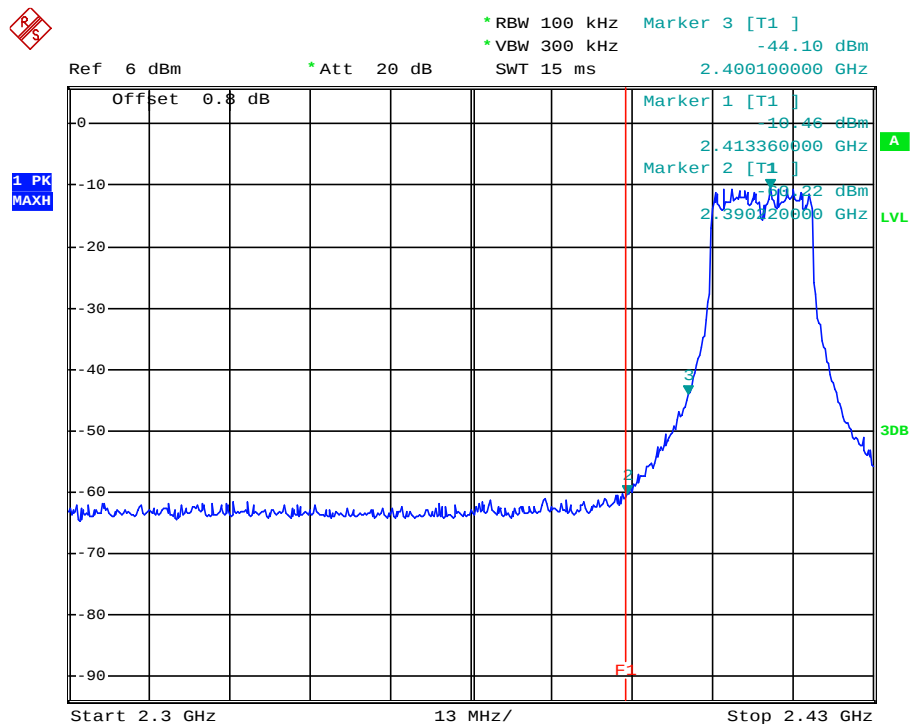


Date: 11.JUN.2012 16:58:00

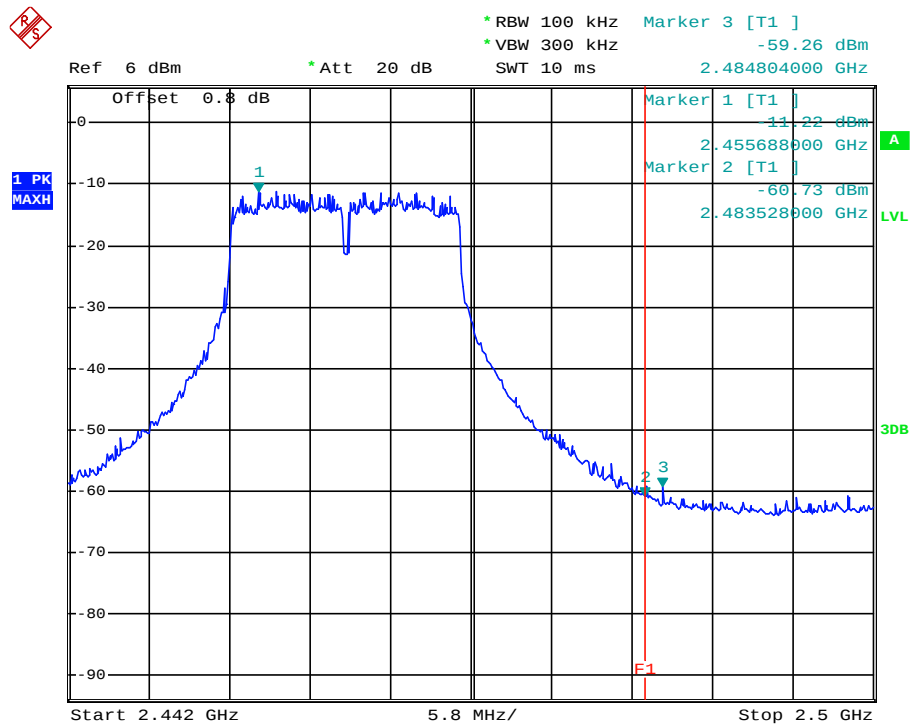


Date: 11.JUN.2012 16:49:29


802.11n (20MHz) Mode

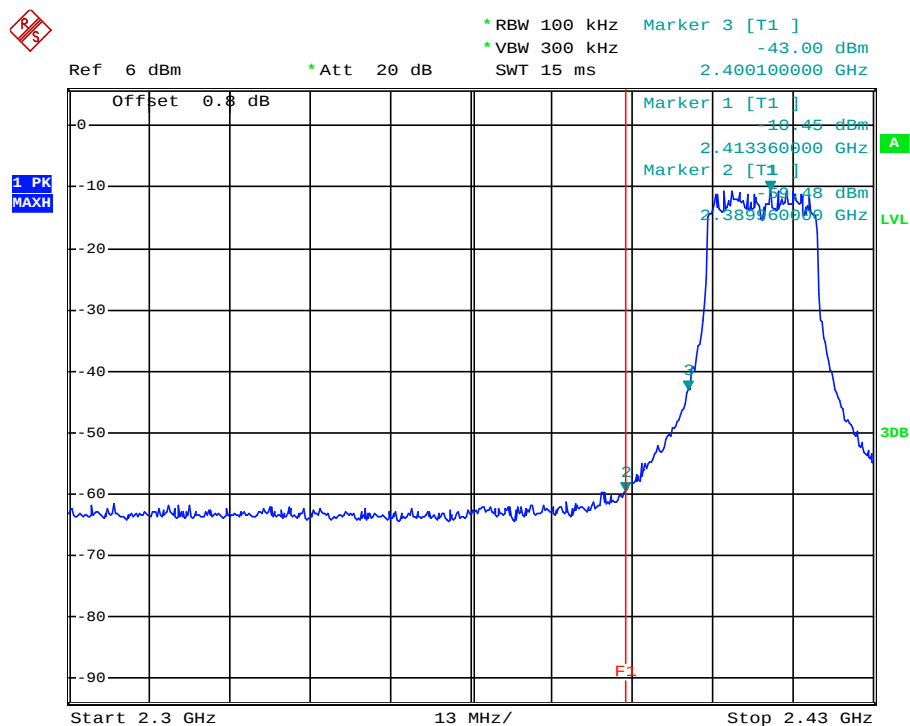


Date: 11.JUN.2012 16:56:59

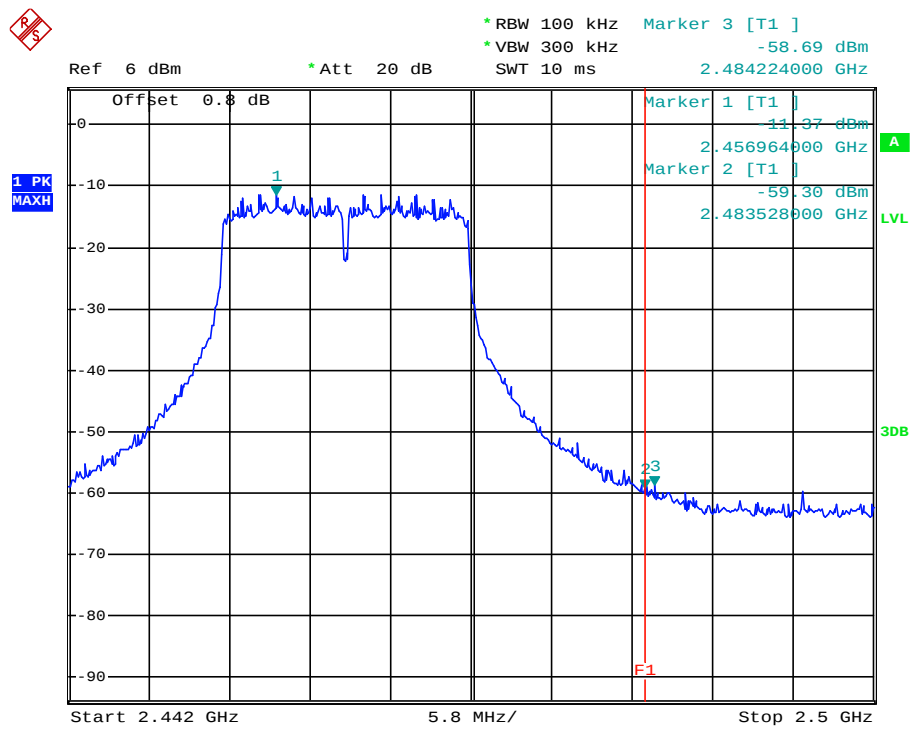

Date: 11.JUN.2012 16:50:46

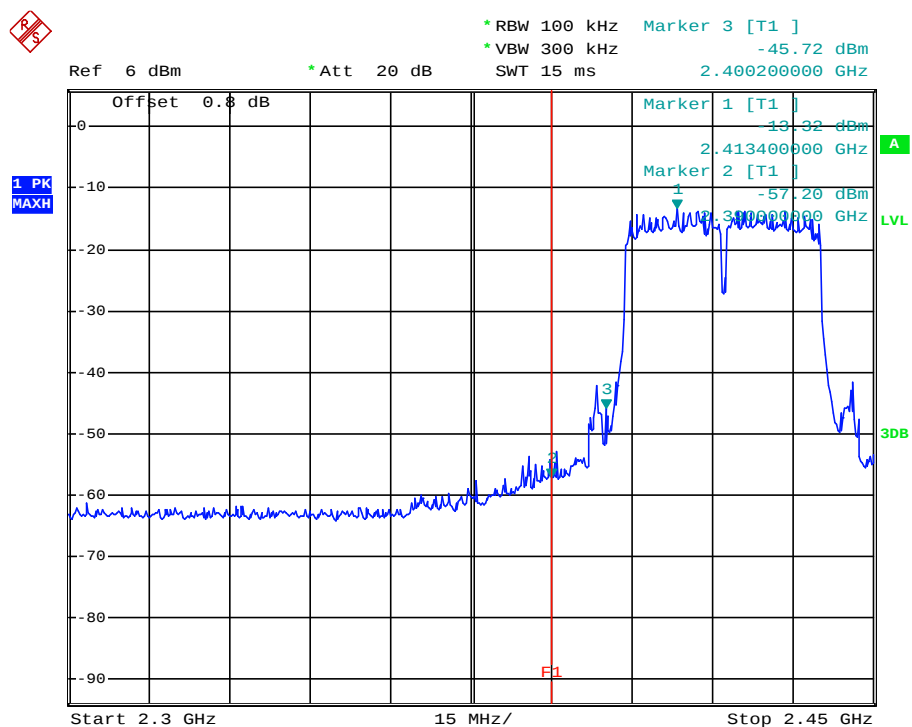802.11n (40MHz) Mode


Date: 11.JUN.2012 16:55:40

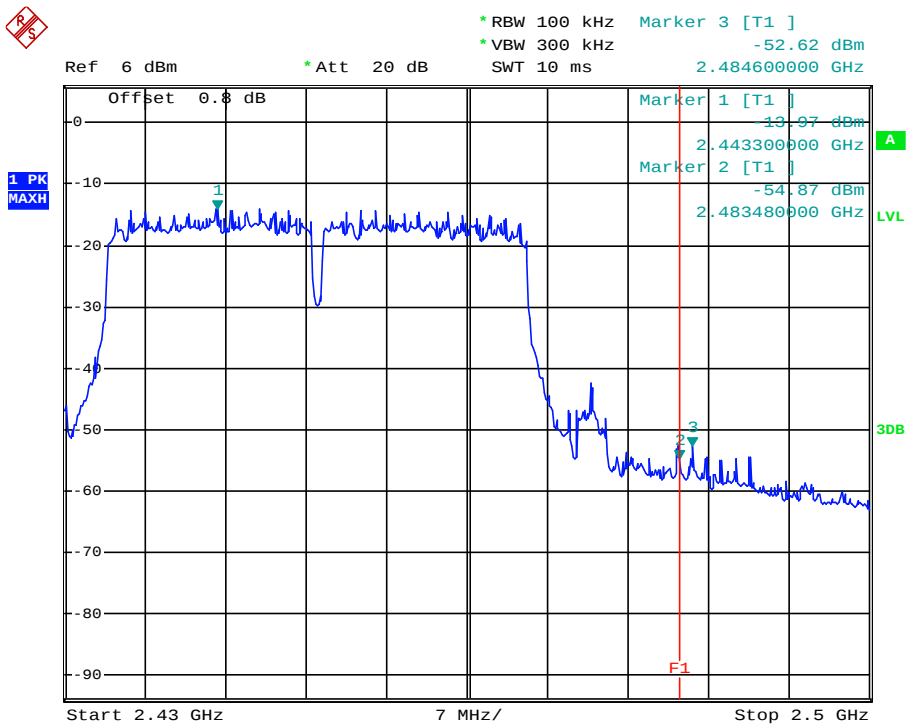

Date: 11.JUN.2012 16:53:08

4.6. Spurious RF Conducted Emission

TEST CONFIGURATION




TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measure frequency range from 30MHz to 26.5GHz.

LIMIT


1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

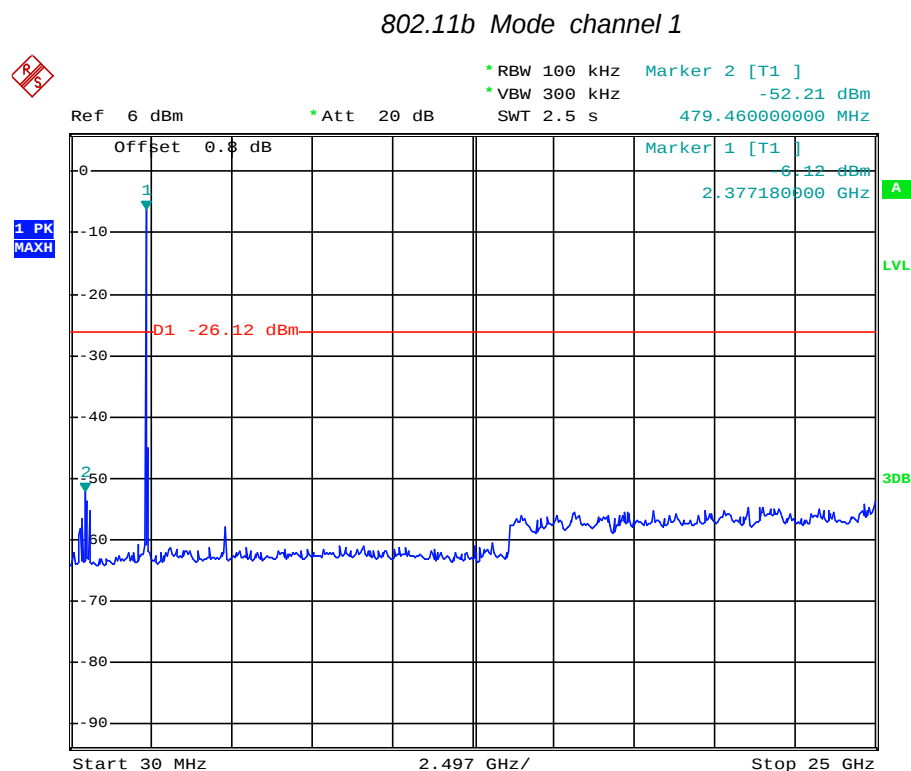


Date: 11.JUN.2012 15:09:07

802.11b Mode channel 6

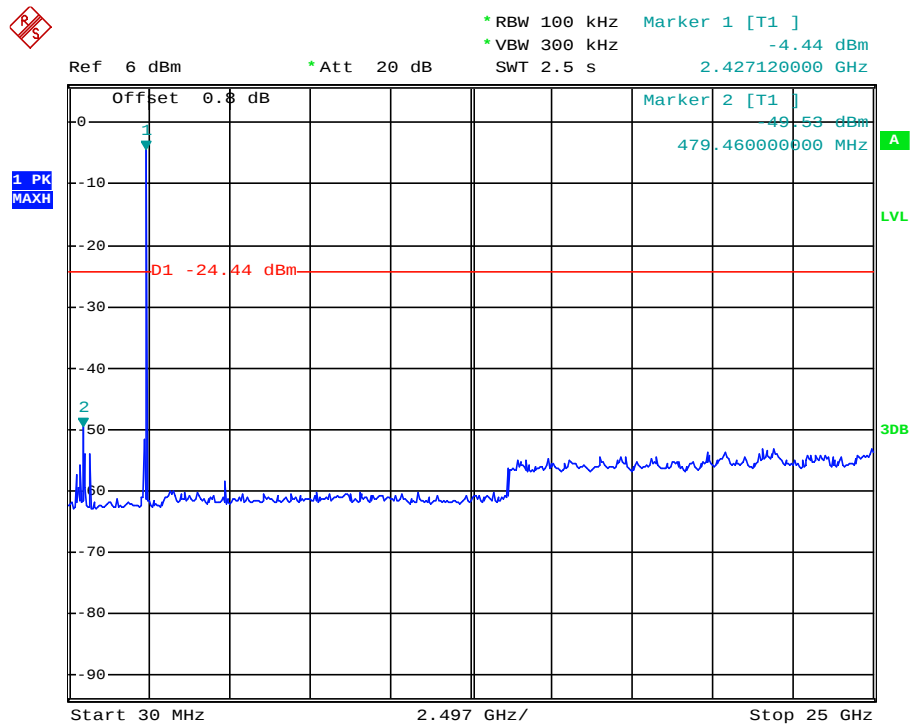


Date: 11.JUN.2012 16:16:35

802.11b Mode channel 11

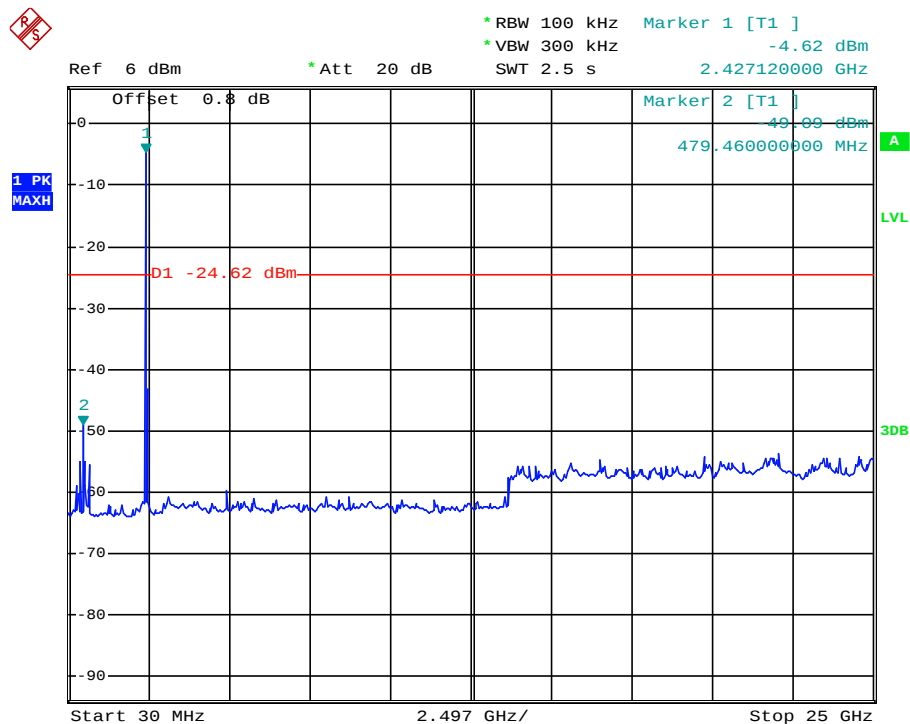


Date: 11.JUN.2012 15:10:35

802.11g Mode channel 1

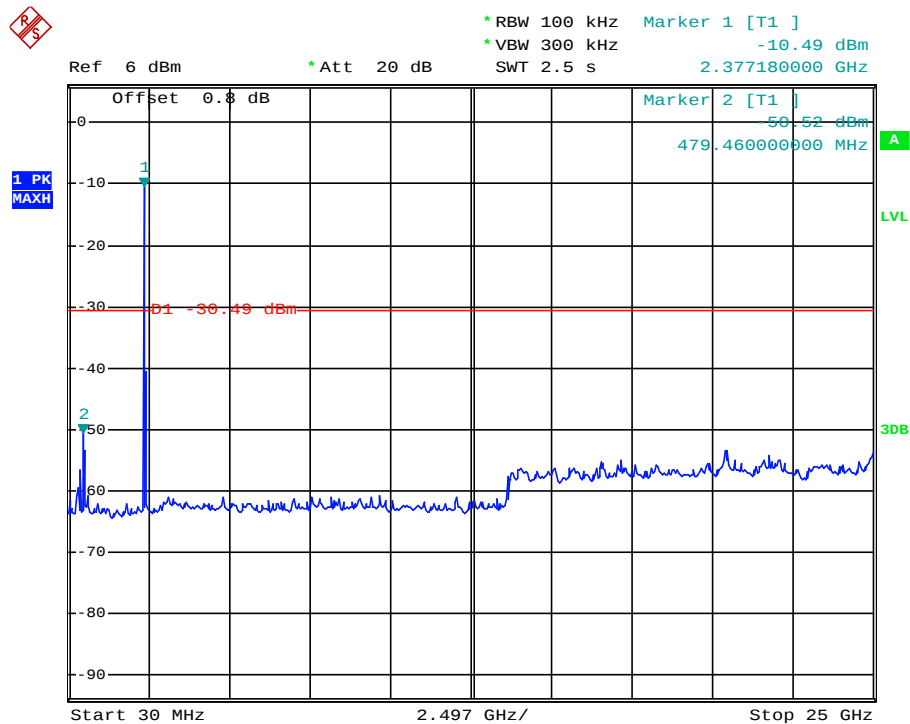


Date: 11.JUN.2012 15:14:38

802.11g Mode channel 6

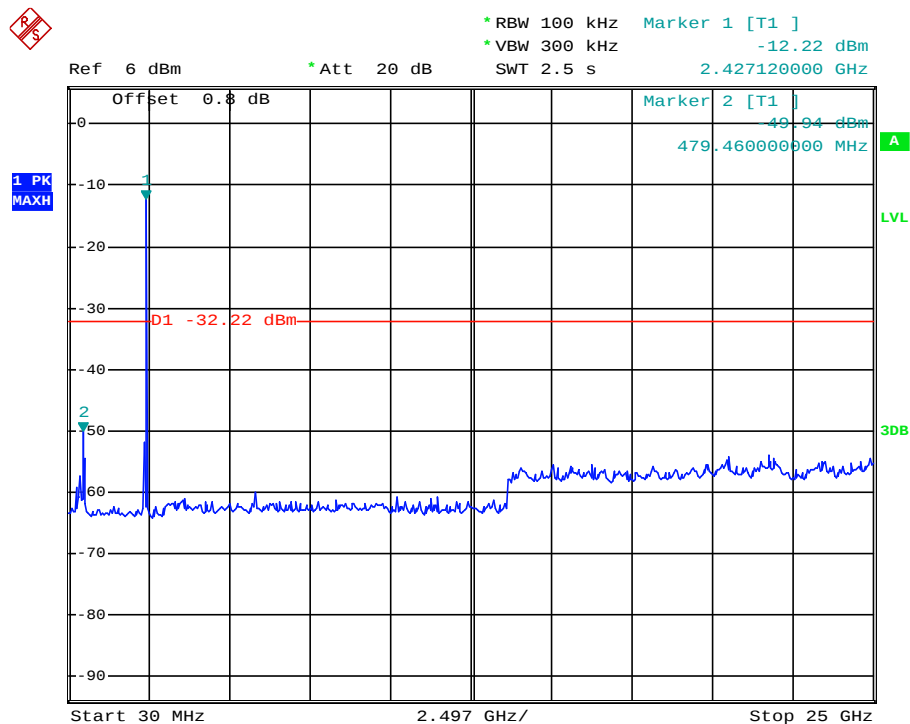


Date: 11.JUN.2012 15:13:28

802.11n20 Mode channel 6

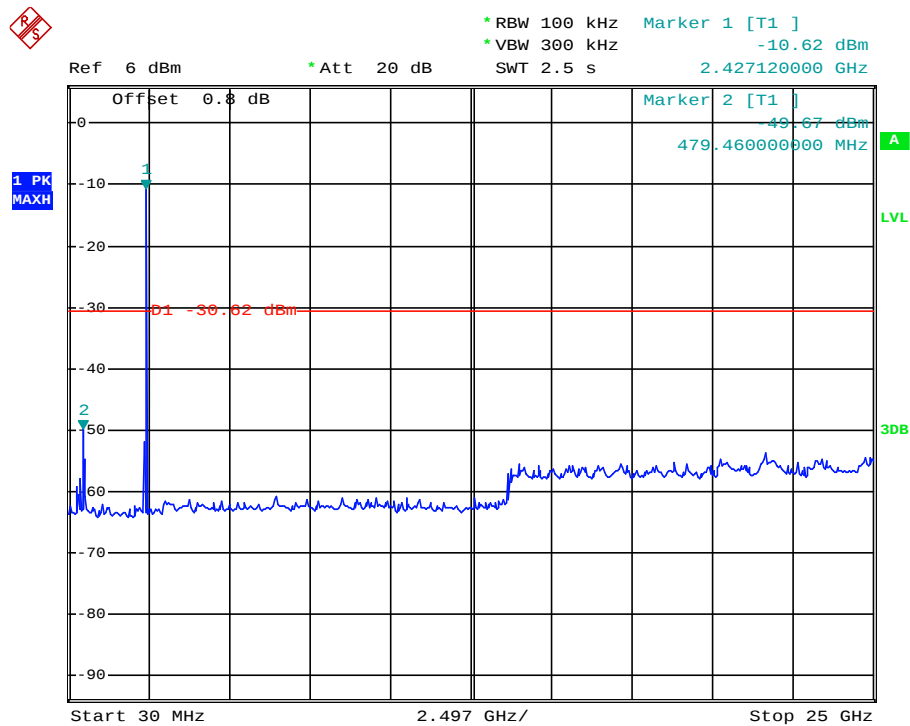


Date: 11.JUN.2012 15:18:00

802.11n20 Mode channel 11

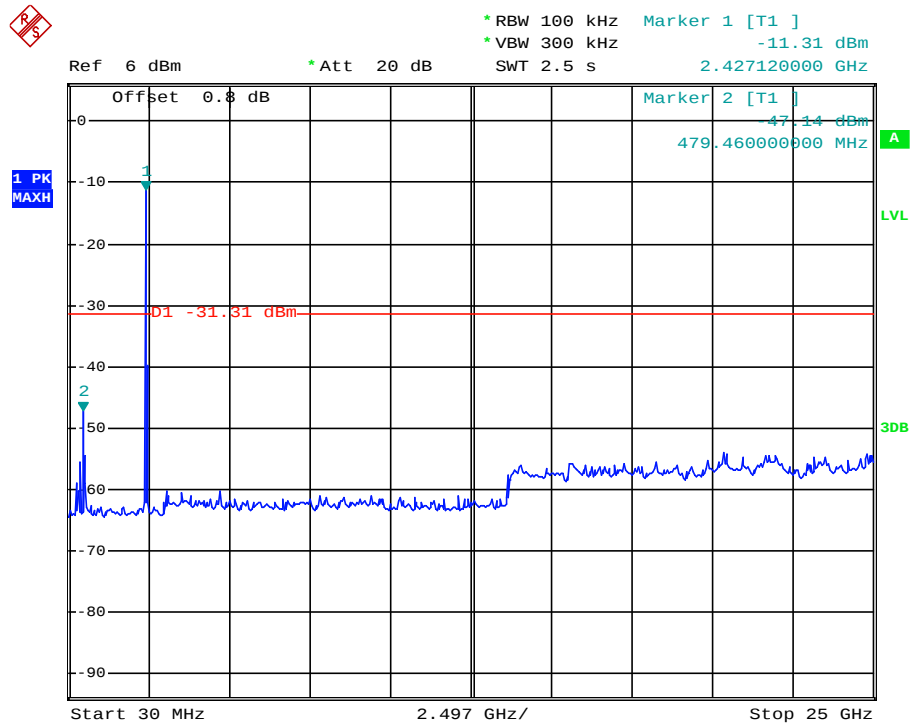


Date: 11.JUN.2012 15:18:59

802.11n40 Mode channel 3

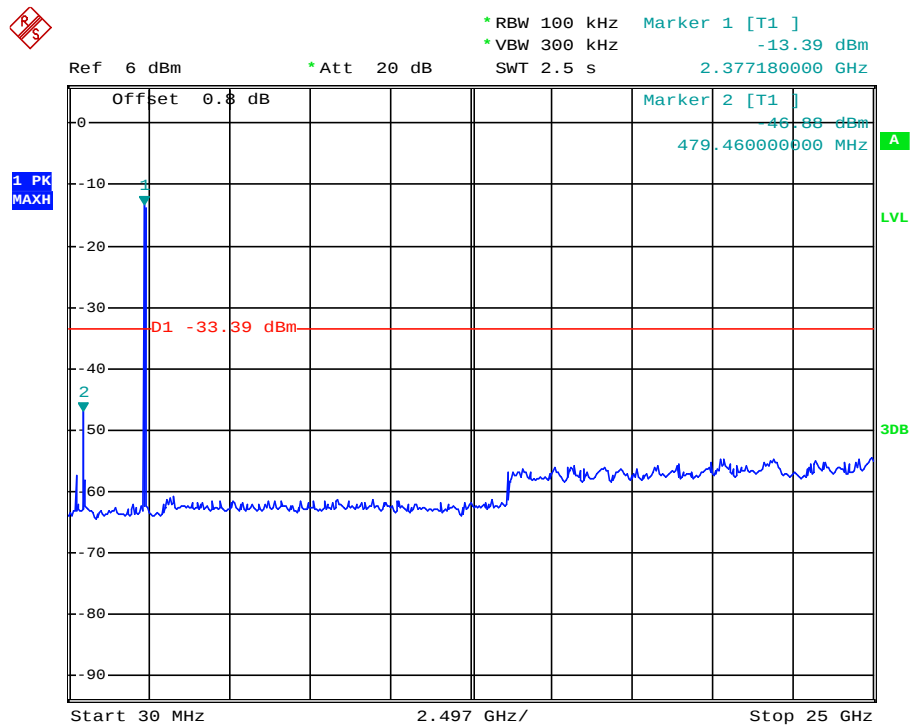


Date: 11.JUN.2012 15:20:16

802.11n40 Mode channel 6

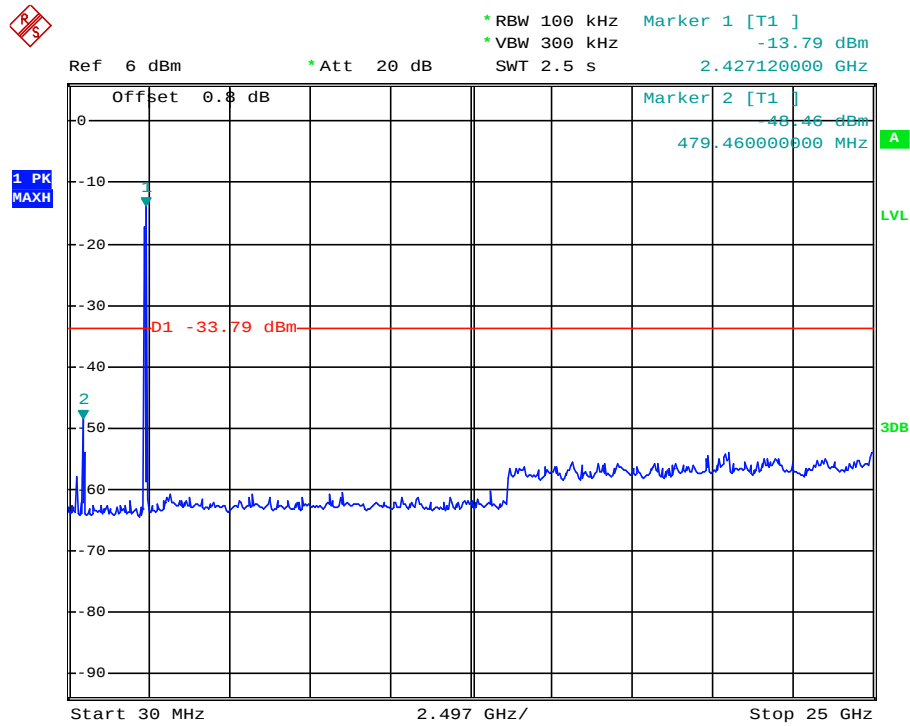

Date: 11.JUN.2012 15:21:24


802.11n40 Mode channel 9

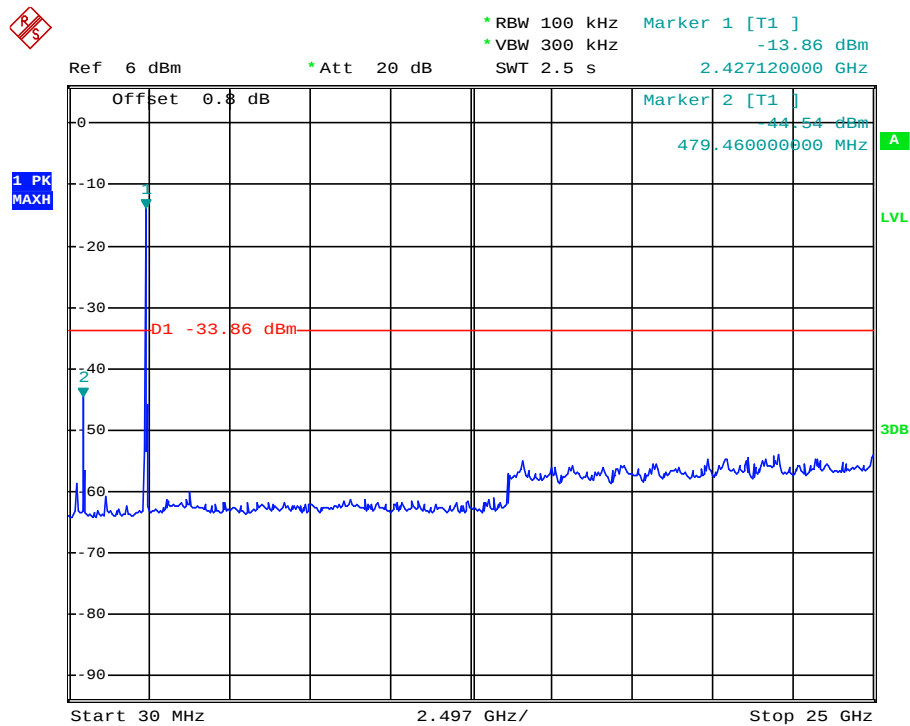

Date: 11.JUN.2012 15:22:27

4.7. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300KHz VBW.

The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

For 802.11b Mode

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	10.32	0.5	PASS
6	2437	10.40	0.5	PASS
11	2462	10.24	0.5	PASS

For 802.11g Mode

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.48	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.48	0.5	PASS

For 802.11n (20MHz) Mode


CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	17.76	0.5	PASS
6	2437	17.76	0.5	PASS
11	2462	17.76	0.5	PASS

For 802.11n (40MHz) Mode

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
3	2422	36.00	0.5	PASS
6	2437	36.10	0.5	PASS
9	2452	36.10	0.5	PASS


Photos of 6dB Bandwidth Measurement

802.11b Mode channel 1

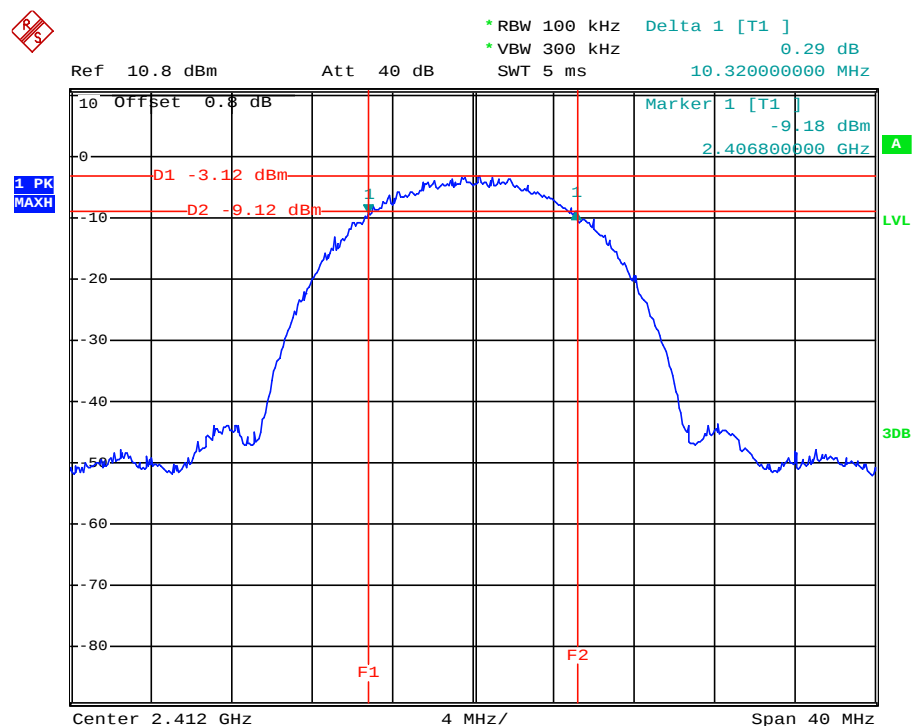


Date: 11.JUN.2012 13:15:35

802.11b Mode channel 6

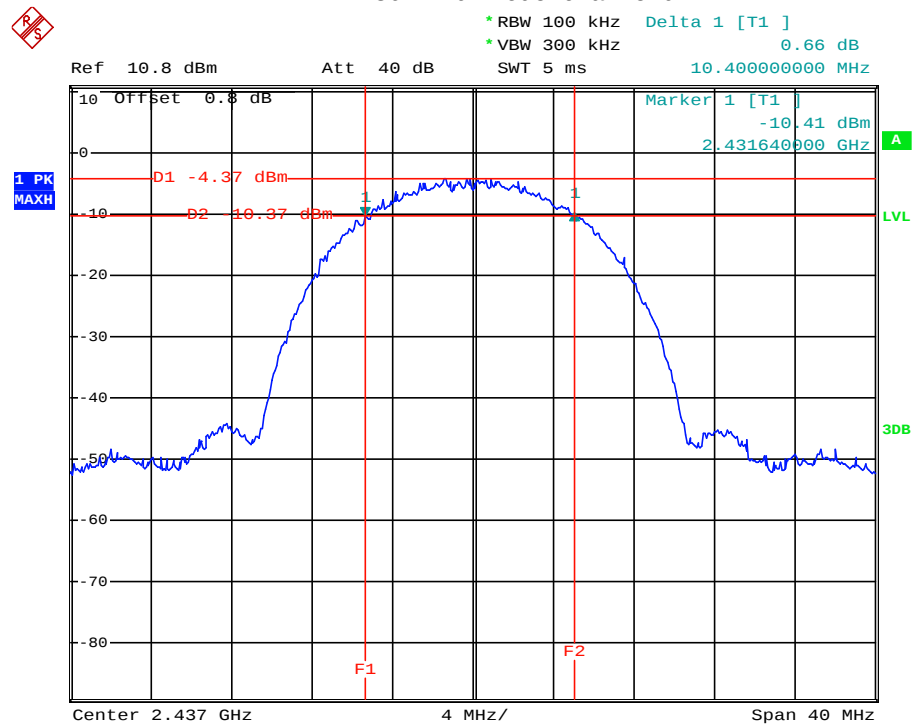


Date: 11.JUN.2012 13:17:49

802.11b Mode channel 11

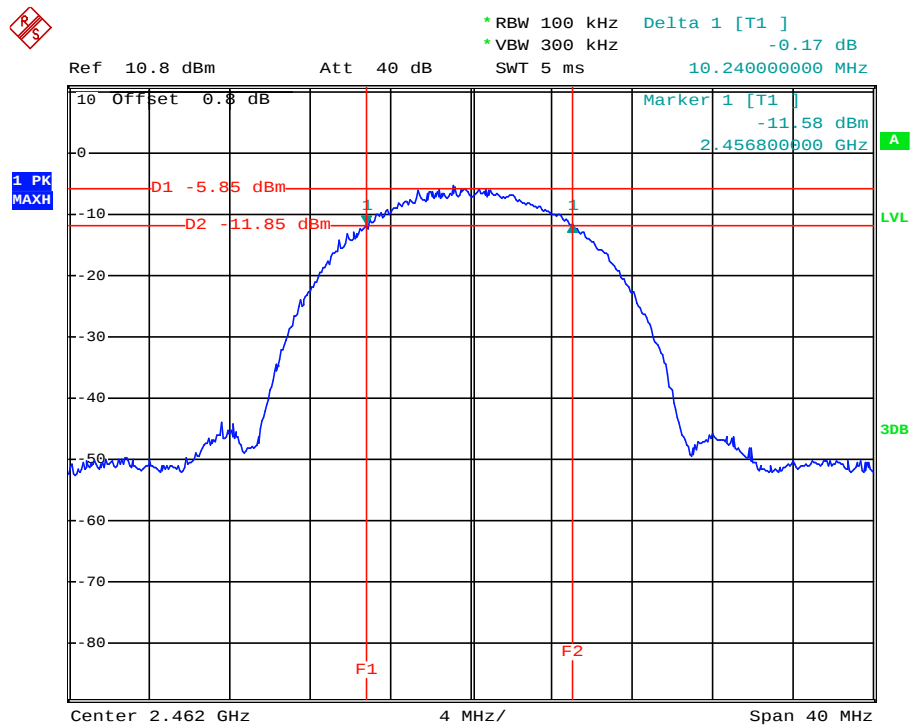


Date: 11.JUN.2012 13:20:07

802.11g Mode channel 1

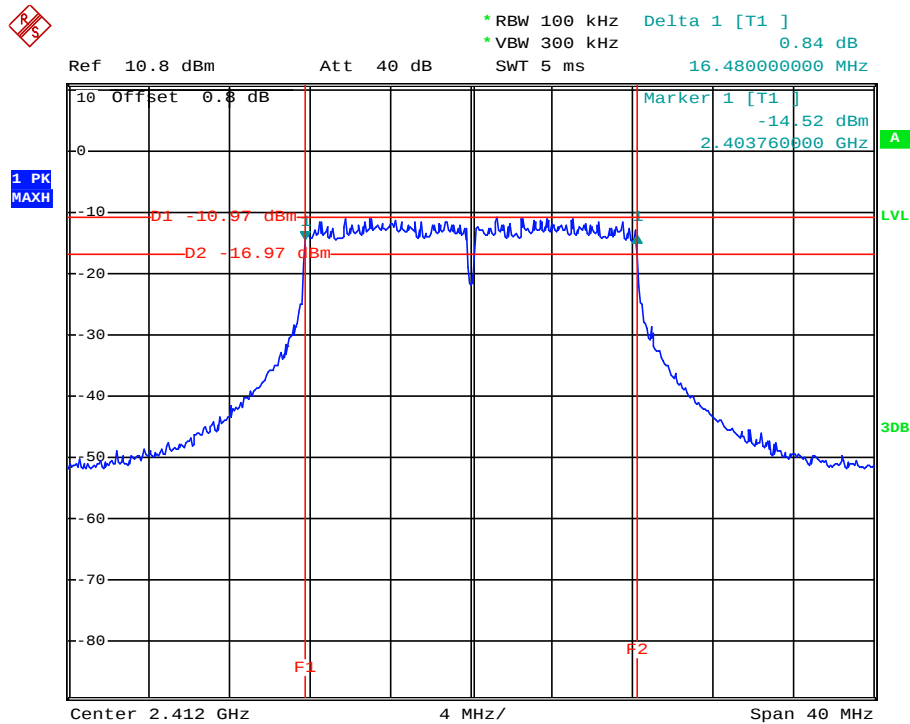


Date: 11.JUN.2012 10:45:27

802.11g Mode channel 6

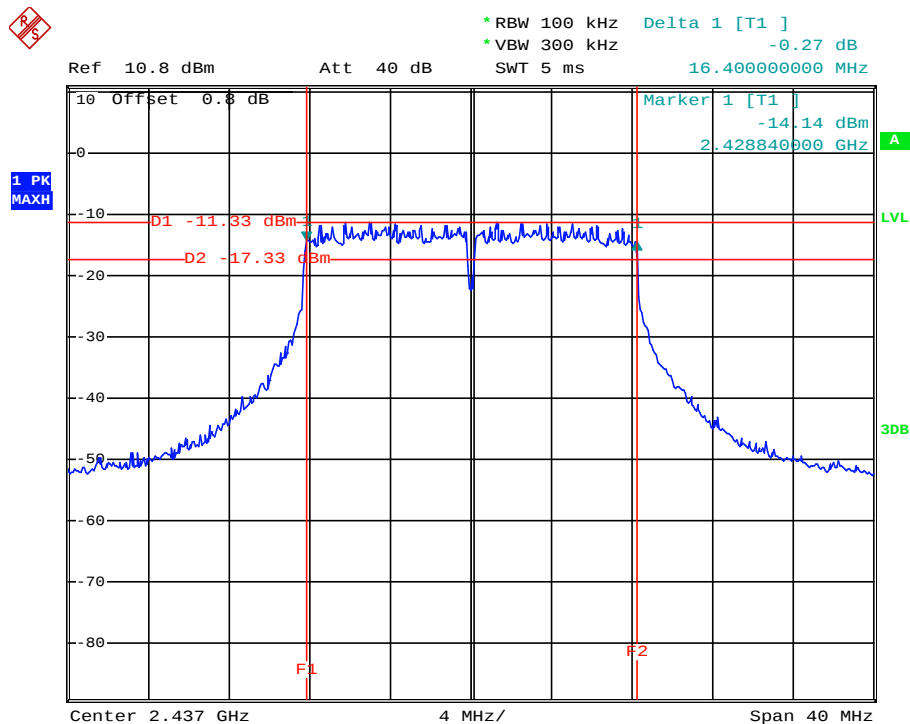


Date: 11.JUN.2012 10:03:17

802.11g Mode channel 11

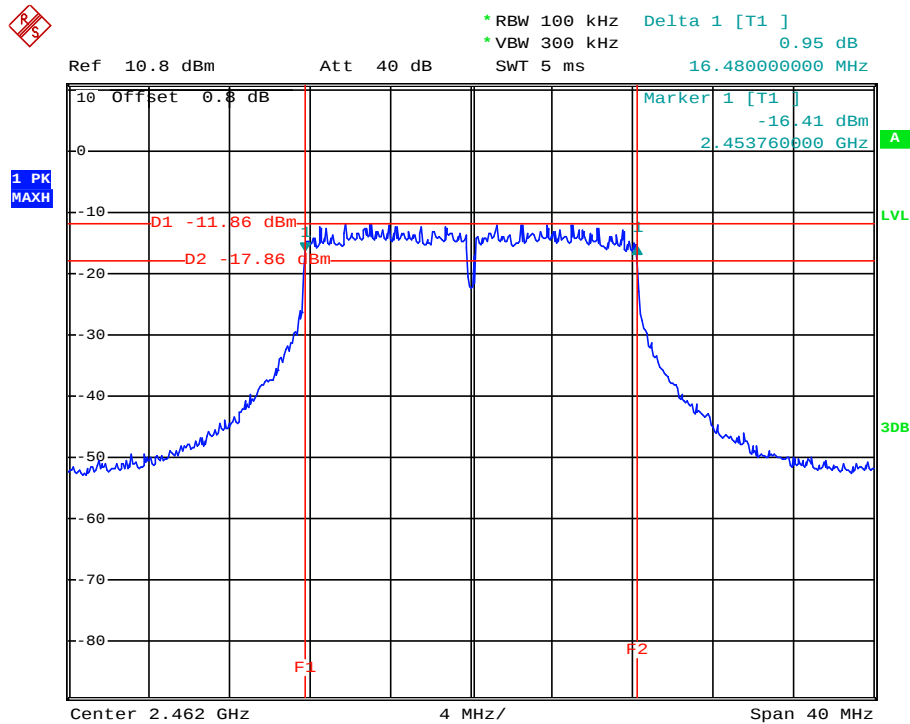


Date: 11.JUN.2012 10:48:18

802.11n20 Mode channel 1

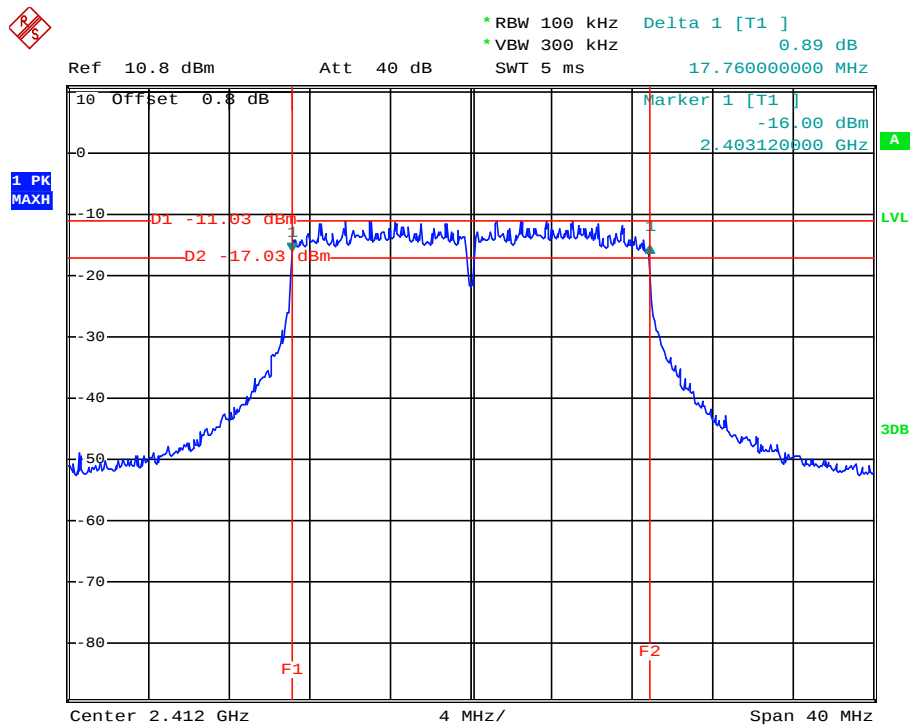


Date: 11.JUN.2012 10:54:53

802.11n20 Mode channel 6

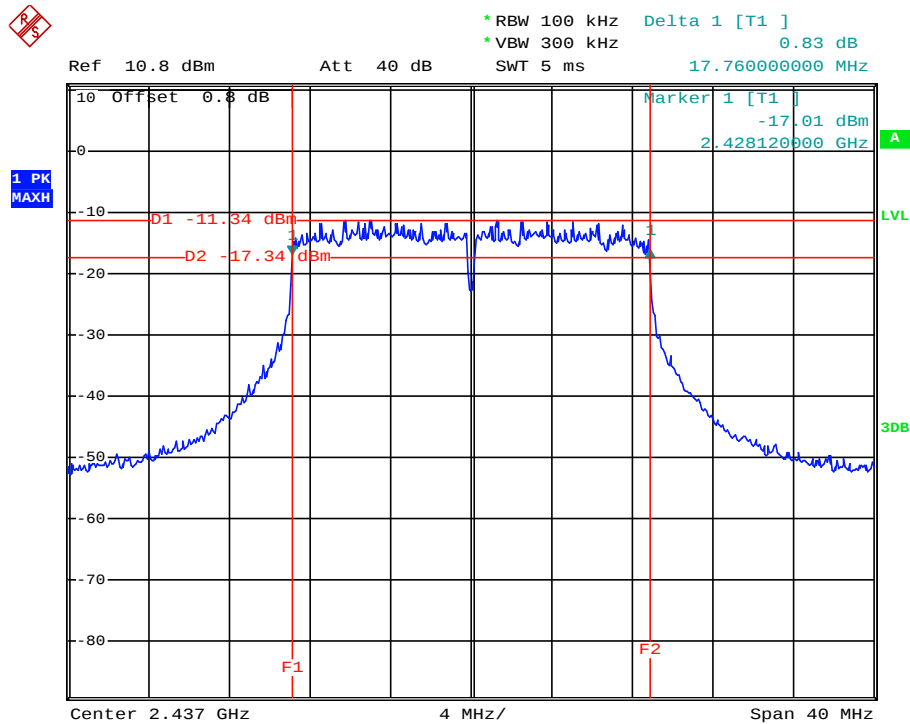


Date: 11.JUN.2012 10:52:42

802.11n20 Mode channel 11

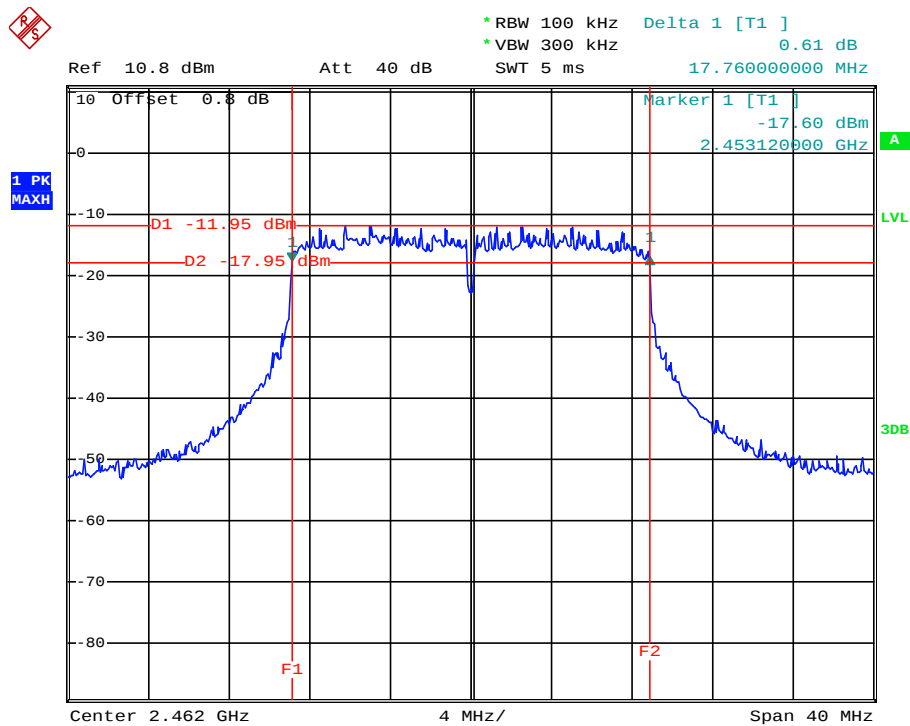


Date: 11.JUN.2012 10:50:15

802.11n40 Mode channel 3

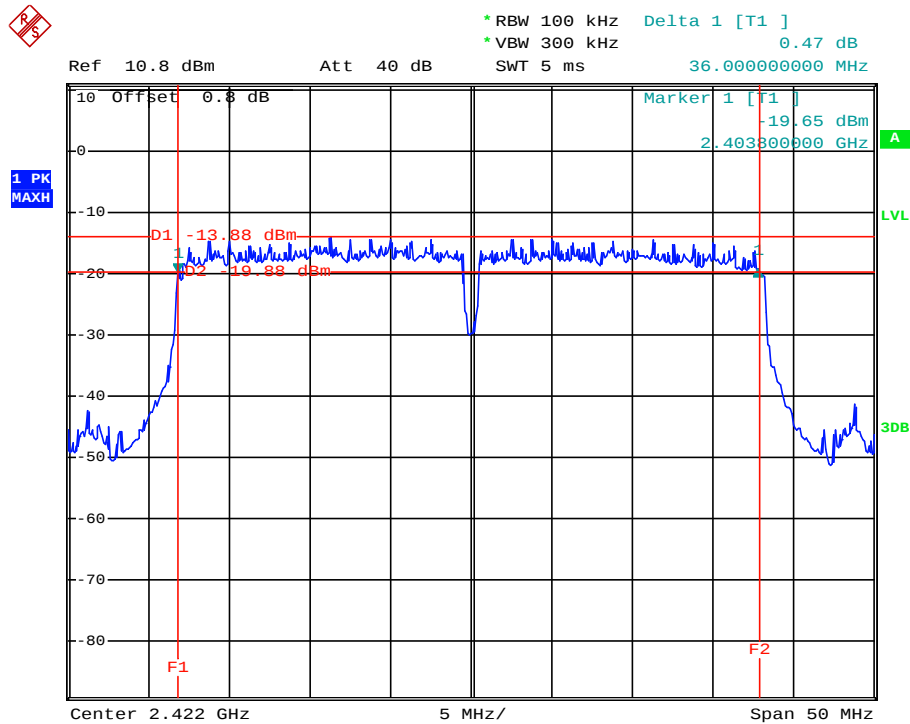


Date: 11.JUN.2012 10:58:56

802.11n40 Mode channel 6

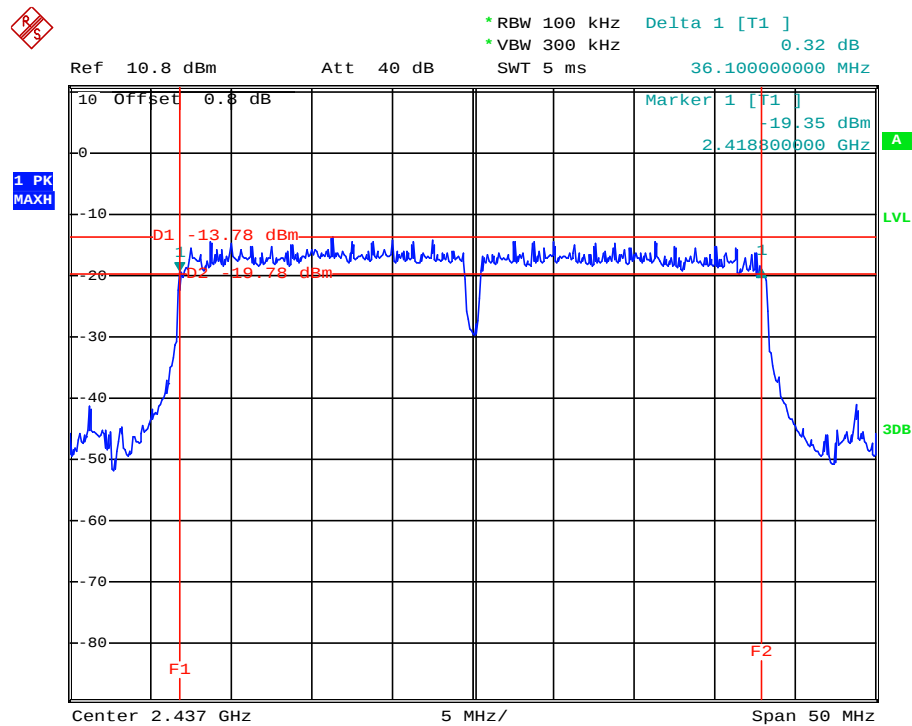

Date: 11.JUN.2012 11:08:47

802.11n40 Mode channel 9

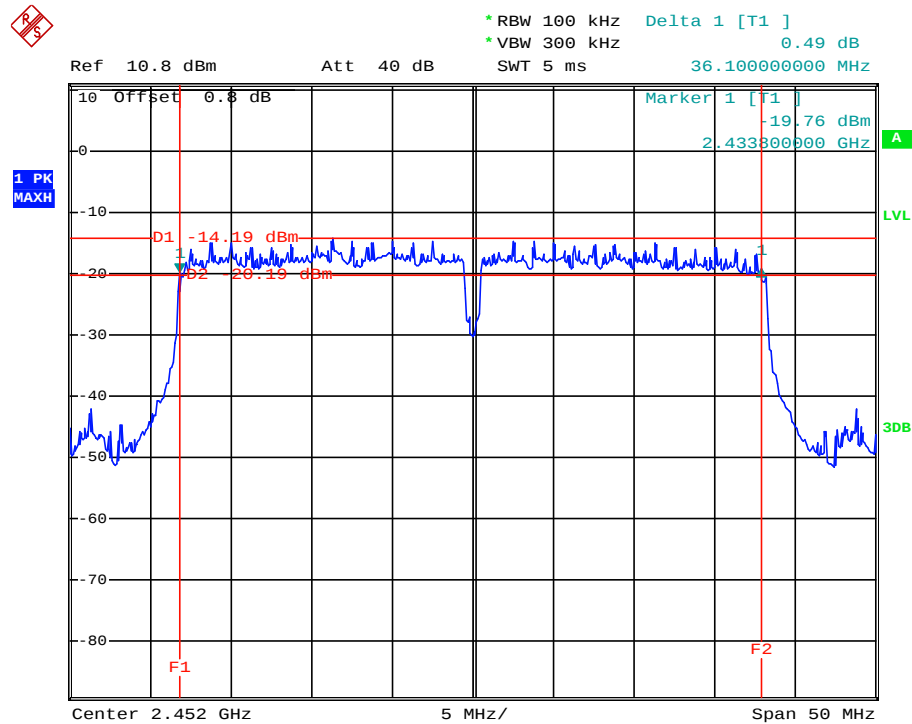

Date: 11.JUN.2012 11:11:49

4.8. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The Gain of the antenna is 1.8dBi.


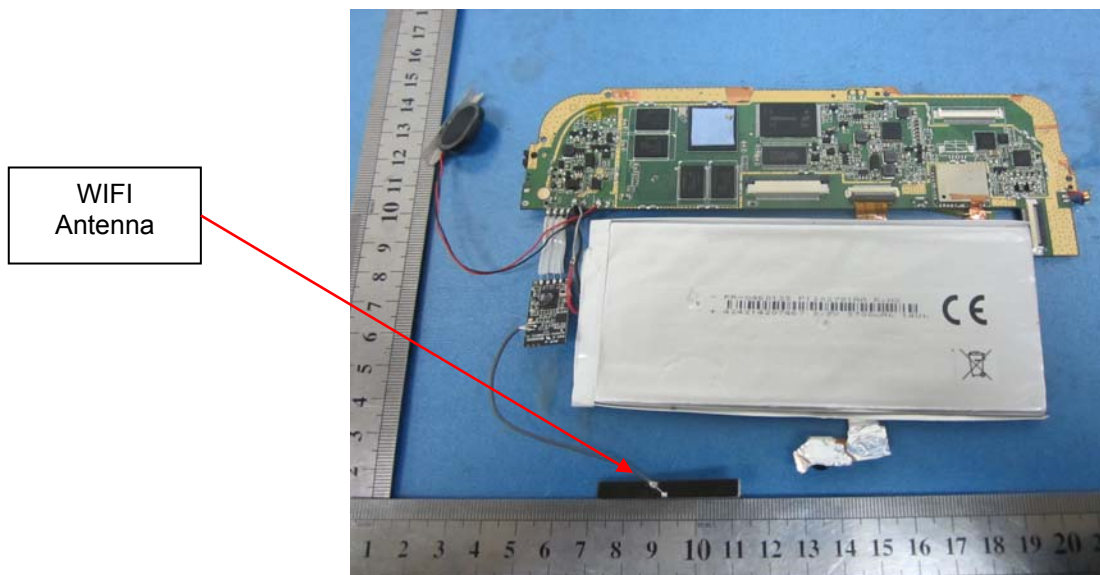


5. Test Setup Photos of the EUT

Radiated Emission (Below 30MHz)



Radiated Emission (30MHz-1GHz)

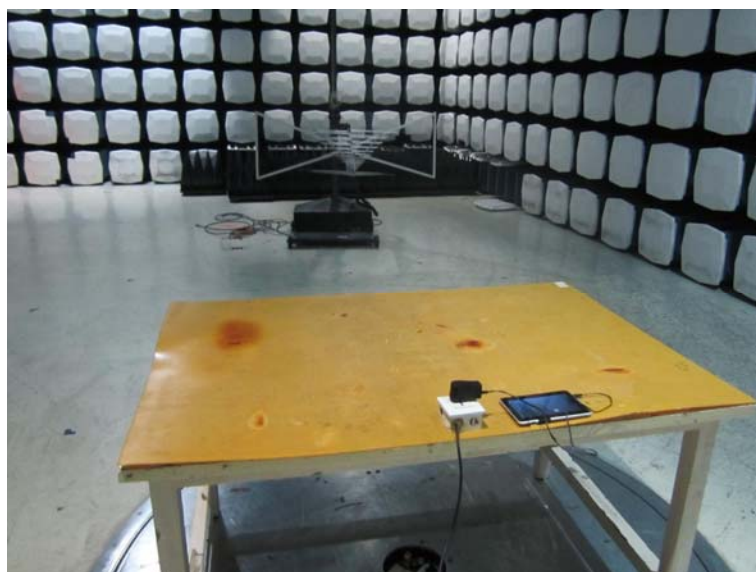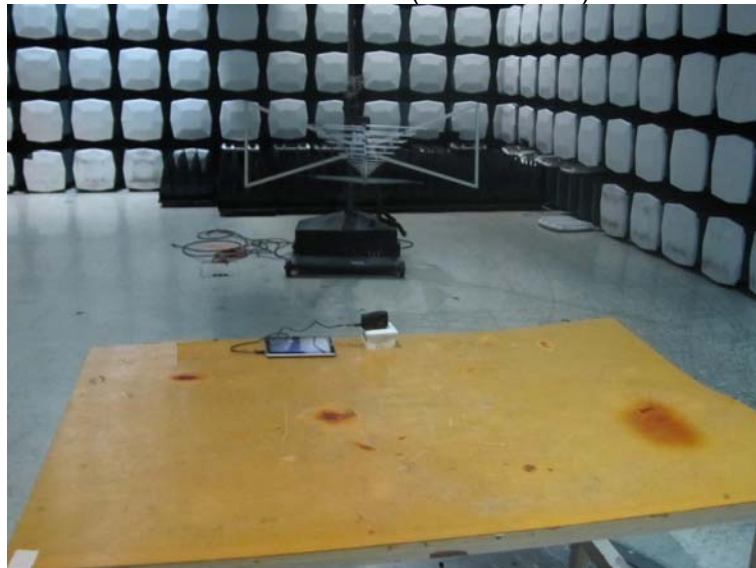

Radiated Emission (above 1GHz)



Conducted Emission (AC Mains)




6. External and Internal Photos of the EUT




External Photos










Internal Photos

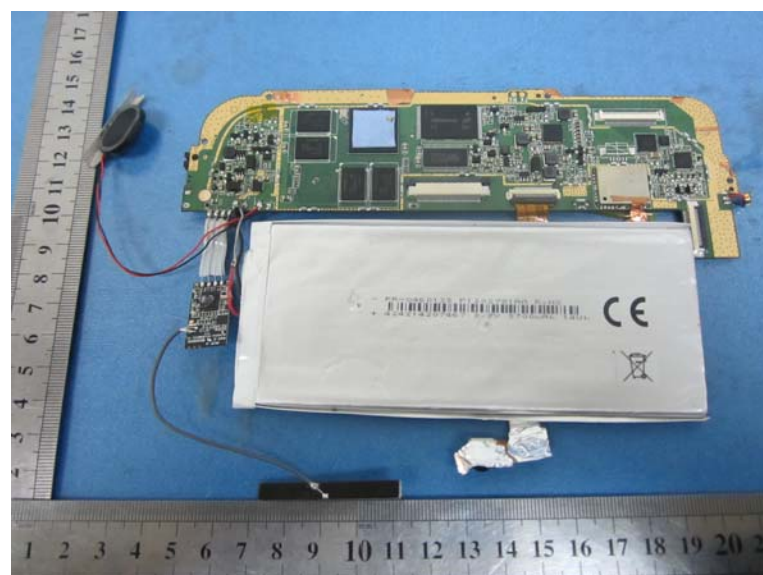


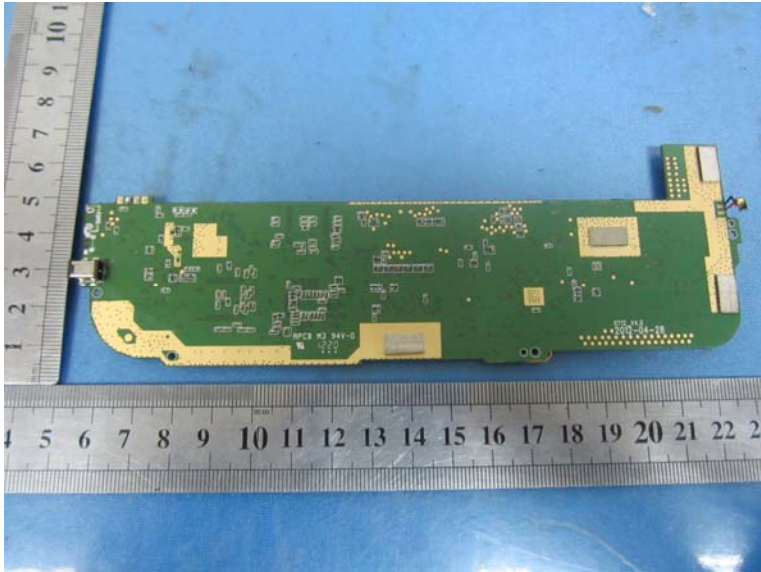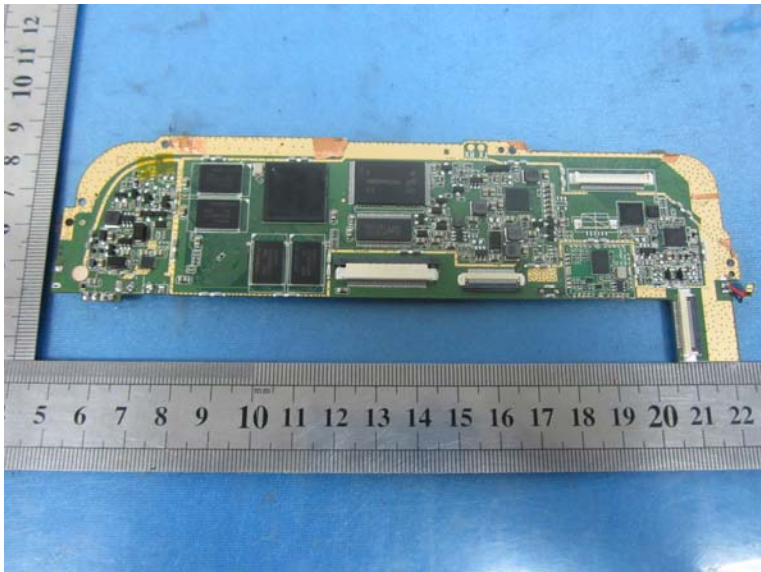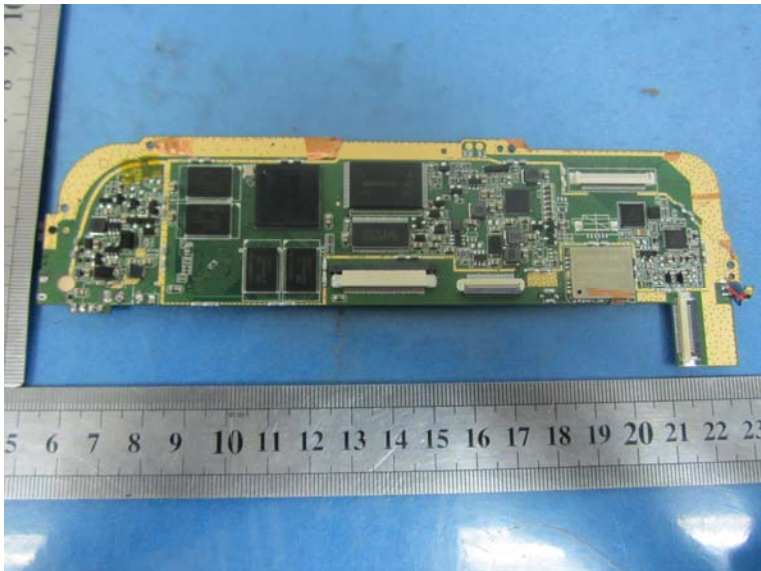

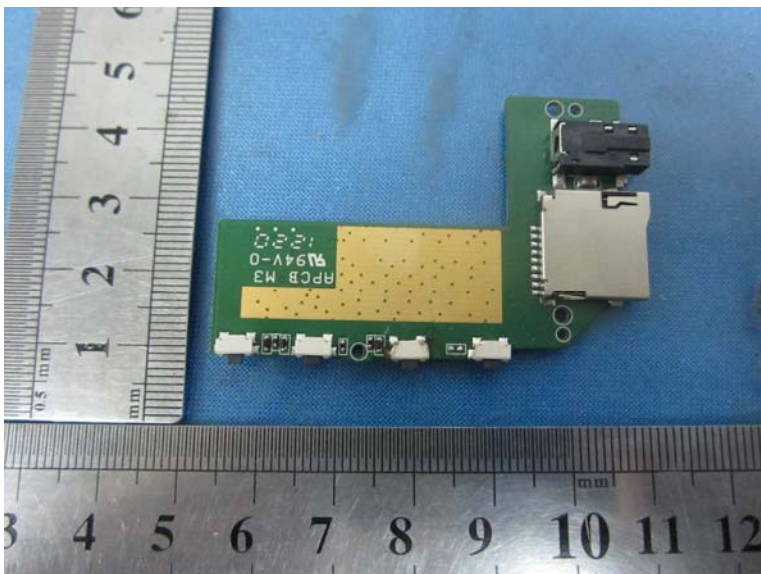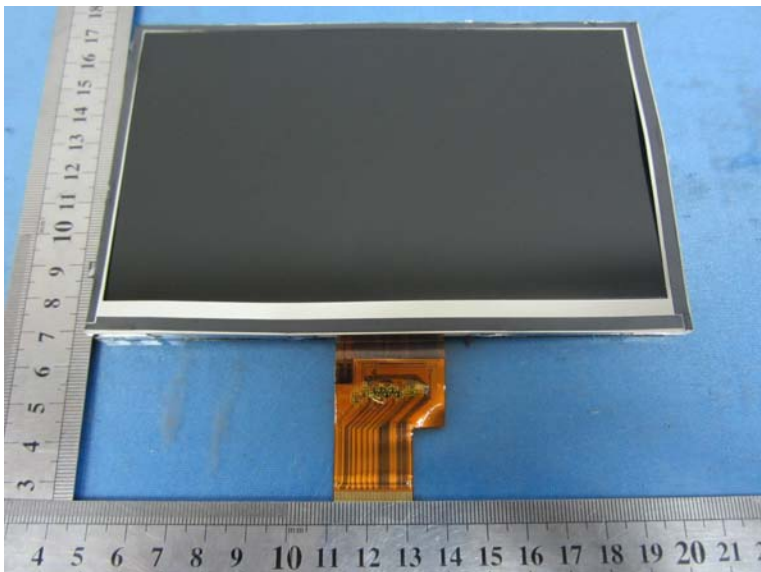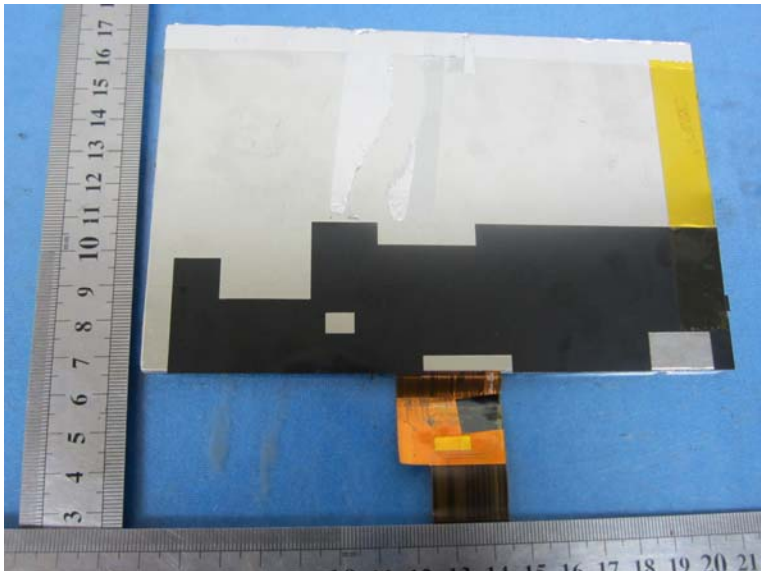

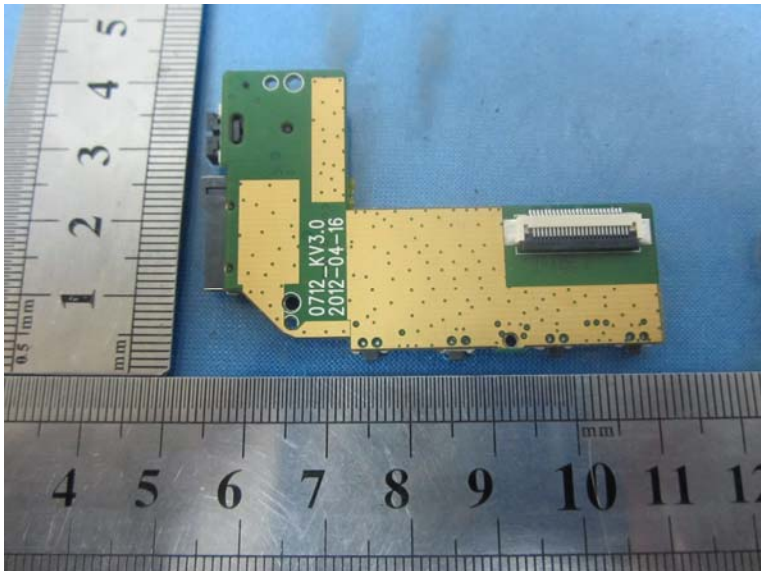

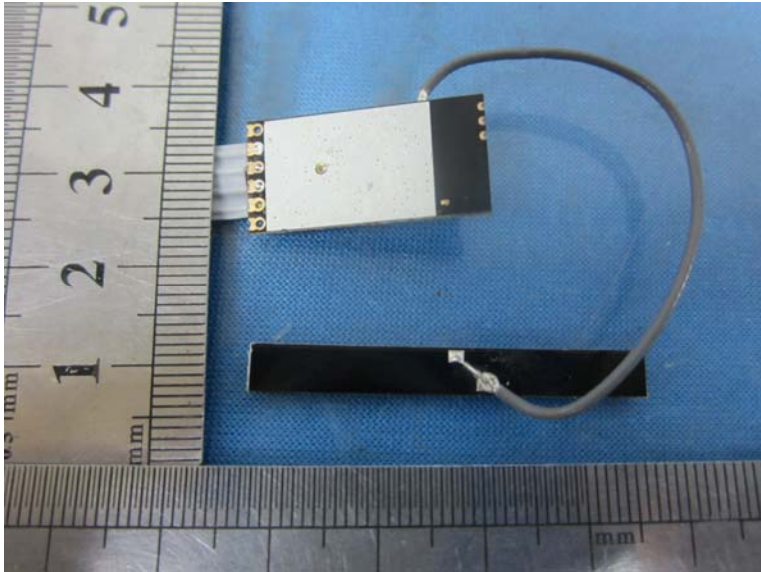

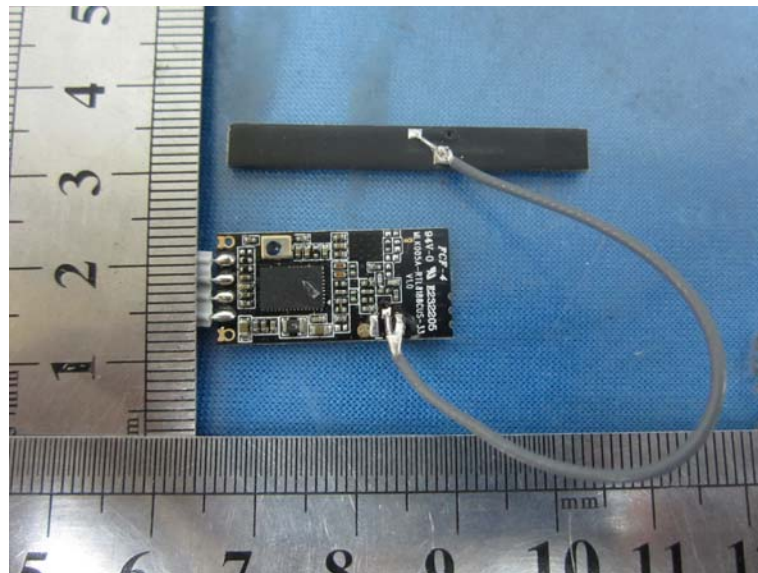

USB cable photo



Adapter Photos



.....End of Report.....