

TEST REPORT

ACCORDING TO: FCC CFR 47 PART 15 Subpart C, section 15.249

FOR:

Hi-G-Tek Ltd.

**Master Handheld Terminal
(MHHT)**

Model number: IGMA51916

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Ports and lines	5
6.3	Auxiliary equipment	5
6.4	Test configuration	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C requirements	7
7.1	Field strength of emissions	7
7.2	Band edge emission	19
7.3	Occupied bandwidth test	22
7.4	Antenna requirements	24
7.5	Conducted emissions	25
8	APPENDIX A Test equipment and ancillaries used for tests	28
9	APPENDIX B Measurement uncertainties	29
10	APPENDIX C Test laboratory description	30
11	APPENDIX D Specification references	30
12	APPENDIX E Test equipment correction factors	31
13	APPENDIX F Abbreviations and acronyms	40

1 Applicant information

Client name: Hi-G-Tek Ltd.
Address: 16 Haharoshet St., Or Yehuda, 60375, Israel
Telephone: +972 3 5339359
Fax: +972 3 5339225
E-mail: yossih@higtek.com
Contact name: Mr. Yossi Hershko

2 Equipment under test attributes

Product name: Master Handheld Terminal
Product type: Transceiver operating at 916.5 MHz and 127 kHz
Model(s): IGMA51916
Serial number: 356515840
Hardware version: E
Software release: V2.03
Receipt date: 5/18/2008

3 Manufacturer information

Manufacturer name: Hi-G-Tek Ltd.
Address: 16 Haharoshet St., Or Yehuda, 60375, Israel
Telephone: +972 3 5339359
Fax: +972 3 5339225
E-Mail: yossih@higtek.com
Contact name: Mr. Yossi Hershko

4 Test details

Project ID: 18802
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 5/18/2008
Test completed: 12/21/2008
Test specification(s): FCC Part 15, subpart C, §15.249

5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a), Field strength of fundamental	Pass
Section 15.249(a), Field strength of harmonics	Pass
Section 15.249(d), Field strength of spurious other than harmonics	Pass
Section 15.249(d), Band edge emissions	Pass
Section 15.203, Antenna requirement	Pass
Section 15.207(a), Conducted emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr.E. Plotnichenko, test engineer	December 21, 2008	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	January 6, 2009	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	January 7, 2009	

6 EUT description

6.1 General information

The EUT is a compact RFID reader module for PDA / Pocket PC with a compact flash (CF) card interface. The reader plugs into a standard CF connector, it has been designed to allow pocket PC's and mobile handhelds both short and long range access to Hi-G-Tek's electronic seal /tag for a various RFID applications. The EUT is powered from 3.3 VDC obtained through CF interface of PDA, both LF & HF antennas are completely integrated.

High Frequency channel: Transmit/Receive at 916.5 MHz (different module) FSK modulated with 40 kHz deviation and 16 kHz data.

Low frequency channel: Transmit/Receive at 127 kHz, AM, 4 kHz data rate.


6.2 Ports and lines

Port type	Port description	Connected		Connector type	Qty.	Cable type	Cable length	Indoor / outdoor
		From	To					
Power and signal	EUT feeding	EUT	PDA	Compact flash slot	1	NA	NA	Indoor

6.3 Auxiliary equipment

Description	Manufacturer	Model number	Serial number
PDA	TRIMBLE	RECON	CS15A04634
Seal (916.5 MHz and 127 kHz)	Hi-G-Tek	IGFLH40433	IJBA16782337

6.4 Test configuration

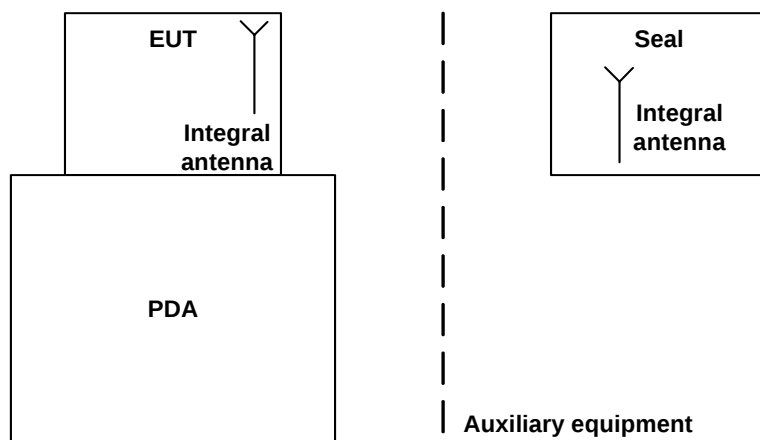

6.5 Transmitter characteristics

Type of equipment					
X	Stand-alone (Equipment with or without its own control provisions)				
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
	Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use			
	fixed	Always at a distance more than 2 m from all people			
	mobile	Always at a distance more than 20 cm from all people			
X	portable	May operate at a distance closer than 20 cm to human body			
Assigned frequency range		902 - 928 MHz			
Operating frequency range		916.5 MHz			
Maximum rated output power		At transmitter 50 Ω RF output connector	dBm		
		Effective radiated power (for equipment with no RF connector)	-2.1 dBm		
Is transmitter output power variable?		X	No		
			Yes	continuous variable	
				stepped variable with stepsize	dB
				minimum RF power	dBm
				maximum RF power	dBm
Antenna connection					
unique coupling	standard connector	X	integral		
			with temporary RF connector		
			X without temporary RF connector		
Type of modulation		FSK			
Maximum transmitter duty cycle		100%			
Transmitter power source					
	Battery	Nominal rated voltage	Battery type		
X	DC	Nominal rated voltage	3.3 VDC from PDA, which PS is powered from the mains via charger		
	AC mains	Nominal rated voltage	Frequency		
Common power source for transmitter and receiver		X	yes no		

Test specification:	Section 15.249(a), Field strength of emissions		
Test procedure:	ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	12/21/2008 10:32:26 PM		
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Quasi-Peak
916.5	NA	94

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)	
	Peak	Average
902 – 928	74.0	54.0

Table 7.1.3 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m, dB(μV/m)*			
	Peak	Quasi Peak	Average	Attenuation below carrier
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	50 dBc (whichever is the less stringent)
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705	NA	73.8 – 63.0**	NA	
1.705 – 30.0*		69.5		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log(S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

Note 1: The fundamental emission limit in dB(μV/m) was calculated as follows:

$$\text{Lim}_{AVR} = 20 \times \log(56.81818 \times F - 6136.3636) - \text{within } 130 - 174 \text{ MHz band};$$

$$\text{Lim}_{AVR} = 20 \times \log(41.6667 \times F - 7083.3333) - \text{within } 260 - 470 \text{ MHz band},$$

where F is the carrier frequency in MHz.

The limit for spurious emissions was 20 dB lower than fundamental emission limit.

The above limits provided in terms of average values, peak limit was 20 dB above the average limit.

Note 2: The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.

7.1.2.2 The measurements were performed in three EUT orthogonal positions.

7.1.2.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.1.2.4 The worst test results (the lowest margins) were found in the EUT horizontal, lay down (X) position, recorded in Table 7.1.4 and shown in the associated plots.

7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.

7.1.3.2 The measurements were performed in three EUT orthogonal positions.

7.1.3.3 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.1.3.4 The worst test results (the lowest margins) were found in the EUT horizontal, lay down (X) position, recorded in Table 7.1.4 and shown in the associated plots.

Test specification: Section 15.249(a), Field strength of emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance		Verdict: PASS	
Date & Time: 12/21/2008 10:32:26 PM			
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz


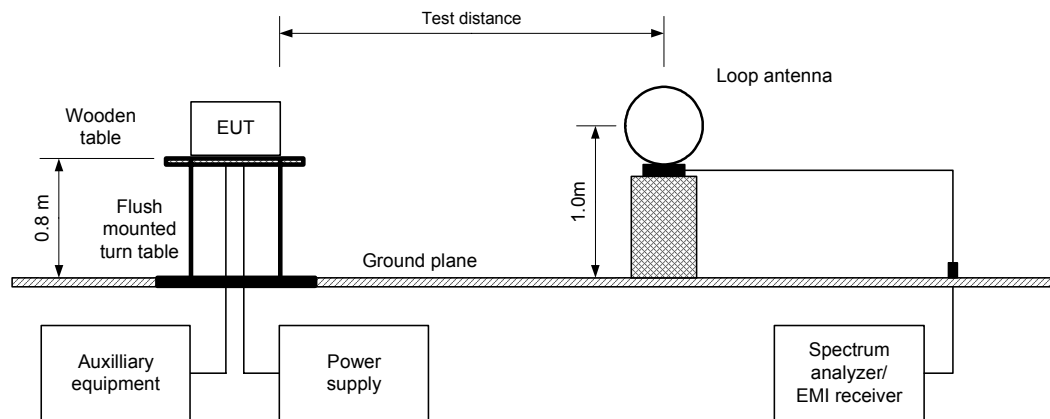


Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

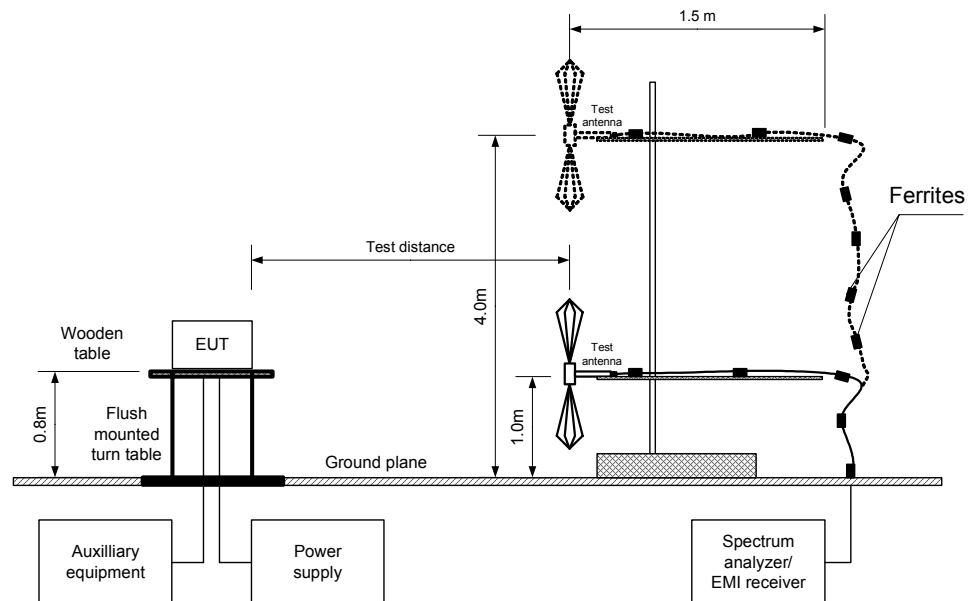

Test specification: Section 15.249(a), Field strength of emissions			
Test procedure: ANSI C63.4, Section 13.1.4			
Test mode: Compliance	Verdict: PASS		
Date & Time: 12/21/2008 10:32:26 PM			
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE:	3 m
EUT POSITION:	3 orthogonal X / Y / Z , X considered as worst case
MODULATION:	FSK
MODULATING SIGNAL:	ID code
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
INVESTIGATED FREQUENCY RANGE:	0.009 – 10000 MHz
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1.0 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)
VIDEO BANDWIDTH:	≥ Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Log periodic (200 MHz – 1000 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Fundamental emission

Frequency, MHz	Antenna		Azimuth, degrees*	Peak emission, dB(μV/m)	Quasi-peak			Verdict
	Pol.	Height, m			Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
916.500	H	1.0	45	93.1	93.0	94.0	1	Pass

Spurious emissions

F, MHz	Antenna		Azimuth, degrees*	Peak field strength			Avr factor, dB	Average field strength (VBW 10 Hz)			Verdict
	Pol.	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	
Spurious emissions											
1833.010	V	1.6	0	46.38	74.00	-27.62	NA	39.00	54.00	-15.00	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = dB below (negative if above) specification limit.

Reference numbers of test equipment used


HL 0415	HL 0446	HL 0521	HL 0554	HL 0604	HL 0812	HL 1430	HL 1947
HL 2432	HL 2909	HL 3123					

Full description is given in Appendix A.

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	12/21/2008 10:32:26 PM		
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			


Plot 7.1.1 Radiated emission measurements at the fundamental frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: X-axis

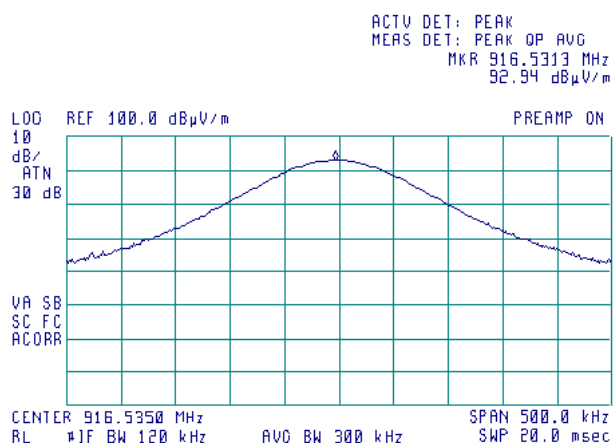

Plot 7.1.2 Radiated emission measurements at the fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Y-axis

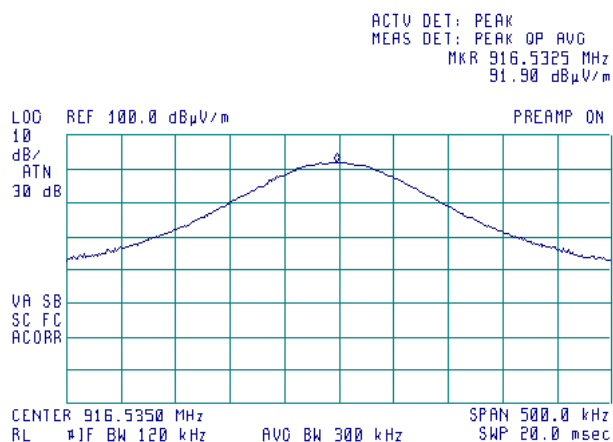

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

Plot 7.1.3 Radiated emission measurements at the fundamental frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal
EUT POSITION: Z-axis

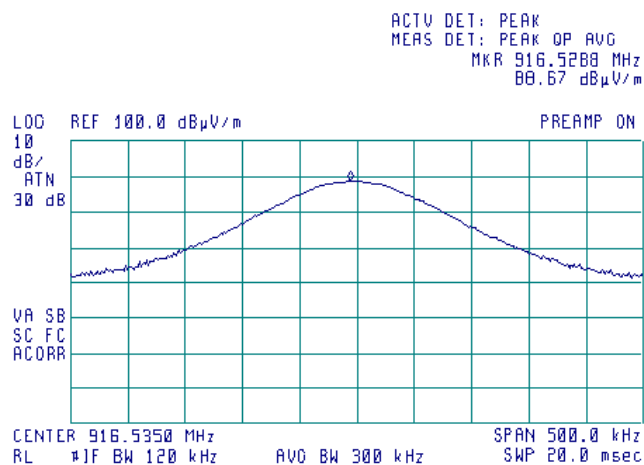

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	12/21/2008 10:32:26 PM		
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			


Plot 7.1.4 Radiated emission measurements from 9 to 150 kHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

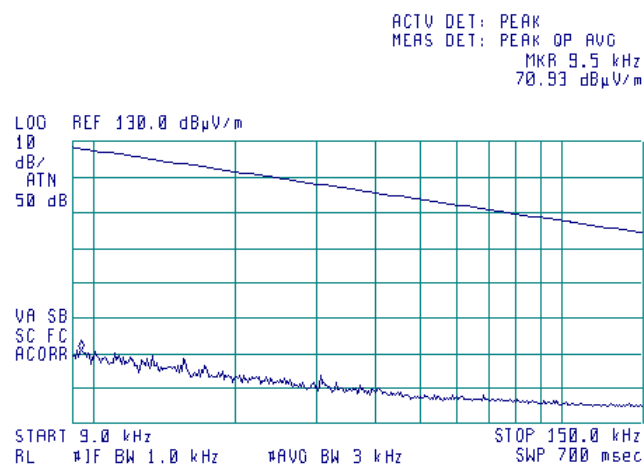

Plot 7.1.5 Radiated emission measurements from 0.15 to 30 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical
EUT POSITION: X-axis

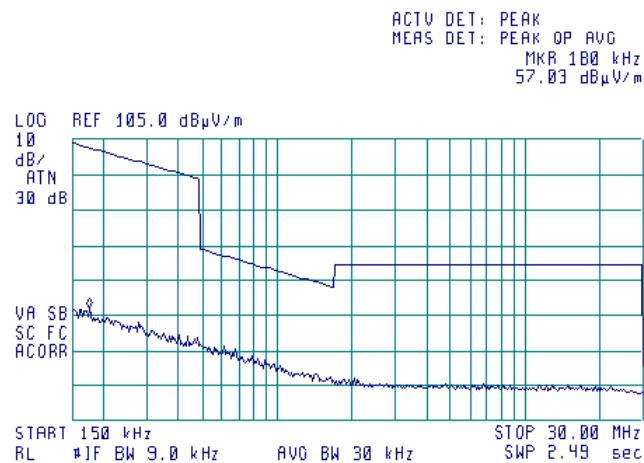

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			

Plot 7.1.6 Radiated emission measurements from 30 to 1000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis

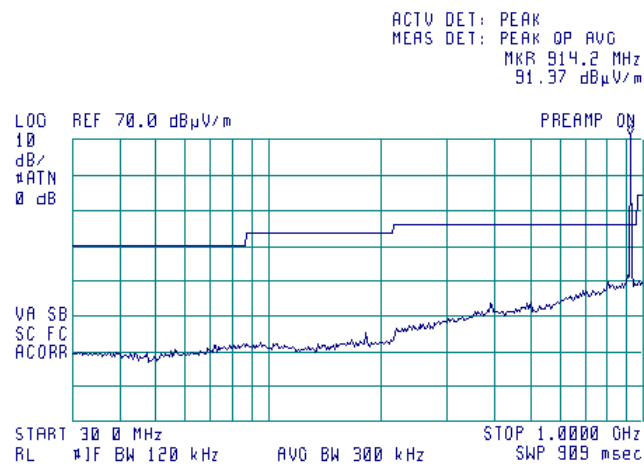


NOTE: No spurious emissions were found across the assigned frequency band (902 – 928 MHz)

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			


Plot 7.1.7 Radiated emission measurements from 1000 to 5000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Peak

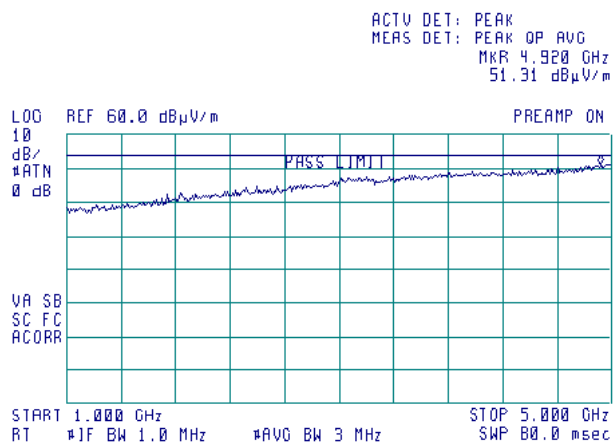

Plot 7.1.8 Radiated emission measurements from 1000 to 5000 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Average

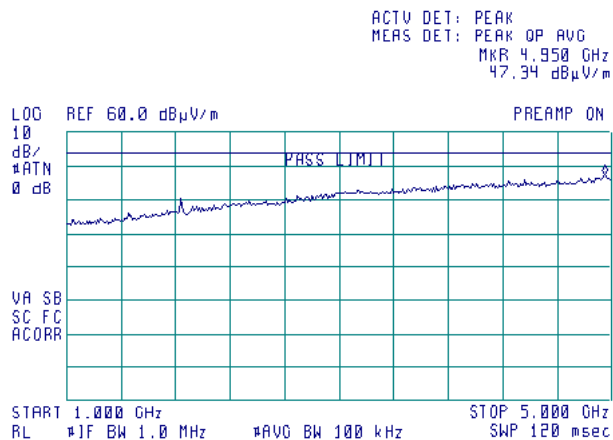

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			


Plot 7.1.9 Radiated emission measurements from 5000 to 10000 MHz

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Peak

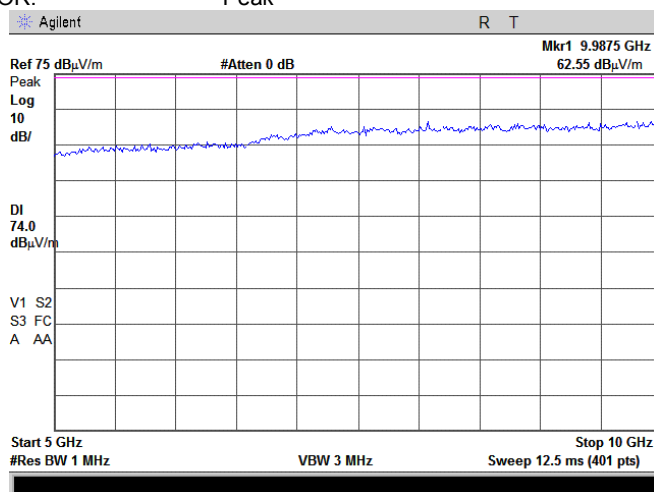

Plot 7.1.10 Radiated emission measurements from 5000 to 10000 MHz


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Average

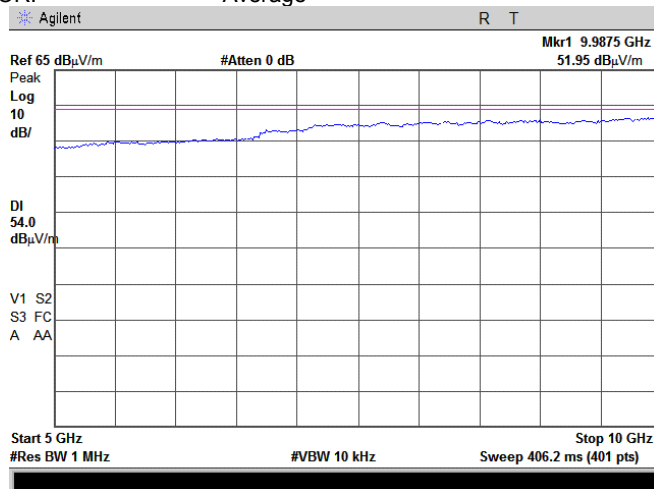

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Verdict: PASS	
Date & Time:			
12/21/2008 10:32:26 PM			
Temperature: 21°C		Relative Humidity: 48 %	Power Supply: 3.3 VDC
Air Pressure: 1011 hPa			
Remarks: 916.5 MHz			


Plot 7.1.11 Radiated emission measurements at the second harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Peak

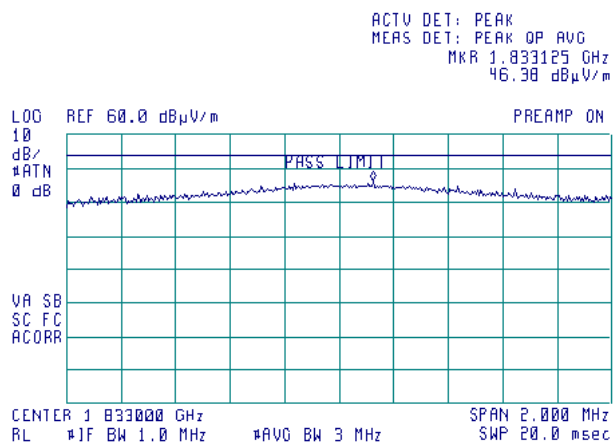

Plot 7.1.12 Radiated emission measurements at the second harmonic frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis
DETECTOR: Average

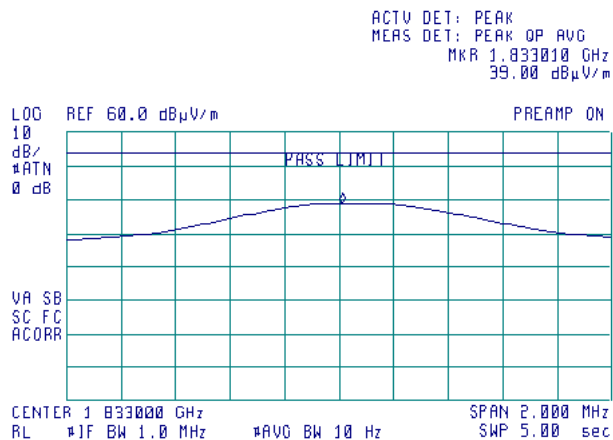

Test specification:		Section 15.249(a), Field strength of emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/21/2008 10:32:26 PM	
Temperature: 21°C	Air Pressure: 1011 hPa	Relative Humidity: 48 %	Power Supply: 3.3 VDC
Remarks: 916.5 MHz			


Plot 7.1.13 Radiated emission measurements at the third harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis

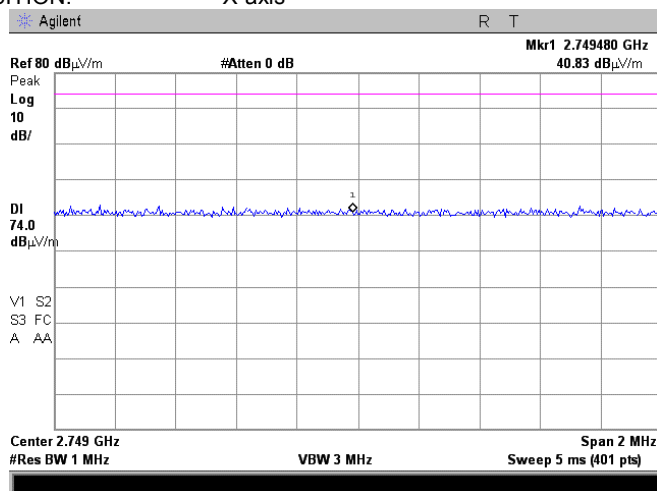

Plot 7.1.14 Radiated emission measurements at the fourth harmonic frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal
EUT POSITION: X-axis

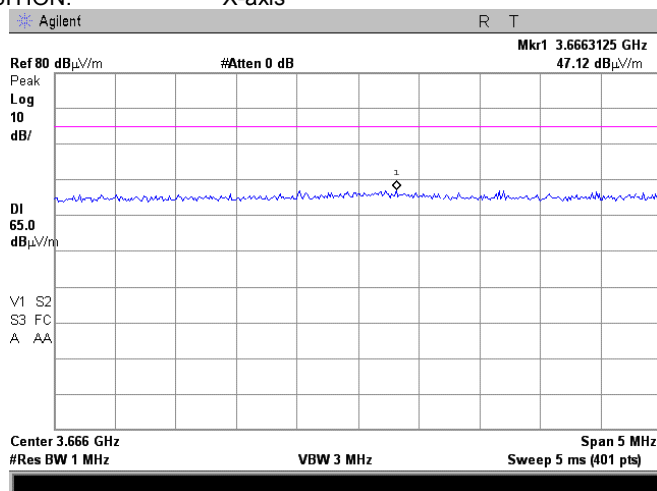

The specified limit is 74 dBuV/m

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Verdict: PASS	
Date:			
12/25/2008			
Temperature: 21°C	Air Pressure: 1010 hPa	Relative Humidity: 40 %	Power Supply: 3.3 VDC
Remarks:			

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands and was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band, MHz	Field strength limit at 3 m, dB μ V/m		Attenuation below carrier, dBc
	Peak	Average	
902-928	74.0	54.0	50

7.2.1 Test procedure


7.2.1.1 The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.

7.2.1.2 The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.

7.2.1.3 The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.

7.2.1.4 The test results were recorded in Table 7.2.2 and shown in the associated plots.

Figure 7.2.1 Band edge emission measurement set up

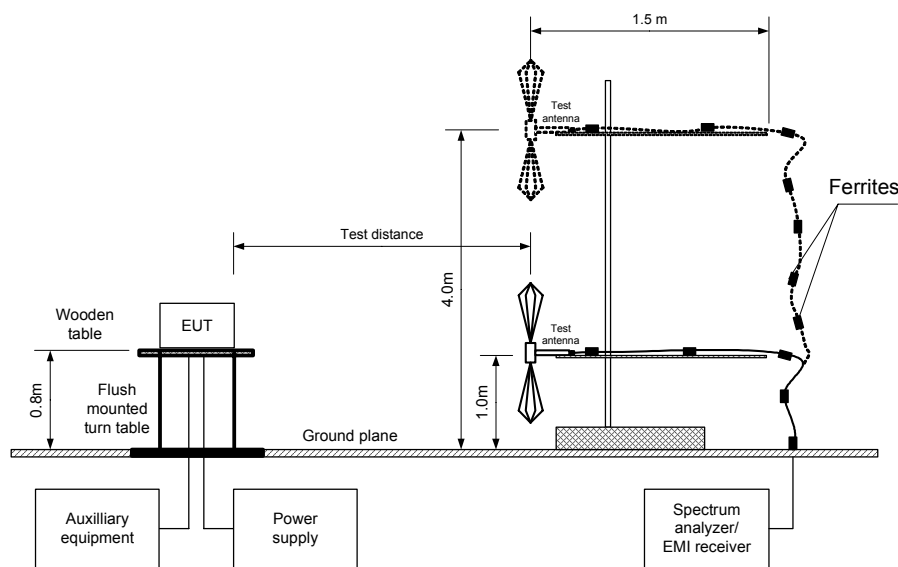



HERMON LABORATORIES

Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/25/2008	
Temperature: 21°C	Air Pressure: 1010 hPa	Relative Humidity: 40 %	Power Supply: 3.3 VDC
Remarks:			

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 902-908 MHz
DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 120 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: FSK
TRANSMITTER OUTPUT POWER SETTINGS: Maximum

The test shows compliance with 15.249(d) requirements. The 50 dB attenuation below the carrier is shown as delta marker between the peak emissions of carrier and the lowest and highest assigned band edges.


Reference numbers of test equipment used

HL 0521	HL 0589	HL 0604	HL 2009					
---------	---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.


Test specification:		Section 15.249(d), Band edge emissions	
Test procedure:		ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict: PASS
Date:		12/25/2008	
Temperature: 21°C	Air Pressure: 1010 hPa	Relative Humidity: 40 %	Power Supply: 3.3 VDC
Remarks:			

Plot 7.2.1 Low band edge emission test result

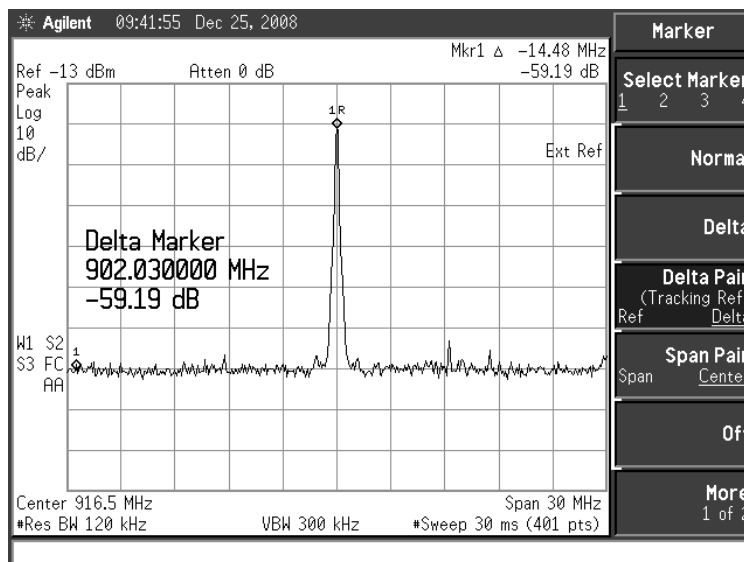

Attenuation below the carrier at the low frequency edge – 59.19 dB

Plot 7.2.2 High band edge emission test result

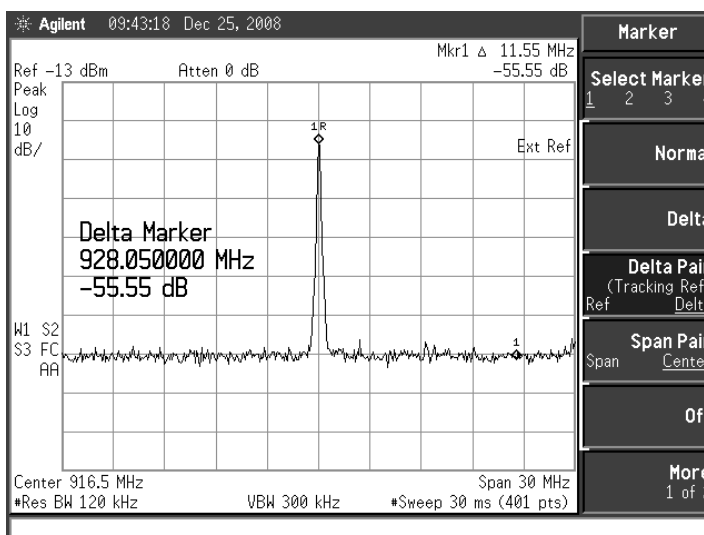

Attenuation below the carrier at the high frequency edge – 55.55 dB

Test specification:		Section 15.215(c), Occupied bandwidth	
Test procedure:		ANSI C63.4, Section 13.1.7	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	12/2/2008 5:17:16 PM		
Temperature: 22°C	Air Pressure: 1009 hPa	Relative Humidity: 45 %	Power Supply: 3.3 VDC
Remarks:			

7.3 Occupied bandwidth test

7.3.1 General

This test was performed to measure transmitter 20 dB occupied bandwidth according to 15.215 requirements.

Table 7.3.1 Occupied bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0

*- Modulation envelope reference points provided in terms of attenuation below modulated carrier.

7.3.2 Test procedure

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and its proper operation was checked.

7.3.2.2 The EUT was set to transmit modulated carrier.

7.3.2.3 The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.3.2 and associated plot.

Figure 7.3.1 Occupied bandwidth test setup



Test specification:		Section 15.215(c), Occupied bandwidth			
Test procedure:		ANSI C63.4, Section 13.1.7			
Test mode:		Compliance		Verdict: PASS	
Date & Time:		12/2/2008 5:17:16 PM			
Temperature: 22°C		Air Pressure: 1009 hPa		Relative Humidity: 45 %	Power Supply: 3.3 VDC
Remarks:					

Table 7.3.2 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND: 902 – 928 MHz
DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 3 kHz
VIDEO BANDWIDTH: 10 kHz
MODULATION ENVELOPE REFERENCE POINTS: 20 dBc
MODULATION: FSK
MODULATING SIGNAL: enable


Carrier frequency, MHz	Occupied bandwidth, kHz	Limit		Margin, kHz	Verdict
		% of the carrier frequency	kHz		
916.5	85.0	NA	26000	25889	Pass

Reference numbers of test equipment used

HL 0604	HL 1425	HL 3119						
---------	---------	---------	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 7.3.1 Occupied bandwidth test result

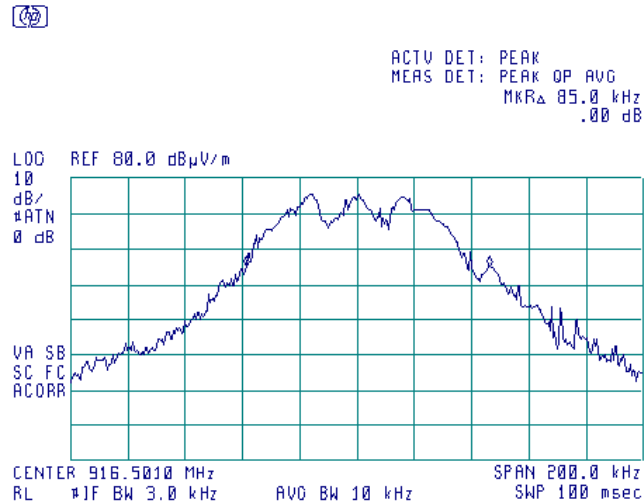



Test specification:		Section 15.203, Antenna requirement	
Test procedure:		Visual inspection / supplier declaration	
Test mode:		Compliance	Verdict: PASS
Date & Time:		12/2/2008 3:15:36 PM	
Temperature: 22°C	Air Pressure: 1009 hPa	Relative Humidity: 45 %	Power Supply: 3.3 VDC
Remarks:			

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	9/26/2008 1:23:40 PM		
Temperature: 25°C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: 120 VAC
Remarks:			

7.5 Conducted emissions

7.5.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Limits for conducted emissions

Frequency, MHz	Class B limit, dB(μ V)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.5.2 Test procedure


7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and the performance check was conducted.

7.5.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.5.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.

7.5.2.3 The position of the device cables was varied to determine maximum emission level.

7.5.2.4 The worst test results (the lowest margins) were recorded in Table 7.5.2 and shown in the associated plots.

Figure 7.5.1 Setup for conducted emission measurements, table-top equipment

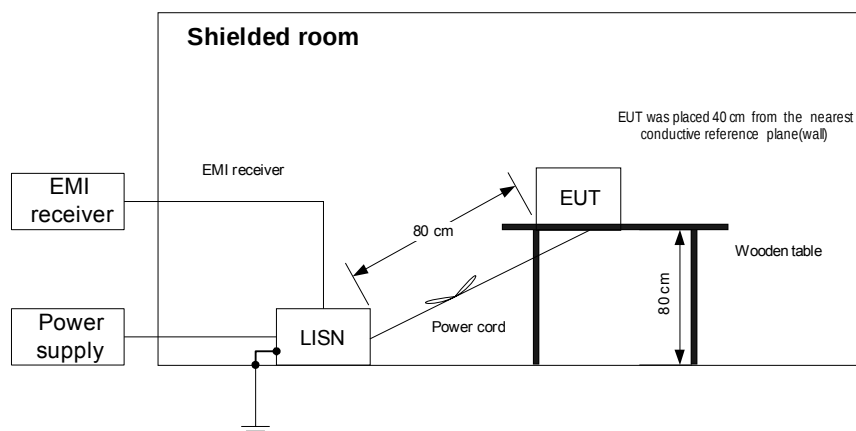

Test specification:		Section 15.207(a), Conducted emission			
Test procedure:		ANSI C63.4, Section 13.1.3			
Test mode:		Compliance		Verdict: PASS	
Date & Time:		9/26/2008 1:23:40 PM			
Temperature: 25°C		Air Pressure: 1007 hPa		Relative Humidity: 44 %	
Remarks:				Power Supply: 120 VAC	

Table 7.5.2 Conducted emission test results

LINE: AC mains
 EUT CONFIGURATION: HF transmitter (916.5 MHz) ON
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(μV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*		
0.150000	51.07	50.23	66.00	-15.77	40.18	56.00	-15.82	L1	Pass
0.295445	36.58	35.32	60.41	-25.09	24.30	50.41	-26.11		
0.460810	27.80	25.85	56.73	-30.88	17.95	46.73	-28.78		
1.691000	26.91	22.75	56.00	-33.25	10.40	46.00	-35.60		
2.031745	27.97	25.58	56.00	-30.42	15.10	46.00	-30.90		
12.466090	26.85	21.66	60.00	-38.34	13.34	50.00	-36.66		
0.160360	47.78	46.73	65.49	-18.76	36.05	55.49	-19.44	L2	Pass
0.323825	36.02	34.57	59.65	-25.08	23.94	49.65	-25.71		
0.487420	28.52	26.54	56.24	-29.70	18.61	46.24	-27.63		
0.822975	25.00	22.02	56.00	-33.98	14.21	46.00	-31.79		
1.144865	28.99	27.09	56.00	-28.91	16.93	46.00	-29.07		
1.316115	28.19	25.58	56.00	-30.42	14.03	46.00	-31.97		

Reference numbers of test equipment used


HL 0787	HL 1430	HL 1500	HL 2888				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:		Section 15.207(a), Conducted emission	
Test procedure:		ANSI C63.4, Section 13.1.3	
Test mode:		Compliance	Verdict: PASS
Date & Time:		9/26/2008 1:23:40 PM	
Temperature: 25°C	Air Pressure: 1007 hPa	Relative Humidity: 44 %	Power Supply: 120 VAC
Remarks:			


Plot 7.5.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmission at 916.5 MHz
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

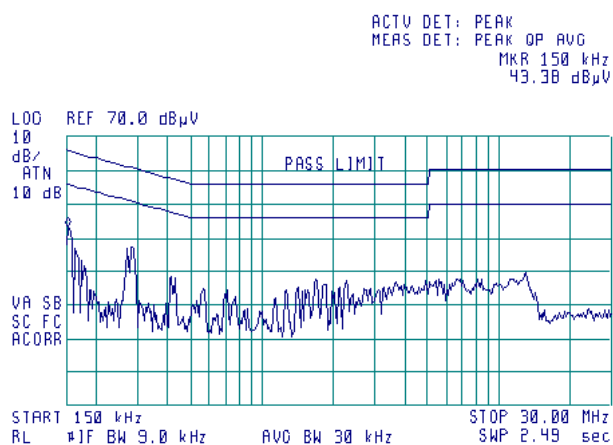

Plot 7.5.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmission at 916.5 MHz
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

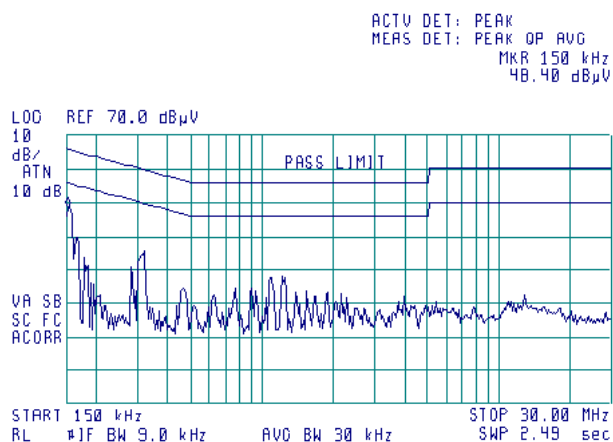

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0415	Cable, Coax, RF, RG-214	Hermon Laboratories	CC-3	056	02-Dec-08	02-Dec-09
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	29-Jun-08	29-Jun-09
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard Co	8546A	3617A 00319, 3448A002 53	29-Aug-08	29-Aug-09
0554	Amplifier, 2-18 GHz RF	Miteq	AFD4	104300	28-Feb-08	28-Feb-09
0566	Antenna, Biconical, 20 - 200 MHz	Electro-Metrics	BIA 25/30	3566	25-Sep-07	25-Sep-09
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	10-Jan-08	10-Jan-09
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard Co	11947A	3107A018 77	16-Oct-08	16-Oct-09
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	02-Dec-08	02-Dec-09
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	03-Sep-08	03-Sep-09
1430	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432	Agilent Technologies	8542E	3807A002 62,3705A0 0217	31-Aug-08	31-Aug-09
1500	Cable RF, 15 m, N/N-type	Suhner Switzerland	RG 214/U	1500	08-Sep-08	08-Sep-09
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS-1803A-6500-NPS	T4974	30-Dec-08	30-Dec-09
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	03-Mar-08	03-Mar-09
2888	LISN Two-line V-Network 50 Ohm / 50 uH + 5 Ohm, 16A, MIL STD 461E, CISPR 16-1	Rolf Heine	NNB-2/16Z	02/10018	09-Jul-08	09-Jul-09
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	07-May-07	07-May-09
3119	Cable, 18 GHz N-type, M-F, 3 m	Bird	TC-MNFN-3.0	211539004	07-Dec-08	07-Dec-09
3123	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	3123	07-Dec-08	07-Dec-09

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.0 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.1 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 5.5 dB Biconical antenna: ± 5.5 dB Log periodic antenna: ± 5.6 dB Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS and IC 2186A-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.


11 APPENDIX D Specification references

47CFR part 15: 2007	Radio Frequency Devices.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model NNB-2/16Z, Rolf Heine, HL 2888

Frequency, kHz	Insertion loss, dB		Measurement Uncertainty, dB
	L1	N	
10	0.48	0.79	±0.6
20	0.52	0.63	
30	0.31	0.35	
40	0.20	0.22	
50	0.16	0.17	
100	0.10	0.08	
300	0.08	0.06	
500	0.10	0.06	
600	0.09	0.07	
800	0.10	0.07	
1000	0.10	0.08	
2000	0.12	0.11	
3000	0.16	0.14	
4000	0.17	0.18	
6000	0.26	0.23	
10000	0.49	0.41	
14000	0.66	0.54	
16000	0.79	0.69	
18000	0.86	0.76	
20000	0.96	0.85	
25000	1.22	1.08	
28000	1.35	1.21	
30000	1.43	1.29	

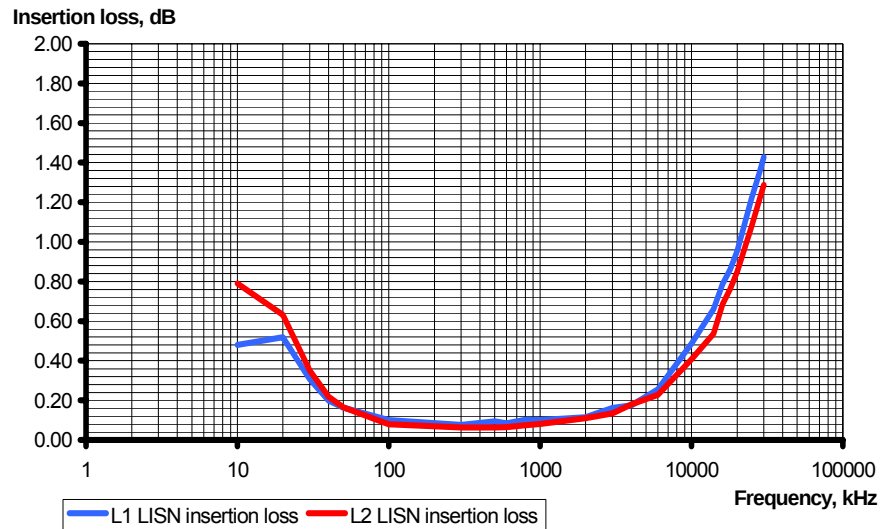

Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconical antenna
Electro-Metrics, model BIA-25/30
Ser.No.3566, HL 0566

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
30	14.7	120	16.8
35	12.9	125	15.5
40	12.6	130	15.5
45	12.8	135	15.1
50	12.6	140	14.8
55	11.8	145	15.1
60	11.7	150	16.9
65	10.4	155	17.2
70	9.2	160	17.3
75	9.1	165	17.8
80	9.1	170	18.3
85	9.5	175	19.0
90	11.2	180	19.5
95	12.6	185	20.0
100	13.7	190	20.4
105	14.2	195	20.5
110	15.3	200	20.6
115	17.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	20	0.73	±0.12
2	30	0.91	
3	50	1.2	
4	80	1.56	
5	100	1.76	
6	200	2.59	
7	300	3.26	
8	400	3.93	
9	500	4.42	
10	600	4.92	
11	700	5.36	
12	800	5.88	
13	900	6.41	
14	1000	6.71	
15	1500	8.63	
16	2000	10.39	

Cable loss
Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92

Cable loss
Cable 18 GHz, N-type, M-F, 3 m, Bird Electronic Corp., model TC-MNFN-3.0, S/N 211539004
HL 3119

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.06	3600	1.34	7400	2.00	11200	2.48	15100	2.90
30	0.09	3700	1.36	7500	2.01	11300	2.45	15200	2.89
50	0.11	3800	1.37	7600	2.03	11400	2.51	15300	2.91
100	0.23	3900	1.39	7700	2.05	11500	2.45	15400	2.85
200	0.30	4000	1.39	7800	2.07	11600	2.49	15500	2.83
300	0.42	4100	1.42	7900	2.06	11700	2.51	15600	2.89
400	0.39	4200	1.45	8000	2.06	11800	2.50	15700	2.85
500	0.47	4300	1.47	8100	2.09	11900	2.52	15800	2.87
600	0.49	4400	1.49	8200	2.10	12000	2.48	15900	2.91
700	0.63	4500	1.51	8300	2.11	12100	2.53	16000	2.90
800	0.62	4600	1.53	8400	2.15	12200	2.54	16100	2.94
900	0.70	4700	1.55	8500	2.15	12300	2.56	16200	2.91
1000	0.70	4800	1.54	8600	2.17	12400	2.57	16300	2.96
1100	0.77	4900	1.57	8700	2.19	12500	2.57	16400	3.01
1200	0.78	5000	1.60	8800	2.20	12600	2.55	16500	3.01
1300	0.83	5100	1.60	8900	2.21	12700	2.50	16600	2.98
1400	0.86	5200	1.62	9000	2.22	12800	2.57	16700	3.00
1500	0.85	5300	1.65	9100	2.23	12900	2.57	16800	3.01
1600	0.94	5400	1.66	9200	2.25	13000	2.55	16900	3.06
1700	0.90	5500	1.69	9300	2.24	13100	2.62	17000	3.07
1800	0.90	5600	1.70	9400	2.28	13200	2.60	17100	3.09
1900	0.95	5700	1.72	9500	2.28	13300	2.67	17200	3.10
2000	0.97	5800	1.74	9600	2.27	13400	2.66	17300	3.11
2100	1.00	5900	1.75	9700	2.30	13500	2.71	17400	3.16
2200	1.02	6000	1.77	9800	2.30	13600	2.73	17500	3.15
2300	1.05	6100	1.79	9900	2.34	13700	2.73	17600	3.21
2400	1.08	6200	1.82	10000	2.32	13800	2.85	17700	3.21
2500	1.10	6300	1.83	10100	2.31	13900	2.83	17800	3.18
2600	1.13	6400	1.83	10200	2.31	14000	2.83	17900	3.25
2700	1.15	6500	1.87	10300	2.26	14100	2.83	18000	3.14
2800	1.17	6600	1.88	10400	2.32	14200	2.84		
2900	1.21	6700	1.90	10500	2.26	14300	2.90		
3000	1.22	6800	1.93	10600	2.26	14400	2.84		
3100	1.25	6900	1.92	10700	2.31	14600	2.88		
3200	1.27	7000	1.95	10800	2.24	14700	2.85		
3300	1.29	7100	1.96	10900	2.39	14800	2.92		
3400	1.28	7200	1.99	11000	2.41	14900	2.93		
3500	1.31	7300	2.00	11100	2.46	15000	2.83		

Cable loss
Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00
HL 3123

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.11	3600	1.97	7400	3.12	11200	3.90	15100	4.74
30	0.17	3700	1.97	7500	3.13	11300	3.93	15200	4.70
50	0.25	3800	2.03	7600	3.16	11400	3.88	15300	4.73
100	0.32	3900	2.04	7700	3.18	11500	3.87	15400	4.78
200	0.46	4000	2.10	7800	3.20	11600	3.90	15500	4.75
300	0.58	4100	1.97	7900	3.23	11700	3.86	15600	4.76
400	0.65	4200	1.97	8000	3.25	11800	3.88	15700	4.75
500	0.74	4300	2.03	8100	3.26	11900	3.86	15800	4.78
600	0.82	4400	2.04	8200	3.28	12000	3.89	15900	4.79
700	0.89	4500	2.10	8300	3.31	12100	3.94	16000	4.73
800	0.95	4600	1.97	8400	3.31	12200	3.92	16100	4.78
900	1.01	4700	1.97	8500	3.32	12300	3.96	16200	4.84
1000	1.07	4800	2.03	8600	3.34	12400	4.01	16300	4.90
1100	1.11	4900	2.04	8700	3.35	12500	4.07	16400	4.87
1200	1.17	5000	2.10	8800	3.37	12600	4.08	16500	4.90
1300	1.22	5100	2.53	8900	3.39	12700	4.17	16600	4.98
1400	1.27	5200	2.55	9000	3.42	12800	4.26	16700	5.05
1500	1.29	5300	2.60	9100	3.43	12900	4.16	16800	5.04
1600	1.35	5400	2.61	9200	3.51	13000	4.21	16900	5.02
1700	1.40	5500	2.64	9300	3.52	13100	4.24	17000	5.09
1800	1.44	5600	2.70	9400	3.54	13200	4.27	17100	5.07
1900	1.51	5700	2.67	9500	3.63	13300	4.31	17200	5.10
2000	1.49	5800	2.71	9600	3.61	13400	4.33	17300	5.13
2100	1.55	5900	2.74	9700	3.71	13500	4.25	17400	5.23
2200	1.58	6000	2.80	9800	3.66	13600	4.27	17500	5.21
2300	1.62	6100	2.79	9900	3.77	13700	4.33	17600	5.22
2400	1.72	6200	2.81	10000	3.75	13800	4.33	17700	5.36
2500	1.76	6300	2.83	10100	3.77	13900	4.31	17800	5.35
2600	1.78	6400	2.86	10200	3.80	14000	4.30	17900	5.45
2700	1.80	6500	2.88	10300	3.79	14100	4.30	18000	5.43
2800	1.86	6600	2.90	10400	3.87	14200	4.31		
2900	1.90	6700	2.92	10500	3.83	14300	4.37		
3000	1.90	6800	2.98	10600	3.88	14400	4.35		
3100	1.97	6900	2.98	10700	3.86	14600	4.53		
3200	1.97	7000	3.00	10800	3.87	14700	4.50		
3300	2.03	7100	3.02	10900	3.90	14800	4.62		
3400	2.04	7200	3.04	11000	3.84	14900	4.65		
3500	2.10	7300	3.06	11100	3.88	15000	4.79		

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
dB Ω	decibel referred to one Ohm
DC	direct current
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT