


User's Manual

SWITCH ASSY, DOOR CONTROL

Model No.: WRDCE0050TX

There is no User's Manual because this equipment will not be sold to end-user directly.

Keyless entry system (If so equipped)

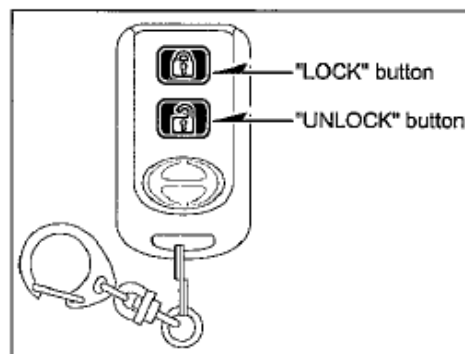

WIRELESS REMOTE CONTROL

Remote key operation enables you to lock and unlock the door from some distance.

Pressing the "LOCK" button to lock the all door, and pressing the "UNLOCK" button unlocks the driver's door. Pressing the button again within 3 seconds unlocks the other door.

The emergency flashers flash to indicate that the doors have been locked/unlocked. (Locked: once; Unlocked: twice)

The cab light turn on about 20 sec. then fade out, when the pressing the "UNLOCK" button with the cab light switch is in the "DOOR" position.

NOTICE

- ◆ Do not put water over the remote key, disassemble or drop it. Doing so may cause malfunction.
- ◆ Do not leave the remote key in the place where the temperature may rise excessively high. Doing so may cause a short life of battery and malfunction.
- ◆ If the remote key does not function by pressing the button or if you lose the remote key, contact any authorized HINO dealer or repaired, or another duly qualified and equipped professional.

The remote key can function in the area within 10 m (32.81 ft) from the center of the cab.

However, practical operating distance may differ depending on the circumstances and electronic noise.

When you unlock the door by the remote key, the door will be automatically re-locked if you do not open the door within 30 seconds.

The remote key does not function in the following cases.


- The engine is running.
- The stater key is at the position other than "LOCK".
- The door is open.

As many as 3 remote controls can be used. Contact any authorized HINO dealer or repaired, or another duly qualified and equipped professional, for purchasing or how to start using additional remote controls.

CONDITIONS AFFECTING OPERATION

The wireless remote control function may not operate normally in the following situations.


- Near a TV tower, radio station, electric power plant, airport or other facility that generates strong radio waves.
- When carrying a portable radio, cellular phone or other wireless communication device.
- When multiple wireless keys are in the vicinity.
- When the wireless key has come into contact with, or is covered by a metallic object.
- When a wireless key (that emits radio waves) is being used nearby.
- When the wireless key has been left near an electrical appliance such as a personal computer.

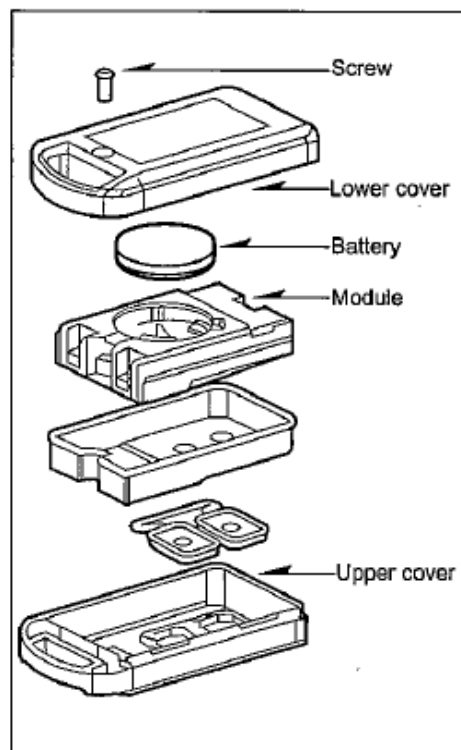


REPLACING THE BATTERY

If you cannot lock or unlock the door by pressing the button of remote key, the battery may be expiring its life. Replace the battery with new one if it is wasted away.

1. Remove the screw on the backside and remove the cover.
2. Remove the module.

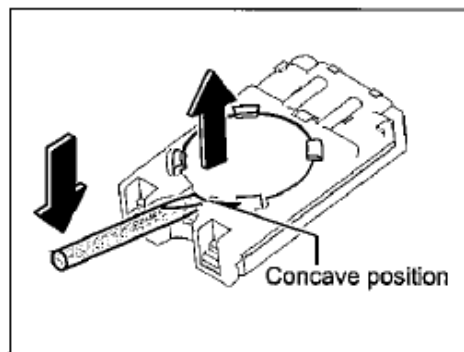

3. Insert the screwdriver (-) to the concave portion, then remove the battery.

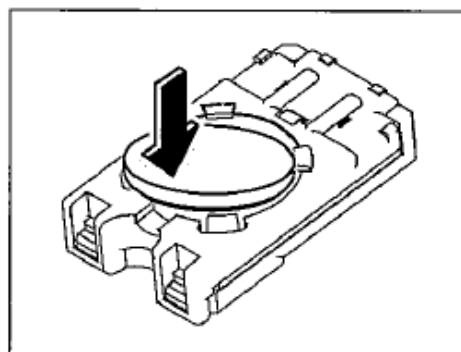

4. Put new battery on the module and push down it into the position.
Insert a new battery with the "+" terminal facing up.

HINT:

The battery lifetime may differ depending on the operating conditions.

Battery to use	Quantity
Lithium battery CR2032	One piece

5. Then, fix the cover by the screw.

NOTICE

- ◆ *Discard the used battery in an appropriate manner.*
- ◆ *When you lose the remote key, contact any authorized HINO dealer or repaired, or another duly qualified and equipped professional.*

PERCHLORATE MATERIAL

Special handling may apply,

See www.dtsc.ca.gov/hazardouswaste/perchlorate.

Your vehicle has components that may contain perchlorate. These components may include wireless remote control batteries.

CERTIFICATION FOR WIRELESS REMOTE CONTROL

For vehicles sold in U.S.A

NOTE:

This device complies with part 15 of the FCC Rules and RSS-210.

Operation is subject to the following two conditions:

1. this device may not cause harmful interference, and
2. this device must accept any interference

received, including interference that may cause undesired operation.

NOTICE: [for Receiver (WRDCE0050RX)]

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC WARNING:

Change or modifications not expressly approved by U-shin could void the FCC compliance and negate your authority to operate the product.

For vehicle sold in Canada

NOTE:

This device complies with RSS-210.

1. this device may not cause harmful interference, and
2. this device must accept any interference

received, including interference that may cause undesired operation.

INSTALLATION OF A MOBILE TWO-WAY RADIO SYSTEM

As the installation of a mobile two-way radio system in your vehicle could affect electronic system such as the multiport fuel injection system/sequential multiport fuel injection system, cruise control system, anti-lock brake system and seat belt pretensioner system, be sure to check with your HINO dealer for precautionary measures or special instructions regarding system.

[EXAMPLE]



FCC Declaration of Conformity

Responsible Party:

Products:

Product name:

Model number:

Trade name:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution

Changes or modifications not expressly approved by Hino could void the FCC compliance and negate your authority to operate the product.