

FCC Part 15C Measurement and Test Report

For

China Linkin Co., Ltd.

Room 502. Arion Centre, 2-12 Queen's Road West, Hong Kong.

China Linkin Co., Ltd.

FCC ID: OD3POS377

FCC Rules: FCC Part 15C

Product Description: POS terminal

Tested Model: DFW377

Report No.: STR12058351I-2

Tested Date: 2012-06-01 to 2012-06-20

Issued Date: 2012-06-21

Tested By: Seven Song / Engineer

Seven Song

Reviewed By: Lahm Peng / EMC Manager

Lahm peng

Approved & Authorized By: Jandy so / PSQ Manager

Jandyso

Prepared By:

SEM.Test Compliance Service Co., Ltd

3/F, Jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
2. SUMMARY OF TEST RESULTS	6
3. ANTENNA REQUIREMENT	7
3.1 STANDARD APPLICABLE.....	7
3.2 EVALUATION INFORMATION	7
4. POWER SPECTRAL DENSITY	8
4.1 STANDARD APPLICABLE.....	8
4.2 TEST EQUIPMENT LIST AND DETAILS	8
4.3 TEST PROCEDURE.....	8
4.4 ENVIRONMENTAL CONDITIONS	8
4.5 SUMMARY OF TEST RESULTS/PLOTS	9
5. 6DB BANDWIDTH	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST EQUIPMENT LIST AND DETAILS	15
5.3 TEST PROCEDURE.....	15
5.4 ENVIRONMENTAL CONDITIONS	15
5.5 SUMMARY OF TEST RESULTS/PLOTS	16
6. RF OUTPUT POWER.....	22
6.1 STANDARD APPLICABLE.....	22
6.2 TEST EQUIPMENT LIST AND DETAILS	22
6.3 TEST PROCEDURE.....	22
6.4 ENVIRONMENTAL CONDITIONS	22
6.5 SUMMARY OF TEST RESULTS/PLOTS	23
7. FIELD STRENGTH OF SPURIOUS EMISSIONS	33
7.1 MEASUREMENT UNCERTAINTY	33
7.2 STANDARD APPLICABLE.....	33
7.3 TEST EQUIPMENT LIST AND DETAILS	33
7.4 TEST PROCEDURE.....	34
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	34
7.6 ENVIRONMENTAL CONDITIONS	34
7.7 SUMMARY OF TEST RESULTS/PLOTS	35
8. OUT OF BAND EMISSIONS.....	57
8.1 STANDARD APPLICABLE.....	57
8.2 TEST EQUIPMENT LIST AND DETAILS	57
8.3 TEST PROCEDURE.....	57
8.4 ENVIRONMENTAL CONDITIONS	58
8.5 SUMMARY OF TEST RESULTS/PLOTS	58

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: China Linkin Co., Ltd.
Address of applicant: Room 502, Arion Centre, 2-12 Queen's Road West, Hong Kong.

Manufacturer: Shenzhen Maxpad Technology Development Co., Ltd.
Address of manufacturer: Room B04, 4/F, Bldg R2-B, No.20 Gaoxin Ave 7th, South, Shenzhen Hi-tech Industrial park, Nanshan, Shenzhen.

General Description of EUT	
Product Name:	POS terminal
Trade Name:	Maxpad
Model No.:	DFW377
Adding Model(s):	MX377
Rated Voltage:	Battery 7.4V, Adapter DC 9V
Power Adapter Model:	HKA02108525-8A (Input: AC 100-240V, Output: DC 9V)
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The other model listed in the report has different appearance only of DFW377 without circuit and electronic construction changed, declared by the manufacturer</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b/g/n(HT-20)
Frequency Range:	2412-2462MHz
RF Output Power:	15.70dBm (Conducted)
Data Rate:	1-11Mbps, 6-54Mbps, up to 65Mbps
Modulation:	CCK, BPSK, QPSK, 16QAM, 64QAM
Quantity of Channels:	11
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.6 dBi
Lowest Internal Frequency of EUT:	32.768kHz
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the China Linkin Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice KDB 558074 for digital transmission systems shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite
DC Power Cable	1.1	Unshielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an Integral antenna, fulfill the requirement of this section.

4. Power Spectral Density

4.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

4.3 Test Procedure

According to the KDB 558074, the test method of power spectral density as below:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span 5-30 % greater than the EBW.
4. Repeat above procedures until all frequency measured was complete.
5. (BWCF) where BWCF = $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

4.4 Environmental Conditions


Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

4.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz	BWCF	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	4.993	-15.2	-10.21	8
	2437	5.610	-15.2	-9.59	8
	2462	4.454	-15.2	-10.75	8
802.11g	2412	-2.952	-15.2	-18.15	8
	2437	-2.611	-15.2	-17.81	8
	2462	-2.250	-15.2	-17.45	8
802.11n HT20	2412	-3.386	-15.2	-18.59	8
	2437	-3.645	-15.2	-18.85	8
	2462	-4.002	-15.2	-19.20	8

Please refer to the following test plots:


802.11b-Low Channel

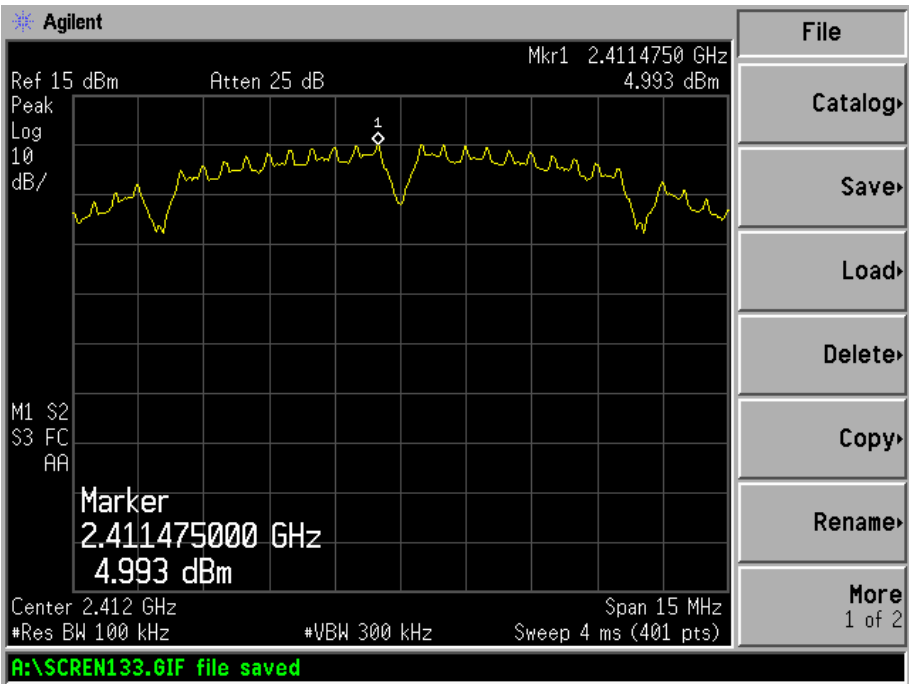


802.11b-Middle Channel

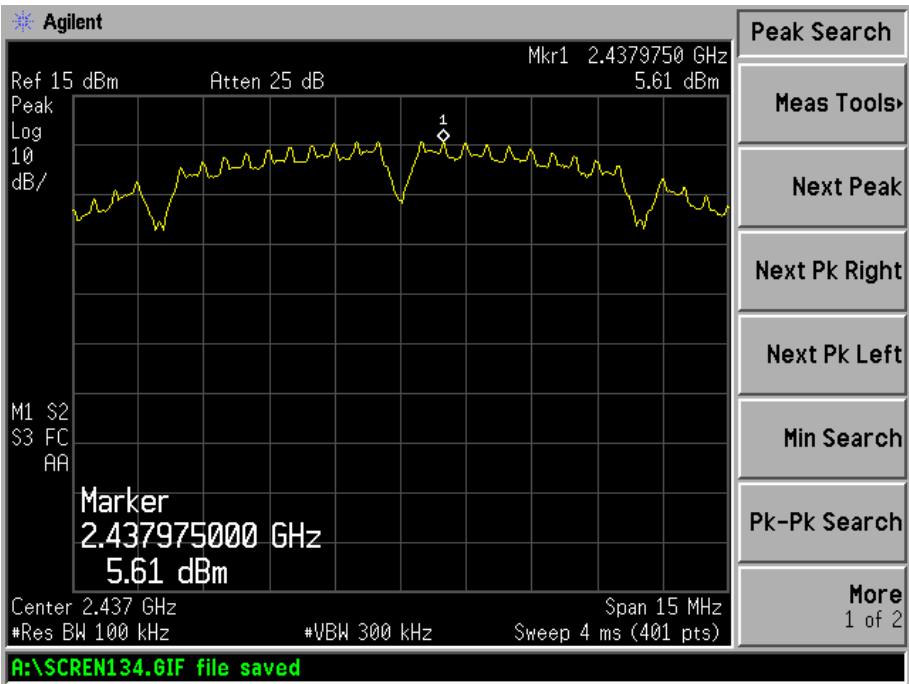


802.11b-High Channel

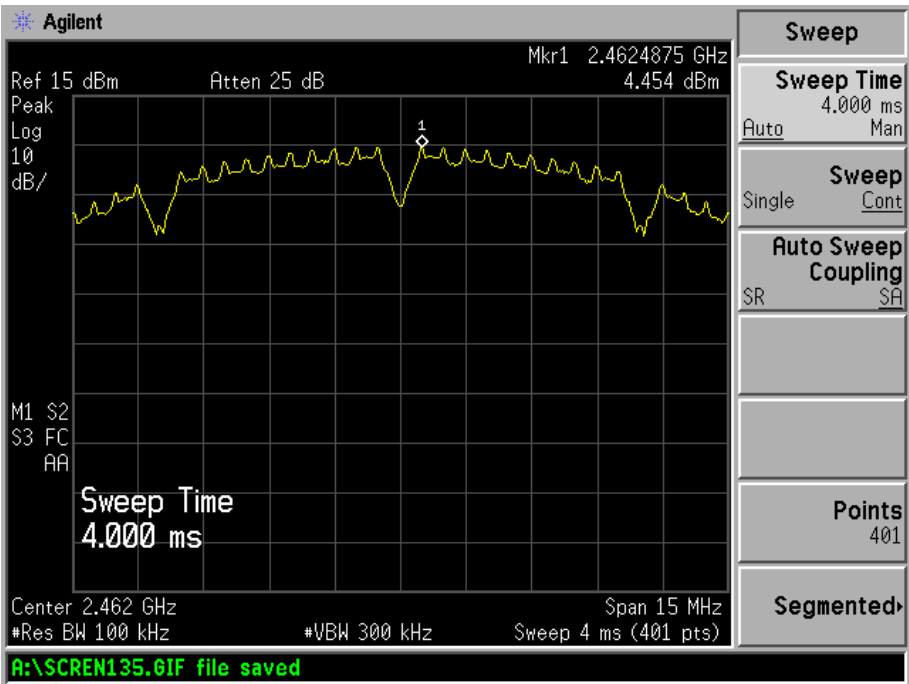


802.11g-Low Channel

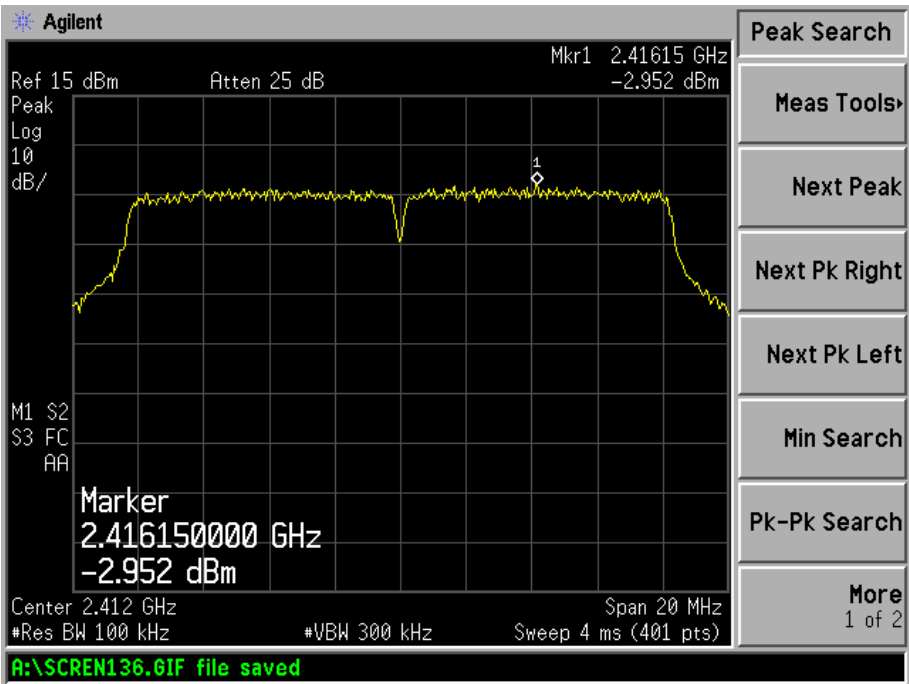


802.11g-Middle Channel

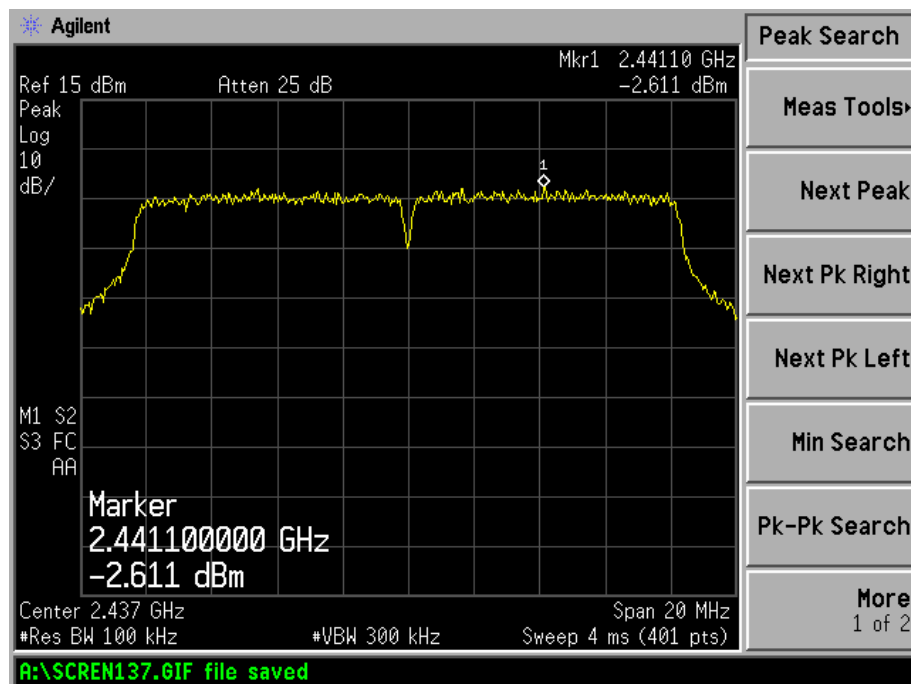


802.11g-High Channel

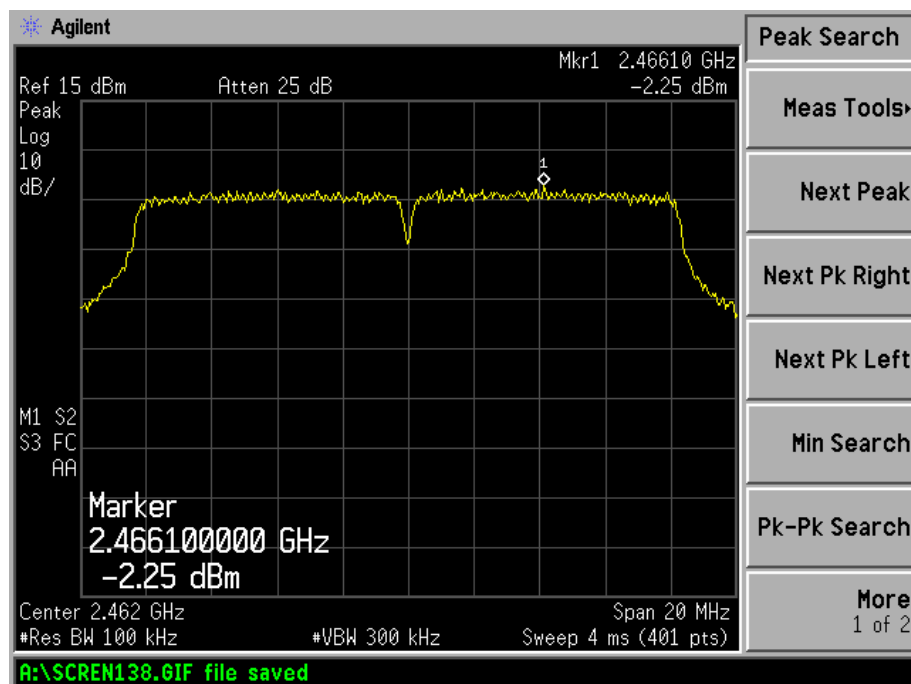


802.11n-HT20-Low Channel

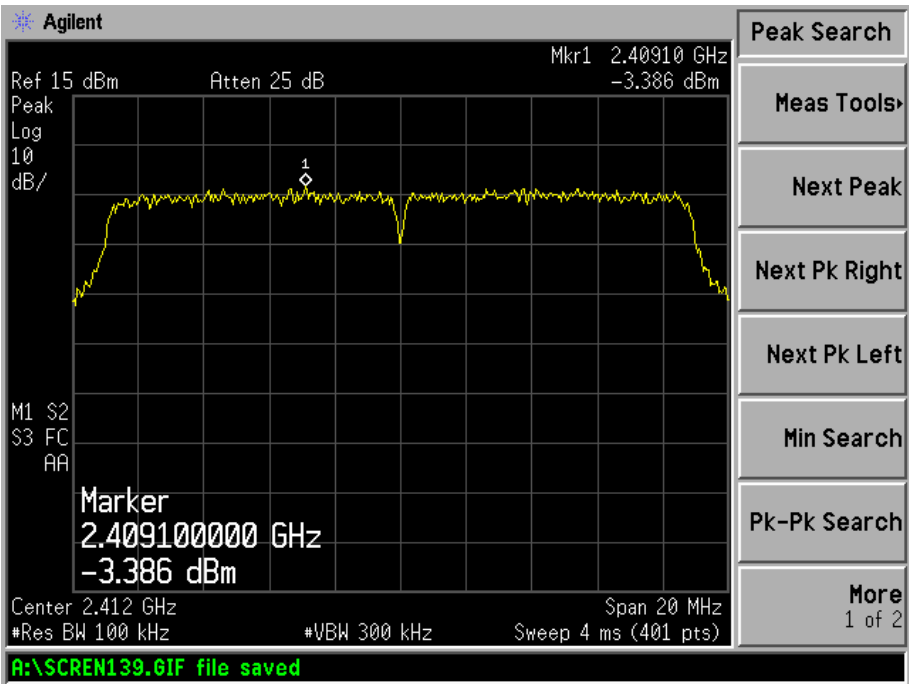

802.11n-HT20-Middle Channel

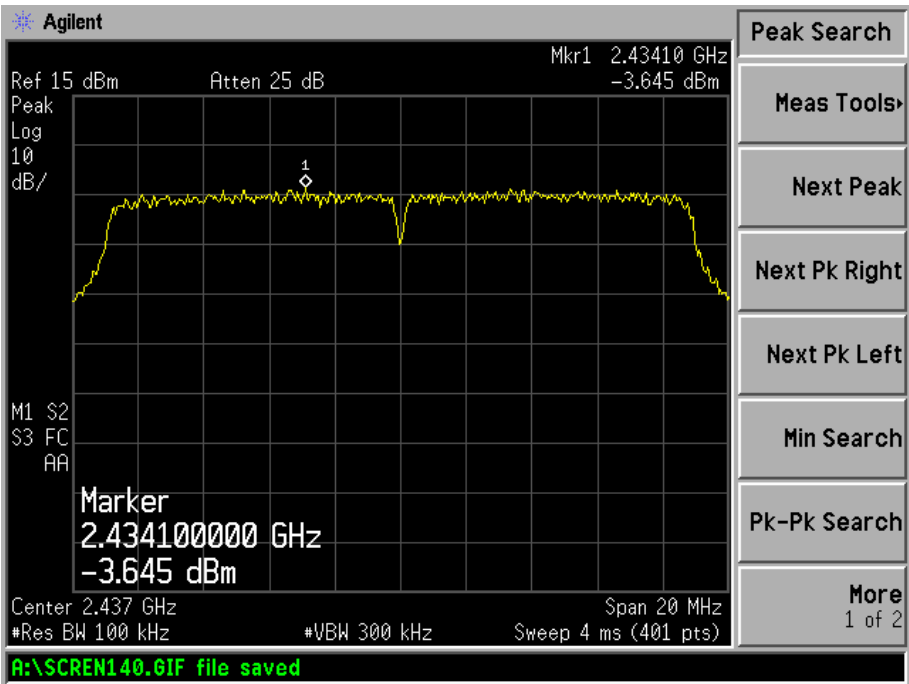

802.11n-HT20-High Channel

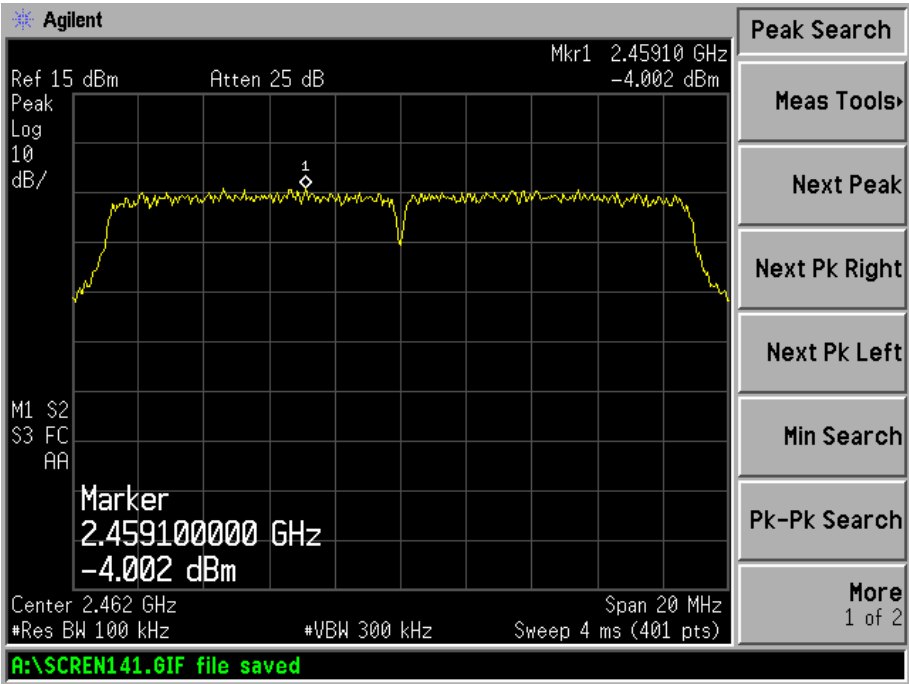

5. 6dB Bandwidth

5.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300 kHz (1 -5% of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

5.4 Environmental Conditions


Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	Limit kHz
802.11b	2412	10186	500
	2437	10196	500
	2462	10183	500
802.11g	2422	16456	500
	2437	16429	500
	2452	16.416	500
802.11n-HT20	2412	17673	500
	2437	17724	500
	2462	17685	500

Please refer to the following test plots:


802.11b-Low Channel

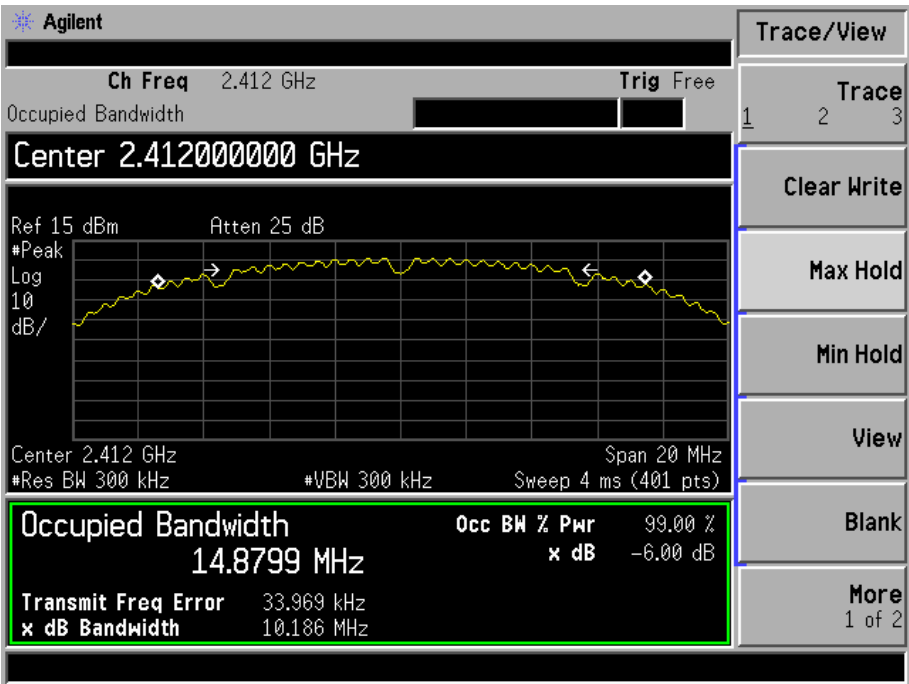


802.11b-Middle Channel

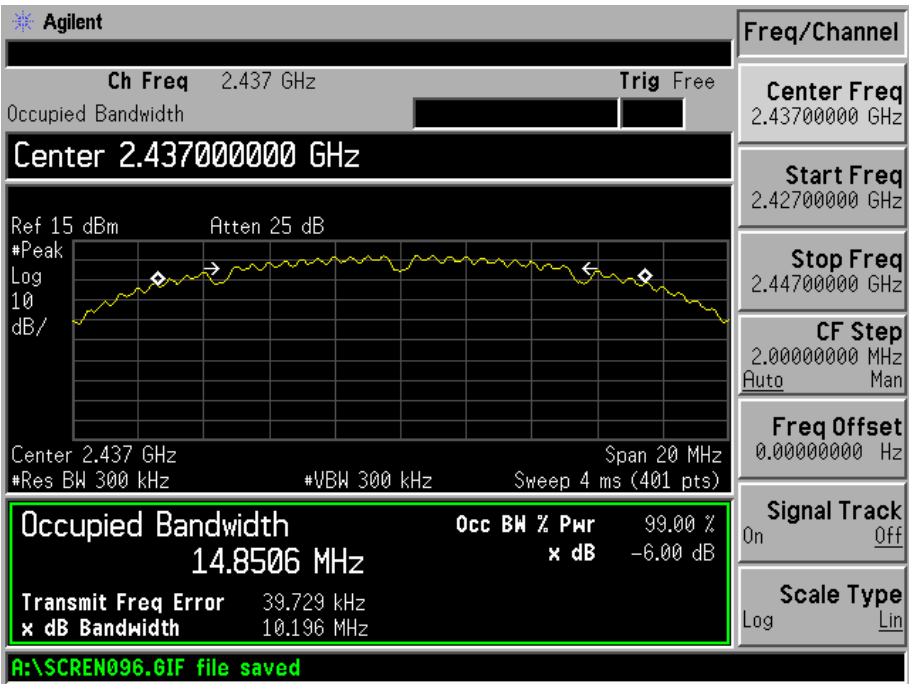


802.11b-High Channel

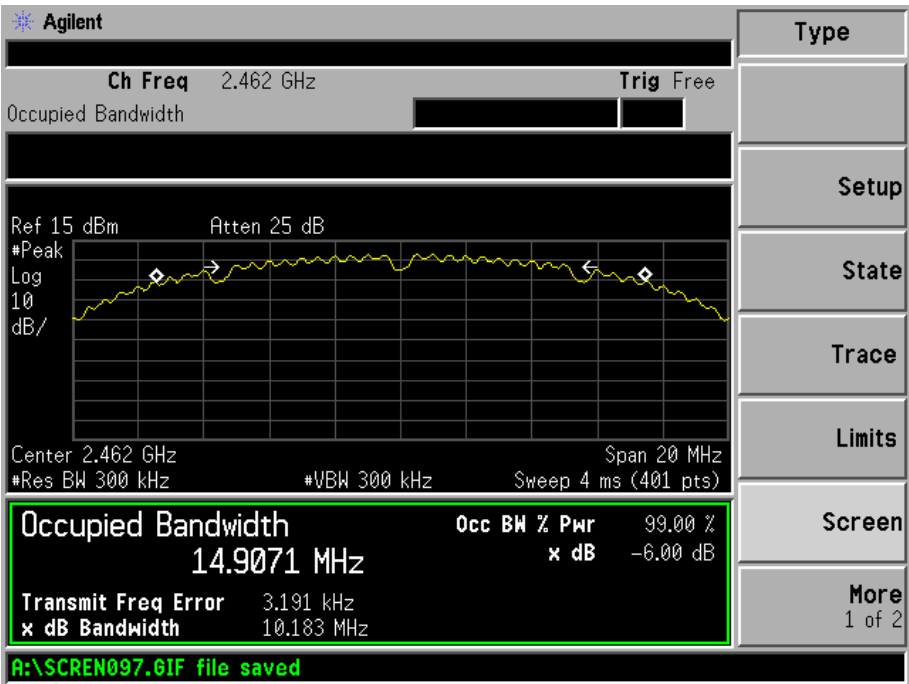


802.11g-Low Channel

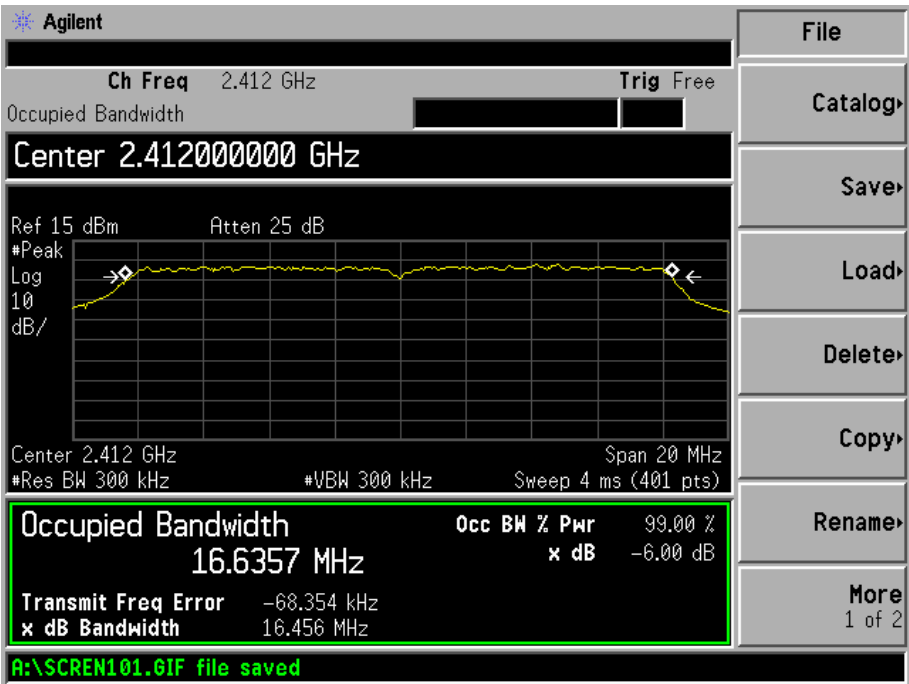


802.11g-Middle Channel

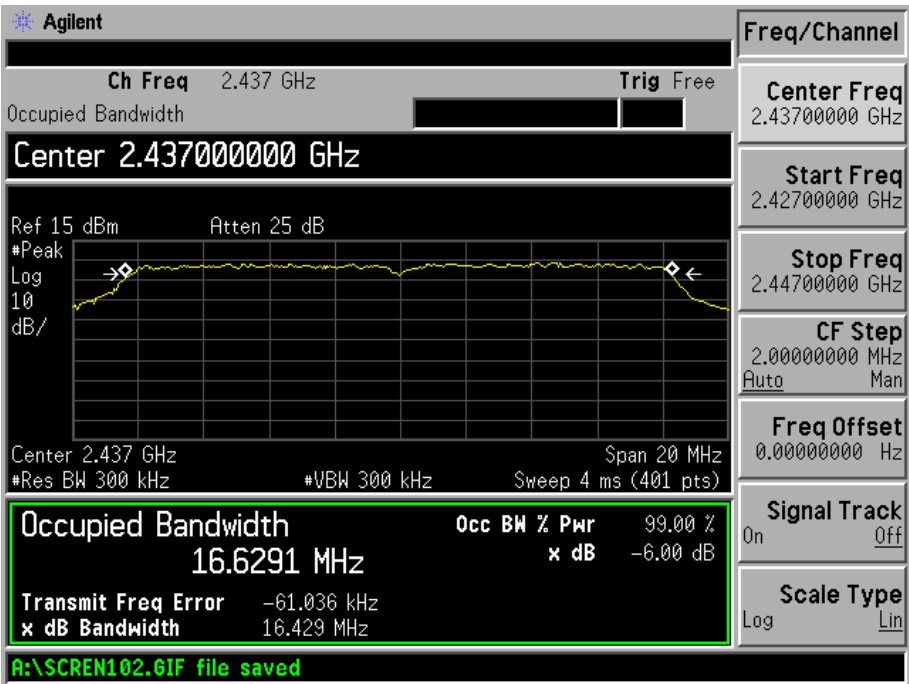


802.11g-High Channel

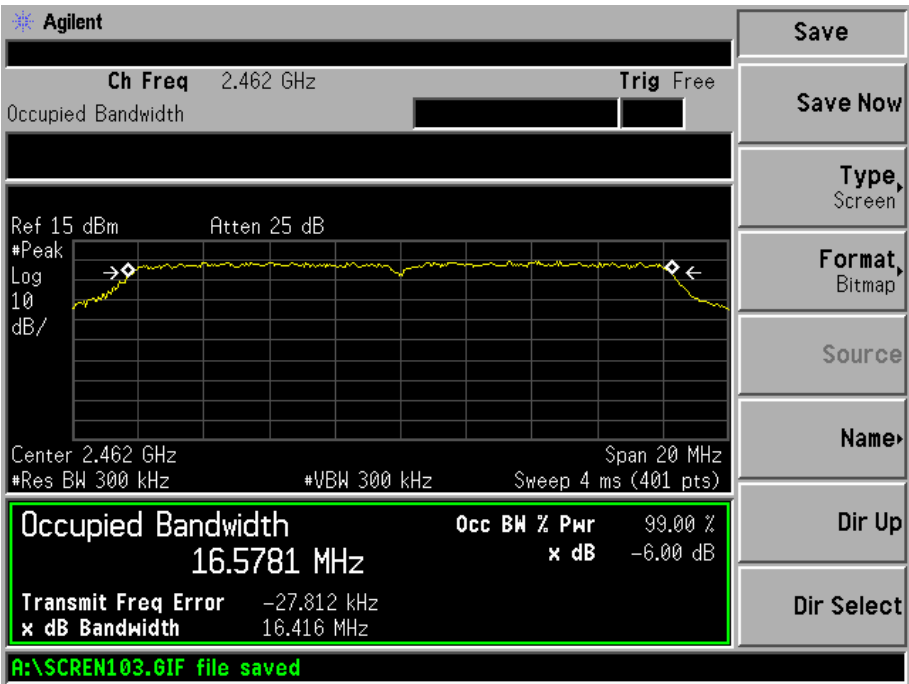


802.11n-HT20-Low Channel

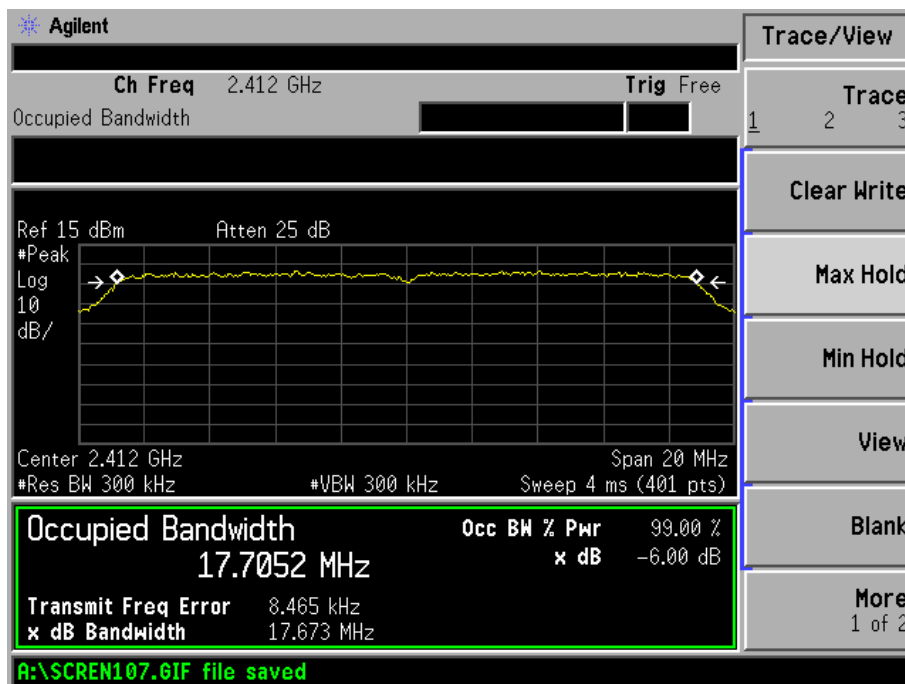

802.11n-HT20-Middle Channel

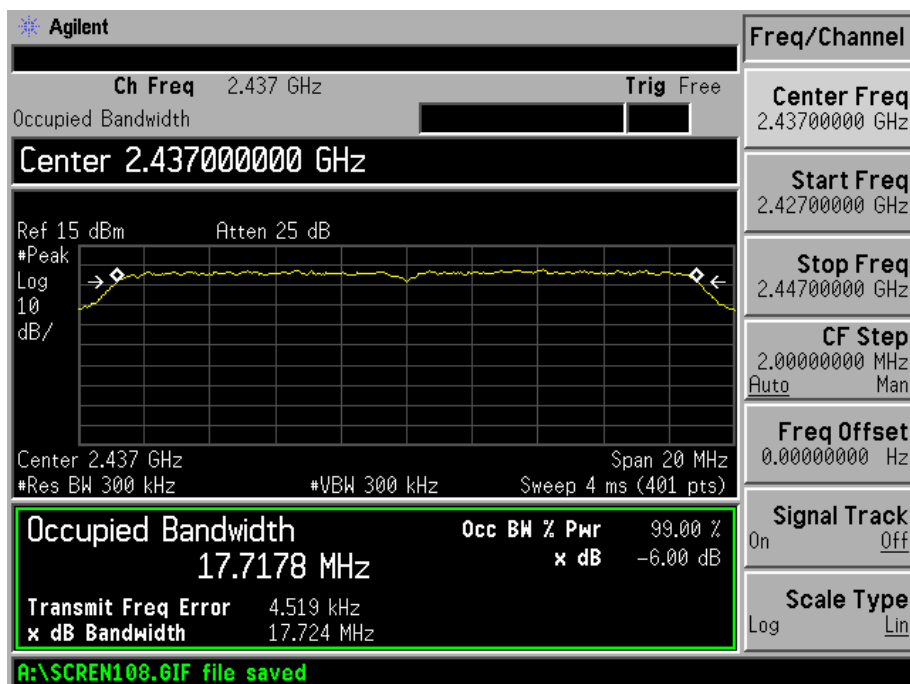

802.11n-HT20-High Channel

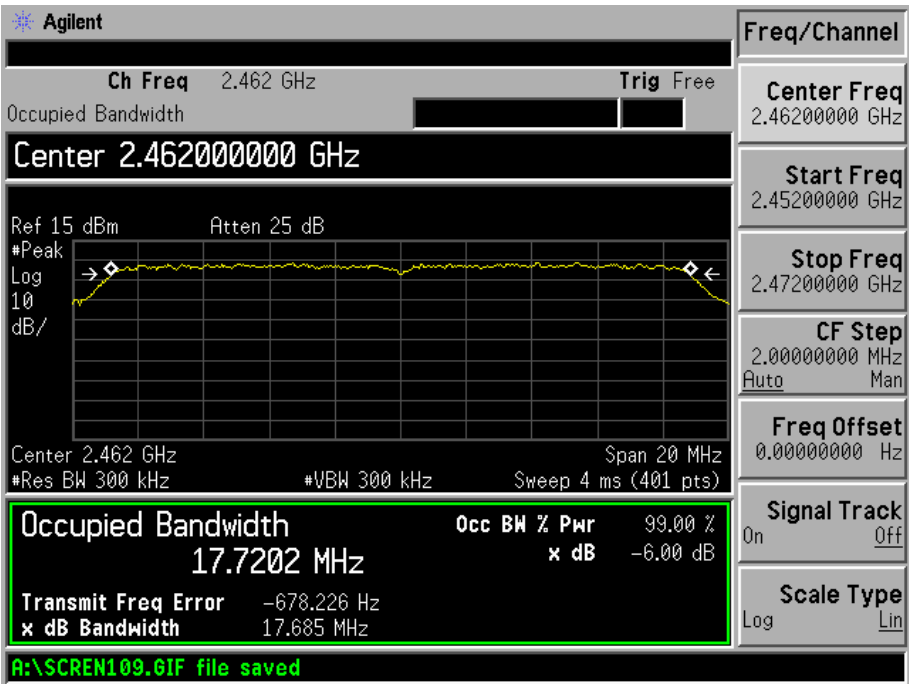

6. RF Output Power

6.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

6.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 (2012),

1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.

6.4 Environmental Conditions


Temperature:	21° C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

6.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b _1Mbps	2412	15.30	33.88	1000
	2437	15.70	37.15	1000
	2462	15.29	33.81	1000
802.11b _11Mbps	2412	15.41	34.75	1000
	2437	15.65	36.73	1000
	2462	15.51	35.56	1000
802.11g_6Mbps	2412	12.96	19.77	1000
	2437	13.66	23.23	1000
	2462	13.70	23.44	1000
802.11g_54Mbps	2412	13.15	20.65	1000
	2437	13.45	22.13	1000
	2462	13.50	22.39	1000
802.11n HT20_MCS0	2412	12.62	18.28	1000
	2437	12.06	16.07	1000
	2462	12.13	16.33	1000
802.11n HT20_MCS7	2412	12.35	17.18	1000
	2437	12.93	19.63	1000
	2462	12.25	16.79	1000

Please refer to the following test plots:


802.11b-1Mbps-Low Channel

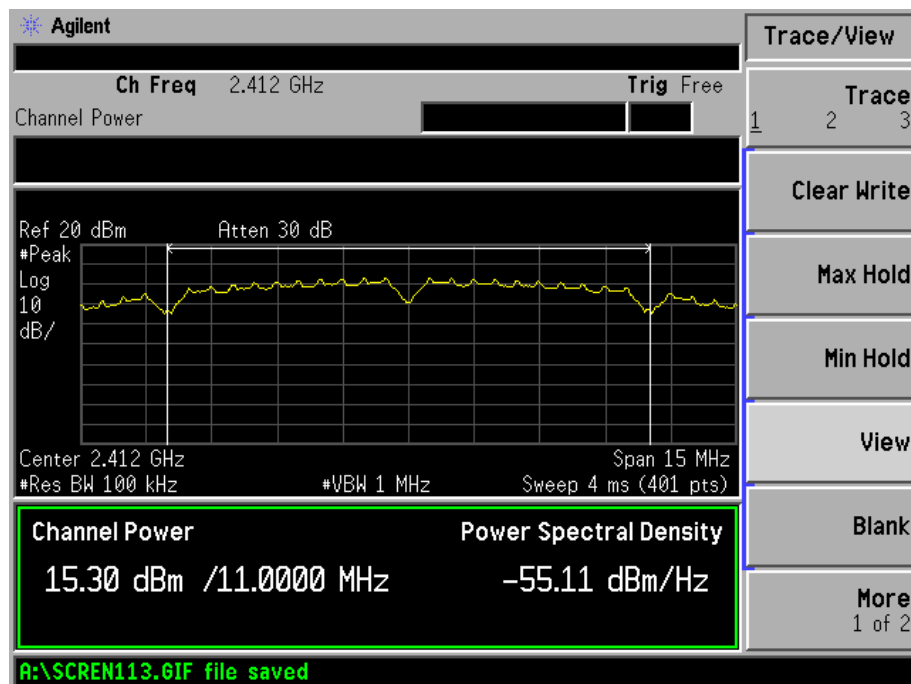


802.11b-1Mbps-Middle Channel

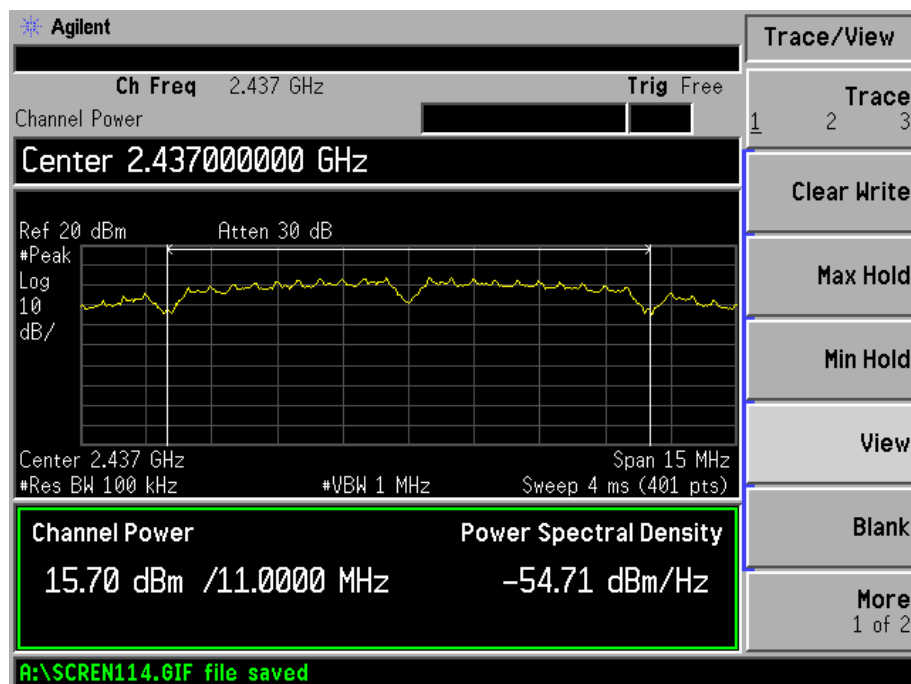


802.11b-1Mbps-High Channel

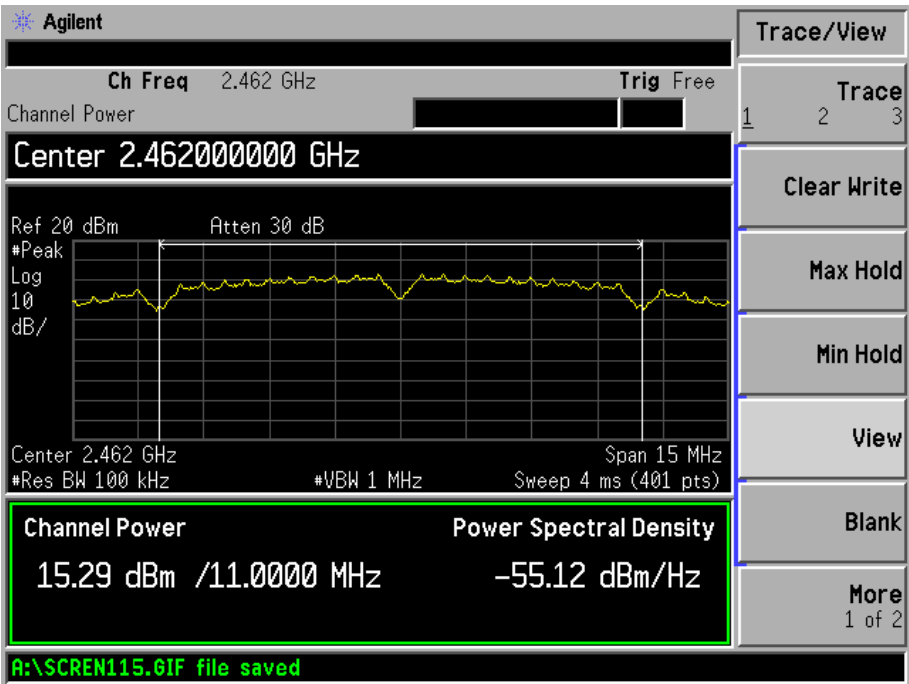


802.11b -11Mbps-Low Channel

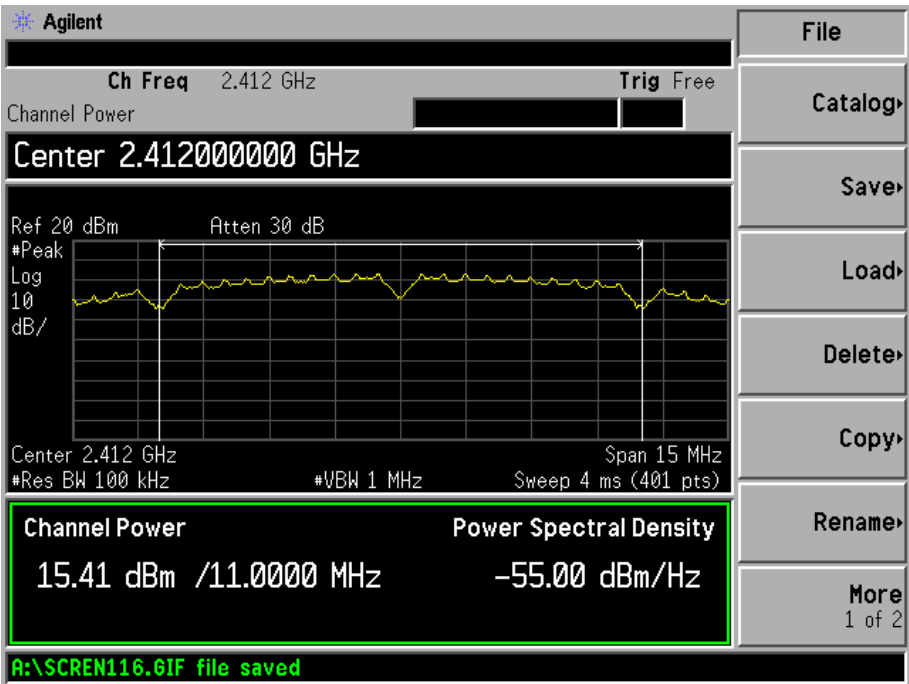


802.11b-11Mbps-Middle Channel

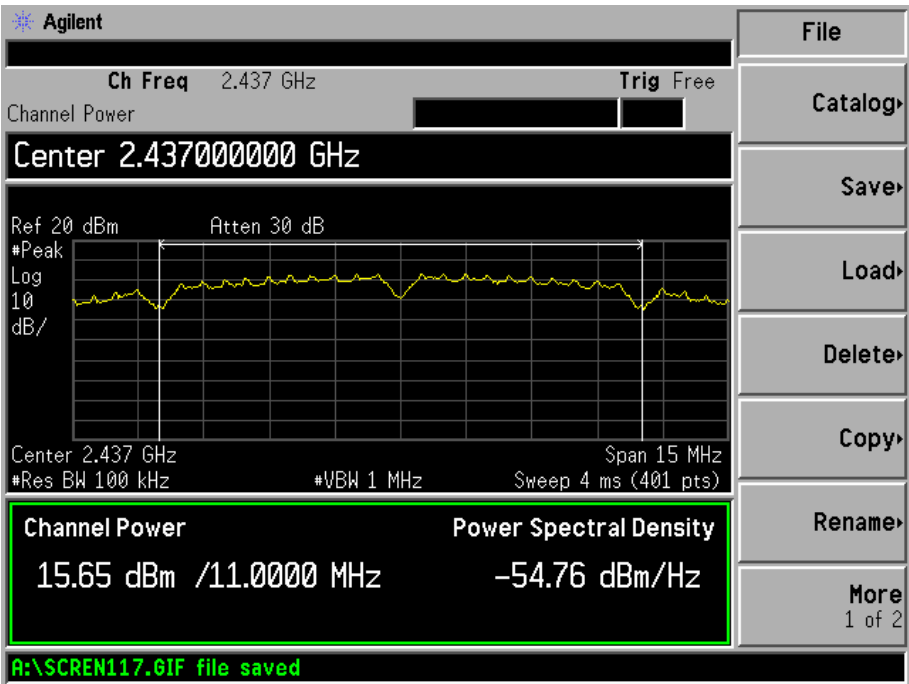


802.11b-11Mbps-High Channel

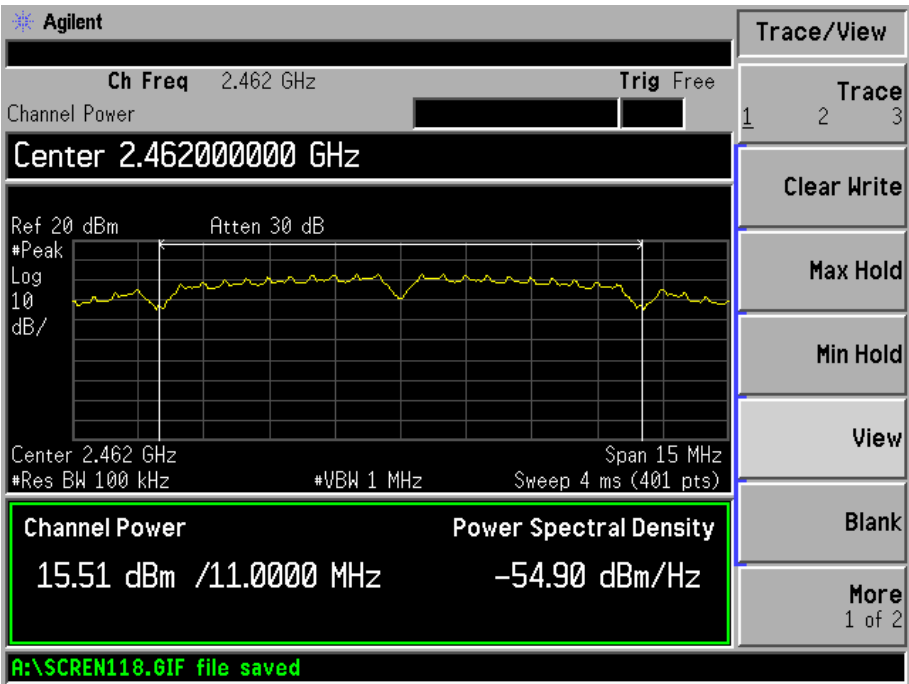


802.11g-6Mbps-Low Channel

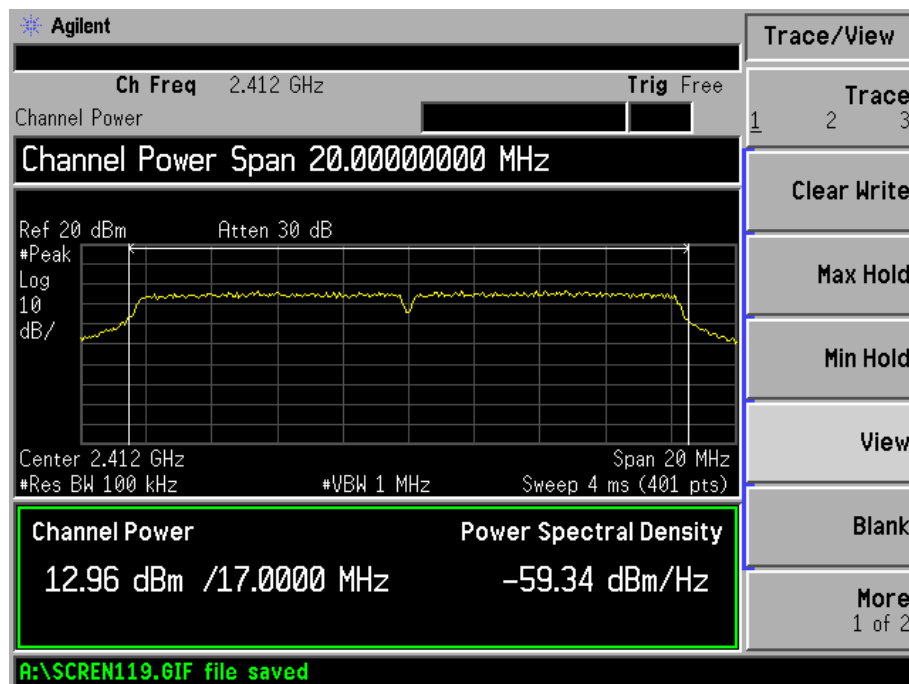


802.11g-6Mbps-Middle Channel

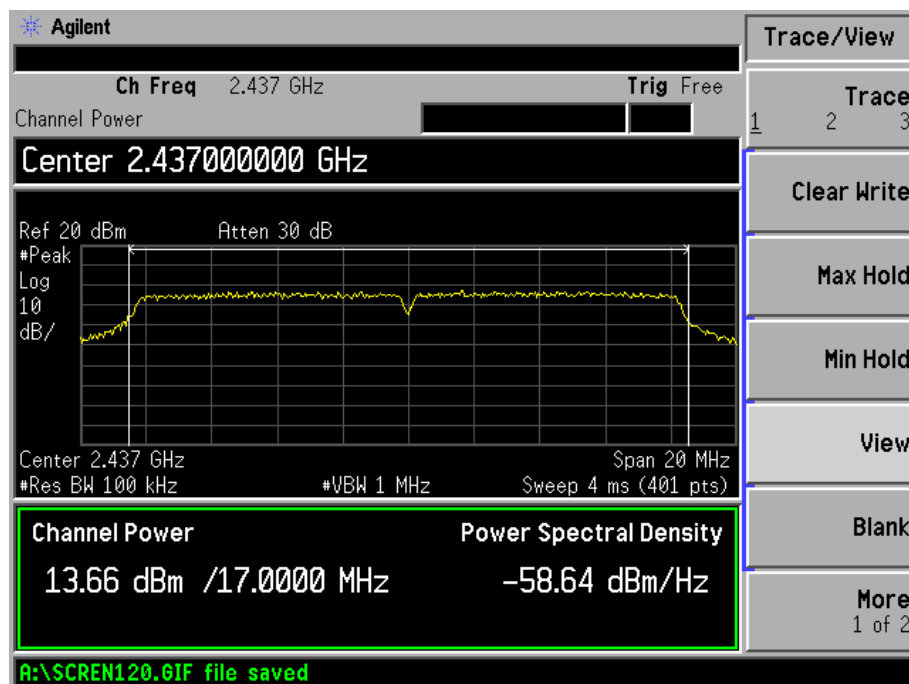


802.11g-6Mbps-High Channel

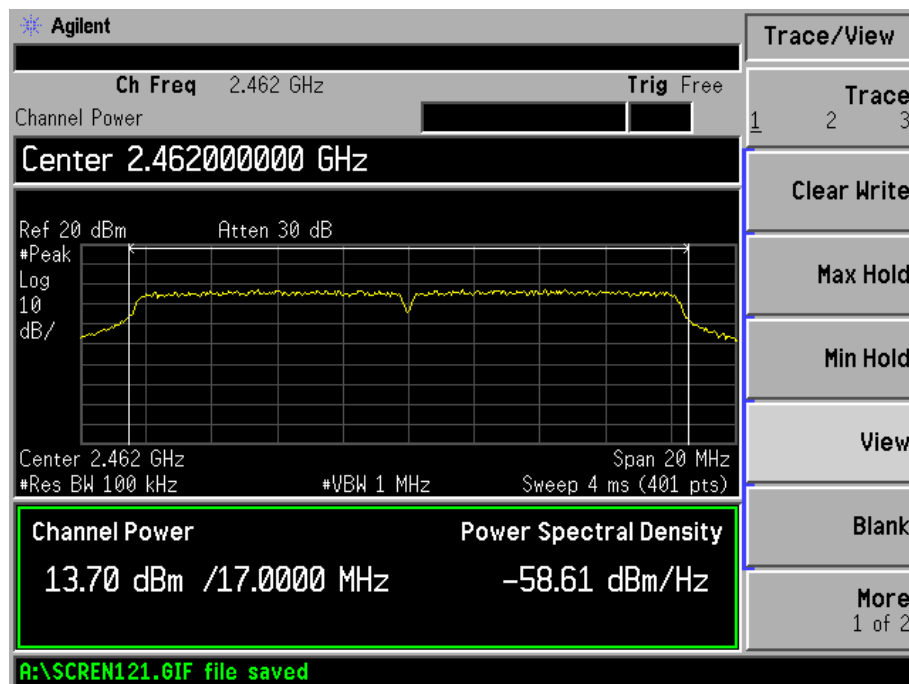


802.11g-54Mbps-Low Channel

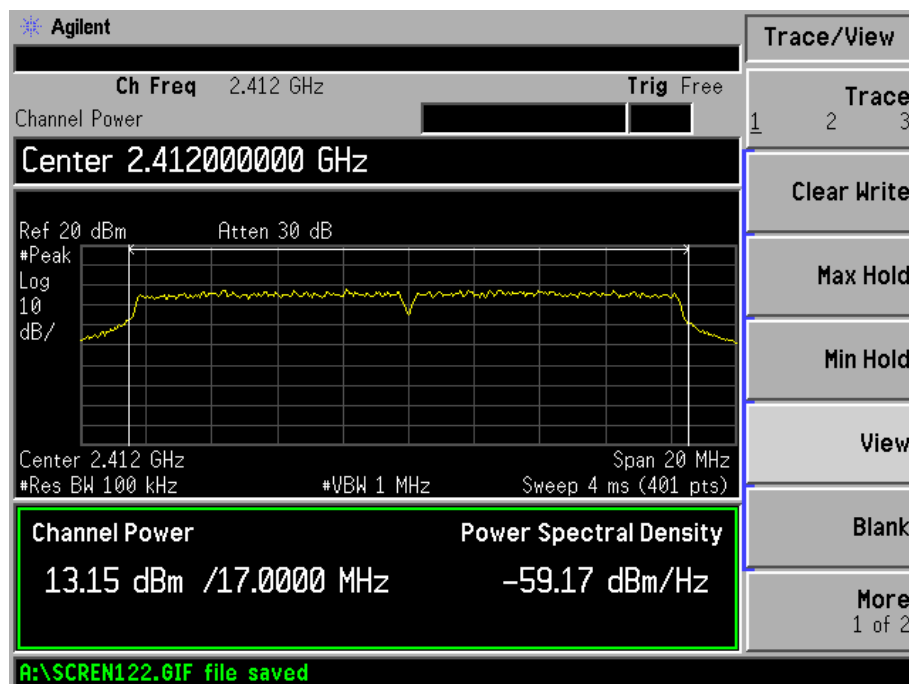


802.11g-54Mbps-Middle Channel

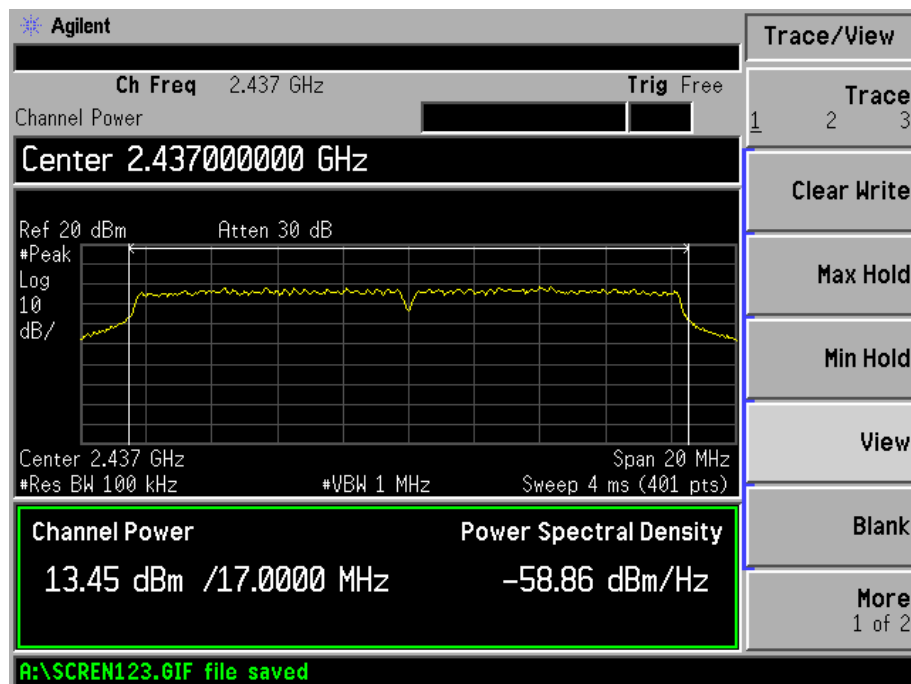


802.11g-54Mbps-High Channel

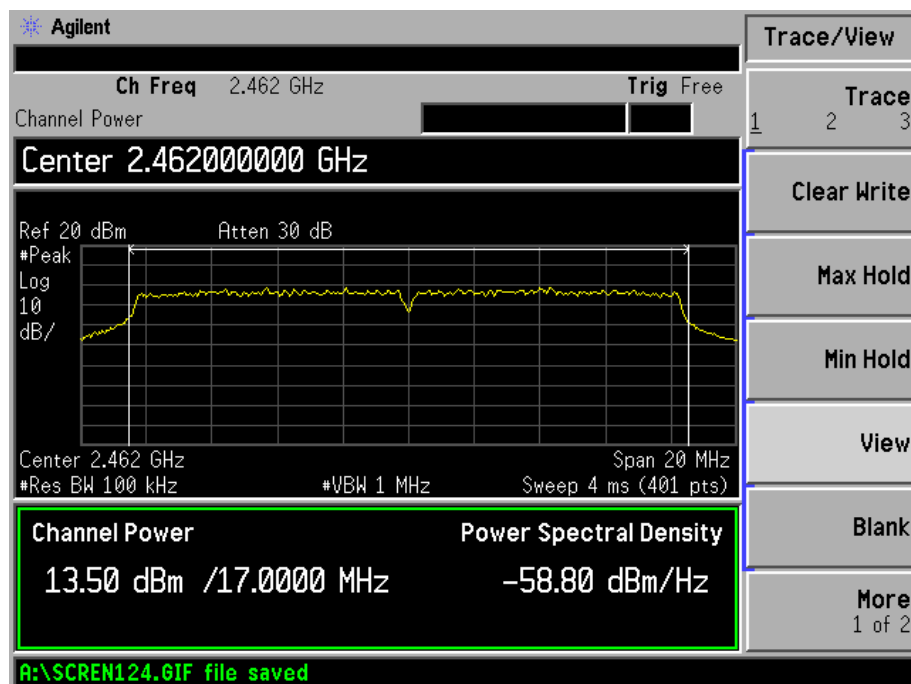


802.11n-MCS0-HT20-Low Channel

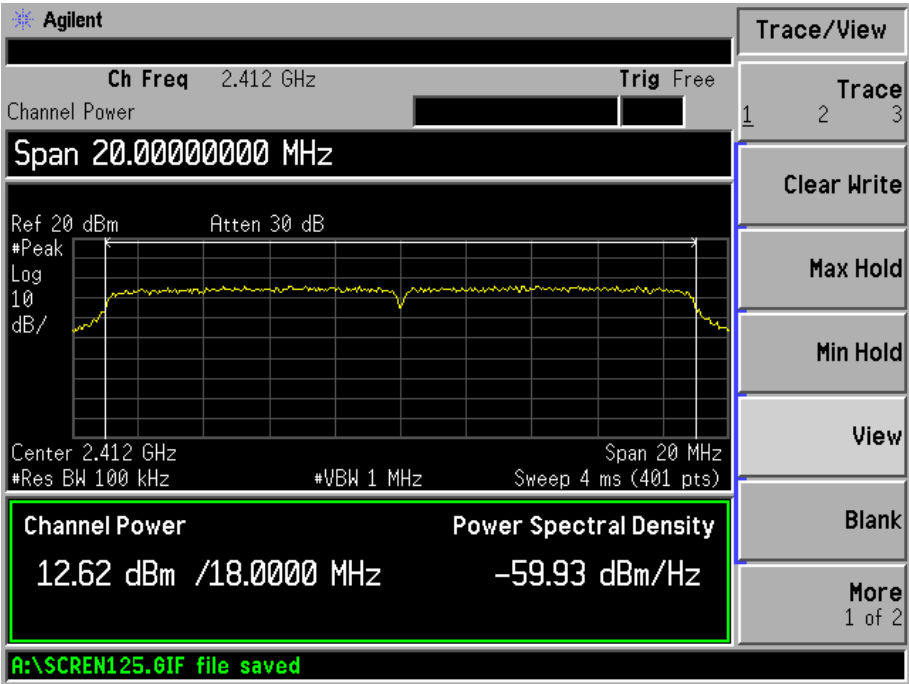


802.11n-MCS0-HT20-Middle Channel

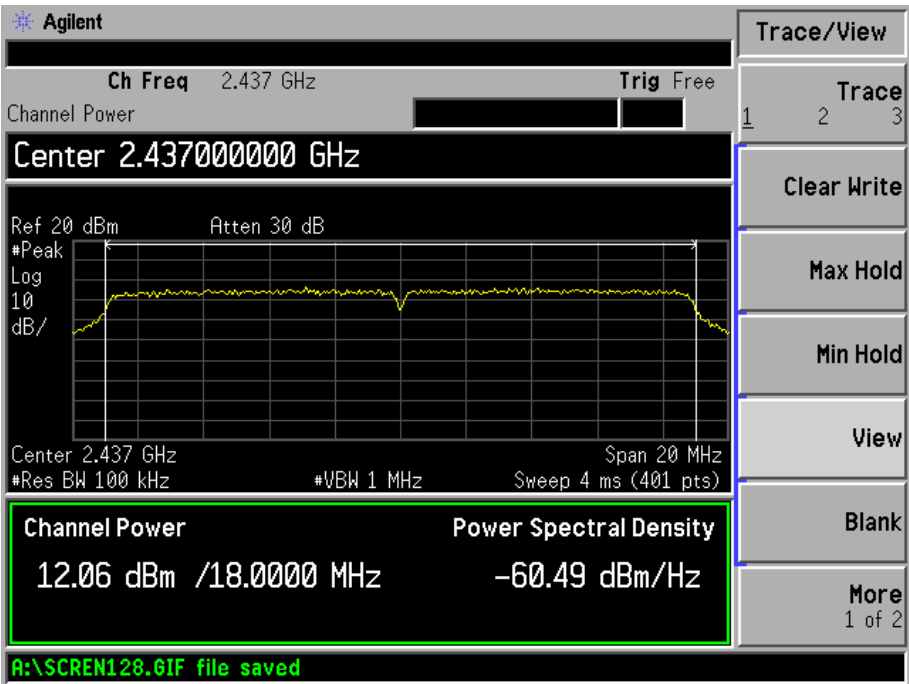


802.11n-MCS0-HT20-High Channel

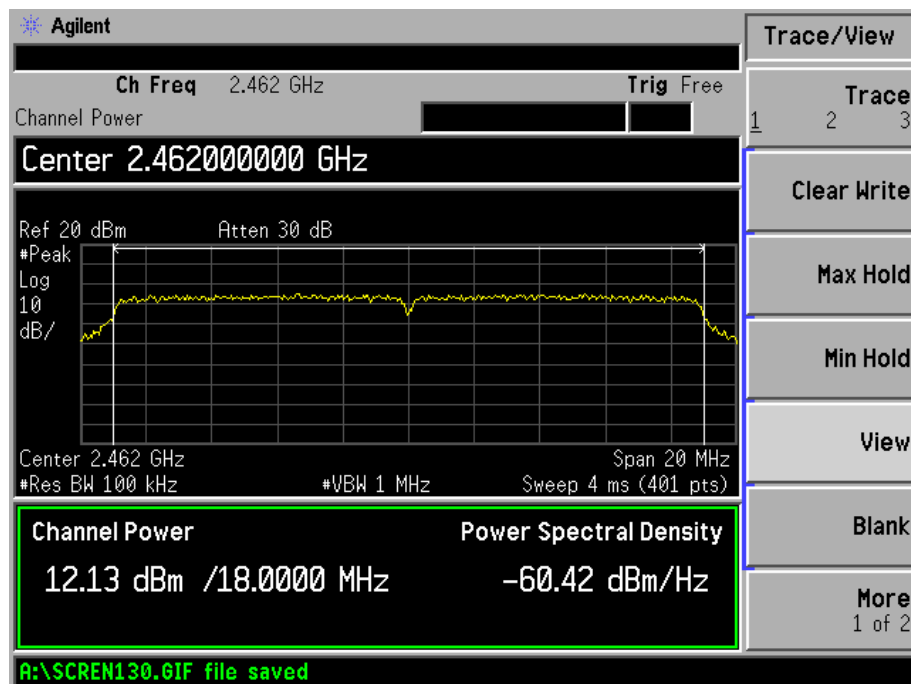


802.11n-MCS7-HT20-Low Channel

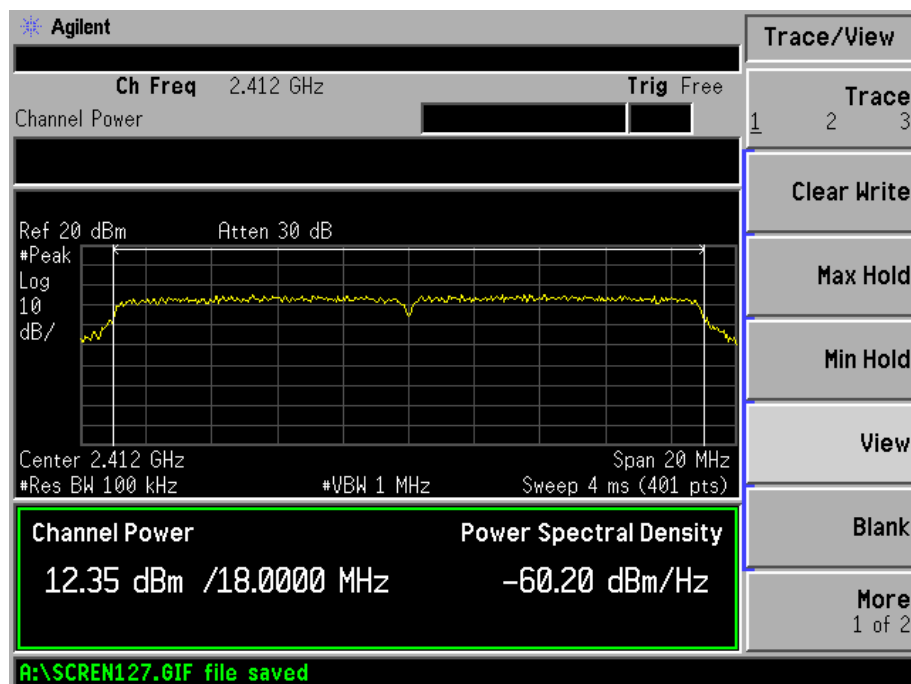

802.11n-MCS7-HT20-Middle Channel

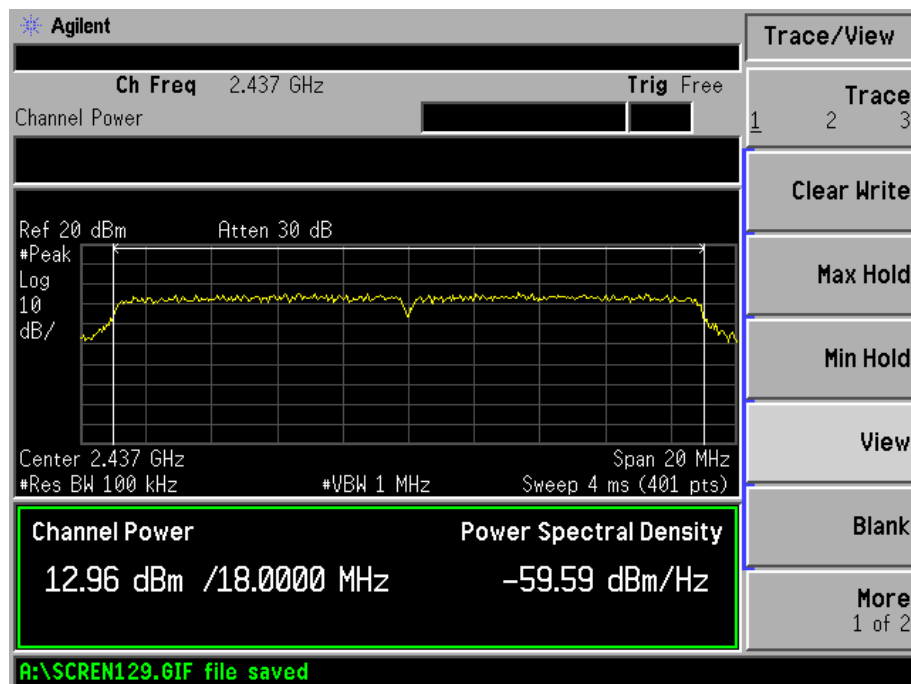

802.11n-MCS7-HT20-High Channel

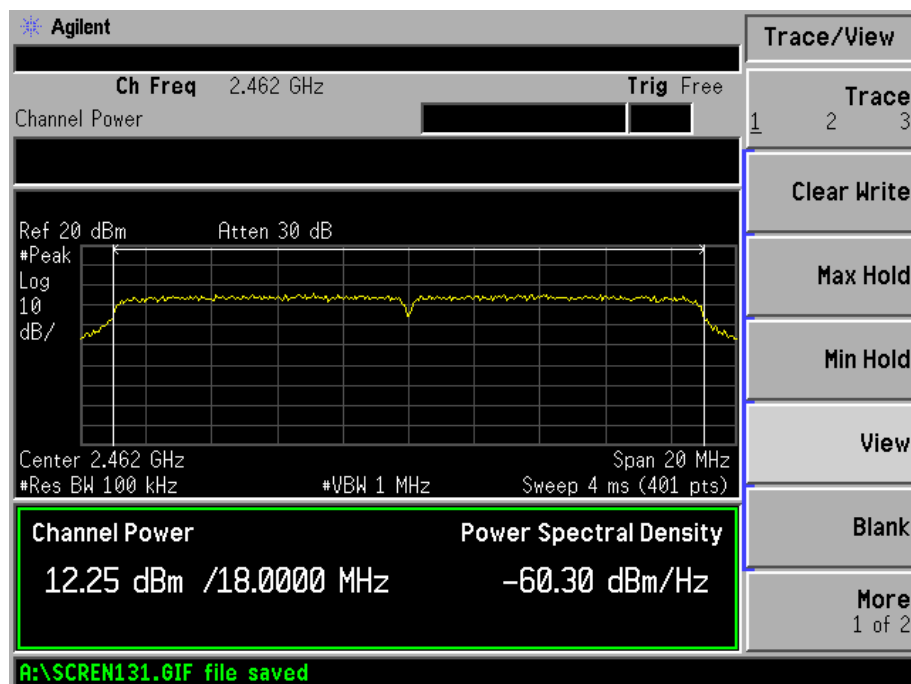

7. Field Strength of Spurious Emissions

7.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

7.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

7.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Horn Antenna	ETS	3116B	00088203	2012-02-25	2013-02-24
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2012-02-25	2013-02-24

7.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

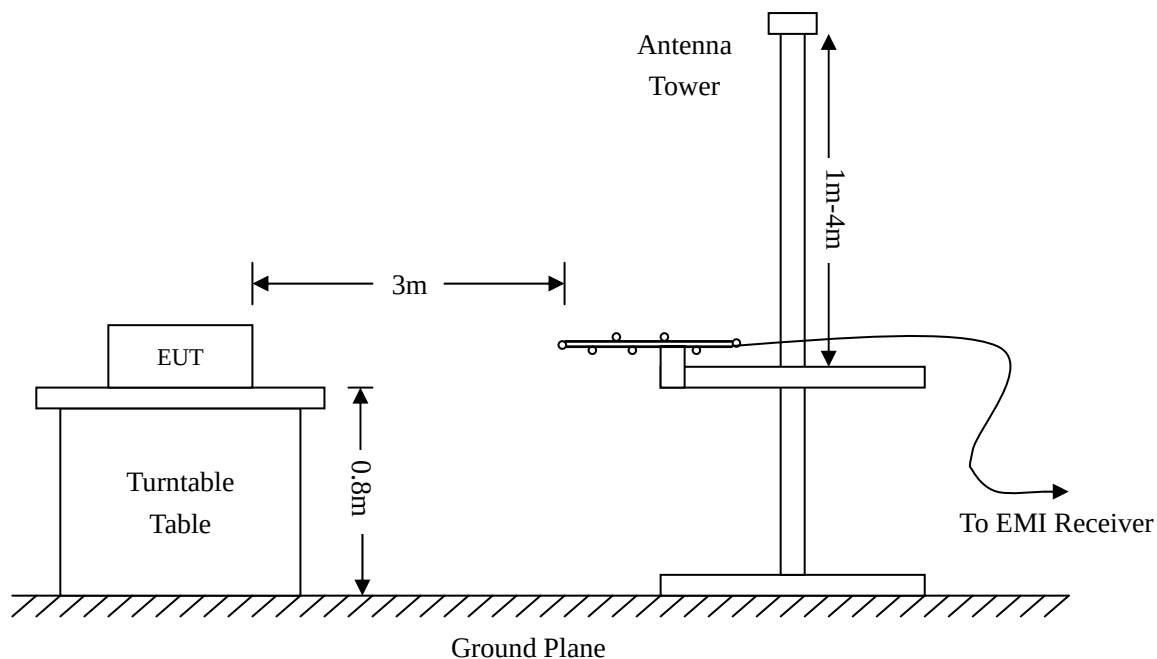

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

7.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

7.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

-2.24 dB μ V at 301.4224 MHz in the Vertical polarization for 802.11n-HT20 Mode Middle Channel, 9kHz to 25 GHz, 3 Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT:POS terminal

Tested Model:DFW377

Operating Condition:802.11b Transmitting Low Channel-2412MHz


Comment:

Test Specification:Horizontal

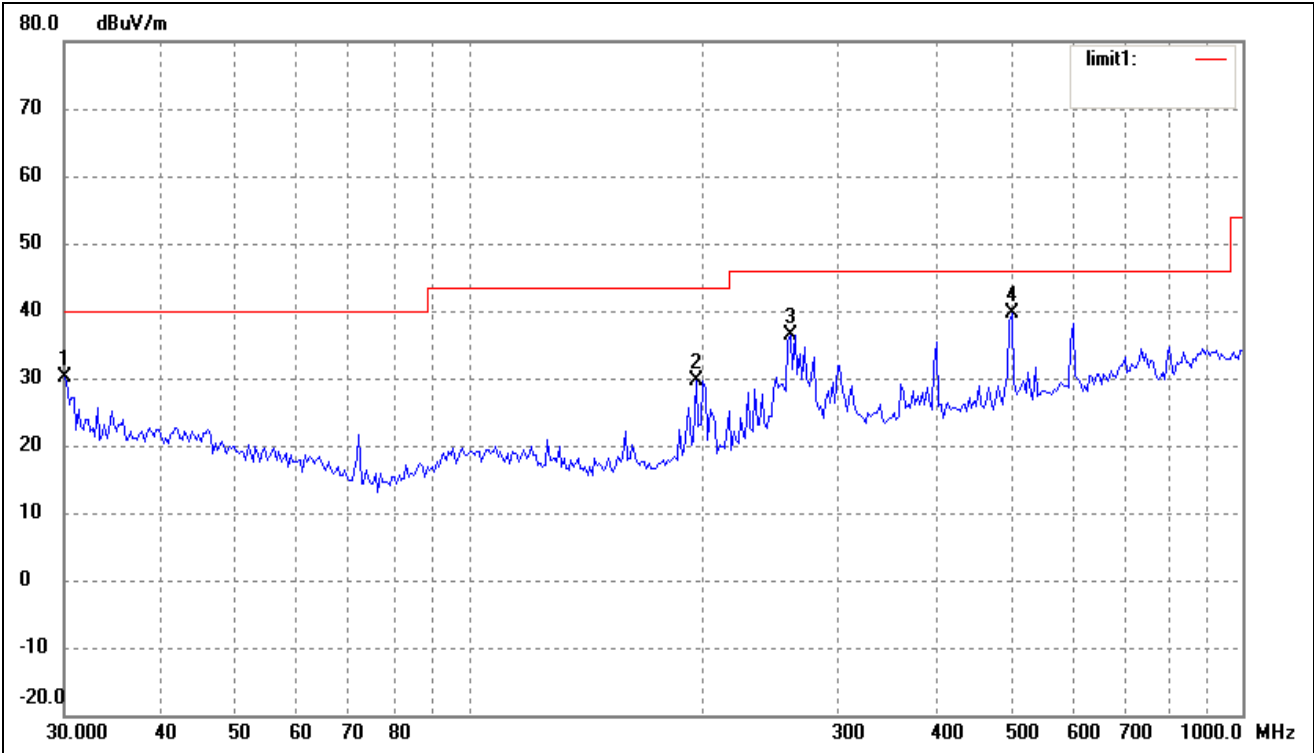

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	21.98	8.04	30.02	40.00	-9.98	224	100	peak
2	196.5098	25.16	4.49	29.65	43.50	-13.85	136	200	peak
3	260.1444	28.75	7.72	36.47	46.00	-9.53	258	200	peak
4	502.9395	27.26	12.30	39.56	46.00	-6.44	114	200	peak

Test Specification: Vertical

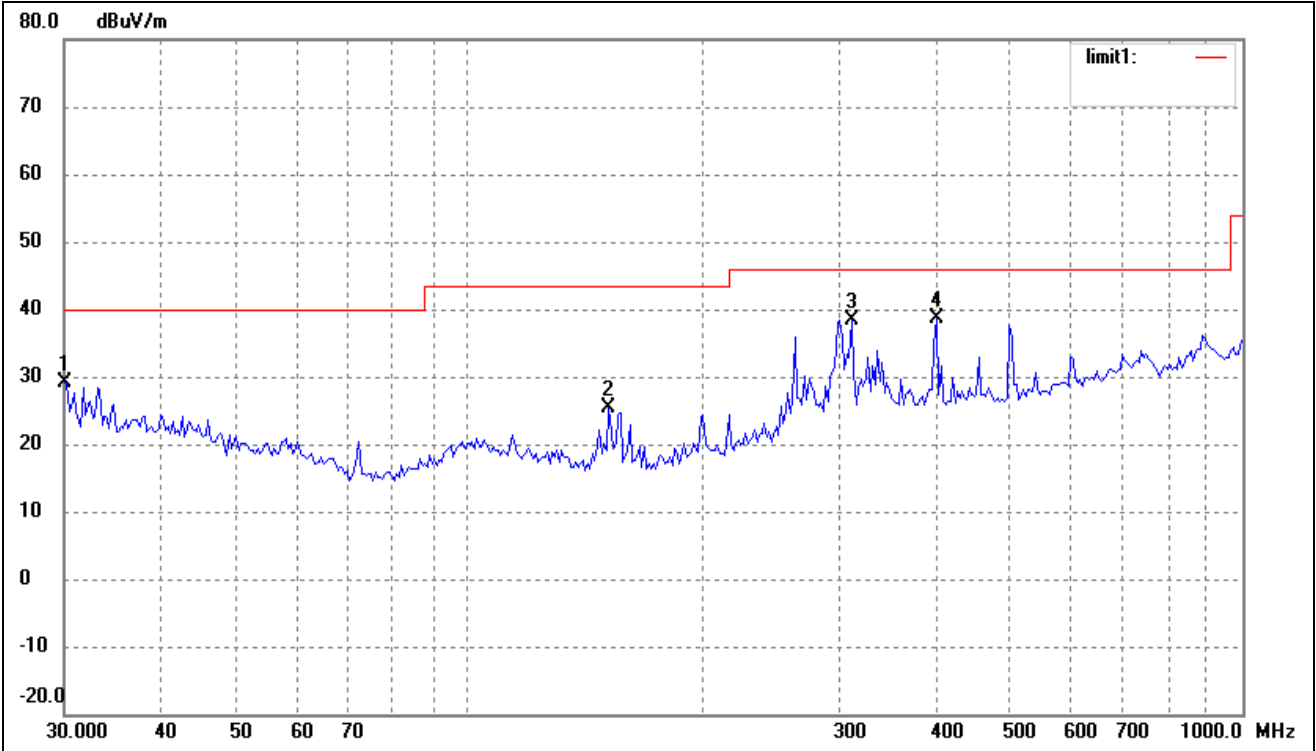


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	21.17	8.04	29.21	40.00	-10.79	360	100	peak
2	151.5972	21.88	3.57	25.45	43.50	-18.05	226	100	peak
3	312.1794	27.99	10.36	38.35	46.00	-7.65	348	100	peak
4	401.8385	27.27	11.47	38.74	46.00	-7.26	116	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment:

Test Specification: Horizontal

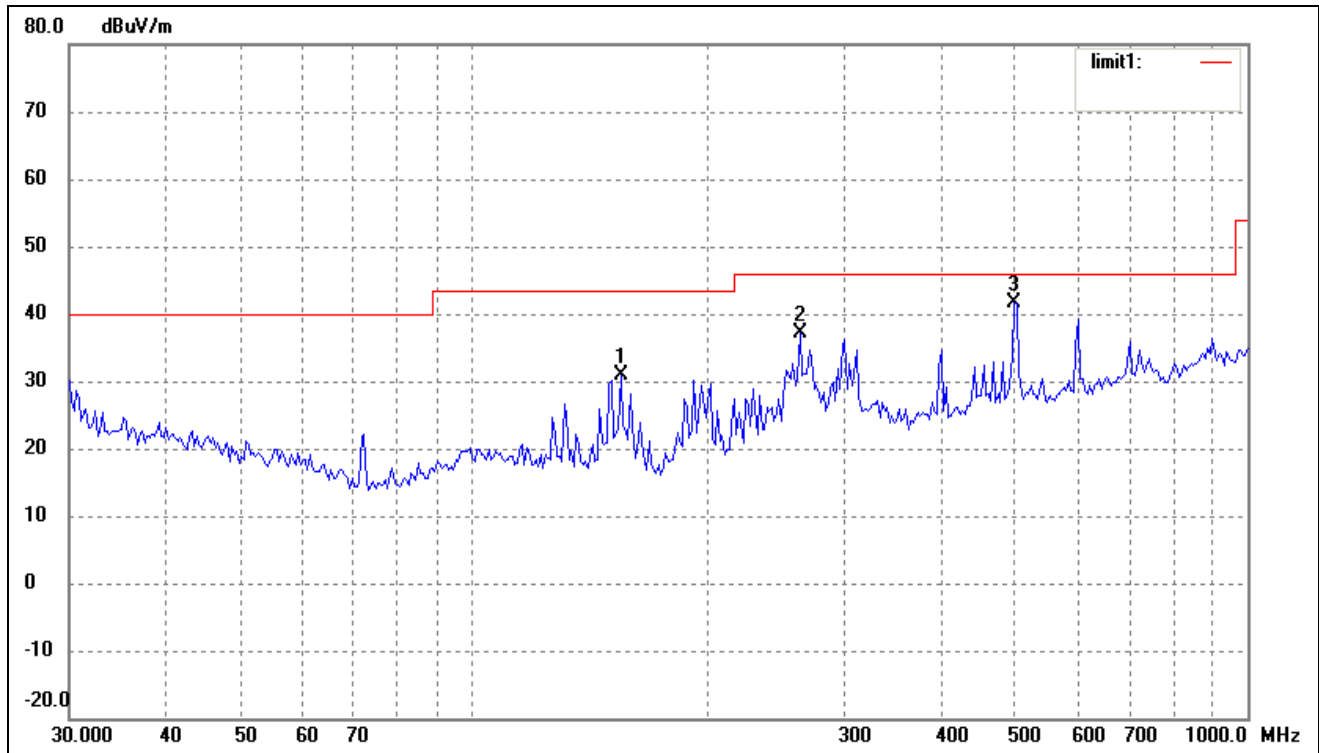

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	154.8205	27.37	3.59	30.96	43.50	-12.54	345	200	peak
2	263.8190	29.08	8.00	37.08	46.00	-8.92	360	100	peak
3	499.4247	29.53	12.18	41.71	46.00	-4.29	116	100	QP

Test Specification: Vertical

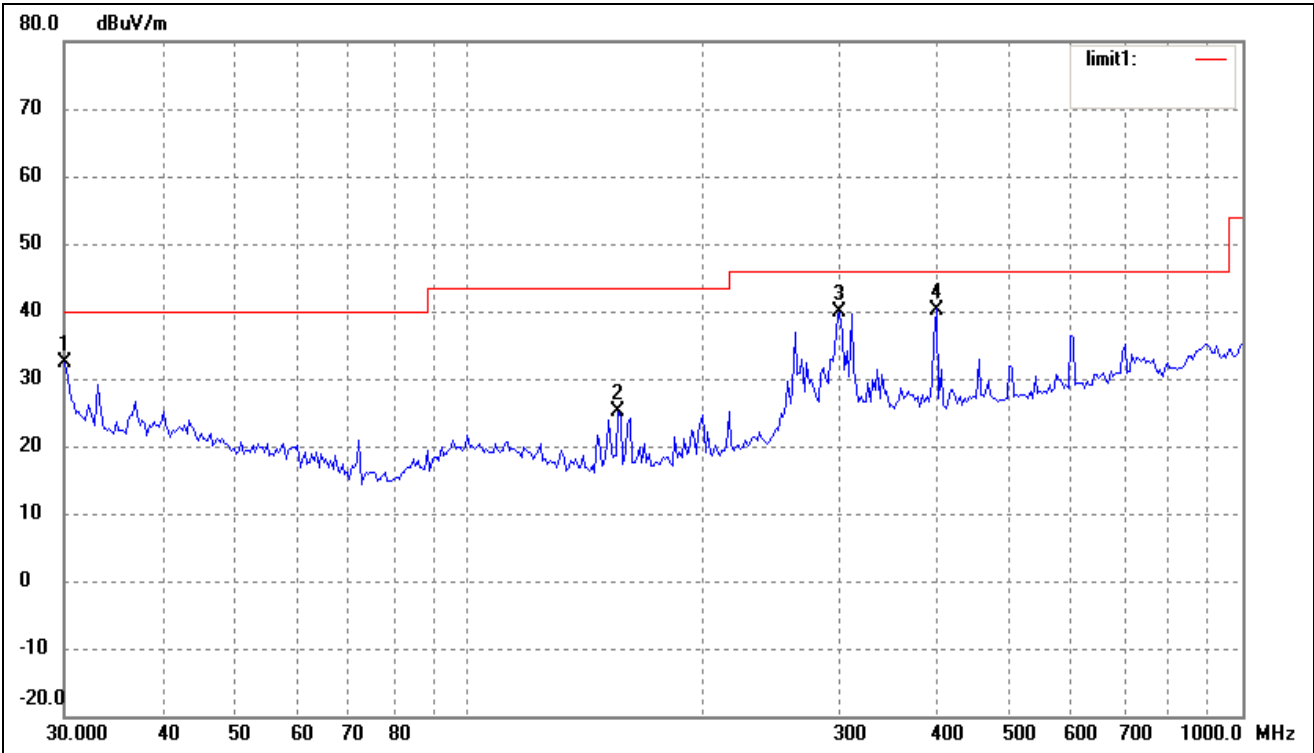


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	24.23	8.04	32.27	40.00	-7.73	360	100	peak
2	155.9101	21.47	3.61	25.08	43.50	-18.42	360	100	peak
3	301.4224	29.77	10.20	39.97	46.00	-6.03	297	100	peak
4	401.8385	28.78	11.47	40.25	46.00	-5.75	180	100	QP

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment:

Test Specification: Horizontal

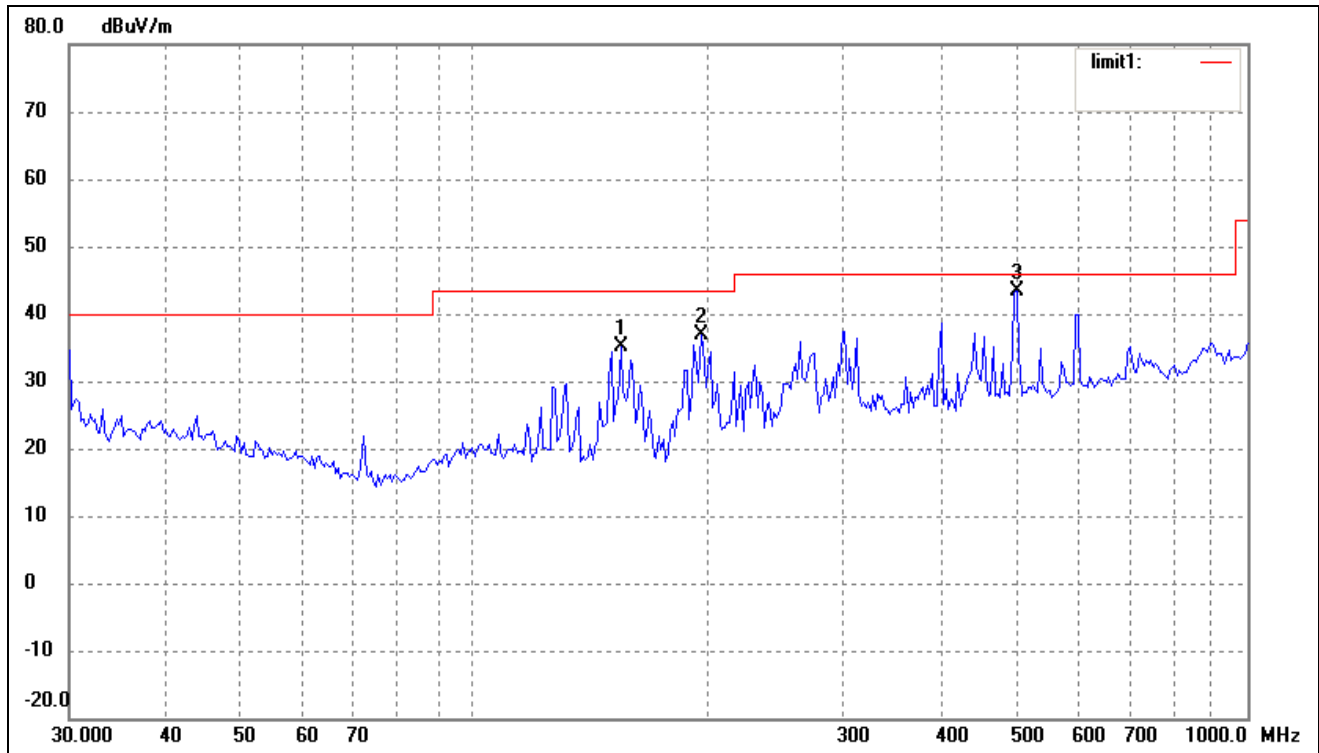

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	154.8205	31.63	3.59	35.22	43.50	-8.28	164	100	peak
2	196.5098	32.51	4.49	37.00	43.50	-6.50	225	200	peak
3	502.9395	31.02	12.30	43.32	46.00	-2.68	109	100	QP

Test Specification: Vertical

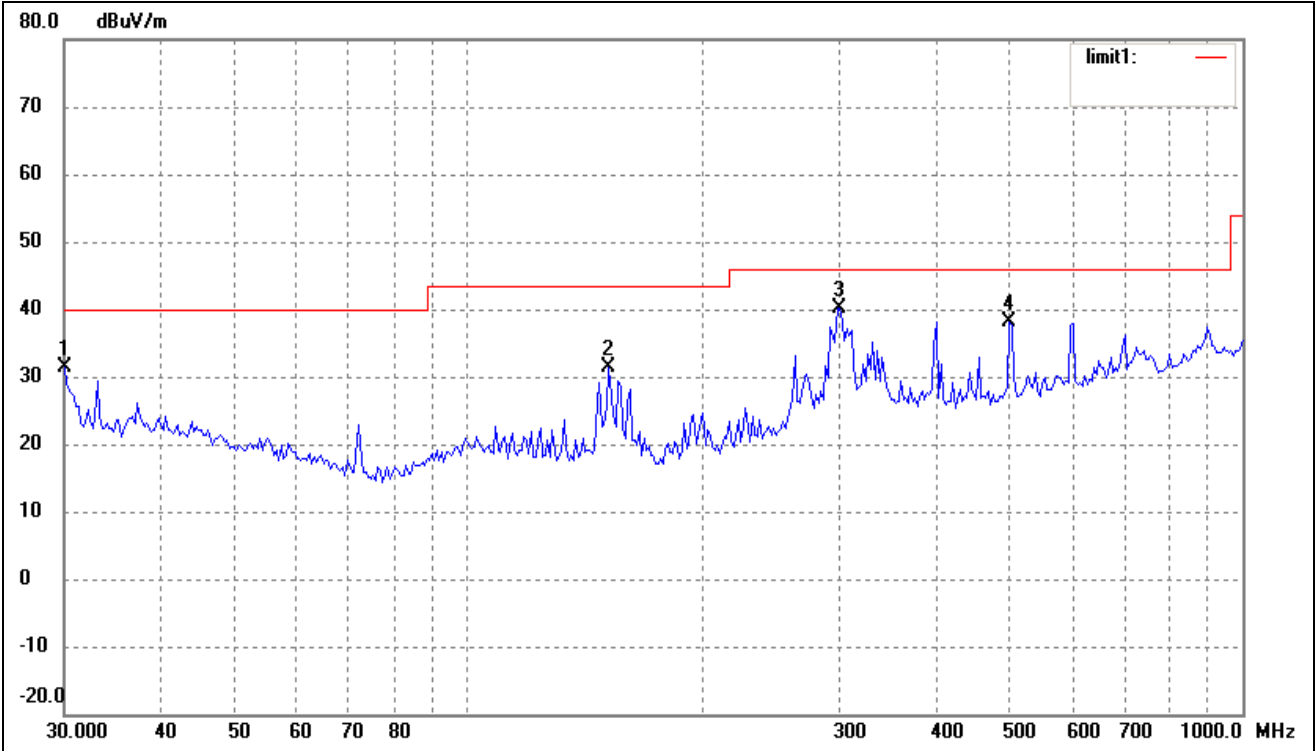

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	23.23	8.04	31.27	40.00	-8.73	360	100	peak
2	151.5972	27.79	3.57	31.36	43.50	-12.14	124	100	peak
3	301.4224	30.01	10.20	40.21	46.00	-5.79	158	100	QP
4	499.4247	25.93	12.18	38.11	46.00	-7.89	116	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT:POS terminal


Tested Model:DFW377

Operating Condition:802.11g Transmitting Low Channel-2412MHz

Comment:


Test Specification:

Horizontal

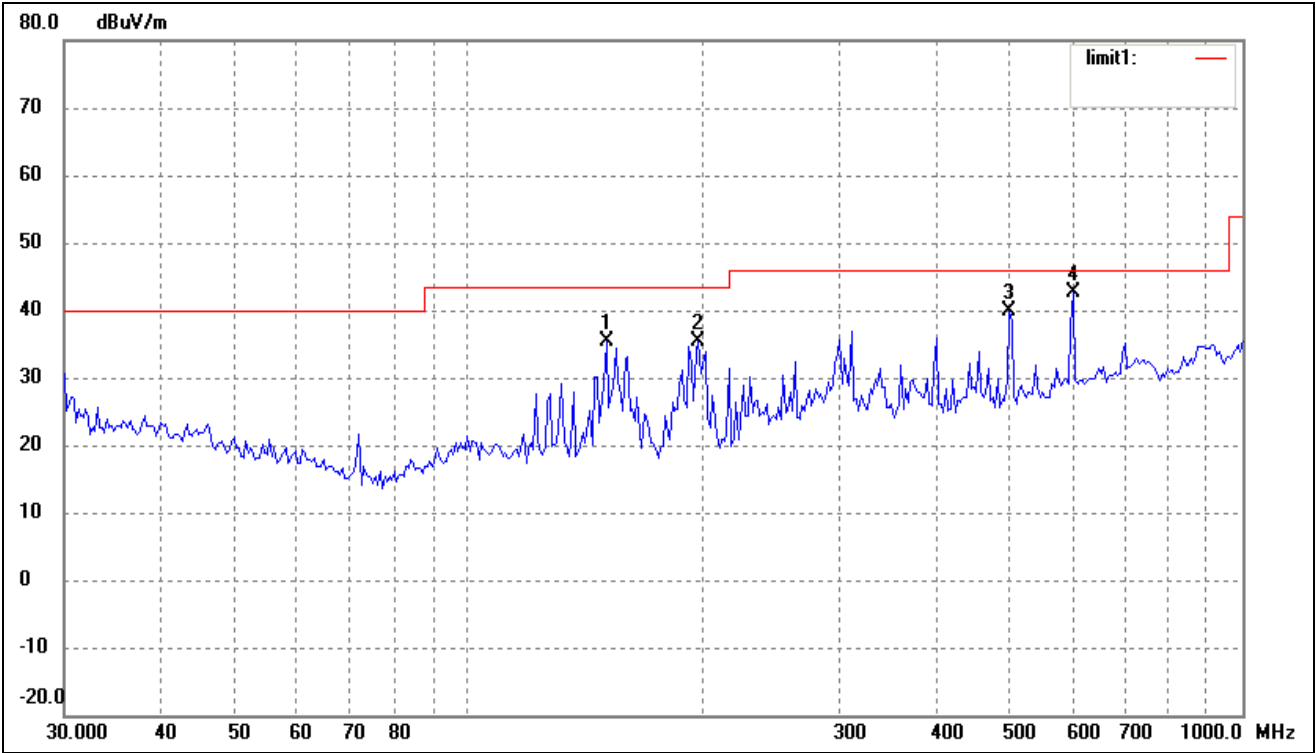

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	150.5378	31.76	3.55	35.31	43.50	-8.19	224	100	peak
2	197.8928	30.93	4.55	35.48	43.50	-8.02	52	100	peak
3	499.4247	27.77	12.18	39.95	46.00	-6.05	167	100	peak
4	603.5392	27.94	14.62	42.56	46.00	-3.44	360	100	QP

Test Specification: Vertical

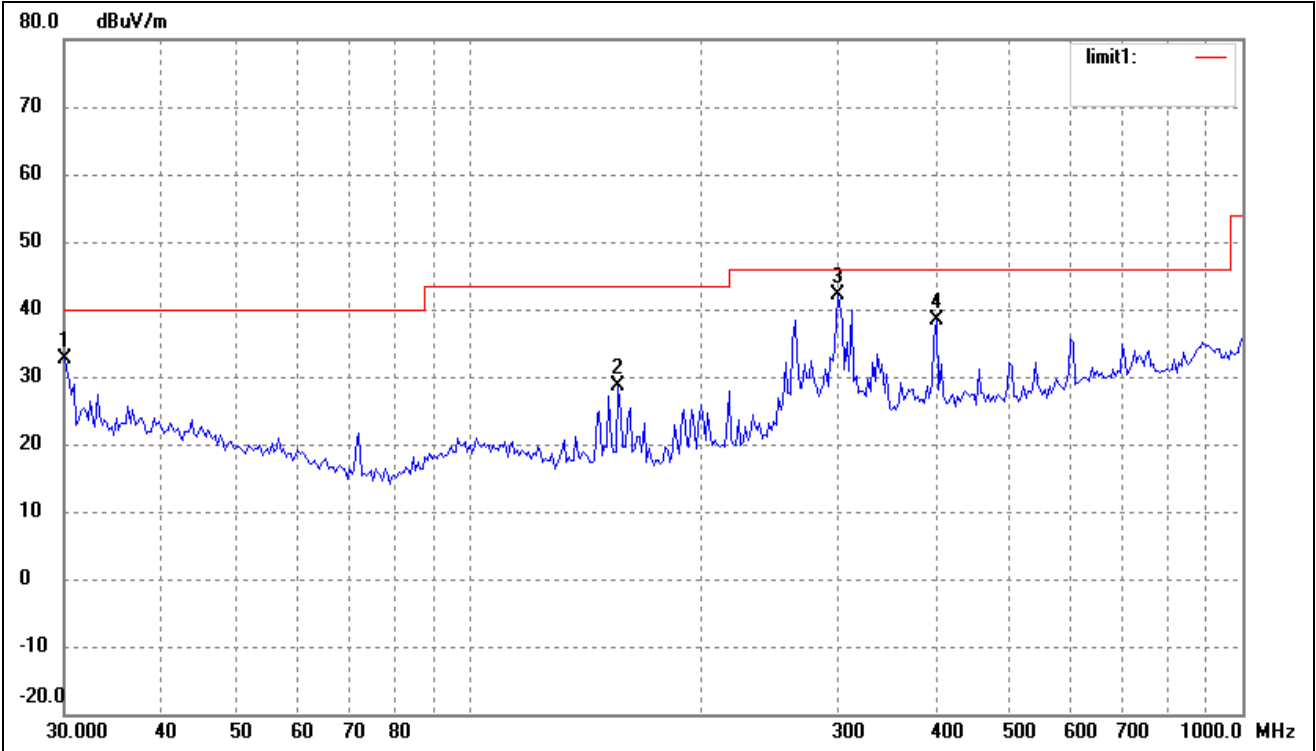


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	24.66	8.04	32.70	40.00	-7.30	341	100	peak
2	155.9101	25.04	3.61	28.65	43.50	-14.85	113	100	peak
3	299.3158	32.05	10.15	42.20	46.00	-3.80	225	100	QP
4	401.8385	26.91	11.47	38.38	46.00	-7.62	16	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment:

Test Specification: Horizontal

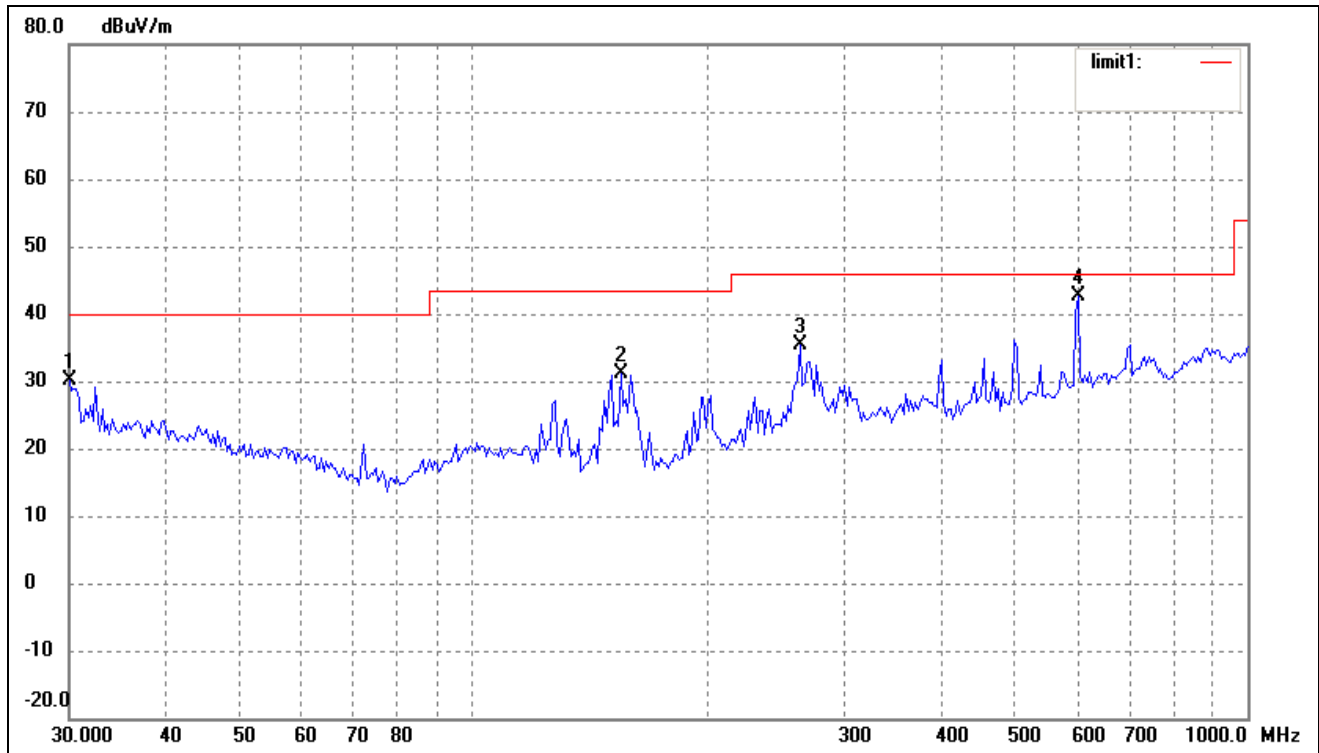

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.0000	22.05	8.04	30.09	40.00	-9.91	360	100	peak
2	154.8205	27.55	3.59	31.14	43.50	-12.36	360	200	peak
3	263.8190	27.31	8.00	35.31	46.00	-10.69	117	100	peak
4	603.5392	27.97	14.62	42.59	46.00	-3.41	25	100	QP

Test Specification: Vertical

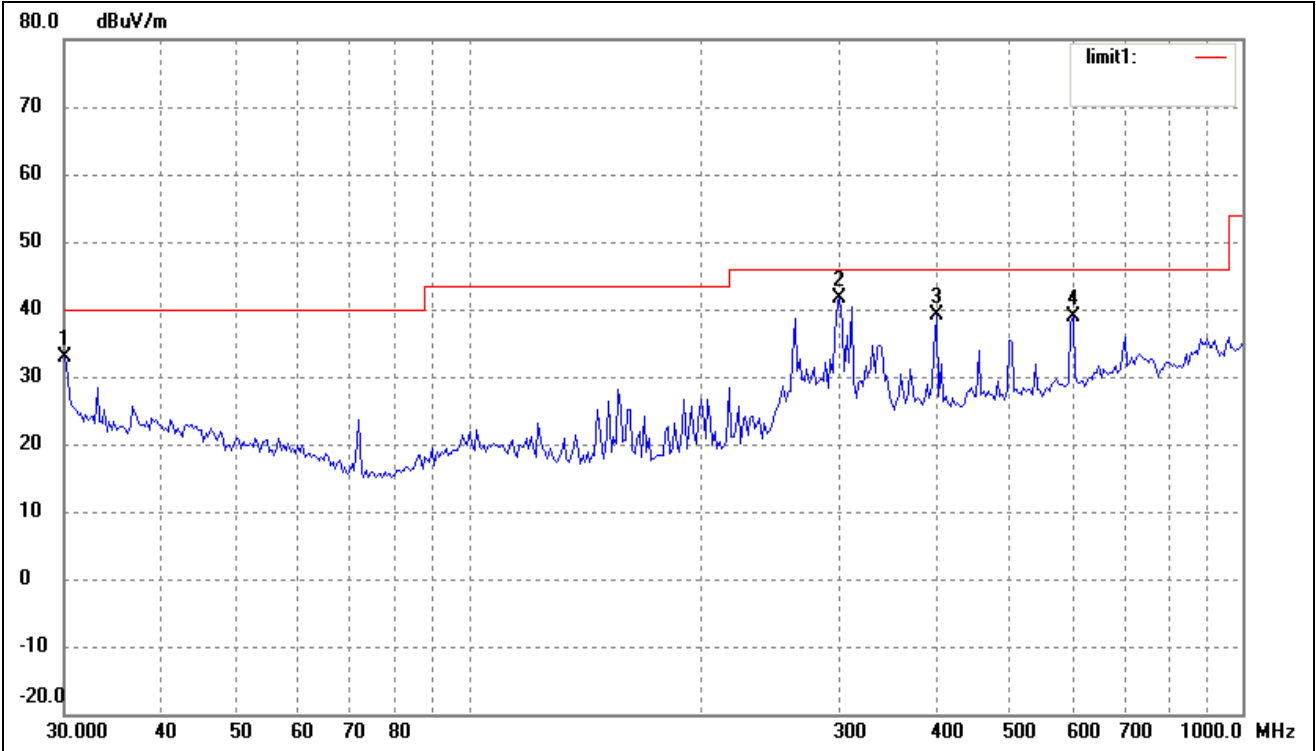


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	24.95	8.04	32.99	40.00	-7.01	340	100	peak
2	301.4224	31.34	10.20	41.54	46.00	-4.46	116	100	QP
3	401.8385	27.78	11.47	39.25	46.00	-6.75	69	100	peak
4	603.5392	24.33	14.62	38.95	46.00	-7.05	118	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment:

Test Specification: Horizontal

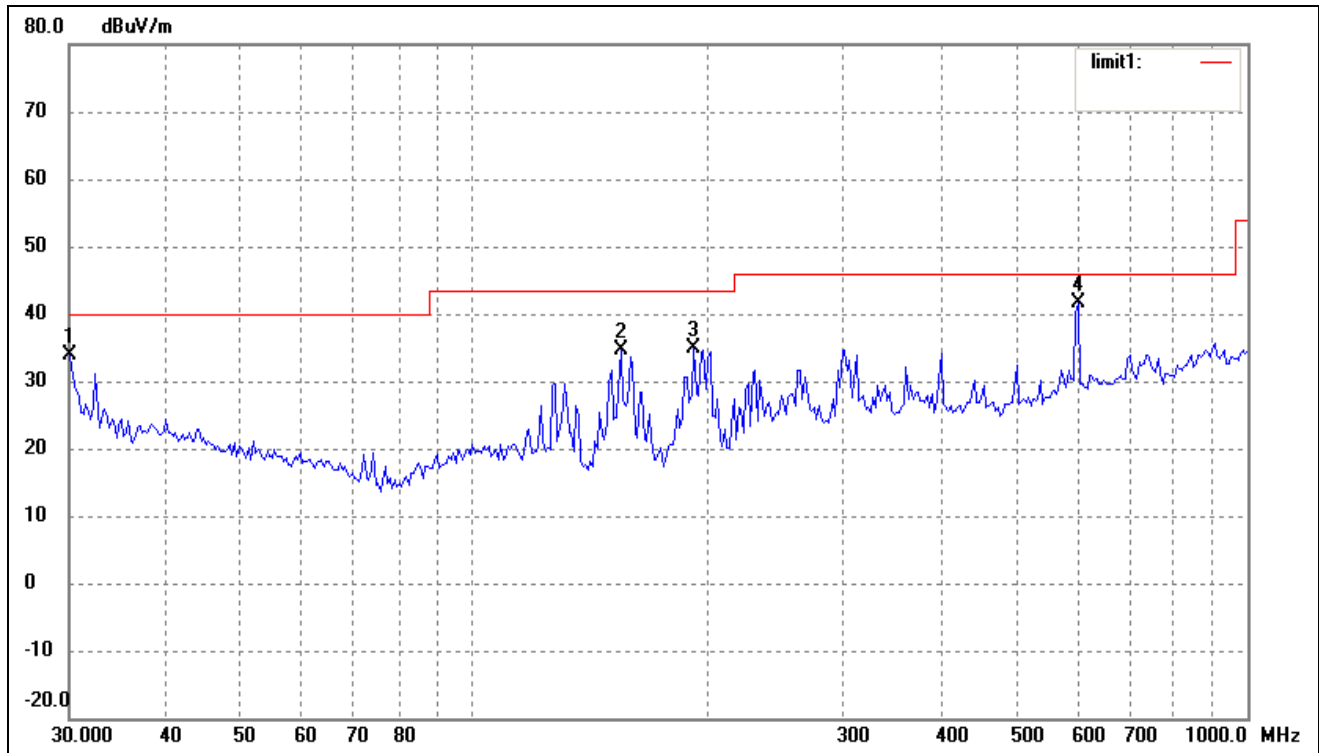

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.0000	25.82	8.04	33.86	40.00	-6.14	360	100	peak
2	154.8205	31.08	3.59	34.67	43.50	-8.83	223	100	peak
3	192.4186	30.62	4.31	34.93	43.50	-8.57	180	100	peak
4	603.5392	27.10	14.62	41.72	46.00	-4.28	89	100	peak

Test Specification: Vertical

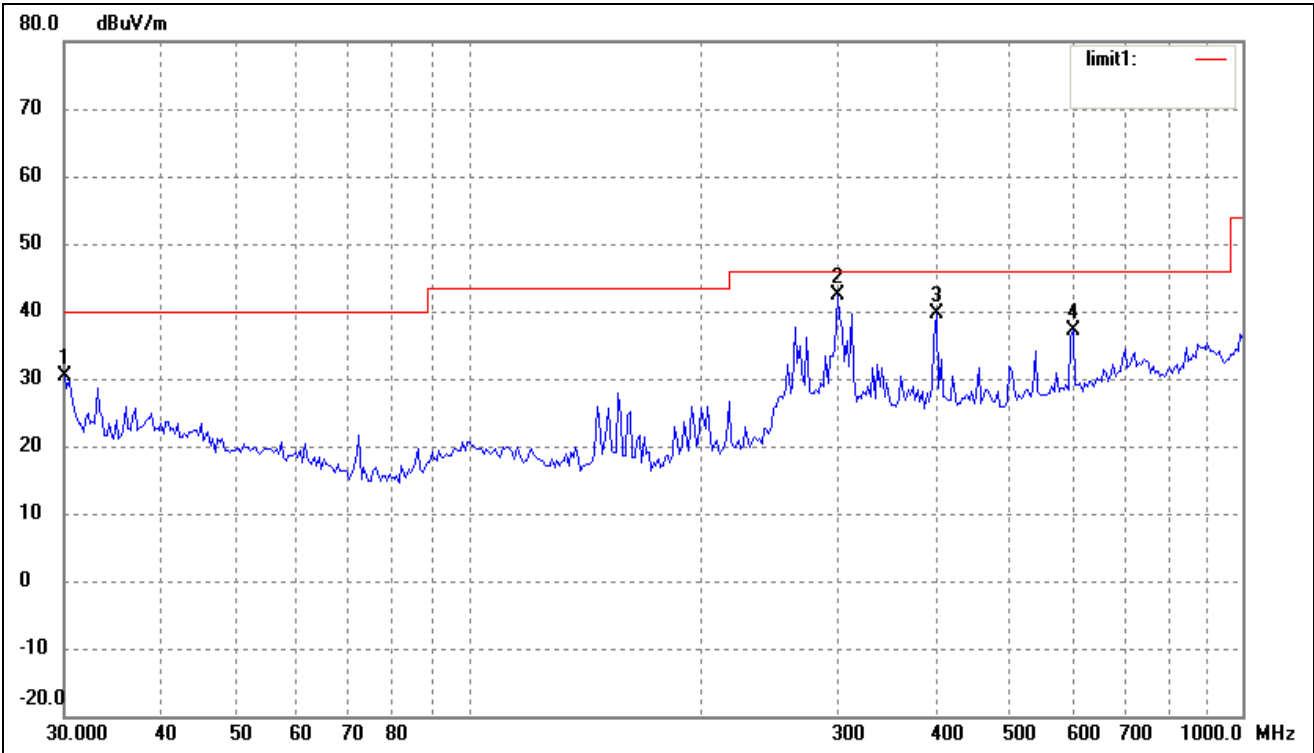

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	22.27	8.04	30.31	40.00	-9.69	360	100	peak
2	299.3158	32.23	10.15	42.38	46.00	-3.62	225	100	QP
3	401.8385	28.07	11.47	39.54	46.00	-6.46	164	100	peak
4	603.5392	22.48	14.62	37.10	46.00	-8.90	50	100	peak

Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT:POS terminal


Tested Model:DFW377

Operating Condition:802.11n-HT20 Transmitting Low Channel-2412MHz

Comment:


Test Specification:

Horizontal

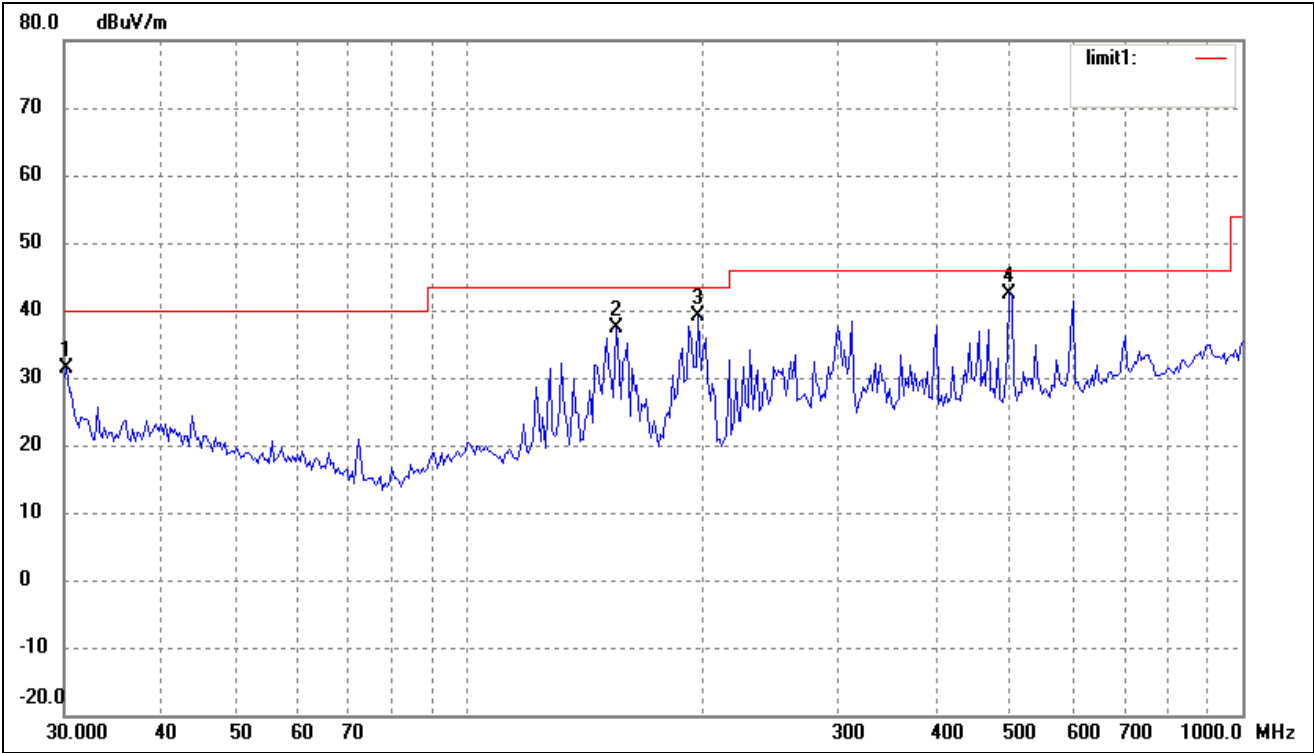

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.2111	23.38	8.07	31.45	40.00	-8.55	360	100	peak
2	154.8205	33.74	3.59	37.33	43.50	-6.17	125	100	peak
3	197.8928	34.57	4.55	39.12	43.50	-4.38	80	100	QP
4	499.4247	30.22	12.18	42.40	46.00	-3.60	194	200	peak

Test Specification: Vertical

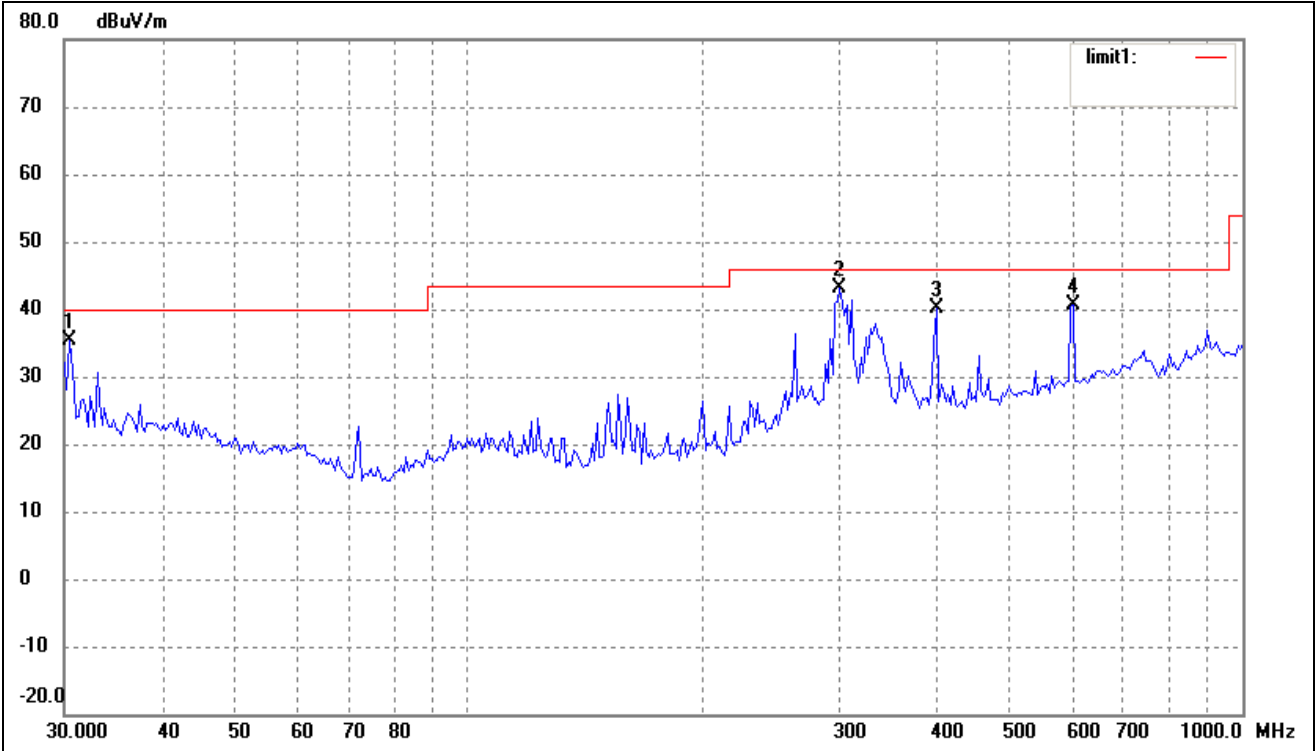


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.4238	27.16	8.11	35.27	40.00	-4.73	360	100	QP
2	301.4224	32.96	10.20	43.16	46.00	-2.84	154	100	QP
3	401.8385	28.71	11.47	40.18	46.00	-5.82	180	100	QP
4	603.5392	26.11	14.62	40.73	46.00	-5.27	115	100	QP

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment:

Test Specification: Horizontal

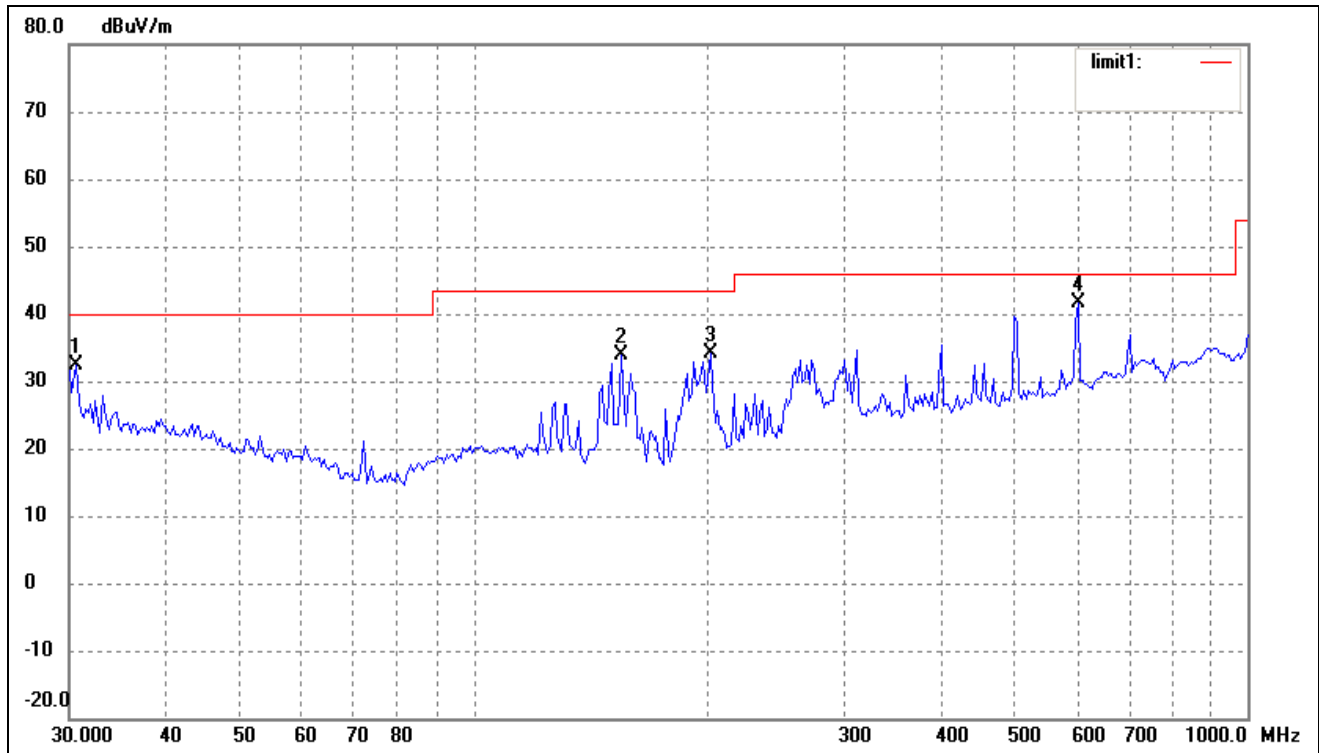

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.6379	24.32	8.15	32.47	40.00	-7.53	360	100	peak
2	154.8205	30.34	3.59	33.93	43.50	-9.57	225	100	peak
3	202.1005	29.41	4.78	34.19	43.50	-9.31	197	100	peak
4	603.5392	26.99	14.62	41.61	46.00	-4.39	85	100	QP

Test Specification: Vertical

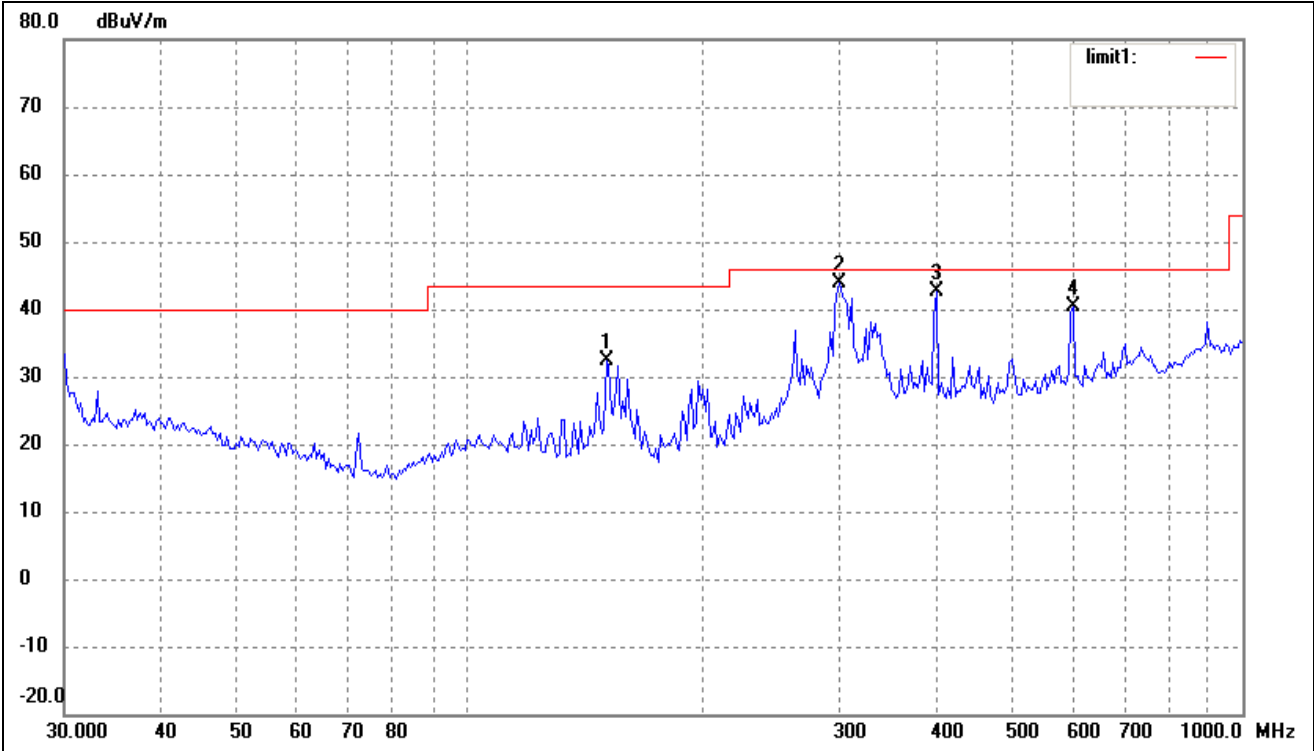


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	150.5378	28.78	3.55	32.33	43.50	-11.17	360	100	peak
2	301.4224	33.56	10.20	43.76	46.00	-2.24	224	100	QP
3	401.8385	31.25	11.47	42.72	46.00	-3.28	132	100	QP
4	603.5392	25.74	14.62	40.36	46.00	-5.64	90	100	QP

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment:

Test Specification: Horizontal

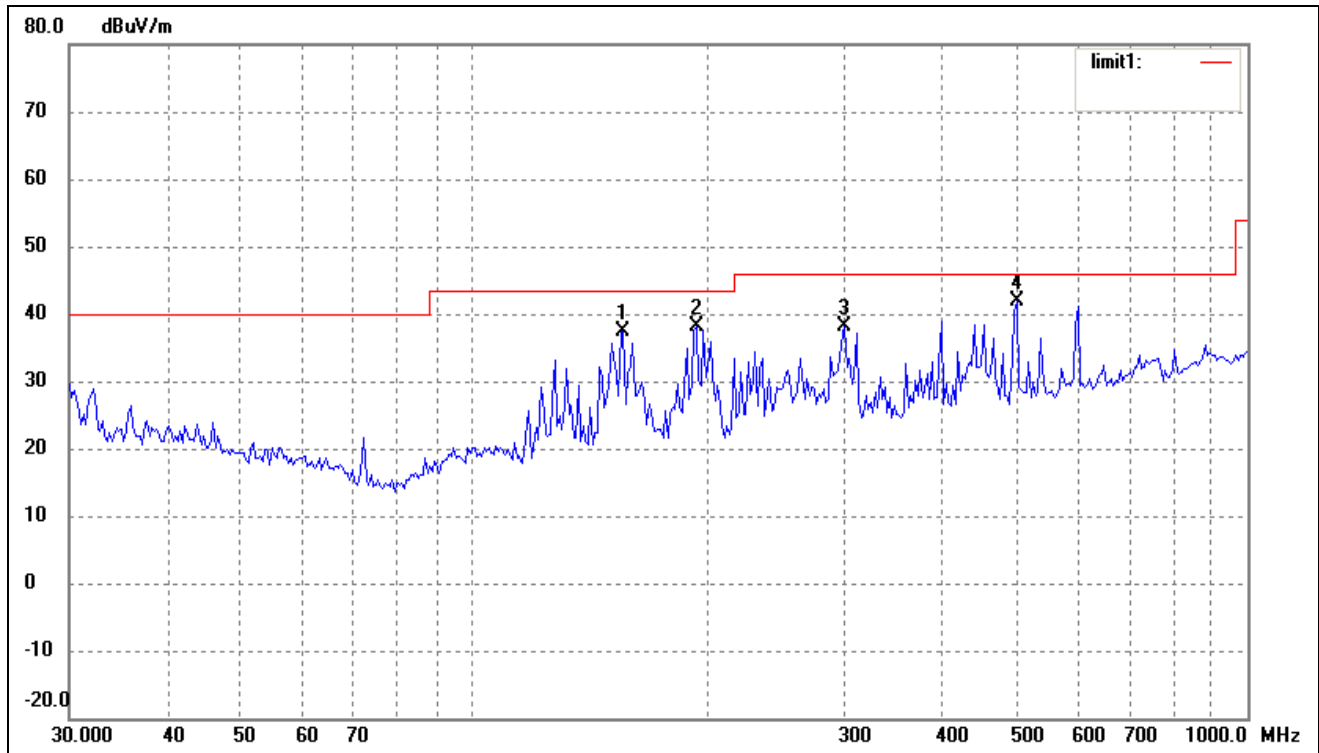

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	155.9101	33.68	3.61	37.29	43.50	-6.21	333	100	peak
2	193.7728	33.71	4.37	38.08	43.50	-5.42	135	100	QP
3	301.4224	27.84	10.20	38.04	46.00	-7.96	68	100	peak
4	502.9395	29.59	12.30	41.89	46.00	-4.11	90	100	QP

Test Specification: Vertical

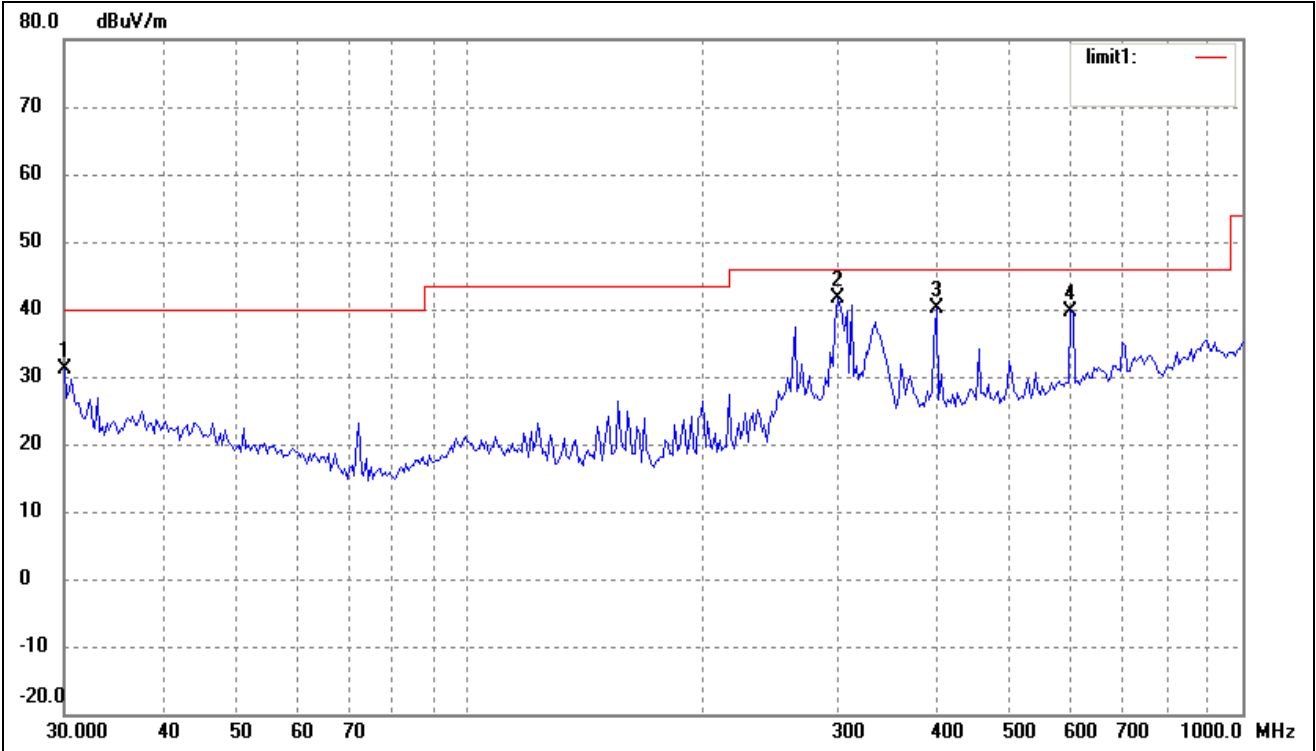

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	30.0000	22.97	8.04	31.01	40.00	-8.99	360	100	peak
2	299.3158	31.46	10.15	41.61	46.00	-4.39	21	100	QP
3	401.8385	28.61	11.47	40.08	46.00	-5.92	197	100	QP
4	599.3213	24.98	14.76	39.74	46.00	-6.26	270	100	peak

*Spurious Emissions Above 1GHz**Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824	65.63	-3.86	61.77	74	-12.23	H	PK
4824	47.02	-3.86	43.16	54	-10.84	H	AV
7236	61.57	1.10	62.67	74	-11.33	H	PK
7236	45.93	1.10	47.03	54	-6.97	H	AV
4824	62.50	-3.86	58.64	74	-15.36	V	PK
4824	45.21	-3.86	41.35	54	-12.65	V	AV
7236	56.27	1.10	57.37	74	-16.63	V	PK
7236	39.54	1.10	40.64	54	-13.36	V	AV
Middle Channel-2437MHz							
4874	66.07	-3.74	62.33	74	-11.67	H	PK
4874	48.06	-3.74	44.32	54	-9.68	H	AV
7311	60.24	1.47	61.71	74	-12.29	H	PK
7311	43.13	1.47	44.6	54	-9.4	H	AV
4874	61.46	-3.74	57.72	74	-16.28	V	PK
4874	47.11	-3.74	43.37	54	-10.63	V	AV
7311	56.43	1.47	57.90	74	-16.1	V	PK
7311	39.76	1.47	41.23	54	-12.77	V	AV
High Channel-2462MHz							
4924	63.96	-3.59	60.37	74	-13.63	H	PK
4924	45.11	-3.59	41.52	54	-12.48	H	AV
7386	60.42	1.79	62.21	74	-11.79	H	PK
7386	43.01	1.79	44.80	54	-9.2	H	AV
4924	60.51	-3.59	56.92	74	-17.08	V	PK
4924	46.14	-3.59	42.55	54	-11.45	V	AV
7386	56.68	1.79	58.47	74	-15.53	V	PK
7386	40.48	1.79	42.27	54	-11.73	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824	66.19	-3.86	62.33	74	-11.67	H	PK
4824	46.73	-3.86	42.87	54	-11.13	H	AV
7236	60.77	1.10	61.87	74	-12.13	H	PK
7236	44.77	1.10	45.87	54	-8.13	H	AV
4824	60.23	-3.86	56.37	74	-17.63	V	PK
4824	46.51	-3.86	42.65	54	-11.35	V	AV
7236	57.63	1.10	58.73	74	-15.27	V	PK
7236	40.25	1.10	41.35	54	-12.65	V	AV
Middle Channel-2437MHz							
4874	64.99	-3.74	61.25	74	-12.75	H	PK
4874	47.28	-3.74	43.54	54	-10.46	H	AV
7311	61.27	1.47	62.74	74	-11.26	H	PK
7311	42.90	1.47	44.37	54	-9.63	H	AV
4874	59.32	-3.74	55.58	74	-18.42	V	PK
4874	45.31	-3.74	41.57	54	-12.43	V	AV
7311	54.50	1.47	55.97	74	-18.03	V	PK
7311	38.91	1.47	40.38	54	-13.62	V	AV
High Channel-2462MHz							
4924	66.96	-3.59	63.37	74	-10.63	H	PK
4924	48.11	-3.59	44.52	54	-9.48	H	AV
7386	62.56	1.79	64.35	74	-9.65	H	PK
7386	43.92	1.79	45.71	54	-8.29	H	AV
4924	61.93	-3.59	58.34	74	-15.66	V	PK
4924	46.31	-3.59	42.72	54	-11.28	V	AV
7386	54.88	1.79	56.67	74	-17.33	V	PK
7386	42.24	1.79	44.03	54	-9.97	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824	68.49	-3.86	64.63	74	-9.37	H	PK
4824	50.38	-3.86	46.52	54	-7.48	H	AV
7236	61.25	1.10	62.35	74	-11.65	H	PK
7236	43.25	1.10	44.35	54	-9.65	H	AV
4824	63.57	-3.86	59.71	74	-14.29	V	PK
4824	49.14	-3.86	45.28	54	-8.72	V	AV
7236	54.87	1.10	55.97	74	-18.03	V	PK
7236	39.98	1.10	41.08	54	-12.92	V	AV
Middle Channel-2437MHz							
4874	64.06	-3.74	60.32	74	-13.68	H	PK
4874	46.39	-3.74	42.65	54	-11.35	H	AV
7311	62.85	1.47	64.32	74	-9.68	H	PK
7311	45.05	1.47	46.52	54	-7.48	H	AV
4874	61.29	-3.74	57.55	74	-16.45	V	PK
4874	46.02	-3.74	42.28	54	-11.72	V	AV
7311	55.30	1.47	56.77	74	-17.23	V	PK
7311	40.61	1.47	42.08	54	-11.92	V	AV
High Channel-2462MHz							
4924	65.13	-3.59	61.54	74	-12.46	H	PK
4924	43.93	-3.59	40.34	54	-13.66	H	AV
7386	63.96	1.79	65.75	74	-8.25	H	PK
7386	44.91	1.79	46.70	54	-7.30	H	AV
4924	62.41	-3.59	58.82	74	-15.18	V	PK
4924	47.43	-3.59	43.84	54	-10.16	V	AV
7386	55.98	1.79	57.77	74	-16.23	V	PK
7386	42.51	1.79	44.30	54	-9.70	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

8. Out of Band Emissions

8.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24

8.3 Test Procedure

According to the KDB 558074, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.

8.4 Environmental Conditions

Temperature:	26°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


8.5 Summary of Test Results/Plots

Test Mode	Test Frequency MHz	Limit dBuV / dBc	Result
802.11b	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2397.84	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
	2483.50	<54 dBuV	Pass
	2486.20	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass
802.11g	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass
802.11n-HT20	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.247(d) requirements.


Please refer to the test plots as below.

802.11b-Lowest Bandedge

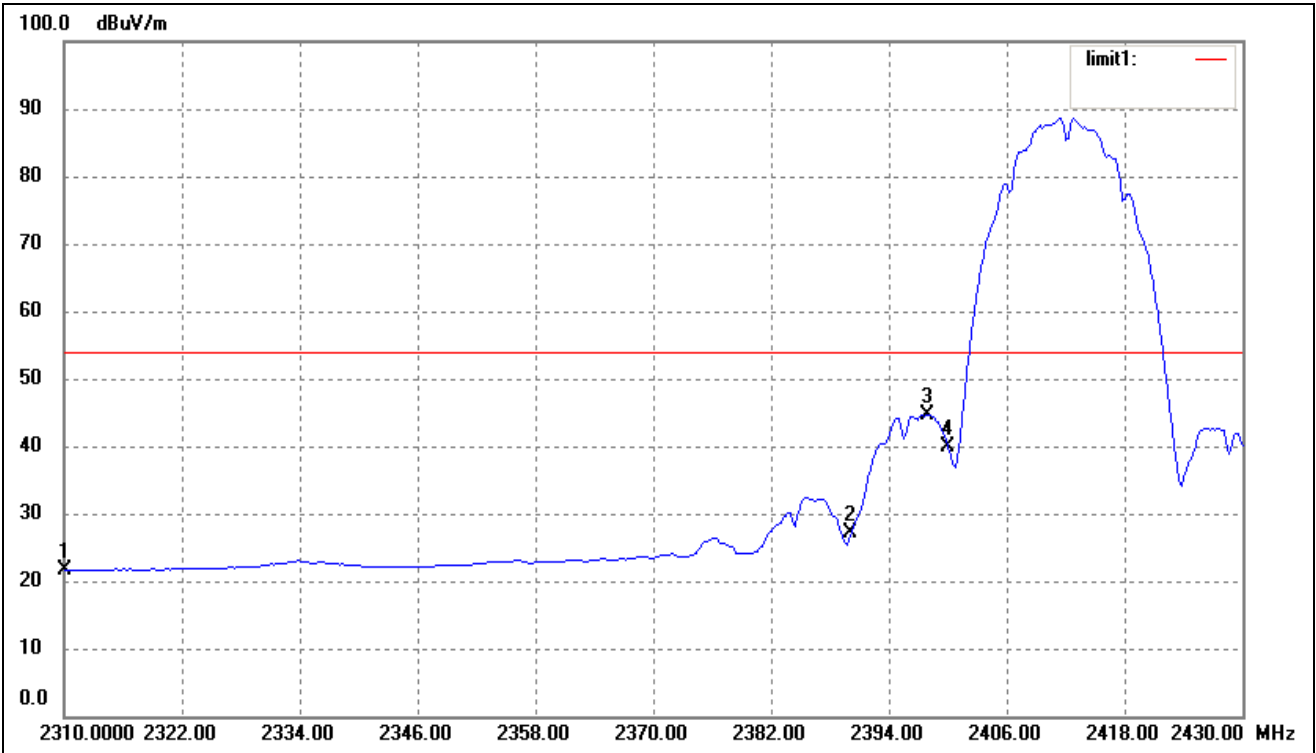


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	Factor(dB)	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2310.000	33.32	-11.72	21.60	54.00	-32.40	256	100	Ave
	2310.000	44.34	-11.72	32.62	74.00	-41.38	256	100	peak
2	2390.000	38.87	-11.75	27.12	54.00	-26.88	360	100	Ave
	2390.000	50.45	-11.75	38.70	74.00	-35.30	360	100	peak
3	2397.840	56.39	-11.75	44.64	54.00	-9.36	180	100	Ave
	2397.840	66.05	-11.75	54.30	74.00	-19.70	180	100	peak
4	2400.000	51.67	-11.75	39.92	54.00	-14.08	270	100	Ave
	2400.000	63.10	-11.75	51.35	74.00	-22.65	270	100	peak

802.11b-Highest Bandedge

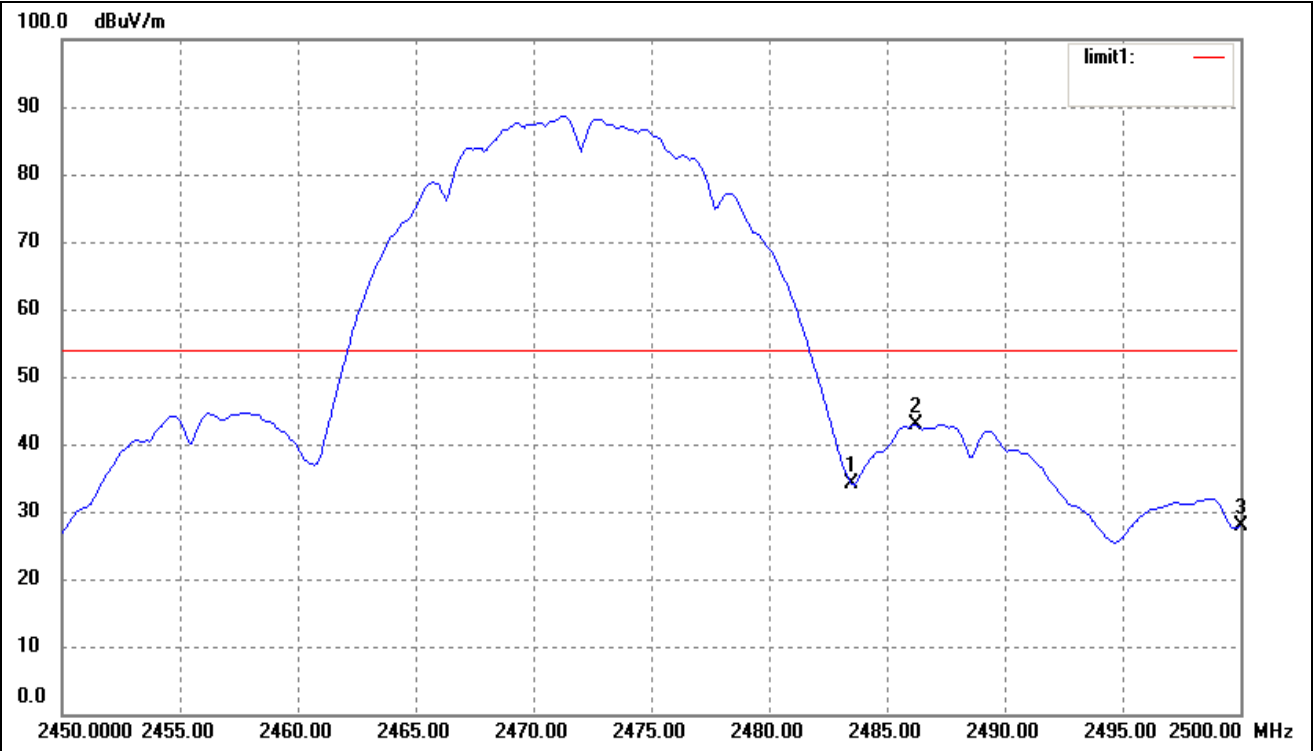


802.11g-Lowest Bandedge

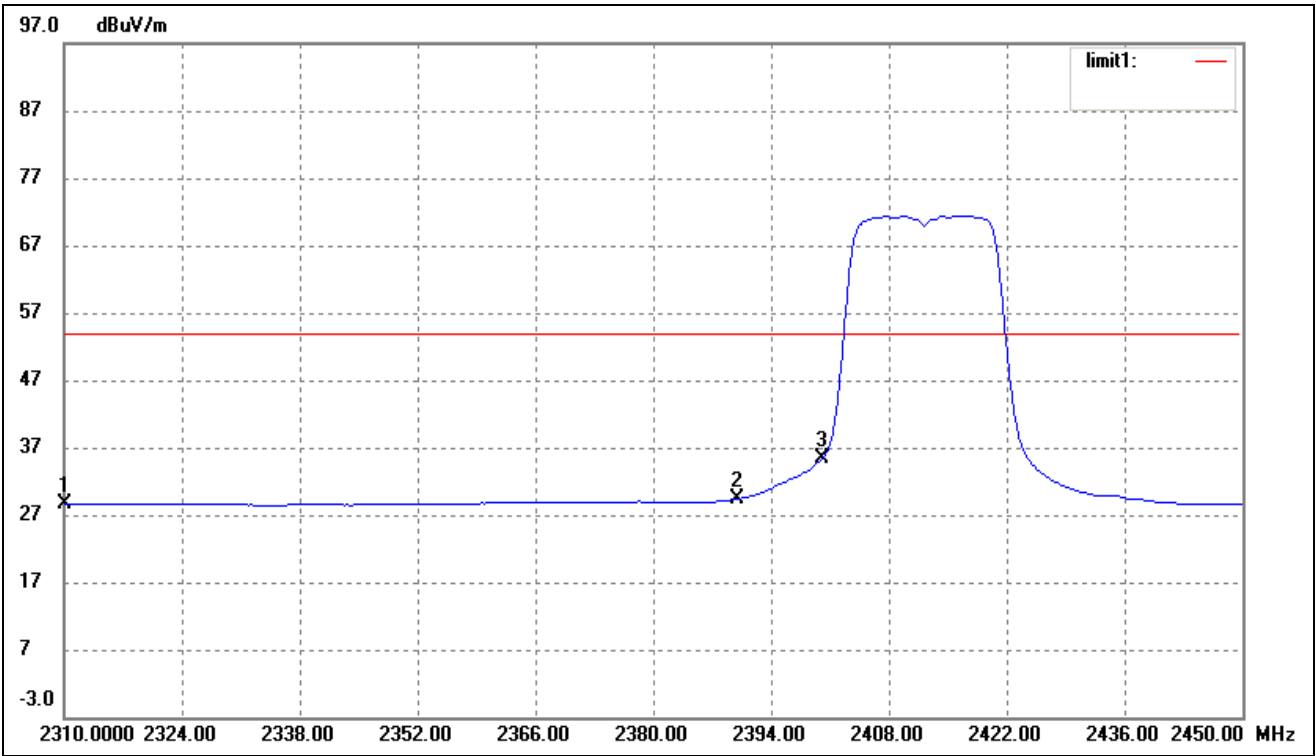


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2310.000	40.32	-11.72	28.60	54.00	-25.40	267	100	Ave
	2310.000	61.29	-11.72	49.57	74.00	-24.43	267	100	Peak
2	2390.000	41.18	-11.75	29.43	54.00	-24.57	360	100	Ave
	2390.000	52.06	-11.75	40.31	74.00	-33.69	360	100	Peak
3	2400.000	47.20	-11.72	35.48	54.00	-18.52	178	100	Ave
	2400.000	59.45	-11.72	47.73	74.00	-26.27	178	100	Peak

802.11g-Highest Bandedge

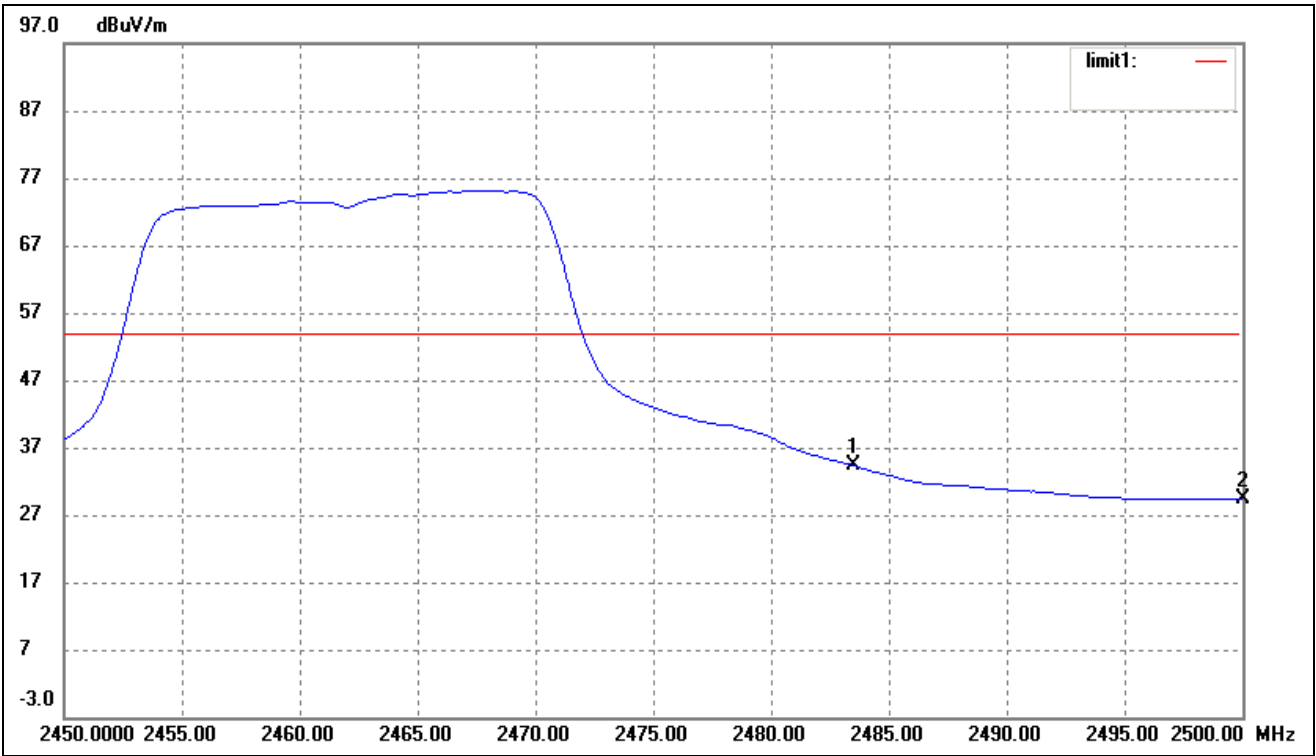


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2483.500	46.13	-11.78	34.35	54.00	-19.65	257	100	Ave
	2483.500	58.45	-11.78	46.67	74.00	-27.33	257	100	Peak
2	2500.000	41.06	-11.78	29.28	54.00	-24.72	360	100	Ave
	2500.000	52.17	-11.78	40.39	74.00	-33.61	360	100	Peak

802.11n-HT20-Lowest Bandedge

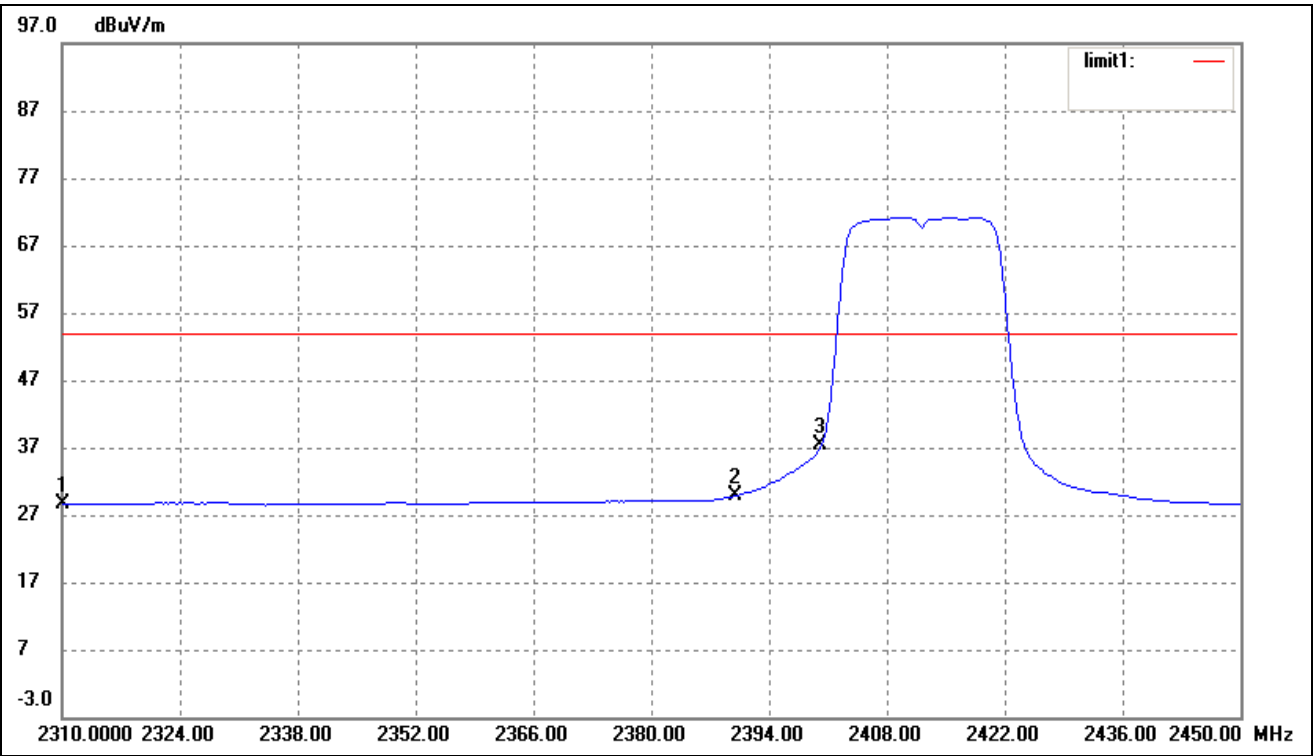

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2310.000	40.38	-11.72	28.66	54.00	-25.34	360	100	Ave
	2310.000	51.39	-11.72	39.67	74.00	-34.33	360	100	Peak
2	2390.000	41.57	-11.75	29.82	54.00	-24.18	270	100	Ave
	2390.000	52.27	-11.75	40.52	74.00	-33.48	270	100	Peak
3	2400.000	48.99	-11.72	37.27	54.00	-16.73	169	100	Ave
	2400.000	61.47	-11.72	49.75	74.00	-24.25	169	100	Peak

802.11n-HT20-Highest Bandedge

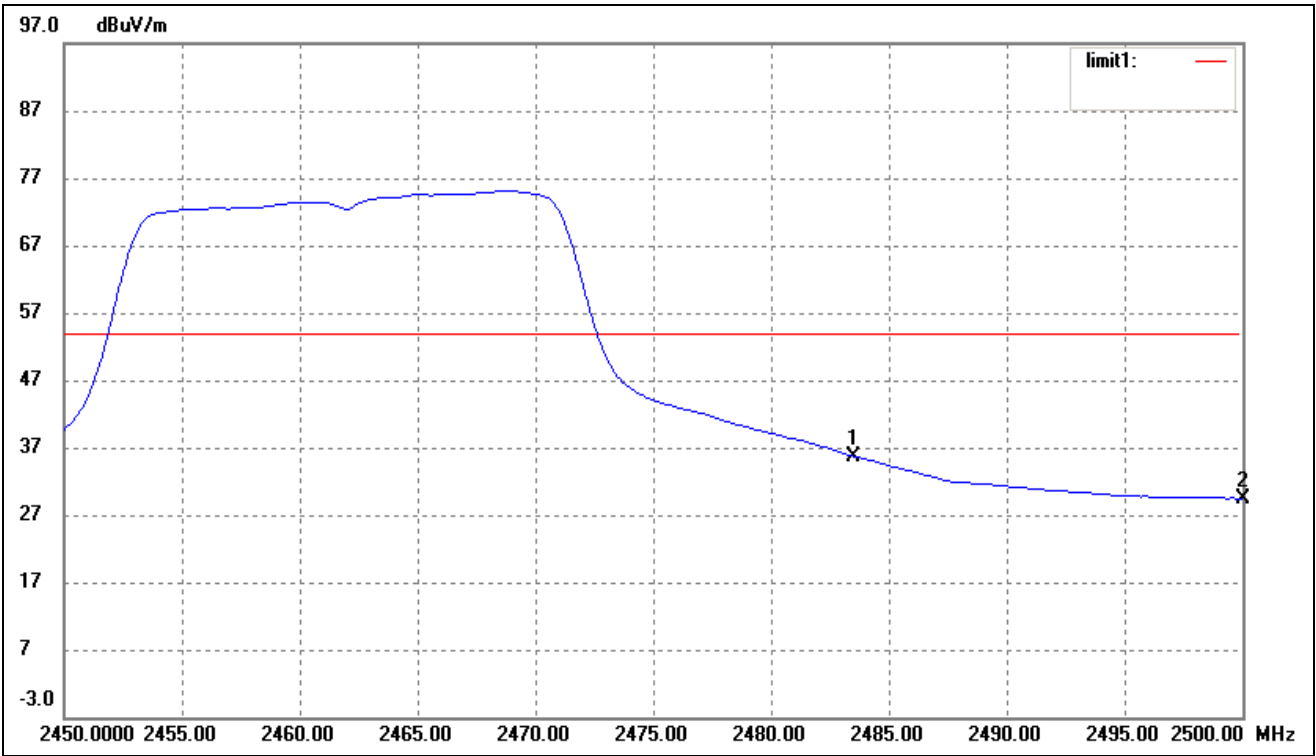

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	(°)	(cm)	
1	2483.500	47.48	-11.78	35.70	54.00	-18.30	360	100	Ave
	2483.500	58.45	-11.78	46.67	74.00	-27.33	360	100	Peak
2	2500.000	41.22	-11.78	29.44	54.00	-24.56	117	100	Ave
	2500.000	53.40	-11.78	41.62	74.00	-32.38	117	100	Peak

***** END OF REPORT *****