

**Annex acc. to FCC Title 47 CFR Part 15
relating to
VALIDFILL
VF POS Puck**

Annex no. 3



Occupied Bandwidth/ Channel Occupancy

**Title 47 - Telecommunication
Part 15 - Radio Frequency Devices
Subpart C – Intentional Radiators
ANSI C63.4-2014
ANSI C63.10-2013**




Deutsche
Akkreditierungsstelle
D-PL-12053-01-00



Plots for the test equipment (EUT) – Measured 20 dB Bandwidth

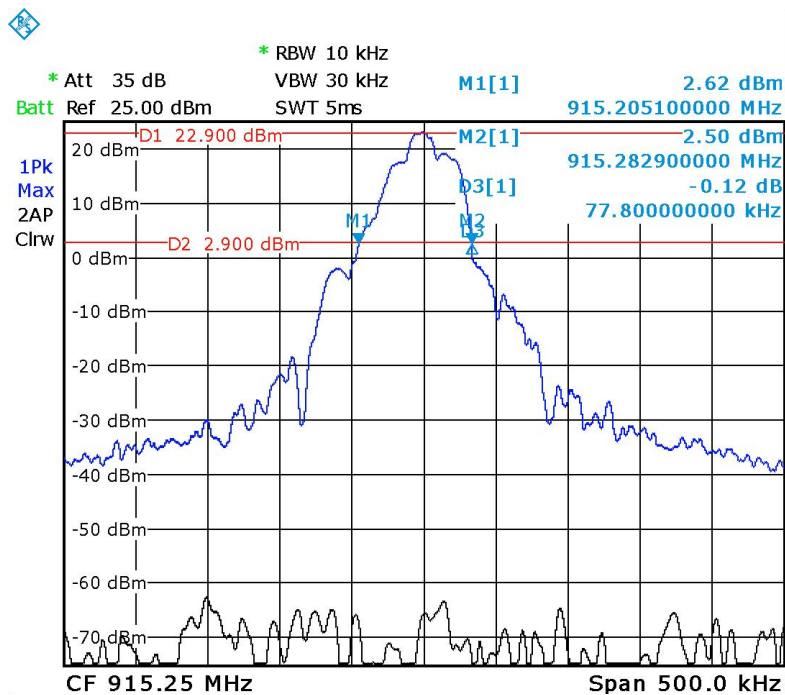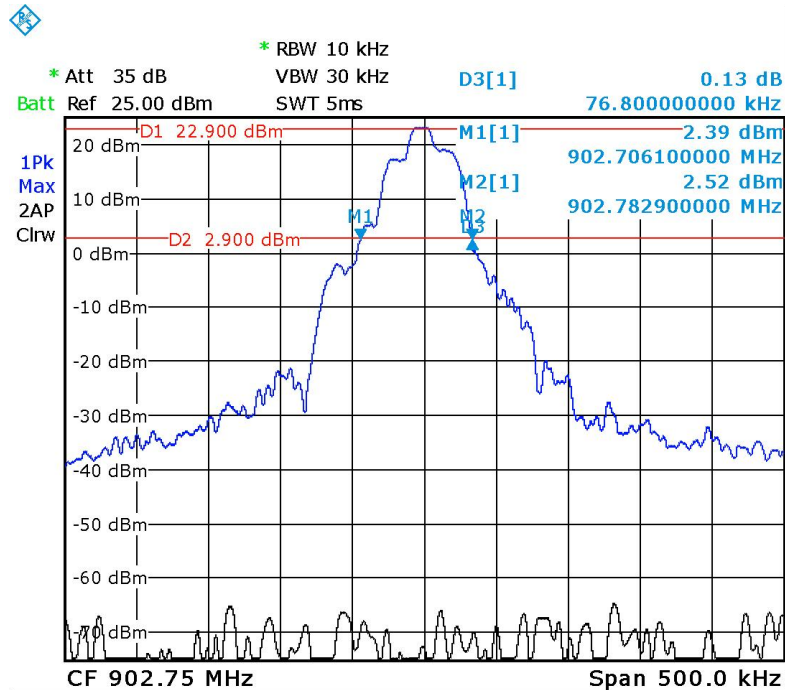

Plots for the test equipment (EUT) – Measured 20 dB Bandwidth

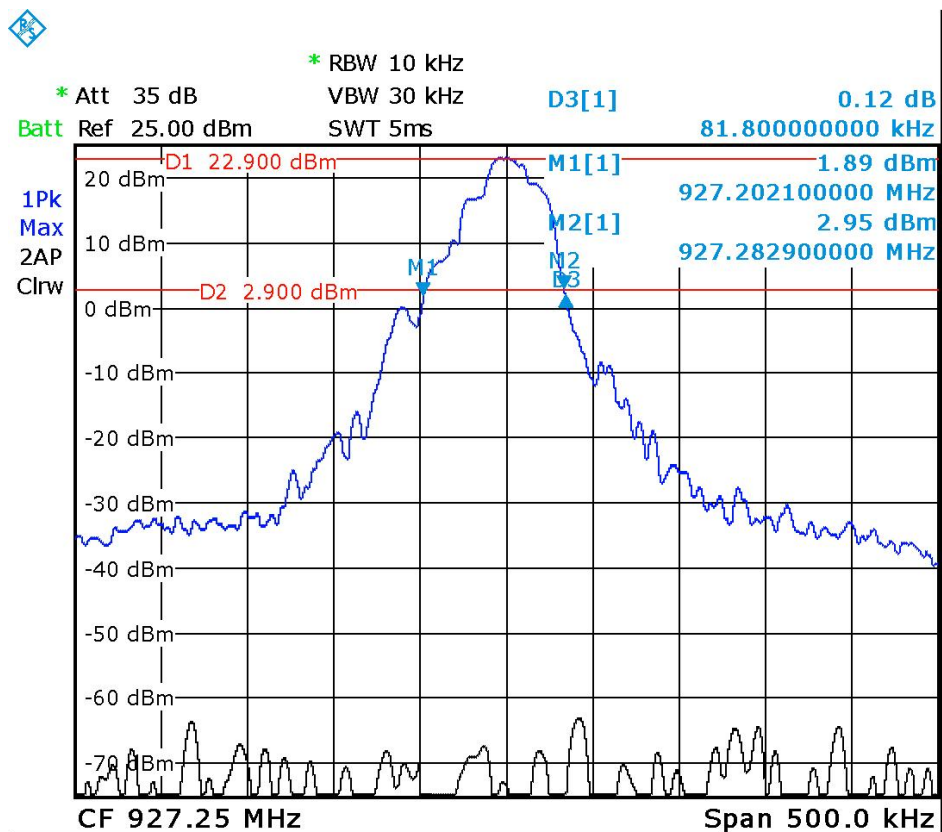


Plots for the test equipment (EUT) – Channel Spacing

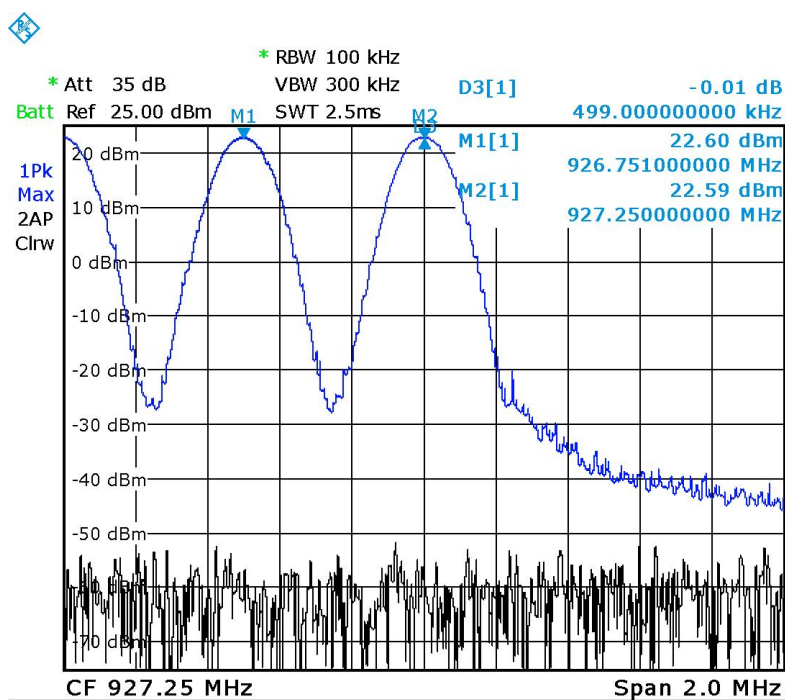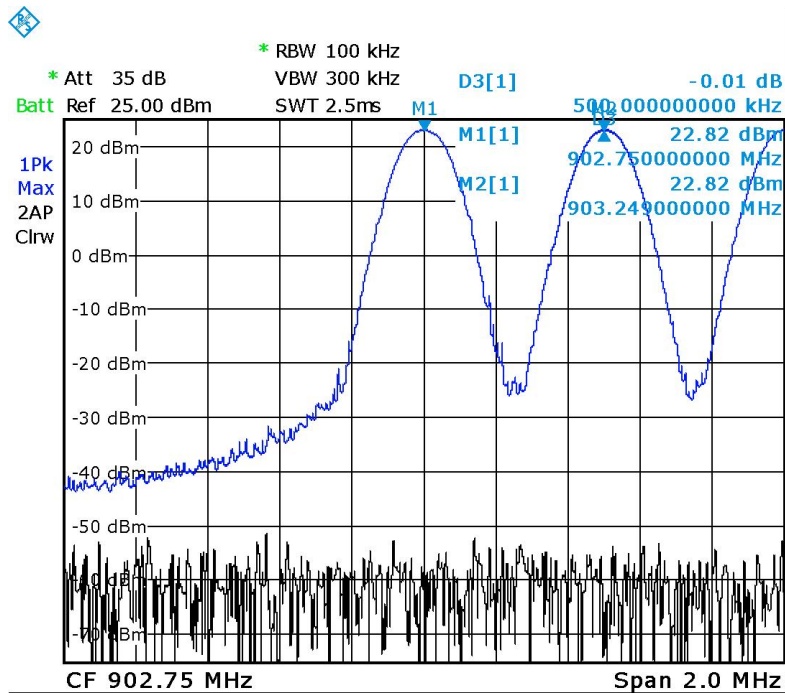


Plots for the test equipment (EUT) – Hopping Channels

50 Hopping Channels

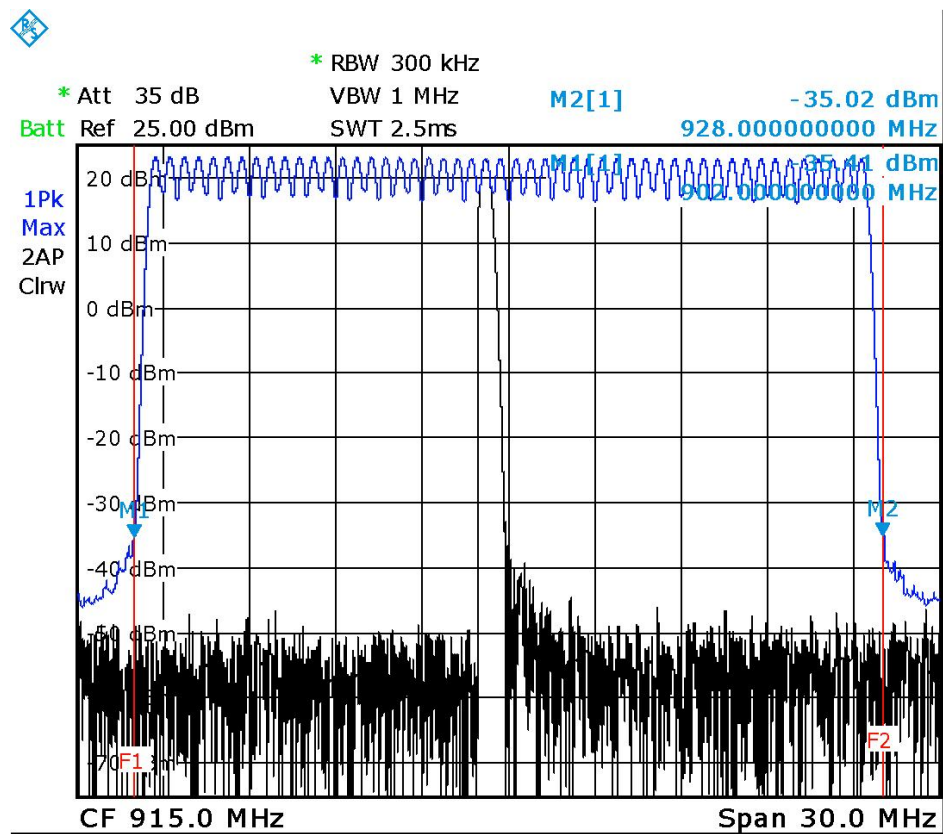


Plots for the test equipment (EUT) – Channel Occupancy

Single Burst = 28.1 ms

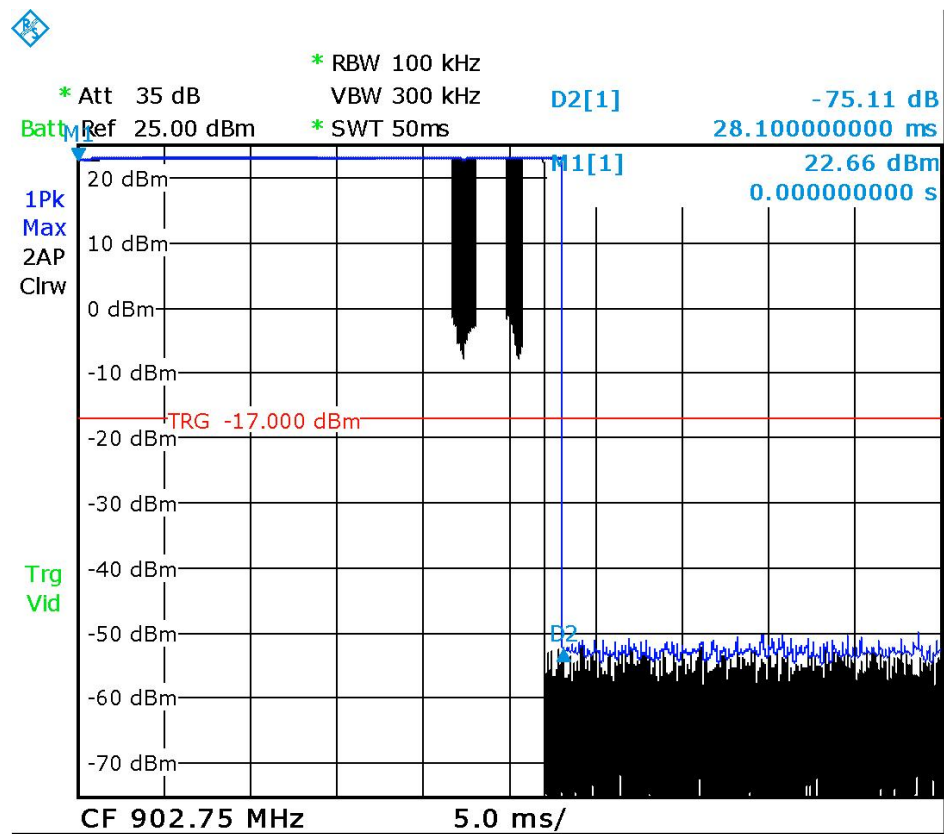

Plots for the test equipment (EUT) – Channel Occupancy

6 Single Burst in one time = $28.1 \times 6 = 168.6$ ms

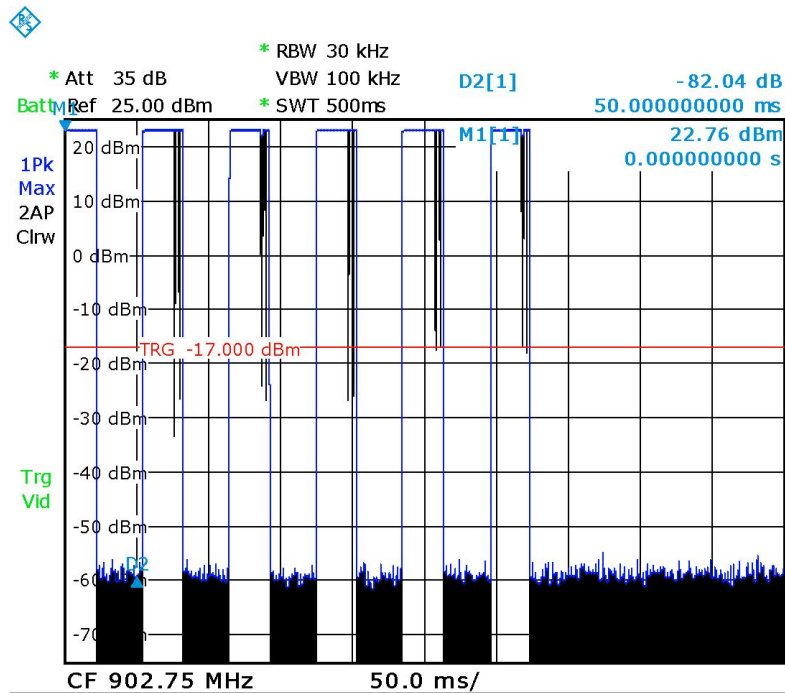

2 times 6 Bursts in 20s = $2 \times 168.6 = 337.2$ ms = 0.3372 s

