



GSM 850-Right Head Cheek High CH251.....	3
GSM 850-Right Head Tilted High CH251.....	4
GSM 850-Left Head Cheek High CH251	5
GSM 850-Left Head Tilted High CH251.....	6
PCS-1900-Right Head Cheek High CH810	7
PCS-1900-Right Head Tilted High CH810	8
PCS 1900-Left Head Cheek High CH810	9
PCS 1900-Left Head Tilted High CH810	10
GSM 850-Body Up High CH251	11
GSM 850- Body Down High CH251.....	12
GPRS 850- Body Up High CH251.....	13
GPRS 850- Body Down High CH251	14
EDGE 850- Body Worn Up High CH251.....	15
EDGE 850- Body Worn Down High CH251	16
PCS1900- Body Up High CH810	17
PCS1900- Body Down High CH810	18
GPRS1900- Body Up High CH810	19
GPRS1900- Body Down High CH810	20
EDGE1900- Body Worn Up High CH810.....	21
EDGE1900- Body Worn Down High CH810	22
WCDMA Band II-Right Head Cheek High CH9538	23
WCDMA Band II-Right Head Tilted High CH9538	24
WCDMA Band II-Left Head Cheek High CH9538	25
WCDMA Band II-Left Head Tilted High CH9538	26
WCDMA Band V-Right Head Cheek Low CH4132.....	27
WCDMA Band V-Right Head Tilted Low CH4132	28
WCDMA Band V-Left Head Cheek Low CH4132	29
WCDMA Band V-Left Head Tilted Low CH4132.....	30
WCDMA Band II-Body Up High CH9538.....	31
WCDMA Band II- Body Down High CH9538	32
WCDMA Band V- Body Up Low CH4132	33
WCDMA Band V- Body Down Low CH4132.....	34
IEEE 802.11b-Right Head Cheek Low CH1.....	35
IEEE 802.11b-Right Head Tilted Low CH1	36
IEEE 802.11b-Left Head Cheek Low CH1.....	37
IEEE 802.11b-Left Head Tilted Low CH1	38
IEEE 802.11b- Body Up Low CH1	39
IEEE 802.11b- Body Down Low CH1.....	40
GSM 850-Body-Hotspot Up High CH251	41
GSM 850-Body-Hotspot Down High CH251	42
GSM 850-Body-Hotspot Bottom High CH251	43
GSM 850-Body-Hotspot Left High CH251	44



GPRS850-Body-Hotspot Up High CH251	45
GPRS850-Body-Hotspot Down High CH251	46
GPRS850-Body-Hotspot Bottom High CH251	47
GPRS850-Body-Hotspot Left High CH251	48
EDGE850-Body-Hotspot Up High CH251	49
EDGE850-Body-Hotspot Down High CH251	50
EDGE850-Body-Hotspot Bottom High CH251	51
EDGE850-Body-Hotspot Left High CH251	52
PCS-1900-Body-Hotspot Up High CH810	53
PCS-1900-Body-Hotspot Down High CH810	54
PCS-1900-Body-Hotspot Bottom High CH810	55
PCS 1900-Body-Hotspot Left High CH810	56
GPRS-1900-Body-Hotspot Up High CH810	57
GPRS-1900-Body-Hotspot Down High CH810	58
GPRS-1900-Body-Hotspot Bottom High CH810	59
GPRS 1900-Body-Hotspot Left High CH810	60
EDGE-1900-Body-Hotspot Up High CH810	61
EDGE-1900-Body-Hotspot Down High CH810	62
EDGE-1900-Body-Hotspot Bottom High CH810	63
EDGE 1900-Body-Hotspot Left High CH810	64
WCDMA Band II Body-Hotspot Up High CH9538	65
WCDMA Band II Body-Hotspot Down High CH9538	66
WCDMA Band II Body-Hotspot Bottom High CH9538	67
WCDMA Band II Body-Hotspot Left High CH9538	68
WCDMA Band V Body-Hotspot Up Low CH4132	69
WCDMA Band V Body-Hotspot Down Low CH4132	70
WCDMA Band V Body-Hotspot Bottom Low CH4132	71
WCDMA Band V Body-Hotspot Left Low CH4132	72
IEEE 802.11b Body-Hotspot UP Low CH1	73
IEEE 802.11b Body-Hotspot Down Low CH1	74
IEEE 802.11b Body-Hotspot Right Low CH1	75
IEEE 802.11b Body-Hotspot Top Low CH1	76



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Right Head Cheek High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.899\text{ mho/m}$; $\epsilon_r = 41.327$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek High CH251/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.175 mW/g

GSM850/Right Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.825 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.204 mW/g

SAR(1 g) = 0.162 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.172 W/kg

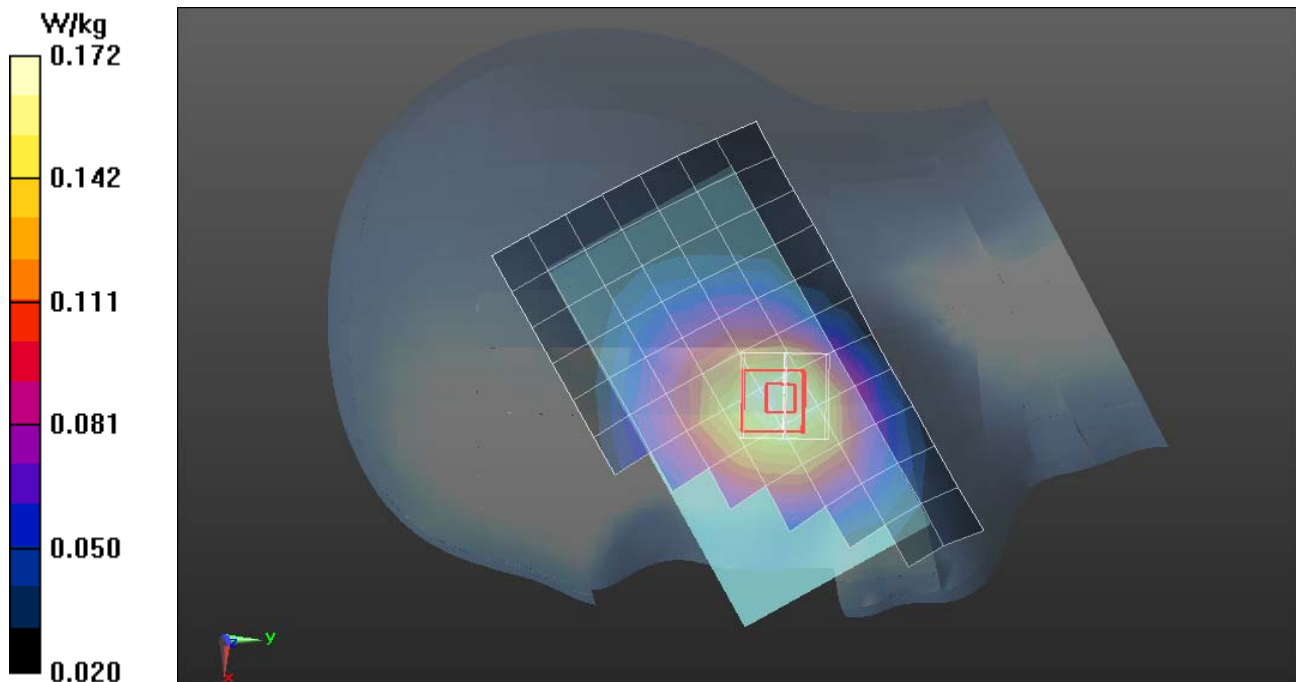



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Right Head Tilted High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.899\text{ mho/m}$; $\epsilon_r = 41.327$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Tilted High CH251/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.114 mW/g

GSM850/Right Head Tilted High CH251/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.231 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.130 mW/g

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.109 W/kg

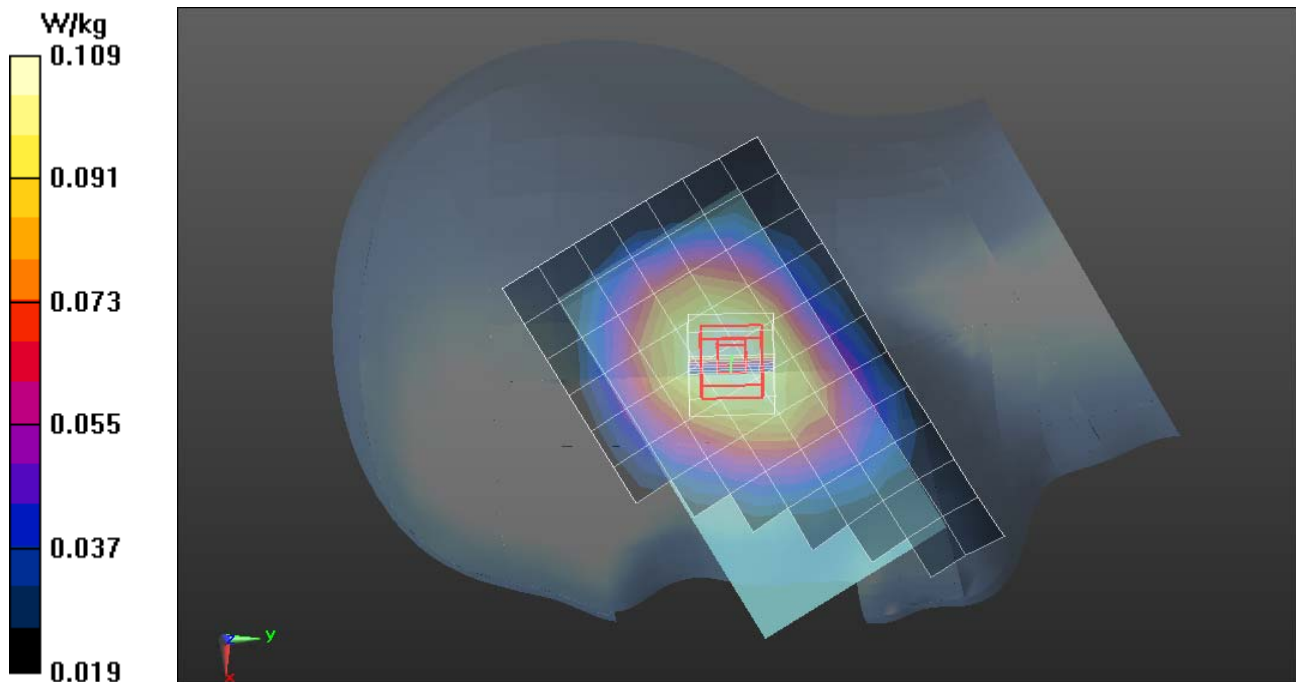



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Left Head Cheek High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.899\text{ mho/m}$; $\epsilon_r = 41.327$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Cheek High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.136 mW/g


GSM850/Left Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.543 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.159 mW/g

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.098 mW/g

Maximum value of SAR (measured) = 0.143 W/kg

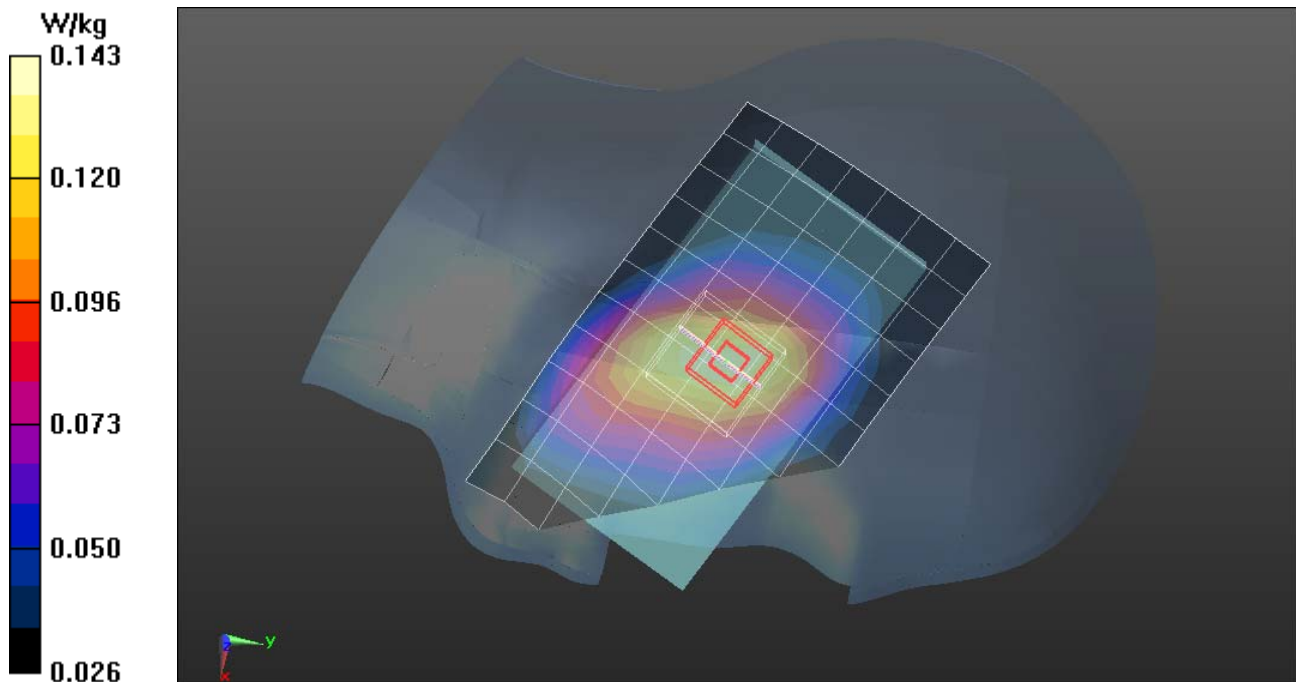



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Left Head Tilted High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.899\text{ mho/m}$; $\epsilon_r = 41.327$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Tilted High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.113 mW/g


GSM850/Left Head Tilted High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.998 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.127 mW/g

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.079 mW/g

Maximum value of SAR (measured) = 0.115 W/kg

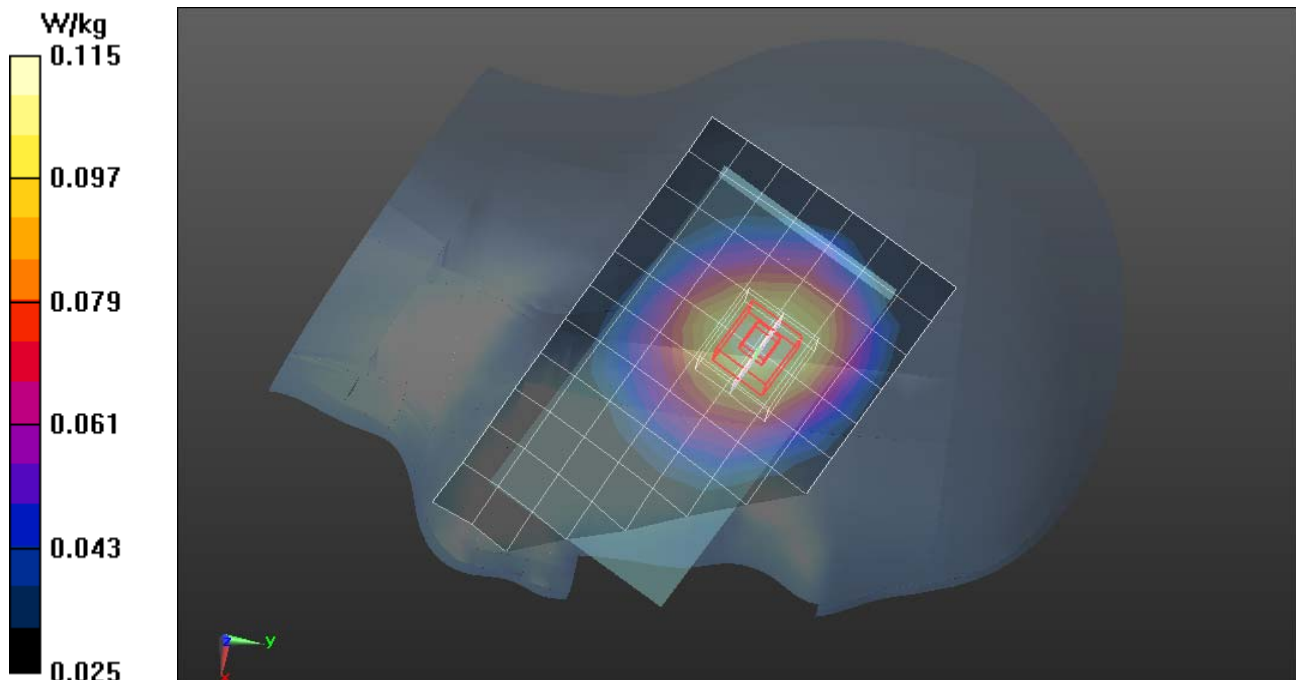



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS-1900-Right Head Cheek High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Right Head Cheek High CH810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.175 mW/g


PCS1900/Right Head Cheek High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.155 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.228 mW/g

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.095 mW/g

Maximum value of SAR (measured) = 0.182 W/kg

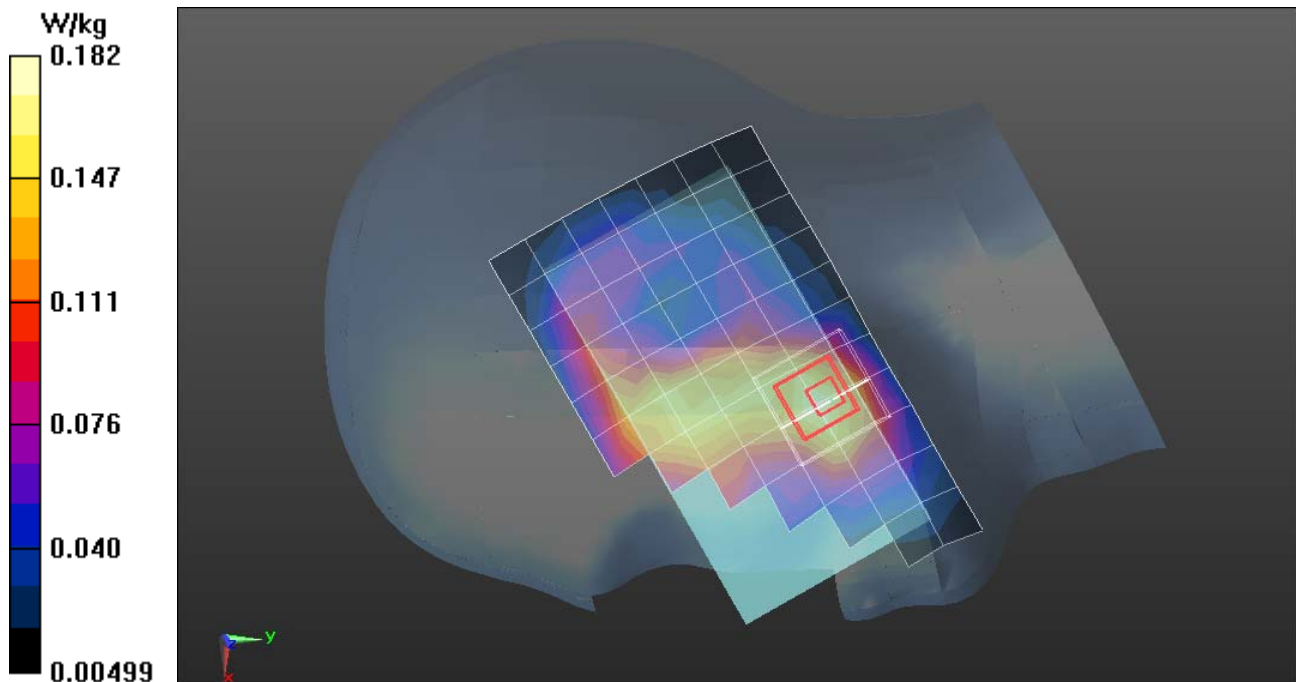



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS-1900-Right Head Tilted High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Right Head Tilted High CH810/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.165 mW/g


PCS1900/Right Head Tilted High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.528 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.233 mW/g

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.177 W/kg

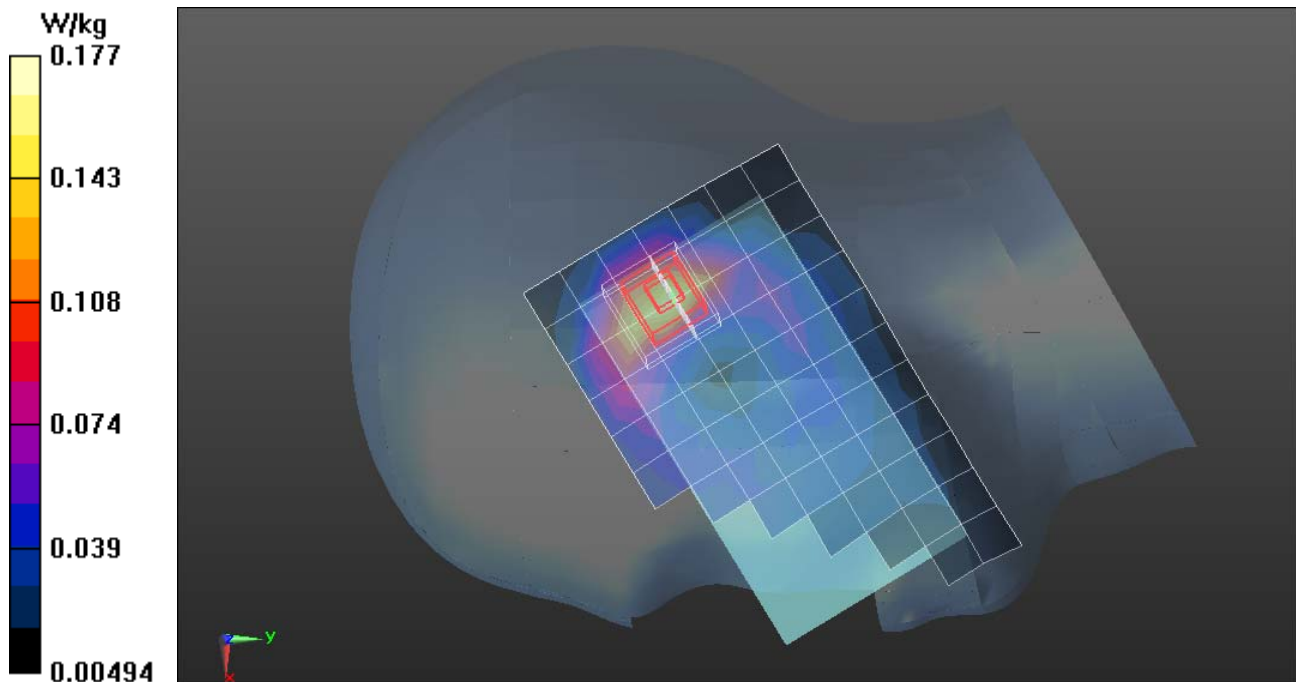



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS 1900-Left Head Cheek High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Left Head Cheek High CH810/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.441 mW/g


PCS1900/Left Head Cheek High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.835 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.643 mW/g

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.499 W/kg

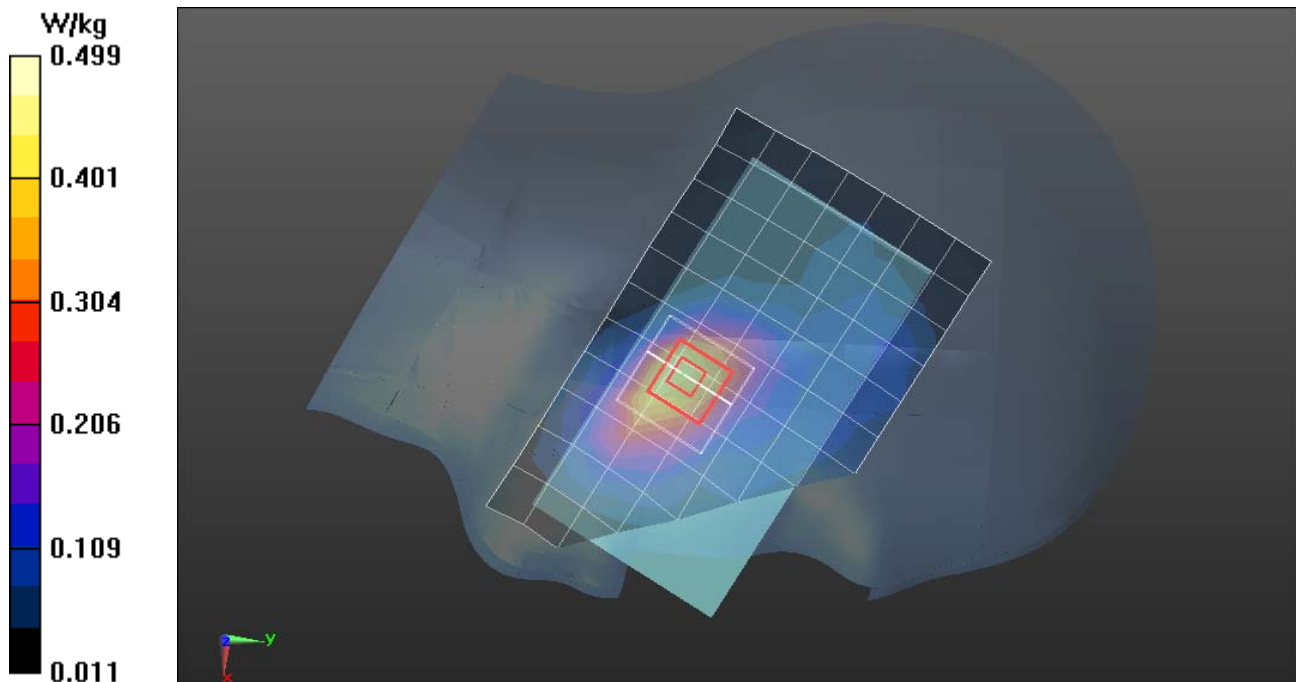



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS 1900-Left Head Tilted High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1909.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.45\text{mho/m}$; $\epsilon_r = 39.74$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/Left Head Tilted High CH810/Area Scan (51x81x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.138 mW/g


PCS1900/Left Head Tilted High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.840 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.183 mW/g

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.142 W/kg

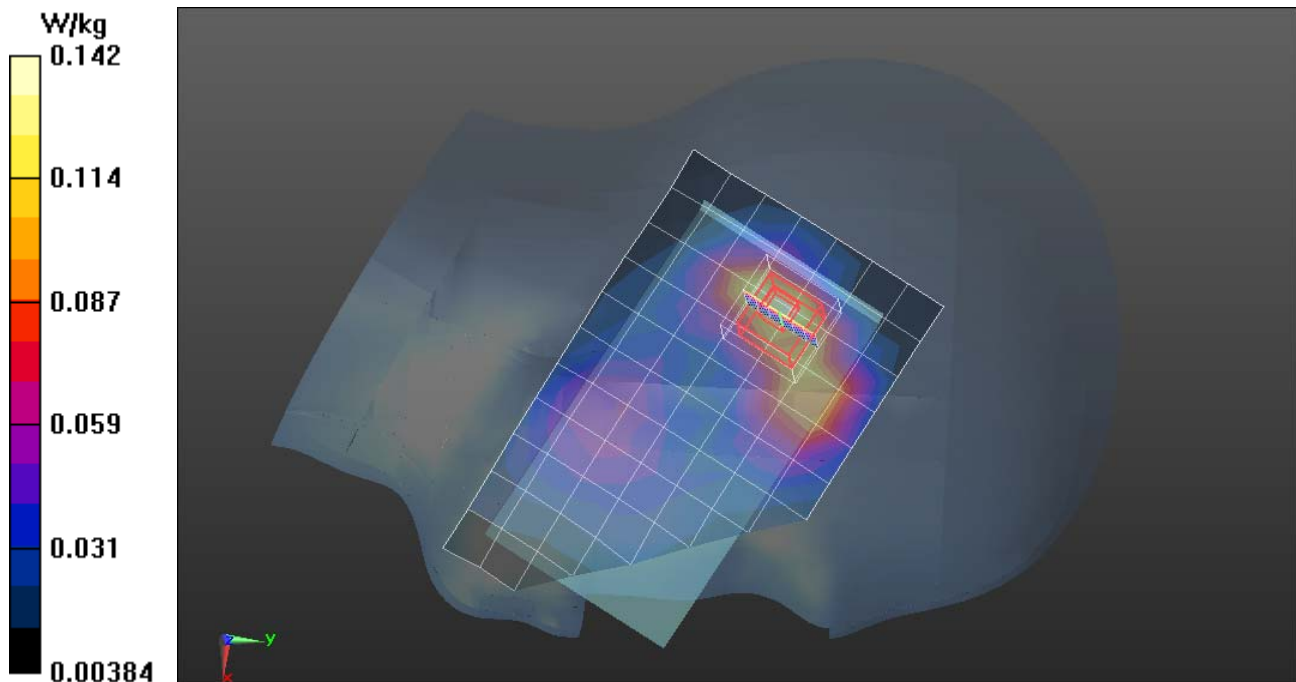



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Body Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.969\text{ mho/m}$; $\epsilon_r = 55.752$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Up High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.208 mW/g


GSM 850/GSM850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.678 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.245 mW/g

SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.205 W/kg

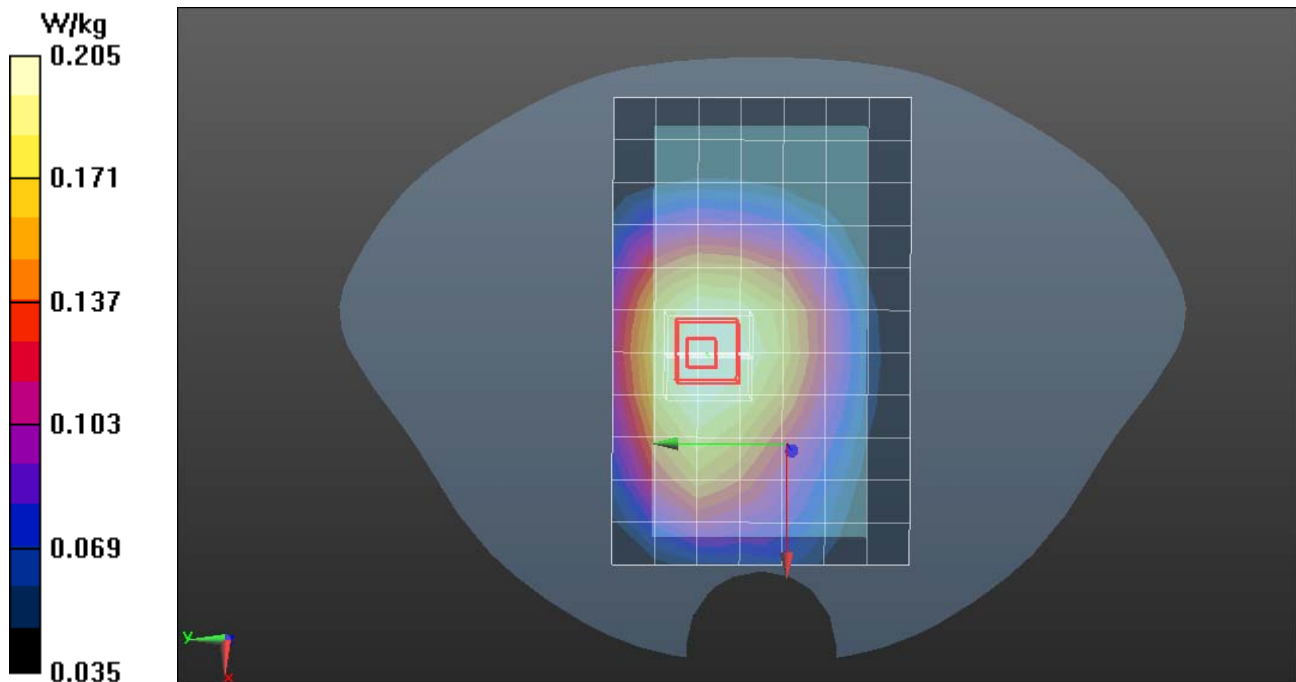



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850- Body Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.969\text{ mho/m}$; $\epsilon_r = 55.572$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.392 mW/g


GSM 850/GSM850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.397 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.465 mW/g

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.385 W/kg

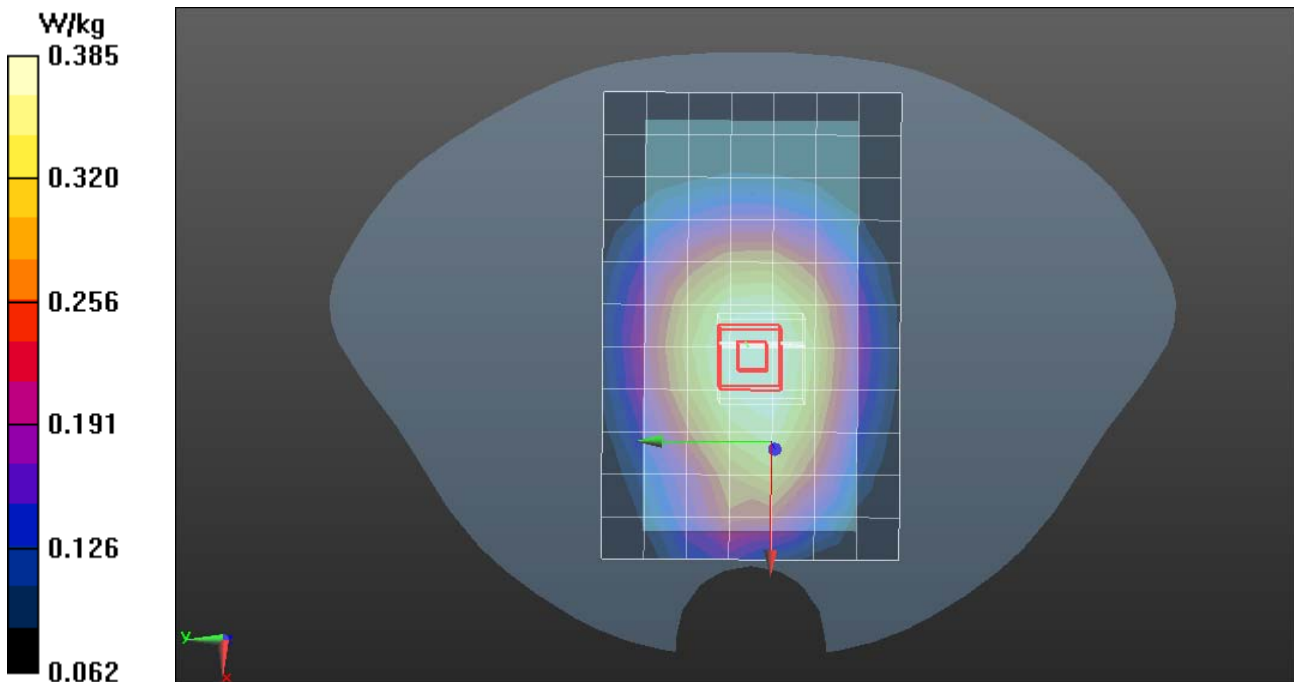



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS 850- Body Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.969\text{ mho/m}$; $\epsilon_r = 55.572$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS 850/GPRS850 Body Up High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.227 mW/g


GPRS 850/GPRS850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.903 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.131 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.170 mW/g

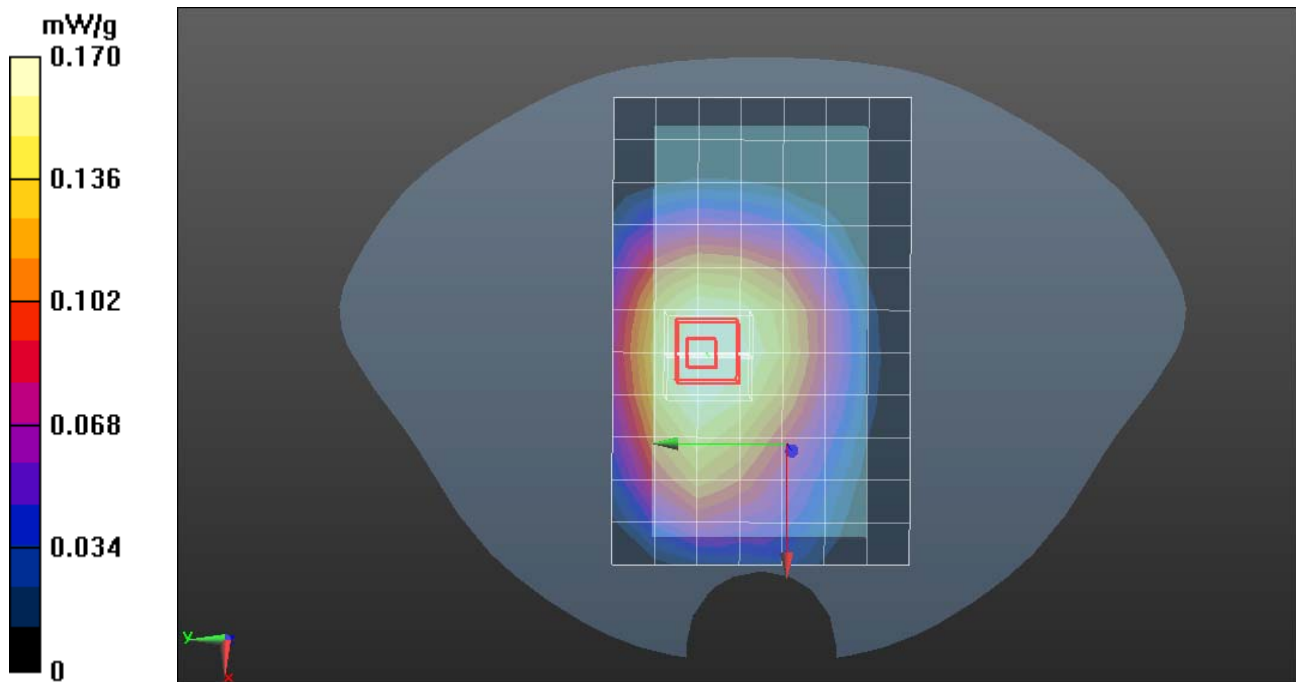



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS 850- Body Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.0 - 849.0 MHz);

Frequency: 848.8MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.969\text{ mho/m}$; $\epsilon_r = 55.572$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS 850/GPRS850 Body Down High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.312 mW/g

GPRS 850/GPRS850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.993 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.343 mW/g

SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

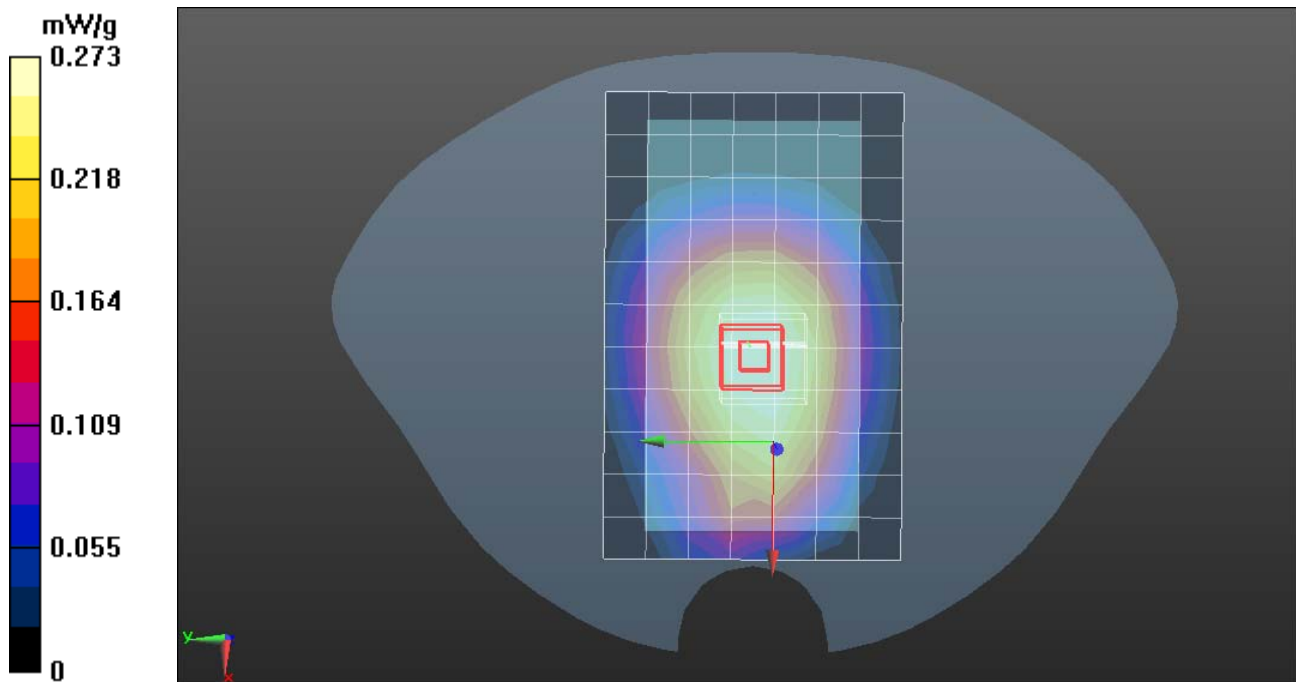



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE 850- Body Worn Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic EDGE; Communication System Band: EDGE 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8\text{MHz}$; $\sigma = 0.969\text{ mho/m}$; $\epsilon_r = 55.572$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE 850/EDGE850 Body Up High CH251/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.338 mW/g


EDGE 850/EDGE850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.523 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

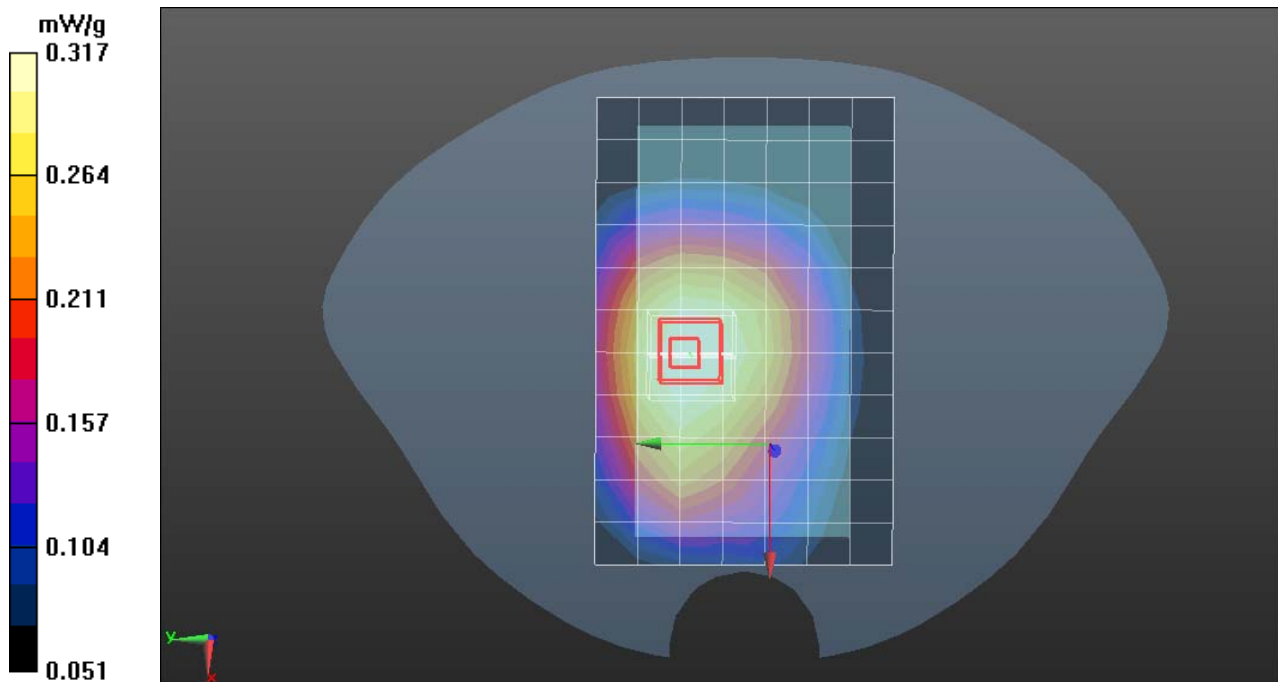



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE 850- Body Worn Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic EDGE; Communication System Band: EDGE 850 (824.0 - 849.0 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE 850/EDGE850 Body Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.456 mW/g

EDGE 850/EDGE850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid:



dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.233 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.468 W/kg

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.439mW/g

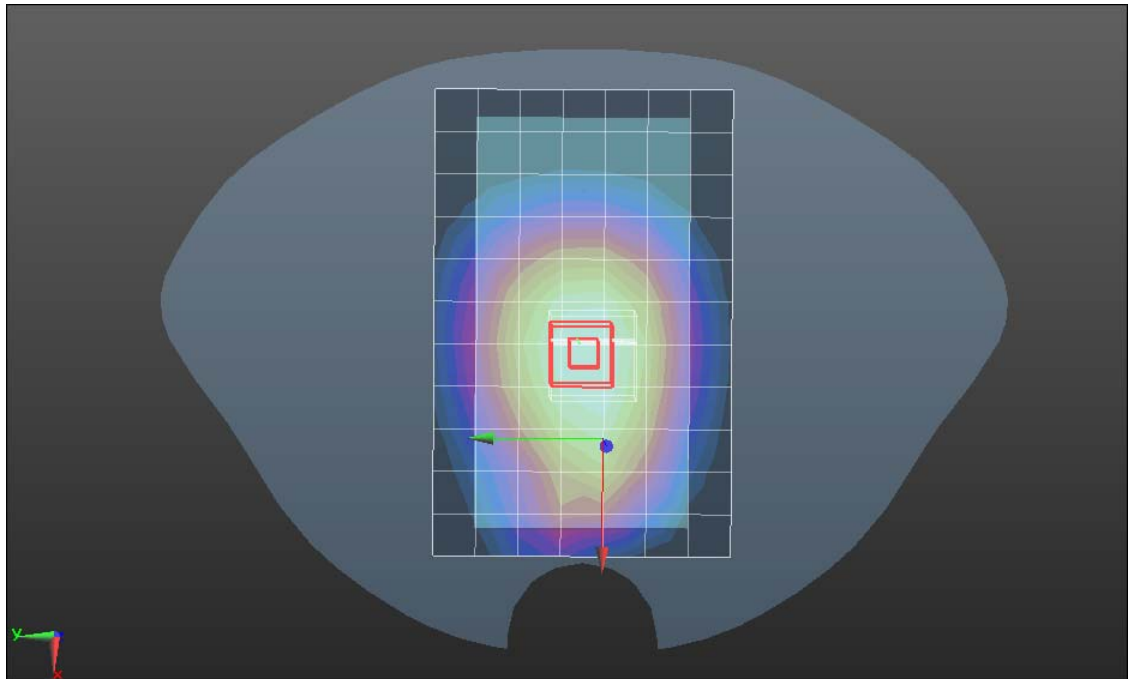



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS1900- Body Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ PCS1900 Body Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.247 mW/g


PCS1900/ PCS1900 Body Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.465 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.327 mW/g

SAR(1 g) = 0.190 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.244 W/kg

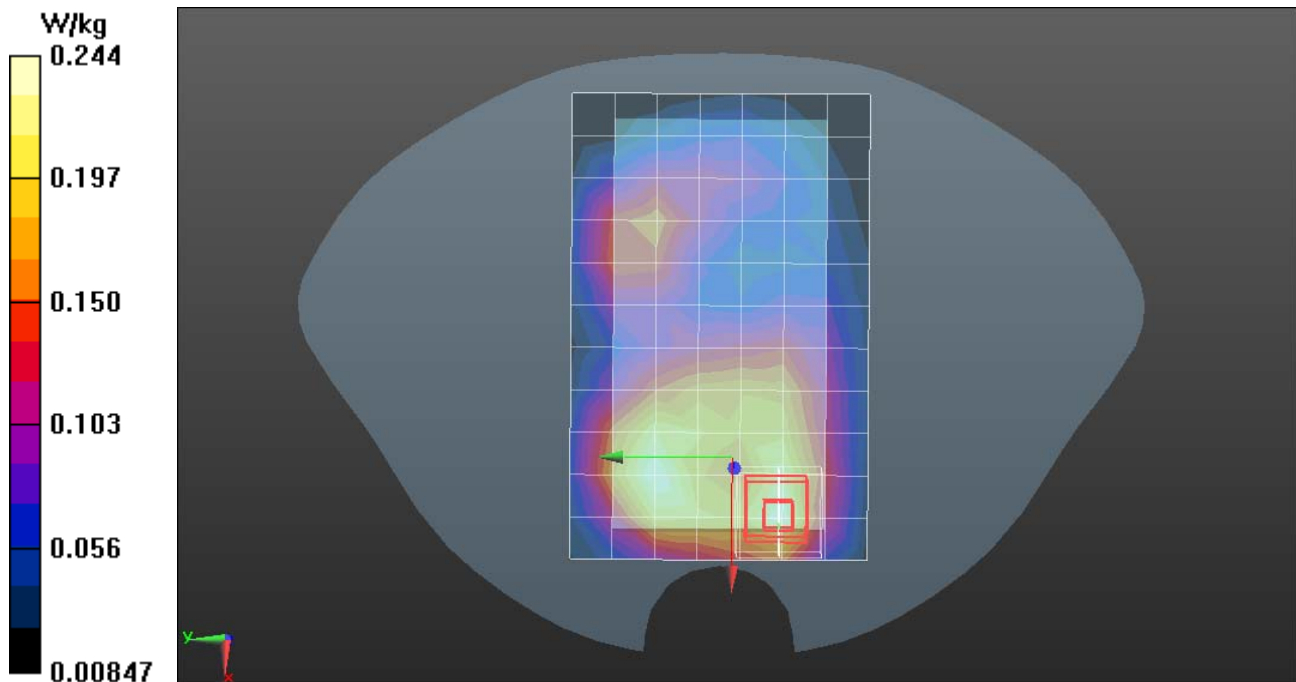



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS1900- Body Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz);

Frequency: 1910MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ PCS1900 Body Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.332 mW/g

PCS1900/ PCS1900 Body Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.752 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.476 mW/g

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.358 W/kg

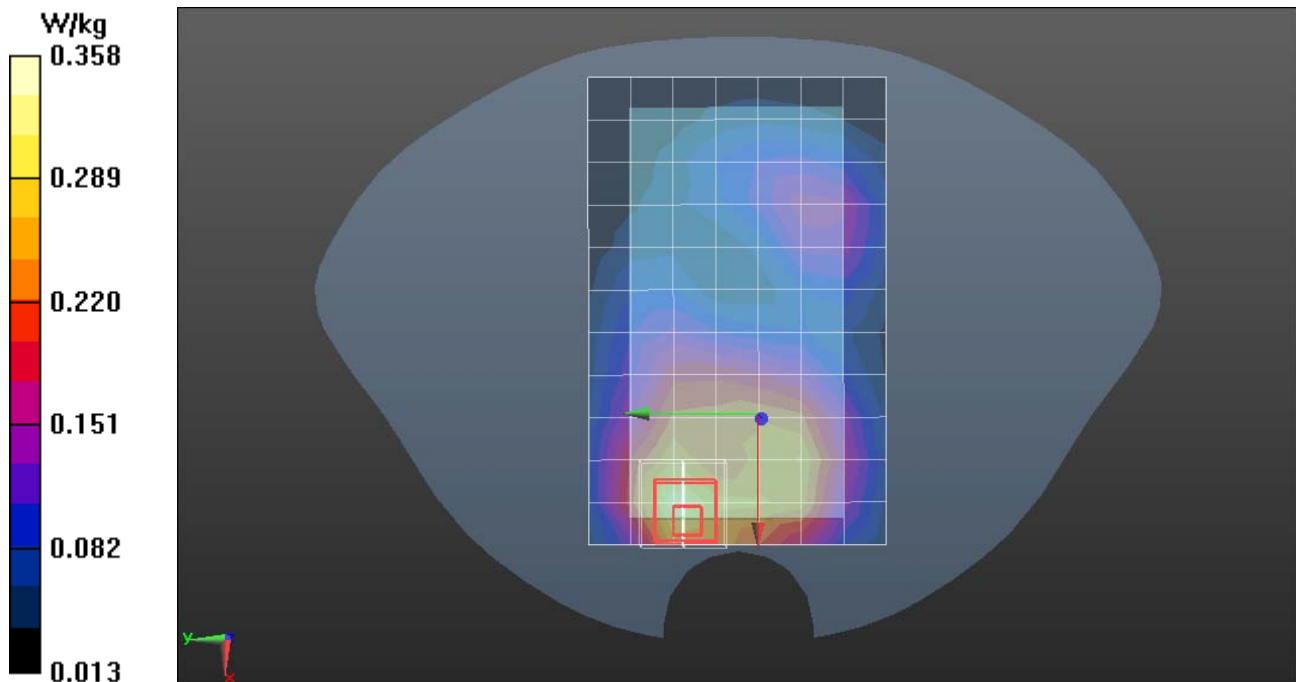



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS1900- Body Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/GPRS1900 Body Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.235 mW/g

GPRS1900/GPRS1900 Body Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.038 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.348 mW/g

SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.249 W/kg

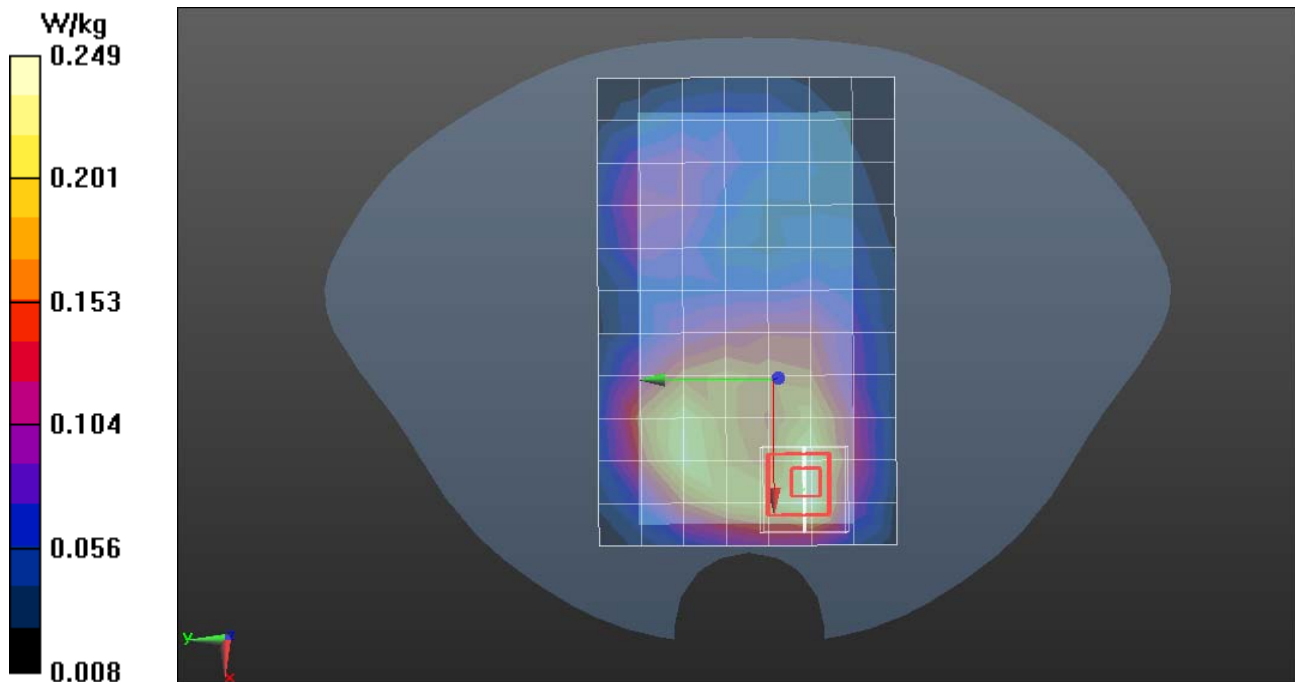



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS1900- Body Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.0 - 1910.0 MHz); Frequency: 1910MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/GPRS1900 Body Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.371 mW/g

GPRS1900/GPRS1900 Body Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.650 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.563 mW/g

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.403 W/kg

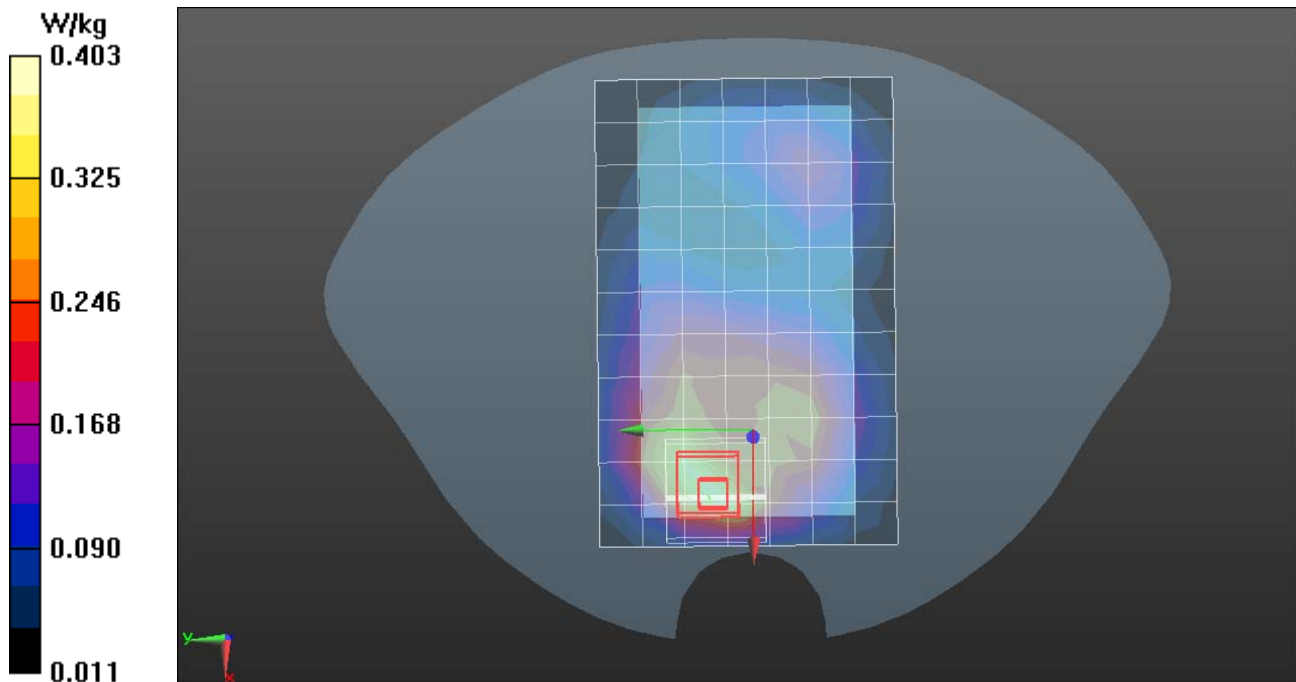



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE1900- Body Worn Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: Generic GSM; Communication System Band: EDGE 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/EDGE1900 Body Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.209 mW/g

EDGE1900/EDGE1900 Body Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.060 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.318 mW/g

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.221 W/kg

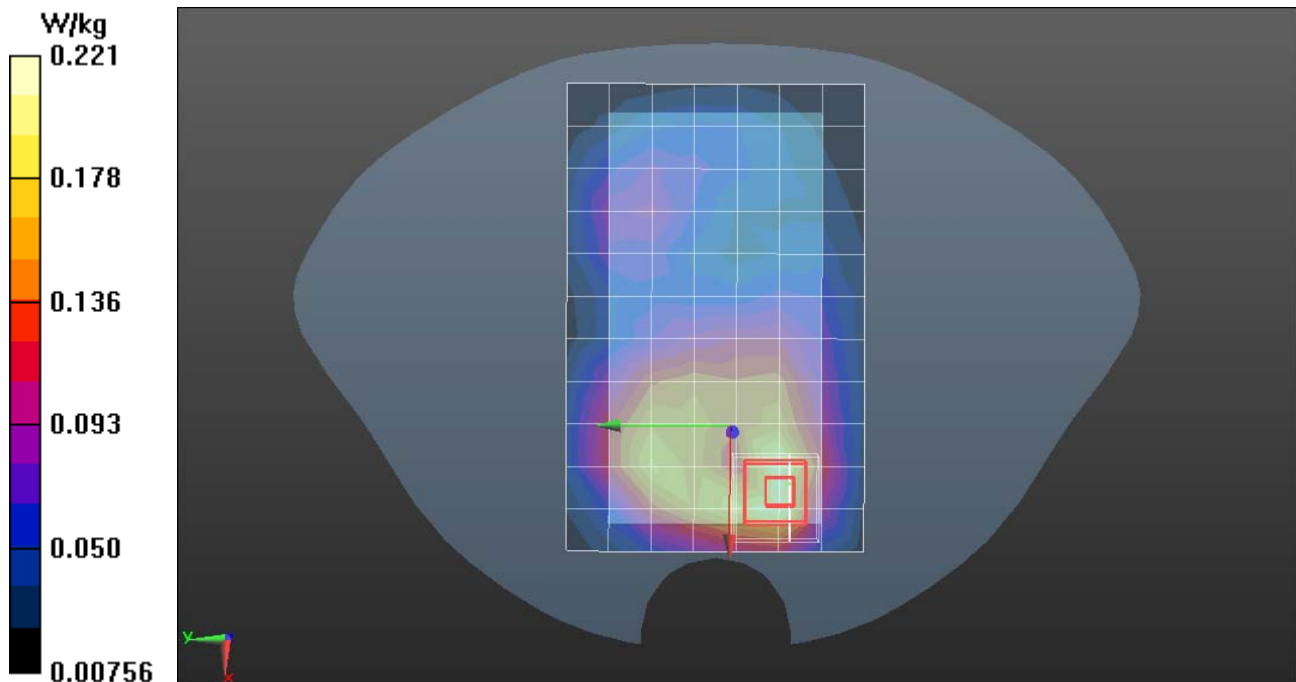



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE1900- Body Worn Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: EDGE 1900 (1850.0 - 1910.0 MHz); Frequency: 1909.8MHz; Communication System Duty cycle:1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{ mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/EDGE1900 Body Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.409 mW/g


EDGE1900/EDGE1900 Body Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.319 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.583 mW/g

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.433 W/kg

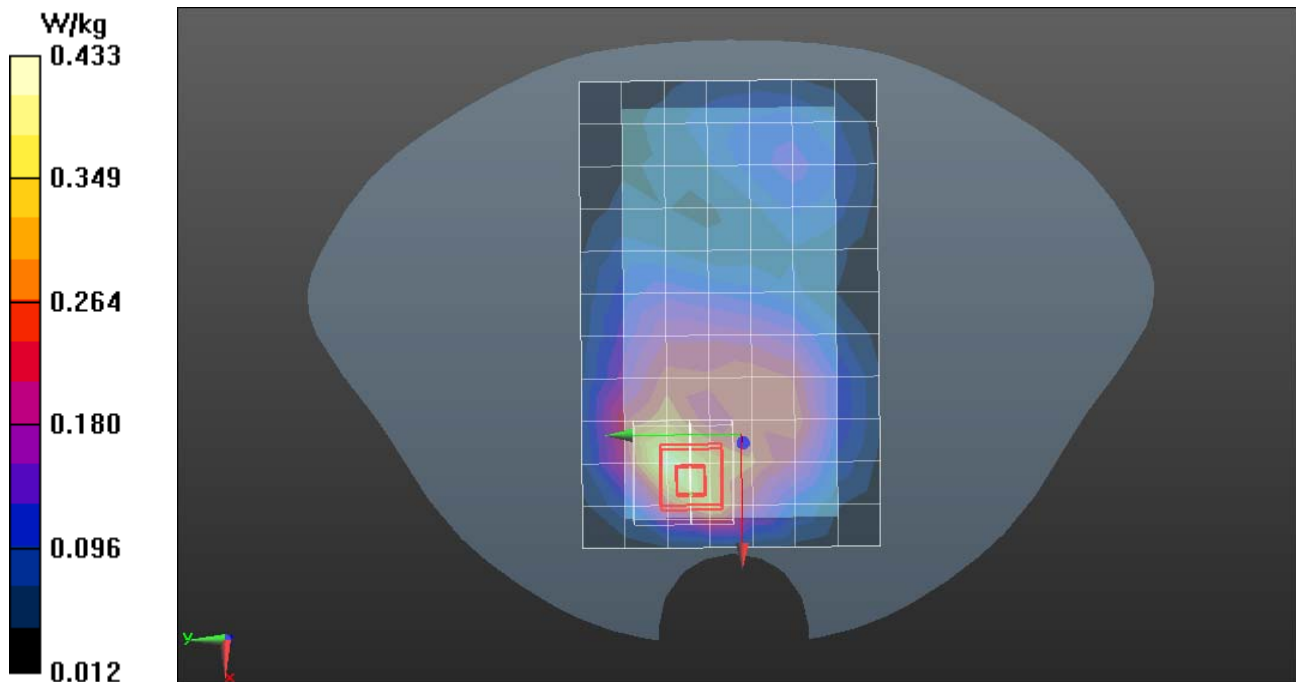



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II-Right Head Cheek High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Cheek High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.335 W/kg


WCDMA/Right Head Cheek High CH9538/Zoom Scan (8x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.739 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.430 mW/g

SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.341 W/kg

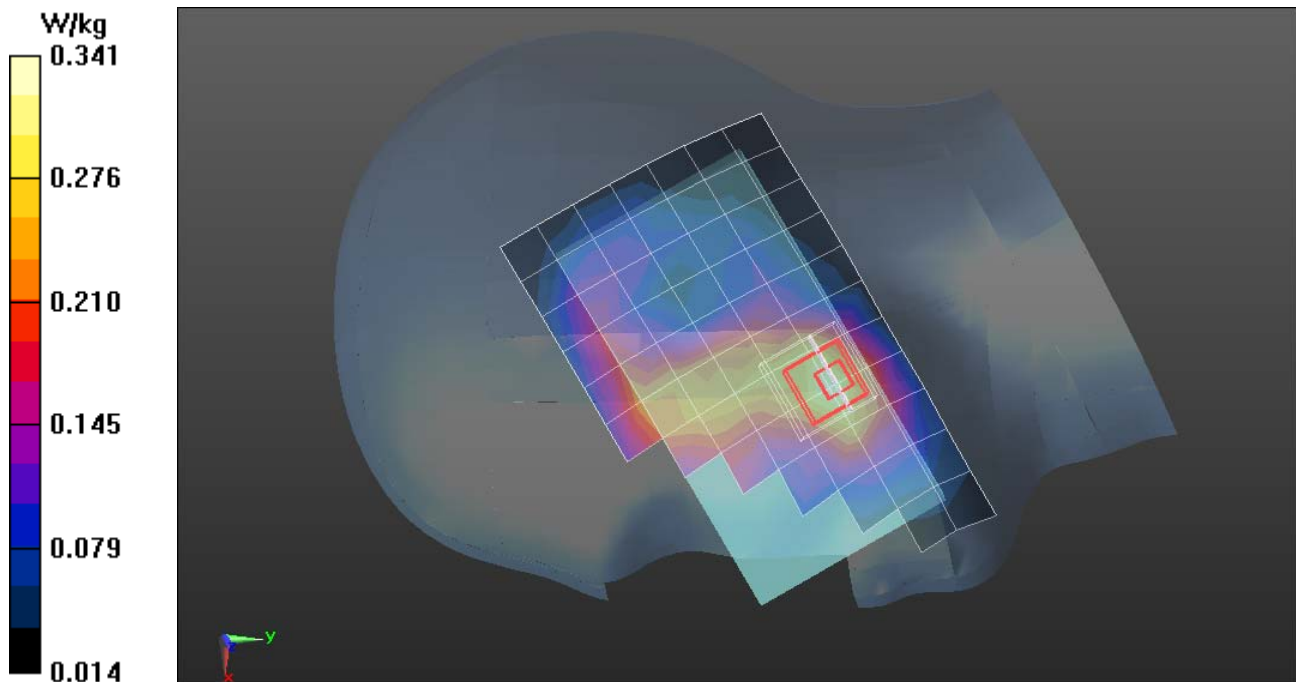



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II-Right Head Tilted High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Tilted High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.227 W/kg


WCDMA/Right Head Tilted High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.905 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.343 mW/g

SAR(1 g) = 0.208 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.266 W/kg

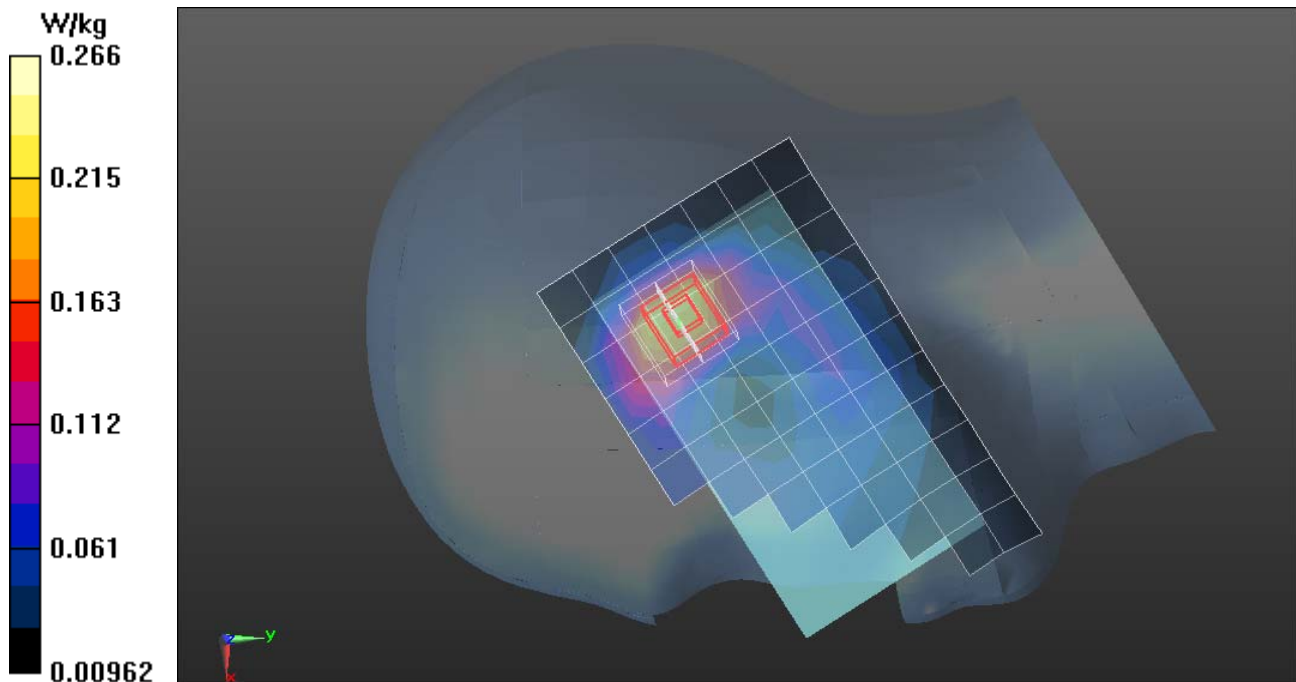



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II-Left Head Cheek High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Cheek High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.635 W/kg


WCDMA/Left Head Cheek High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.127 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.864 mW/g

SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.646 W/kg

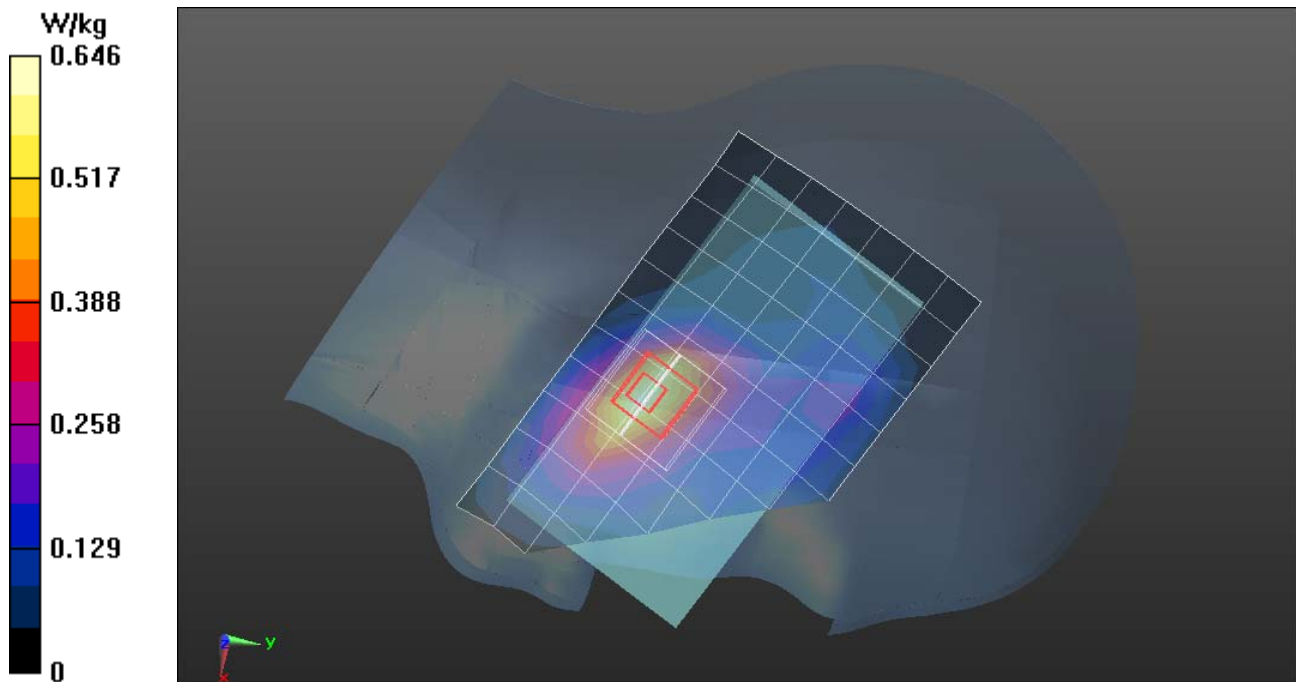



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II-Left Head Tilted High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; 1.403 mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.64, 7.64, 7.64); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Tilted High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.250 W/kg


WCDMA/Left Head Tilted High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 12.934 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.365 mW/g

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.284 W/kg

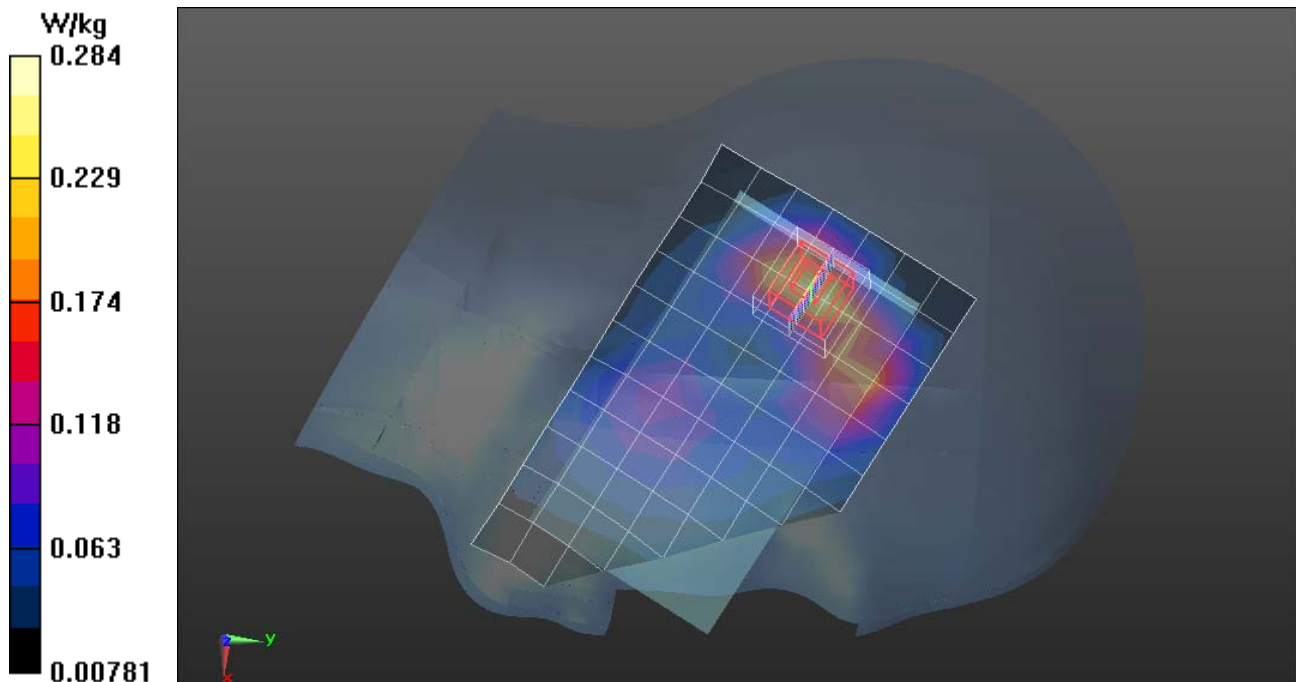



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V-Right Head Cheek Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1;

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012 :
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Right Cheek Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.141 mW/g


Band V/Right Cheek Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.864 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.162 mW/g

SAR(1 g) = 0.130 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.146 W/kg

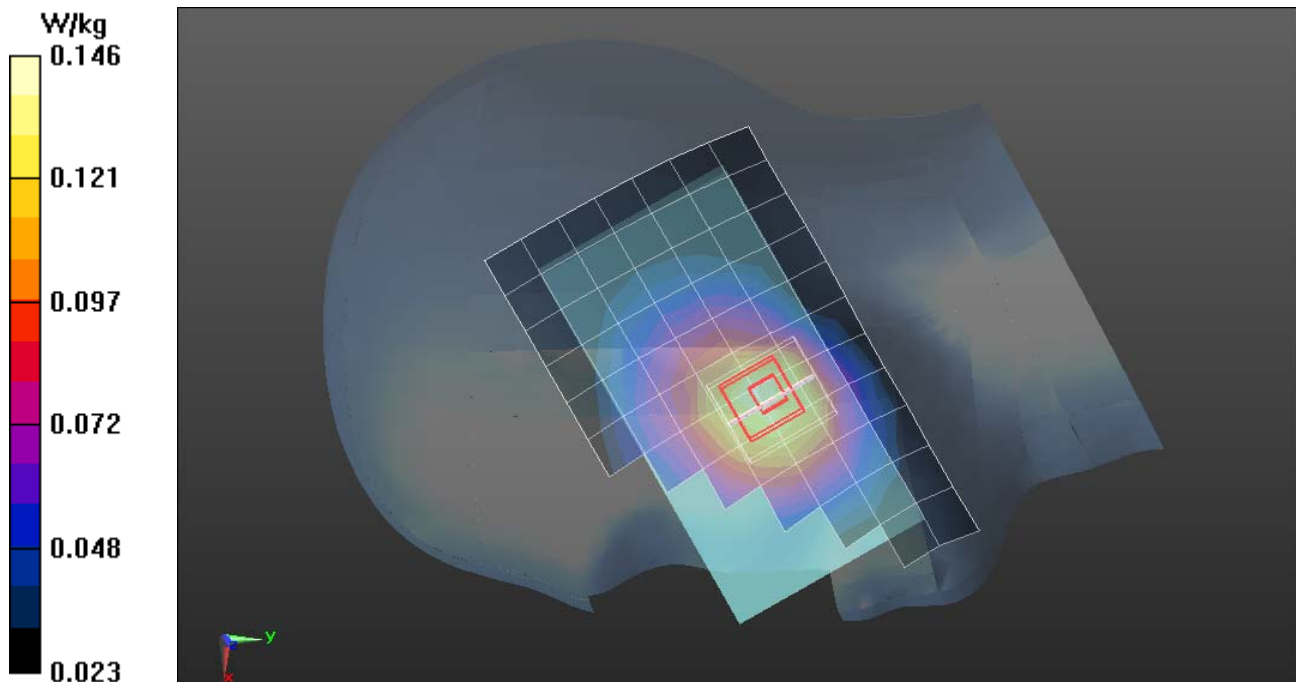



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V-Right Head Tilted Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Right Tilted Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.122 mW/g


Band V/Right Tilted Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.571 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.115 mW/g

SAR(1 g) = 0.103 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.108 mW/g

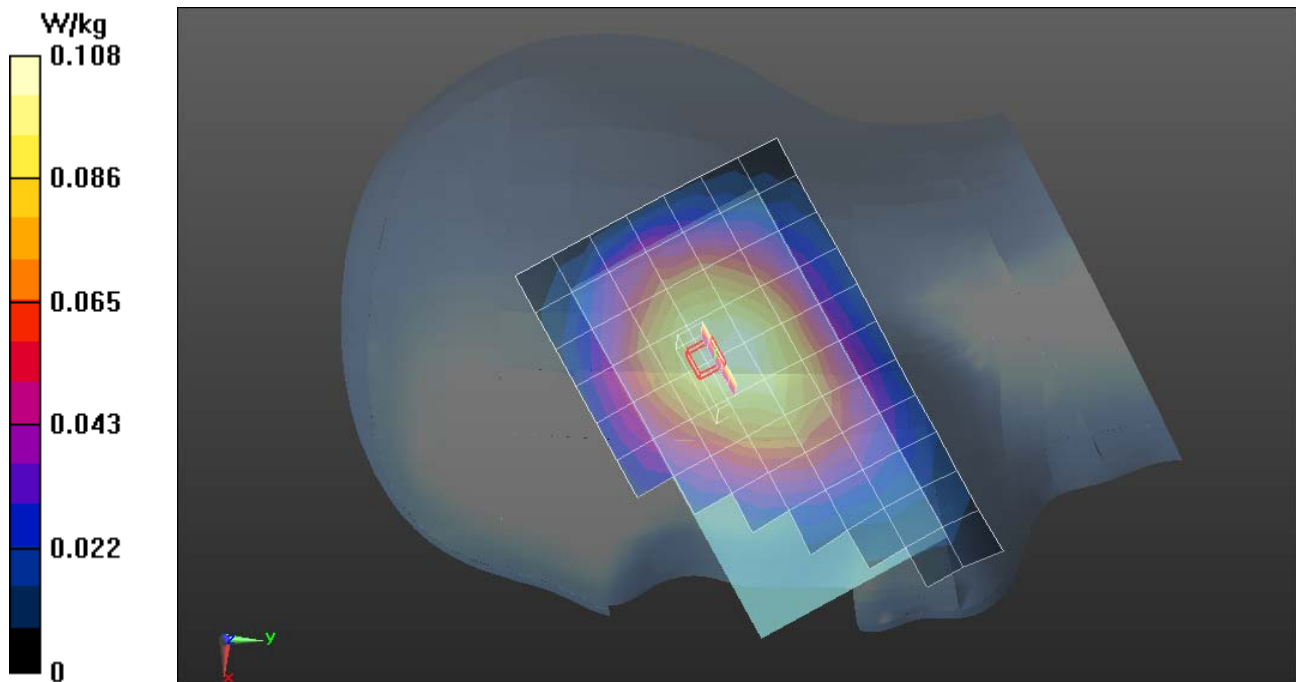



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V-Left Head Cheek Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1;

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Left Cheek Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.111 mW/g


Band V/Left Cheek Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.495 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.127 mW/g

SAR(1 g) = 0.104 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.115 W/kg

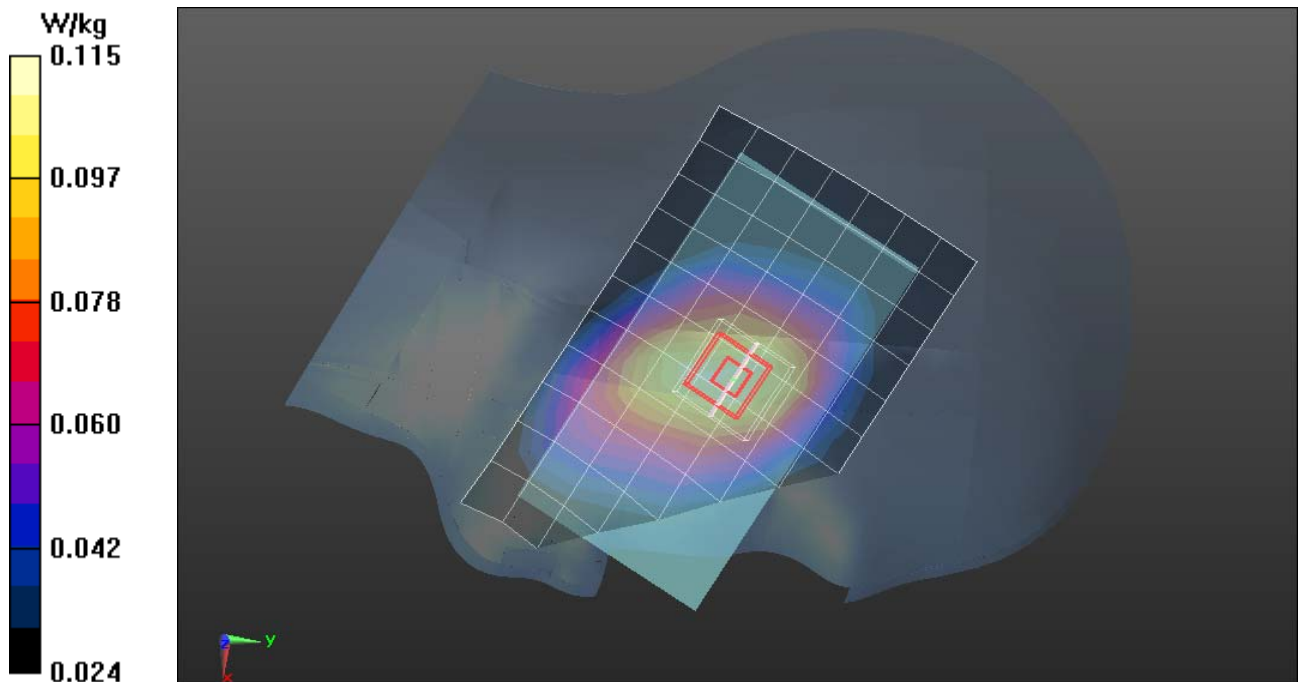



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V-Left Head Tilted Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1;

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Left Tilted Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.111 mW/g


Band V/Left Tilted Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.428 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.124 mW/g

SAR(1 g) = 0.101 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.113 W/kg

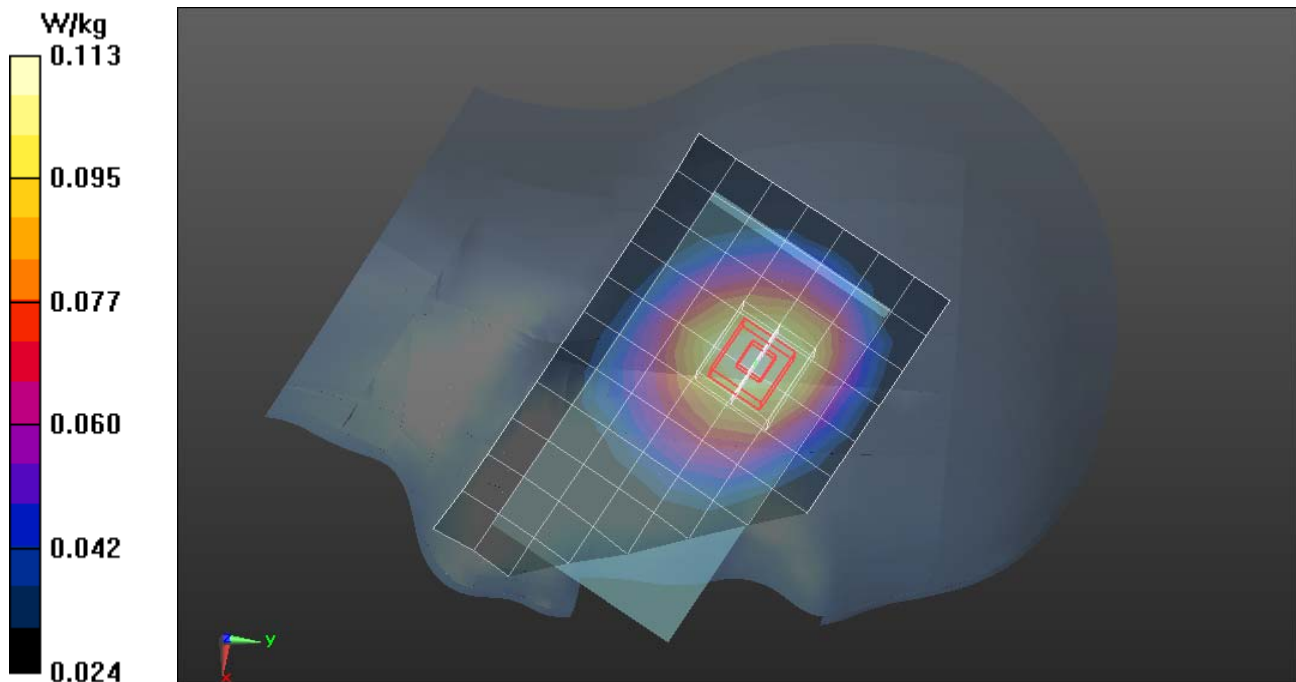



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II-Body Up High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Up High CH9538/Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.516 W/kg


WCDMA/Body Up High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 11.893 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.762 mW/g

SAR(1 g) = 0.438 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.571 W/kg

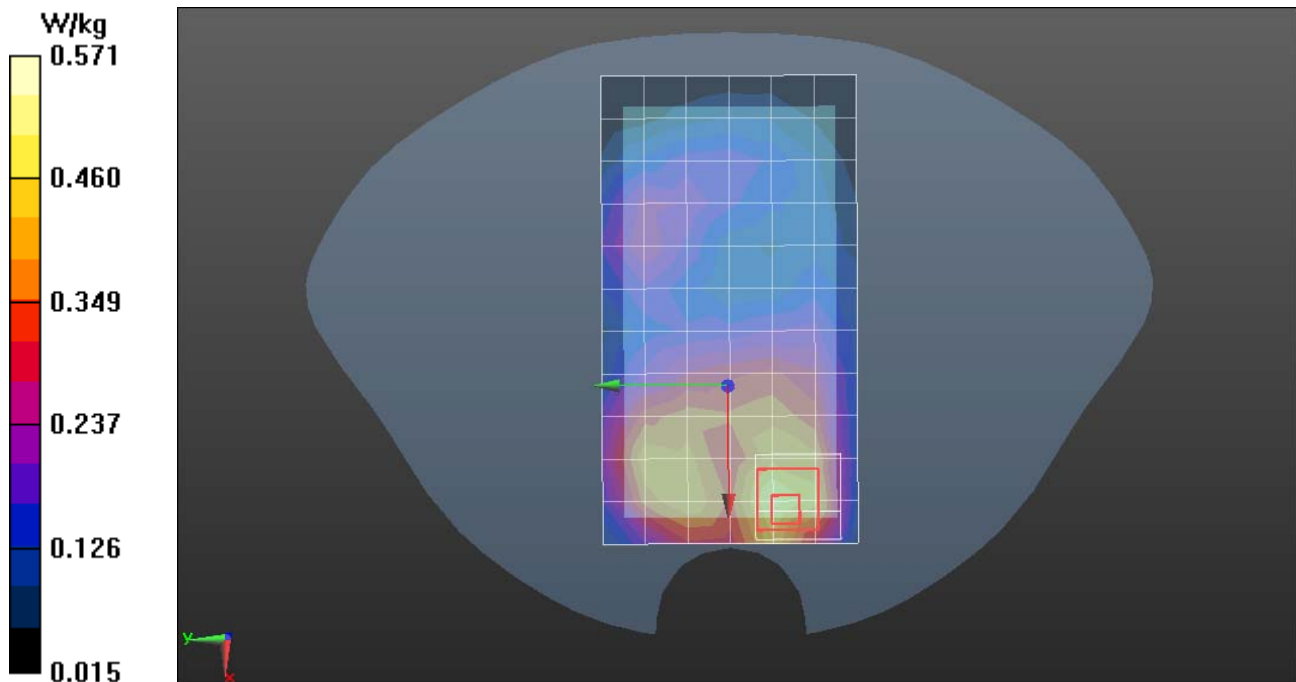



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II- Body Down High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1907.6 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Down High CH9538/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.942 W/kg


WCDMA/Body Down High CH9538/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.567 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.371 mW/g

SAR(1 g) = 0.783 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 1.04 W/kg

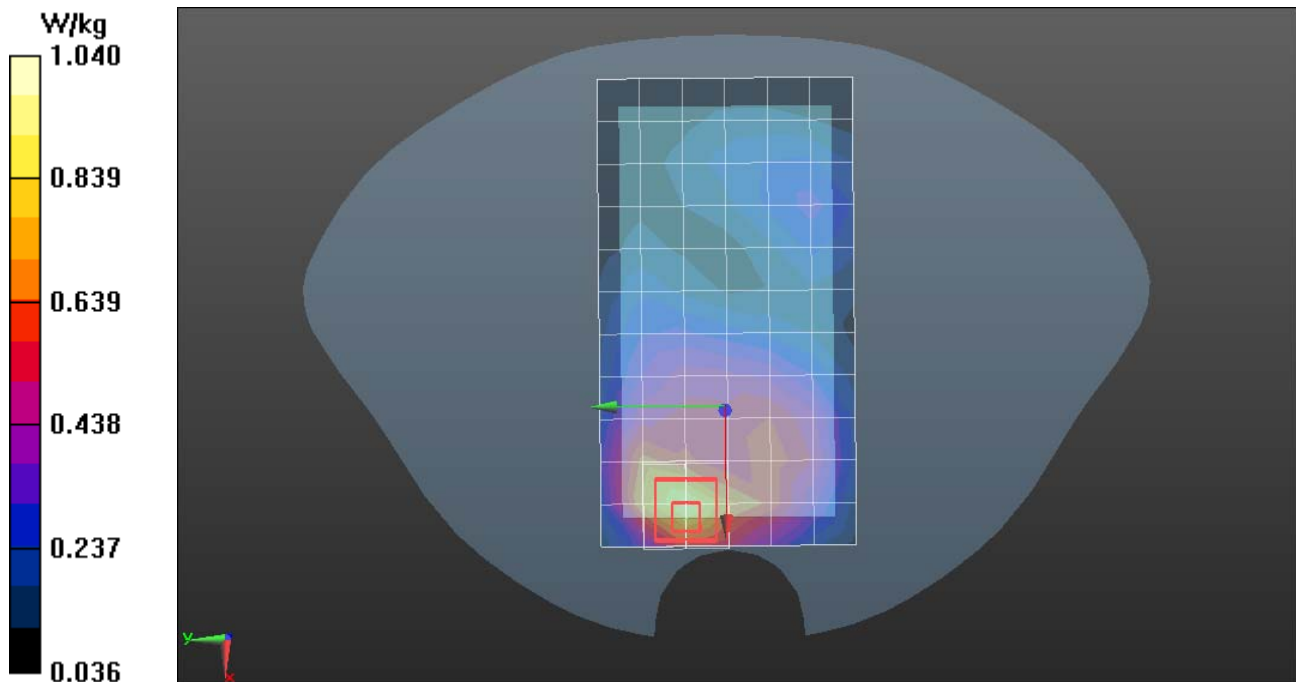



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V- Body Up Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1;

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C
Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Up Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.153 mW/g


Band V/Body Up Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.621 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.175 mW/g

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.154 mW/g

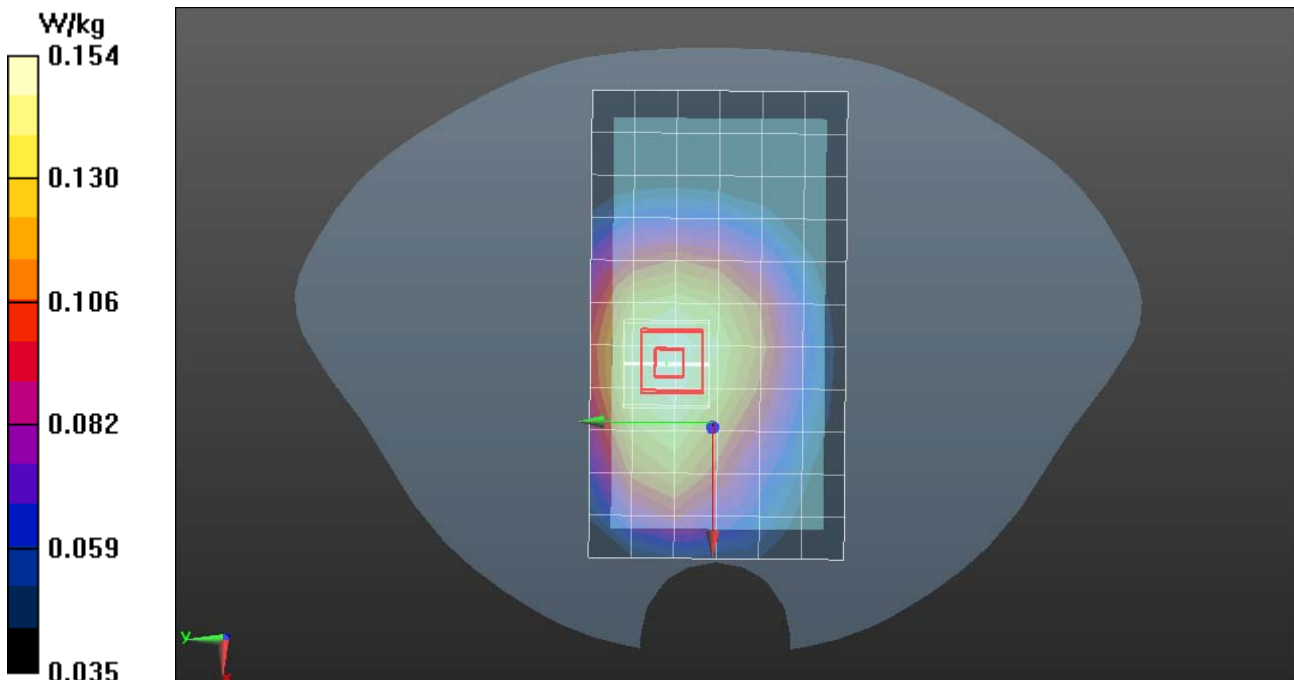



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V- Body Down Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Down Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.277 mW/g


Band V/Body Down Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.580 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.320 mW/g

SAR(1 g) = 0.248 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.281 W/kg

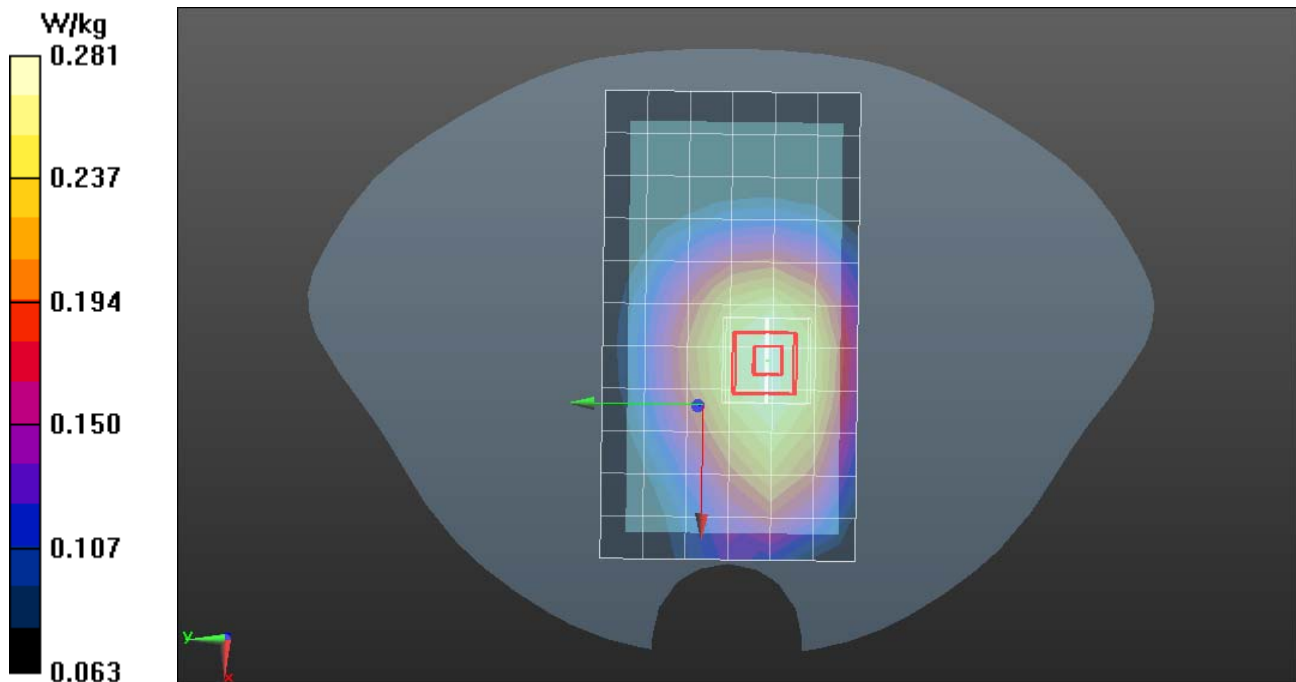



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b-Right Head Cheek Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.818$ mho/m; $\epsilon_r = 37.997$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/Right Cheek Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 mW/g


IEEE 802.11b/Right Cheek Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.730 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.259 mW/g

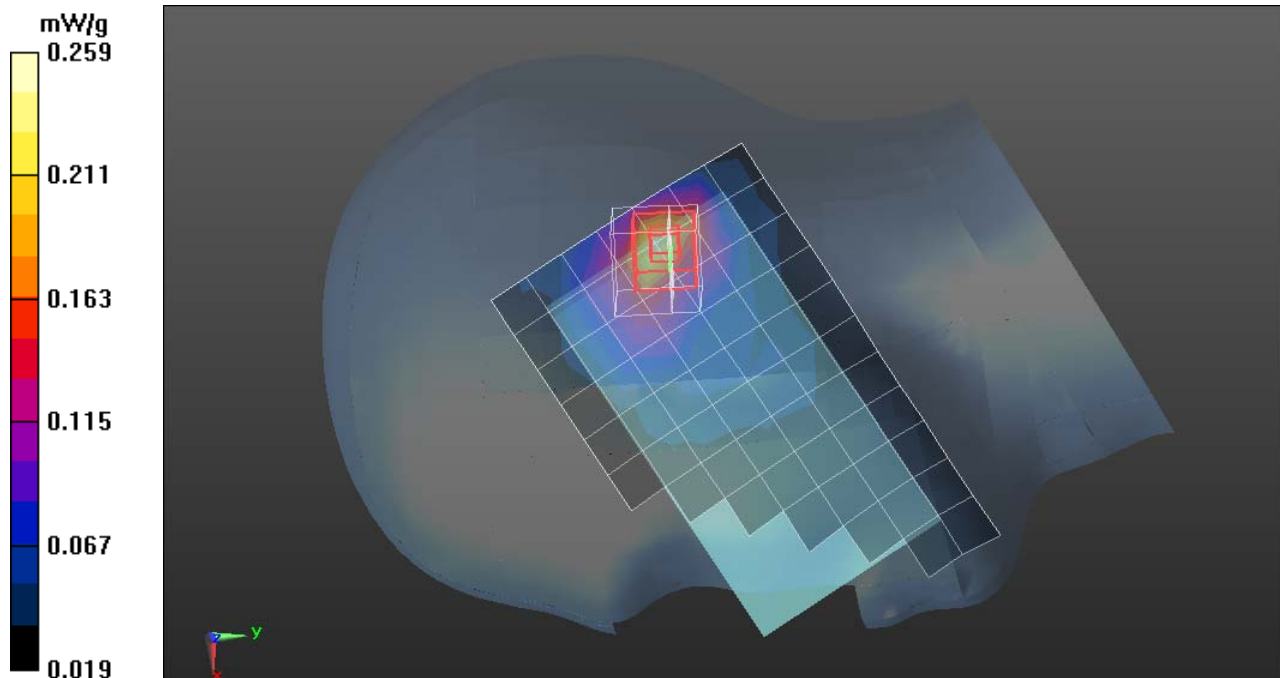



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b-Right Head Tilted Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.817$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/Right Tilted Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.471 mW/g


IEEE 802.11b/Right Tilted Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.717 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.313 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.498 mW/g

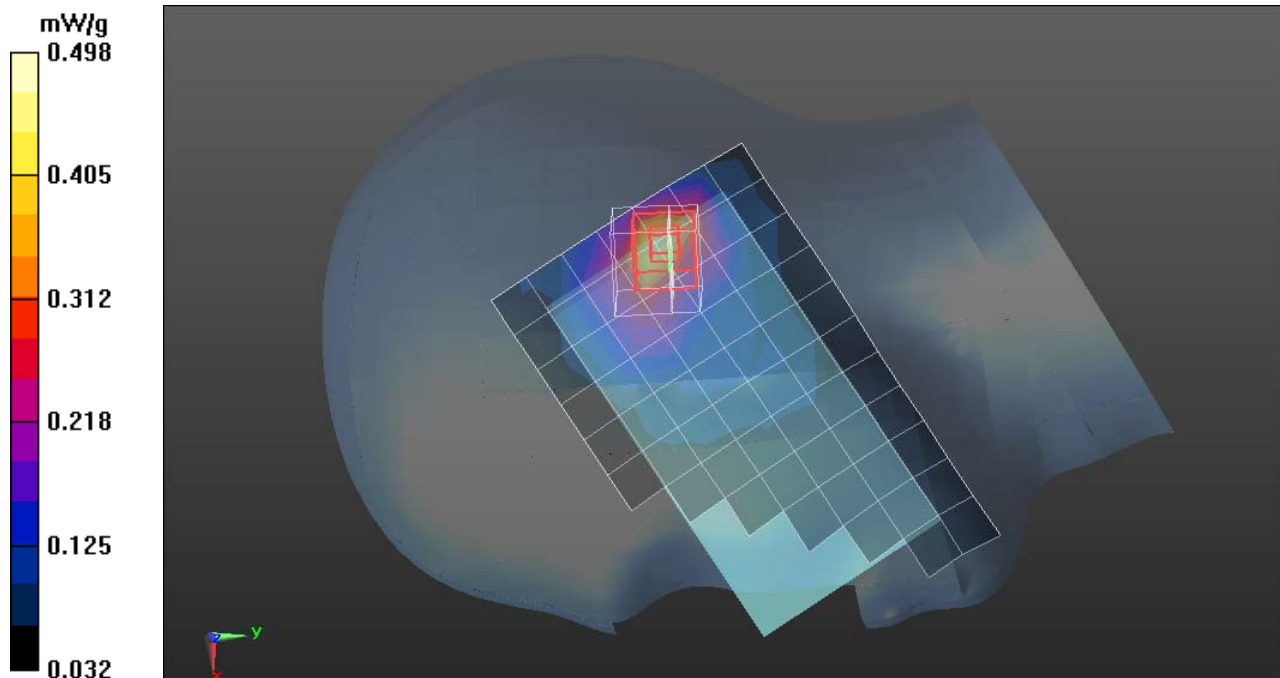



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b-Left Head Cheek Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /Left Cheek Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.311 mW/g


IEEE 802.11b /Left Cheek Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.897 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.736 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.177 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

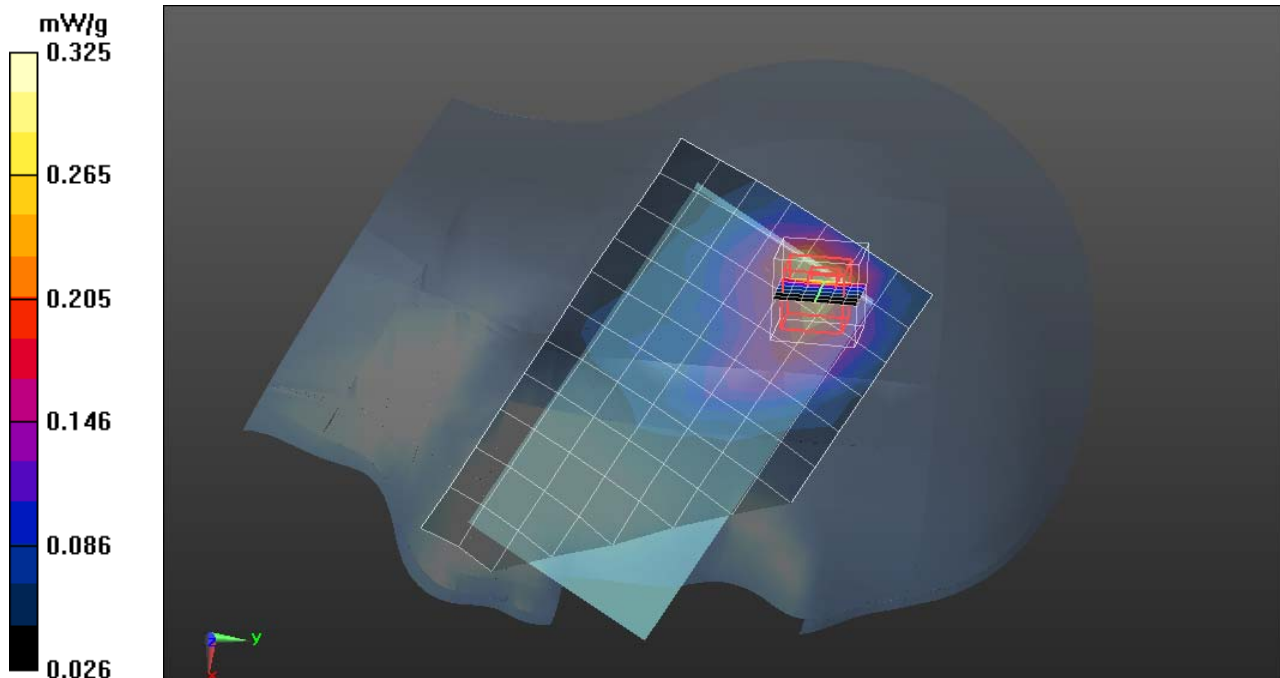



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b-Left Head Tilted Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.823$ mho/m; $\epsilon_r = 38.149$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /Left Tilted Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.313 mW/g


IEEE 802.11b /Left Tilted Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.732 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.338 mW/g

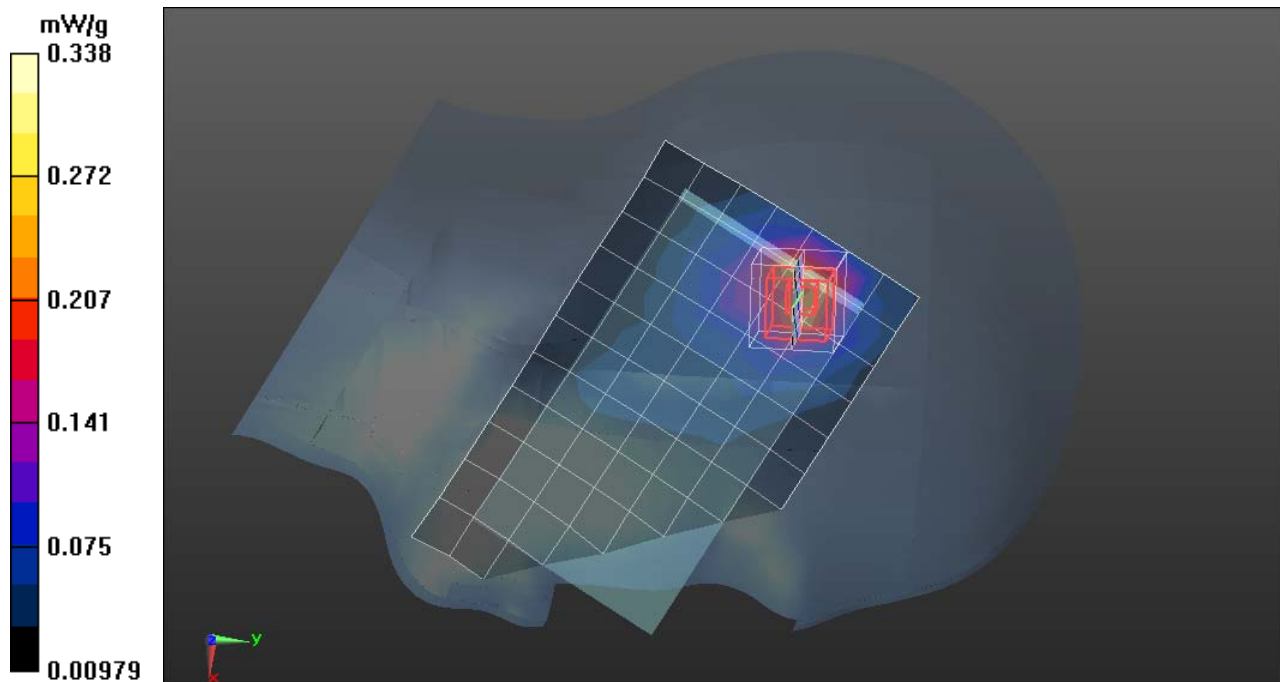



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b- Body Up Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Up Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.128 mW/g


IEEE 802.11b /802.11b Body Up Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.785 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.268 mW/g

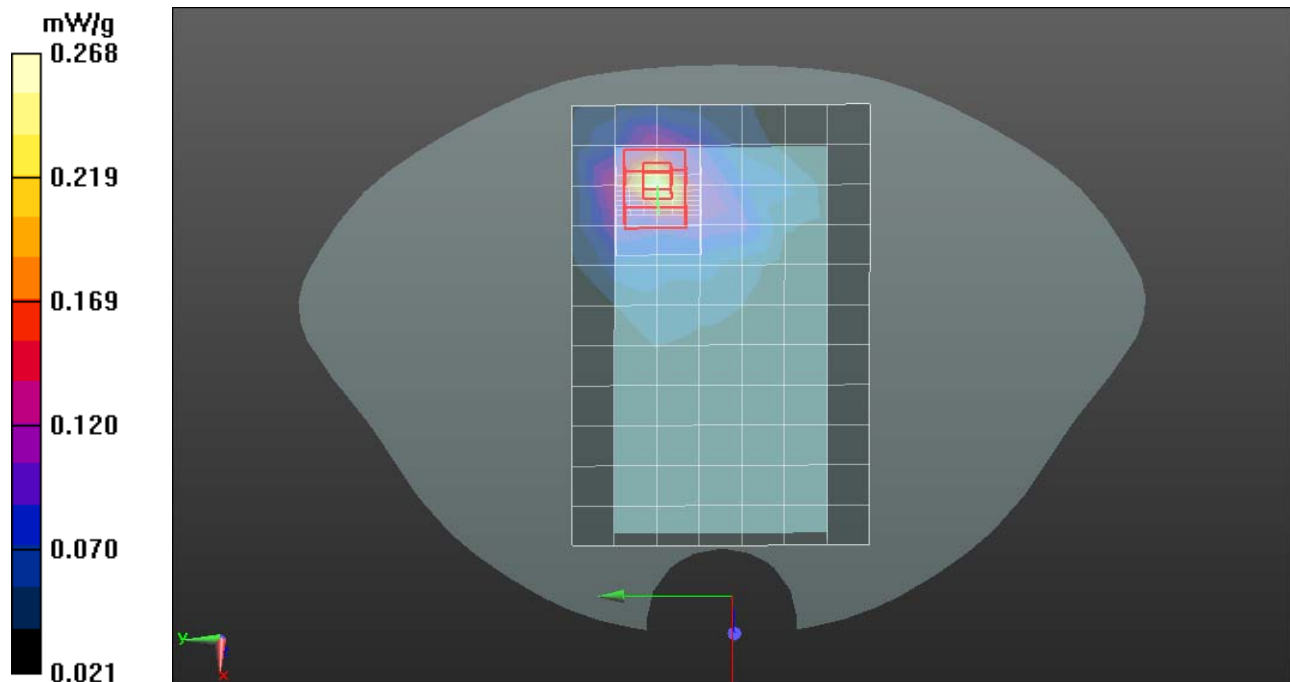



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b- Body Down Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.948$ mho/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b /802.11b Body Down Low CH1/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.344 mW/g

IEEE 802.11b /802.11b Body Down Low CH1/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.250 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.350 mW/g

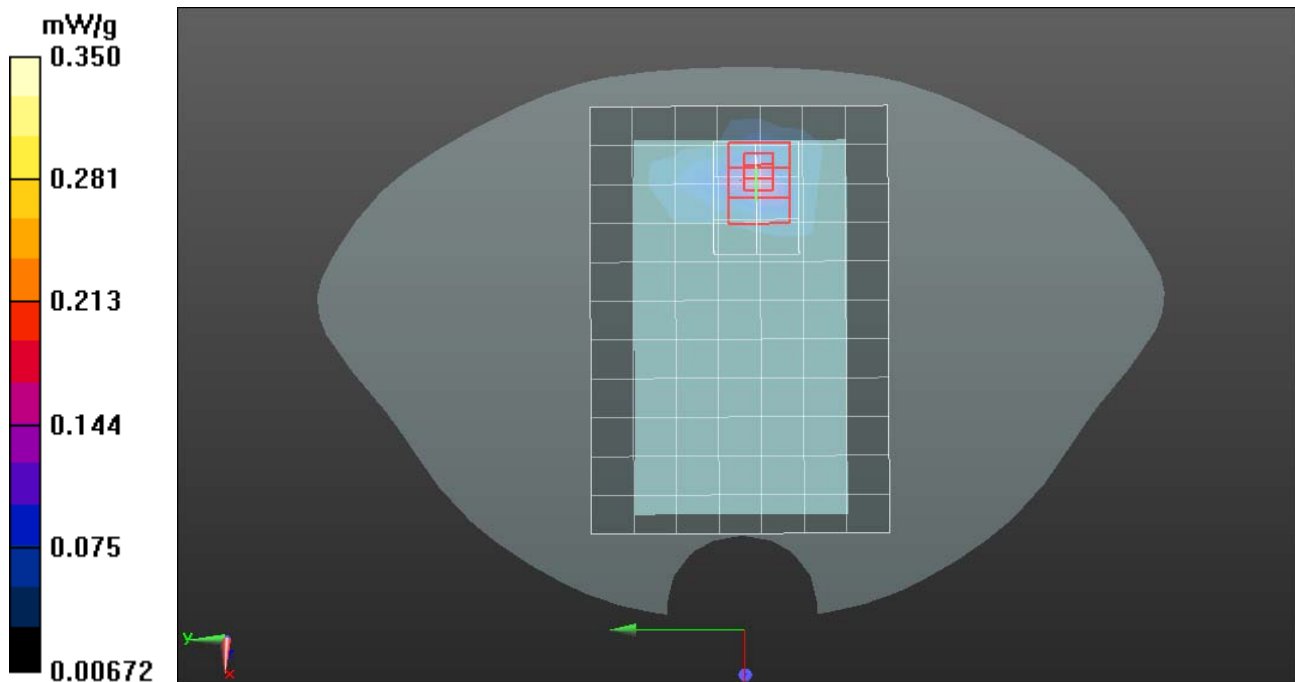



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Body-Hotspot Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.405 mW/g


GSM850/ Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.622 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.456 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.403 mW/g

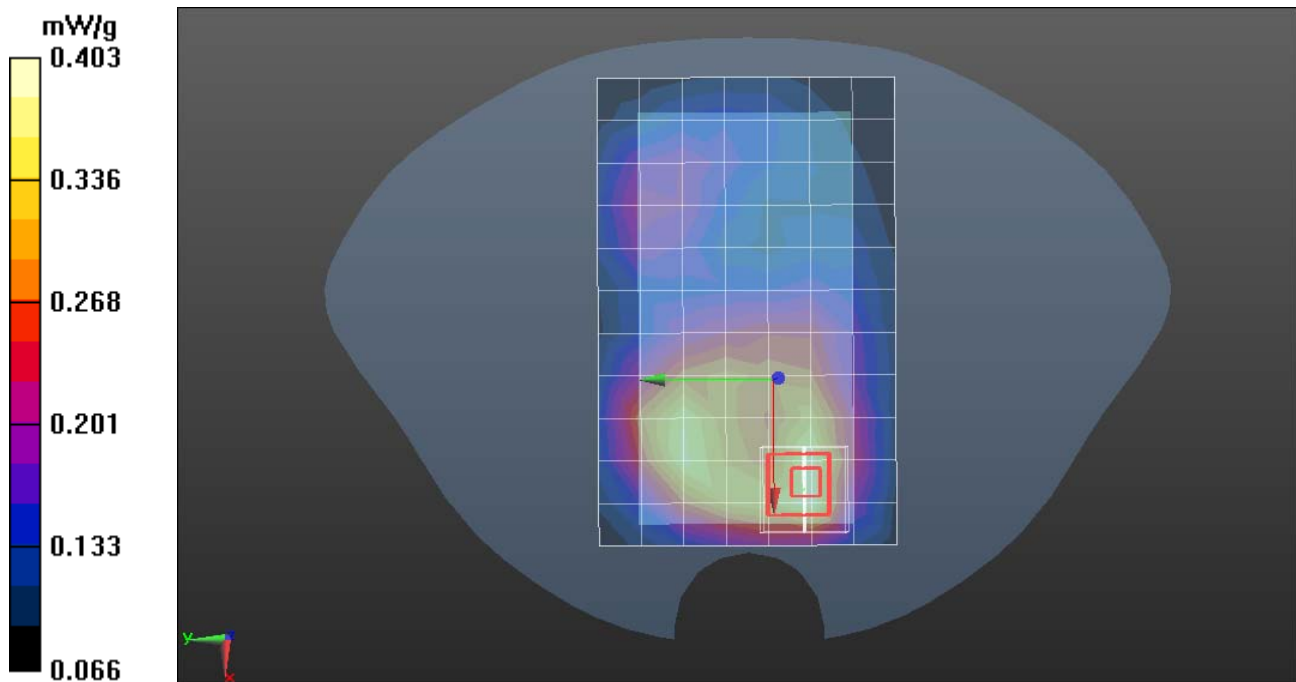



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Body-Hotspot Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.572 mW/g


GSM850/ Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.693 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.518 mW/g; SAR(10 g) = 0.334 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

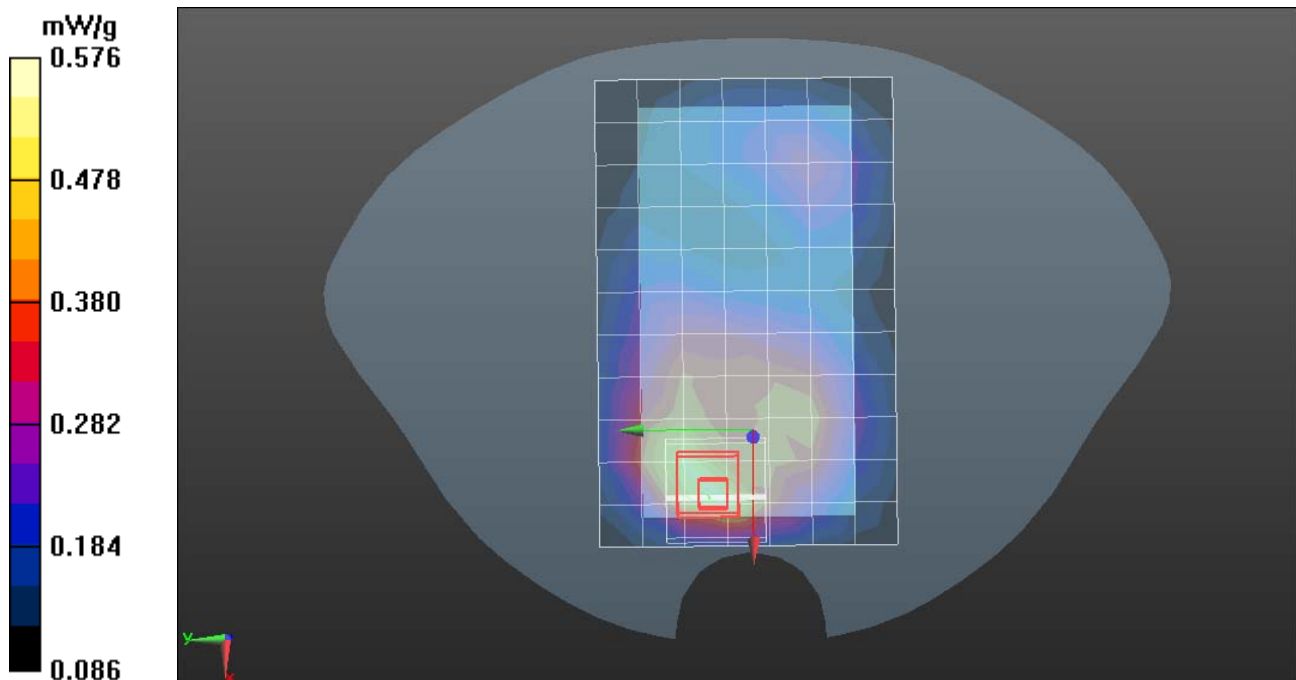



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Body-Hotspot Bottom High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Bottom High CH251/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.468 mW/g


GSM850/ Bottom High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.770 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.552 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

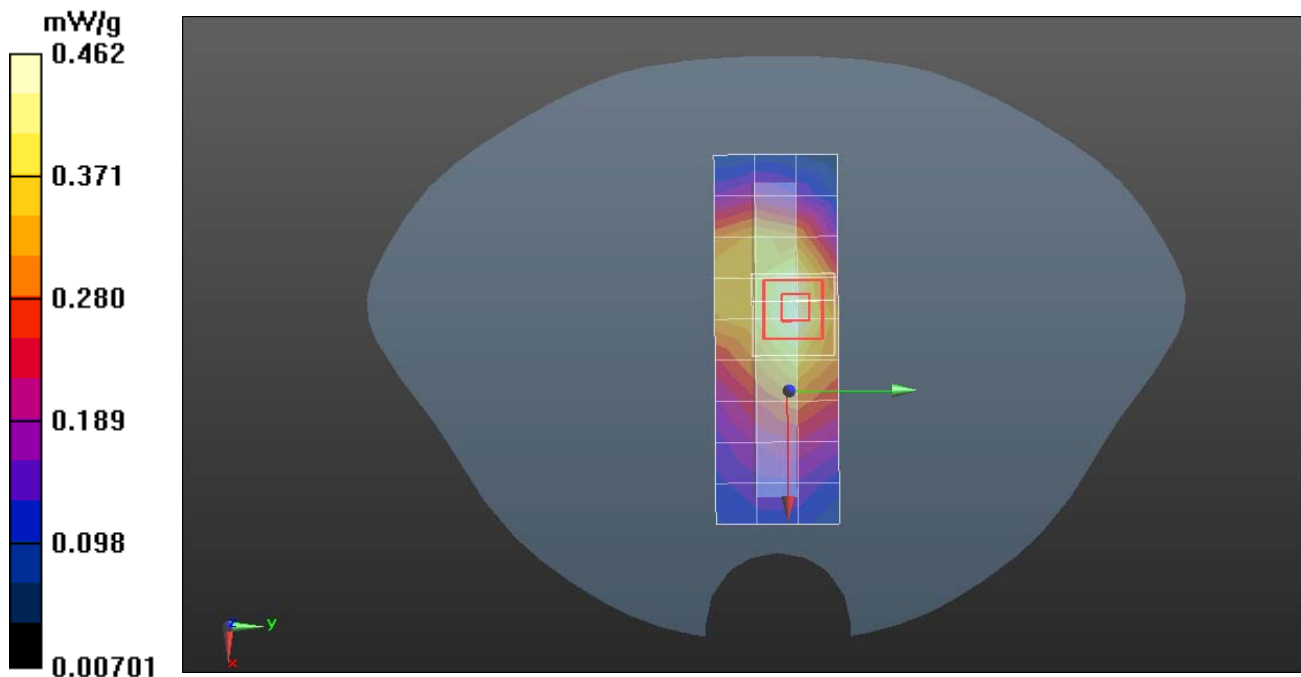



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GSM 850-Body-Hotspot Left High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/ Left High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.206 mW/g


GSM850/ Left High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.081 V/m; Power Drift = 0.05dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

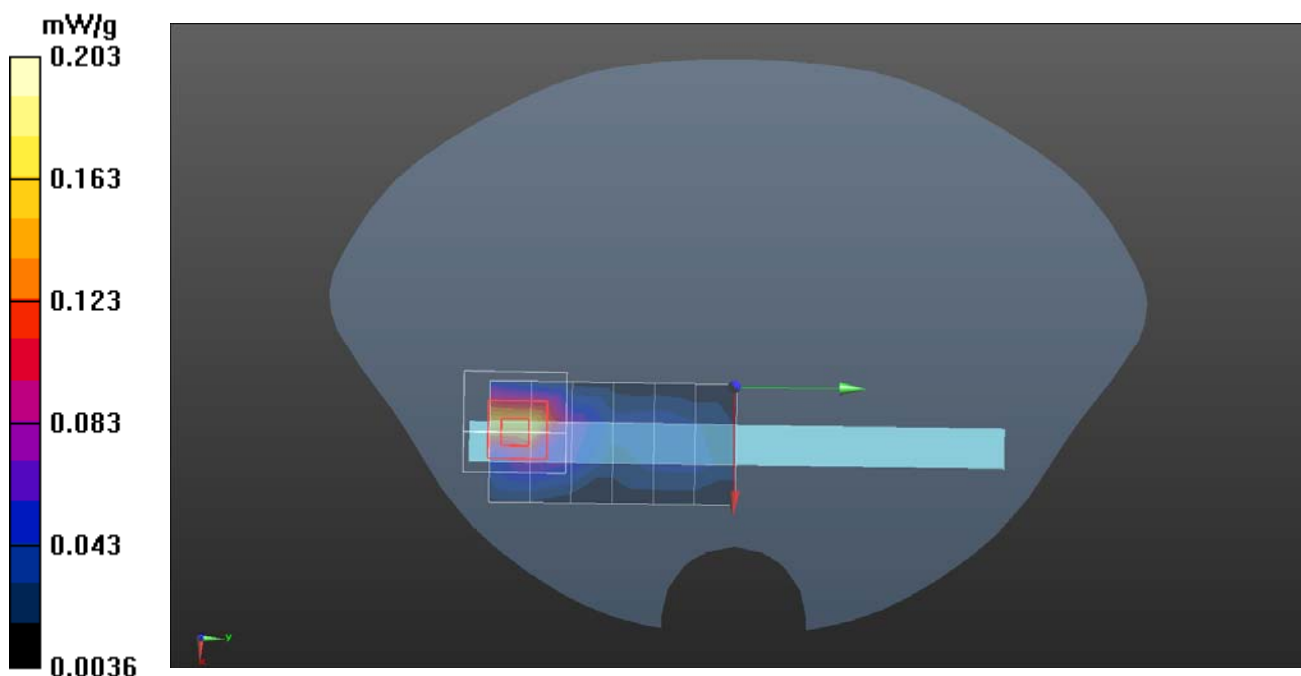



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS850-Body-Hotspot Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.404 mW/g


GPRS850/ Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.722 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.653 W/kg

SAR(1 g) = 0.307 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

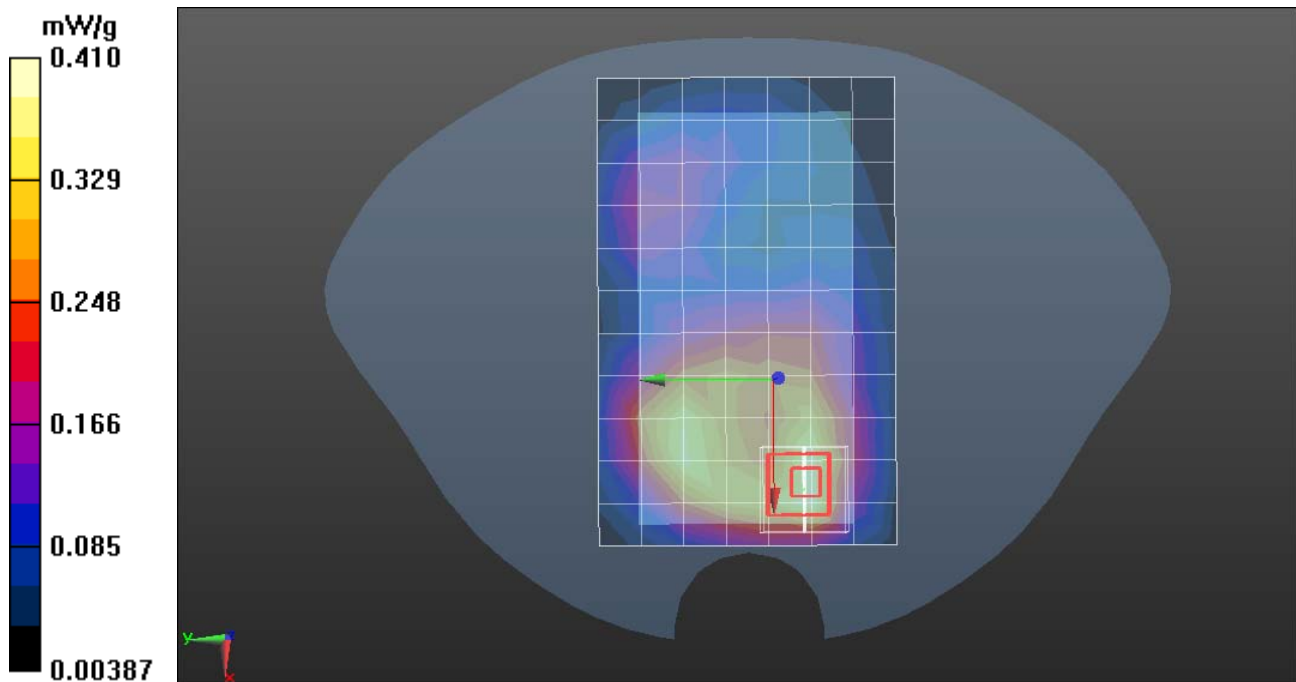



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS850-Body-Hotspot Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.497 mW/g


GPRS850/ Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.852 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.857 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.288 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

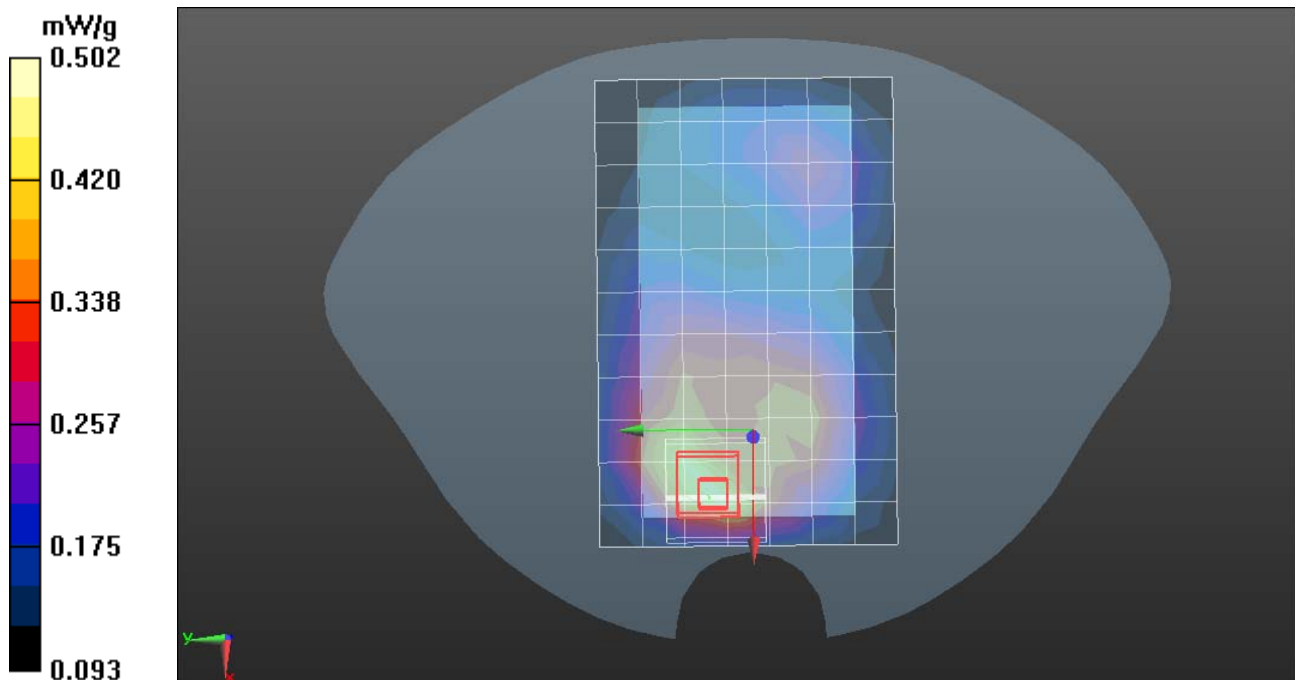



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS850-Body-Hotspot Bottom High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Bottom High CH251/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.473 mW/g


GPRS850/ Bottom High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.770 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.512 W/kg

SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

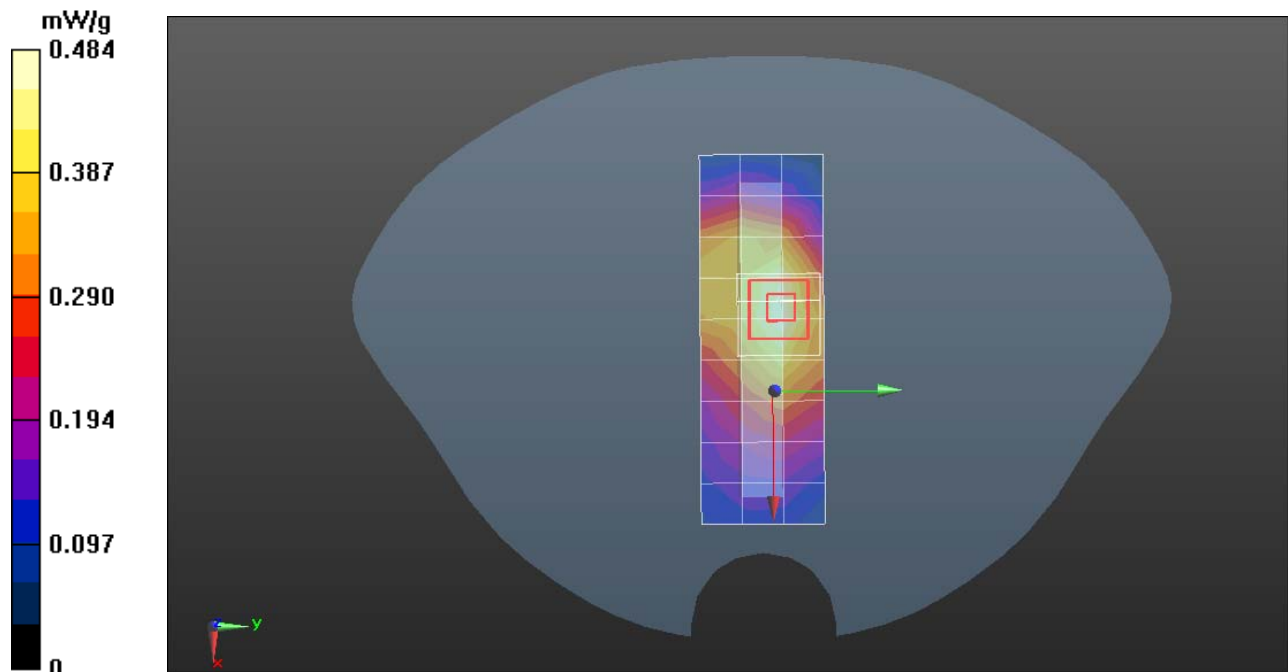



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

GPRS850-Body-Hotspot Left High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS850/ Left High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.323 mW/g


GPRS850/ Left High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.081 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.325 mW/g

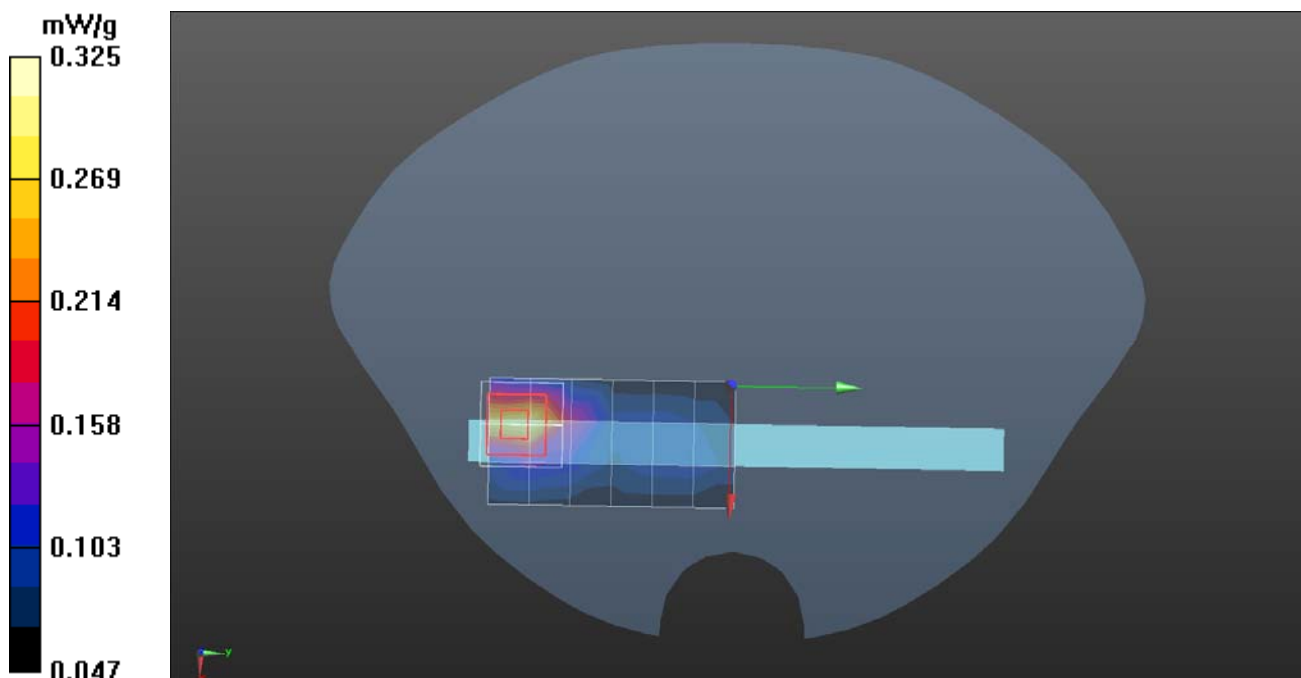



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE850-Body-Hotspot Up High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:11111111111111

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Up High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.445 mW/g


EDGE850/ Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.622 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.452 mW/g

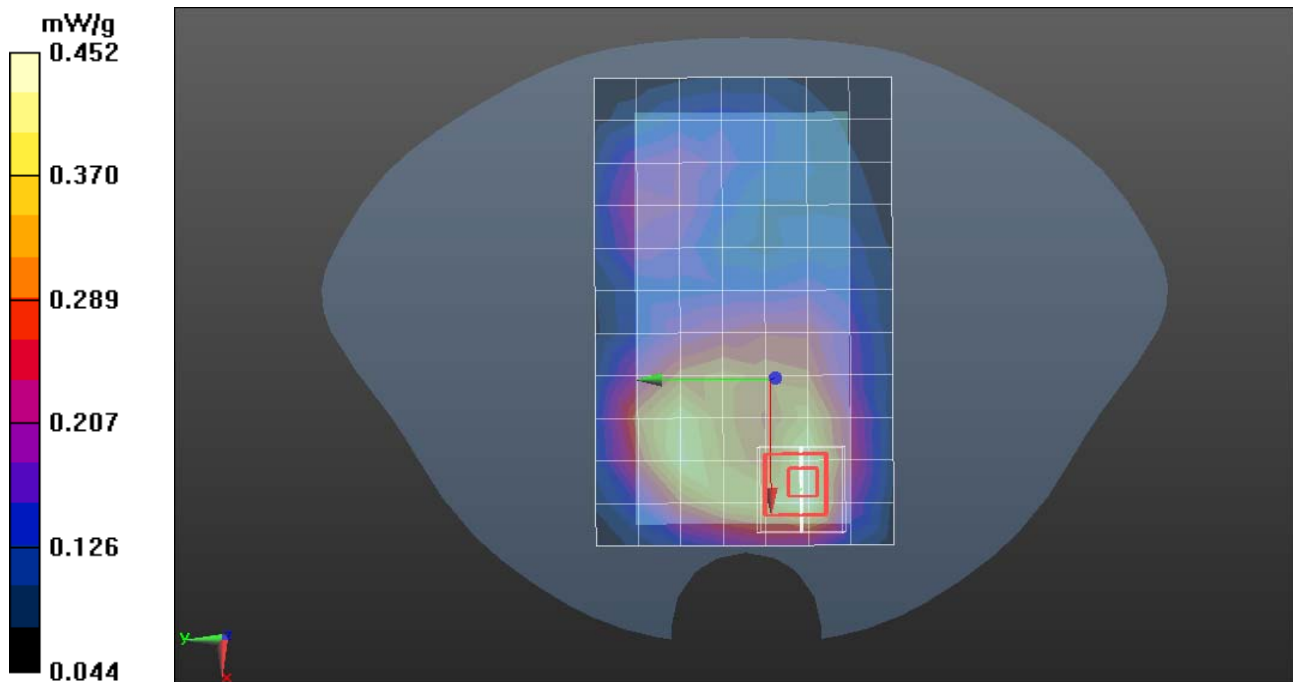



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE850-Body-Hotspot Down High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Down High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.569 mW/g


EDGE850/ Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.871 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.581 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.291 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

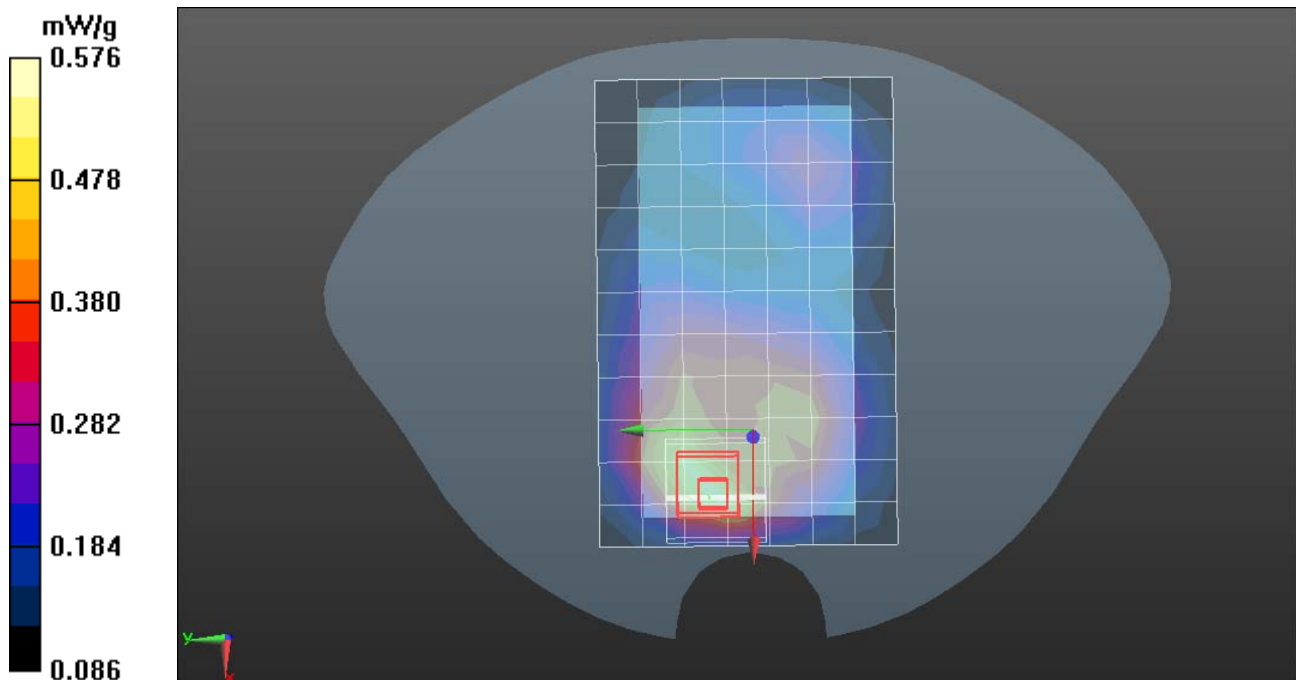



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE850-Body-Hotspot Bottom High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Bottom High CH251/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.443 mW/g


EDGE850/ Bottom High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.770 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.489 W/kg

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

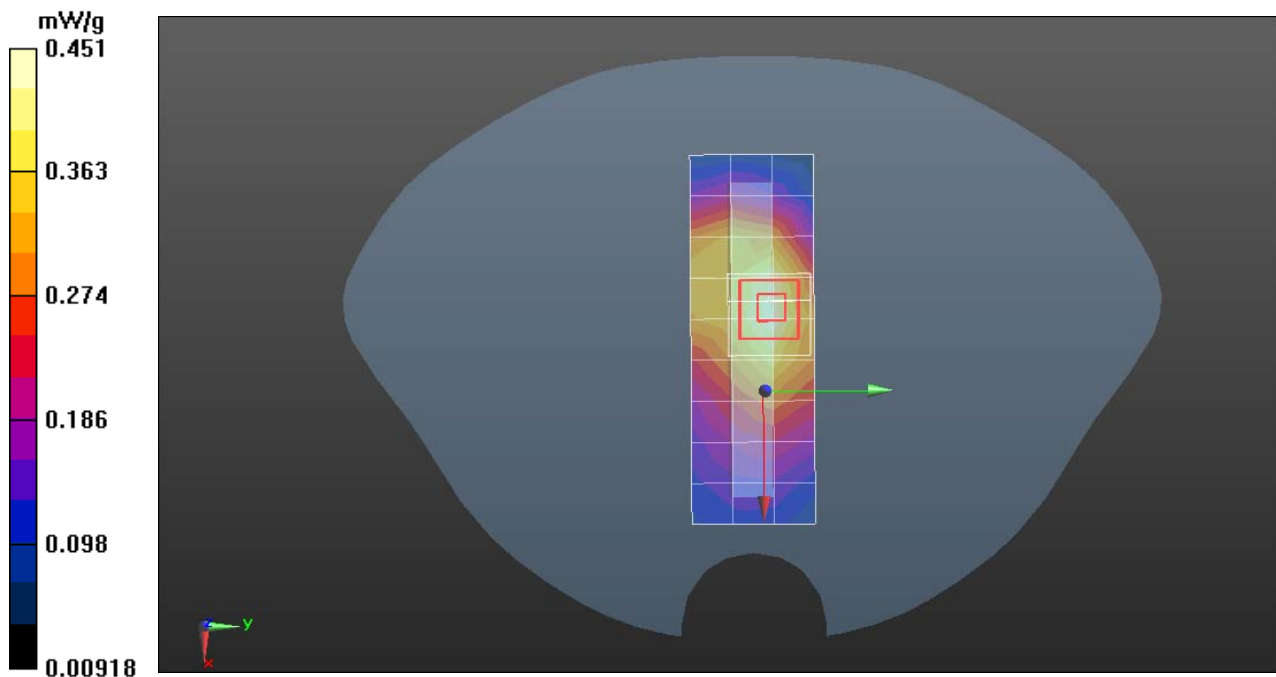



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

EDGE850-Body-Hotspot Left High CH251

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic EDGE; Communication System Band: EDGE850 (824.2 - 848.8 MHz);

Frequency: 848.6 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.572$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE850/ Left High CH251/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.342 mW/g


EDGE850/ Left High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.081 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

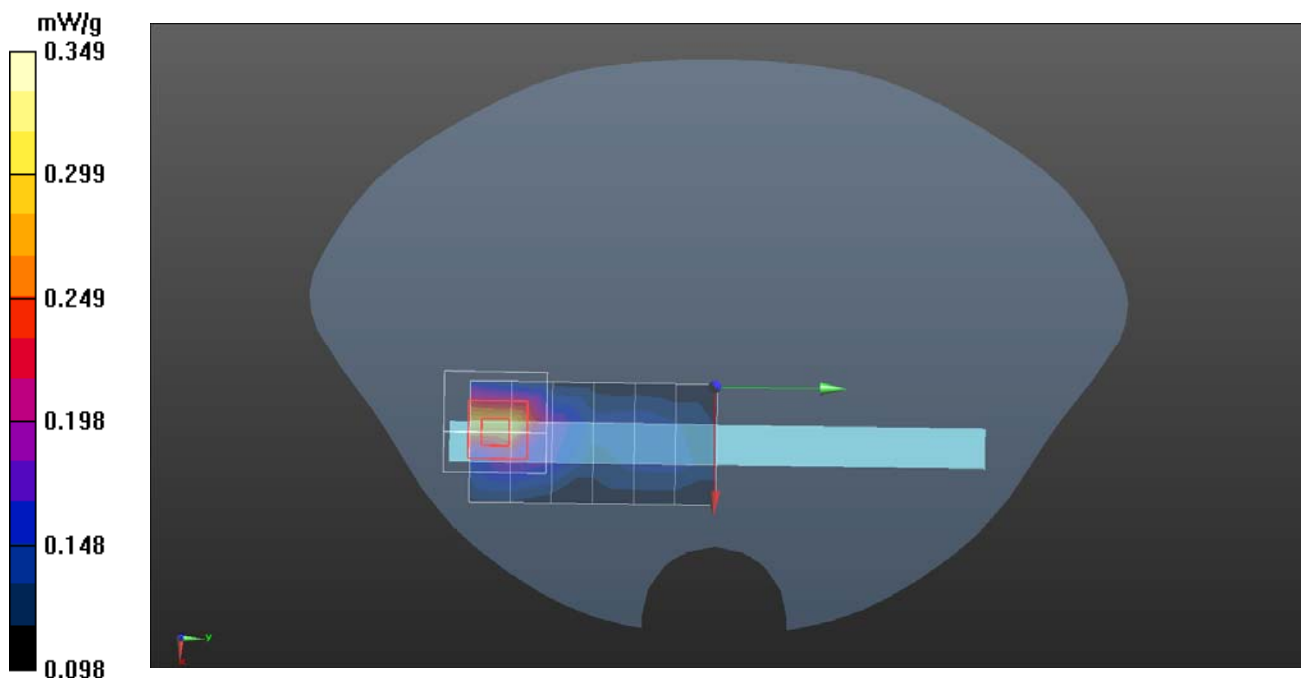



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS-1900-Body-Hotspot Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.315 mW/g


PCS1900/ Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.949 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

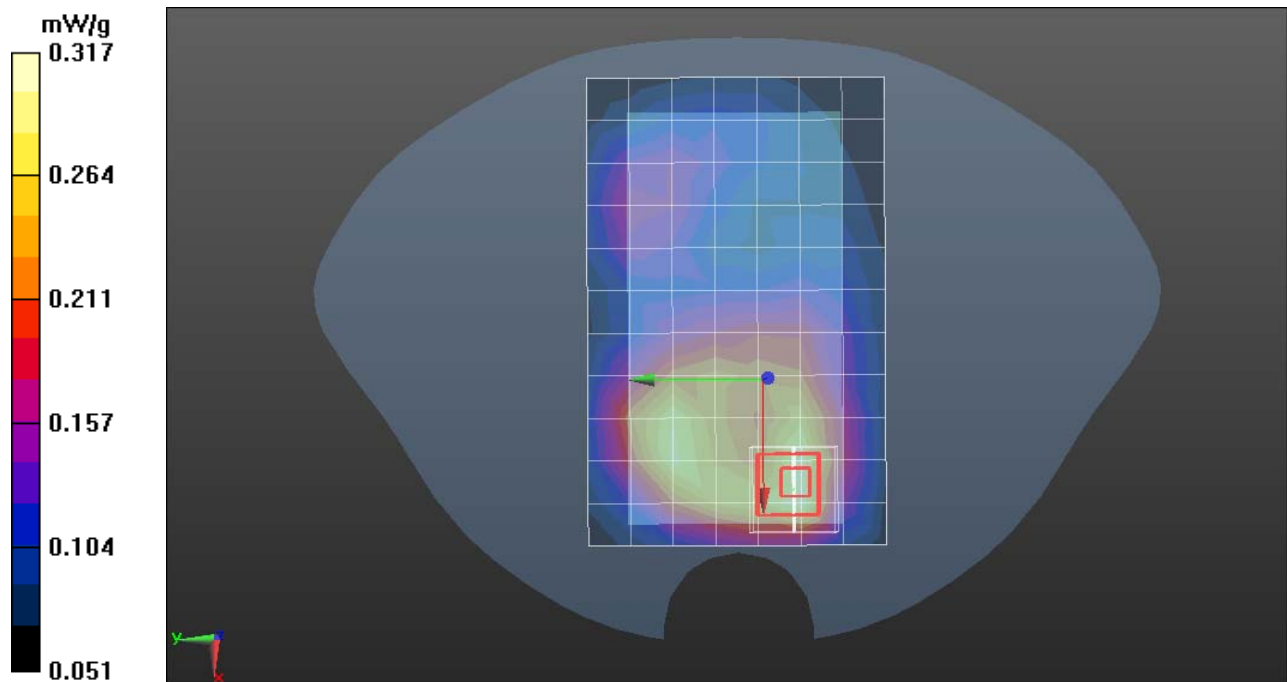



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS-1900-Body-Hotspot Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.479 mW/g


PCS1900/ Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.255 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.526 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

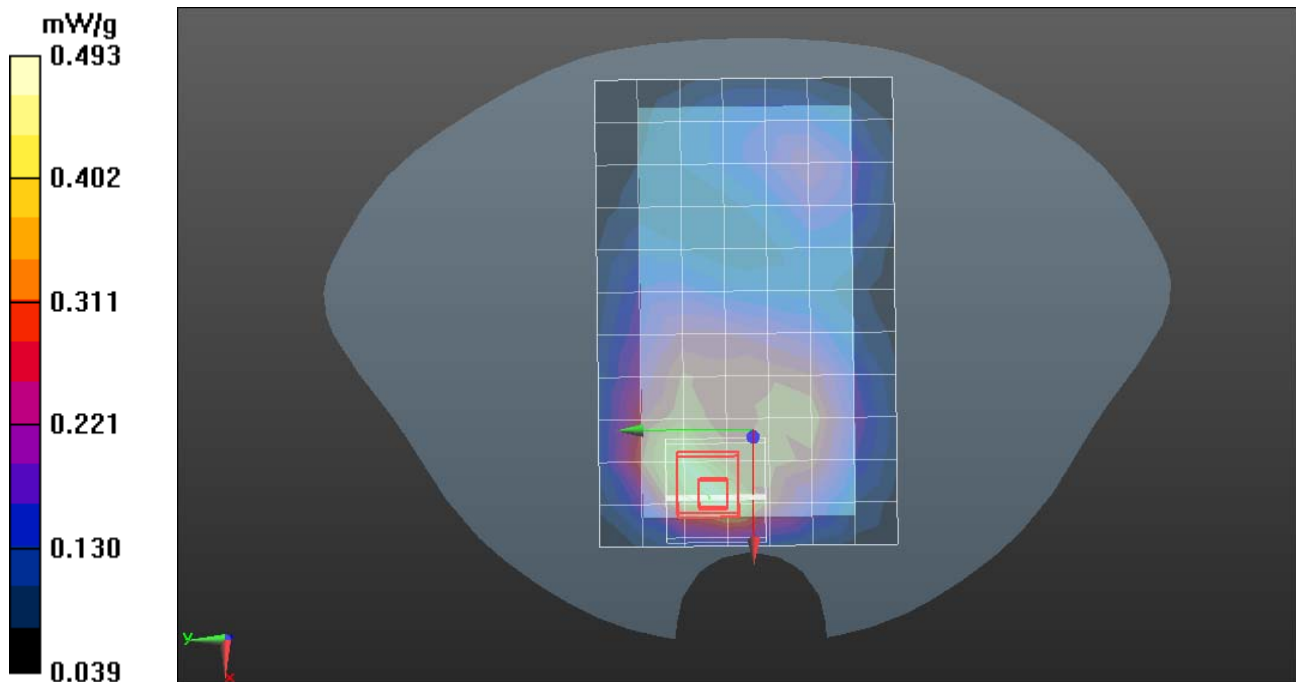



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS-1900-Body-Hotspot Bottom High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Bottom High CH810/Area Scan (51x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.582 mW/g


PCS1900/ Bottom High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.367 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.482 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.586 mW/g

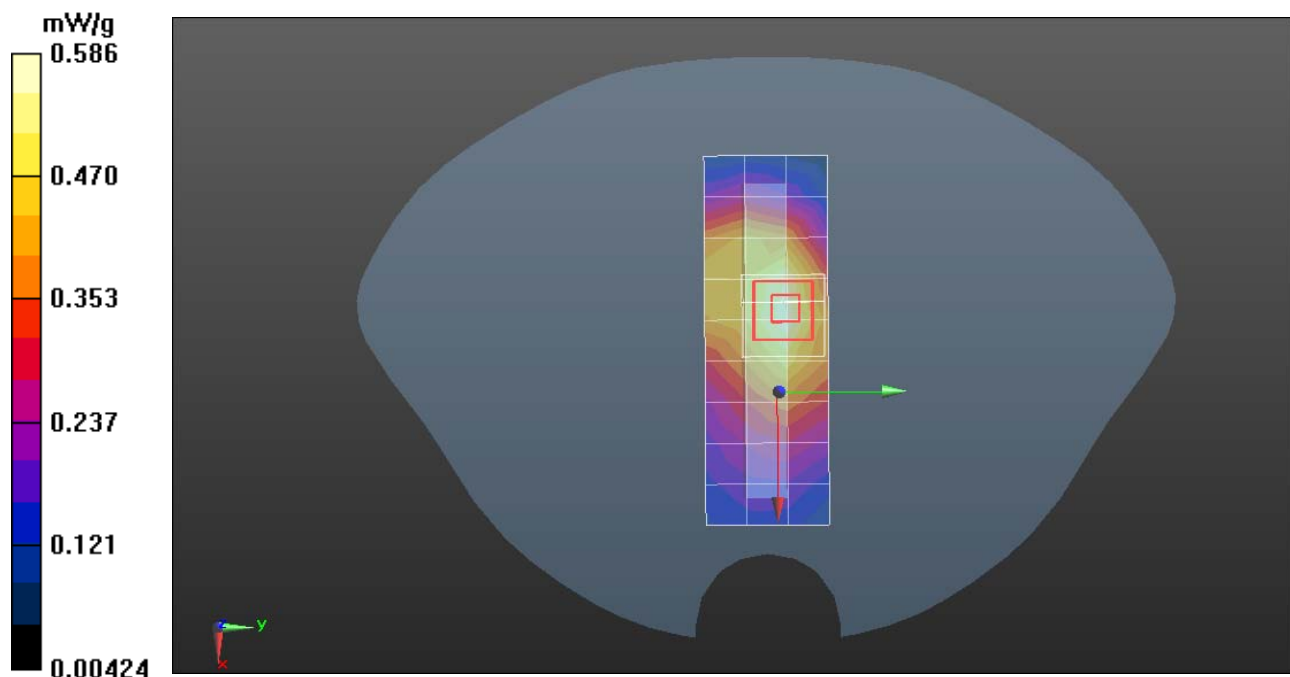



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

PCS 1900-Body-Hotspot Left High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:8.3

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

PCS1900/ Left High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.202 mW/g


PCS1900/ Left High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.378 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

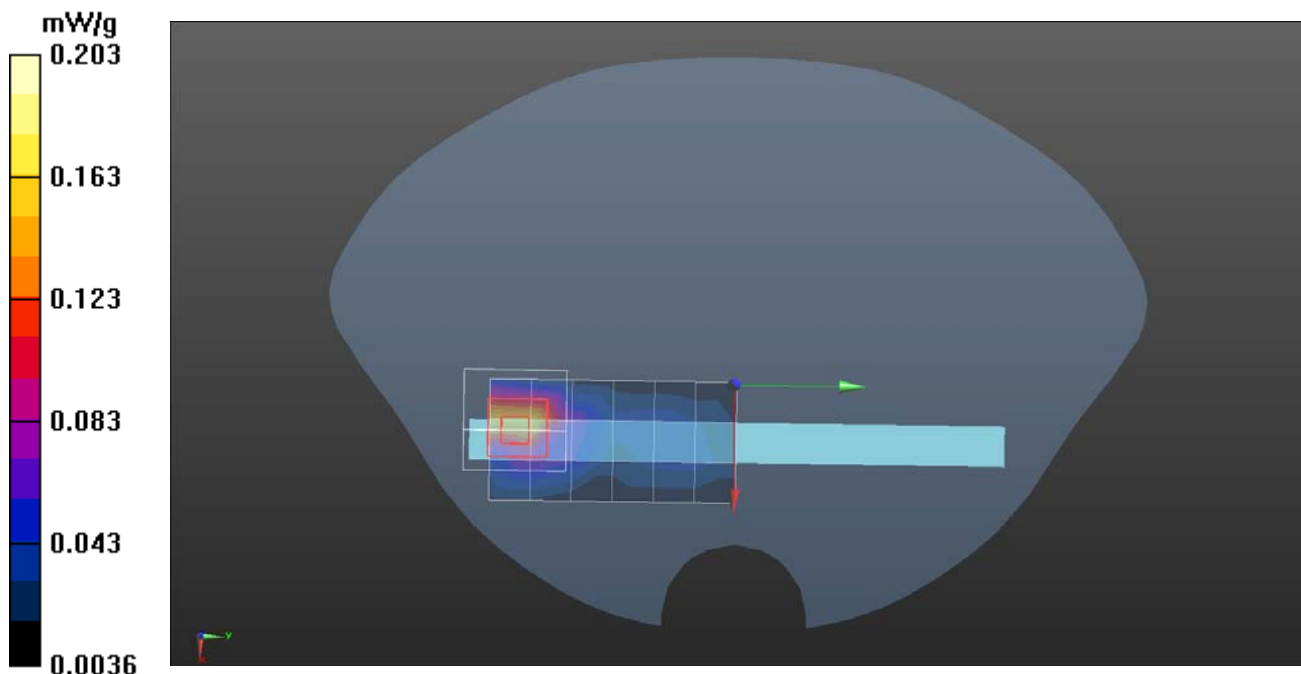



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS-1900-Body-Hotspot Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.332 mW/g


GPRS1900/ Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.949 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.153 mW/g

Maximum value of SAR (measured) = 0.336mW/g

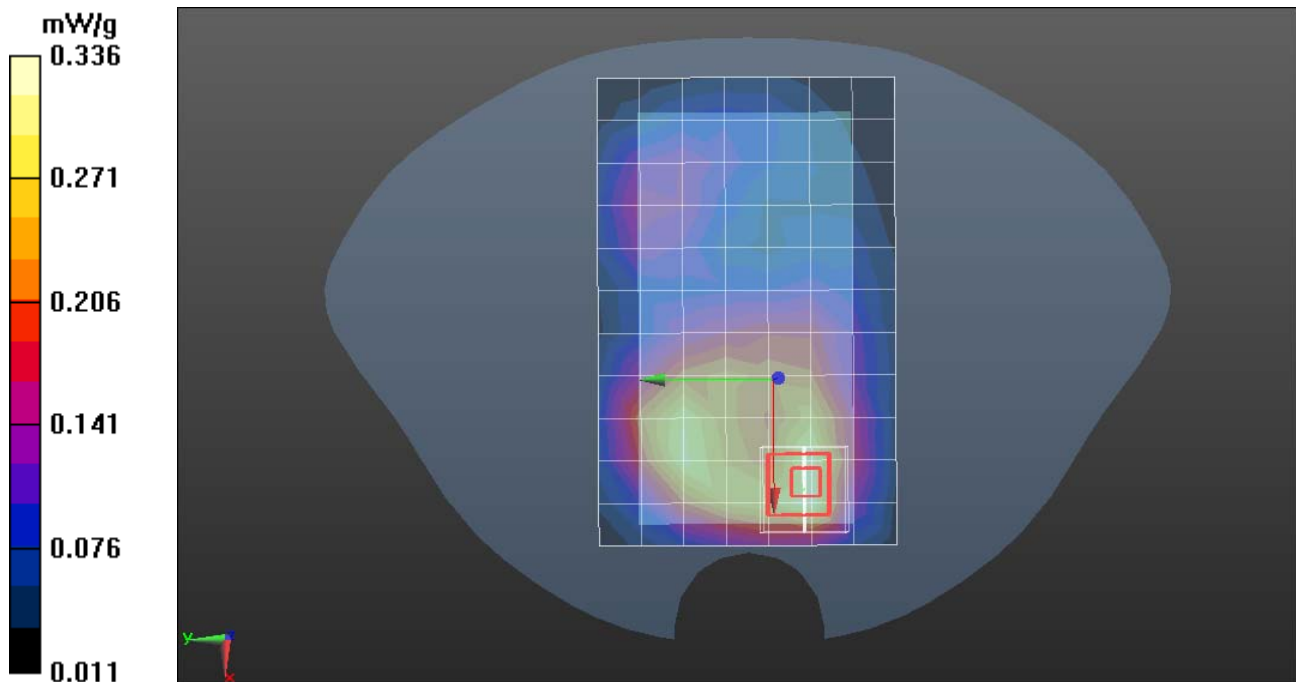



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS-1900-Body-Hotspot Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.502 mW/g


GPRS1900/ Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.255 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.256 mW/g

Maximum value of SAR (measured) = 0.516 mW/g

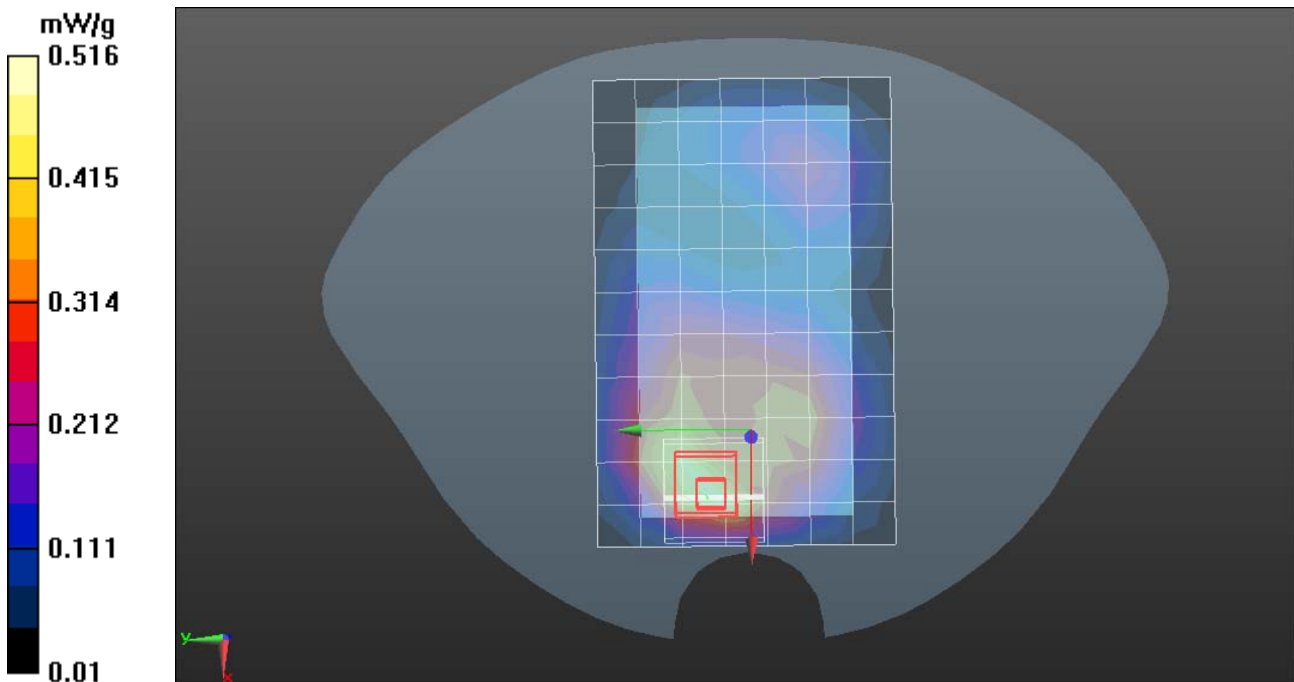



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS-1900-Body-Hotspot Bottom High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Bottom High CH810/Area Scan (51x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.533 mW/g


GPRS1900/ Bottom High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.367 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.311mW/g

Maximum value of SAR (measured) = 0.530 mW/g

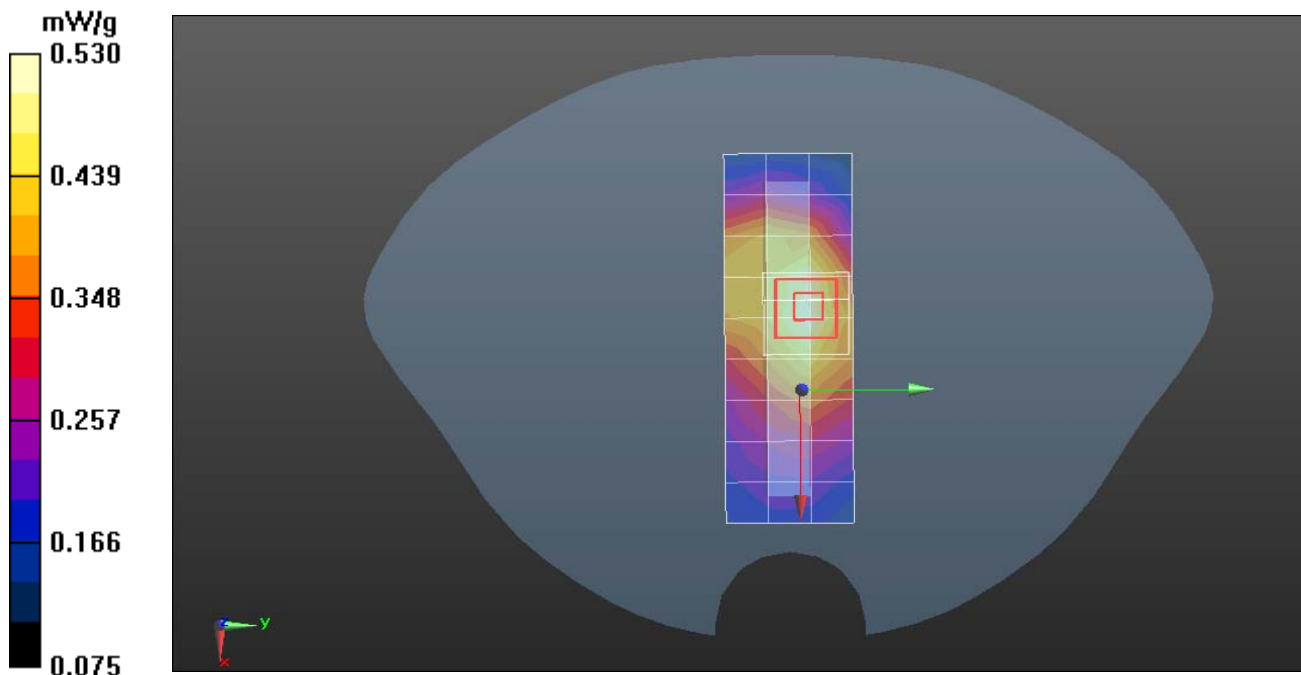



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

GPRS 1900-Body-Hotspot Left High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: GPRS; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

GPRS1900/ Left High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.203 mW/g


GPRS1900/ Left High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.378 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.418W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.092 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

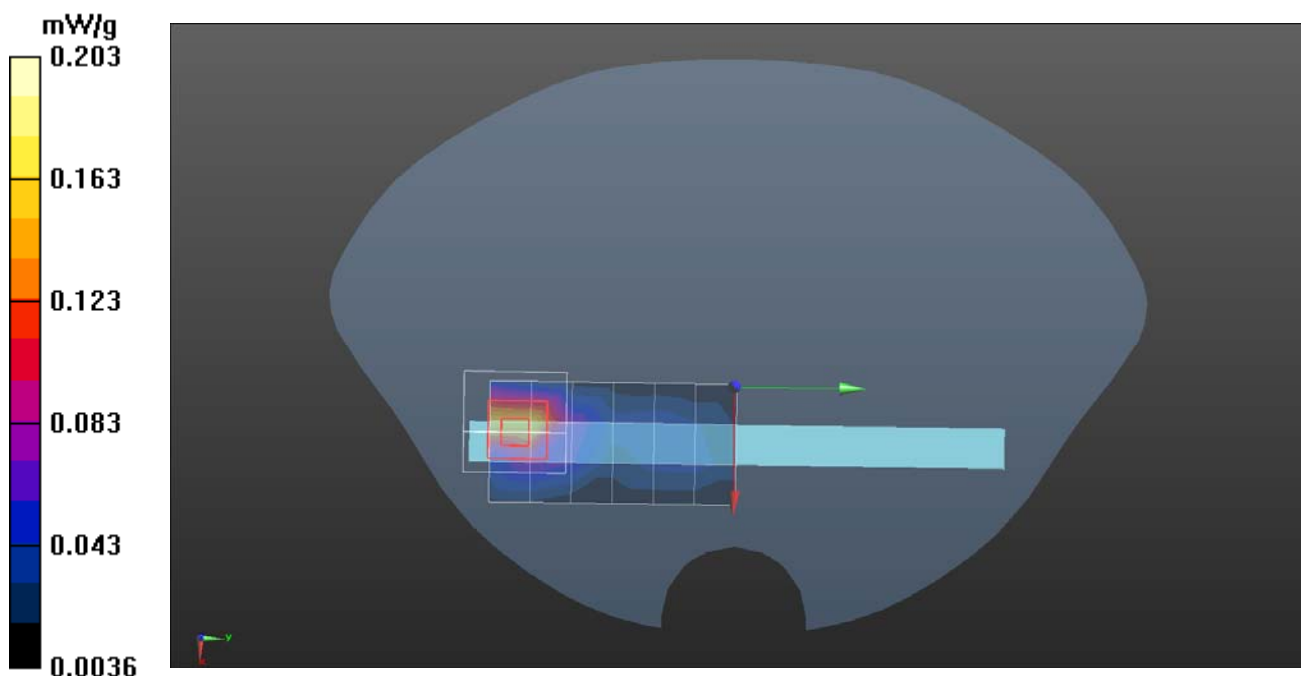



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE-1900-Body-Hotspot Up High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Up High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.344 mW/g


EDGE1900/ Up High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 7.949 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.523 W/kg

SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.347mW/g

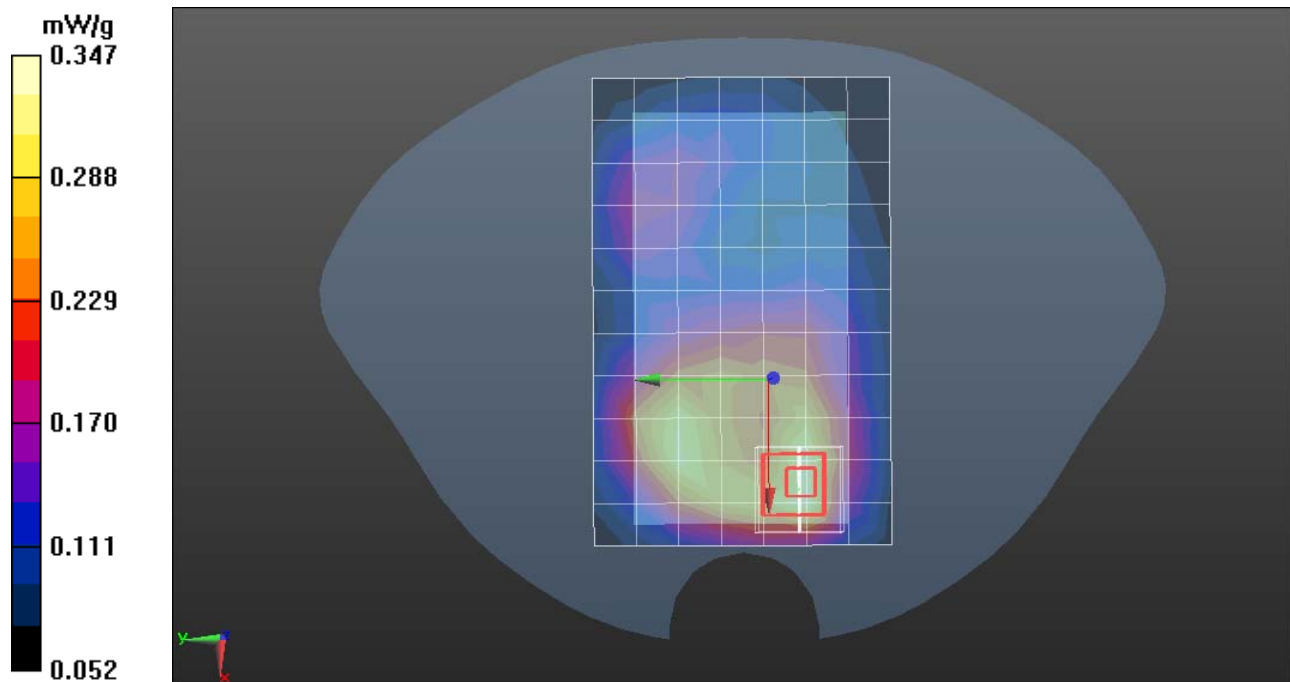



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE-1900-Body-Hotspot Down High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Down High CH810/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.596 mW/g


EDGE1900/ Down High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.355 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.402 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.599 mW/g

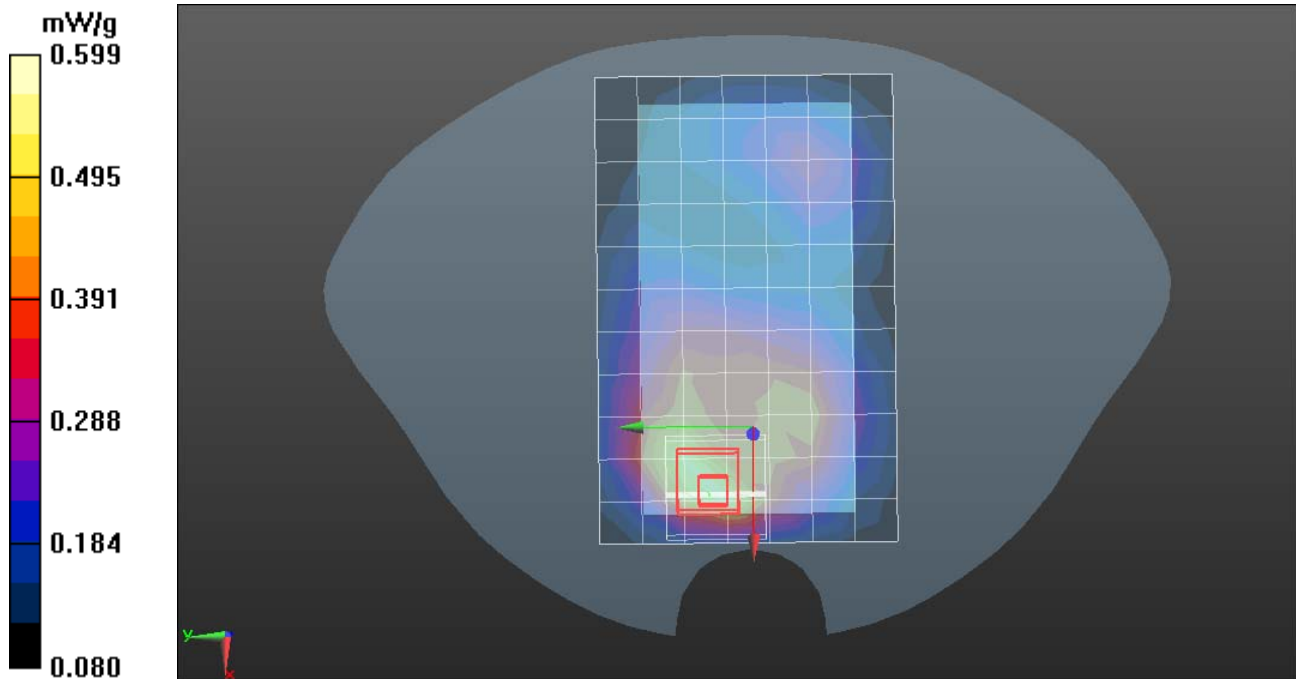



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE-1900-Body-Hotspot Bottom High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Bottom High CH810/Area Scan (51x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.545 mW/g


EDGE1900/ Bottom High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.367 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.576 W/kg

SAR(1 g) = 0.421 mW/g; SAR(10 g) = 0.292 mW/g

Maximum value of SAR (measured) = 0.548 mW/g

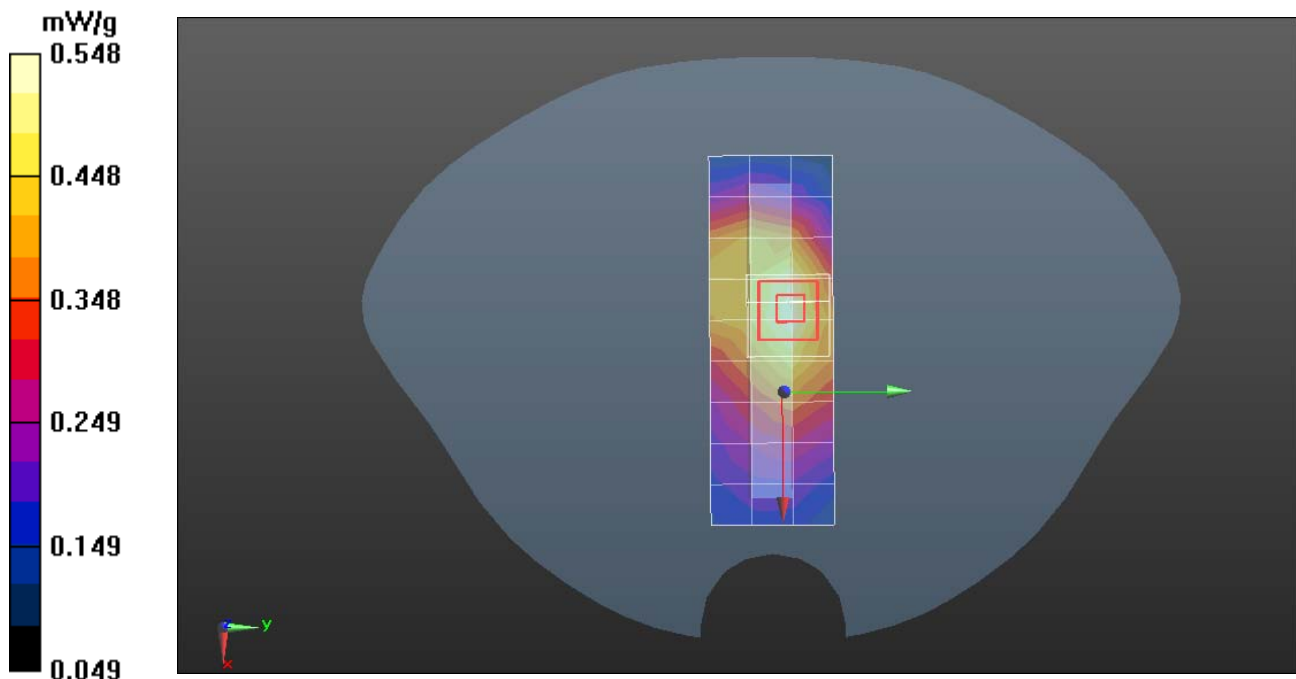



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

EDGE 1900-Body-Hotspot Left High CH810

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: EDGE; Communication System Band: EDGE 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.8 MHz; Communication System Duty cycle: 1:2

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1909.8\text{MHz}$; $\sigma = 1.52\text{mho/m}$; $\epsilon_r = 53.258$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

EDGE1900/ Left High CH810/Area Scan (81x31x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.219 mW/g


EDGE1900/ Left High CH810/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.378 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.338W/kg

SAR(1 g) = 0.138 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

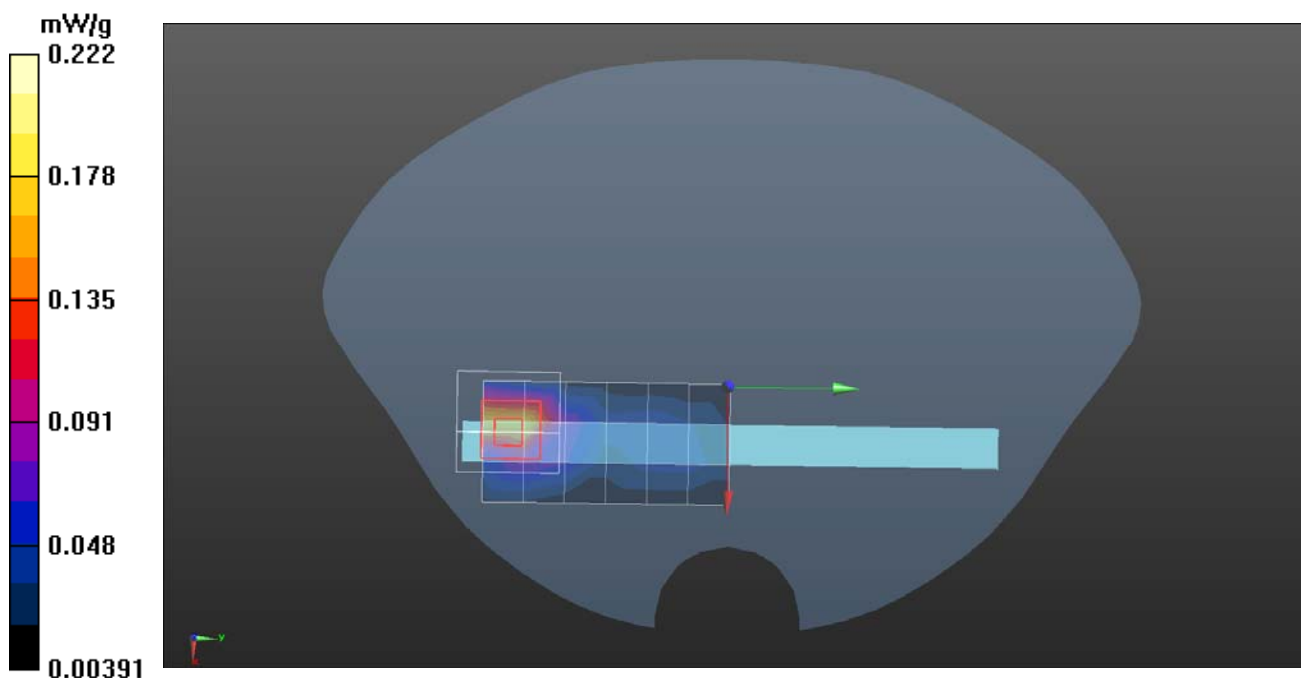



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II Body-Hotspot Up High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1909.8MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1850.4$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Up High CH9538/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.612 mW/g


WCDMA Band II /Body Up High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.363 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.682 W/kg

SAR(1 g) = 0.480 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.552 mW/g

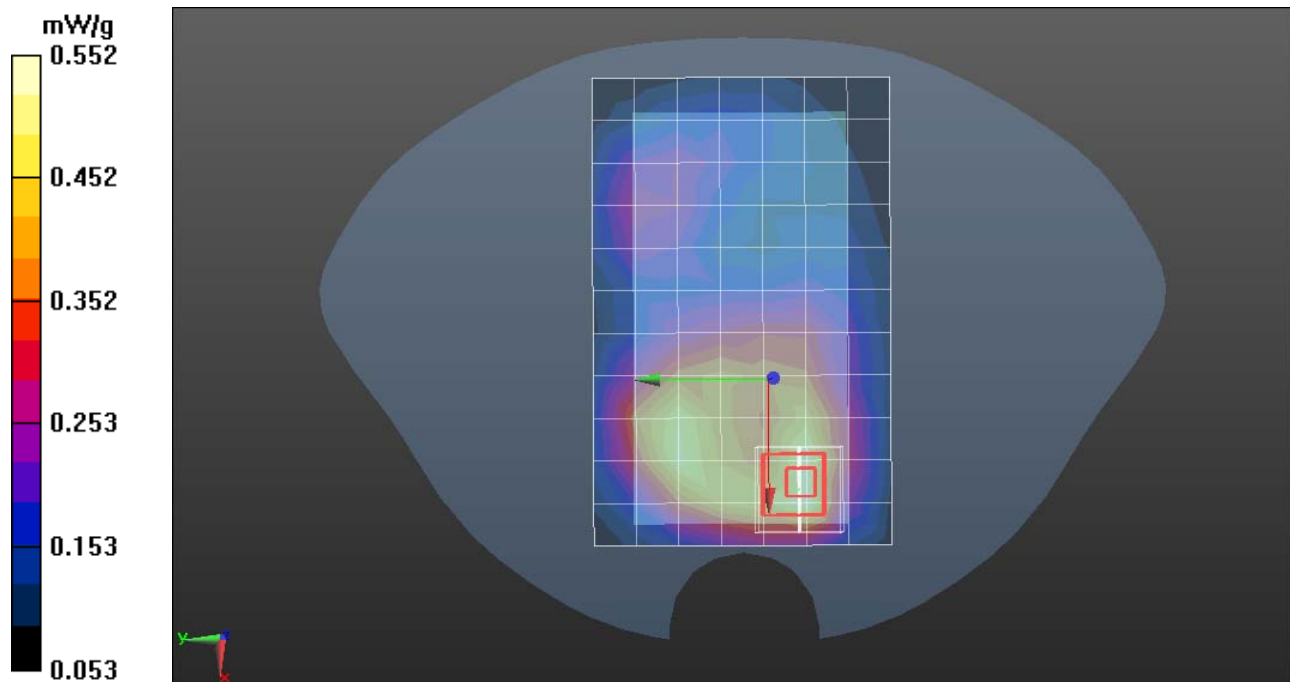



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II Body-Hotspot Down High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1909.8MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1850.4$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II /Body Down High CH9538/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.607 mW/g


WCDMA Band II /Body Down High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.426 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.572 mW/g; SAR(10 g) = 0.462 mW/g

Maximum value of SAR (measured) = 0.646 mW/g

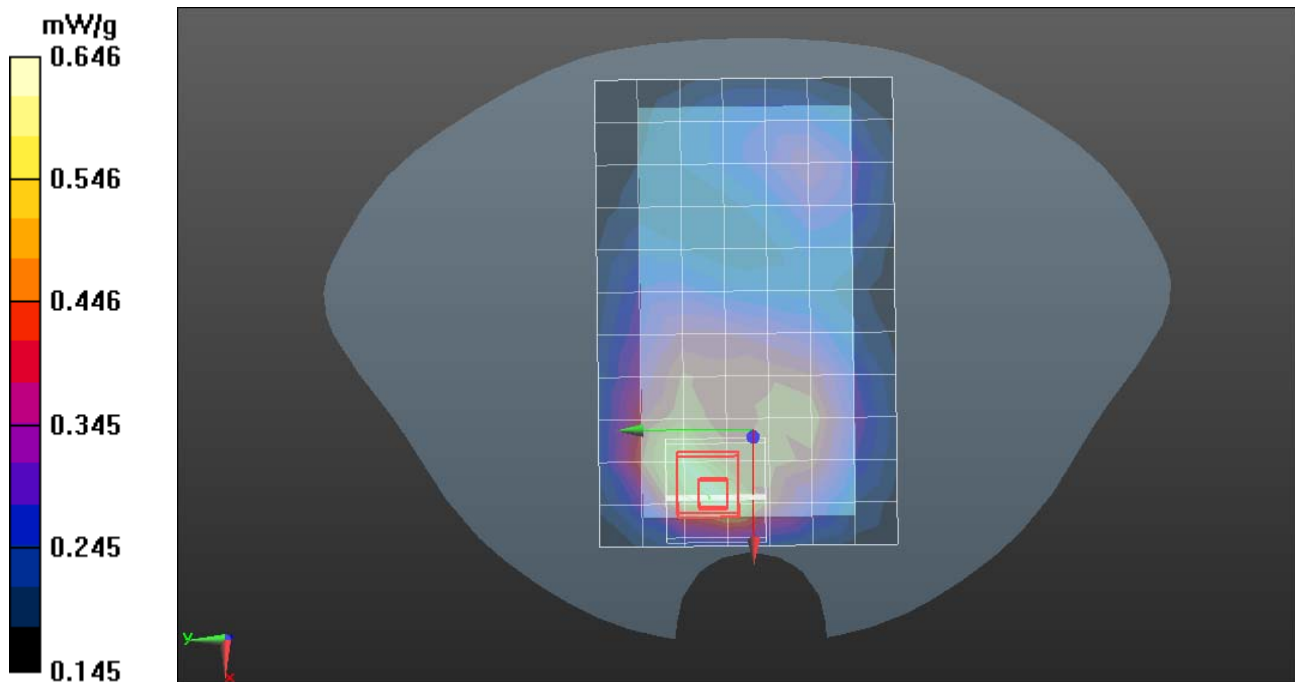



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II Body-Hotspot Bottom High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1909.8MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1850.4$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Bottom High CH9538/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.499 mW/g


WCDMA Band II/ Bottom High CH9538/ Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.939 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.502 mW/g

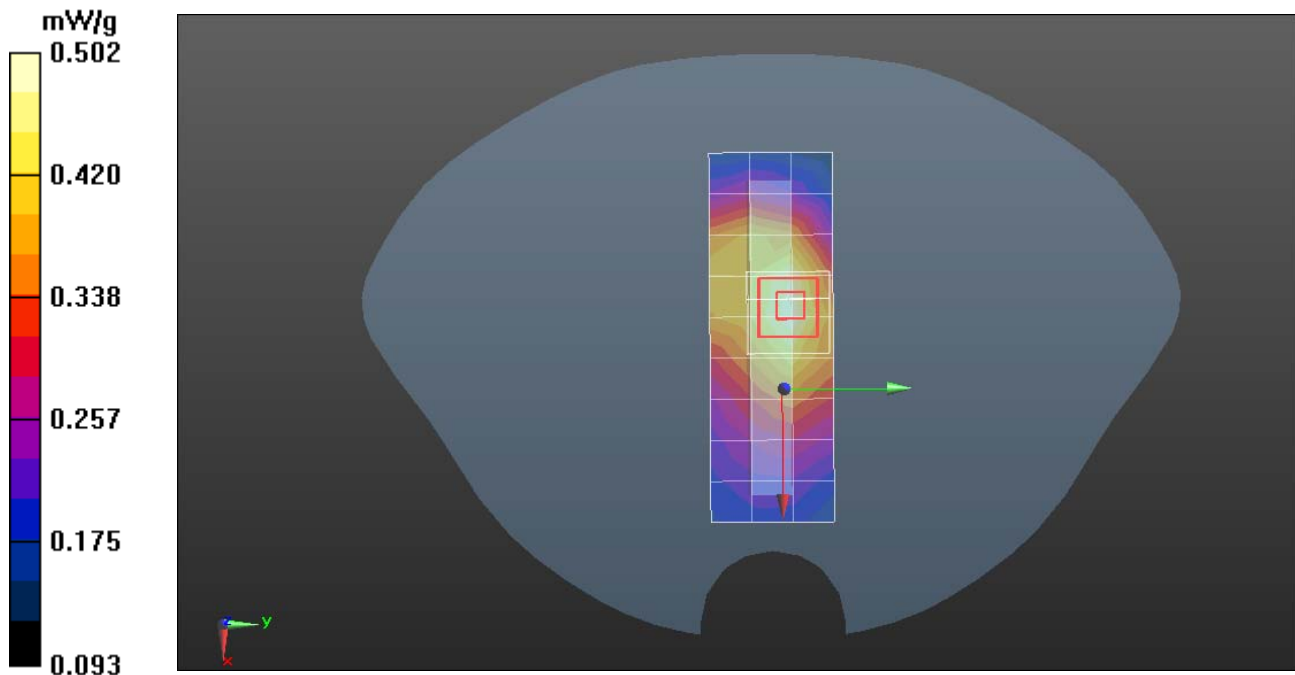



Test Laboratory: Compliance Certification Services Inc.

December 4, 2012

WCDMA Band II Body-Hotspot Left High CH9538

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1909.8MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1850.4$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band II/ Left High CH9538/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.382 mW/g


WCDMA Band II/ Left High CH9538/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.276 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.242 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

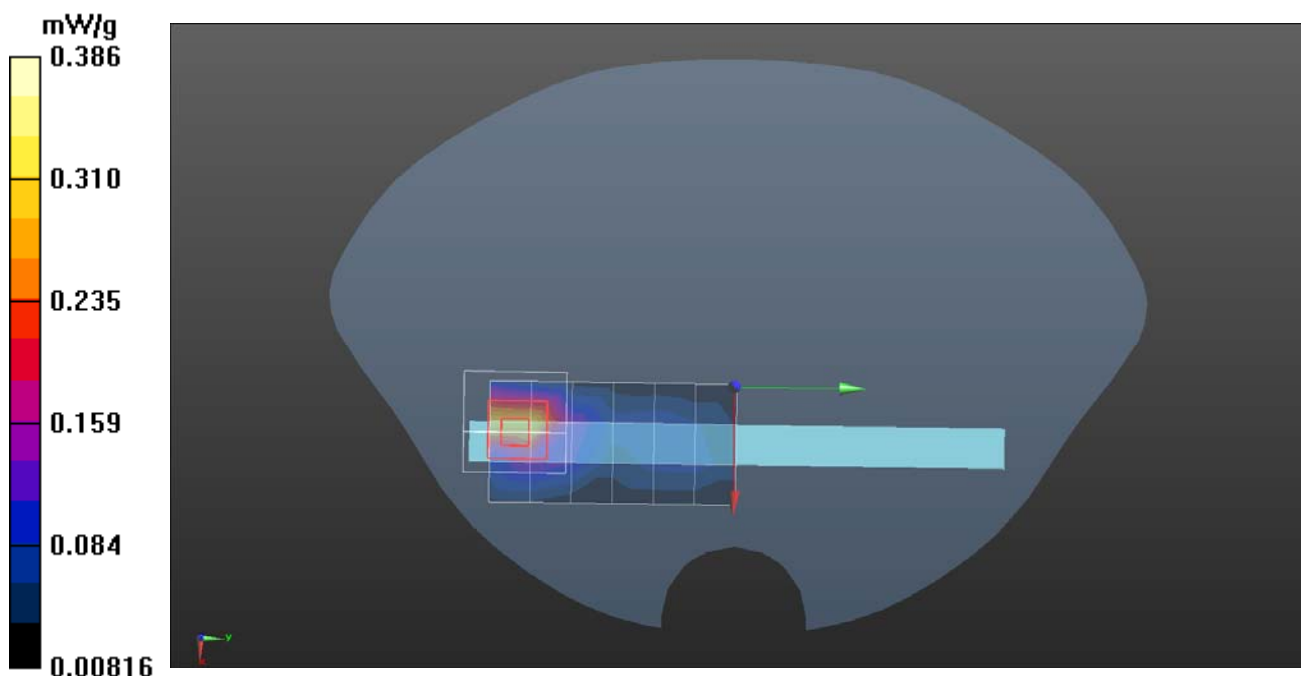



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V Body-Hotspot Up Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V /Body Up Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.652 mW/g


WCDMA Band V /Body Up Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.363 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.432 mW/g

Maximum value of SAR (measured) = 0.636 mW/g

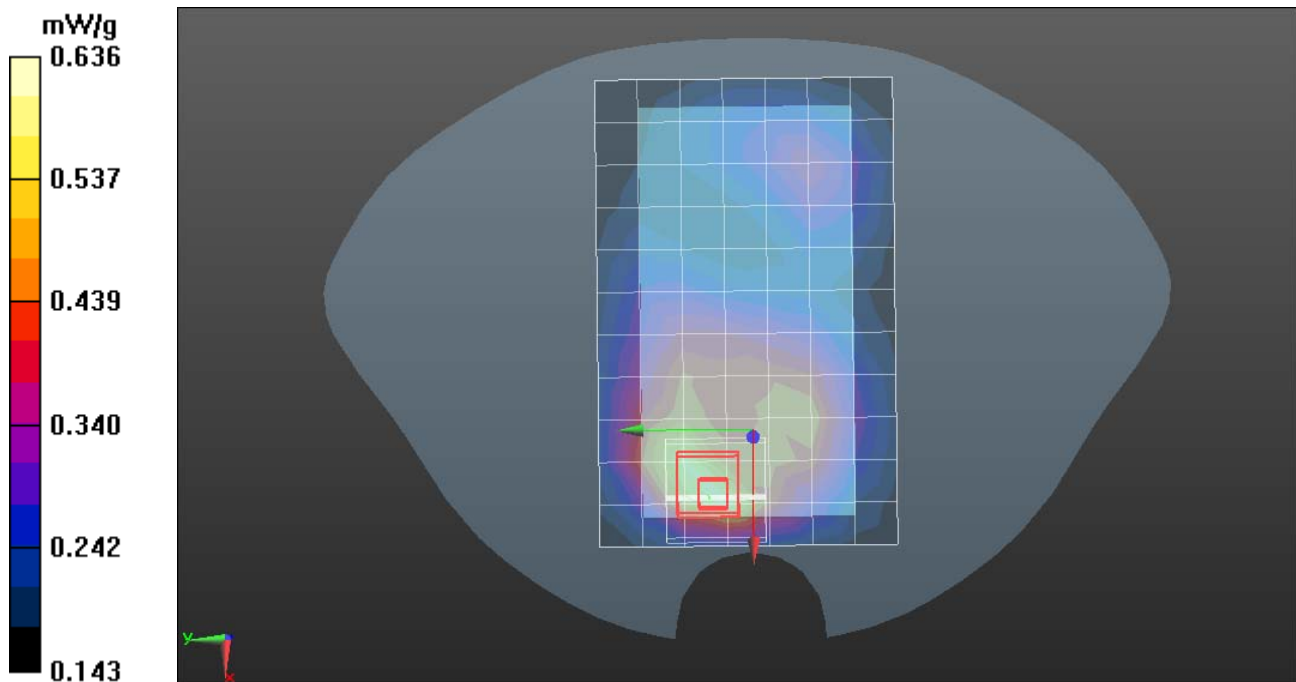



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V Body-Hotspot Down Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band V /Body Down Low CH4132/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.608 mW/g


WCDMA Band V /Body Down Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.426 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 0.646 mW/g

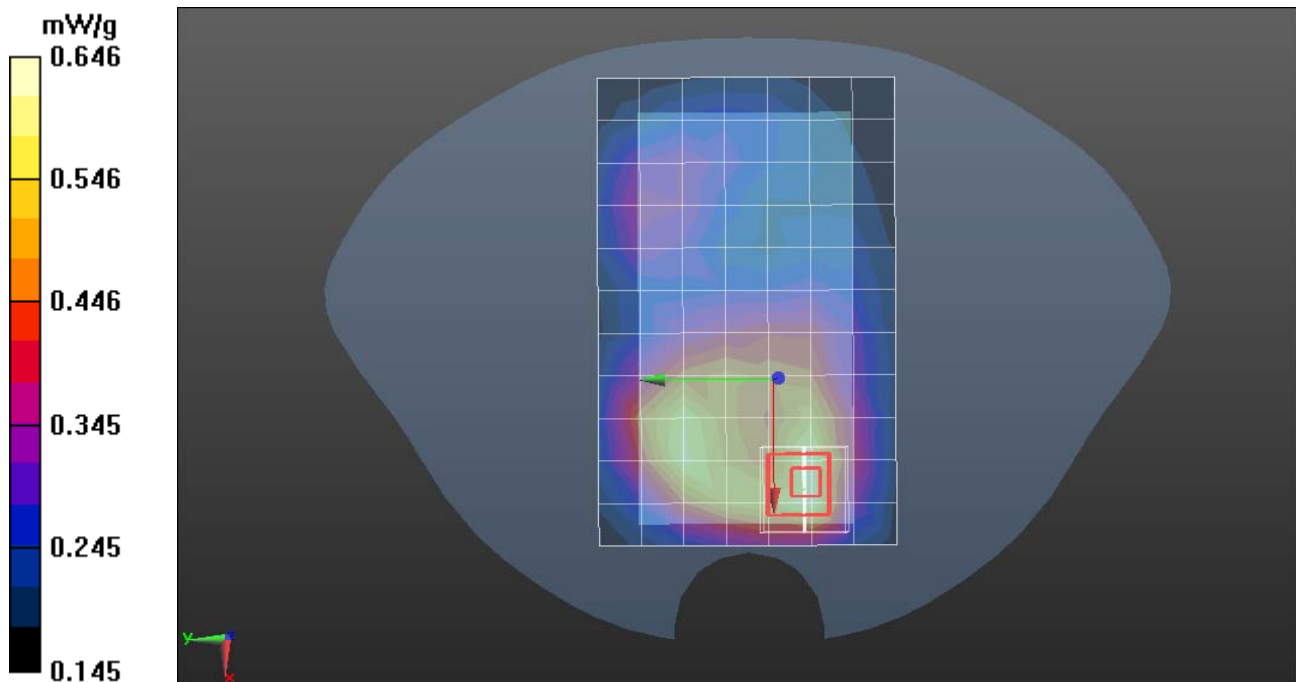



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V Body-Hotspot Bottom Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band VI Bottom Low CH4132/Area Scan (51x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.579 mW/g


WCDMA Band VI Bottom Low CH4132/ Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.939 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.451 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

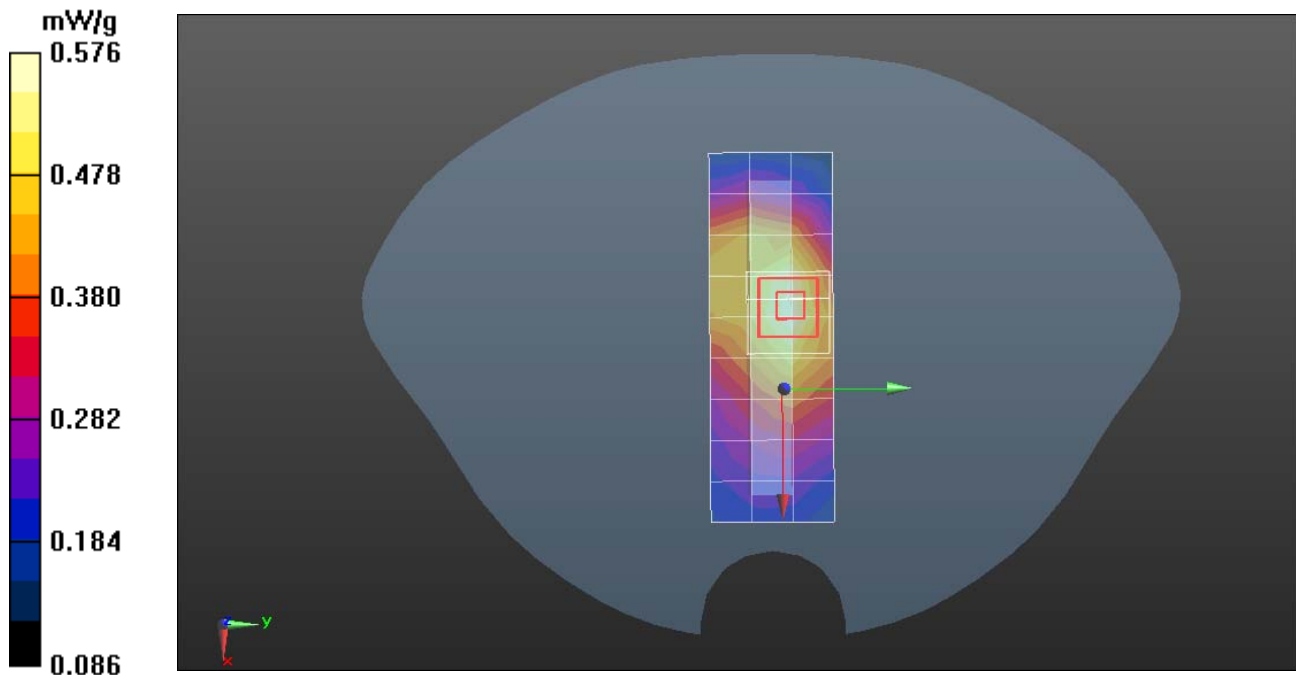



Test Laboratory: Compliance Certification Services Inc.

December 3, 2012

WCDMA Band V Body-Hotspot Left Low CH4132

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System Duty cycle: 1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA Band VI Left Low CH4132/Area Scan (81x31x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.387 mW/g


WCDMA Band VI Left Low CH4132/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.276 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.666 W/kg

SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

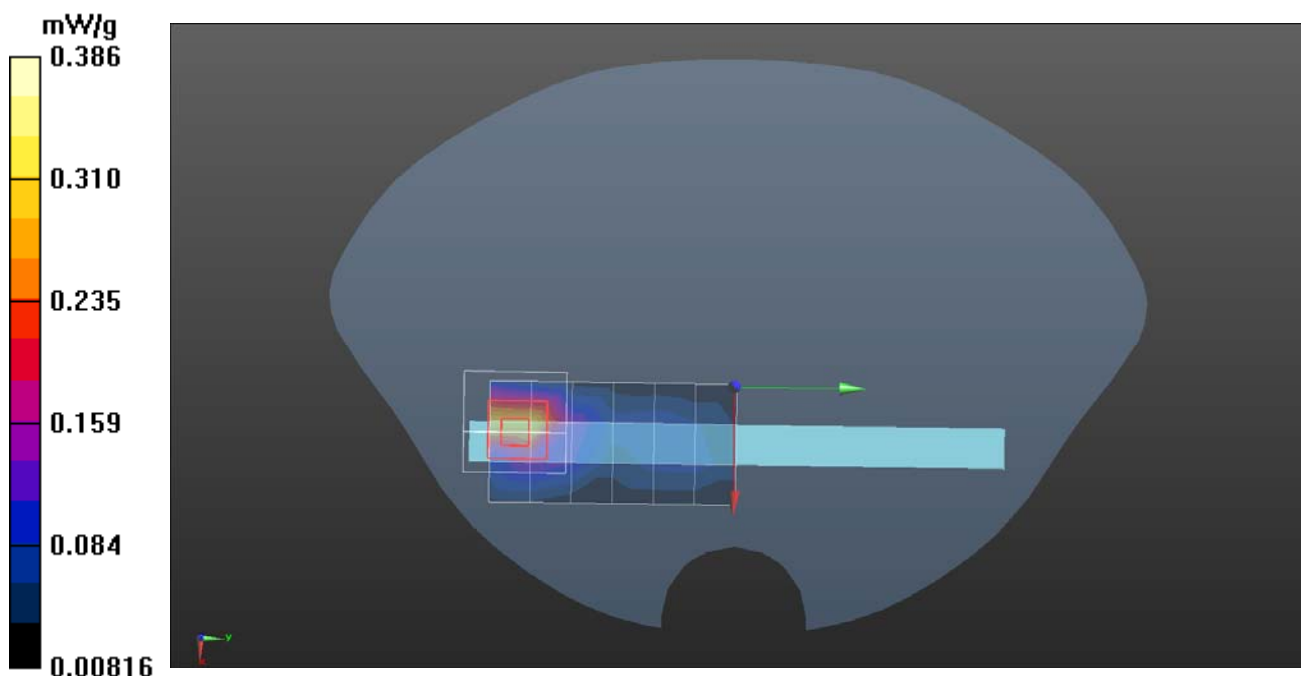



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b Body-Hotspot UP Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.978$ mho/m; $\epsilon_r = 53.231$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/UP Low CH1/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.252 mW/g

IEEE 802.11b/UP Low CH1/ Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.487 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 0.558 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

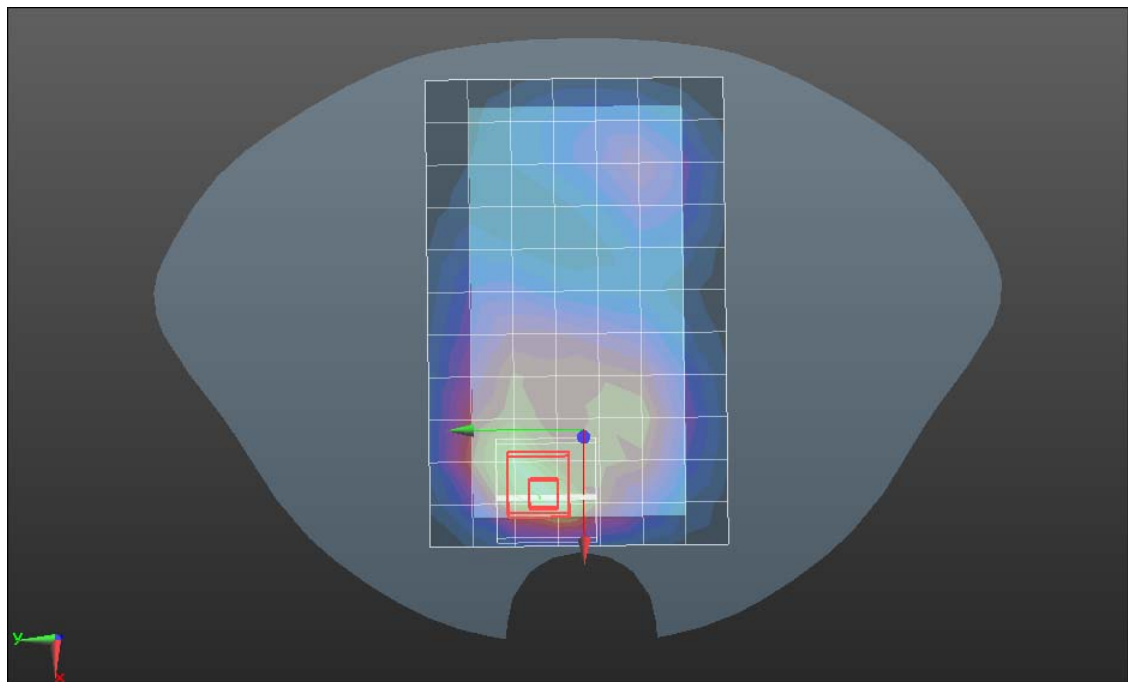



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b Body-Hotspot Down Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 52.82$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Down Low CH1/Area Scan (51x81x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.575 mW/g

IEEE 802.11b/ Down Cheek Low CH1/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.220 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.942 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.188 mW/g

Maximum value of SAR (measured) = 0.583 mW/g

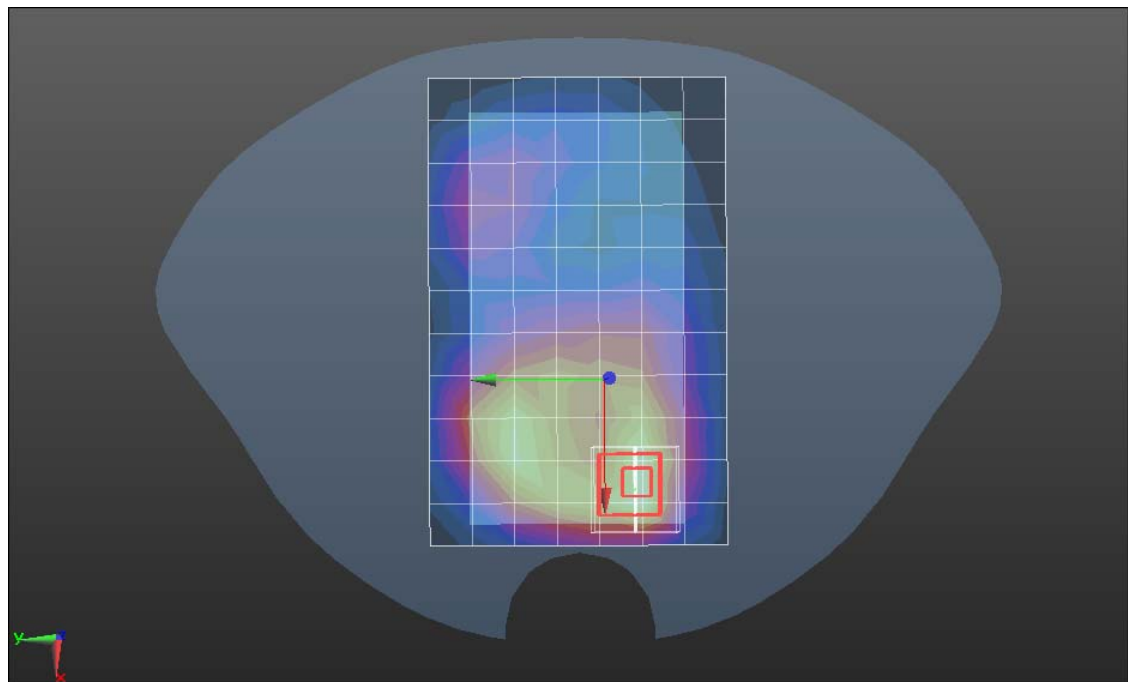



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b Body-Hotspot Right Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Right Low CH1/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.110 mW/g

IEEE 802.11b/ Right Low CH1/ Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.250 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.065 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

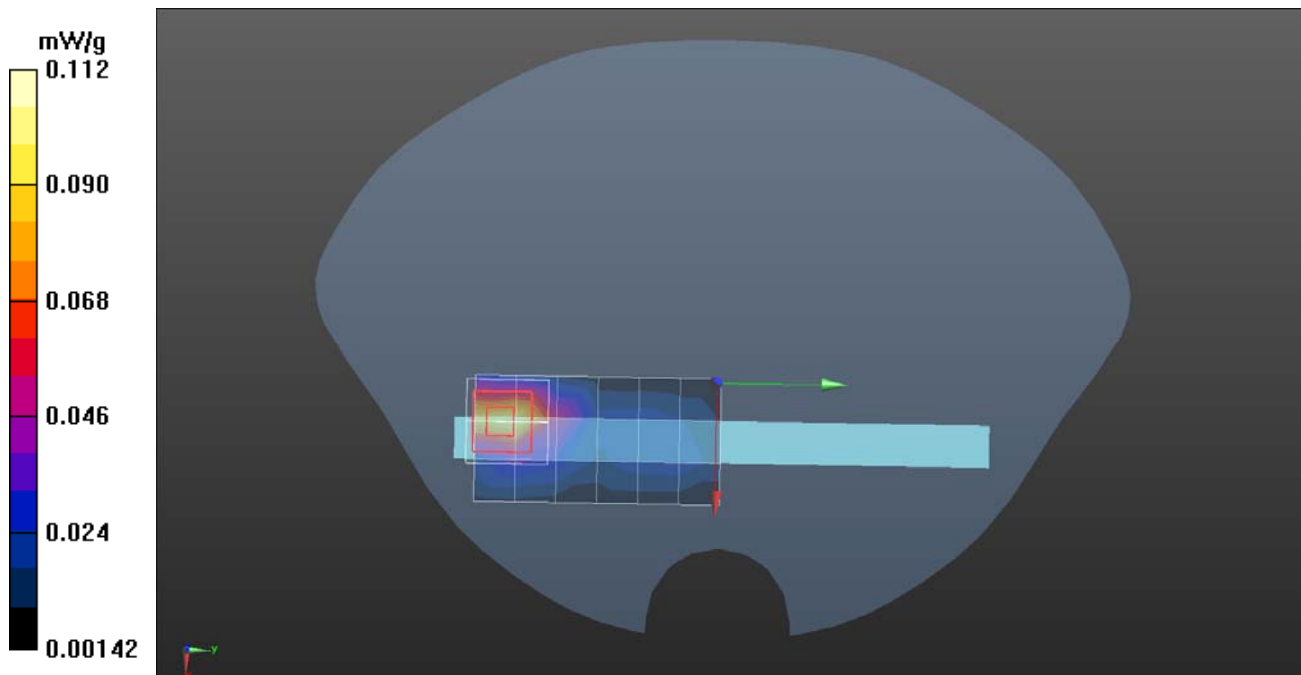



Test Laboratory: Compliance Certification Services Inc.

December 5, 2012

IEEE 802.11b Body-Hotspot Top Low CH1

DUT: VINCI Mobile Device; Type: VINCI VM5610; Serial:111111111111111

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2412 MHz; Communication System Duty cycle:1:1

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.92, 6.92, 6.92); Calibrated: 7/25/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

IEEE 802.11b/ Top Low CH1/Area Scan (81x31x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.182 mW/g

IEEE 802.11b/ Top Low CH1/ Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.380 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.088 mW/g

Maximum value of SAR (measured) = 0.112 mW/g

