



APPENDIX C: PLOTS OF SAR TEST RESULT



Compliance Certification Services Inc.

Report No: C130924S01-SF-R1

FCCID: ODD-VM690

Date of Issue : November 21, 2013

GSM 850-Body Down Low CH128	3
GSM 850-Body-Edge 3 Low CH128	5
GSM 850-Body-Edge 4 Low CH128	6
GPRS 850-Body Down High CH251	7
GPRS 850-Body-Edge 3 High CH251	9
GPRS 850-Body-Edge 4 High CH251	10
PCS 1900-Body Down Middle CH661	11
PCS1900-Body-Edge 3 Middle CH661	13
PCS1900-Body-Edge 4 Middle CH661	14
GPRS 1900-Body Down High CH810	15
GPRS1900-Body-Edge 3 High CH810	17
GPRS1900-Body-Edge 4 High CH810	18
WCDMA Band V-Body Down High CH4233	19
WCDMA Band V-Body-Edge 3 High CH4233	21
WCDMA Band V-Body-Edge 4 High CH4233	22
WCDMA Band II-Body Down Low CH9262	23
WCDMA Band II-Body-Edge 3 Low CH9262	25
WCDMA Band II-Body-Edge 4 Low CH9262	26
WIFI-Body Down Middle CH6	27
WIFI-Body-Edge 1 Middle CH6	29
WIFI-Body-Edge 2 Middle CH6	30

Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GSM 850-Body Down Low CH128

DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz;Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.854$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Down Low CH128/Area Scan (6x6x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$, Maximum value of SAR (measured) = 0.882 W/kg

GSM 850/GSM850 Body Down Low CH128/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 3.543 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.285 W/kg

Maximum value of SAR (measured) = 0.717 W/kg

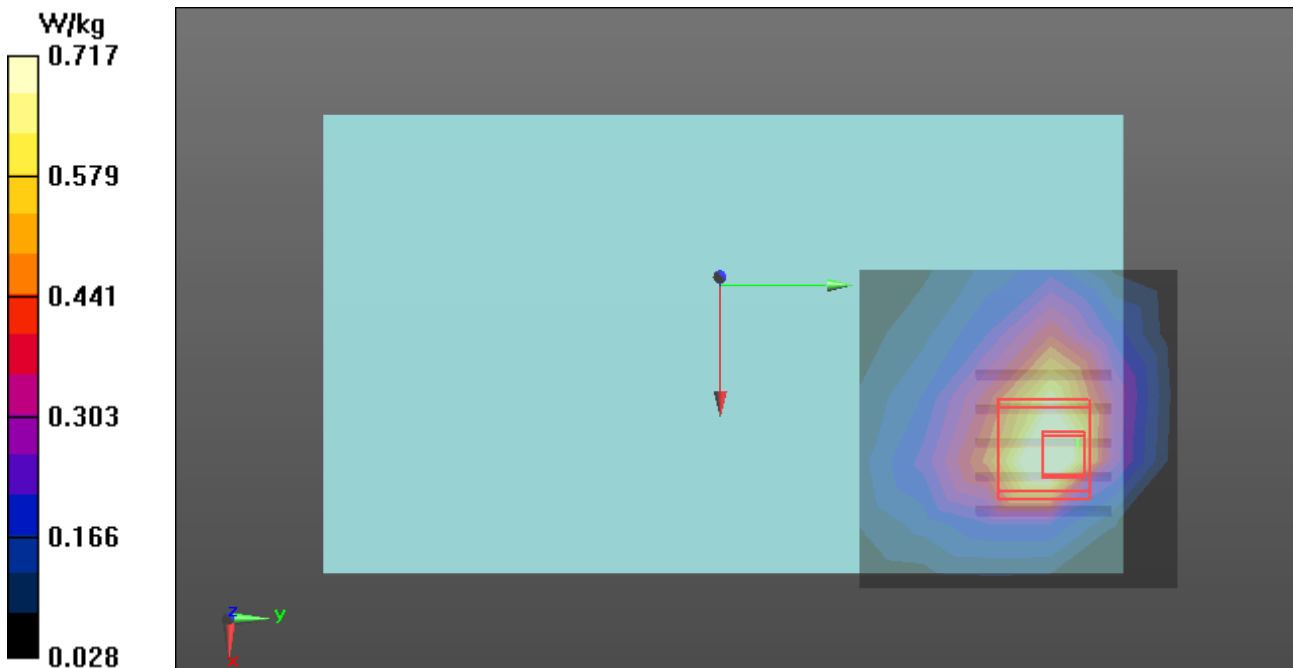

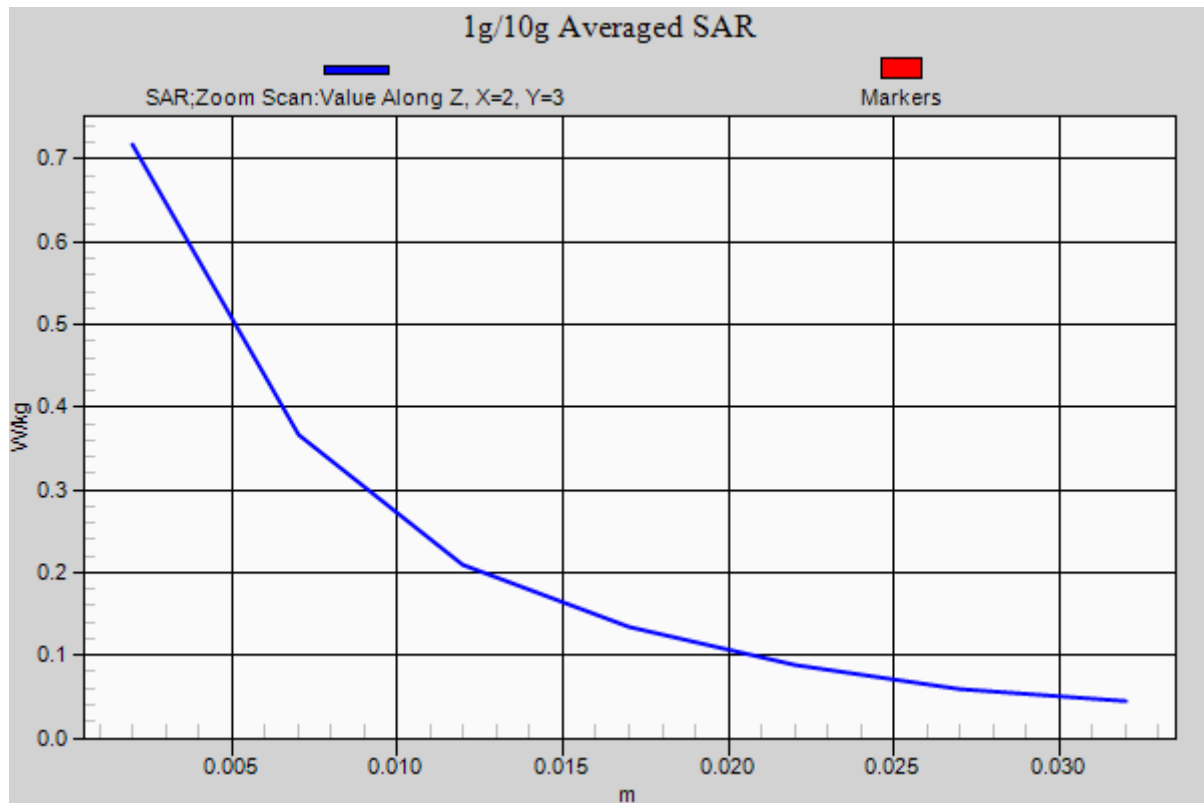



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GSM 850-Body-Edge 3 Low CH128**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.854$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Edge 3 Low CH128/Area Scan (8x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.463 W/kg

GSM 850/GSM850 Body Edge 3 Low CH128/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.796 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.138 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

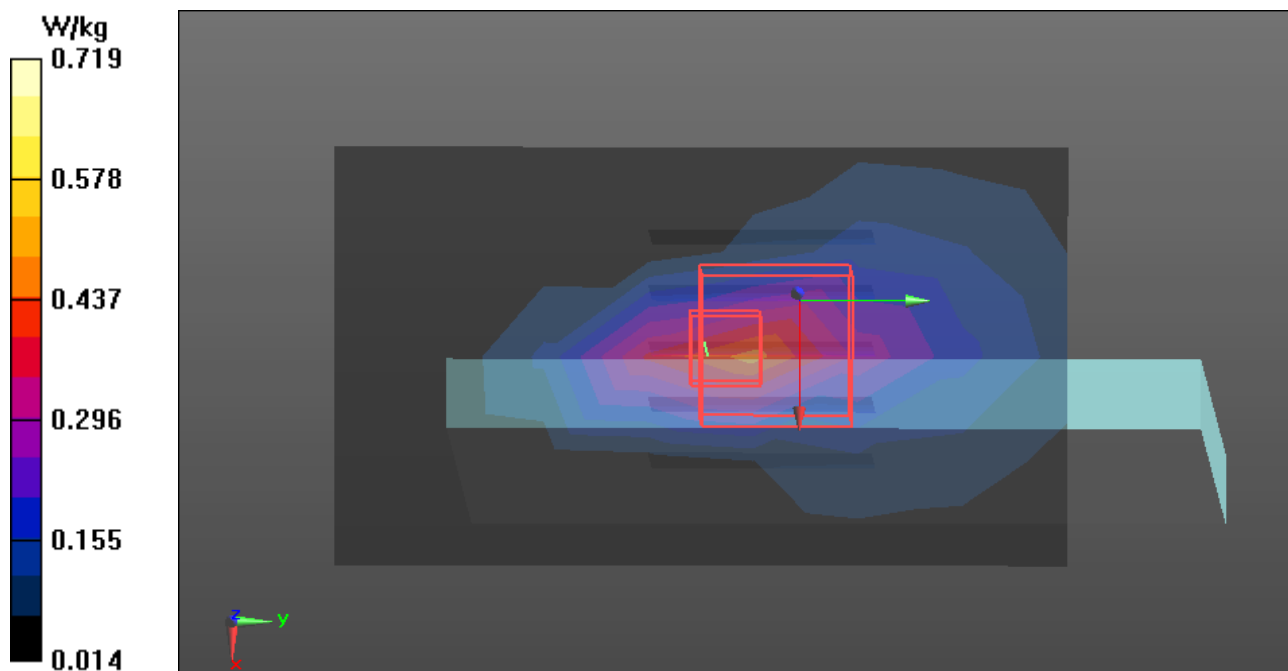



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GSM 850-Body-Edge 4 Low CH128**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 824.2 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.973$ S/m; $\epsilon_r = 54.854$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GSM 850/GSM850 Body Edge 4 Low CH128/Area Scan (13x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0237 W/kg

GSM 850/GSM850 Body Edge 4 Low CH128/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.100 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0220 W/kg

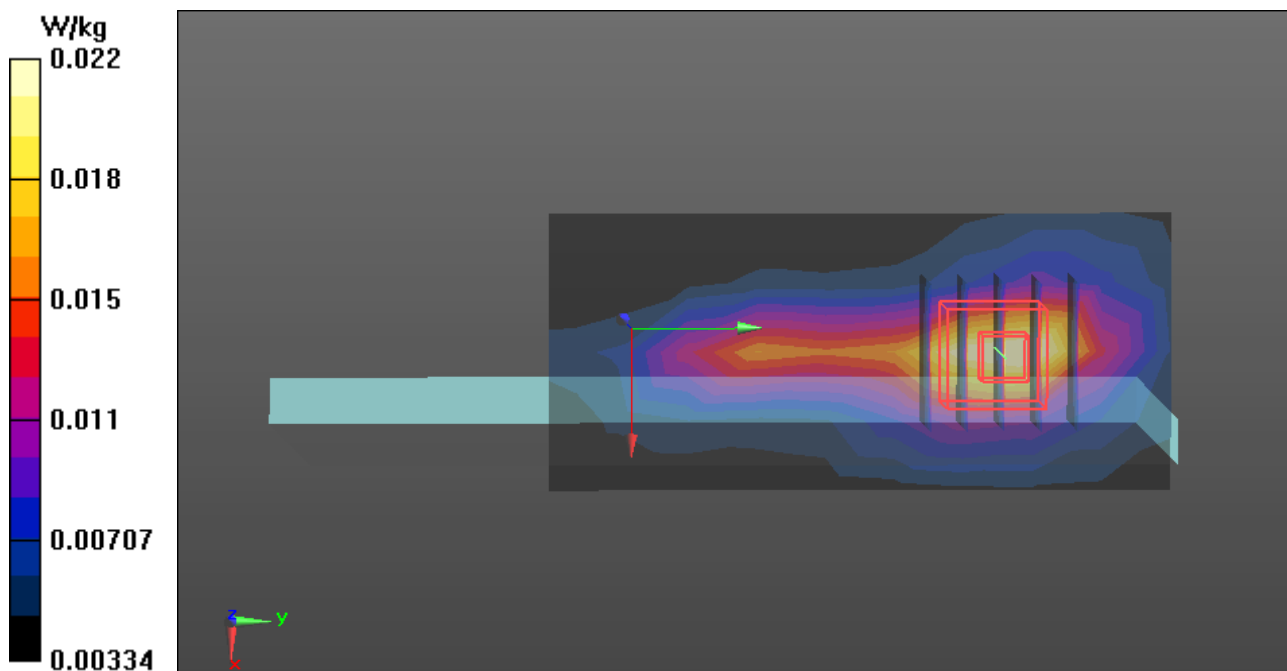



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GPRS 850-Body Down High CH251**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.559$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS850/GPRS850 Body Down High CH251/Area Scan (6x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.766 W/kg

GPRS850/GPRS850 Body Down High CH251/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.254 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.519 W/kg; SAR(10 g) = 0.293 W/kg

Maximum value of SAR (measured) = 0.746 W/kg

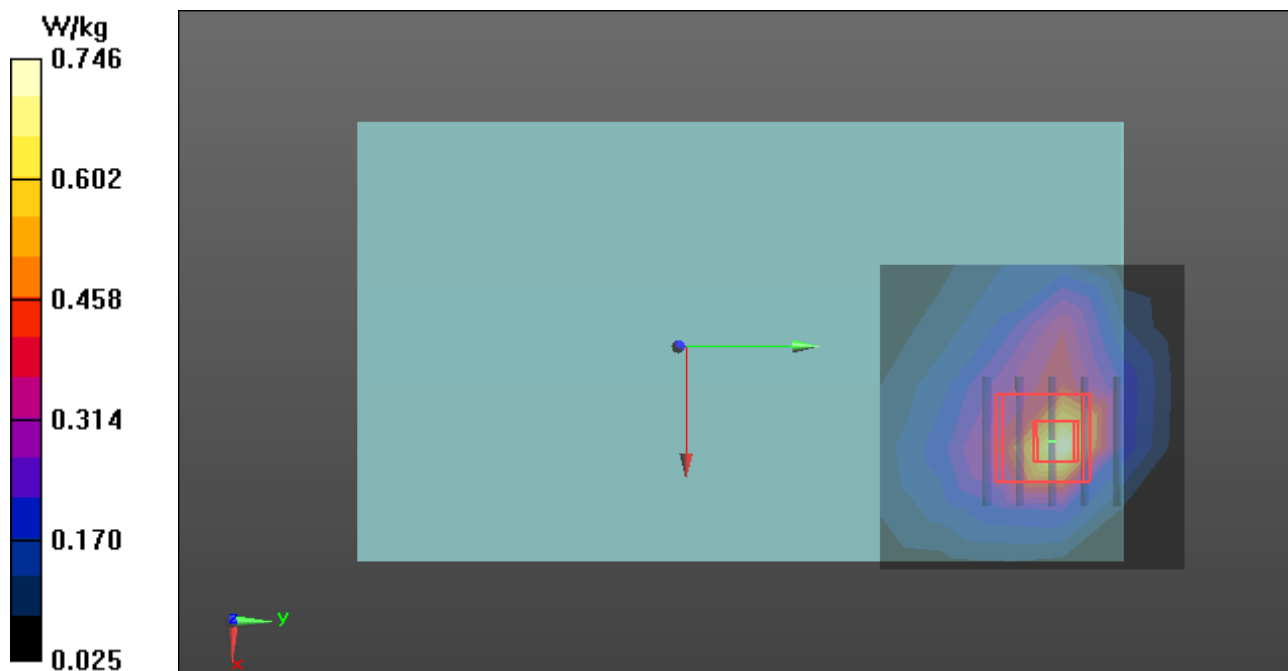

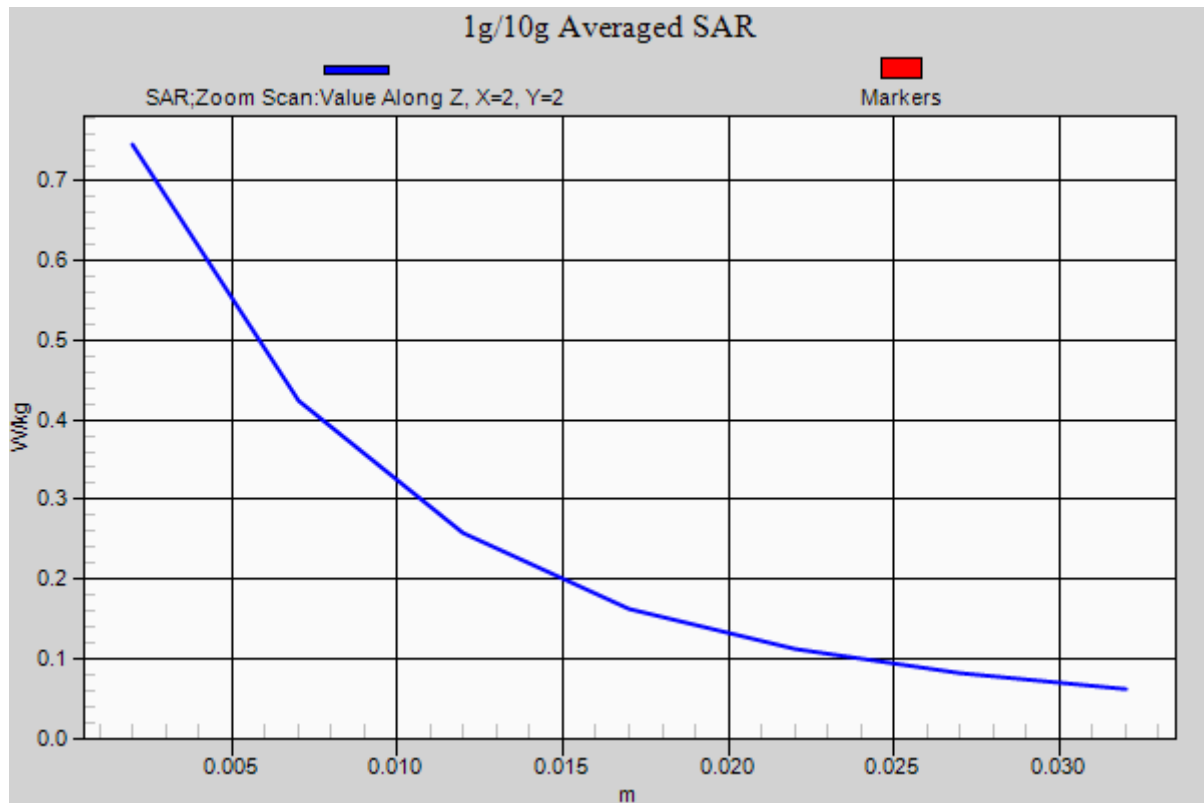



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GPRS 850-Body-Edge 3 High CH251**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.559$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS850/GPRS850 Body Edge 3 High CH251/Area Scan (8x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.372 W/kg

GPRS850/GPRS850 Body Edge 3 High CH251/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.552 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.695 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

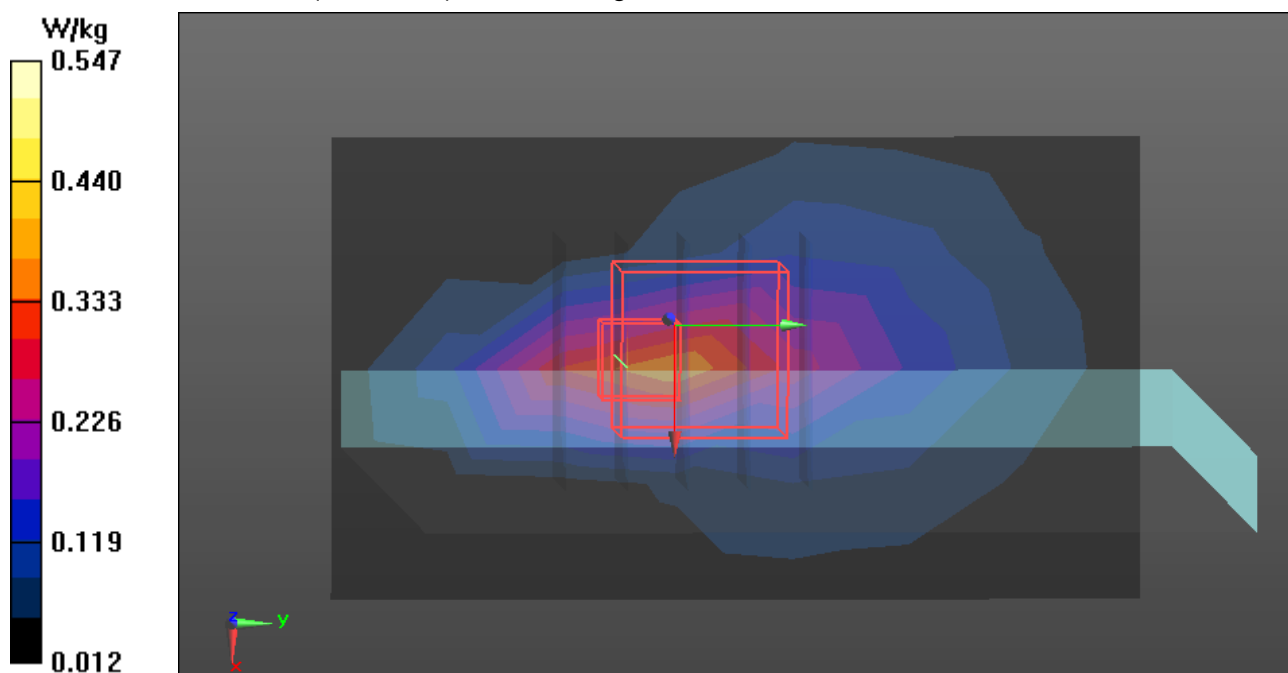



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

GPRS 850-Body-Edge 4 High CH251**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 849$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.559$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS850/GPRS850 Body Edge 4 High CH251/Area Scan (13x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0193 W/kg

GPRS850/GPRS850 Body Edge 4 High CH251/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.879 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0240 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0187 W/kg

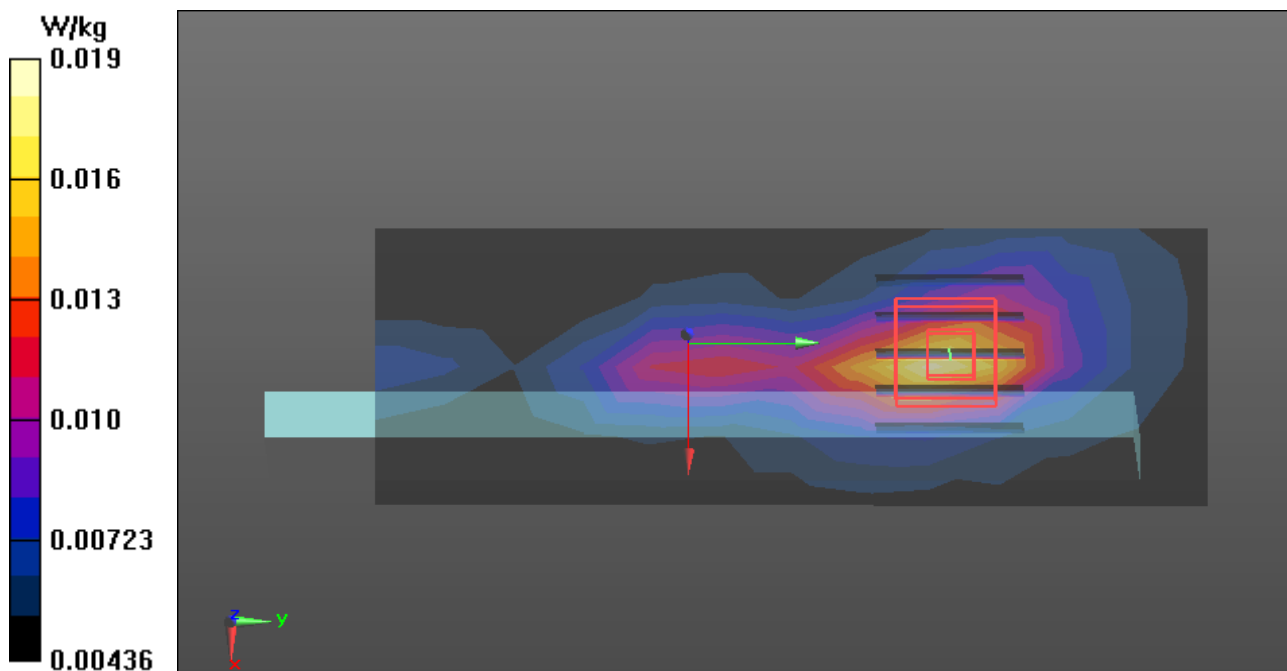



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

PCS 1900-Body Down Middle CH661**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS 1900/Down Middle CH661/Area Scan (5x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.552 W/kg

PCS 1900/ Down Middle CH661/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.779 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.334 W/kg

Maximum value of SAR (measured) = 0.927 W/kg

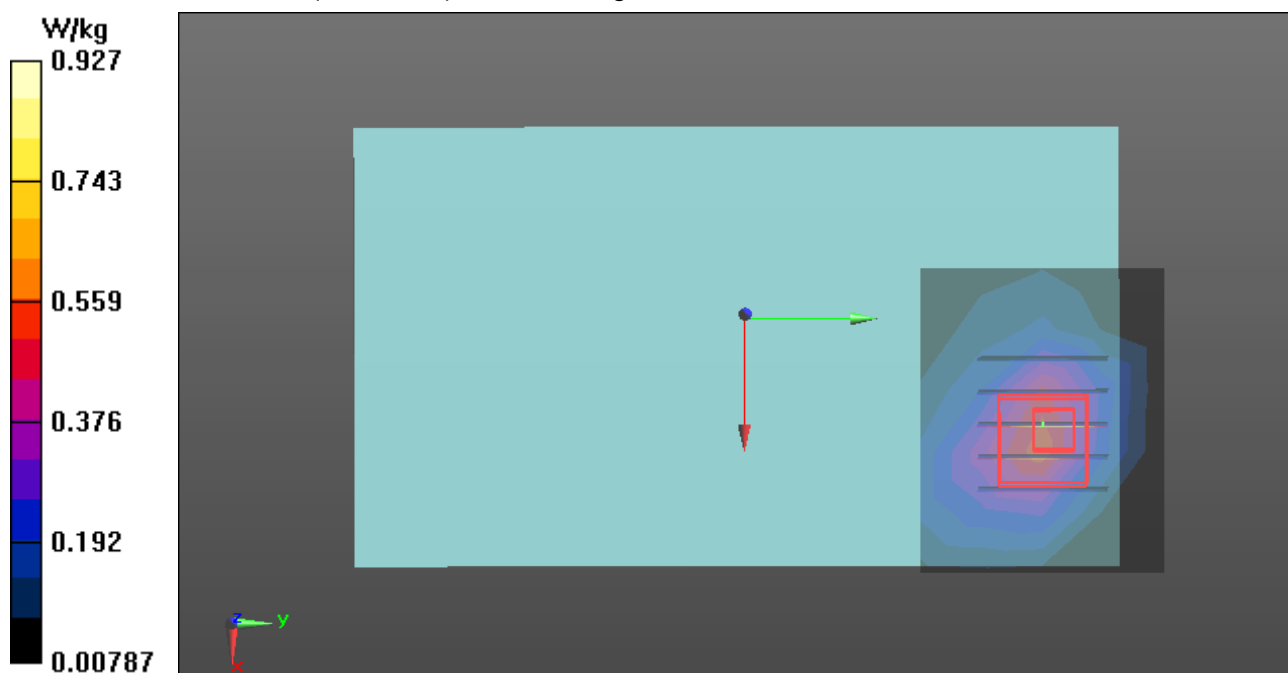

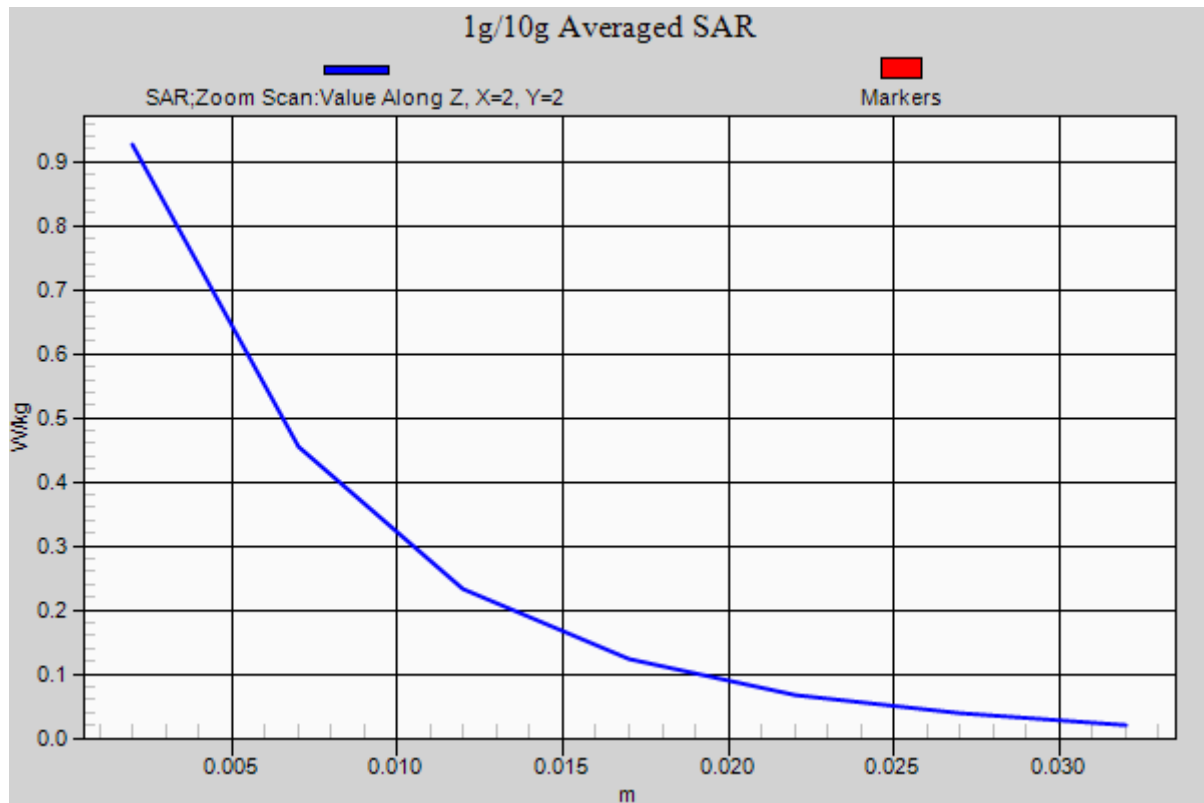



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

PCS1900-Body-Edge 3 Middle CH661**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS1900/PCS1900 Body Edge 3 Middle CH661/Area Scan (8x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.335 W/kg

PCS1900/PCS1900 Body Edge 3 Middle CH661/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.206 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.371 W/kg

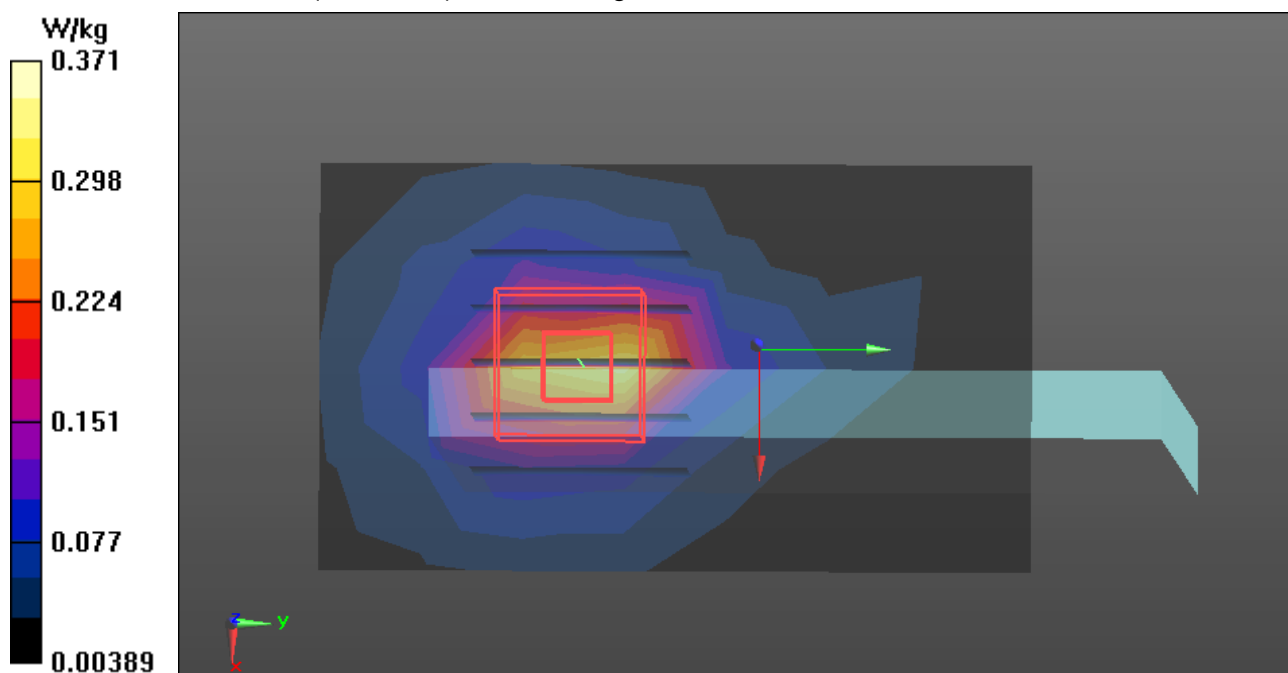



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

PCS1900-Body-Edge 4 Middle CH661**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

PCS 850/Edge 4 Middle CH661/Area Scan (13x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0667 W/kg

PCS 850/Edge 4 Middle CH661/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.893 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0688 W/kg

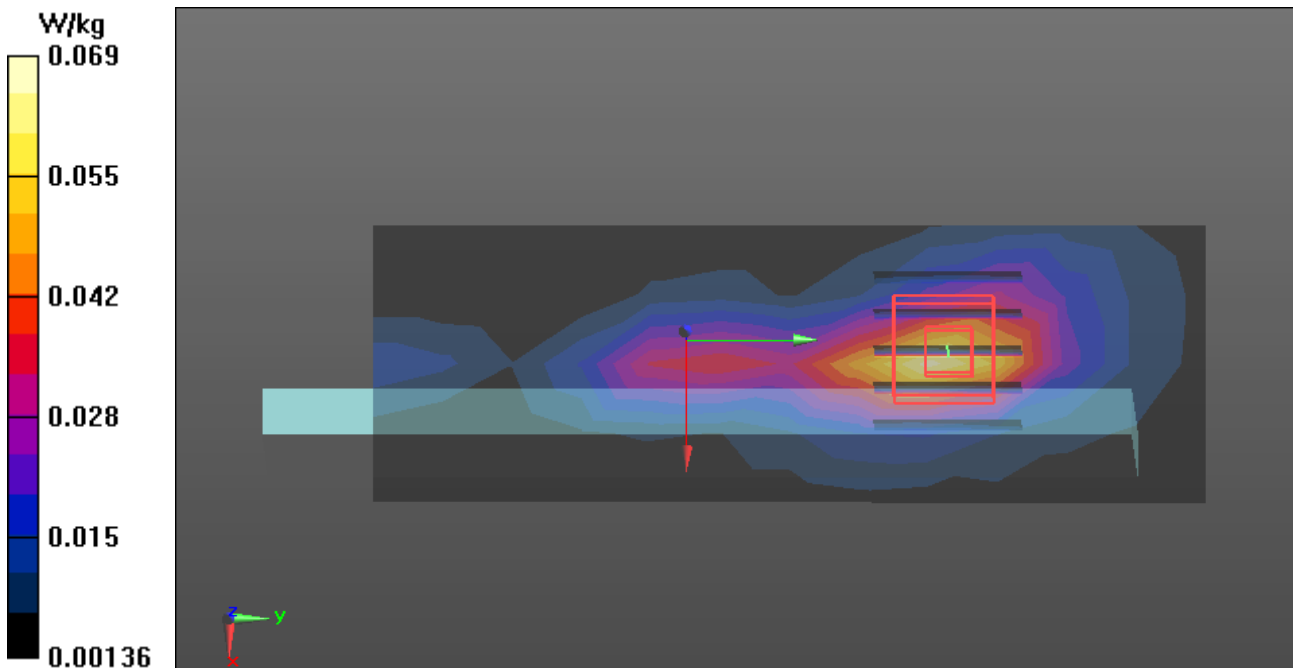

Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

GPRS 1900-Body Down High CH810

DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A

Communication System: Generic GSM; Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.547$ S/m; $\epsilon_r = 53.236$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASY52 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Down High CH810/Area Scan (5x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.407 W/kg

GPRS 1900/ Down High CH810/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 2.528 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

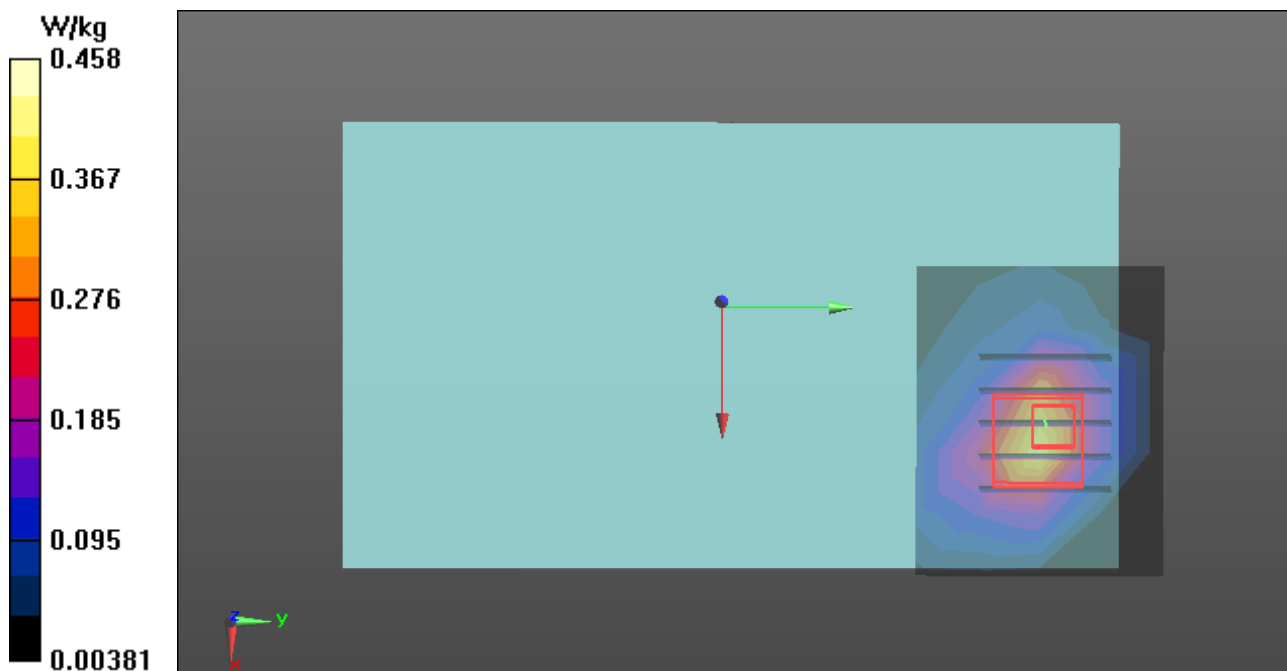

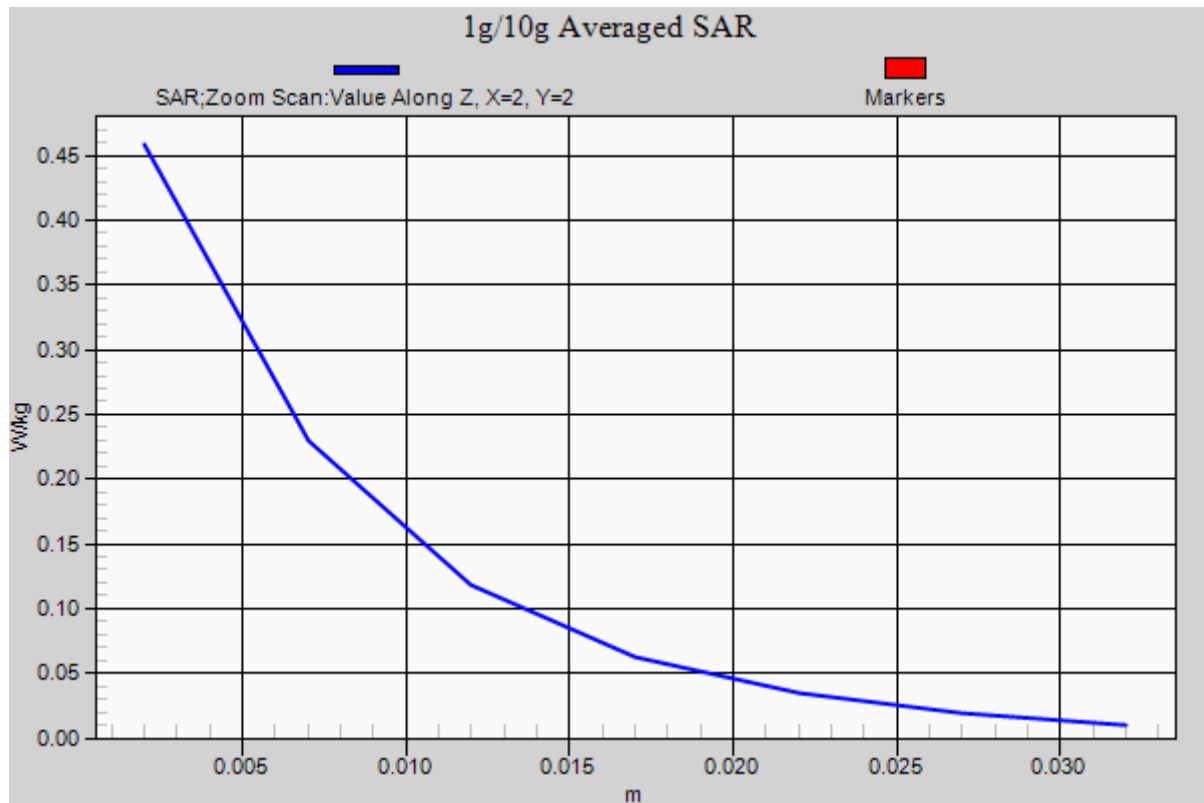



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

GPRS1900-Body-Edge 3 High CH810

DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A

Communication System: Generic PRS; Communication System Band: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS1900/Body Edge 3 High CH810/Area Scan (8x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.144 W/kg

GPRS1900/Body Edge 3 High CH810/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.148 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.162 W/kg

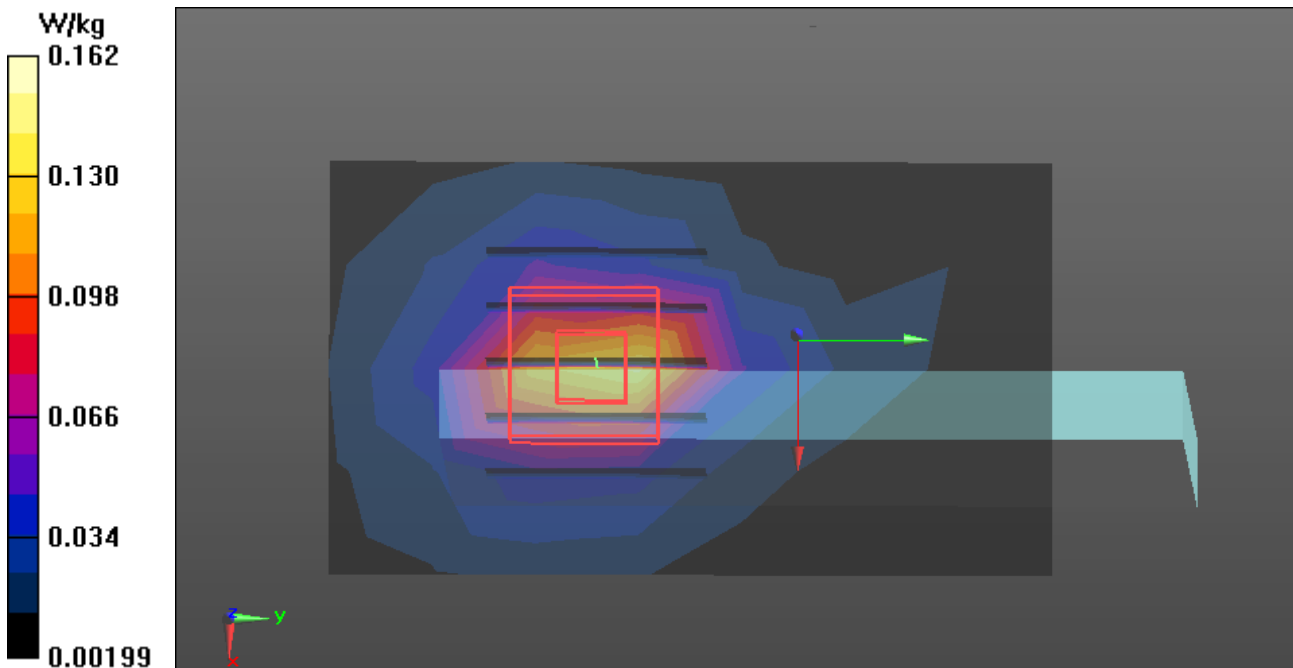



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

GPRS1900-Body-Edge 4 High CH810**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: Generic GPRS; Communication System Band: GPRS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.517$ S/m; $\epsilon_r = 53.303$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

GPRS 1900/Edge 4 High CH810/Area Scan (13x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0289 W/kg

GPRS 1900/Edge 4 High CH810/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.592 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0400 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0314 W/kg

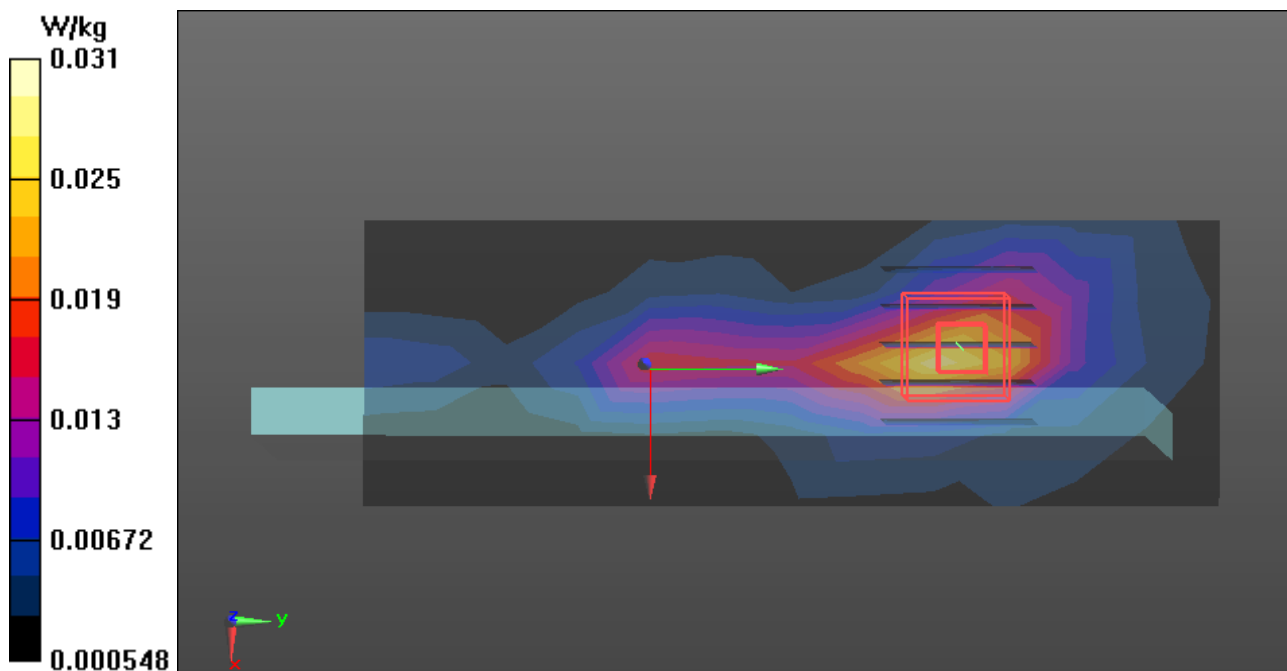



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

WCDMA Band V-Body Down High CH4233**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.571$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Down High CH4233/Area Scan (6x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.950 W/kg

WCDMA/WCDMA Band V Body Down High CH4233/Zoom Scan (6x5x11)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=3mm


Reference Value = 3.216 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.387 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

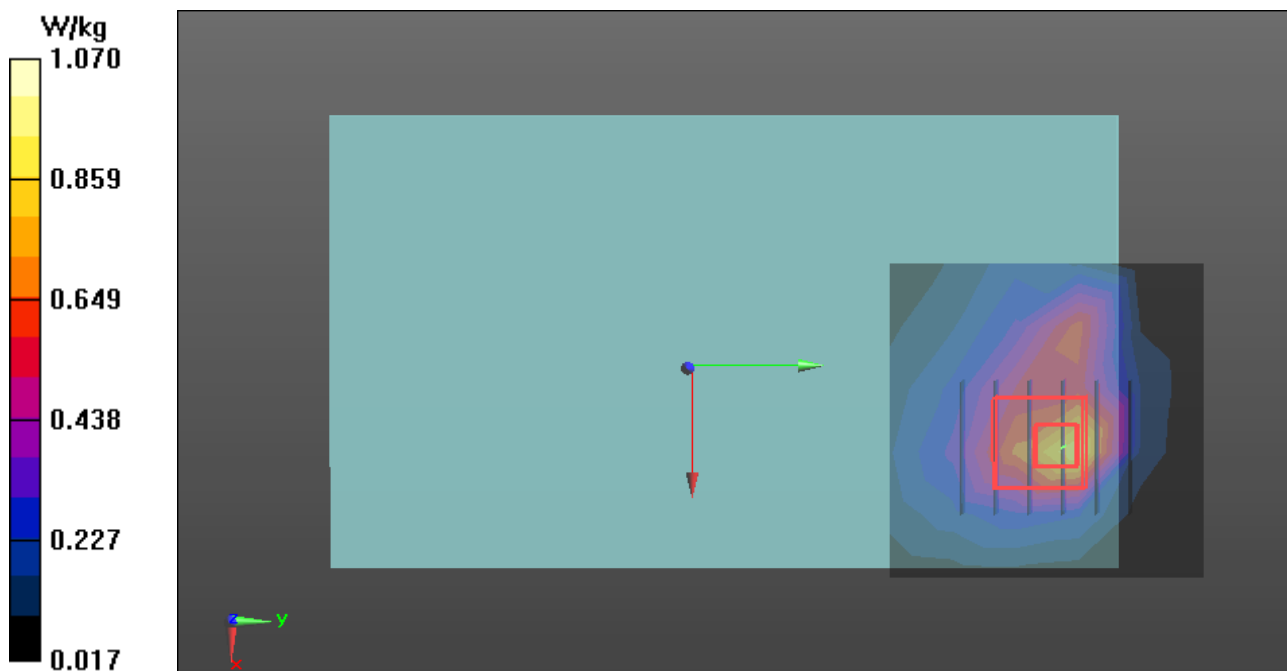

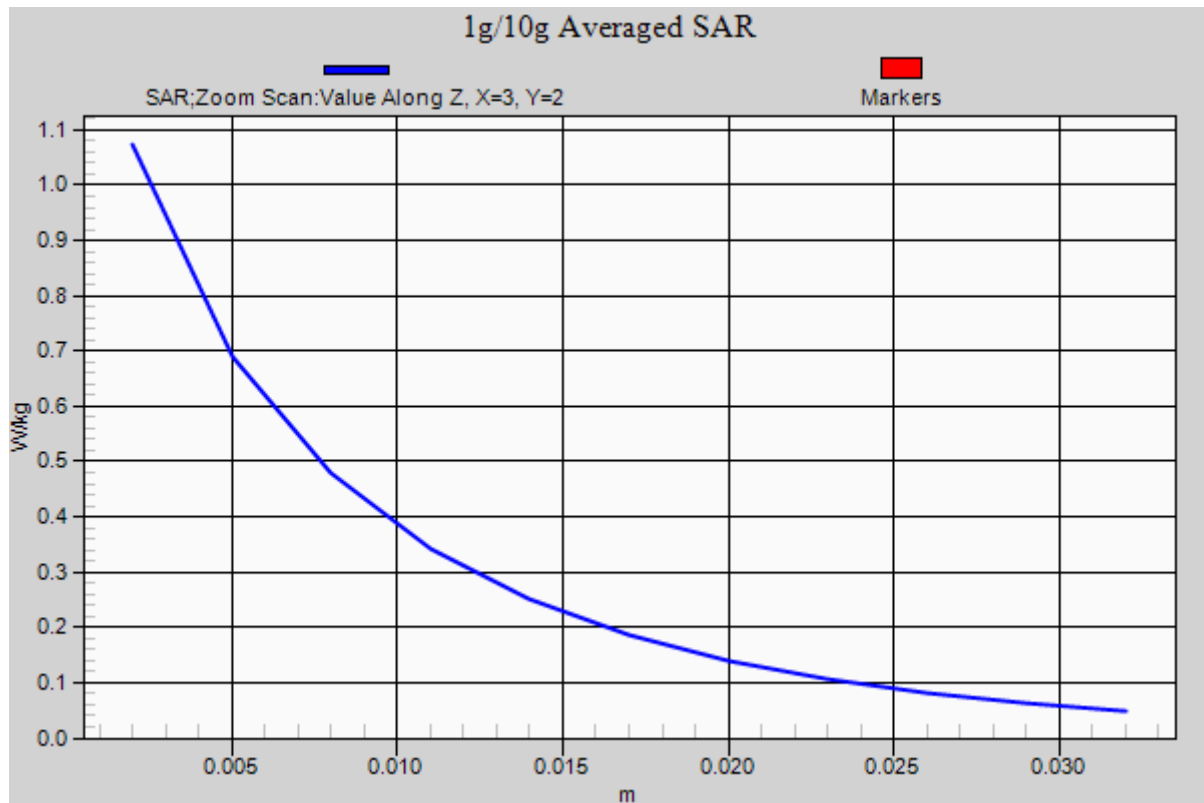



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

WCDMA Band V-Body-Edge 3 High CH4233**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.571$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Edge 3 High CH4233/Area Scan (7x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.499 W/kg

WCDMA/WCDMA Band V Body Edge 3 High CH4233/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.812 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

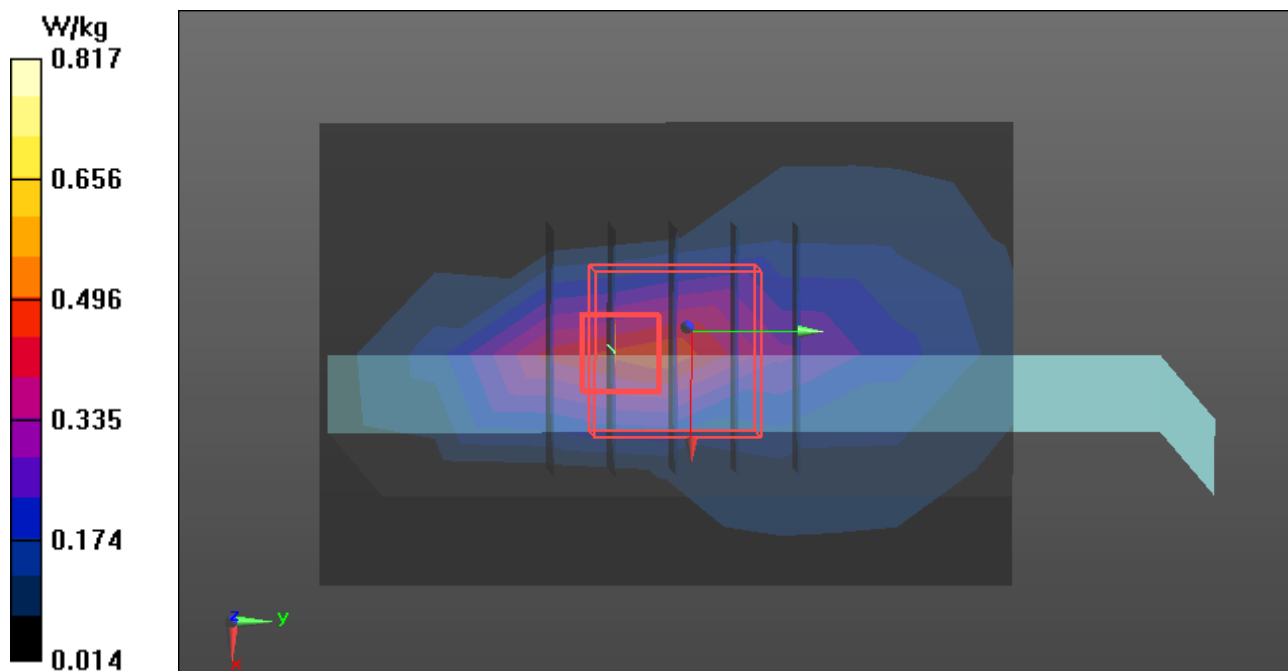



Test Laboratory: Compliance Certification Services Inc.

Date: 11/9/2013

WCDMA Band V-Body-Edge 4 High CH4233**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: FDD WCDMA; Communication System Band: Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 54.571$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.9°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.27, 9.27, 9.27); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band V Body Edge 4 High CH4233/Area Scan (13x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0205 W/kg

WCDMA/WCDMA Band V Body Edge 4 High CH4233/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.502 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00923 W/kg

Maximum value of SAR (measured) = 0.0181 W/kg

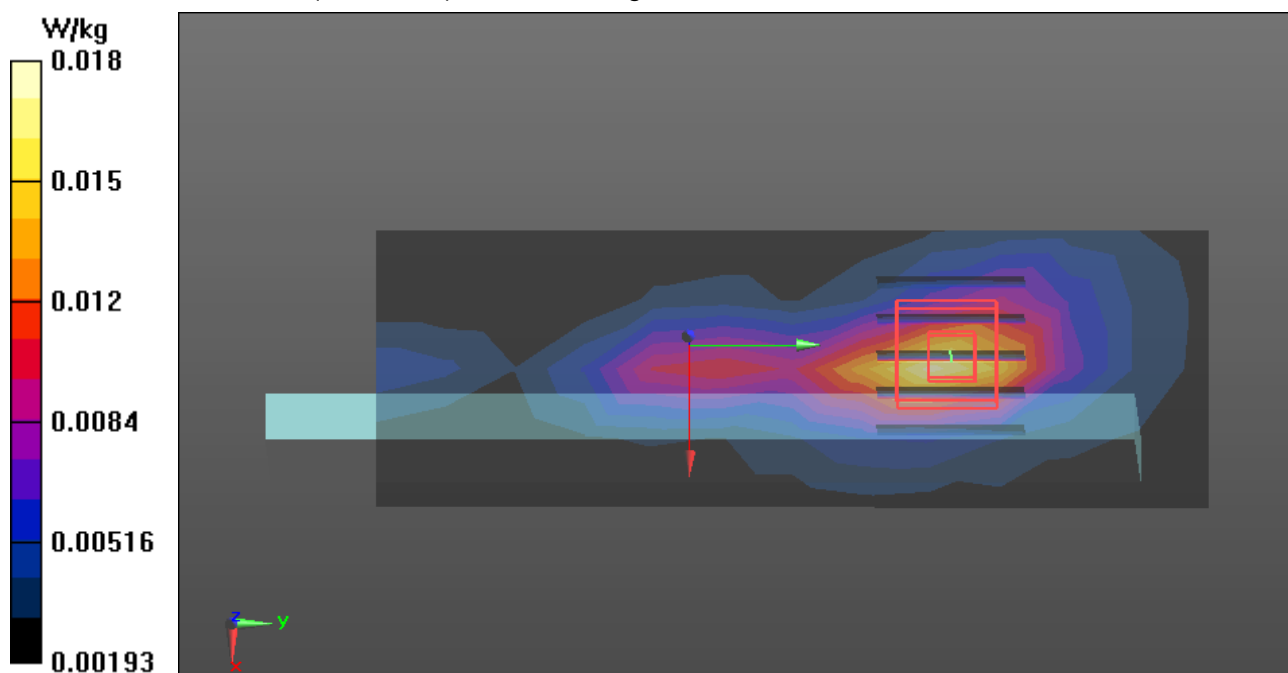



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

WCDMA Band II-Body Down Low CH9262

DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A

Communication System: FDD WCDMA; Communication System Band: Band 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.389$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Down Low CH9262/Area Scan (5x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.413 W/kg

WCDMA/WCDMA Band II Body Down Low CH9262/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 2.704 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.23 W/kg

SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.867 W/kg

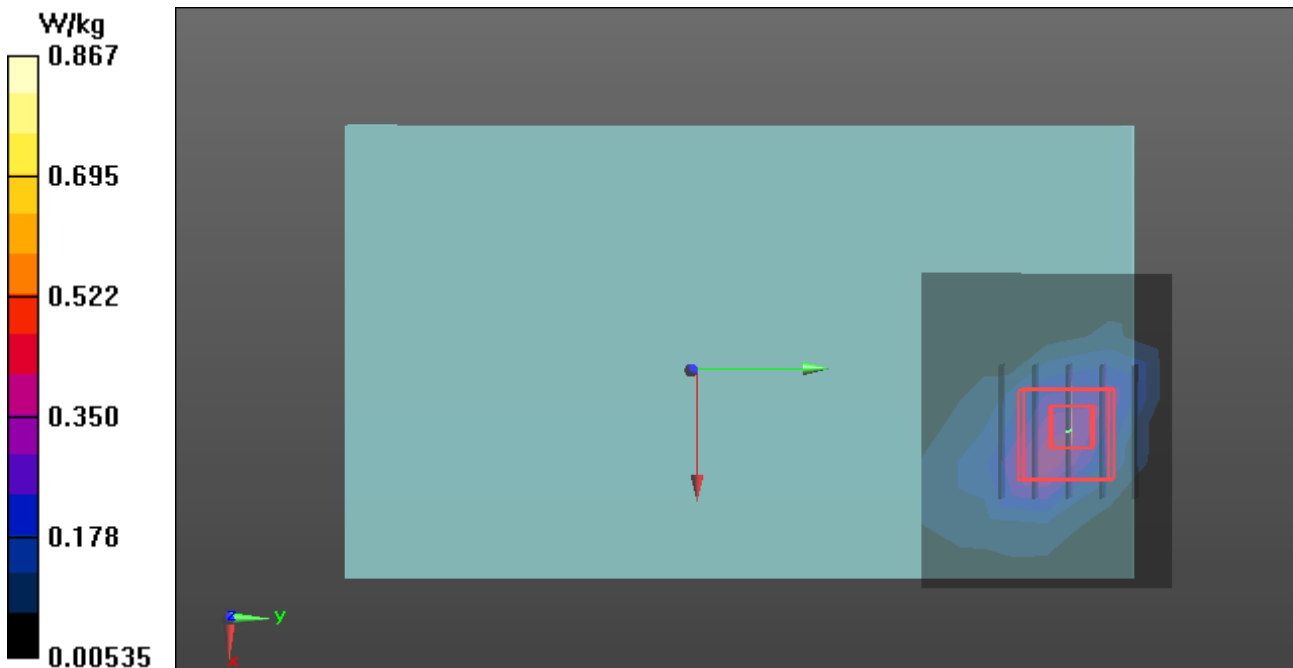

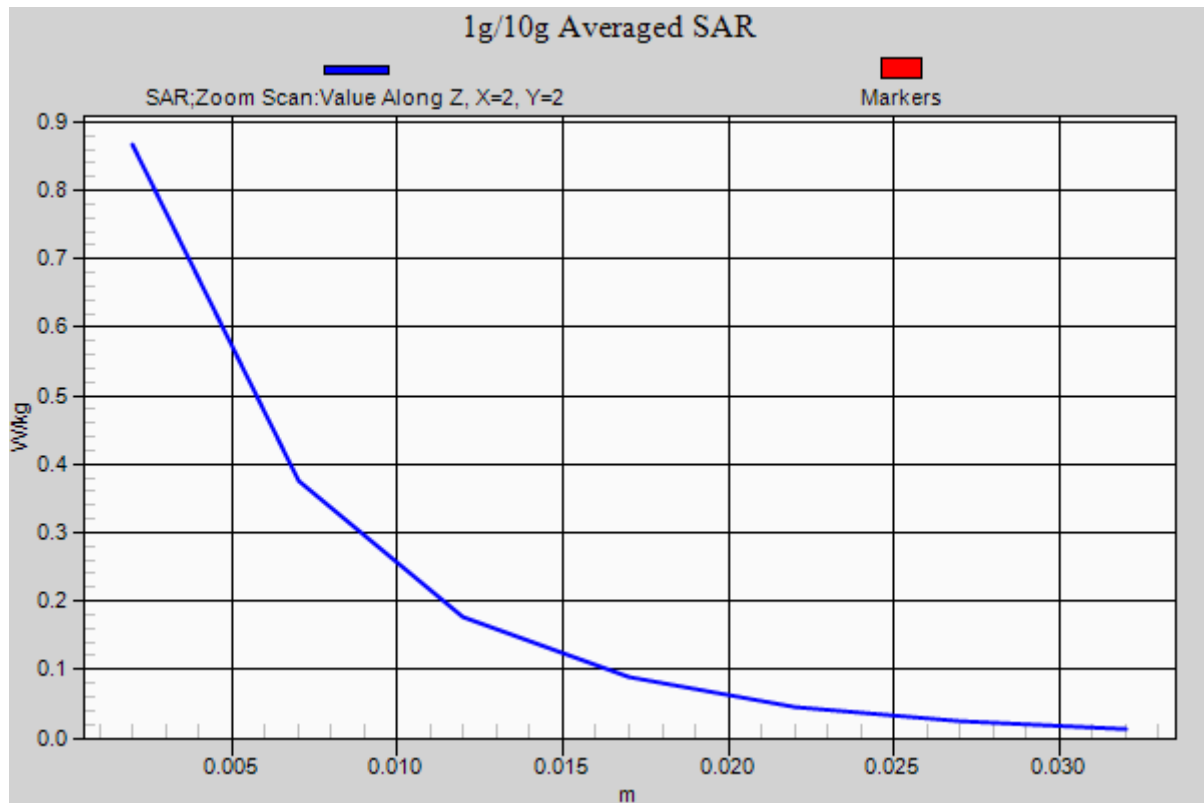



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

WCDMA Band II-Body-Edge 3 Low CH9262**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.389$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Edge 3 Low CH9262/Area Scan (7x6x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.0404 W/kg

WCDMA/WCDMA Band II Body Edge 3 Low CH9262/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.025 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0549 W/kg

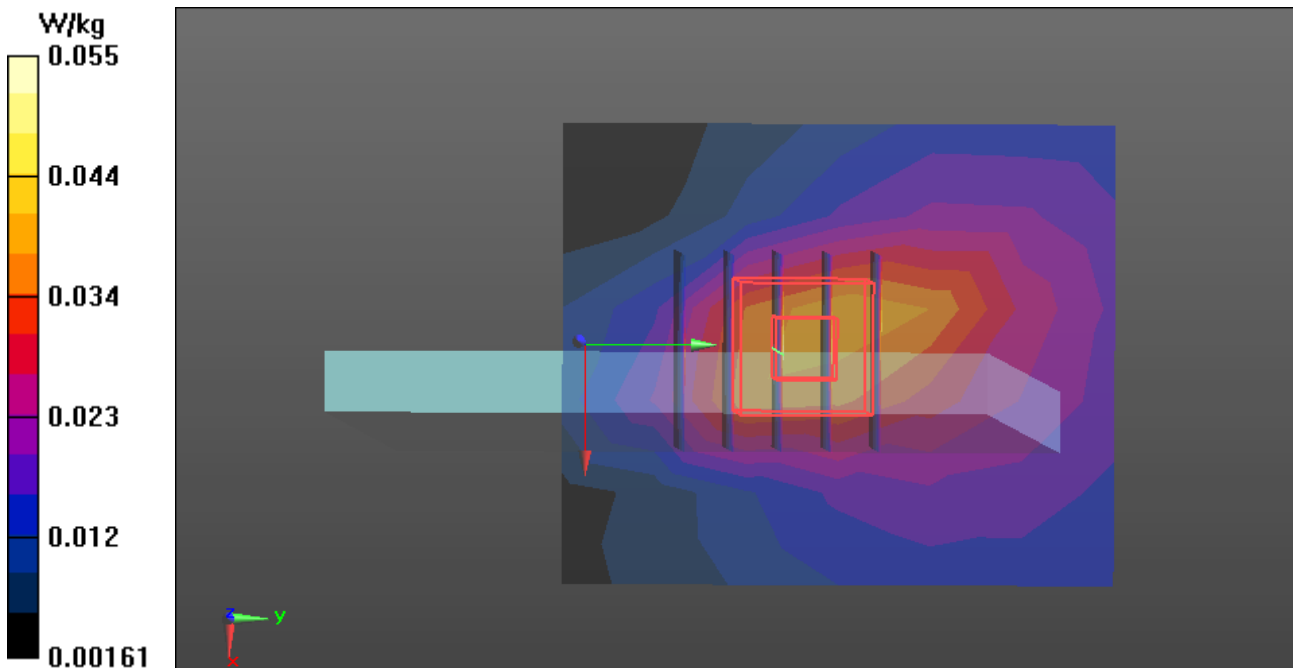



Test Laboratory: Compliance Certification Services Inc.

Date: 11/10/2013

WCDMA Band II-Body-Edge 4 Low CH9262**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 53.389$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.3°C; Liquid Temperature: 21.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.32, 7.32, 7.32); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WCDMA/WCDMA Band II Body Edge 4 Low CH9262/Area Scan (10x5x1):

Measurement grid: dx=15mm, dy=15mm, Maximum value of SAR (measured) = 0.500 W/kg

WCDMA/WCDMA Band II Body Edge 4 Low CH9262/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.957 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.460 W/kg

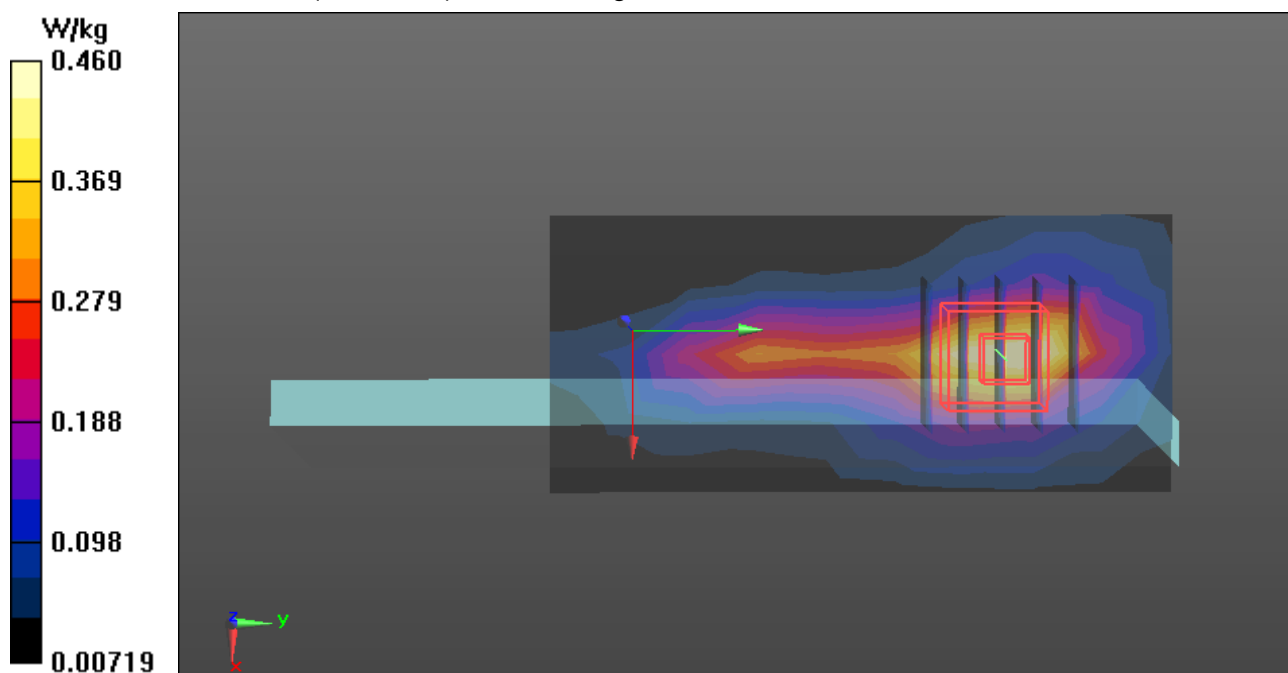



Test Laboratory: Compliance Certification Services Inc.

Date: 11/11/2013

WIFI-Body Down Middle CH6**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 51.971$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Down Middle CH6/Area Scan (6x6x1):

Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.256 W/kg

WIFI/IEEE802.11b Body Down Middle CH6/Zoom Scan (8x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.458 W/kg

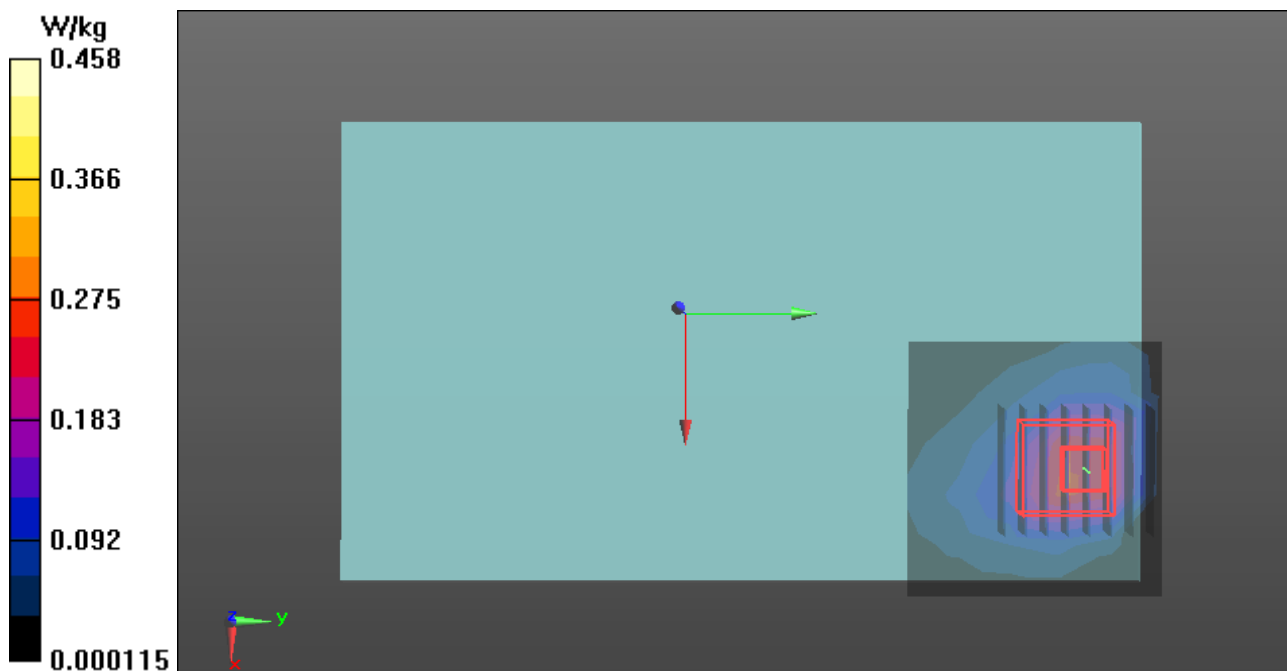

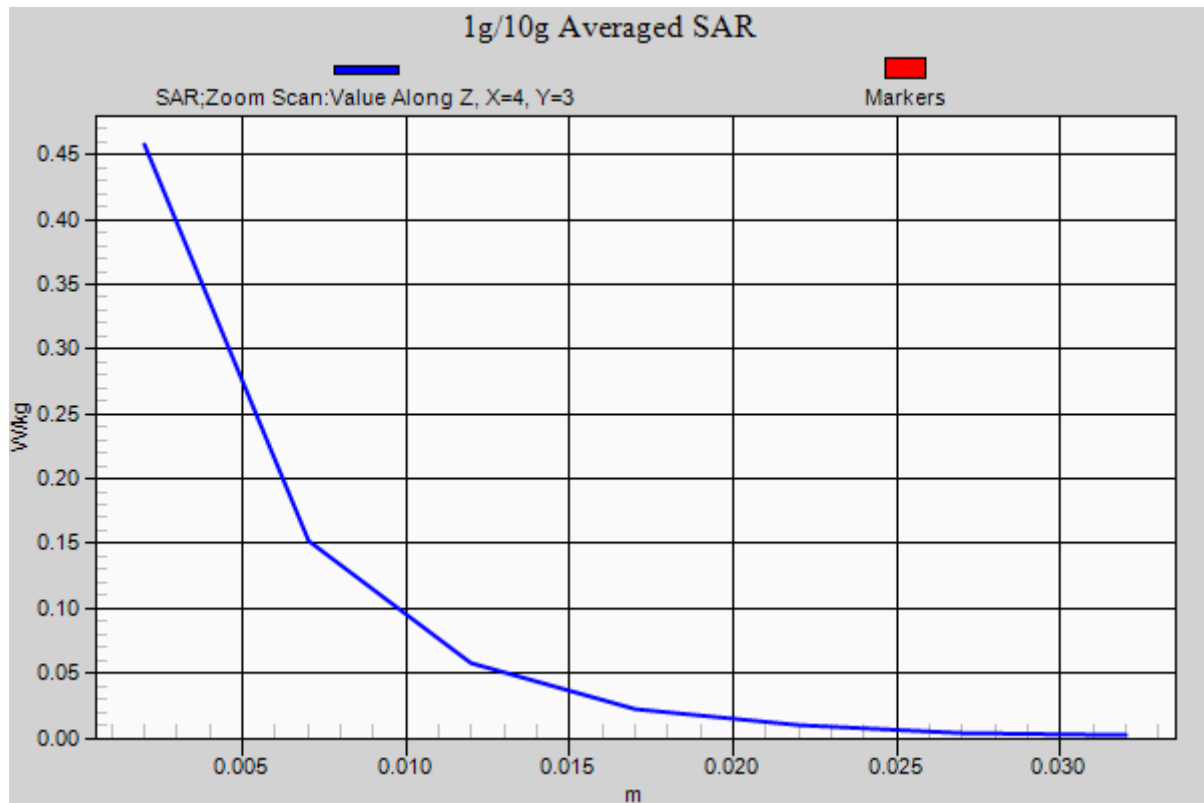



Test Laboratory: Compliance Certification Services Inc.

Date: 11/11/2013

WIFI-Body-Edge 1 Middle CH6**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 51.971$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Edge 1 Middle CH6/Area Scan (8x5x1):

Measurement grid: dx=12mm, dy=12mm, Maximum value of SAR (measured) = 0.0910 W/kg

WIFI/IEEE802.11b Body Edge 1 Middle CH6/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.426 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

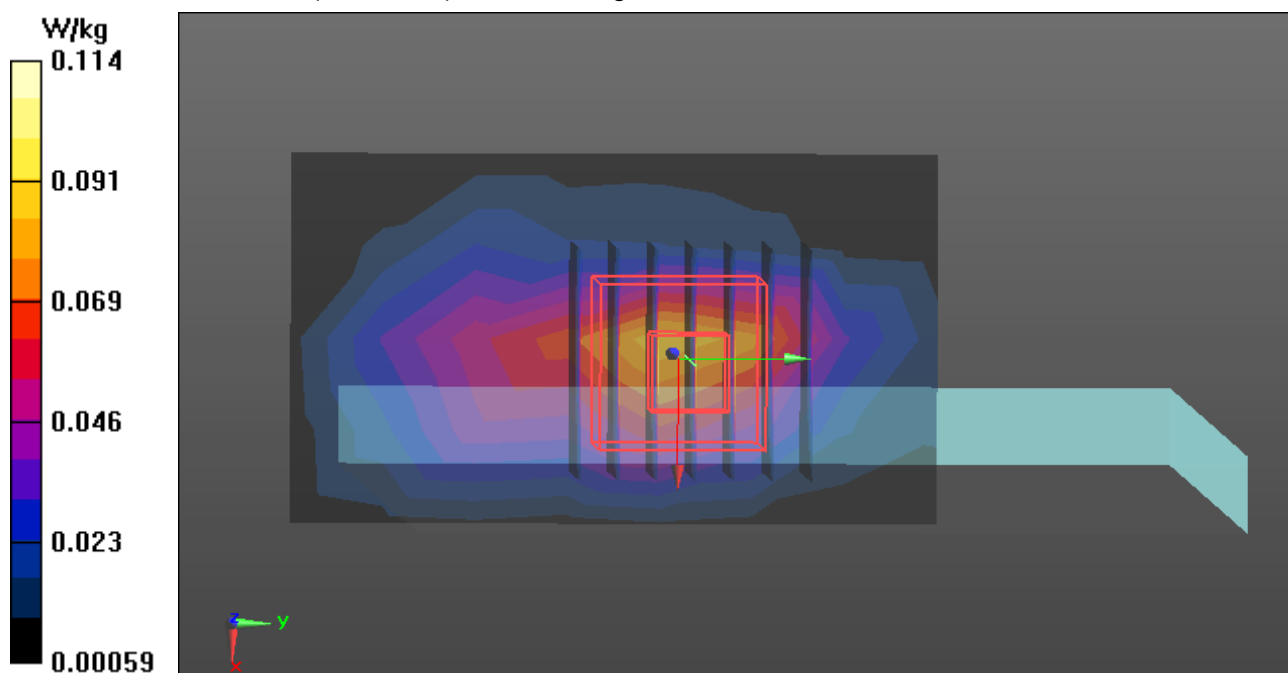



Test Laboratory: Compliance Certification Services Inc.

Date: 11/11/2013

WIFI-Body-Edge 2 Middle CH6**DUT: VINCI MV 7-in Family Tablet; Type: VM-6910; Serial: N/A**

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.946 \text{ S/m}$; $\epsilon_r = 51.971$; $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 23.4°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.08, 7.08, 7.08); Calibrated: 7/26/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/25/2013
- Phantom: ELI v4.0; Type: QDOVA002AA; Serial: TP:1102
- DASYS 52.8.5(1059);
- SEMCAD X Version 14.6.8 (7028)

WIFI/IEEE802.11b Body Edge 2 Middle CH6/Area Scan (9x5x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$, Maximum value of SAR (measured) = 0.125 W/kg**WIFI/IEEE802.11b Body Edge 2 Middle CH6/Zoom Scan (7x7x7)/Cube 0:**Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.798 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.185 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.032 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

