



# **FCC RADIO TEST REPORT**

## **FCC ID:ODD-VSM510A**

**Product :** 5" VINCI Learning Tablet

**Trade Name :** N/A

**Model Name :** ViNCi Tab M

**Serial Model :** N/A

**Report No. :** NTEK- 2012DC0919006F

### **Prepared for**

Rullingnet Corporation Limited

Unit 1210, Level 12, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: [www.ntek.org.cn](http://www.ntek.org.cn)

## TEST RESULT CERTIFICATION

**Applicant's name** ..... : Rullingnet Corporation Limited  
**Address** ..... : Unit 1210, Level 12, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong  
**Manufacture's Name** ..... : Rullingnet Corporation Limited  
**Address** ..... : Unit 1210, Level 12, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong

### Product description

**Product name** ..... : 5" VINCI Learning Tablet  
**Model and/or type reference** : ViNCi Tab M  
**Serial Model** ..... : N/A

**Standards** ..... : FCC Part15.247

**Test procedure** ..... ANSI C63.4-2003

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** ..... :

**Date (s) of performance of tests** ..... : 12 Oct. 2012 ~18 Sep. 2012

**Date of Issue** ..... : 12 Oct. 2012

**Test Result** ..... : **Pass**

**Testing Engineer** : Jason Chen  
(Jason Chen)

**Technical Manager** : Tom Zhang  
(Tom Zhang)

**Authorized Signatory** : Bovey Yang  
(Bovey Yang)

## Table of Contents

|                                                             | Page      |
|-------------------------------------------------------------|-----------|
| <b>1 . SUMMARY OF TEST RESULTS</b>                          | <b>5</b>  |
| 1.1 TEST FACILITY                                           | 6         |
| 1.2 MEASUREMENT UNCERTAINTY                                 | 6         |
| <b>2 . GENERAL INFORMATION</b>                              | <b>7</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT                              | 7         |
| 2.2 DESCRIPTION OF TEST MODES                               | 9         |
| 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 10        |
| 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)            | 11        |
| 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS                      | 12        |
| <b>3 . EMC EMISSION TEST</b>                                | <b>13</b> |
| 3.1 CONDUCTED EMISSION MEASUREMENT                          | 13        |
| 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS                  | 13        |
| 3.1.2 TEST PROCEDURE                                        | 14        |
| 3.1.3 DEVIATION FROM TEST STANDARD                          | 14        |
| 3.1.4 TEST SETUP                                            | 14        |
| 3.1.5 EUT OPERATING CONDITIONS                              | 14        |
| 3.1.6 TEST RESULTS                                          | 15        |
| 3.2 RADIATED EMISSION MEASUREMENT                           | 17        |
| 3.2.1 RADIATED EMISSION LIMITS                              | 17        |
| 3.2.2 TEST PROCEDURE                                        | 18        |
| 3.2.3 DEVIATION FROM TEST STANDARD                          | 18        |
| 3.2.4 TEST SETUP                                            | 19        |
| 3.2.5 EUT OPERATING CONDITIONS                              | 20        |
| 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)                  | 21        |
| 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)                   | 22        |
| 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)                         | 24        |
| <b>4 . POWER SPECTRAL DENSITY TEST</b>                      | <b>56</b> |
| 4.1 APPLIED PROCEDURES / LIMIT                              | 56        |
| 4.1.1 TEST PROCEDURE                                        | 56        |
| 4.1.2 DEVIATION FROM STANDARD                               | 56        |
| 4.1.3 TEST SETUP                                            | 56        |
| 4.1.4 EUT OPERATION CONDITIONS                              | 56        |
| 4.1.5 TEST RESULTS                                          | 57        |
| <b>5 . BANDWIDTH TEST</b>                                   | <b>65</b> |
| 5.1 APPLIED PROCEDURES / LIMIT                              | 65        |
| 5.1.1 TEST PROCEDURE                                        | 65        |

**Table of Contents**

|                                                           | <b>Page</b> |
|-----------------------------------------------------------|-------------|
| 5.1.2 DEVIATION FROM STANDARD                             | 65          |
| 5.1.3 TEST SETUP                                          | 65          |
| 5.1.4 EUT OPERATION CONDITIONS                            | 65          |
| 5.1.5 TEST RESULTS                                        | 66          |
| <b>6 . PEAK OUTPUT POWER TEST</b>                         | <b>74</b>   |
| 6.1 APPLIED PROCEDURES / LIMIT                            | 74          |
| 6.1.1 TEST PROCEDURE                                      | 74          |
| 6.1.2 DEVIATION FROM STANDARD                             | 74          |
| 6.1.3 TEST SETUP                                          | 74          |
| 6.1.4 EUT OPERATION CONDITIONS                            | 74          |
| 6.1.5 TEST RESULTS                                        | 75          |
| <b>7 . ANTENNA REQUIREMENT</b>                            | <b>76</b>   |
| 7.1 STANDARD REQUIREMENT                                  | 76          |
| 7.2 EUT ANTENNA                                           | 76          |
| <b>8 . EUT TEST PHOTO</b>                                 | <b>77</b>   |
| <b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> |             |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

| FCC Part15 (15.247) , Subpart C |                            |          |        |
|---------------------------------|----------------------------|----------|--------|
| Standard Section                | Test Item                  | Judgment | Remark |
| 15.207                          | Conducted Emission         | PASS     |        |
| 15.247 (a)(2)                   | 6dB Bandwidth              | PASS     |        |
| 15.247 (b)                      | Peak Output Power          | PASS     |        |
| 15.247 (c)                      | Radiated Spurious Emission | PASS     |        |
| 15.247 (d)                      | Power Spectral Density     | PASS     |        |
| 15.205                          | Band Edge Emission         | PASS     |        |
| 15.203                          | Antenna Requirement        | PASS     |        |

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

### 1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                         | Uncertainty               |
|-----|------------------------------|---------------------------|
| 1   | Conducted Emission Test      | $\pm 1.38\text{dB}$       |
| 2   | RF power,conducted           | $\pm 0.16\text{dB}$       |
| 3   | Spurious emissions,conducted | $\pm 0.21\text{dB}$       |
| 4   | All emissions,radiated(<1G)  | $\pm 4.68\text{dB}$       |
| 5   | All emissions,radiated(>1G)  | $\pm 4.89\text{dB}$       |
| 6   | Temperature                  | $\pm 0.5^{\circ}\text{C}$ |
| 7   | Humidity                     | $\pm 2\%$                 |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                     |                                                                                                                                                                                                                    |                                                                                                                                                                                         |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment           | 5" VINCI Learning Tablet                                                                                                                                                                                           |                                                                                                                                                                                         |
| Trade Name          | N/A                                                                                                                                                                                                                |                                                                                                                                                                                         |
| Model Name          | ViNCi Tab M                                                                                                                                                                                                        |                                                                                                                                                                                         |
| Serial Model        | N/A                                                                                                                                                                                                                |                                                                                                                                                                                         |
| Model Difference    | N/A                                                                                                                                                                                                                |                                                                                                                                                                                         |
| Product Description | The EUT is a 5" VINCI Learning Tablet                                                                                                                                                                              |                                                                                                                                                                                         |
|                     | Operation Frequency:                                                                                                                                                                                               | 2412~2462 MHz                                                                                                                                                                           |
|                     | Modulation Type:                                                                                                                                                                                                   | CCK/OFDM/DBPSK/DAPSK                                                                                                                                                                    |
|                     | Bit Rate of Transmitter                                                                                                                                                                                            | 802.11b:11/5.5/2/1 Mbps<br>802.11g:54/48/36/24/18/12/9/6 Mbps<br>802.11n(20MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5 Mbps<br>802.11n(40MHz):270/240/180/150/120/108/90/54 Mbps |
|                     | Number Of Channel                                                                                                                                                                                                  | 11 CH, Please see Note 2.                                                                                                                                                               |
|                     | Antenna Designation:                                                                                                                                                                                               | Please see Note 3.                                                                                                                                                                      |
|                     | Output Power(Conducted):                                                                                                                                                                                           | 802.11b: 10.81 dBm (Max.)<br>802.11g: 9.13 dBm (Max.)<br>802.11n(20M) : 8.89 dBm (Max.)<br>802.11n(40M) : 8.43 dBm (Max.)                                                               |
|                     | Antenna Gain (dBi)                                                                                                                                                                                                 | -1.93dBi                                                                                                                                                                                |
|                     | EIRP                                                                                                                                                                                                               | 802.11b: 8.88 dBm (Max.)<br>802.11g: 7.20 dBm (Max.)<br>802.11n(20M) : 6.96 dBm (Max.)<br>802.11n(40M) : 6.50 dBm (Max.)                                                                |
|                     | Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. |                                                                                                                                                                                         |
| Channel List        | Please refer to the Note 2.                                                                                                                                                                                        |                                                                                                                                                                                         |
| Ratings             | DC 5V                                                                                                                                                                                                              |                                                                                                                                                                                         |
| Adapter             | Model: IT15V050200X,<br>AC Power Input: 100-240V~, 50/60Hz, 0.5A<br>Output: 5.0V  2000mA                                        |                                                                                                                                                                                         |
| Battery             | DC 3.7V                                                                                                                                                                                                            |                                                                                                                                                                                         |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

| Channel List for 802.11b/g/n(20MHz) |                 |         |                 |         |                 |         |                 |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01                                  | 2412            | 04      | 2427            | 07      | 2442            | 10      | 2457            |
| 02                                  | 2417            | 05      | 2432            | 08      | 2447            | 11      | 2462            |
| 03                                  | 2422            | 06      | 2437            | 09      | 2452            |         |                 |

| Channel List for 802.11n(40MHz) |                 |         |                 |         |                 |         |                 |
|---------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel                         | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 03                              | 2422            | 06      | 2437            | 09      | 2452            |         |                 |
| 04                              | 2427            | 07      | 2442            |         |                 |         |                 |
| 05                              | 2432            | 08      | 2447            |         |                 |         |                 |

3.

Table for Filed Antenna

| Ant | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | NOTE |
|-----|-------|------------|--------------|-----------|------------|------|
| A   | N/A   | N/A        | FPCB         | N/A       | -1.93      | N/A  |



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                    |
|--------------|------------------------------------------------|
| Mode 1       | 802.11b CH1/ CH6/ CH11, 1 Mbps data rate       |
| Mode 2       | 802.11g CH1/ CH6/ CH11, 6 Mbps data rate       |
| Mode 3       | 802.11n(20) CH1/ CH6/ CH11, 6.5 Mbps data rate |
| Mode 4       | 802.11n(40) CH3/ CH6/ CH9, 54 Mbps data rate   |
| Mode 5       | NORMAL LINK                                    |


| For Conducted Emission |             |
|------------------------|-------------|
| Final Test Mode        | Description |
| Mode 5                 | NORMAL LINK |

| For Radiated Emission |                                                |
|-----------------------|------------------------------------------------|
| Final Test Mode       | Description                                    |
| Mode 1                | 802.11b CH1/ CH6/ CH11, 1 Mbps data rate       |
| Mode 2                | 802.11g CH1/ CH6/ CH11, 6 Mbps data rate       |
| Mode 3                | 802.11n(20) CH1/ CH6/ CH11, 6.5 Mbps data rate |
| Mode 4                | 802.11n(40) CH3/ CH6/ CH9, 54 Mbps data rate   |

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

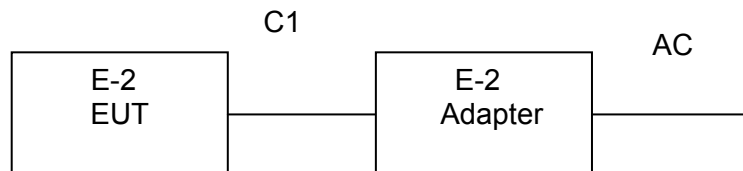

## 2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|--------------------------|-----------|----------------|------------|------|
| E-1  | 5" VINCI Learning Tablet | N/A       | ViNCi Tab M    | N/A        | EUT  |
| E-2  | Adapter                  | N/A       | IT15V050200X   | N/A        |      |
|      |                          |           |                |            |      |
|      |                          |           |                |            |      |
|      |                          |           |                |            |      |
|      |                          |           |                |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C1   | NO            | NO           | 1.0M   |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

| Item | Kind of Equipment  | Manufacturer | Type No.    | Serial No. | Calibrated until |
|------|--------------------|--------------|-------------|------------|------------------|
| 1    | Spectrum Analyzer  | Agilent      | E4407B      | 160400005  | Jul. 06. 2013    |
| 2    | Test Receiver      | R&S          | ESPI        | 101318     | Jul. 06. 2013    |
| 3    | Bilog Antenna      | TESEQ        | CBL6111D    | 31216      | Jul. 06. 2013    |
| 4    | 50Ω Coaxial Switch | Anritsu      | MP59B       | 6200264416 | Jul. 06. 2013    |
| 5    | Spectrum Analyzer  | ADVANTEST    | R3132       | 150900201  | Jul. 06. 2013    |
| 6    | Horn Antenna       | EM           | EM-AH-10180 | 2011071402 | Jul. 06. 2013    |
| 7    | Horn Ant           | Schwarzbeck  | BBHA 9170   | 9170-181   | Jul. 06. 2013    |
| 8    | Amplifier          | EM           | EM-30180    | 060538     | Jul. 06. 2013    |
| 9    | Loop Antenna       | ARA          | PLA-1030/B  | 1029       | Jul. 06. 2013    |
| 10   | Power Meter        | R&S          | NRVS        | 100696     | Jul. 06. 2013    |

### Conduction Test equipment

| Item | Kind of Equipment     | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|-----------------------|--------------|----------|------------|------------------|
| 1    | Test Receiver         | R&S          | ESCI     | 101160     | Jul. 06. 2013    |
| 2    | LISN                  | R&S          | ENV216   | 101313     | Jul. 06. 2013    |
| 3    | LISN                  | EMCO         | 3816/2   | 00042990   | Jul. 06. 2013    |
| 4    | 50Ω Coaxial Switch    | Anritsu      | MP59B    | 6200264417 | Jul. 06. 2013    |
| 5    | Passive Voltage Probe | R&S          | ESH2-Z3  | 100196     | Jul. 06. 2013    |
| 6    | Absorbing clamp       | R&S          | MOS-21   | 100423     | Jul. 06. 2013    |

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

| FREQUENCY (MHz) | Class A (dBuV) |         | Class B (dBuV) |           | Standard |
|-----------------|----------------|---------|----------------|-----------|----------|
|                 | Quasi-peak     | Average | Quasi-peak     | Average   |          |
| 0.15 -0.5       | 79.00          | 66.00   | 66 - 56 *      | 56 - 46 * | CISPR    |
| 0.50 -5.0       | 73.00          | 60.00   | 56.00          | 46.00     | CISPR    |
| 5.0 -30.0       | 73.00          | 60.00   | 60.00          | 50.00     | CISPR    |

|           |       |       |           |           |     |
|-----------|-------|-------|-----------|-----------|-----|
| 0.15 -0.5 | 79.00 | 66.00 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 73.00 | 60.00 | 56.00     | 46.00     | FCC |
| 5.0 -30.0 | 73.00 | 60.00 | 60.00     | 50.00     | FCC |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


### 3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

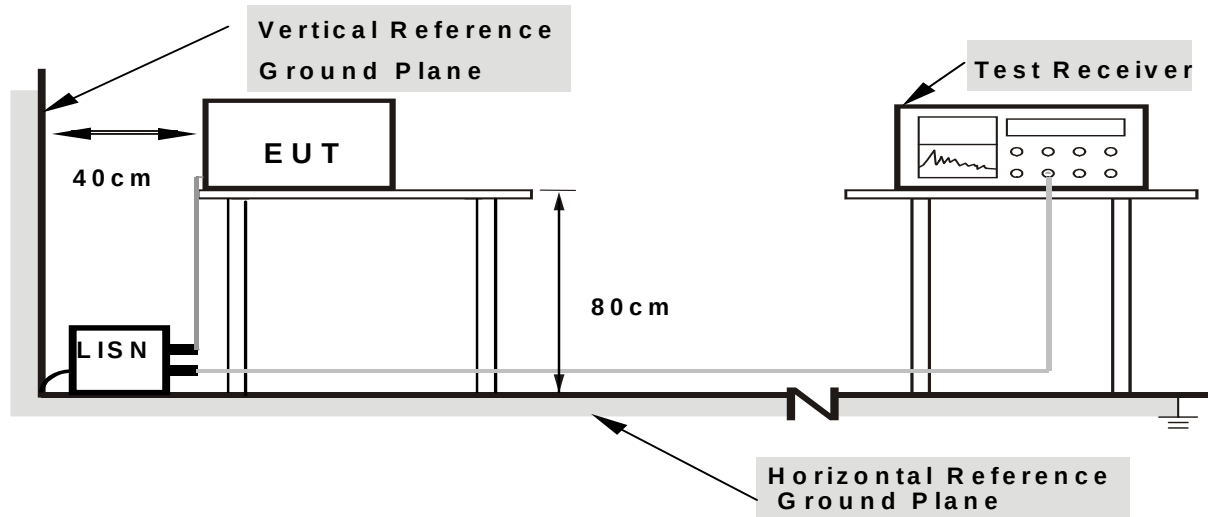

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

|                |                                 |                     |                                |
|----------------|---------------------------------|---------------------|--------------------------------|
| EUT :          | 5" VINCI Learning Tablet        | Model Name. :       | ViNCi Tab M                    |
| Temperature :  | 26 °C                           | Relative Humidity : | 54%                            |
| Pressure :     | 1010hPa                         | Phase :             | L                              |
| Test Voltage : | DC 5V From Adapter AC 120V/60Hz | Test Mode :         | 802.11b CH1<br>1Mbps data rate |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|--------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV)         | (dBμV) | (dB)   |               |
| 0.1539    | 45.67         | 11.20  | 56.87          | 65.78  | -8.91  | QP            |
| 0.1539    | 35.19         | 11.20  | 46.39          | 55.78  | -9.39  | AVG           |
| 1.4900    | 36.02         | 10.98  | 47.00          | 56.00  | -9.00  | QP            |
| 2.4420    | 36.91         | 11.04  | 47.95          | 56.00  | -8.05  | QP            |
| 2.4539    | 27.75         | 11.04  | 38.79          | 46.00  | -7.21  | AVG           |
| 4.1940    | 34.74         | 11.28  | 46.02          | 56.00  | -9.98  | QP            |
| 11.6420   | 33.83         | 11.39  | 45.22          | 60.00  | -14.78 | QP            |

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. The test results is to use the lowest bit rate, is the worst.

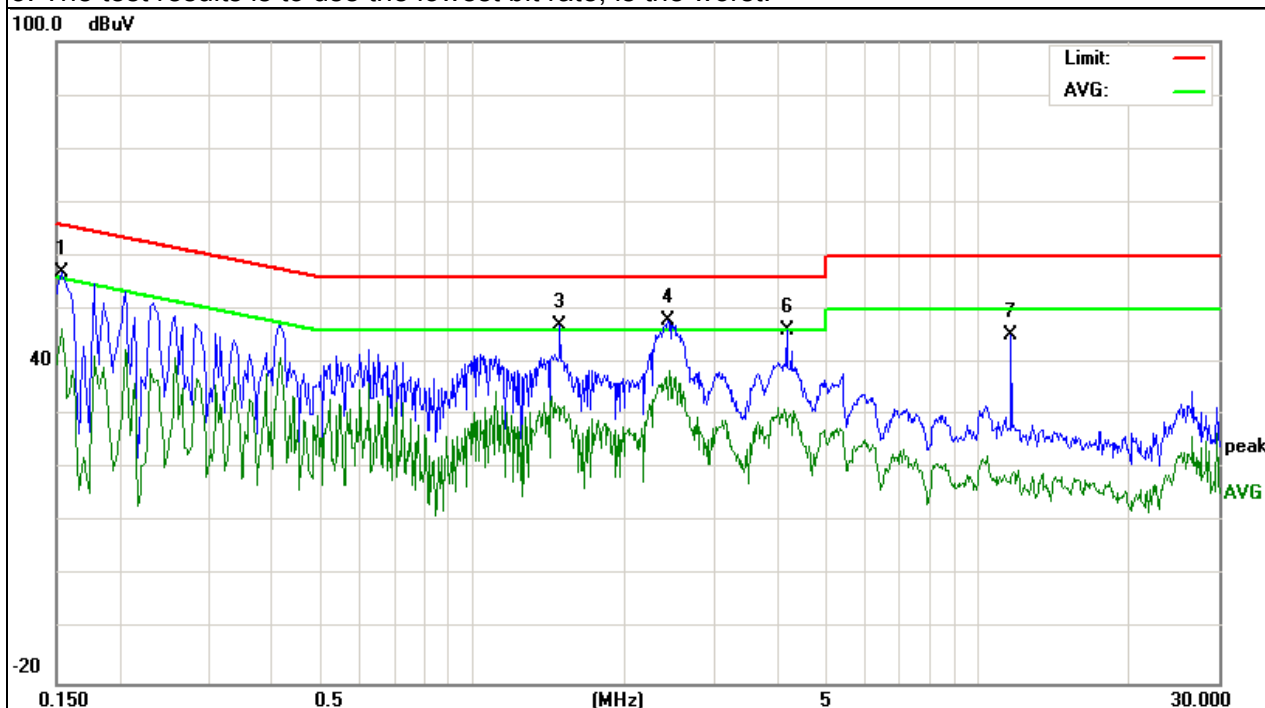


|                |                                 |                     |                                |
|----------------|---------------------------------|---------------------|--------------------------------|
| EUT :          | 5" VINCI Learning Tablet        | Model Name. :       | ViNCi Tab M                    |
| Temperature :  | 26 °C                           | Relative Humidity : | 54%                            |
| Pressure :     | 1010hPa                         | Phase :             | N                              |
| Test Voltage : | DC 5V From Adapter AC 120V/60Hz | Test Mode :         | 802.11b CH1<br>1Mbps data rate |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV) | Limits<br>(dBμV) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|--------------------------|------------------|----------------|---------------|
| 0.1500             | 31.44                   | 11.63          | 43.07                    | 65.99            | -22.92         | QP            |
| 0.4460             | 17.89                   | 10.91          | 28.80                    | 46.95            | -18.15         | AVG           |
| 0.4500             | 26.72                   | 10.92          | 37.64                    | 56.87            | -19.23         | QP            |
| 5.5460             | 21.12                   | 11.35          | 32.47                    | 60.00            | -27.53         | QP            |
| 24.9220            | 26.83                   | 11.45          | 38.28                    | 60.00            | -21.72         | QP            |
| 29.6940            | 21.08                   | 11.44          | 32.52                    | 50.00            | -17.48         | AVG           |

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. The test results is to use the lowest bit rate, is the worst.

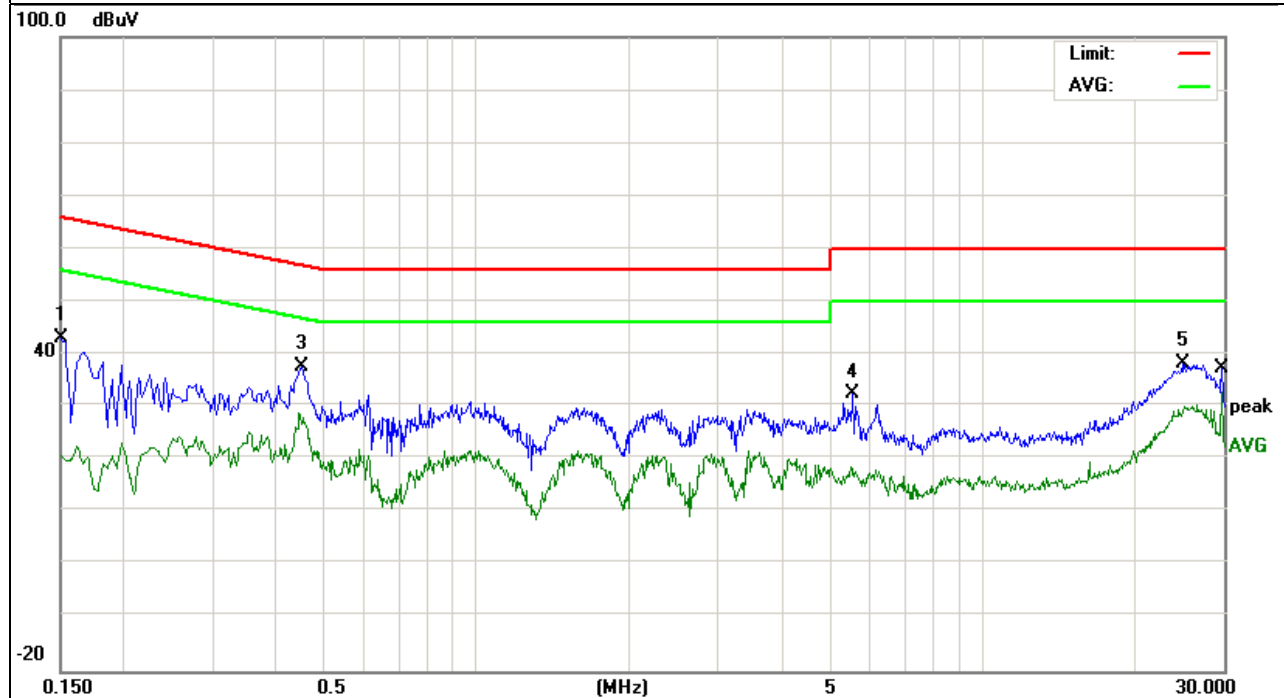



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(microvolt/meter) | Measurement Distance<br>(meters) |
|----------------------|-------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                         | 300                              |
| 0.490~1.705          | 24000/F(KHz)                        | 30                               |
| 1.705~30.0           | 30                                  | 30                               |
| 30~88                | 100                                 | 3                                |
| 88~216               | 150                                 | 3                                |
| 216~960              | 200                                 | 3                                |
| Above 960            | 500                                 | 3                                |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

| FREQUENCY (MHz) | Class A (dBuV/m) (at 3M) |         | Class B (dBuV/m) (at 3M) |         |
|-----------------|--------------------------|---------|--------------------------|---------|
|                 | PEAK                     | AVERAGE | PEAK                     | AVERAGE |
| Above 1000      | 80                       | 60      | 74                       | 54      |

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

**3.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**Note:**


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

**3.2.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

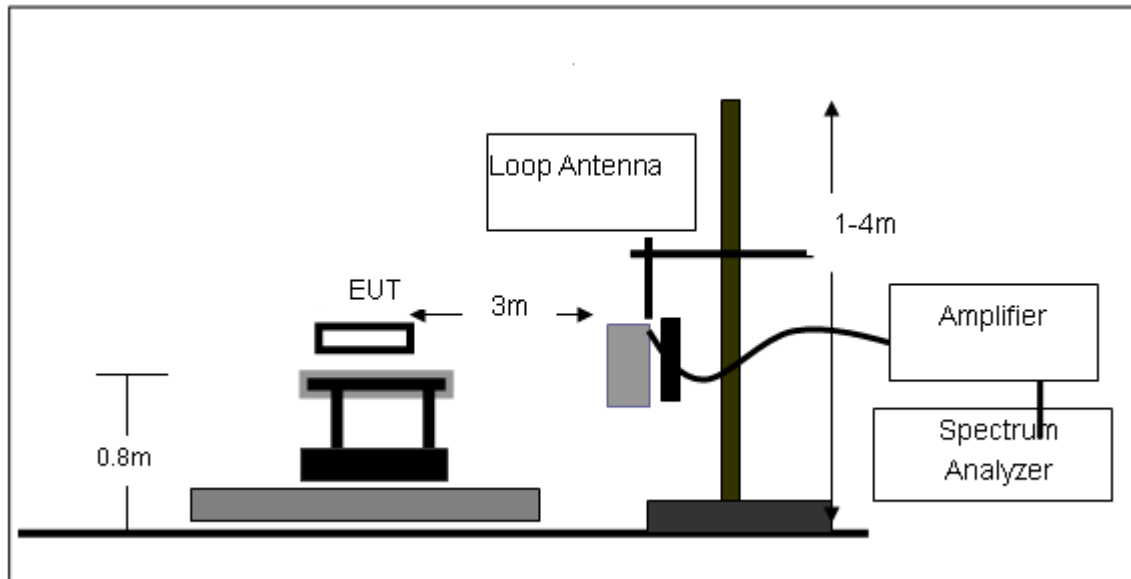

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

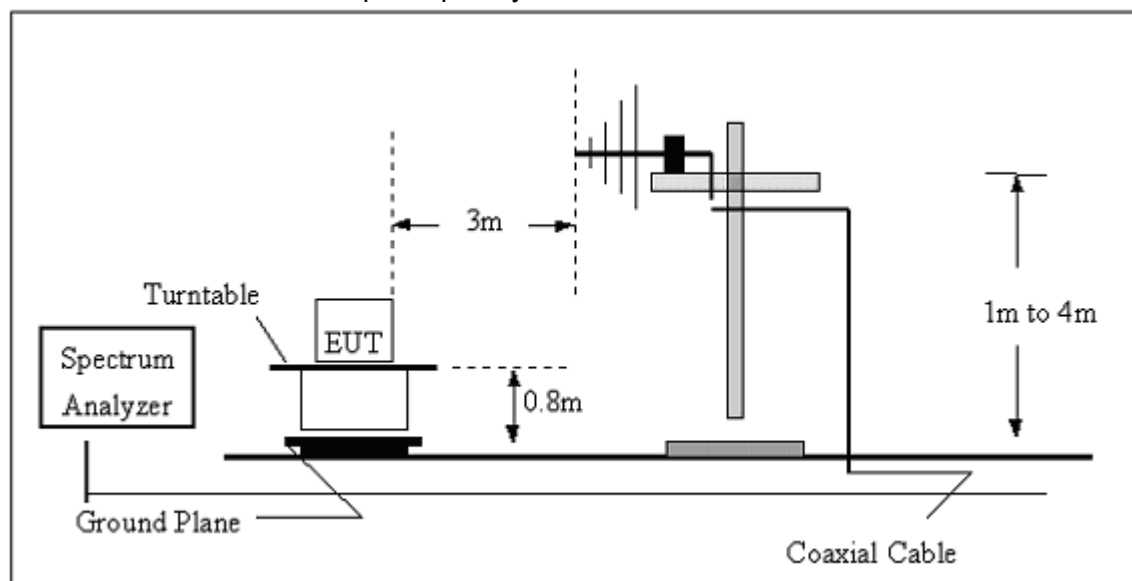

## (C) Radiated Emission Test-Up Frequency Above 1GHz

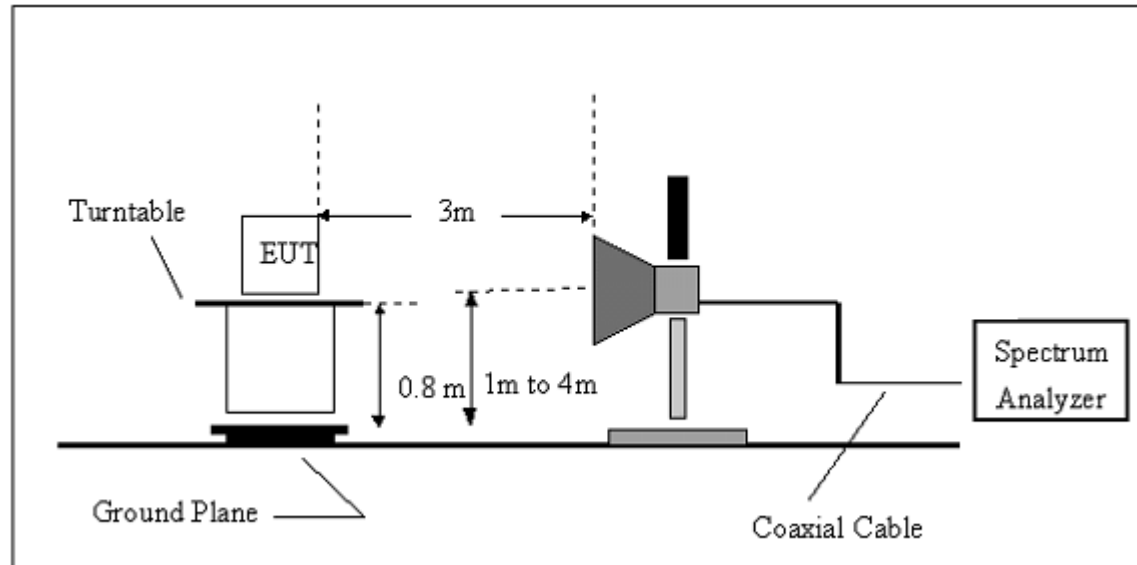**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

|              |                          |                    |                                    |
|--------------|--------------------------|--------------------|------------------------------------|
| EUT:         | 5" VINCI Learning Tablet | Model Name. :      | ViNCi Tab M                        |
| Temperature: | 20 °C                    | Relative Humidity: | 48%                                |
| Pressure:    | 1010 hPa                 | Test Voltage :     | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :  | TX                       | Polarization :     | --                                 |

| Freq. | Reading  | Limit    | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB)   | P/F   |
| --    | --       | --       | --     | PASS  |
| --    | --       | --       | --     | PASS  |

#### NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log (\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

|               |                                |                     |                                 |
|---------------|--------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                     |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                             |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | 802.11b CH1<br>1Mbps data rate | Polarization :      | Horizontal                      |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 143.8293           | 28.33                   | 11.93          | 40.26                      | 43.5               | -3.24          | QP            |
| 191.745            | 30.84                   | 8.72           | 39.56                      | 43.5               | -3.94          | QP            |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

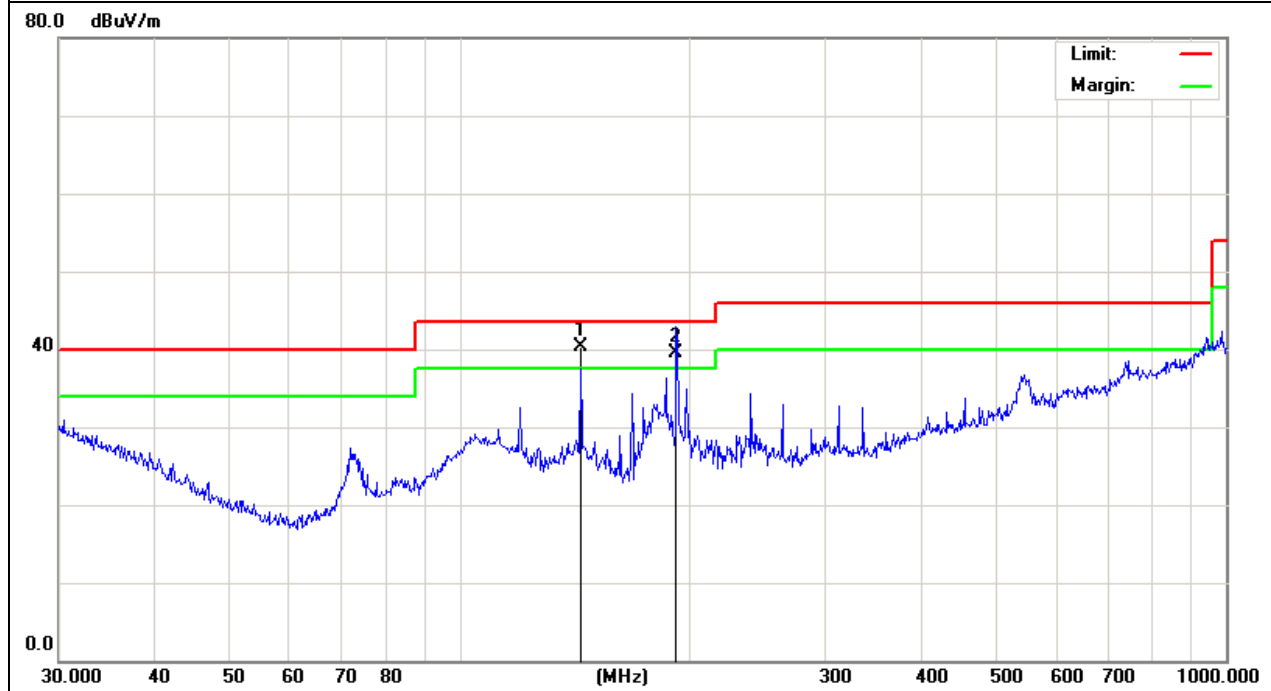


|               |                                |                     |                                 |
|---------------|--------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                     |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                             |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | 802.11b CH1<br>1Mbps data rate | Polarization :      | Vertical                        |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 191.745            | 30.43                   | 8.72           | 39.15                      | 43.5               | -4.35          |               |
| 263.819            | 26.04                   | 13.99          | 40.03                      | 46                 | -5.97          | QP            |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

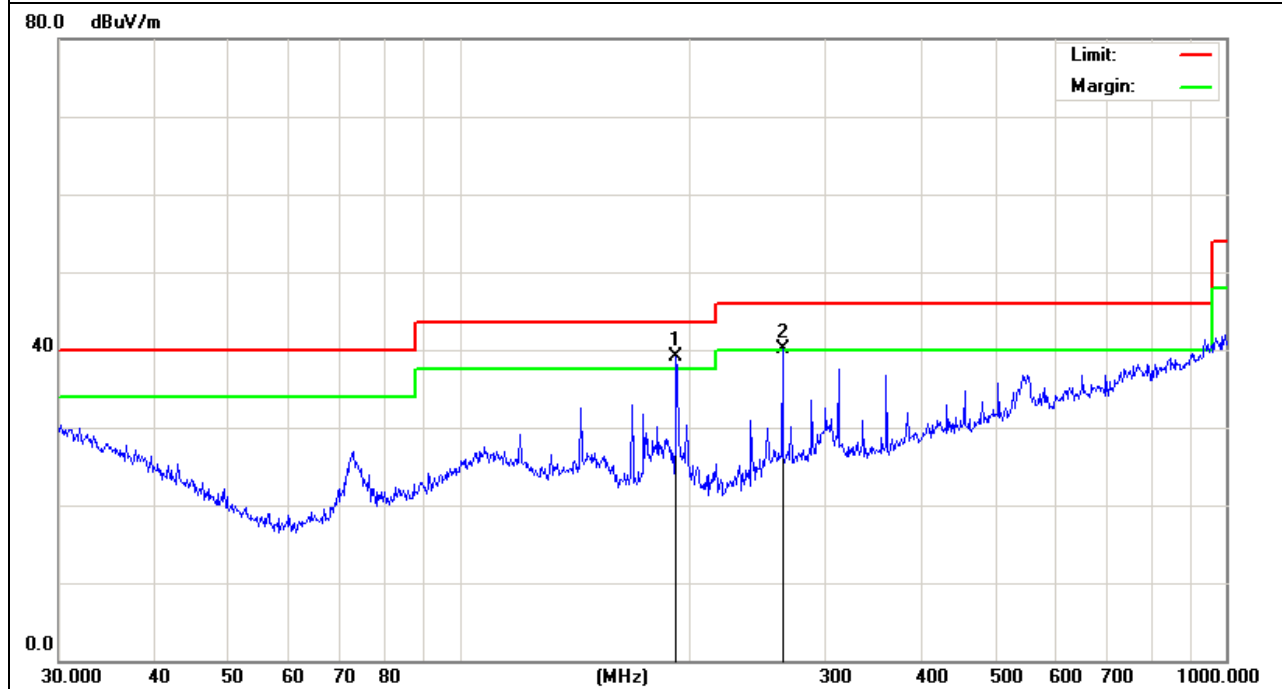


### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11b 1Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 65.16                   | -3.60          | 61.56                      | 74.00              | -12.44         | peak          |
| 4824               | 50.67                   | -3.60          | 47.07                      | 54.00              | -6.93          | AVG           |
| 7236               | 57.13                   | -1.02          | 56.11                      | 74.00              | -17.89         | peak          |
| 7236               | 43.91                   | -1.02          | 42.89                      | 54.00              | -11.11         | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

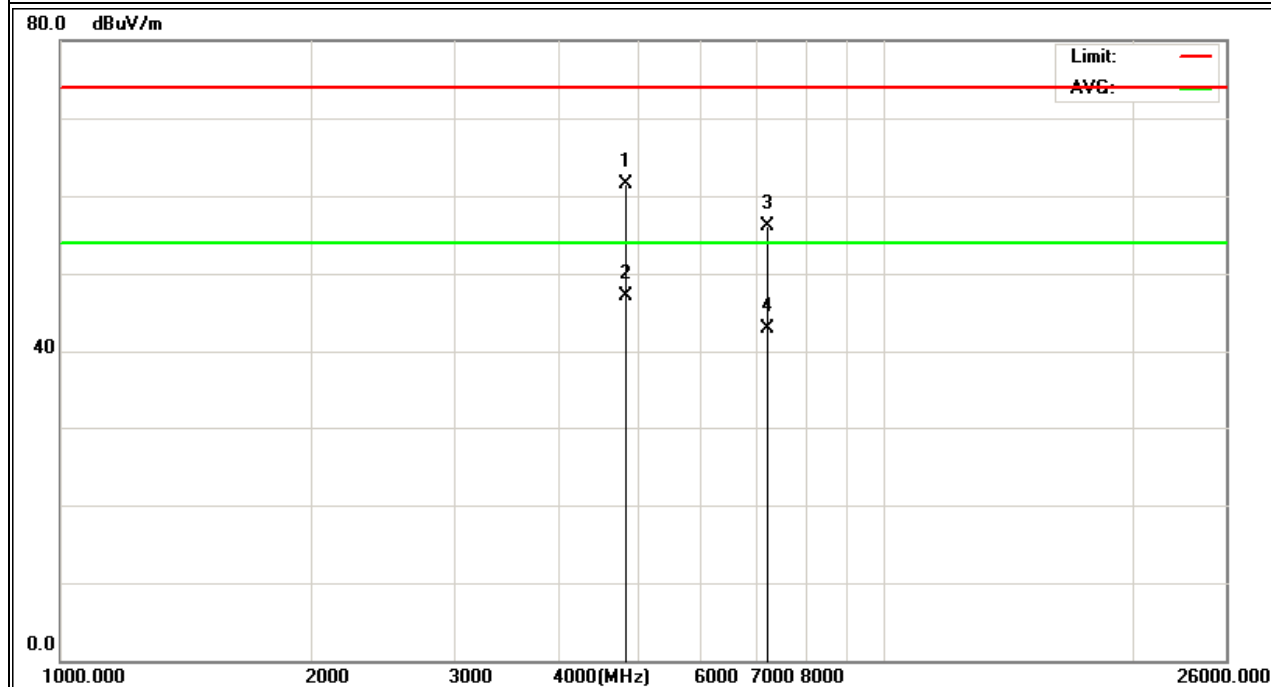




|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11b 1Mbps data rate) | Polarization :      | Vertical                           |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824      | 67.29         | -3.60  | 63.69          | 74       | -10.31 | peak          |
| 4824      | 51.46         | -3.60  | 47.86          | 54       | -6.14  | AVG           |
| 7236      | 54.09         | -1.02  | 53.07          | 74       | -20.93 | peak          |
| 7236      | 44.62         | -1.02  | 43.60          | 54       | -10.40 | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

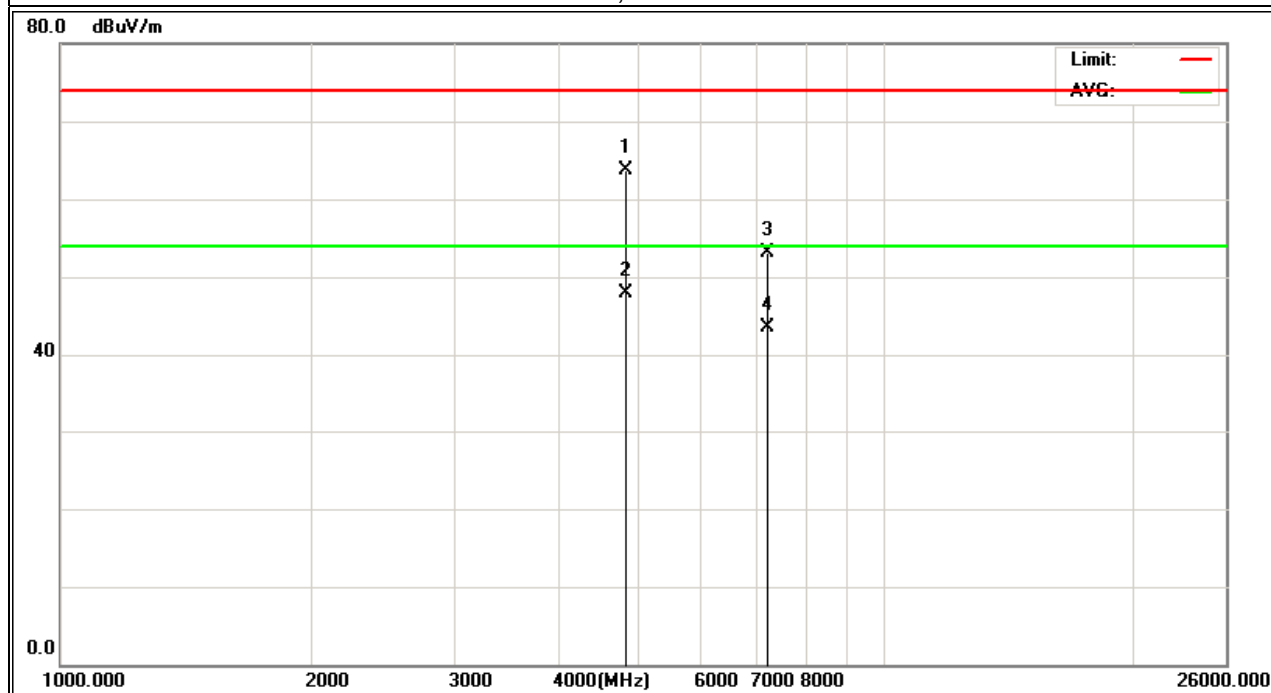


|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11b 1Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 63.95                   | -3.64          | 60.31                      | 74                 | -13.69         | peak          |
| 4874               | 53.49                   | -3.64          | 49.85                      | 54                 | -4.15          | AVG           |
| 7311               | 58.20                   | -0.80          | 57.40                      | 74                 | -16.60         | peak          |
| 7311               | 46.13                   | -0.80          | 45.33                      | 54                 | -8.67          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

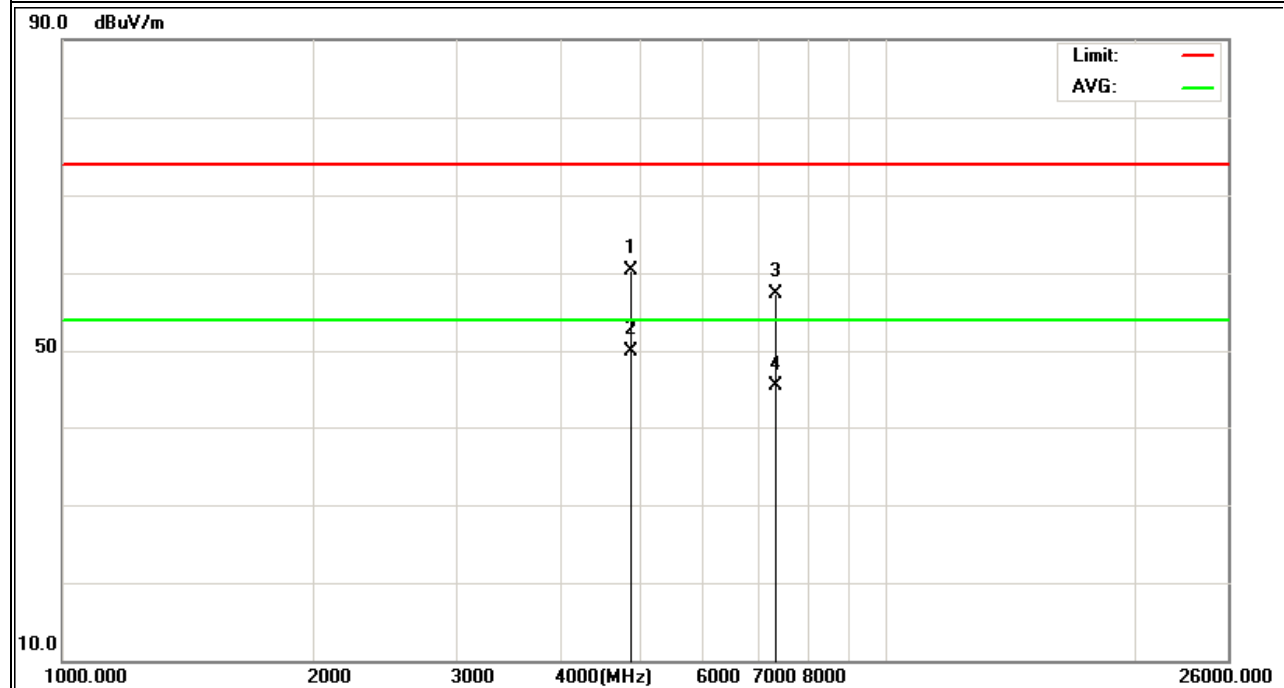


|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11b 1Mbps data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 68.31                   | -3.64          | 64.67                      | 74                 | -9.33          | peak          |
| 4874               | 55.63                   | -3.64          | 51.99                      | 54                 | -2.01          | AVG           |
| 7311               | 61.03                   | -0.80          | 60.23                      | 74                 | -13.77         | peak          |
| 7311               | 51.00                   | -0.80          | 50.20                      | 54                 | -3.80          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

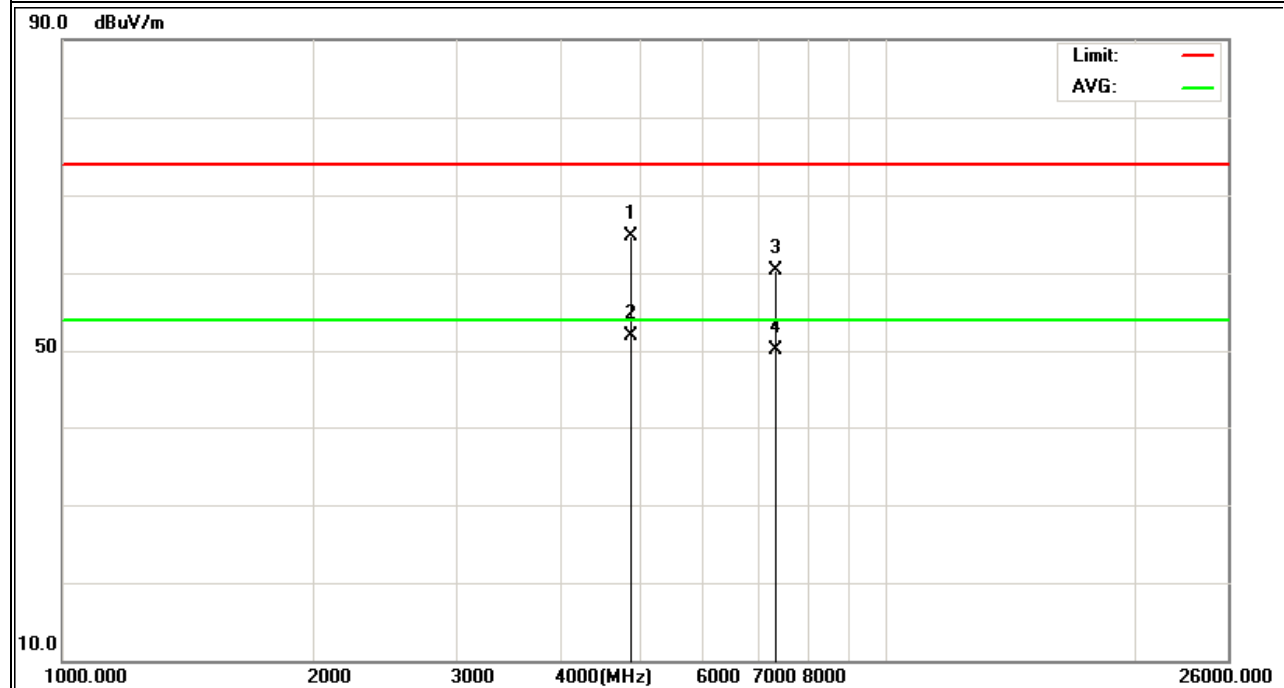


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11 (802.11b 1Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 64.39                   | -3.66          | 60.73                      | 74                 | -13.27         | peak          |
| 4924               | 51.37                   | -3.66          | 47.71                      | 54                 | -6.29          | AVG           |
| 7386               | 59.08                   | -1.03          | 58.05                      | 74                 | -15.95         | peak          |
| 7386               | 49.68                   | -1.03          | 48.65                      | 54                 | -5.35          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

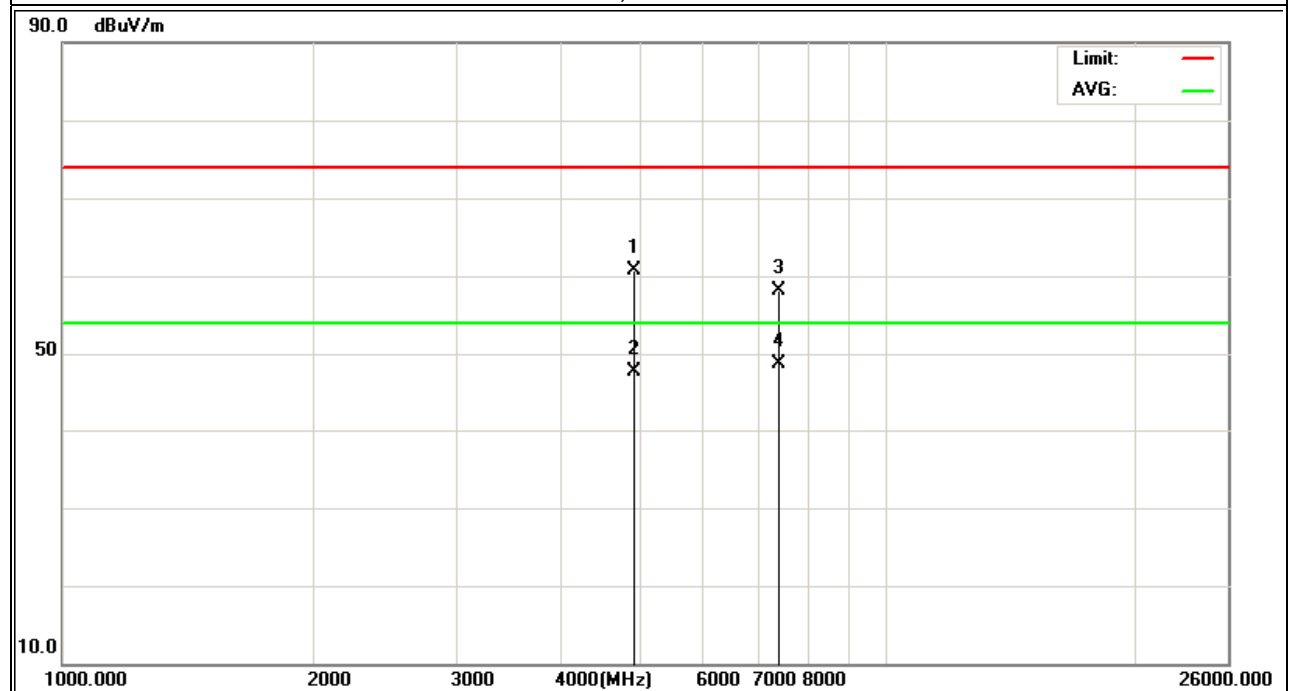


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11 (802.11b 1Mbps data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 68.23                   | -3.66          | 64.57                      | 74                 | -9.43          | peak          |
| 4924               | 53.63                   | -3.66          | 49.97                      | 54                 | -4.03          | AVG           |
| 7386               | 57.06                   | -1.03          | 56.03                      | 74                 | -17.97         | peak          |
| 7386               | 53.46                   | -1.03          | 52.43                      | 54                 | -1.57          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

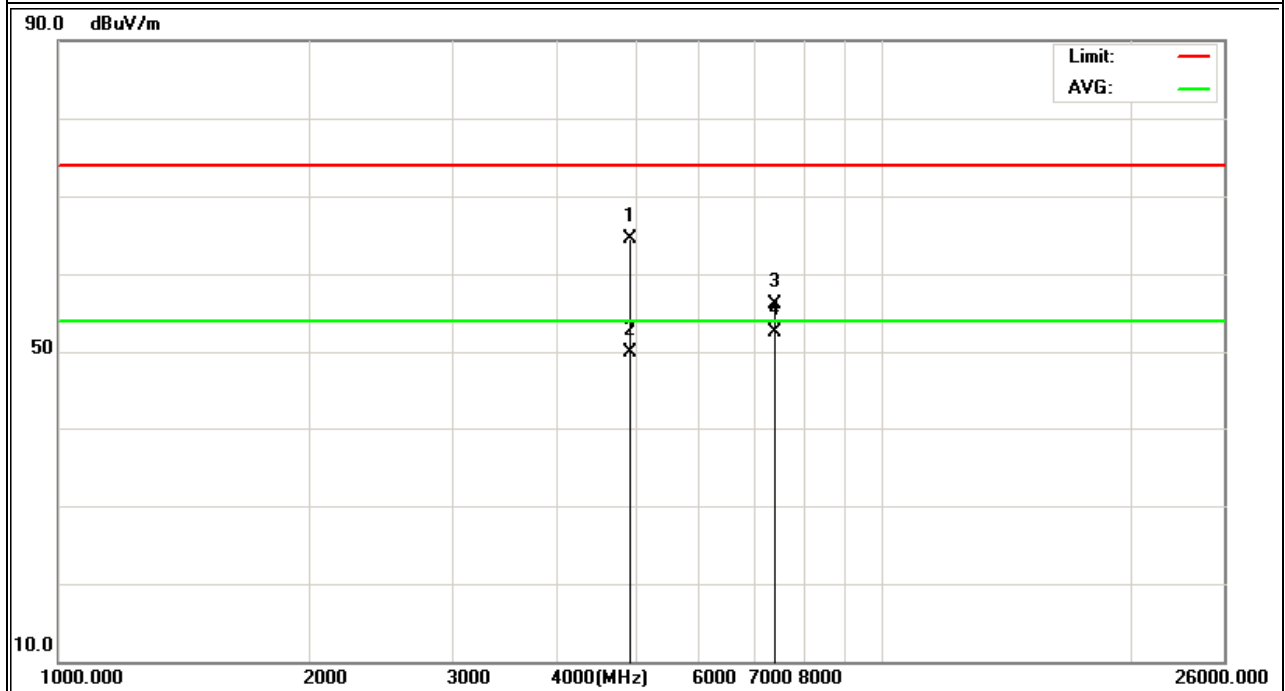


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11g 6 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 62.09                   | -3.60          | 58.49                      | 74                 | -15.51         | peak          |
| 4824               | 48.06                   | -3.60          | 44.46                      | 54                 | -9.54          | AVG           |
| 7236               | 54.18                   | -1.02          | 53.16                      | 74                 | -20.84         | peak          |
| 7236               | 47.02                   | -1.02          | 46.00                      | 54                 | -8.00          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

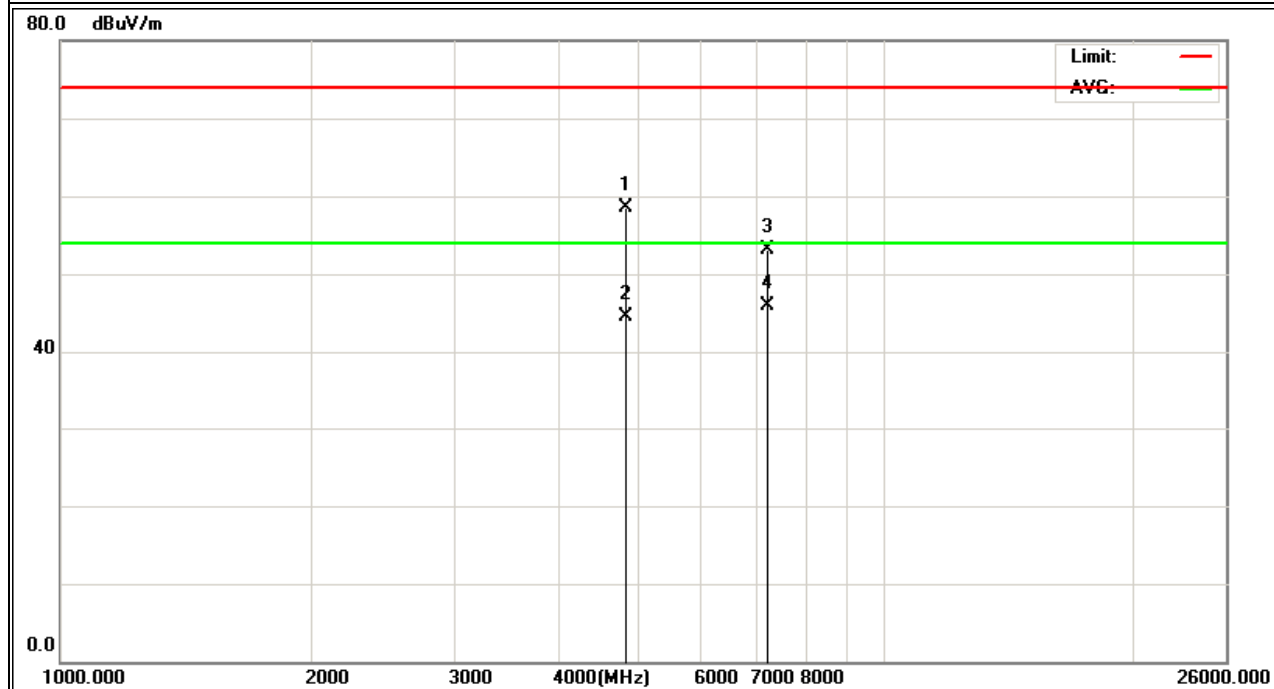


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | VINCI Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11g 6 Mbps data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 67.09                   | -3.60          | 63.49                      | 74                 | -10.51         | peak          |
| 4824               | 55.26                   | -3.60          | 51.66                      | 54                 | -2.34          | AVG           |
| 7236               | 59.03                   | -1.02          | 58.01                      | 74                 | -15.99         | peak          |
| 7236               | 48.53                   | -1.02          | 47.51                      | 54                 | -6.49          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

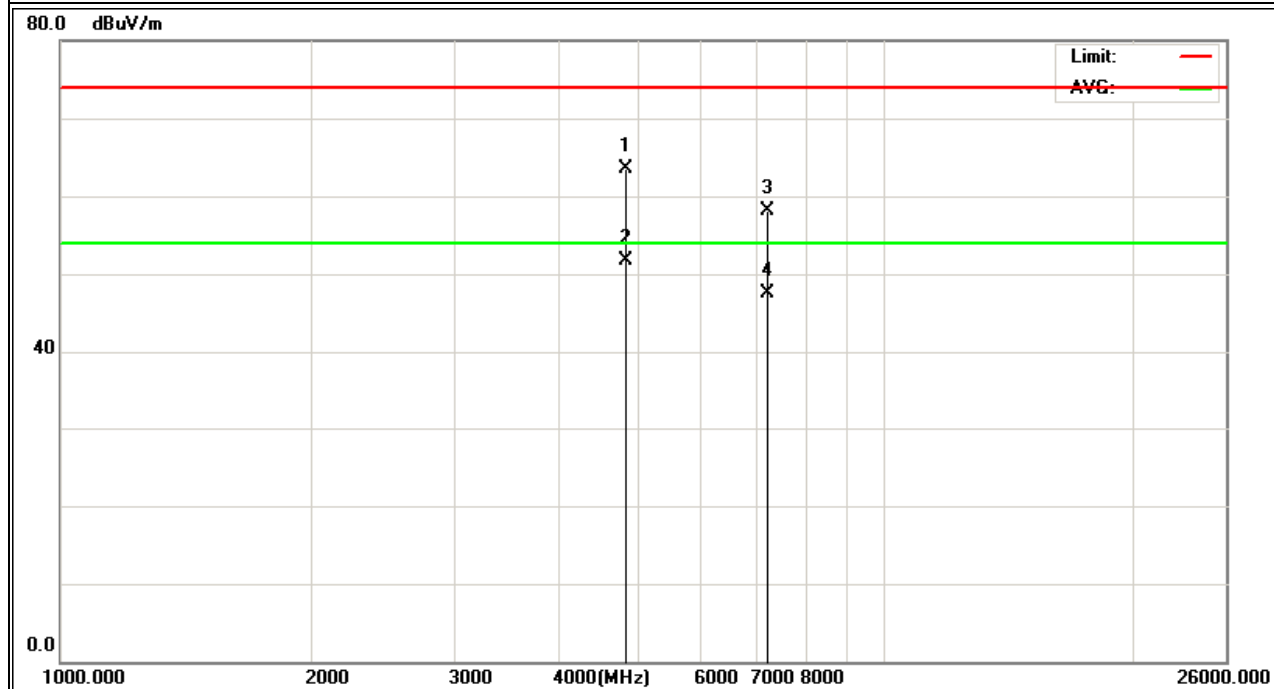


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11g 6 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 63.10                   | -3.64          | 59.46                      | 74                 | -14.54         | peak          |
| 4874               | 51.67                   | -3.64          | 48.03                      | 54                 | -5.97          | AVG           |
| 7311               | 58.65                   | -0.80          | 57.85                      | 74                 | -16.15         | peak          |
| 7311               | 47.28                   | -0.80          | 46.48                      | 54                 | -7.52          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

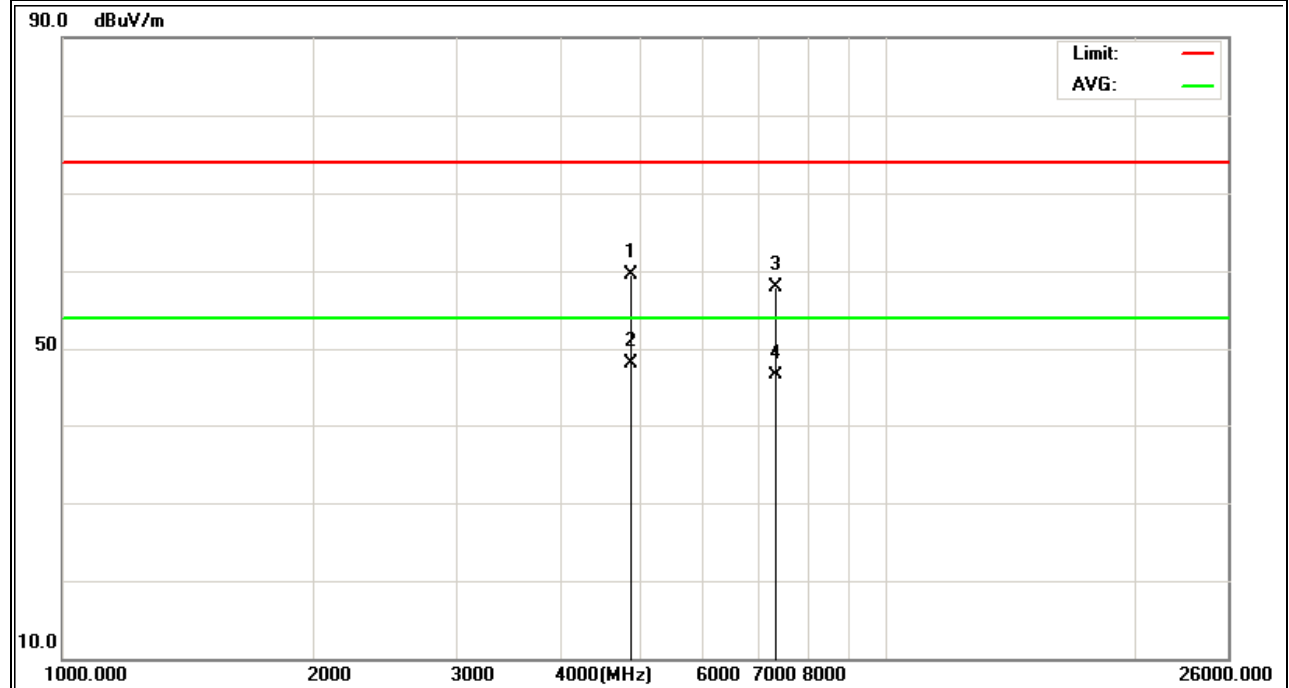




|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11g 6 Mbps data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 65.69                   | -3.64          | 62.05                      | 74                 | -11.95         | peak          |
| 4874               | 52.61                   | -3.64          | 48.97                      | 54                 | -5.03          | AVG           |
| 7311               | 57.10                   | -0.80          | 56.30                      | 74                 | -17.70         | peak          |
| 7311               | 48.58                   | -0.80          | 47.78                      | 54                 | -6.22          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

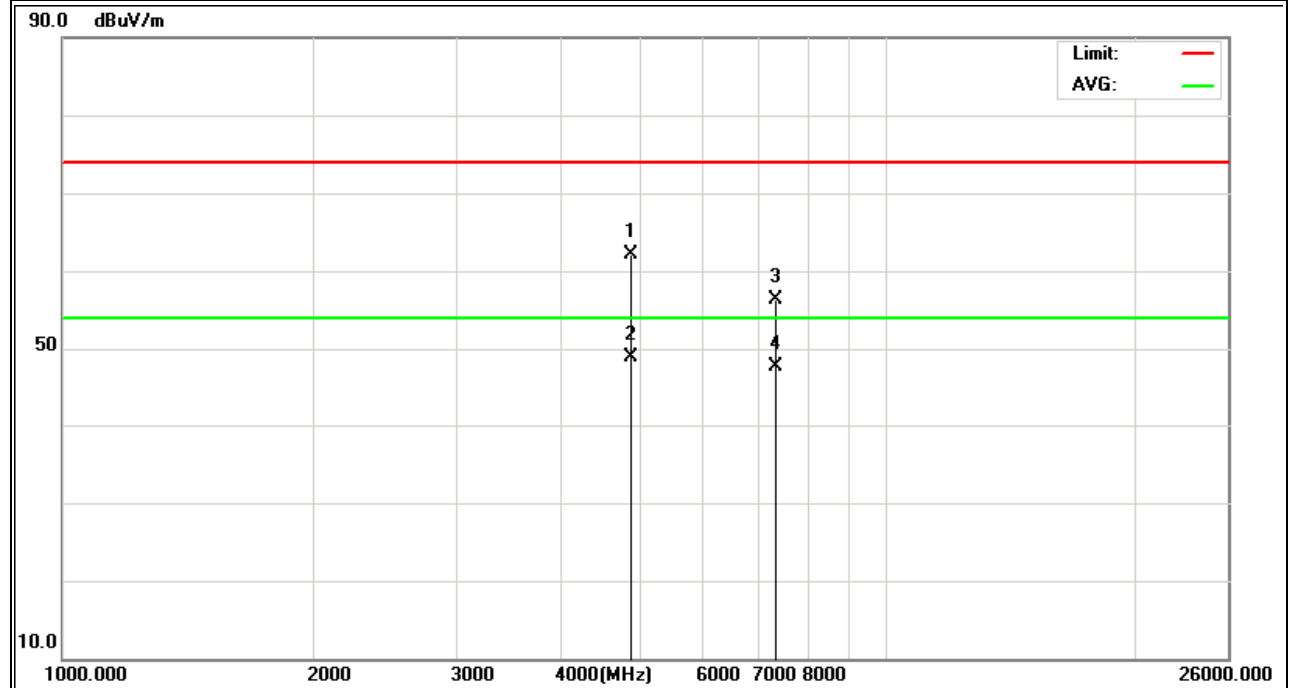


|               |                                 |                     |                                    |
|---------------|---------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet        | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                           | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                        | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11 (802.11g 6 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 61.08                   | -3.66          | 57.42                      | 74                 | -16.58         | peak          |
| 4924               | 48.96                   | -3.66          | 45.30                      | 54                 | -8.70          | AVG           |
| 7386               | 54.61                   | -1.03          | 53.58                      | 74                 | -20.42         | peak          |
| 7386               | 47.09                   | -1.03          | 46.06                      | 54                 | -7.94          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

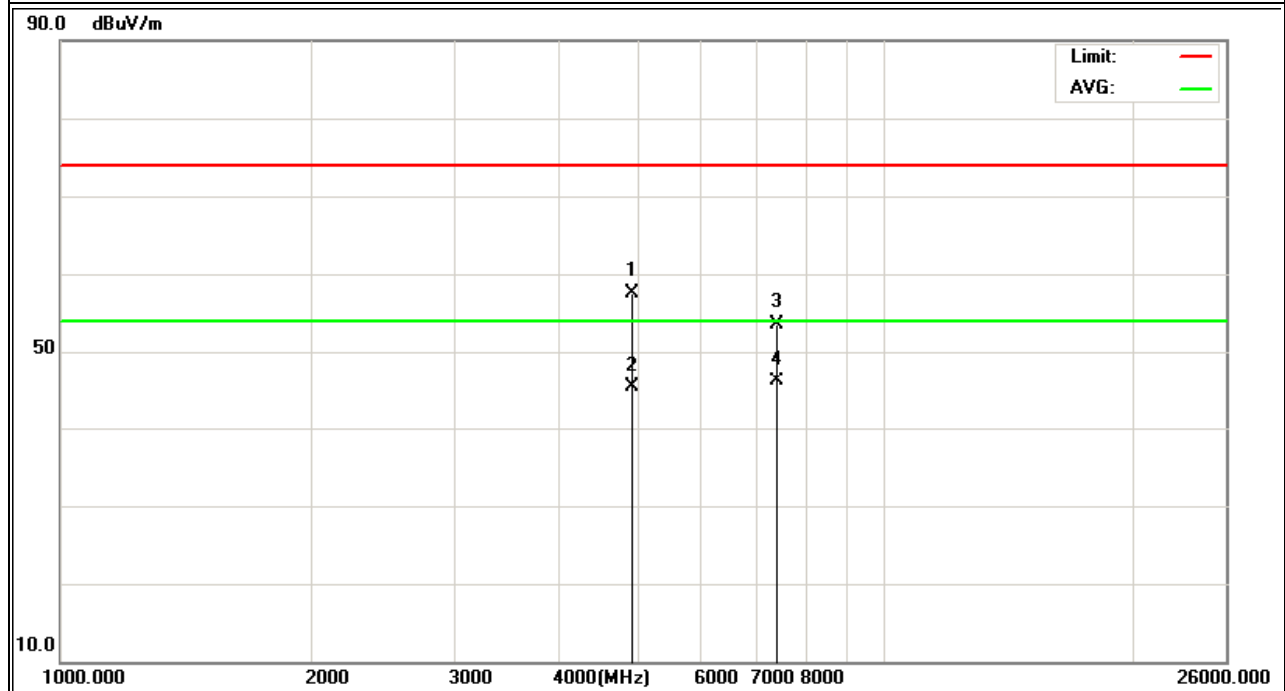


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11(802.11g 6 Mbps data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 68.91                   | -3.66          | 65.25                      | 74                 | -8.75          | peak          |
| 4924               | 54.36                   | -3.66          | 50.70                      | 54                 | -3.30          | AVG           |
| 7386               | 61.02                   | -1.03          | 59.99                      | 74                 | -14.01         | peak          |
| 7386               | 49.68                   | -1.03          | 48.65                      | 54                 | -5.35          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

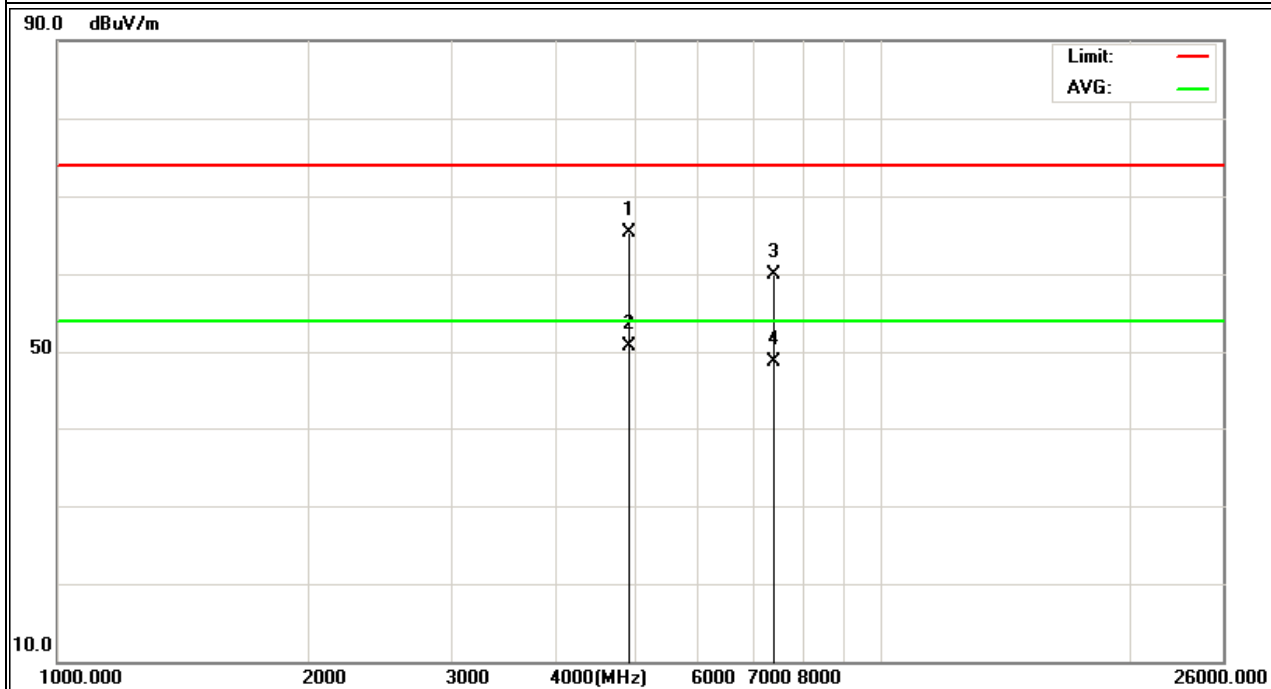


|               |                                         |                     |                                    |
|---------------|-----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                   | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824      | 68.67         | -3.60  | 65.07          | 74       | -8.93  | peak          |
| 4824      | 53.27         | -3.60  | 49.67          | 54       | -4.33  | AVG           |
| 7236      | 60.39         | -1.02  | 59.37          | 74       | -14.63 | peak          |
| 7236      | 46.16         | -1.02  | 45.14          | 54       | -8.86  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

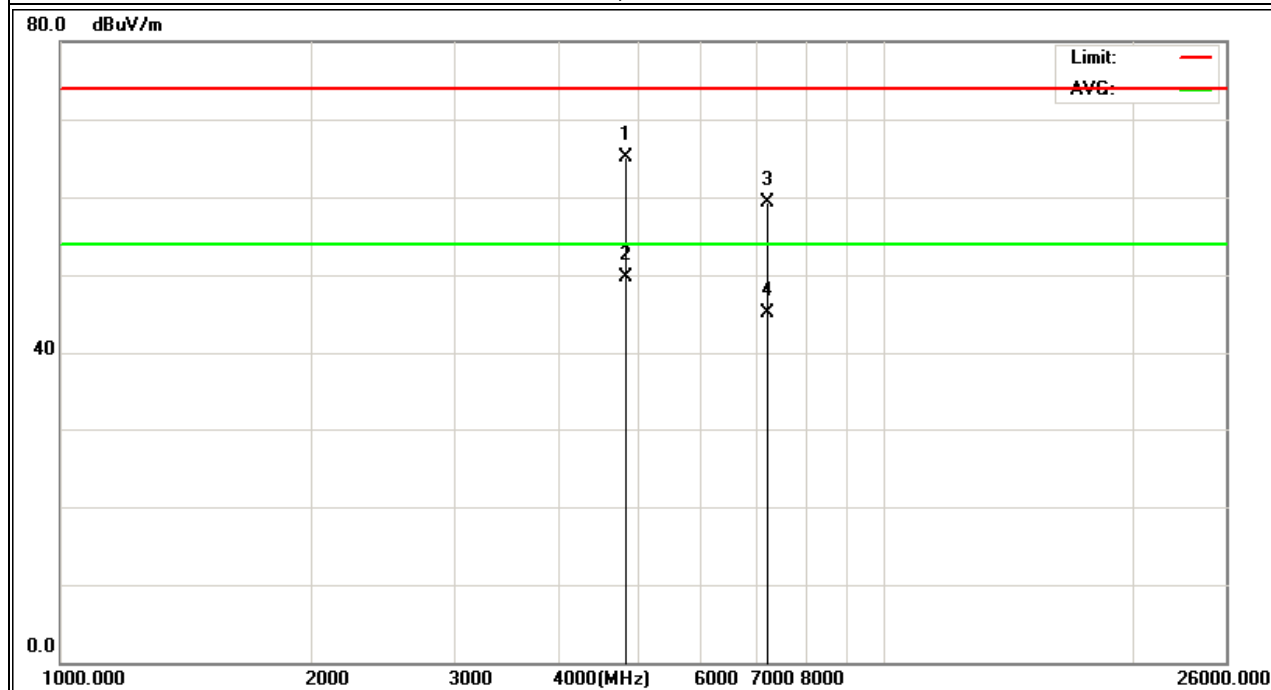


|               |                                         |                     |                                    |
|---------------|-----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                   | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 66.33                   | -3.60          | 62.73                      | 74                 | -11.27         | peak          |
| 4824               | 54.25                   | -3.60          | 50.65                      | 54                 | -3.35          | AVG           |
| 7236               | 58.39                   | -1.02          | 57.37                      | 74                 | -16.63         | peak          |
| 7236               | 44.67                   | -1.02          | 43.65                      | 54                 | -10.35         | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

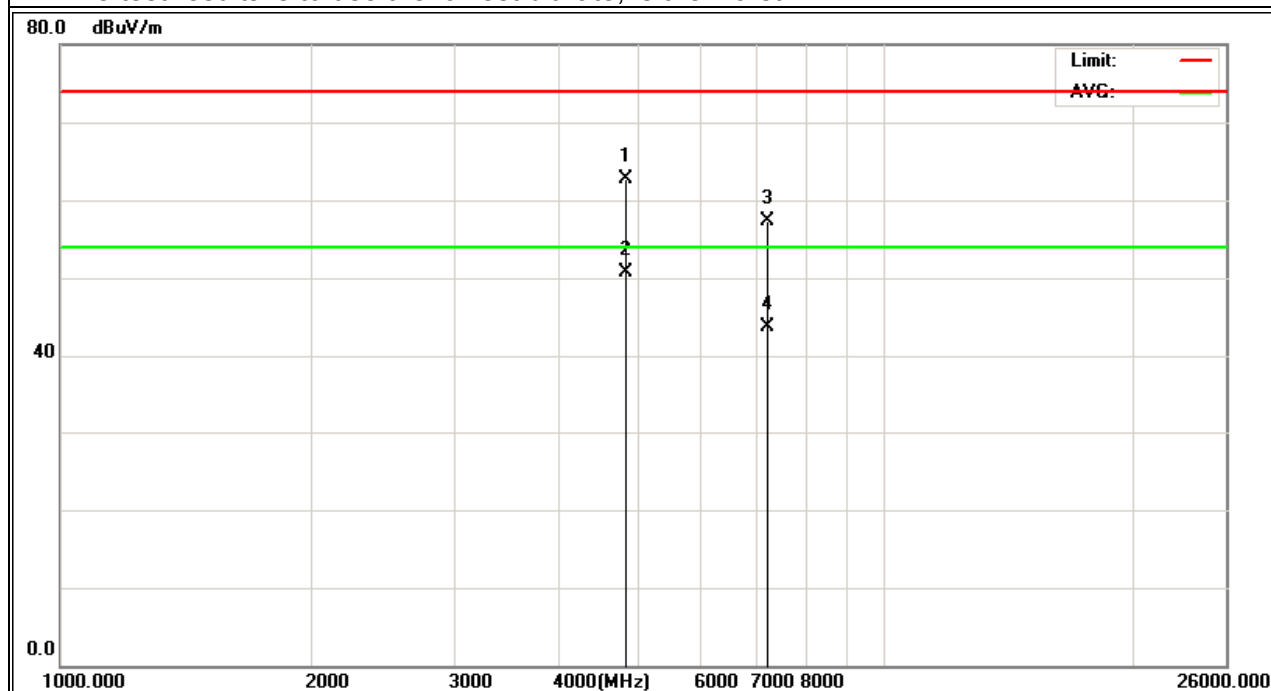


|               |                                         |                     |                                    |
|---------------|-----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                   | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 66.18                   | -3.64          | 62.54                      | 74                 | -11.46         | peak          |
| 4874               | 53.08                   | -3.64          | 49.44                      | 54                 | -4.56          | AVG           |
| 7311               | 59.68                   | -0.80          | 58.88                      | 74                 | -15.12         | peak          |
| 7311               | 51.37                   | -0.80          | 50.57                      | 54                 | -3.43          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

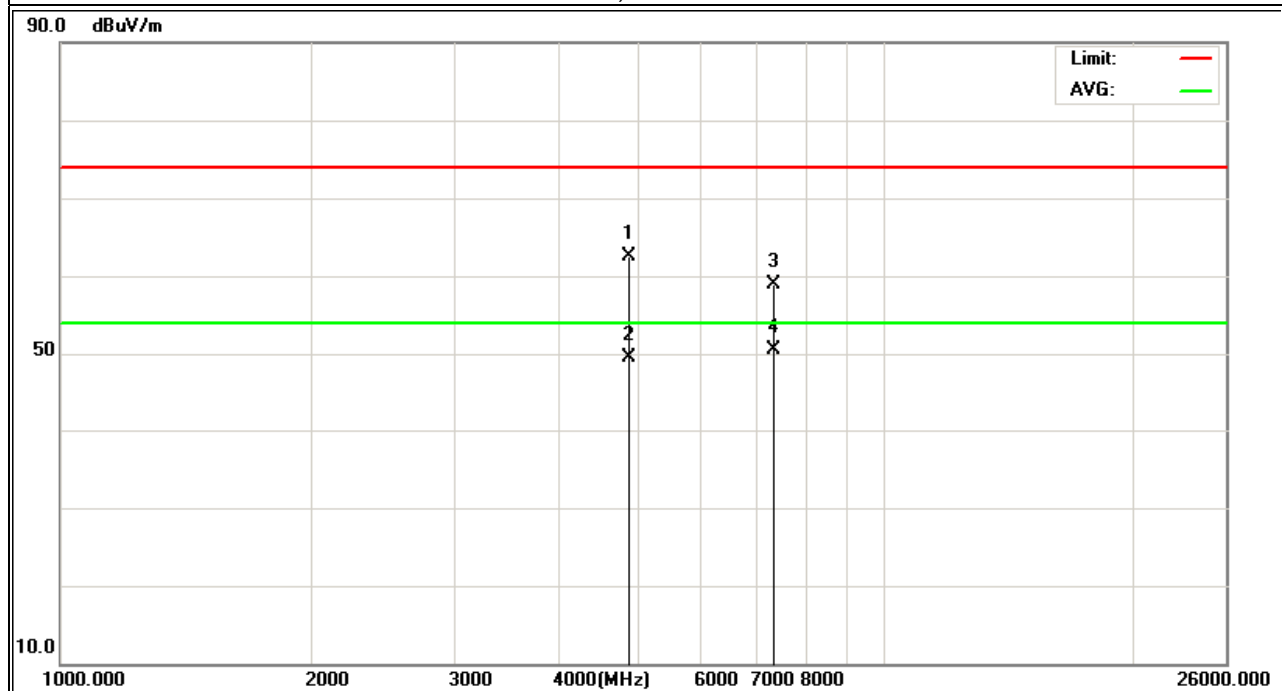


|               |                                         |                     |                                    |
|---------------|-----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                   | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 65.39                   | -3.64          | 61.75                      | 74                 | -12.25         | peak          |
| 4874               | 54.08                   | -3.64          | 50.44                      | 54                 | -3.56          | AVG           |
| 7311               | 58.31                   | -0.80          | 57.51                      | 74                 | -16.49         | peak          |
| 7311               | 50.39                   | -0.80          | 49.59                      | 54                 | -4.41          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

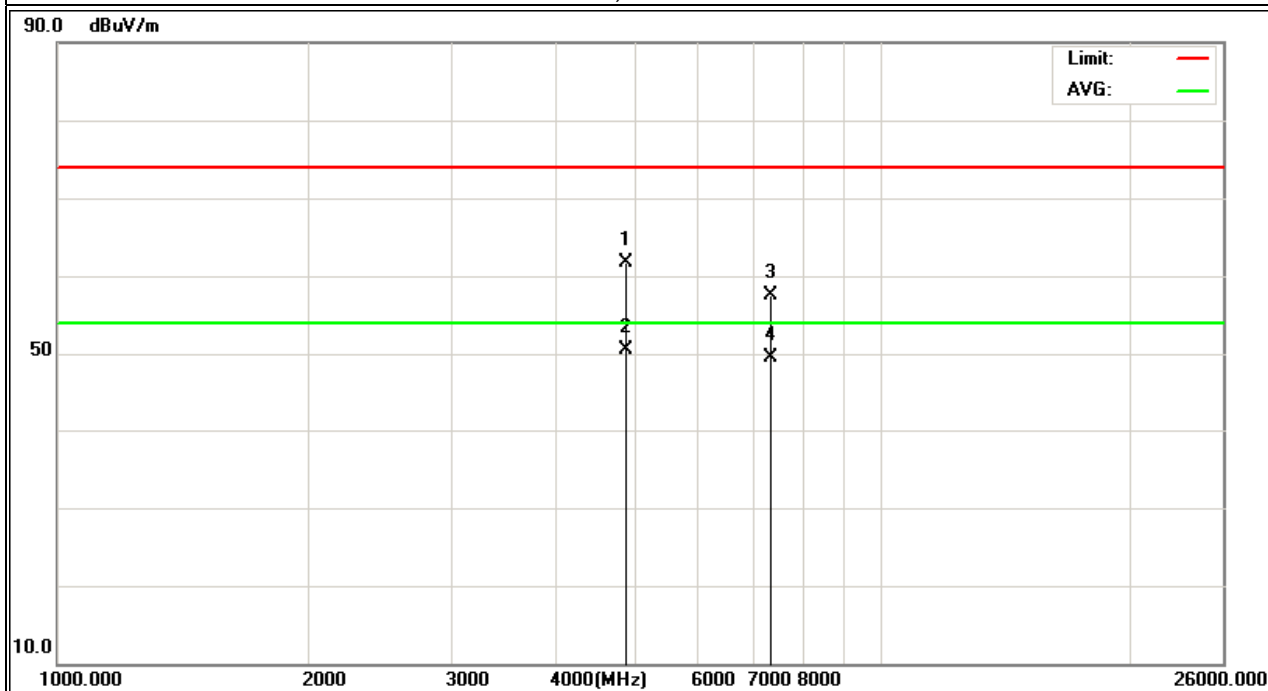


|               |                                          |                     |                                    |
|---------------|------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                 | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                    | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                 | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 64.67                   | -3.06          | 61.07                      | 74                 | -12.93         | peak          |
| 4924               | 51.26                   | -3.60          | 47.66                      | 54                 | -6.34          | AVG           |
| 7386               | 58.06                   | -1.02          | 57.04                      | 74                 | -16.96         | peak          |
| 7386               | 45.31                   | -1.02          | 44.29                      | 54                 | -9.71          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

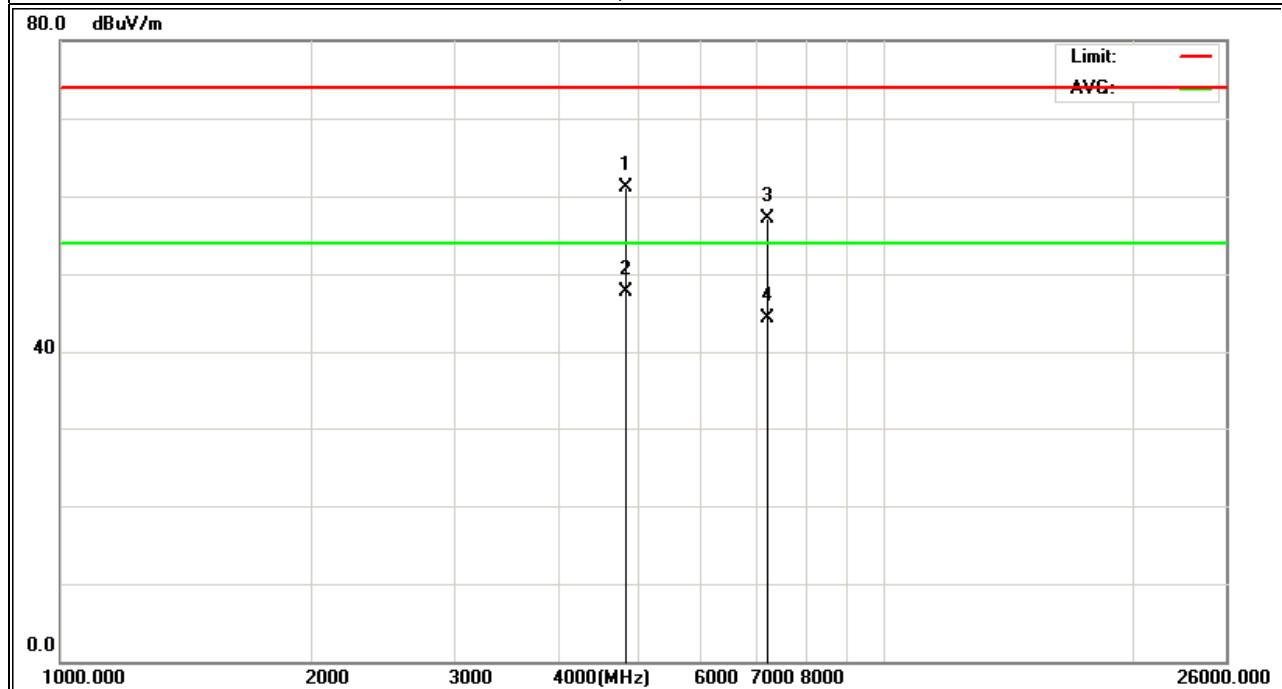




|               |                                          |                     |                                    |
|---------------|------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                 | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                    | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                 | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11 (802.11n/20M 6.5 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4924               | 65.93                   | -3.66          | 62.27                      | 74                 | -11.73         | peak          |
| 4924               | 51.06                   | -3.66          | 47.40                      | 54                 | -6.60          | AVG           |
| 7386               | 58.67                   | -1.03          | 57.64                      | 74                 | -16.36         | peak          |
| 7386               | 48.26                   | -1.03          | 47.23                      | 54                 | -6.77          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

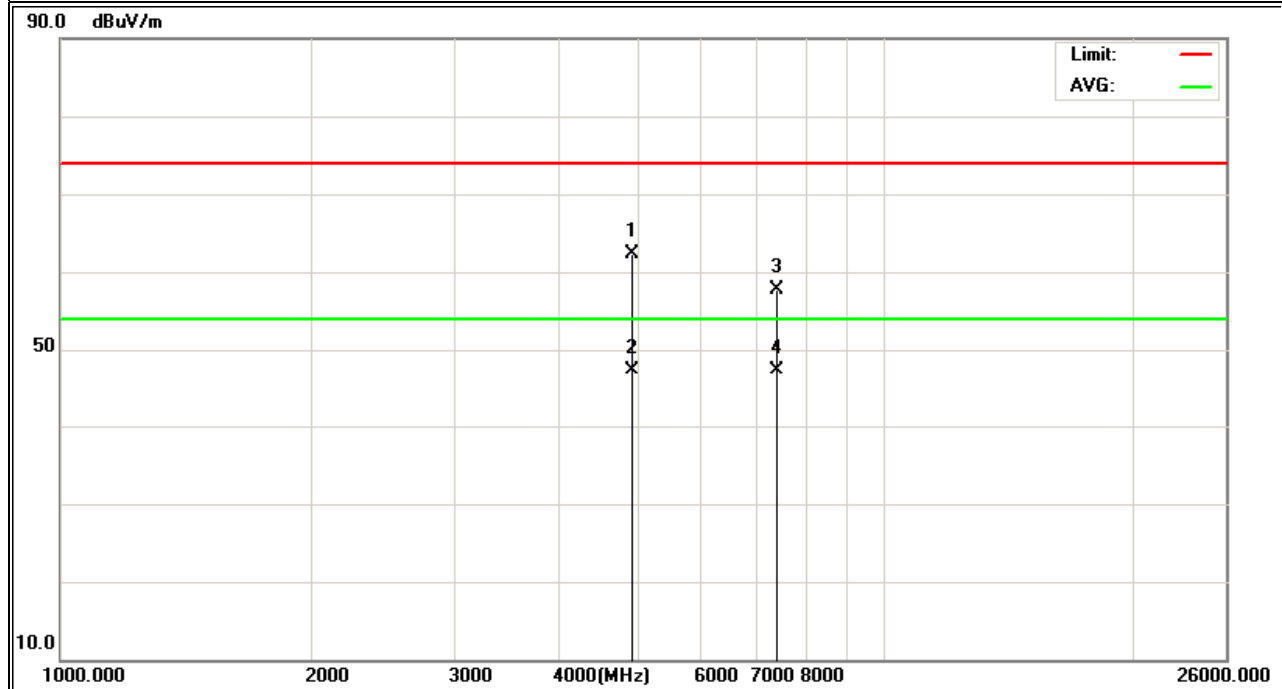


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH3 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844      | 62.61         | -3.54  | 59.07          | 74       | -14.93 | peak          |
| 4844      | 54.09         | -3.54  | 50.55          | 54       | -3.45  | AVG           |
| 7266      | 58.03         | -0.97  | 57.06          | 74       | -16.94 | peak          |
| 7266      | 51.03         | -0.97  | 50.06          | 54       | -3.94  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

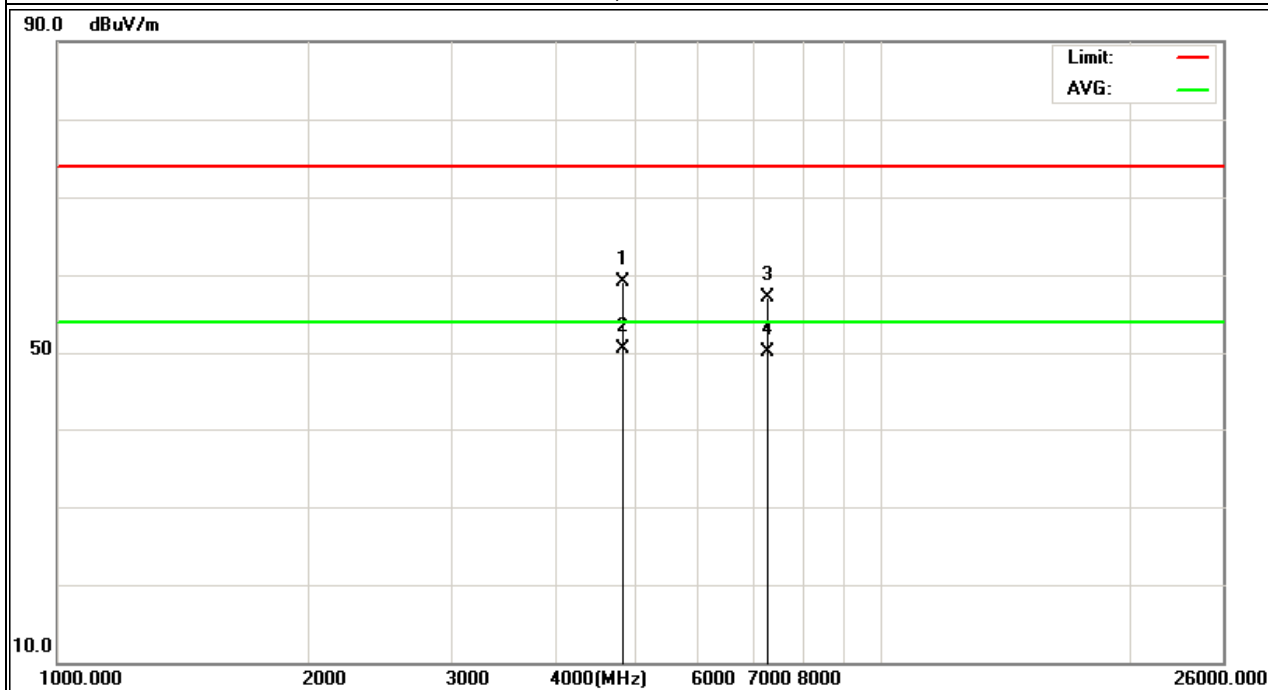


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH3 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844      | 68.34         | -3.54  | 64.80          | 74       | -9.20  | peak          |
| 4844      | 52.68         | -3.54  | 49.14          | 54       | -4.86  | AVG           |
| 7266      | 59.03         | -0.97  | 58.06          | 74       | -15.94 | peak          |
| 7266      | 51.06         | -0.97  | 50.09          | 54       | -3.91  | AVG           |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |
|           |               |        |                |          |        |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

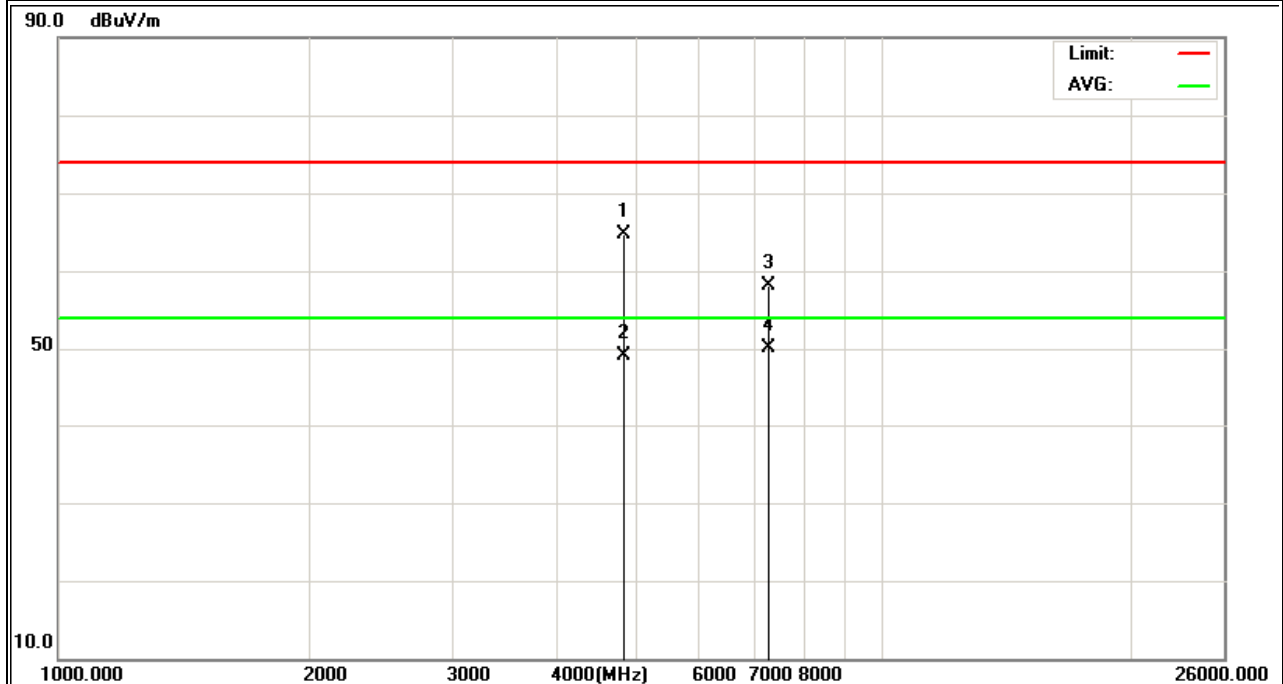


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 66.91                   | -3.64          | 63.27                      | 74                 | -10.73         | peak          |
| 4884               | 50.23                   | -3.68          | 46.55                      | 54                 | -7.45          | AVG           |
| 7311               | 59.31                   | -0.80          | 58.51                      | 74                 | -15.49         | peak          |
| 7311               | 48.62                   | -0.80          | 47.82                      | 54                 | -6.18          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

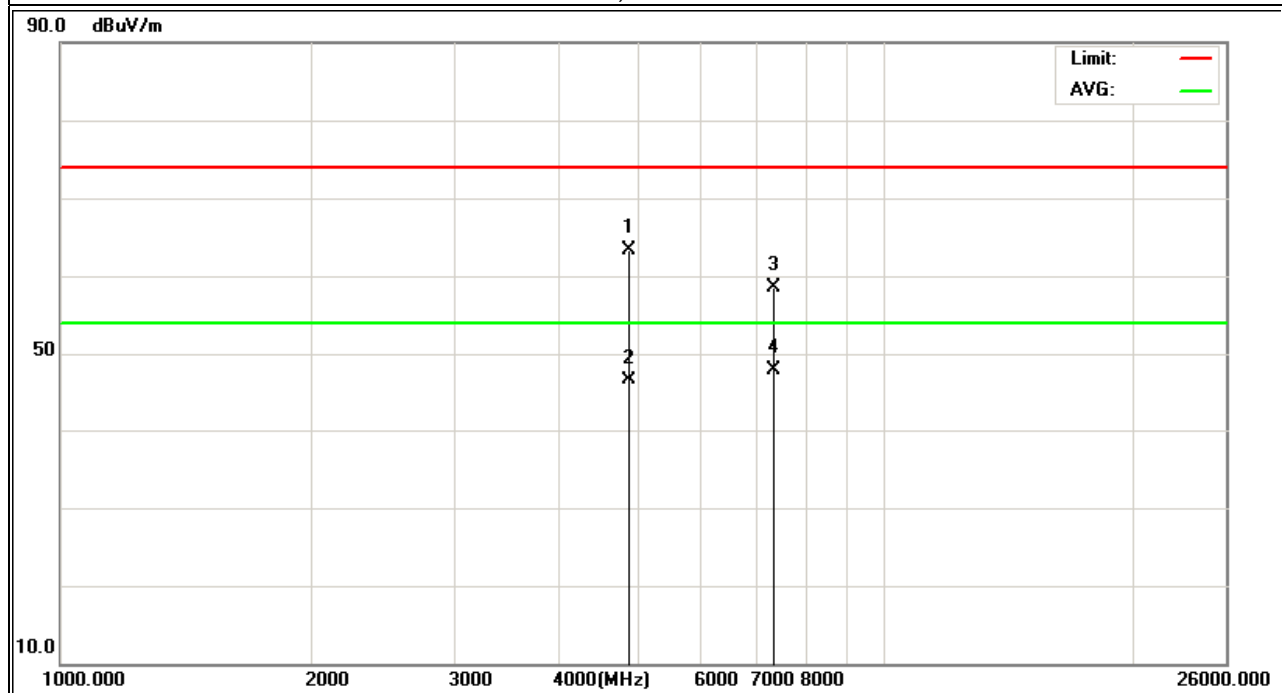


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH6 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874               | 66.59                   | -3.64          | 62.95                      | 74                 | -11.05         | peak          |
| 4884               | 50.65                   | -3.68          | 46.97                      | 54                 | -7.03          | AVG           |
| 7311               | 57.61                   | -0.80          | 56.81                      | 74                 | -17.19         | peak          |
| 7311               | 47.39                   | -0.80          | 46.59                      | 54                 | -7.41          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

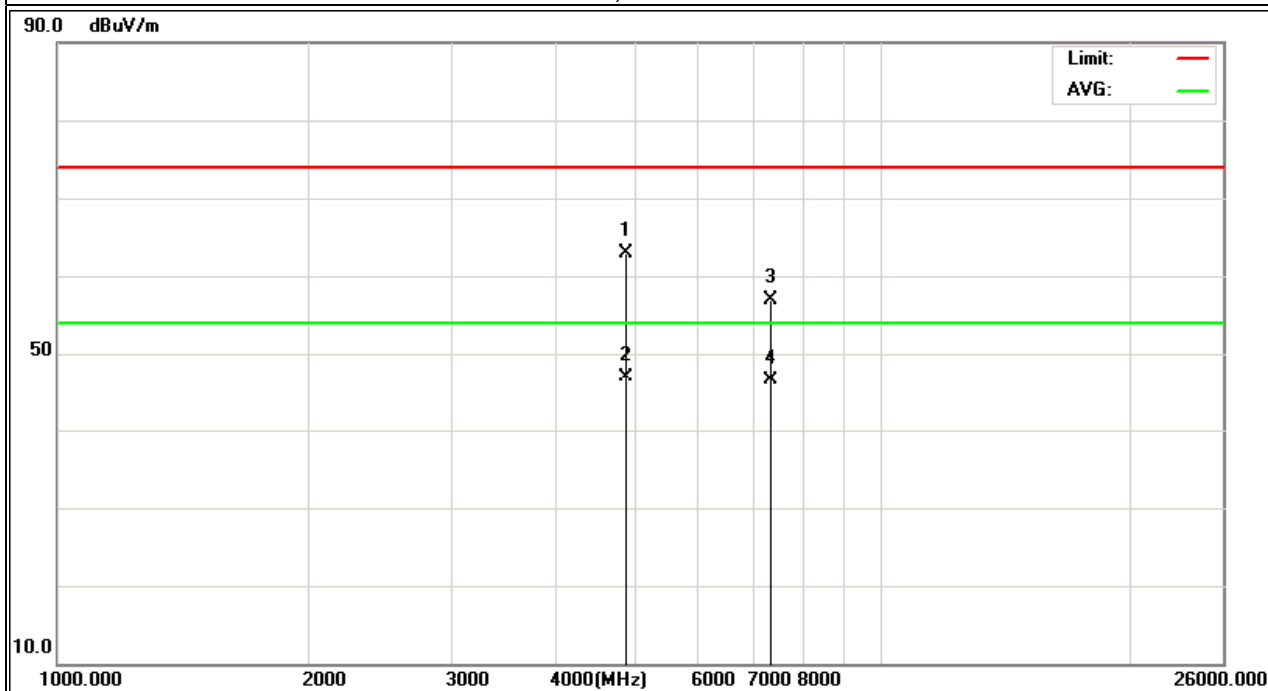


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH9 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4904               | 64.30                   | -3.75          | 60.55                      | 74                 | -13.45         | peak          |
| 4904               | 51.67                   | -3.75          | 47.92                      | 54                 | -6.08          | AVG           |
| 7356               | 58.13                   | -0.86          | 57.27                      | 74                 | -16.73         | peak          |
| 7356               | 47.07                   | -0.86          | 46.21                      | 54                 | -7.79          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

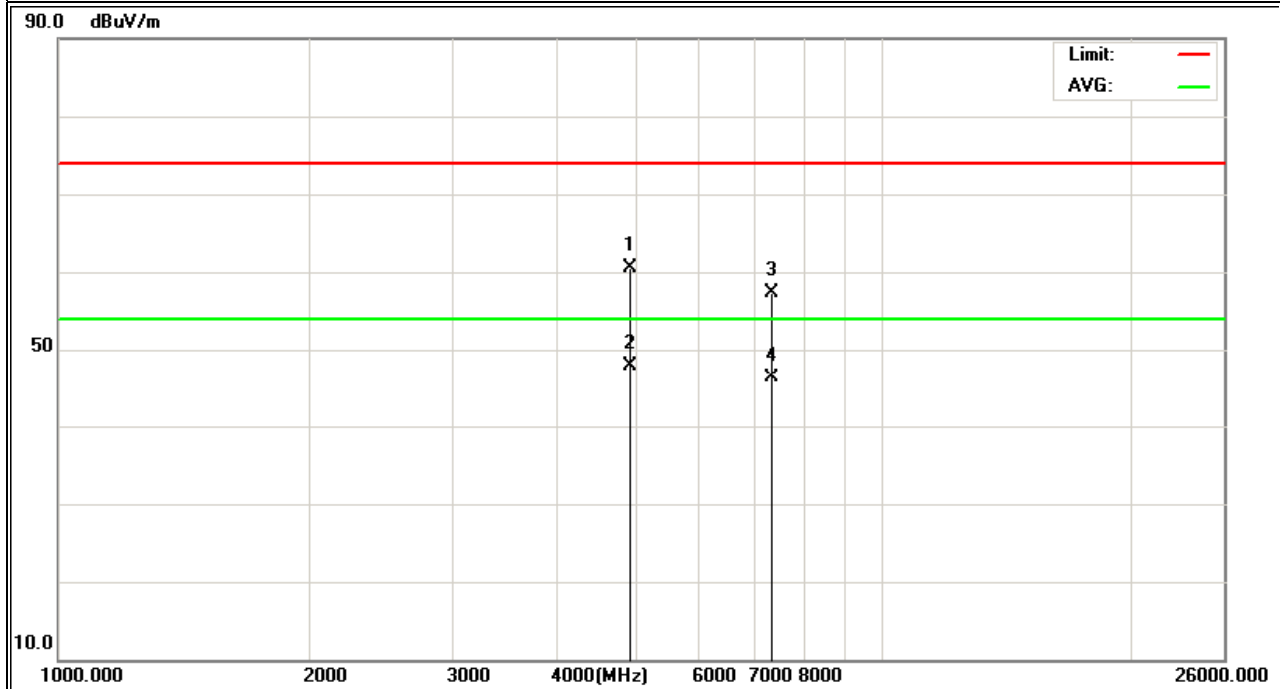


|               |                                        |                     |                                    |
|---------------|----------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet               | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                  | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                               | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH9 (802.11n/40M 54 Mbps<br>data rate) | Polarization :      | Vertical                           |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4904               | 64.19                   | -3.75          | 60.44                      | 74                 | -13.56         | peak          |
| 4904               | 53.75                   | -3.75          | 50.00                      | 54                 | -4.00          | AVG           |
| 7356               | 57.16                   | -0.86          | 56.30                      | 74                 | -17.70         | peak          |
| 7356               | 47.69                   | -0.86          | 46.83                      | 54                 | -7.17          | AVG           |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- The test results is to use the lowest bit rate, is the worst.

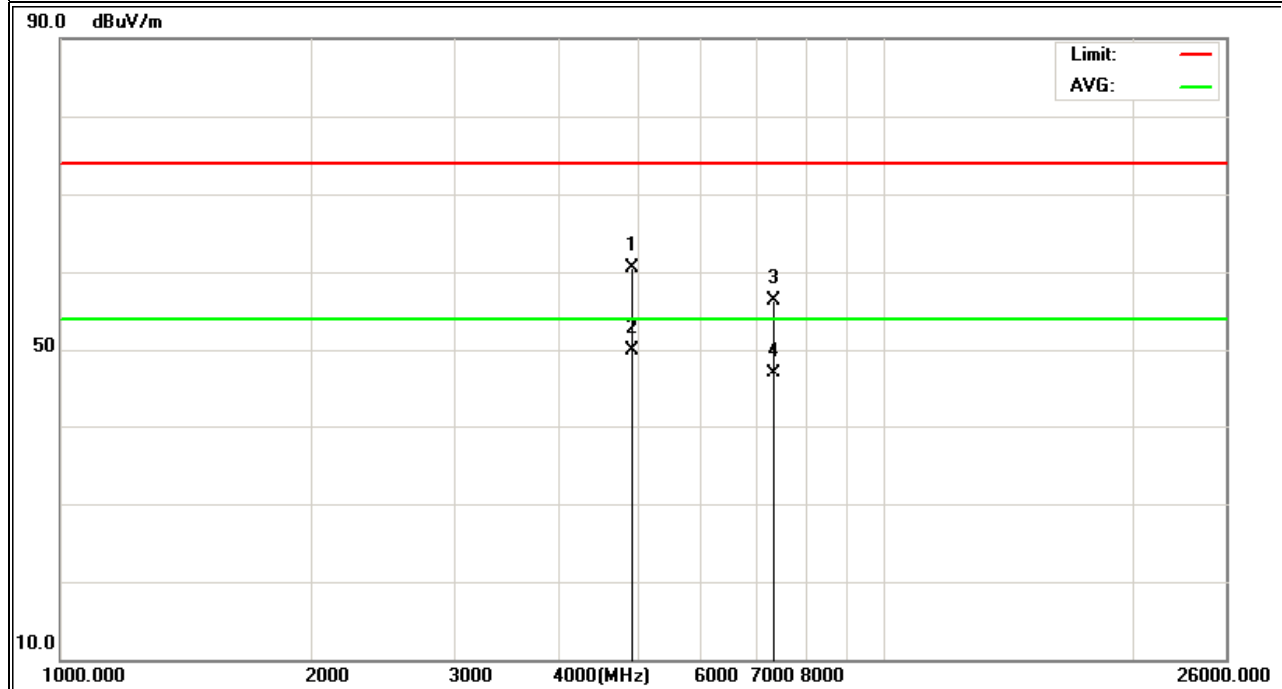


## Band Edge Emission:

|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | VINci Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1(802.11b 1 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2310.000           | 51.62                   | -12.89         | 38.73                      | 74                 | -35.27         | peak          |
| 2390.000           | 52.17                   | -13.06         | 39.11                      | 74                 | -34.89         | peak          |
| 2400.00            | 61.76                   | -12.99         | 48.77                      | 74                 | -25.23         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

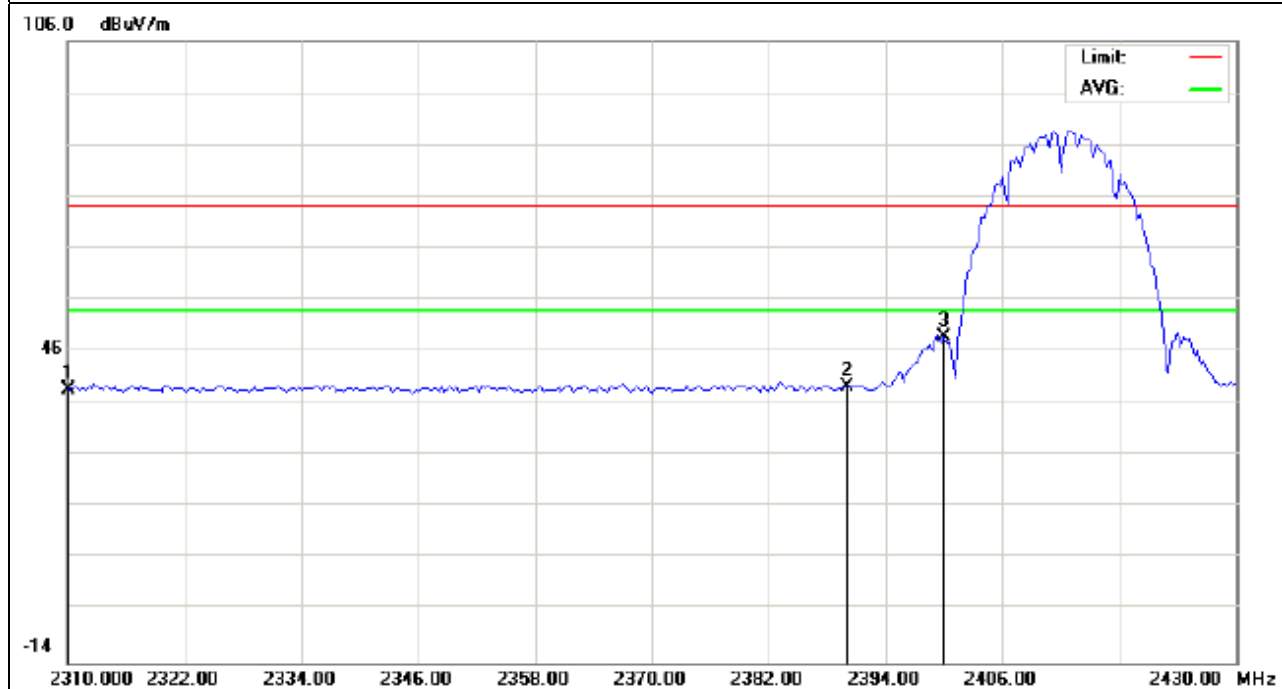




|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11(802.11b 1 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.500           | 52.34                   | -12.78         | 39.56                      | 74                 | -34.44         | peak          |
| 2500.00            | 52.44                   | -12.72         | 39.72                      | 74                 | -34.28         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
- The test results is to use the lowest bit rate, is the worst.

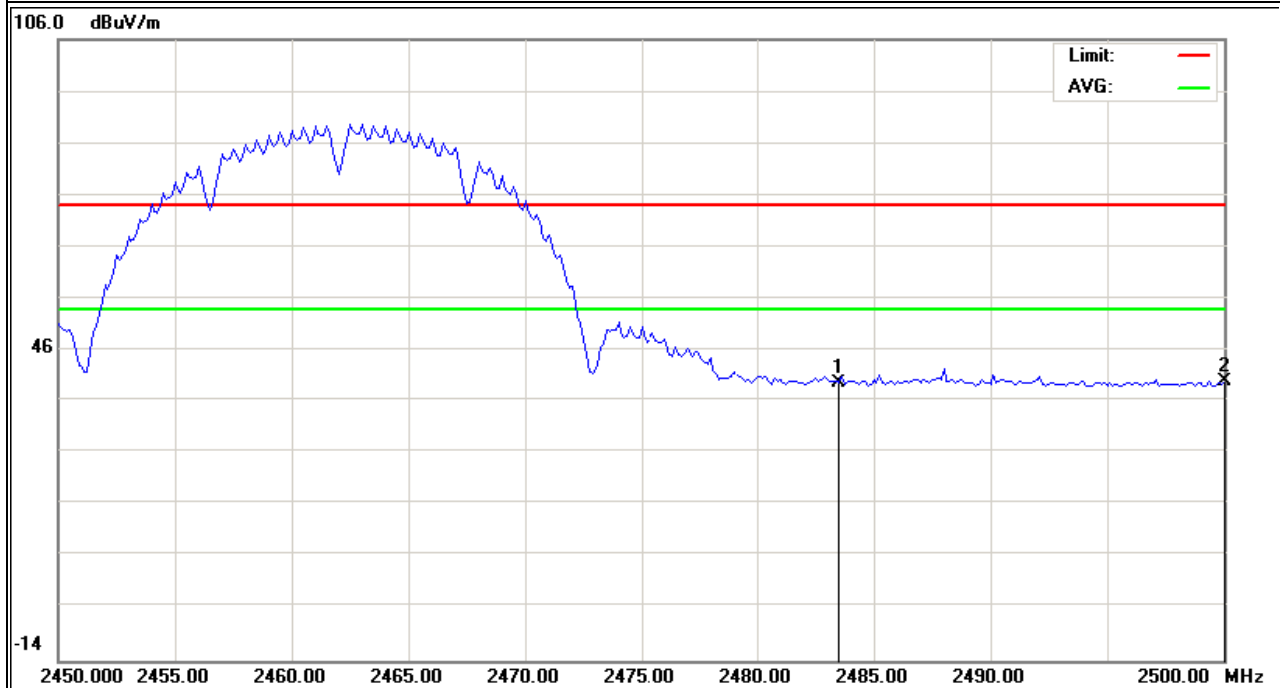


|               |                               |                     |                                    |
|---------------|-------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet      | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                         | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                      | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1(802.11g 6 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2310.000           | 51.86                   | -12.89         | 38.97                      | 74                 | -35.03         | peak          |
| 2390.000           | 53.32                   | -13.06         | 40.26                      | 74                 | -33.74         | peak          |
| 2400.000           | 65.56                   | -12.99         | 52.57                      | 74                 | -21.43         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

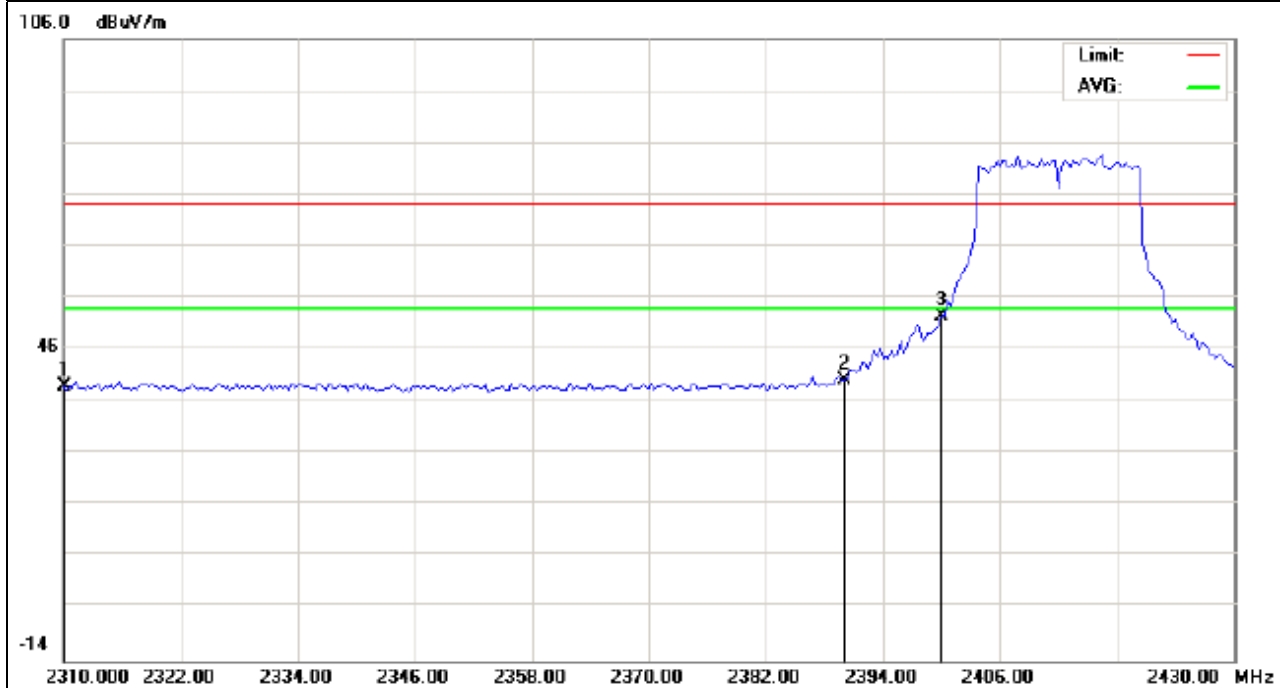


|               |                                |                     |                                    |
|---------------|--------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet       | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                          | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                       | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11(802.11g 6 Mbps data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.5             | 54.96                   | -12.78         | 42.18                      | 74                 | -31.82         | peak          |
| 2500.00            | 52.27                   | -12.72         | 39.55                      | 74                 | -34.45         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
- The test results is to use the lowest bit rate, is the worst.

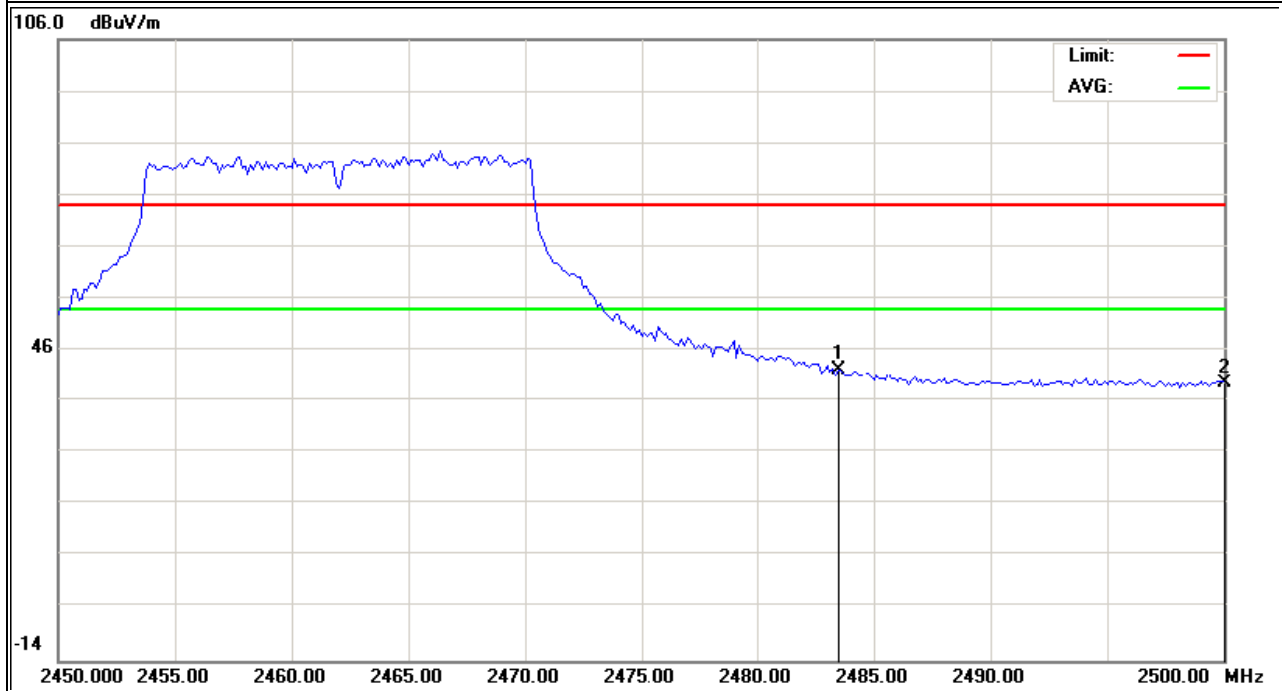


|               |                                           |                     |                                    |
|---------------|-------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                  | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                     | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                  | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH1(802.11n /20MHz 6.5 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2310.000           | 52.29                   | -12.89         | 39.40                      | 74                 | -34.90         |               |
| 2390.000           | 57.39                   | -13.06         | 44.33                      | 74                 | -29.67         | peak          |
| 2400.000           | 64.14                   | -12.99         | 51.15                      | 74                 | -22.85         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

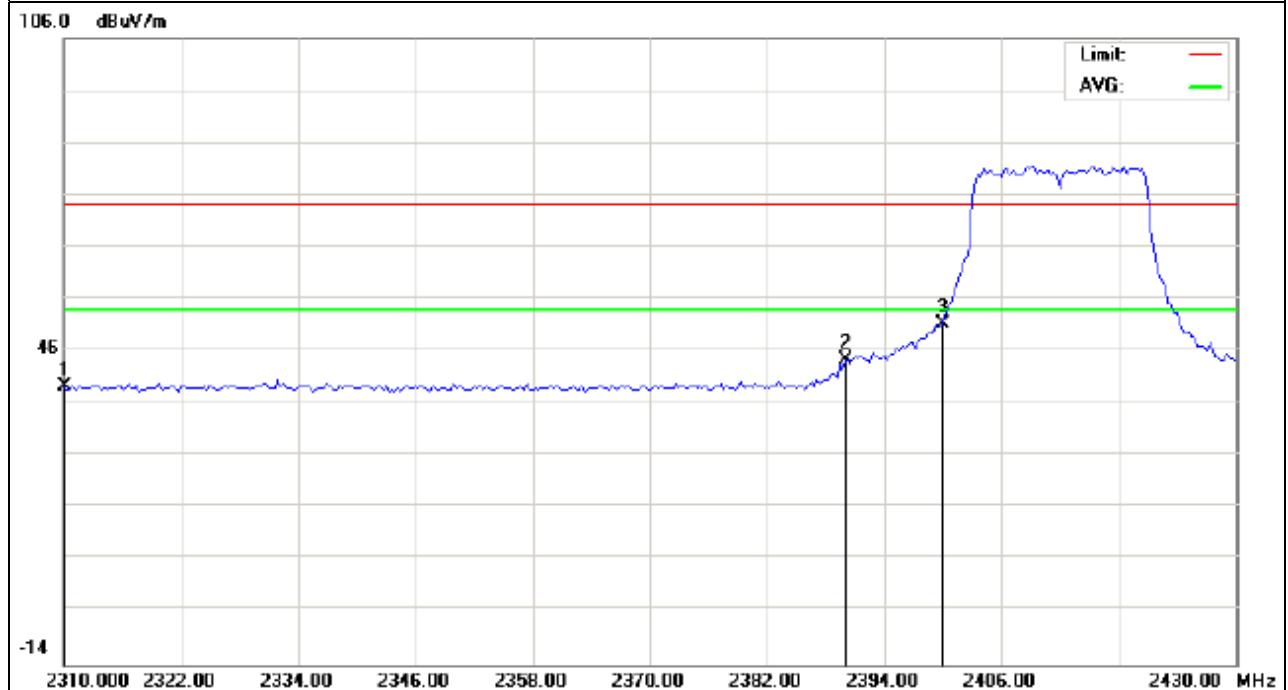


|               |                                            |                     |                                    |
|---------------|--------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                   | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                      | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                   | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH11(802.11n /20MHz 6.5 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.500           | 57.01                   | -12.78         | 44.23                      | 74                 | -29.77         | peak          |
| 2500.000           | 52.65                   | -12.72         | 39.93                      | 74                 | -34.07         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

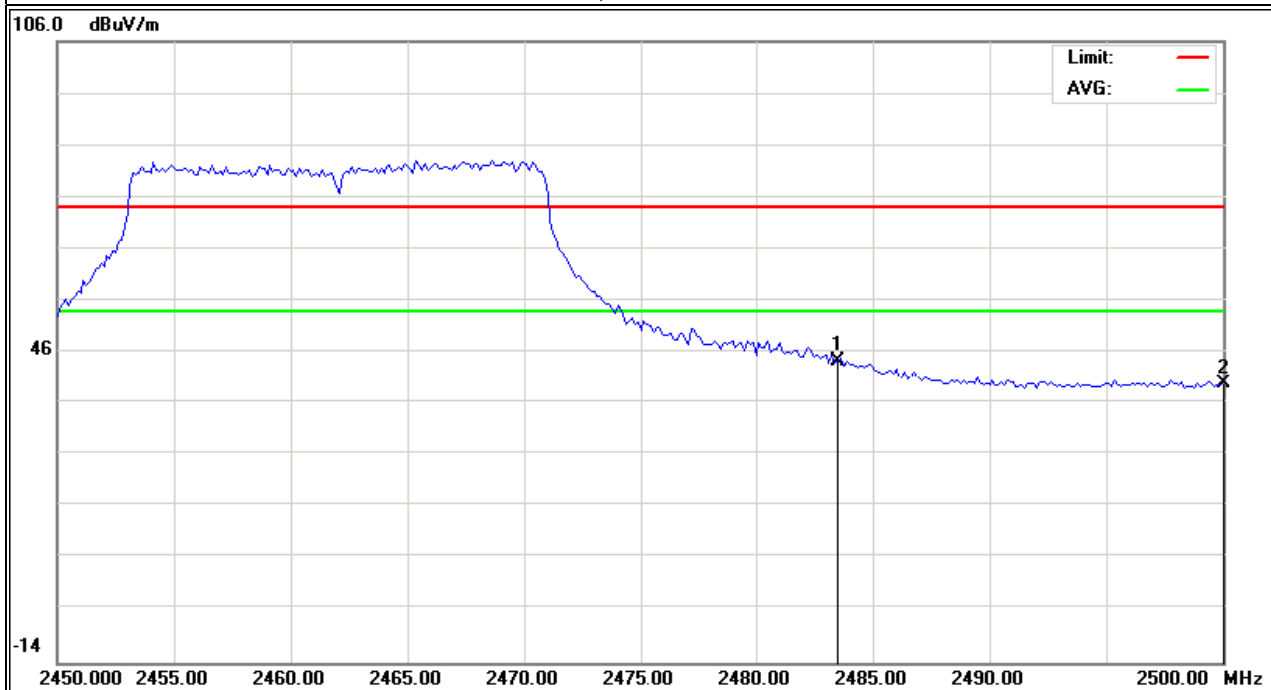


|               |                                          |                     |                                    |
|---------------|------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                 | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                    | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                 | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH3(802.11n /40MHz 54 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2310.000           | 52.47                   | -12.89         | 39.58                      | 74                 | -34.42         | peak          |
| 2390.000           | 57.61                   | -13.06         | 44.55                      | 74                 | -29.45         | peak          |
| 2400.000           | 61.88                   | -12.99         | 48.89                      | 74                 | -25.11         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

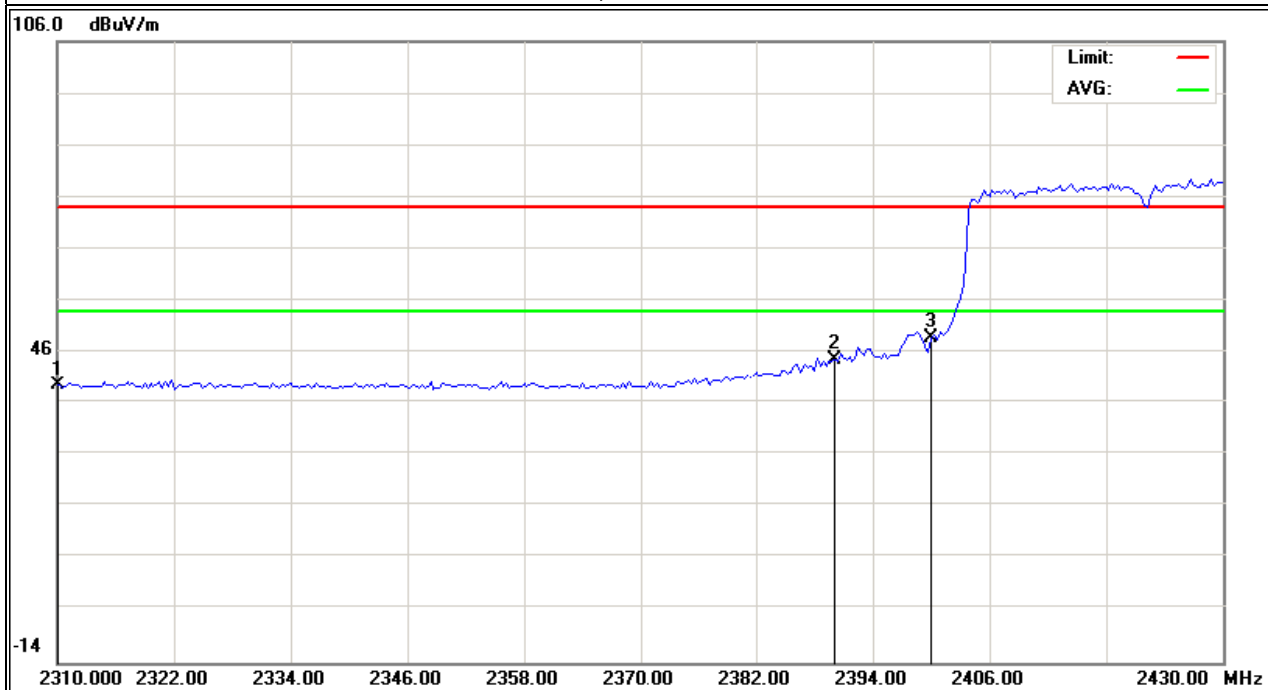


|               |                                          |                     |                                    |
|---------------|------------------------------------------|---------------------|------------------------------------|
| EUT :         | 5" VINCI Learning Tablet                 | Model Name :        | ViNCi Tab M                        |
| Temperature : | 20 °C                                    | Relative Humidity : | 48%                                |
| Pressure :    | 1010 hPa                                 | Test Voltage :      | DC 5V From Adapter<br>AC 120V/60Hz |
| Test Mode :   | CH9(802.11n /40MHz 54 Mbps<br>data rate) | Polarization :      | Horizontal                         |

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 2483.500           | 60.25                   | -12.78         | 47.47                      | 74                 | -26.53         | peak          |
| 2500.000           | 54.19                   | -12.72         | 41.47                      | 74                 | -32.53         | peak          |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |
|                    |                         |                |                            |                    |                |               |

#### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2438.5MHz, then mark the higher-level emission for comparing with the FCC rules.
3. The test results is to use the lowest bit rate, is the worst.

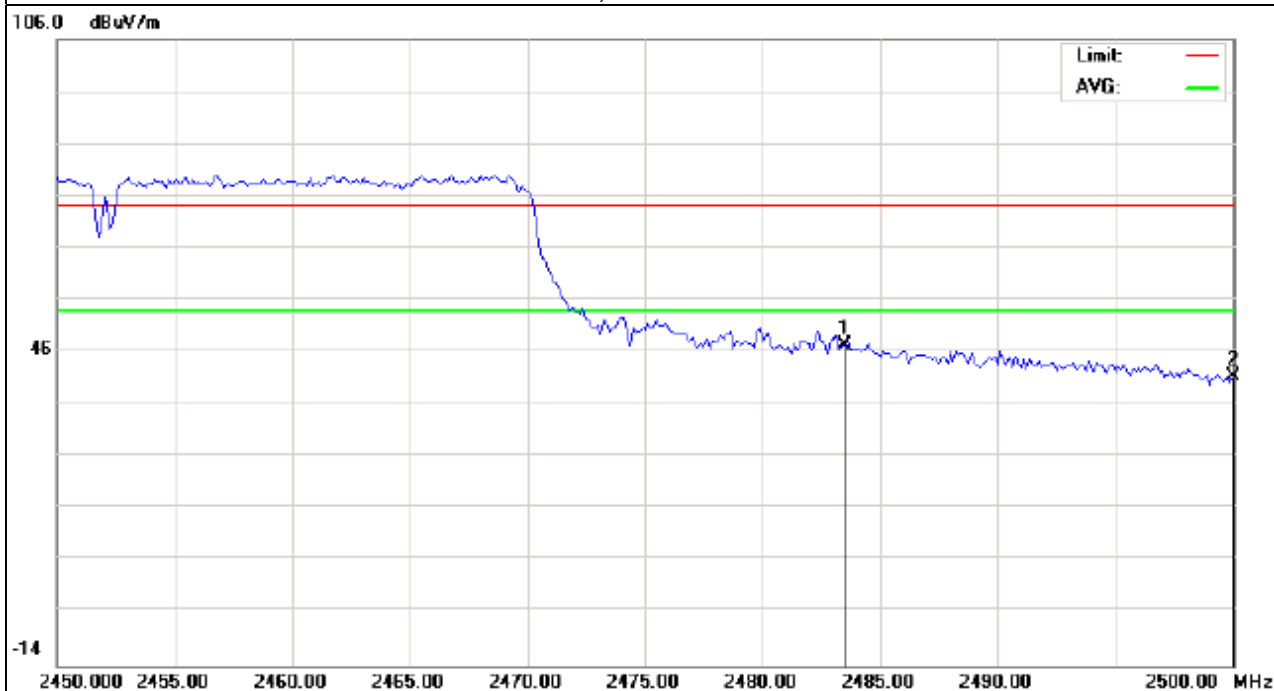

#### 4. POWER SPECTRAL DENSITY TEST

##### 4.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                        |                        |                       |        |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section                         | Test Item              | Limit                  | Frequency Range (MHz) | Result |
| 15.247                          | Power Spectral Density | 8 dBm<br>(in any 3KHz) | 2400-2483.5           | PASS   |

##### 4.1.1 TEST PROCEDURE

1. The testing follows Measurement Procedure PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Record the measurement data derived from spectrum analyzer.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 KHz. Video bandwidth (VBW) >= 300 KHz In order to make an accurate measurement, set the span to 5-30% greater than Emission Bandwidth (EBW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where  $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP



##### 4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 4.1.5 TEST RESULTS



|               |                                               |                     |                                 |
|---------------|-----------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                      | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                         | Relative Humidity : | 60%                             |
| Pressure :    | 1015 hPa                                      | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX b Mode /CH01, CH06, CH11, 1 Mbps data rate |                     |                                 |

| Frequency | Power Density A (dBm) | PSD/ 3KHz (dBm) | Limit (dBm) | Result      |
|-----------|-----------------------|-----------------|-------------|-------------|
| 2412 MHz  | -3.14                 | -18.34          | 8           | <b>PASS</b> |
| 2437 MHz  | -1.76                 | -16.96          | 8           | <b>PASS</b> |
| 2462 MHz  | -1.78                 | -16.98          | 8           | <b>PASS</b> |

#### Note:

1. BWCF =  $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
2. The test results is to use the lowest bit rate, is the worst.

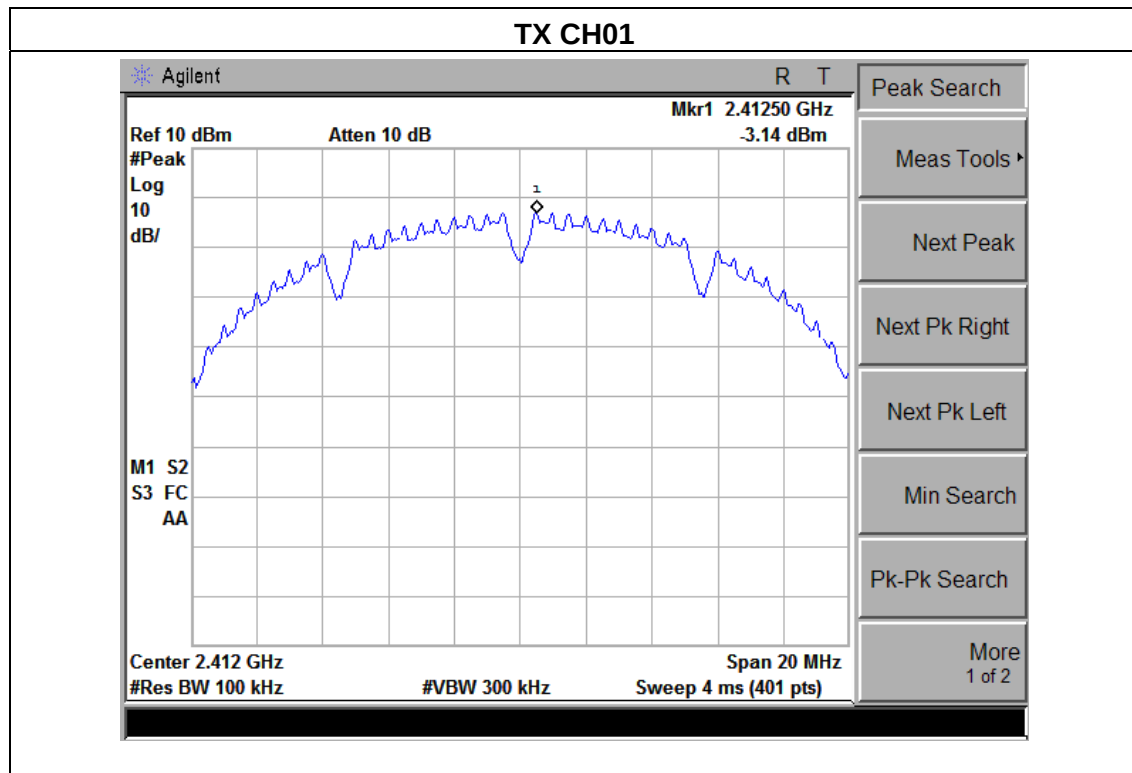

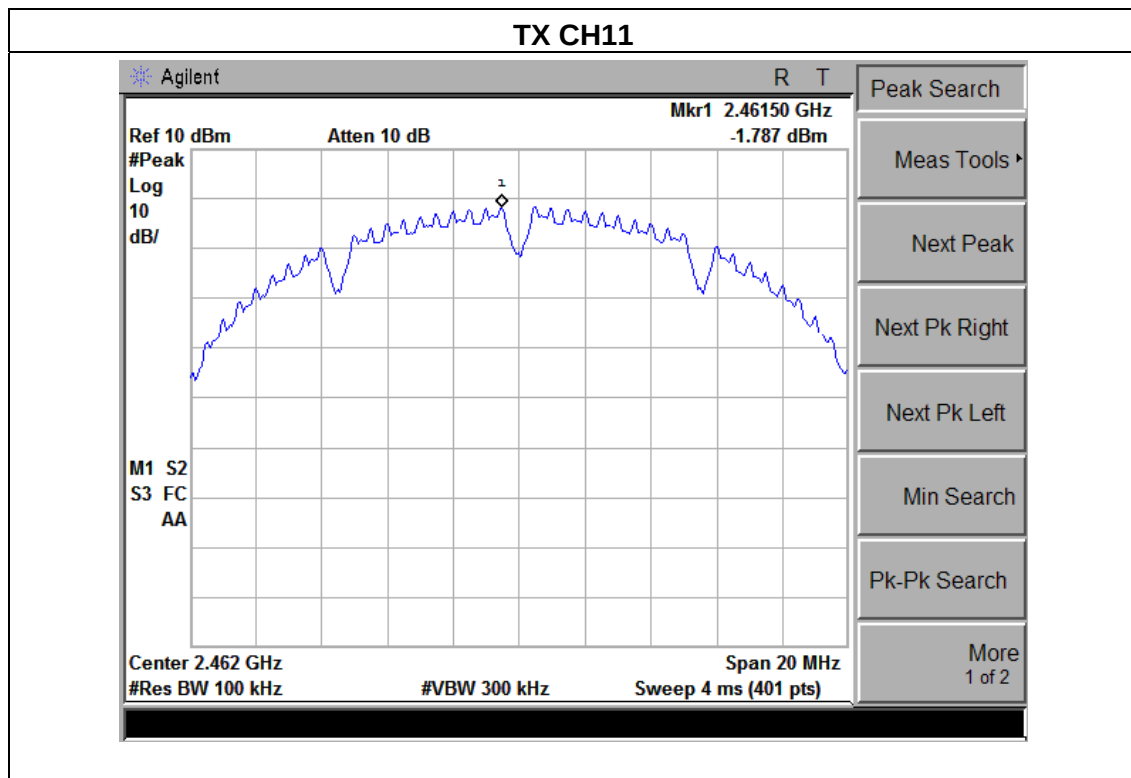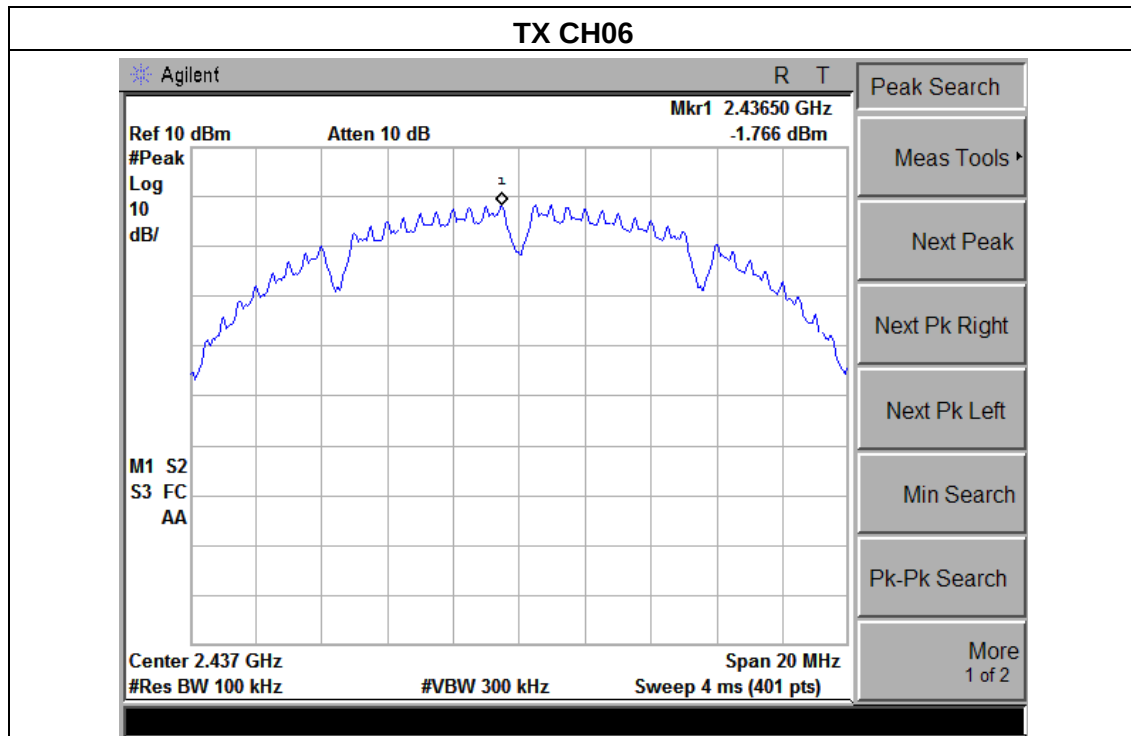




|               |                                               |                     |                                 |
|---------------|-----------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                      | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                         | Relative Humidity : | 60%                             |
| Pressure :    | 1015 hPa                                      | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX g Mode /CH01, CH06, CH11, 6 Mbps data rate |                     |                                 |

| Frequency | Power Density A (dBm) | PSD/ 3KHz (dBm) | Limit (dBm) | Result      |
|-----------|-----------------------|-----------------|-------------|-------------|
| 2412 MHz  | -10.26                | -25.46          | 8           | <b>PASS</b> |
| 2437 MHz  | -9.36                 | -24.56          | 8           | <b>PASS</b> |
| 2462 MHz  | -9.30                 | -24.50          | 8           | <b>PASS</b> |

**Note:**

1. BWCF =  $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
2. The test results is to use the lowest bit rate, is the worst.

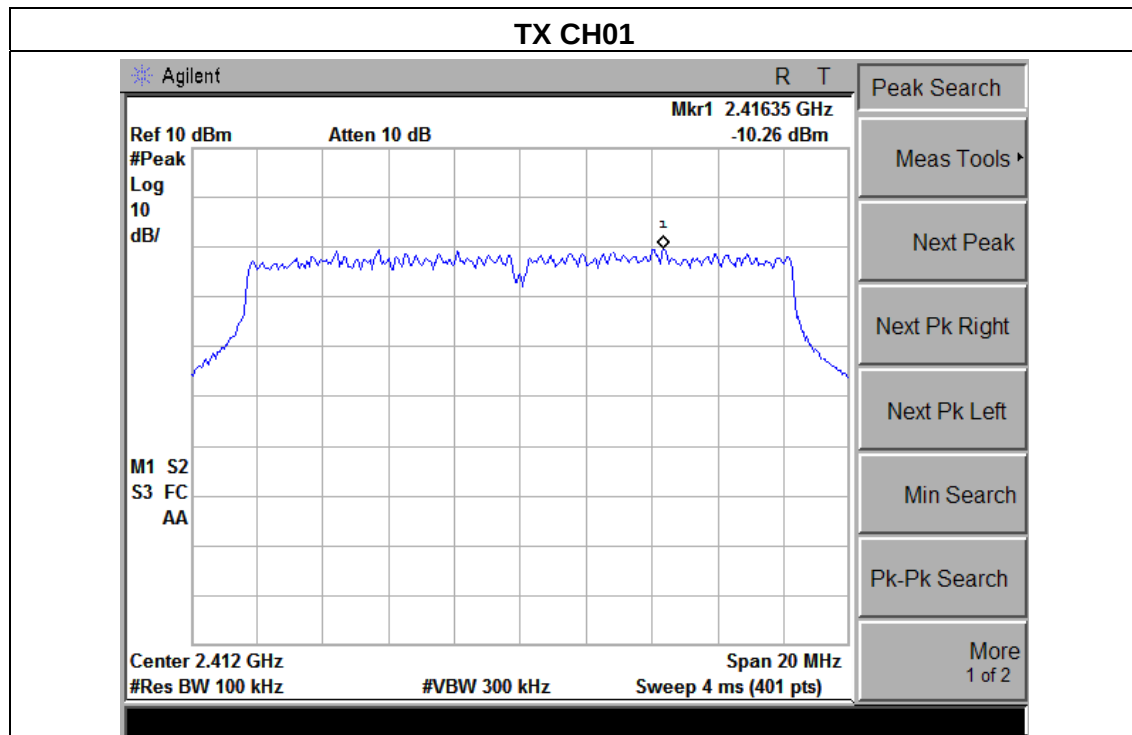

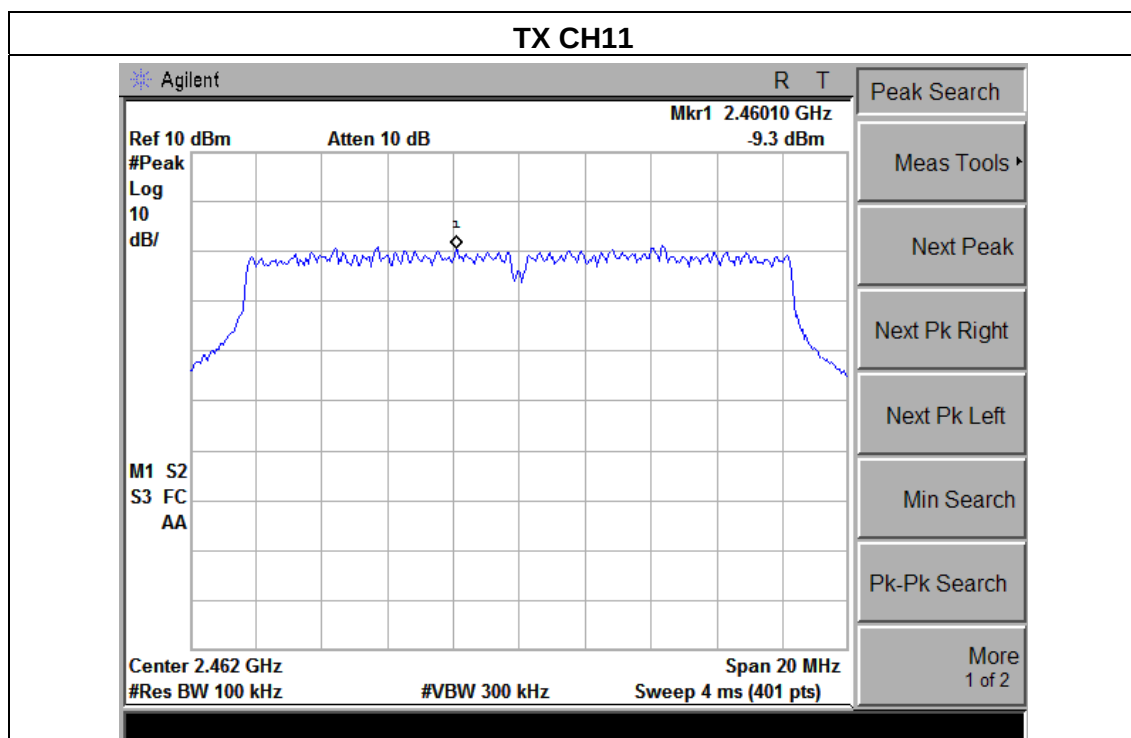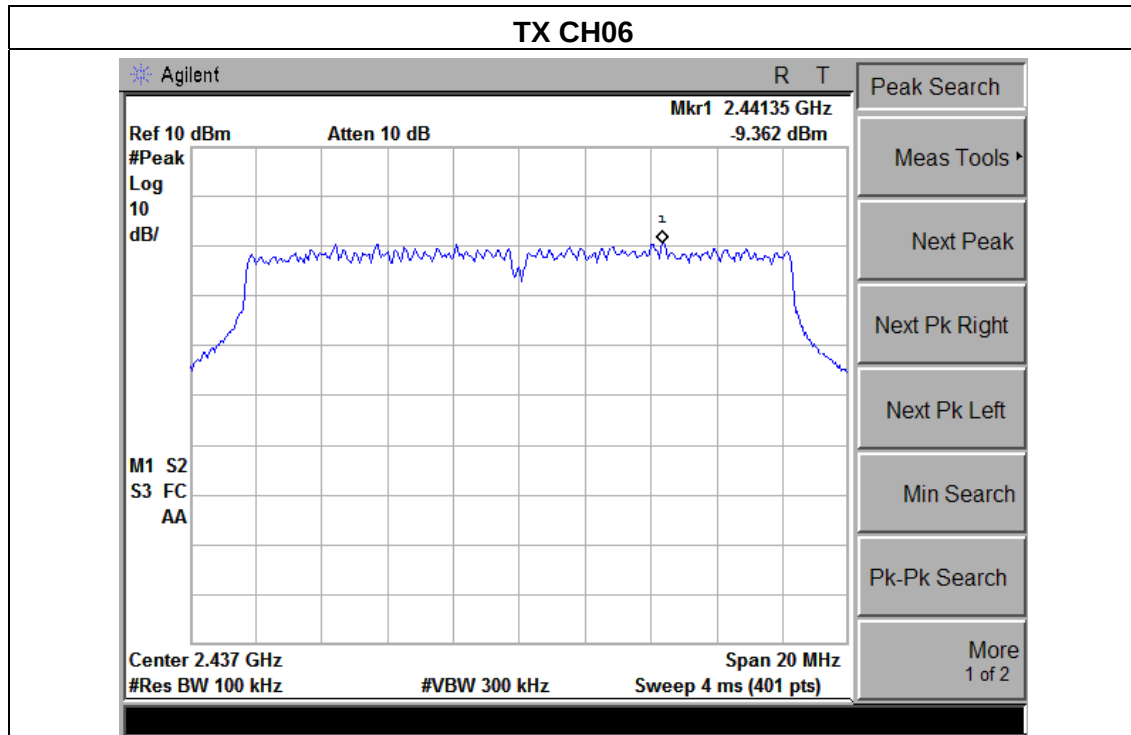


|               |                                                      |                     |                                 |
|---------------|------------------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                             | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                                | Relative Humidity : | 60%                             |
| Pressure :    | 1015 hPa                                             | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX n Mode(20M) /CH01, CH06, CH11, 6.5 Mbps data rate |                     |                                 |


| Frequency | Power Density A (dBm) | PSD/ 3KHz (dBm) | Limit (dBm) | Result      |
|-----------|-----------------------|-----------------|-------------|-------------|
| 2412 MHz  | -11.84                | -27.04          | 8           | <b>PASS</b> |
| 2437 MHz  | -10.90                | -26.10          | 8           | <b>PASS</b> |
| 2462 MHz  | -10.48                | -25.68          | 8           | <b>PASS</b> |

**Note:**


1. BWCF =  $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
2. The test results is to use the lowest bit rate, is the worst.

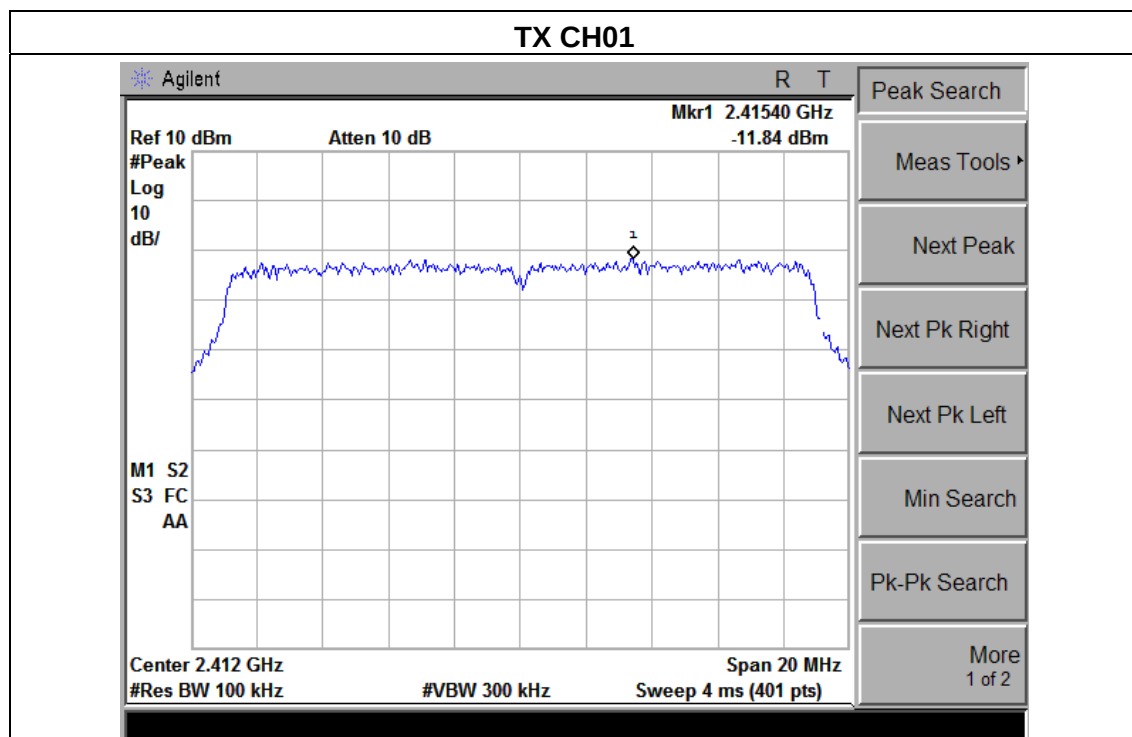

### TX CH06

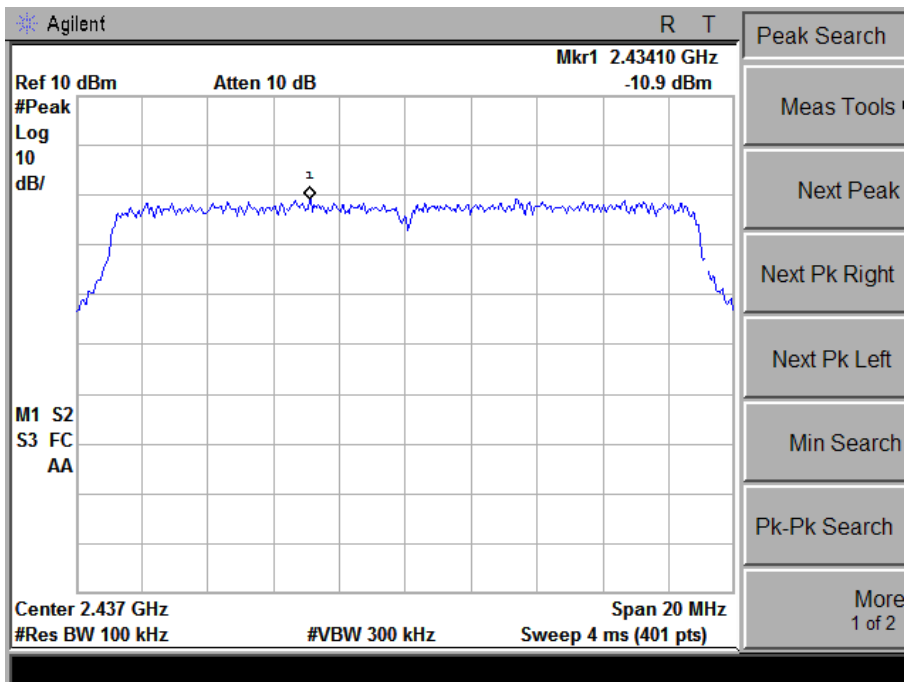

### TX CH11

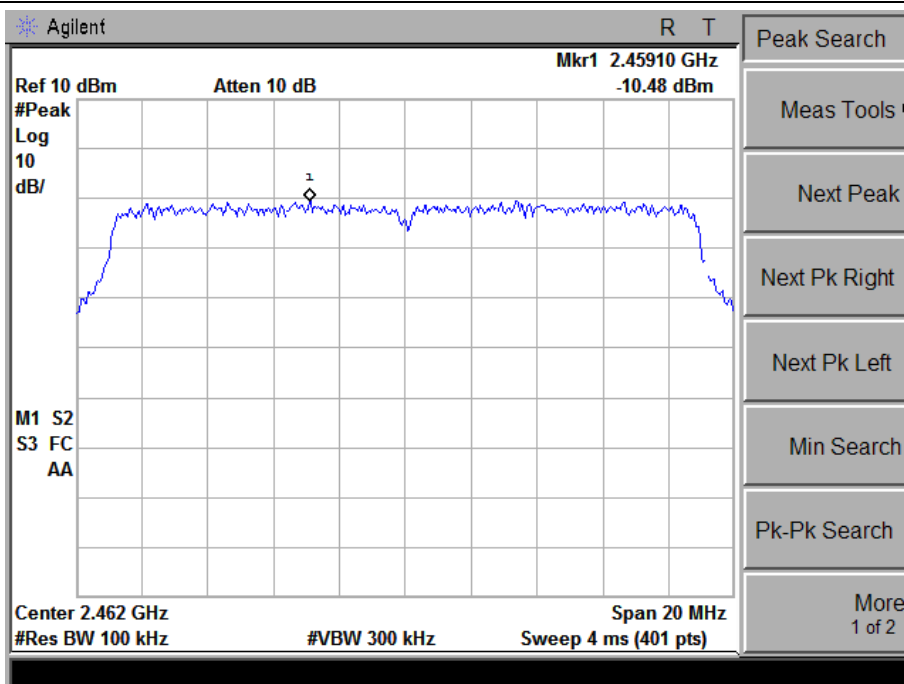




|               |                                                     |                     |                                 |
|---------------|-----------------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                            | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                               | Relative Humidity : | 60%                             |
| Pressure :    | 1015 hPa                                            | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX n Mode(40M) /CH03, CH06, CH09, 54 Mbps data rate |                     |                                 |

| Frequency | Power Density A (dBm) | PSD/ 3KHz (dBm) | Limit (dBm) | Result      |
|-----------|-----------------------|-----------------|-------------|-------------|
| 2422 MHz  | -13.80                | -29.00          | 8           | <b>PASS</b> |
| 2437 MHz  | -13.36                | -25.56          | 8           | <b>PASS</b> |
| 2452 MHz  | -13.36                | -25.56          | 8           | <b>PASS</b> |

**Note:**

1. BWCF =  $10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$ .
2. The test results is to use the lowest bit rate, is the worst.

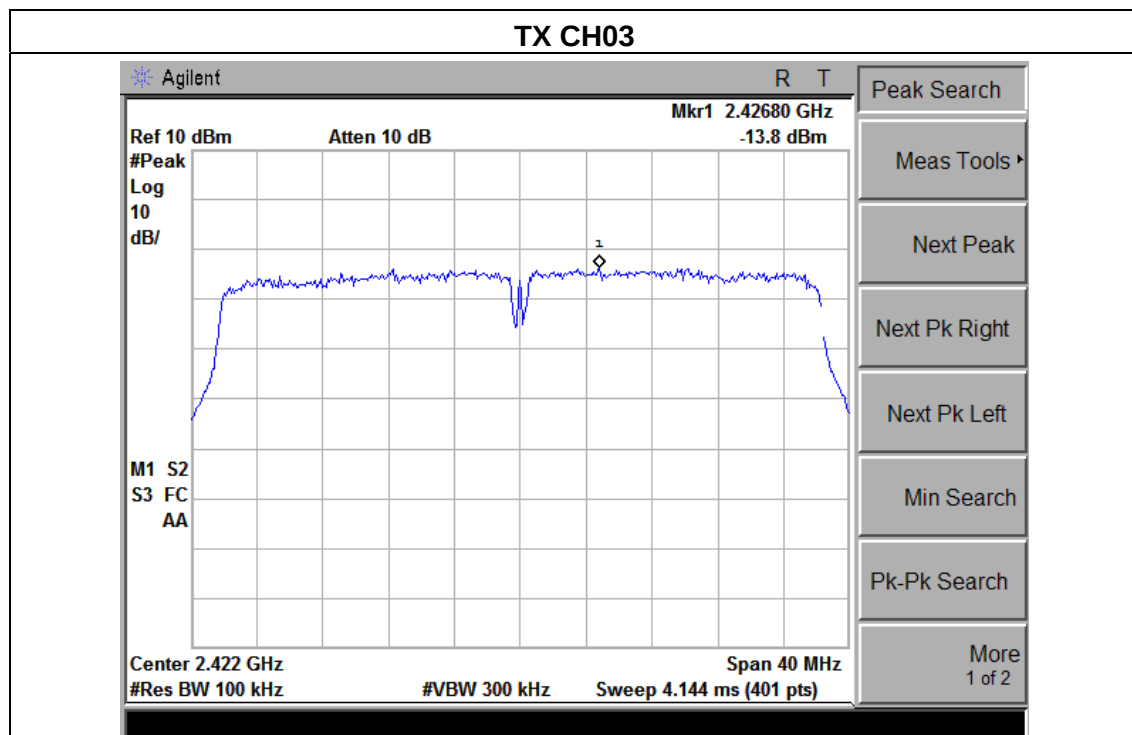

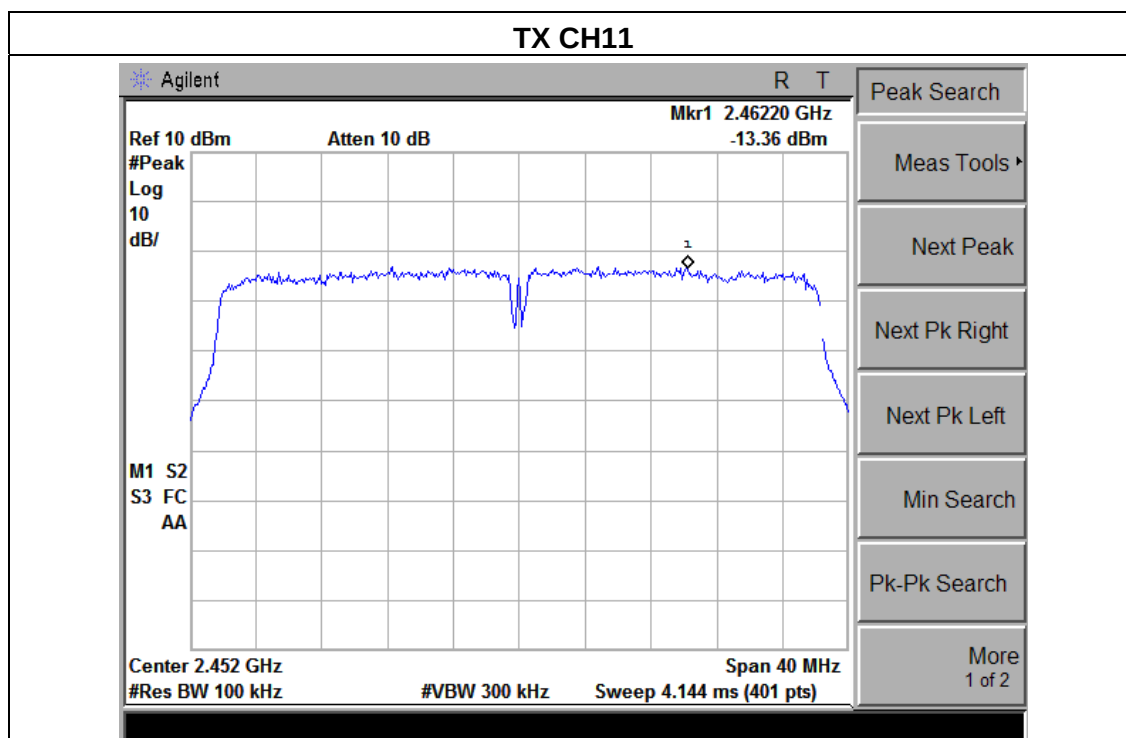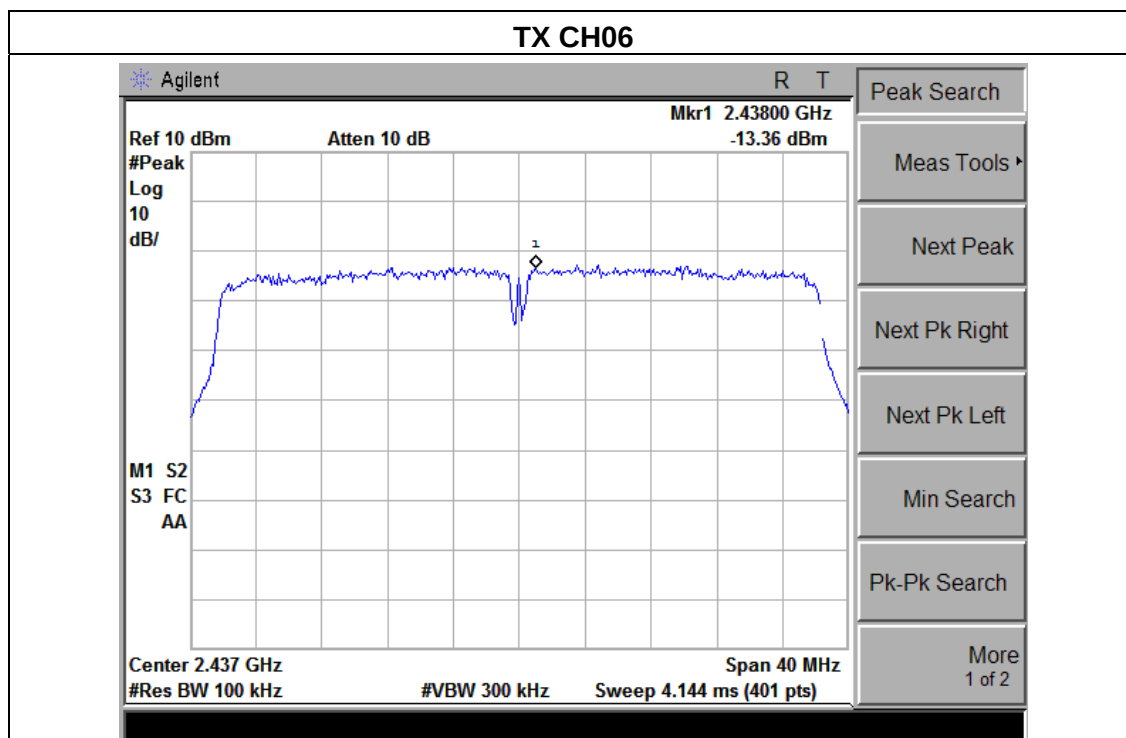



## 5. BANDWIDTH TEST

### 5.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |           |                                         |                       |        |
|---------------------------------|-----------|-----------------------------------------|-----------------------|--------|
| Section                         | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

#### 5.1.1 TEST PROCEDURE

a.

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v01.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable. The path loss was compensated to the results for each measurement.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1-5% of the emission bandwidth (EBW). Set the Video bandwidth (VBW)  $\geq 3 * \text{RBW}$ . In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 KHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


### 5.1.5 TEST RESULTS

|               |                                               |                     |                                 |
|---------------|-----------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                      | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                         | Relative Humidity : | 60%                             |
| Pressure :    | 1012 hPa                                      | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX b Mode /CH01, CH06, CH11, 1 Mbps data rate |                     |                                 |


| Frequency | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Channel Separation (MHz) | Result |
|-----------|---------------------|-----------------------|--------------------------|--------|
| 2412 MHz  | 10.063              | 14.8855               | >=500KHz                 | PASS   |
| 2437 MHz  | 10.084              | 14.8633               | >=500KHz                 | PASS   |
| 2462 MHz  | 10.071              | 14.8676               | >=500KHz                 | PASS   |

**Note:**


1. The test results is to use the lowest bit rate, is the worst.

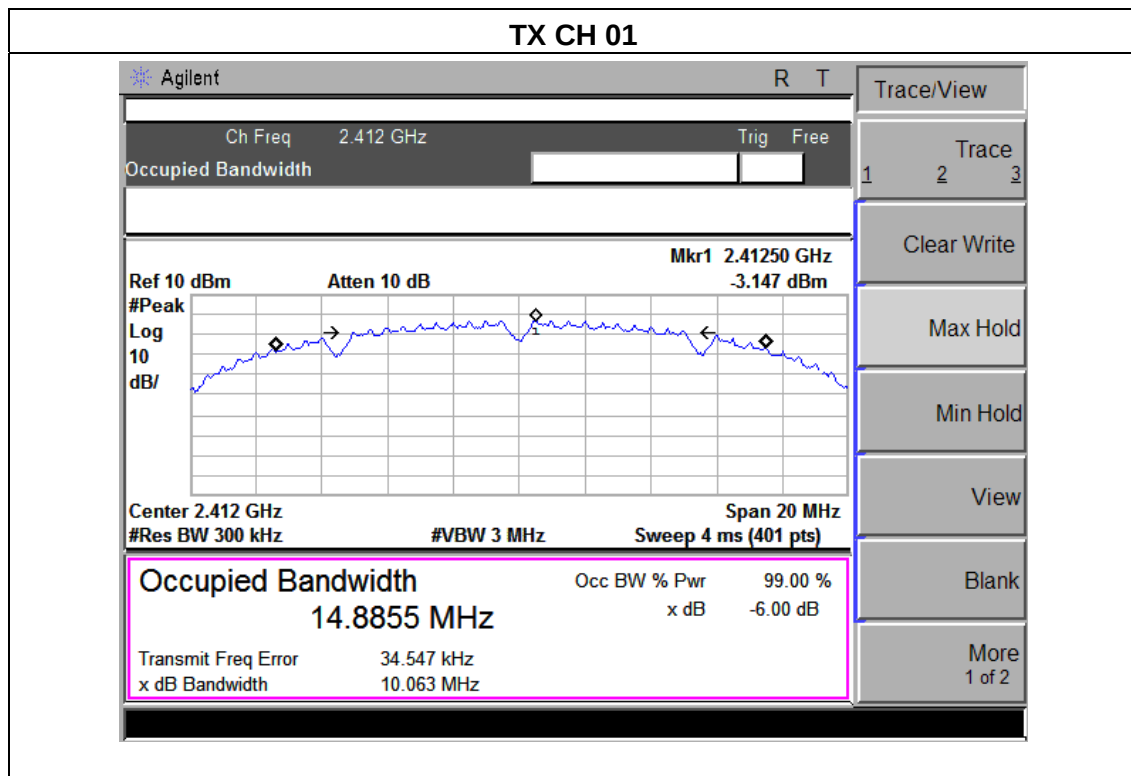

### TX CH 06

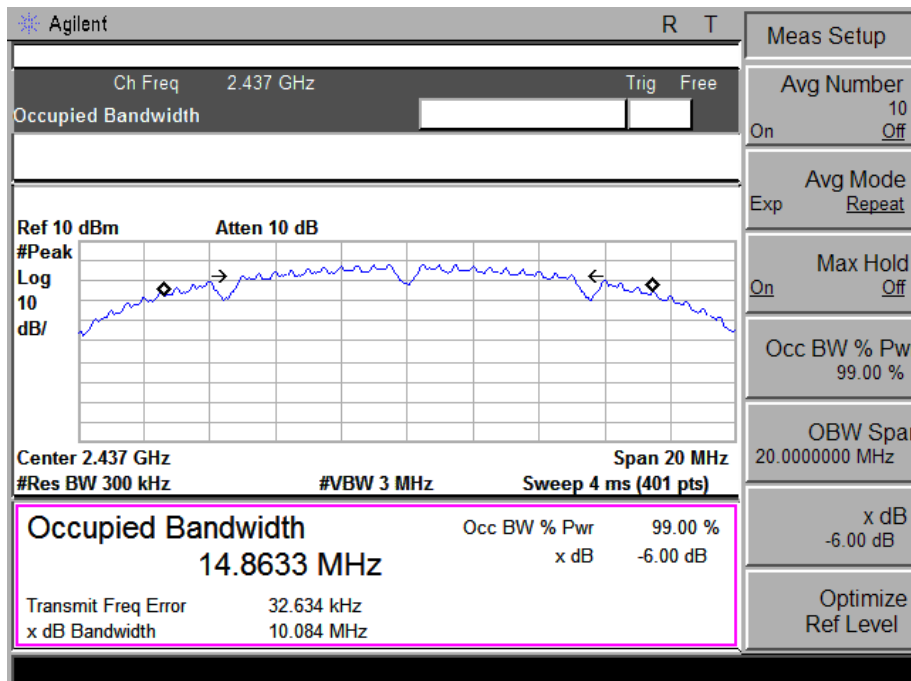

### TX CH 11

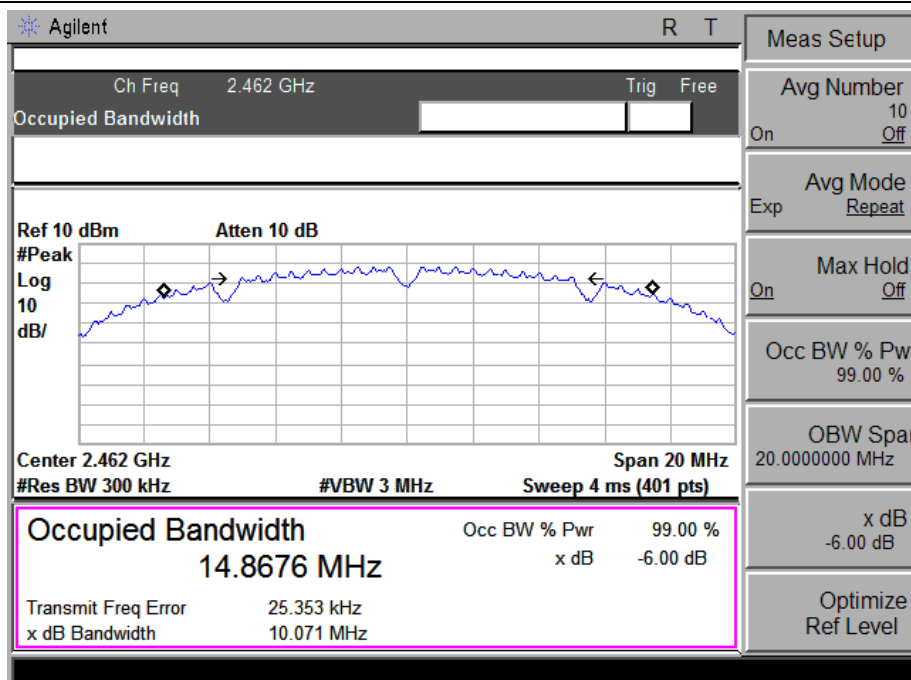


|               |                                               |                     |                                 |
|---------------|-----------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                      | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                         | Relative Humidity : | 60%                             |
| Pressure :    | 1012 hPa                                      | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX g Mode /CH01, CH06, CH11, 6 Mbps data rate |                     |                                 |


| Frequency | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Channel Separation (MHz) | Result |
|-----------|---------------------|-----------------------|--------------------------|--------|
| 2412 MHz  | 16.553              | 16.4295               | >=500KHz                 | PASS   |
| 2437 MHz  | 16.560              | 16.4348               | >=500KHz                 | PASS   |
| 2462 MHz  | 16.569              | 16.4348               | >=500KHz                 | PASS   |

**Note:**


1. The test results is to use the lowest bit rate, is the worst.

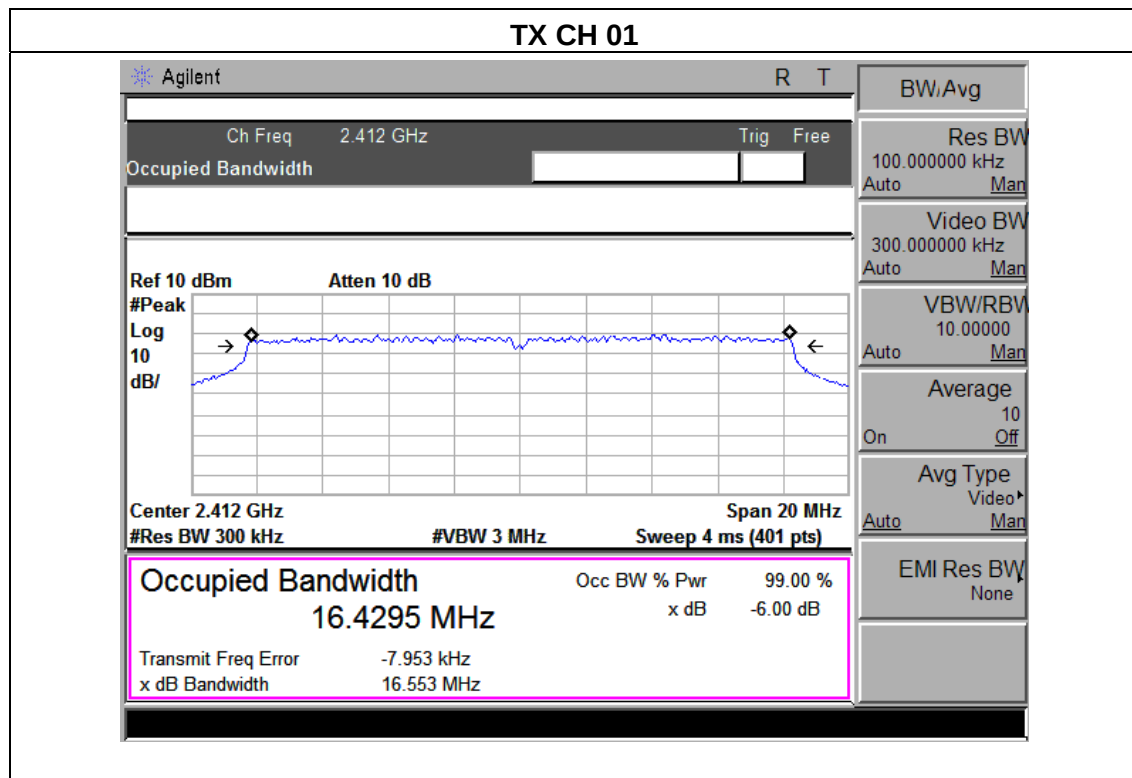

### TX CH 06

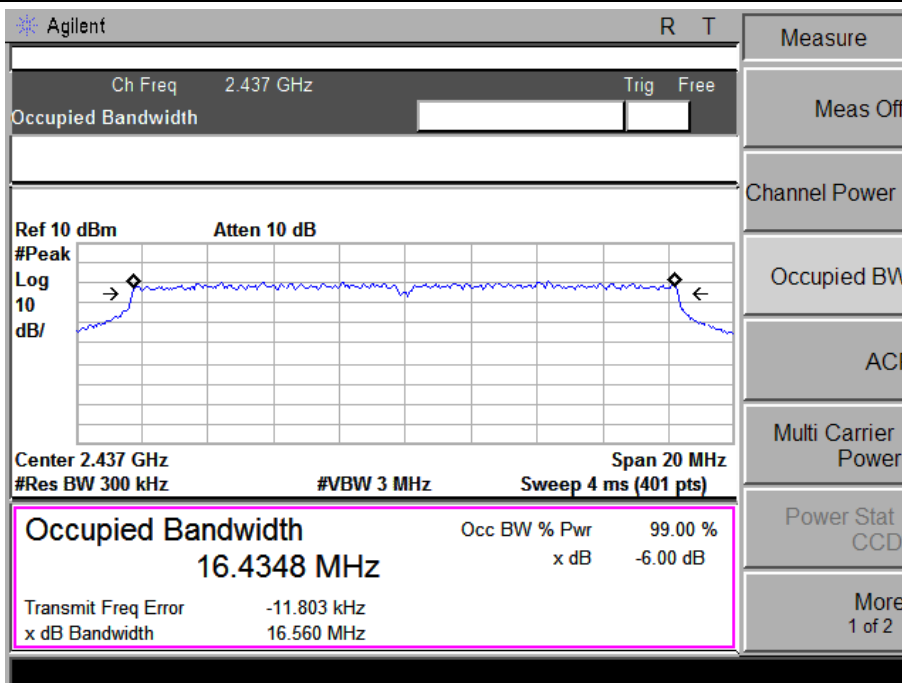

### TX CH 11

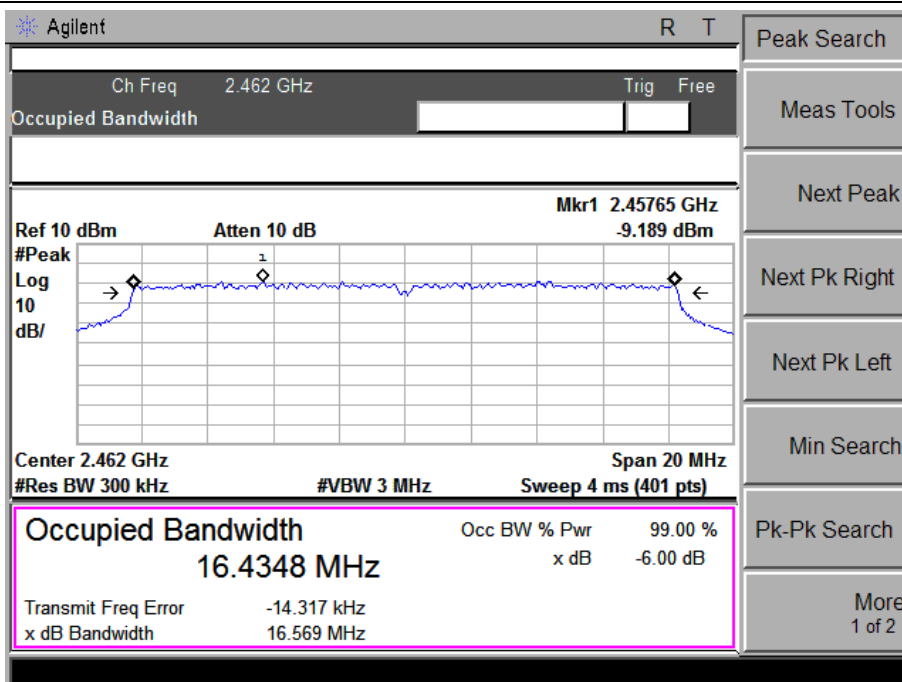


|               |                                                      |                     |                                 |
|---------------|------------------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                             | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                                | Relative Humidity : | 60%                             |
| Pressure :    | 1012 hPa                                             | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX n Mode(20M) /CH01, CH06, CH11, 6.5 Mbps data rate |                     |                                 |


| Frequency | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Channel Separation (MHz) | Result |
|-----------|---------------------|-----------------------|--------------------------|--------|
| 2412 MHz  | 17.814              | 17.6242               | >=500KHz                 | PASS   |
| 2437 MHz  | 17.826              | 17.6371               | >=500KHz                 | PASS   |
| 2462 MHz  | 17.817              | 17.6277               | >=500KHz                 | PASS   |

**Note:**


1. The test results is to use the lowest bit rate, is the worst.

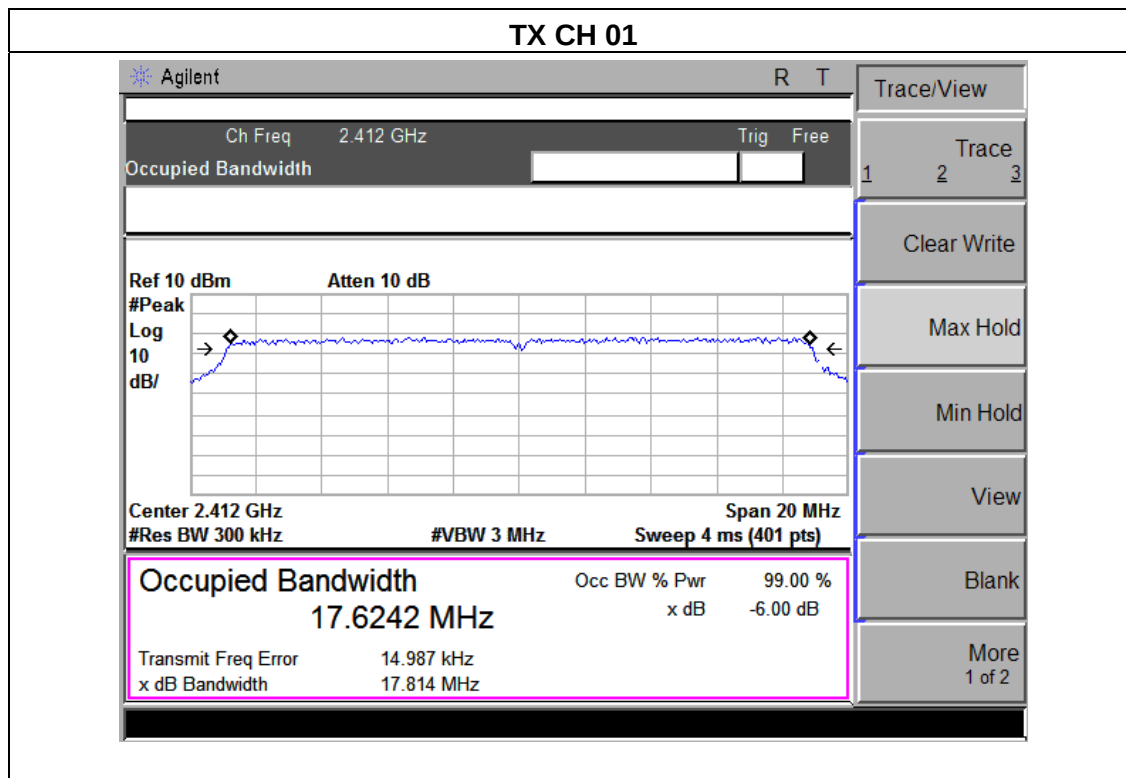

### TX CH 06

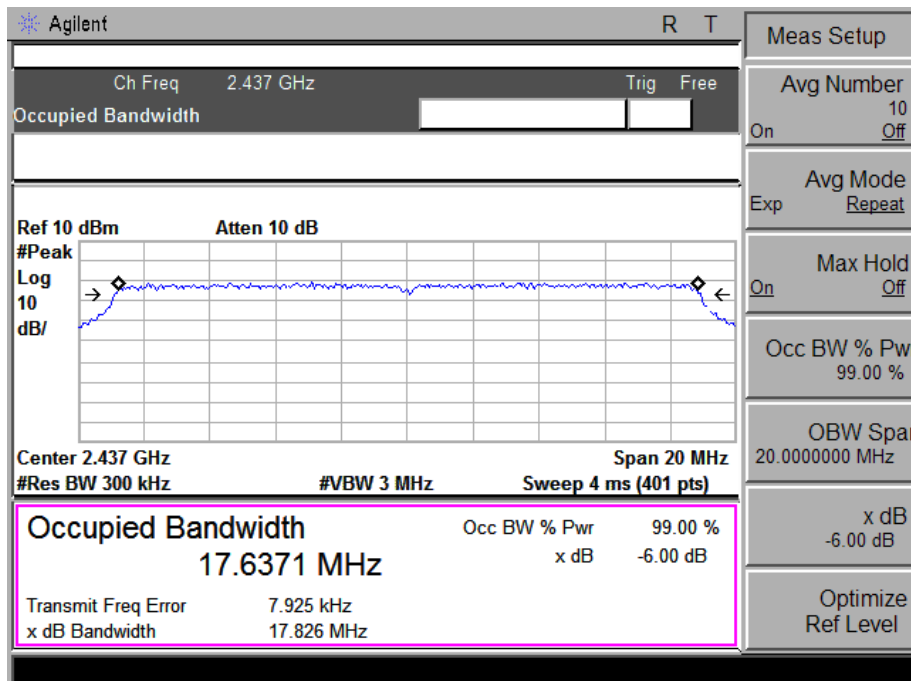

### TX CH 11

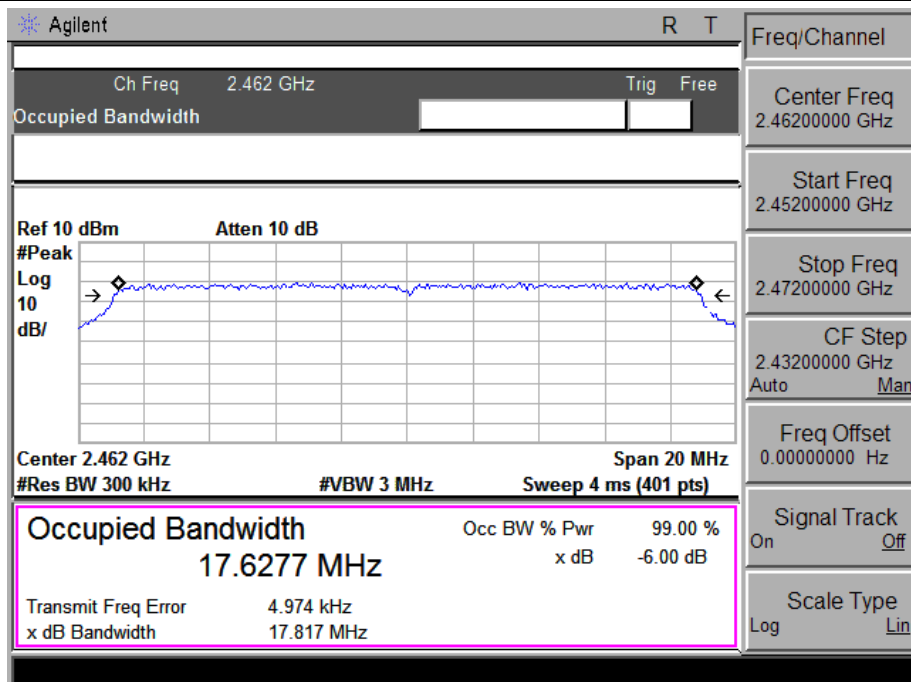


|               |                                                     |                     |                                 |
|---------------|-----------------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                            | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                               | Relative Humidity : | 60%                             |
| Pressure :    | 1012 hPa                                            | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX n Mode(40M) /CH03, CH06, CH09, 54 Mbps data rate |                     |                                 |

| Frequency | 6dB Bandwidth (MHz) | 99% Occupied BW (MHz) | Channel Separation (MHz) | Result |
|-----------|---------------------|-----------------------|--------------------------|--------|
| 2422 MHz  | 36.067              | 35.7742               | >=500KHz                 | PASS   |
| 2437 MHz  | 36.135              | 35.7675               | >=500KHz                 | PASS   |
| 2452 MHz  | 36.143              | 35.7563               | >=500KHz                 | PASS   |


**Note:**

1. The test results is to use the lowest bit rate, is the worst.

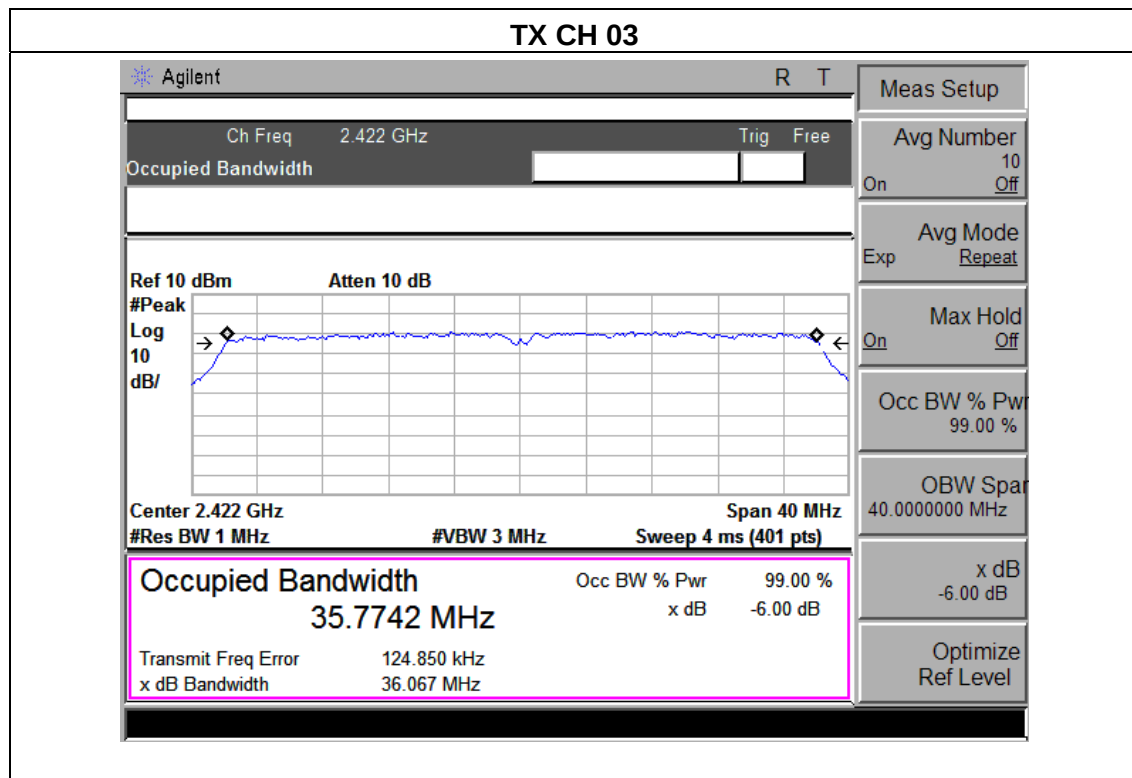




### TX CH 06

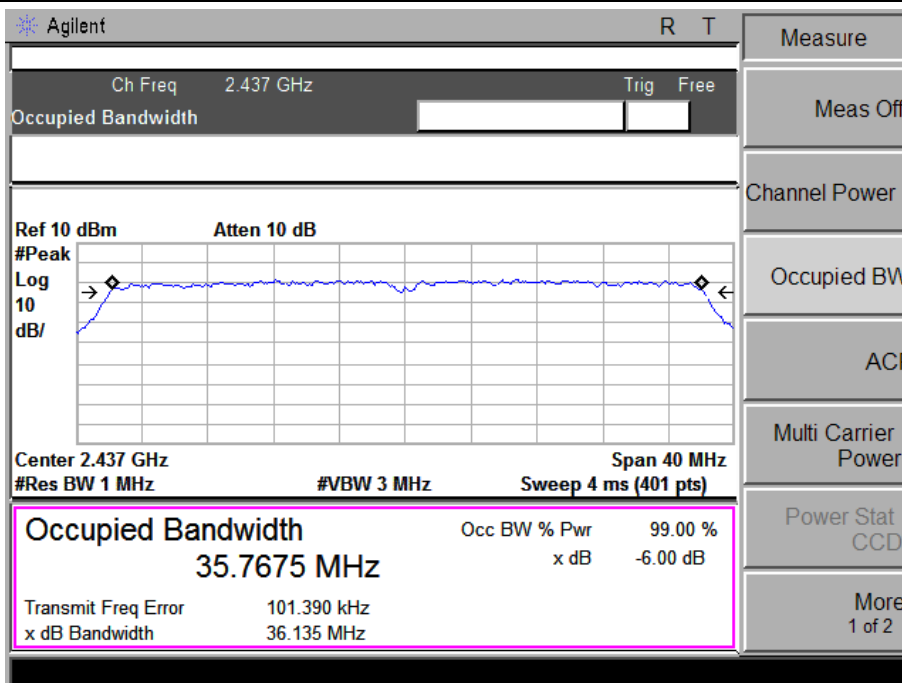

### TX CH 09

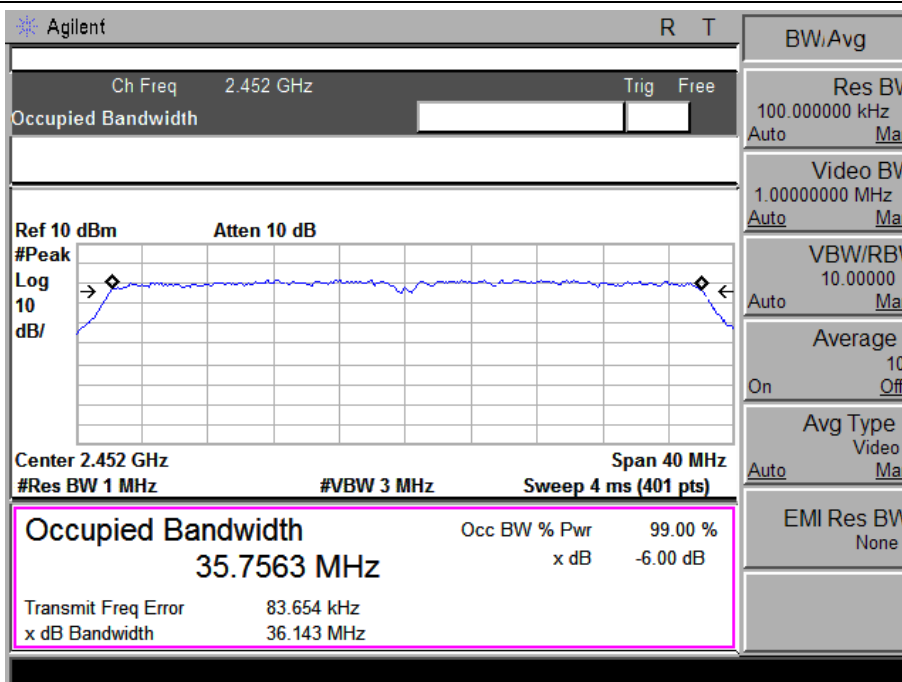

## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP



#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 6.1.5 TEST RESULTS

|               |                                          |                     |                                 |
|---------------|------------------------------------------|---------------------|---------------------------------|
| EUT :         | 5" VINCI Learning Tablet                 | Model Name :        | ViNCi Tab M                     |
| Temperature : | 25 °C                                    | Relative Humidity : | 60%                             |
| Pressure :    | 1012 hPa                                 | Test Voltage :      | DC 5V From Adapter AC 120V/60Hz |
| Test Mode :   | TX b/g/n(20M,40M) Mode /CH01, CH06, CH11 |                     |                                 |

| TX 802.11b Mode     |           |                    |                    |              |      |       |
|---------------------|-----------|--------------------|--------------------|--------------|------|-------|
| Test Channel        | Frequency | Peak output power. | Peak output power. | Antenna Gain | EIRP | LIMIT |
|                     | (MHz)     | (dBm)              | (W)                | dBi          | dBm  | dBm   |
| CH01                | 2412      | 10.25              | 0.0106             | -1.93        | 8.32 | 30    |
| CH06                | 2437      | 10.81              | 0.0120             | -1.93        | 8.88 | 30    |
| CH11                | 2462      | 9.81               | 0.0096             | -1.93        | 7.88 | 30    |
| TX 802.11g Mode     |           |                    |                    |              |      |       |
| CH01                | 2412      | 7.54               | 0.0057             | -1.93        | 5.61 | 30    |
| CH06                | 2437      | 8.58               | 0.0072             | -1.93        | 6.65 | 30    |
| CH11                | 2462      | 9.13               | 0.0082             | -1.93        | 7.20 | 30    |
| TX 802.11n/20M Mode |           |                    |                    |              |      |       |
| CH01                | 2412      | 7.60               | 0.0057             | -1.93        | 5.67 | 30    |
| CH06                | 2437      | 8.34               | 0.0068             | -1.93        | 6.41 | 30    |
| CH11                | 2462      | 8.89               | 0.0077             | -1.93        | 6.96 | 30    |
| TX 802.11n/40M Mode |           |                    |                    |              |      |       |
| CH03                | 2422      | 7.62               | 0.0058             | -1.93        | 5.69 | 30    |
| CH06                | 2437      | 8.34               | 0.0068             | -1.93        | 6.41 | 30    |
| CH11                | 2452      | 8.43               | 0.0067             | -1.93        | 6.50 | 30    |

**Note:**

1. The test results is to use the lowest bit rate, is the worst.

## **7. ANTENNA REQUIREMENT**

### **7.1 STANDARD REQUIREMENT**



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **7.2 EUT ANTENNA**

The EUT antenna is Internal antenna. It comply with the standard requirement.

## 8. EUT TEST PHOTO

### Radiated Measurement Photos

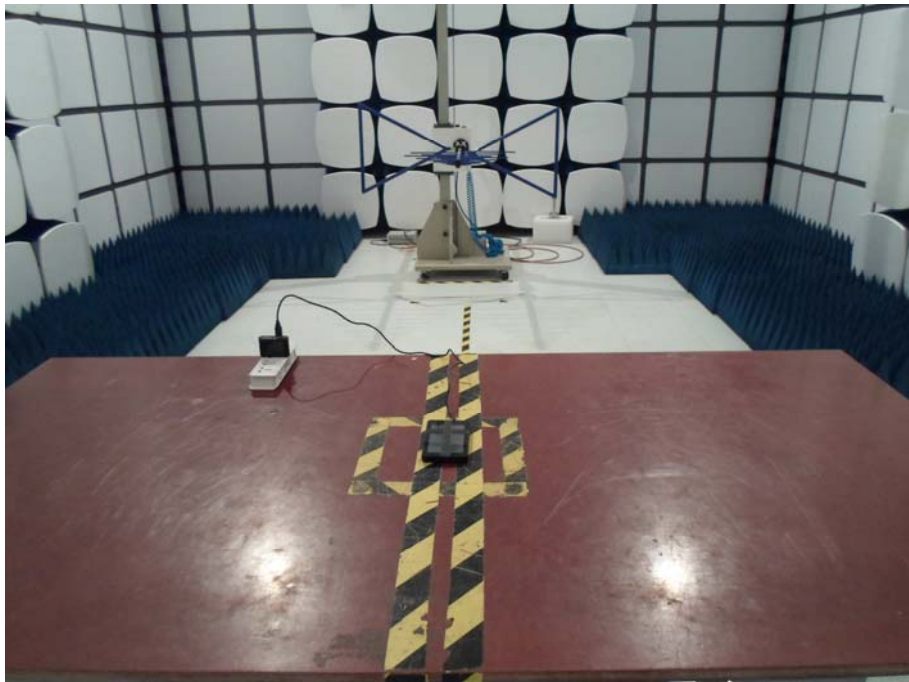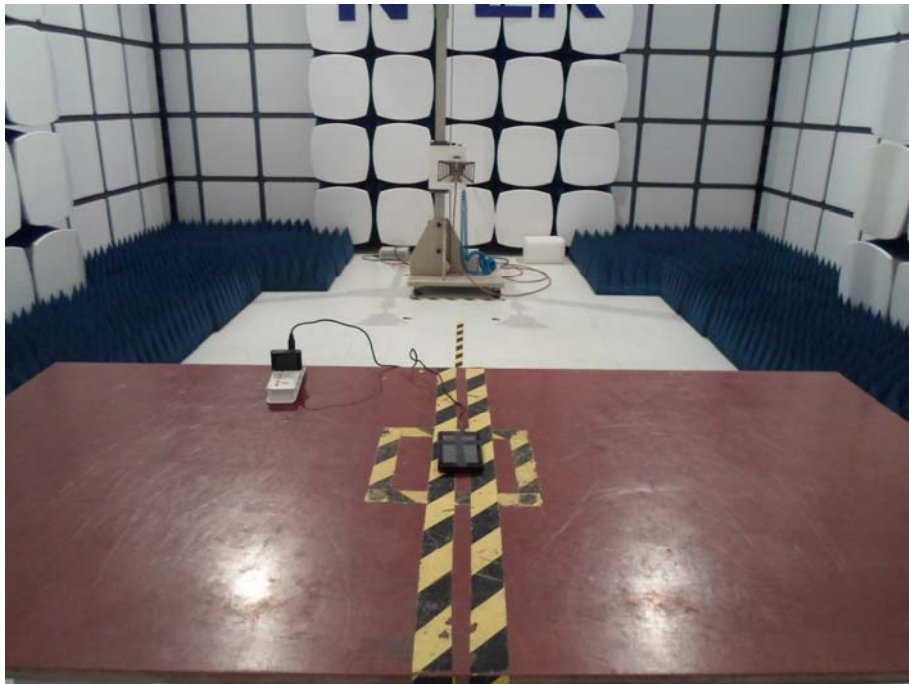

### Conducted Measurement Photos

