

**Application for FCC Certification
On behalf of**

Rullingnet Corporation Limited

Product Name: VINCI Learning Tablet

Model No.: ViNCi Tab

Serial No.: E1206715-02/01

FCC ID: ODD-VTB321A

**Prepared For : Rullingnet Corporation Limited
Unit 1210, Level 12, Core F, Cyberport 3, 100 Cyberport
Road, Hongkong**

**Prepared By :Audix Technology (Shanghai) Co., Ltd.
3F 34Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China**

**Tel: +86-21-64955500
Fax: +86-21-64955491**

**Report No. : ACI-F12120
Date of Test : Jun. 13 – 25, 2012
Date of Report : Jun. 29, 2012**

TABLE OF CONTENTS

| | Page |
|--|-----------|
| 1 SUMMARY OF STANDARDS AND RESULTS..... | 5 |
| 1.1 Description of Standards and Results..... | 5 |
| 2 GENERAL INFORMATION..... | 6 |
| 2.1 Description of Equipment Under Test..... | 6 |
| 2.2 Description of Test Facility..... | 7 |
| 2.3 Measurement Uncertainty | 7 |
| 3 RADIATED EMISSION TEST..... | 8 |
| 3.1 Test Equipment..... | 8 |
| 3.2 Block Diagram of Test Setup | 8 |
| 3.3 Radiated Emission Limit [FCC Part 15 Subpart C 15.209] | 9 |
| 3.4 Test Configuration..... | 9 |
| 3.5 Operating Condition of EUT | 9 |
| 3.6 Test Procedures | 10 |
| 3.7 Test Results | 11 |
| 4 6 dB BANDWIDTH MEASUREMENT..... | 21 |
| 4.1 Test Equipment..... | 21 |
| 4.2 Block Diagram of Test Setup | 21 |
| 4.3 Specification Limits (§15.247(a)(2))..... | 21 |
| 4.4 Operating Condition of EUT | 21 |
| 4.5 Test Procedure | 21 |
| 4.6 Test Results | 21 |
| 5 MAXIMUM PEAK OUTPUT POWER MEASUREMENT..... | 24 |
| 5.1 Test Equipment..... | 24 |
| 5.2 Block Diagram of Test Setup | 24 |
| 5.3 Specification Limits ((§15.247(b)(3)) | 24 |
| 5.4 Operating Condition of EUT | 24 |
| 5.5 Test Procedure | 24 |
| 5.6 Test Results | 24 |
| 6 EMISSION LIMITATIONS MEASUREMENT..... | 25 |
| 6.1 Test Equipment..... | 25 |
| 6.2 Block Diagram of Test Setup | 25 |
| 6.3 Specification Limits (§15.247(d)) | 25 |
| 6.4 Operating Condition of EUT | 25 |
| 6.5 Test Procedure | 25 |
| 6.6 Test Results | 25 |
| 7 BAND EDGES MEASUREMENT | 35 |
| 7.1 Test Equipment..... | 35 |
| 7.2 Block Diagram of Test Setup | 35 |
| 7.3 Specification Limits (§15.247(d)) | 35 |
| 7.4 Operating Condition of EUT | 35 |
| 7.5 Test Procedure | 35 |
| 7.6 Test Results | 35 |
| 8 POWER SPECTRAL DENSITY MEASUREMENT..... | 37 |
| 8.1 Test Equipment..... | 37 |

| | | |
|----------|---|-----------|
| 8.2 | Block Diagram of Test Setup | 37 |
| 8.3 | Specification Limits (§15.247(e)) | 37 |
| 8.4 | Operating Condition of EUT | 37 |
| 8.5 | Test Procedure | 37 |
| 8.6 | Test Results | 37 |
| 9 | DEVIATION TO TEST SPECIFICATIONS | 40 |

TEST REPORT FOR FCC CERTIFICATE

Applicant : Rullingnet Corporation Limited
Manufacturer : Dowslake Microsystems Corporation
EUT Description : VINCI Learning Tablet
(A) Model No. : ViNCi Tab
(B) Serial No. : E1206715-02/01
(C) Test Voltage : AC 120V/60Hz for Notebook PC,
USB power for the EUT

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART C OCTOBER 2011
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report also shows that the EUT (M/N: see Sec. 2.1, S/N: see Sec. 2.1), which was tested on Jun. 13 – 25, 2012 is technically compliance with the FCC limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jun. 13 – 25, 2012 Date of Report : Jun. 29, 2012

Producer : Kathy Wang
KATHY WANG / Assistant

Review : Dio Yang
DIO YANG / Assistant Manager

AUDIX® For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : Sammy Chen
Authorized Signature EMC SAMMY CHEN / Deputy Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

| Description / Test Item | Test Standard | Results | Meets Limit |
|---|--|---------|---------------------------|
| EMISSION | | | |
| Conducted Emission | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | N/A | N/A |
| Radiated Emission | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.209(a) 15.205(a)(c) |
| 6 dB Bandwidth Measurement | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.247(a)(2) |
| Maximum Peak Output Power Measurement | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.247(b)(3) |
| Emission Limitations Measurement | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.247(d) |
| Band Edge Measurement | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.247(d) |
| Power Spectral Density Measurement | FCC RULES AND REGULATIONS PART 15 SUBPART C October 2011 AND ANSI C63.4:2003 AND KDB558074 v01:2012 | Pass | 15.247(e) |
| Note - The Conducted Emission test result refer to No. ACI-F12111, a FCC PART 15B Certificate report. | | | |

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : VINCI Learning Tablet

Type of EUT : Production Pre-product Pro-type

Model Number : ViNCi Tab

Serial Number : E1206715-02/01

Radio Tech : IEEE 802.11g

Freq. Band : 2412 MHz - 2462 MHz
Total 11 Channels in 5 MHz Separation

Tested Freq. : 2412 MHz (Channel 01)
2437 MHz (Channel 06)
2462 MHz (Channel 11)

Modulation : OFDM for 802.11g

Transmit data rate : 6, 9, 12, 18, 24, 36, 48, 54 Mbps
After testing, the highest peak output power of the EUT was at 54 Mbps.
So 54 Mbps was representative selected to test in this report.

Antenna Gain : 1.5 dBi

Applicant : Rullingnet Corporation Limited
Unit 1210, Level 12, Core F, Cyberport 3, 100
Cyberport Road, Hongkong

Manufacturer : Dowslake Microsystems Corporation
5th Floor, No.45 Building, 555 Guiping Road, Shanghai
Caohejing Hi-Tech Park

2.2 Description of Test Facility

Site Description : Sept. 17, 1998 file on
(Semi-Anechoic Chamber) Apr 29, 2009 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3 F 34 Bldg 680 Guiping Rd.,
Caohejing Hi-Tech Park,
Shanghai 200233, China

FCC registration Number : 91789

Accredited by NVLAP, Lab Code : 200371-0

2.3 Measurement Uncertainty

Radiated Emission Expanded Uncertainty (30-200MHz):

U = 4.58dB (Horizontal)
U = 4.70dB (Vertical)

Radiated Emission Expanded Uncertainty (200M-1GHz):

U = 4.84dB (Horizontal)
U = 4.70dB (Vertical)

Radiated Emission Expanded Uncertainty (Above 1GHz):

U= 4.60 dB (Horizontal)
U= 4.18 dB (Vertical)

6 dB Bandwidth Expanded Uncertainty : U = 0.05 kHz

Maximum Peak Output Power Expanded Uncertainty: U = 0.30 dB

Emission Limitations Expanded Uncertainty : U = 0.15 dB

Band Edge Expanded Uncertainty : U = 0.15 dB

Power Spectral Density Expanded Uncertainty : U = 0.15 dB


3 RADIATED EMISSION TEST

3.1 Test Equipment

The following test equipment are used during the radiated emission test in a semi-anechoic chamber:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|--------------------|--------------|-----------|------------------------|--------------|--------------|
| 1. | Preamplifier | Agilent | 8447D | 2944A10548 | Mar 18, 2012 | Sep 18, 2012 |
| 2. | Preamplifier | HP | 8449B | 3008A00864 | Mar 22, 2012 | Mar 22, 2013 |
| 3. | Spectrum Analyzer | Agilent | E7405A | MY45106600 | Mar 22, 2012 | Mar 22, 2013 |
| 4. | Test Receiver | R&S | ESVS10 | 844594/001 | Mar 22, 2012 | Mar 22, 2013 |
| 5. | Bi-log Antenna | TESEQ | CBL6112D | 23192 | Dec 01, 2011 | Dec 01, 2012 |
| 6. | Horn Antenna | EMCO | 3115 | 9607-4878 | May 06, 2012 | May 06, 2013 |
| 7. | Horn Antenna | EMCO | 3116 | 00062643 | Jul 21, 2011 | Jul 21, 2012 |
| 8. | 50Ω Coaxial Switch | Anritsu | MP59B | 6200426390 | Mar 18, 2012 | Sep 18, 2012 |
| 9. | Software | Audix | E3 | SET00200 9912M295-2 | - | - |

3.2 Block Diagram of Test Setup

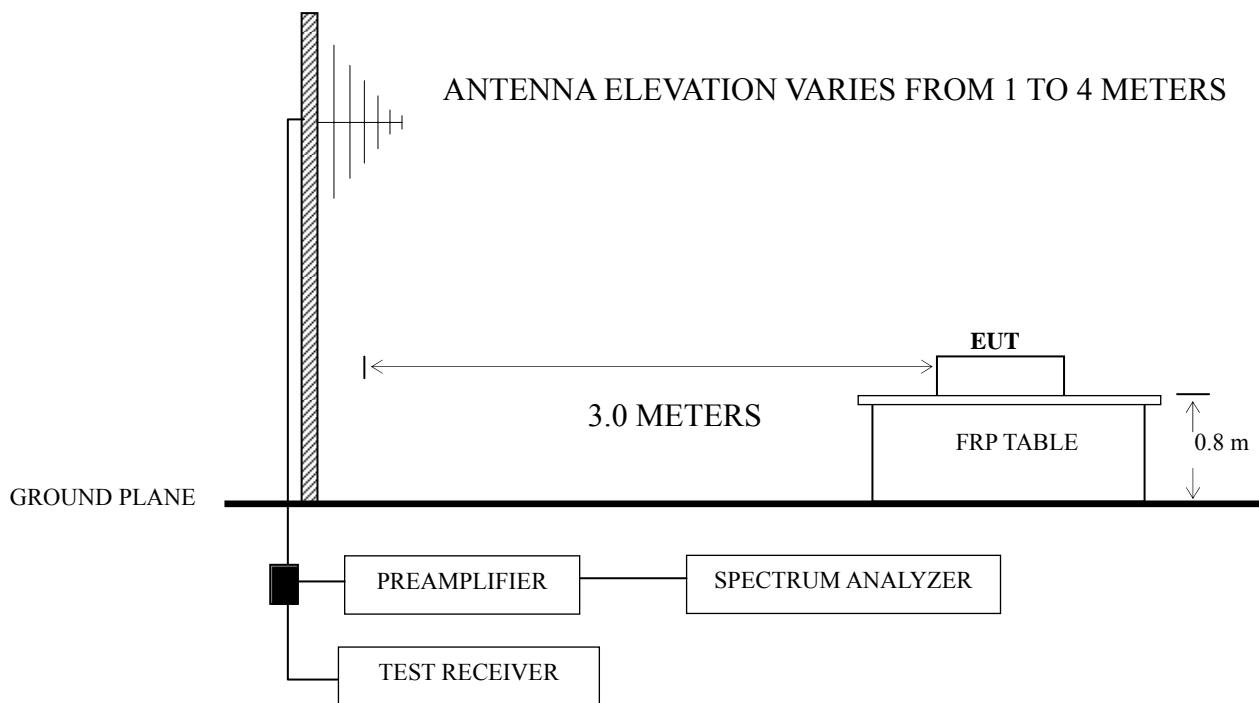

3.3 Radiated Emission Limit [FCC Part 15 Subpart C 15.209]

| Frequency (MHz) | Distance (m) | Field strength limits (μ V/m) | |
|--------------------|-----------------|------------------------------------|----------------|
| | | (μ V/m) | dB(μ V/m) |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| Above 960 | 3 | 500 | 54.0 |

NOTE 1 - Emission Level dB (μ V/m) = 20 log Emission Level (μ V/m)
 NOTE 2 - The tighter limit applies at the band edges.
 NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
 NOTE 4 - The limits shown are based on Quasi-peak value detector below or equal to 1GHz and Average value detector above 1GHz.
 NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the simulators (listed in Sec.2.2) were installed as shown on Sec.3.2 to meet FCC requirements and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Turn the EUT on the test mode, and then test.

3.6 Test Procedures

Radiated emission test applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp is necessary for this measurement. For measurement above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.

The EUT was placed on a turntable that is 0.8 meter above ground. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (Calibrated Bilog Antenna) or Horn antenna was used as receiving antenna. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz from 30MHz to 1000MHz.

The bandwidth of the VBW was set at 1MHz and RBW was set at 1MHz for peak emission measurement above 1GHz for Spectrum Agilent E7405A.

The frequency range from 30 MHz to 25 GHz (Up to 10th harmonics from fundamental frequency) was checked.

The EUT was tested under the following test modes:

| Mode | Operation | Channel | Frequency |
|------|---------------------------|---------|-----------|
| 1. | Transmitting | 01 | 2412 MHz |
| 2. | | 06 | 2437 MHz |
| 3. | | 11 | 2462 MHz |
| 4. | Receiving | 06 | 2437 MHz |
| 5. | Transmitting Band-Edge | 01 | 2412 MHz |
| 6. | | 06 | 2462 MHz |

All the test results are listed in Sec.3.7.

3.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

| No. | Operation | Channel | Frequency | Data Page | |
|-----|--------------|---------|-----------|-----------|---------|
| 1. | Transmitting | 01 | 2412 MHz | P12 | |
| 2. | | 06 | 2437 MHz | P13 | |
| 3. | | 11 | 2462 MHz | P14 | |
| 4. | Receiving | 06 | 2437 MHz | P15 | |
| 5. | Transmitting | 01 | 2412 MHz | Band | P17-P18 |
| 6. | | 11 | 2462 MHz | Edge | P19-P20 |

NOTE 1 – Level = Read Level + Antenna Factor + Cable Loss (<1GHz)

NOTE 2 – Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor (>1GHz)

NOTE 3 – All reading are Quasi-Peak values below or equal to 1GHz, Peak or Average values above 1GHz.

For above 1GHz test, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

NOTE 4 – For Receiving Mode, we selected Receiving Ch06 mode to perform the test.

NOTE 5 – The emission levels recorded below is data of EUT configured in Lying direction, for Lying direction was the maximum emission direction during the test. The data of Side & Stand direction are too low against the official limit to be reported.

EUT : VINCI Learning Tablet Temperature : 25°C
 Model No. : ViNCi Tab Humidity : 45%RH
 Serial No. : E1206715-02/01 Date of Test : Jun 25, 2012
 Test Mode : Transmitting Ch01

| Polarization | Frequency (MHz) | Meter Reading dB (μ V) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Emission Level dB (μ V/m) | Limits dB (μ V/m) | Margin (dB) | Remark |
|--------------|-----------------|-----------------------------|-----------------------|-----------------|--------------------|--------------------------------|------------------------|-------------|--------|
| Horizontal | 67.83 | 22.37 | 9.70 | 1.36 | -- | 33.43 | 40.00 | 6.57 | QP |
| | 179.38 | 16.50 | 10.00 | 2.35 | -- | 28.85 | 43.50 | 14.65 | |
| | 245.34 | 18.29 | 11.75 | 2.60 | -- | 32.64 | 46.00 | 13.36 | |
| | 337.49 | 13.51 | 14.74 | 2.85 | -- | 31.10 | 46.00 | 14.90 | |
| | 434.49 | 9.55 | 16.74 | 3.08 | -- | 29.37 | 46.00 | 16.63 | |
| | 868.08 | 7.46 | 20.39 | 4.60 | -- | 32.45 | 46.00 | 13.55 | |
| | 1720.00 | 44.00 | 27.19 | 6.10 | 36.55 | 40.74 | 74.00 | 33.26 | |
| | 2836.00 | 43.44 | 31.26 | 6.60 | 35.95 | 45.35 | 74.00 | 28.65 | |
| | 4429.00 | 40.33 | 33.74 | 8.73 | 35.50 | 47.30 | 74.00 | 26.70 | |
| Vertical | 5266.00 | 40.41 | 36.59 | 9.40 | 35.06 | 51.34 | 74.00 | 22.66 | PK |
| | 69.77 | 15.63 | 9.85 | 1.41 | -- | 26.89 | 40.00 | 13.11 | |
| | 158.04 | 13.35 | 10.28 | 2.27 | -- | 25.90 | 43.50 | 17.60 | |
| | 256.98 | 14.73 | 12.27 | 2.63 | -- | 29.63 | 46.00 | 16.37 | |
| | 329.73 | 11.85 | 14.54 | 2.83 | -- | 29.22 | 46.00 | 16.78 | |
| | 526.64 | 15.14 | 17.76 | 3.33 | -- | 36.23 | 46.00 | 9.77 | |
| | 715.79 | 6.79 | 19.66 | 3.73 | -- | 30.18 | 46.00 | 15.82 | |
| | 1468.00 | 48.39 | 26.92 | 5.72 | 37.04 | 43.99 | 74.00 | 30.01 | |
| | 2638.00 | 45.16 | 30.27 | 6.81 | 36.02 | 46.22 | 74.00 | 27.78 | |
| | 4258.00 | 41.13 | 33.56 | 8.56 | 35.58 | 47.67 | 74.00 | 26.33 | |
| | 5392.00 | 41.31 | 36.54 | 9.50 | 35.01 | 52.34 | 74.00 | 21.66 | |

TEST ENGINEER: RAVEN JIN

EUT : VINCI Learning Tablet Temperature : 25°C
 Model No. : ViNCi Tab Humidity : 45%RH
 Serial No. : E1206715-02/01 Date of Test : Jun 25, 2012
 Test Mode : Transmitting Ch06

| Polarization | Frequency (MHz) | Meter Reading dB (μ V) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Emission Level dB (μ V/m) | Limits dB (μ V/m) | Margin (dB) | Remark |
|--------------|-----------------|-----------------------------|-----------------------|-----------------|--------------------|--------------------------------|------------------------|-------------|--------|
| Horizontal | 72.68 | 20.72 | 10.08 | 1.47 | -- | 32.27 | 40.00 | 7.73 | QP |
| | 176.47 | 15.61 | 10.03 | 2.34 | -- | 27.98 | 43.50 | 15.52 | |
| | 238.55 | 17.50 | 11.46 | 2.57 | -- | 31.53 | 46.00 | 14.47 | |
| | 327.79 | 11.77 | 14.46 | 2.83 | -- | 29.06 | 46.00 | 16.94 | |
| | 421.88 | 10.37 | 16.57 | 3.04 | -- | 29.98 | 46.00 | 16.02 | |
| | 989.33 | 6.20 | 20.74 | 5.18 | -- | 32.12 | 54.00 | 21.88 | |
| | 1468.00 | 45.93 | 26.92 | 5.72 | 37.04 | 41.53 | 74.00 | 32.47 | |
| | 2251.00 | 44.67 | 28.60 | 6.75 | 36.13 | 43.89 | 74.00 | 30.11 | |
| | 3826.00 | 41.80 | 32.91 | 7.75 | 35.72 | 46.74 | 74.00 | 27.26 | |
| Vertical | 5212.00 | 40.16 | 36.62 | 9.40 | 35.09 | 51.09 | 74.00 | 22.91 | PK |
| | 153.19 | 12.82 | 10.36 | 2.24 | -- | 25.42 | 43.50 | 18.08 | |
| | 250.19 | 14.29 | 11.99 | 2.61 | -- | 28.89 | 46.00 | 17.11 | |
| | 358.83 | 19.82 | 15.37 | 2.90 | -- | 38.09 | 46.00 | 7.91 | |
| | 439.34 | 9.08 | 16.82 | 3.09 | -- | 28.99 | 46.00 | 17.01 | |
| | 669.23 | 5.19 | 19.12 | 3.62 | -- | 27.93 | 46.00 | 18.07 | |
| | 851.59 | 7.72 | 20.44 | 4.45 | -- | 32.61 | 46.00 | 13.39 | |
| | 1396.00 | 48.36 | 26.69 | 5.59 | 37.25 | 43.39 | 74.00 | 30.61 | |
| | 1864.00 | 45.45 | 27.31 | 6.29 | 36.35 | 42.70 | 74.00 | 31.30 | |
| Vertical | 2917.00 | 44.20 | 31.57 | 6.53 | 35.92 | 46.38 | 74.00 | 27.62 | PK |
| | 4807.00 | 40.71 | 35.66 | 9.09 | 35.30 | 50.16 | 74.00 | 23.84 | |

TEST ENGINEER: RAVEN JIN

EUT : VINCI Learning Tablet Temperature : 25°C
 Model No. : ViNCi Tab Humidity : 45%RH
 Serial No. : E1206715-02/01 Date of Test : Jun 25, 2012
 Test Mode : Transmitting Ch11

| Polarization | Frequency (MHz) | Meter Reading dB (μ V) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Emission Level dB (μ V/m) | Limits dB (μ V/m) | Margin (dB) | Remark |
|--------------|-----------------|-----------------------------|-----------------------|-----------------|--------------------|--------------------------------|------------------------|-------------|--------|
| Horizontal | 75.59 | 18.84 | 10.27 | 1.53 | -- | 30.64 | 40.00 | 9.36 | QP |
| | 167.74 | 13.89 | 10.14 | 2.31 | -- | 26.34 | 43.50 | 17.16 | |
| | 358.83 | 15.43 | 15.37 | 2.90 | -- | 33.70 | 46.00 | 12.30 | |
| | 410.24 | 8.58 | 16.43 | 3.01 | -- | 28.02 | 46.00 | 17.98 | |
| | 579.99 | 4.83 | 18.09 | 3.42 | -- | 26.34 | 46.00 | 19.66 | |
| | 765.26 | 1.92 | 20.23 | 3.82 | -- | 25.97 | 46.00 | 20.03 | |
| | 1531.00 | 44.68 | 27.02 | 5.83 | 36.89 | 40.64 | 74.00 | 33.36 | |
| | 2845.00 | 43.99 | 31.29 | 6.60 | 35.94 | 45.94 | 74.00 | 28.06 | |
| | 4906.00 | 41.44 | 36.19 | 9.14 | 35.25 | 51.52 | 74.00 | 22.48 | |
| Vertical | 6058.00 | 40.66 | 36.48 | 9.07 | 34.80 | 51.41 | 74.00 | 22.59 | PK |
| | 179.38 | 15.34 | 10.00 | 2.35 | -- | 27.69 | 43.50 | 15.81 | |
| | 267.65 | 13.32 | 12.70 | 2.66 | -- | 28.68 | 46.00 | 17.32 | |
| | 293.84 | 17.68 | 13.53 | 2.74 | -- | 33.95 | 46.00 | 12.05 | |
| | 434.49 | 8.61 | 16.74 | 3.08 | -- | 28.43 | 46.00 | 17.57 | |
| | 759.44 | 4.79 | 20.16 | 3.82 | -- | 28.77 | 46.00 | 17.23 | |
| | 938.89 | 5.00 | 20.51 | 5.07 | -- | 30.58 | 46.00 | 15.42 | |
| | 1396.00 | 47.91 | 26.69 | 5.59 | 37.25 | 42.94 | 74.00 | 31.06 | |
| | 2827.00 | 43.41 | 31.22 | 6.64 | 35.95 | 45.32 | 74.00 | 28.68 | |
| Vertical | 4114.00 | 41.42 | 33.41 | 8.30 | 35.65 | 47.48 | 74.00 | 26.52 | PK |
| | 5941.00 | 41.11 | 36.41 | 9.01 | 34.82 | 51.71 | 74.00 | 22.29 | |

TEST ENGINEER: RAVEN JIN

EUT : VINCI Learning Tablet Temperature : 25°C
 Model No. : ViNCi Tab Humidity : 45%RH
 Serial No. : E1206715-02/01 Date of Test : Jun 25, 2012
 Test Mode : Receiving Ch06

| Polarization | Frequency (MHz) | Meter Reading dB (μ V) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Emission Level dB (μ V/m) | Limits dB (μ V/m) | Margin (dB) | Remark |
|--------------|-----------------|-----------------------------|-----------------------|-----------------|--------------------|--------------------------------|------------------------|-------------|--------|
| Horizontal | 32.91 | -1.23 | 16.79 | 0.82 | -- | 16.38 | 40.00 | 23.62 | QP |
| | 86.26 | -4.51 | 10.83 | 1.68 | -- | 8.00 | 40.00 | 32.00 | |
| | 158.04 | -1.81 | 10.28 | 2.27 | -- | 10.74 | 43.50 | 32.76 | |
| | 327.79 | -0.40 | 14.46 | 2.83 | -- | 16.89 | 46.00 | 29.11 | |
| | 545.07 | 0.21 | 17.87 | 3.36 | -- | 21.44 | 46.00 | 24.56 | |
| | 822.49 | -0.03 | 20.54 | 4.11 | -- | 24.62 | 46.00 | 21.38 | |
| | 1261.00 | 46.24 | 26.14 | 5.45 | 37.62 | 40.21 | 74.00 | 33.79 | PK |
| | 2530.00 | 44.30 | 29.73 | 6.95 | 36.05 | 44.93 | 74.00 | 29.07 | |
| | 4393.00 | 40.53 | 33.71 | 8.73 | 35.52 | 47.45 | 74.00 | 26.55 | |
| | 5950.00 | 40.63 | 36.41 | 9.01 | 34.82 | 51.23 | 74.00 | 22.77 | |
| Vertical | 32.91 | -2.28 | 16.79 | 0.82 | -- | 15.33 | 40.00 | 24.67 | QP |
| | 104.69 | -1.90 | 11.27 | 1.89 | -- | 11.26 | 43.50 | 32.24 | |
| | 248.25 | -1.01 | 11.90 | 2.61 | -- | 13.50 | 46.00 | 32.50 | |
| | 390.84 | -0.53 | 16.10 | 2.97 | -- | 18.54 | 46.00 | 27.46 | |
| | 567.38 | 0.50 | 18.02 | 3.40 | -- | 21.92 | 46.00 | 24.08 | |
| | 794.36 | -0.92 | 20.54 | 3.88 | -- | 23.50 | 46.00 | 22.50 | PK |
| | 1522.00 | 44.26 | 27.02 | 5.83 | 36.92 | 40.19 | 74.00 | 33.81 | |
| | 2764.00 | 43.82 | 30.91 | 6.68 | 35.97 | 45.44 | 74.00 | 28.56 | |
| | 4492.00 | 40.92 | 33.80 | 8.81 | 35.47 | 48.06 | 74.00 | 25.94 | |
| | 5680.00 | 40.77 | 36.46 | 9.28 | 34.90 | 51.61 | 74.00 | 22.39 | |

TEST ENGINEER: RAVEN JIN

Band edge using conducted measurement:

According to the KDB 558074 D01 DTS Meas Guidance v01 5.4.2.1, antenna-port conducted measurements is also be permitted as an alternative to radiated measurements in the restricted frequency bands.

The transmitter output was connected to the spectrum analyzer. The EUT was set to transmit continuously ($\geq 98\%$ duty cycle).

The test procedure is defined in KDB558074 v01:2012 (the 5.4.2.2.1 Measurement Procedure RBAVG1 (Power Averaging) was used for average measurement & the 5.4.2.2.3 was used for peak measurement).


Note1 – The additional radiated test was performed to prove that the cabinet emissions (transmit antenna be replaced with a termination) also meets the requirement.

Cabinet Emission:

| Polarization | Frequency (MHz) | Meter Reading dB (μ V) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Emission Level dB (μ V/m) | Limits dB (μ V/m) | Margin (dB) | Remark |
|--------------|-----------------|-----------------------------|-----------------------|-----------------|--------------------|--------------------------------|------------------------|-------------|--------|
| Horizontal | 2390.00 | 49.47 | 29.19 | 6.89 | 36.09 | 49.46 | 74.00 | 24.54 | PK |
| | 2483.50 | 48.37 | 29.55 | 6.96 | 36.07 | 48.81 | 74.00 | 25.19 | |
| | 2390.00 | 38.55 | 29.19 | 6.89 | 36.09 | 38.54 | 54.00 | 15.46 | AV |
| | 2483.50 | 37.80 | 29.55 | 6.96 | 36.07 | 38.24 | 54.00 | 15.76 | |
| Vertical | 2390.00 | 46.34 | 29.19 | 6.89 | 36.09 | 46.33 | 74.00 | 27.67 | PK |
| | 2483.50 | 45.25 | 29.55 | 6.96 | 36.07 | 45.69 | 74.00 | 28.31 | |
| | 2390.00 | 35.87 | 29.19 | 6.89 | 36.09 | 35.86 | 54.00 | 18.14 | AV |
| | 2483.50 | 34.48 | 29.55 | 6.96 | 36.07 | 35.92 | 54.00 | 18.08 | |

Note2 - The antenna gain (2dBi) and cable loss (1dB) were set as offset (3dB) in the spectrum. The antenna gain use 2dBi instead of the actual antenna gain 1.5dBi is according to the KDB558074 v01:2012 5.4.2.1


AV Result on CH 01

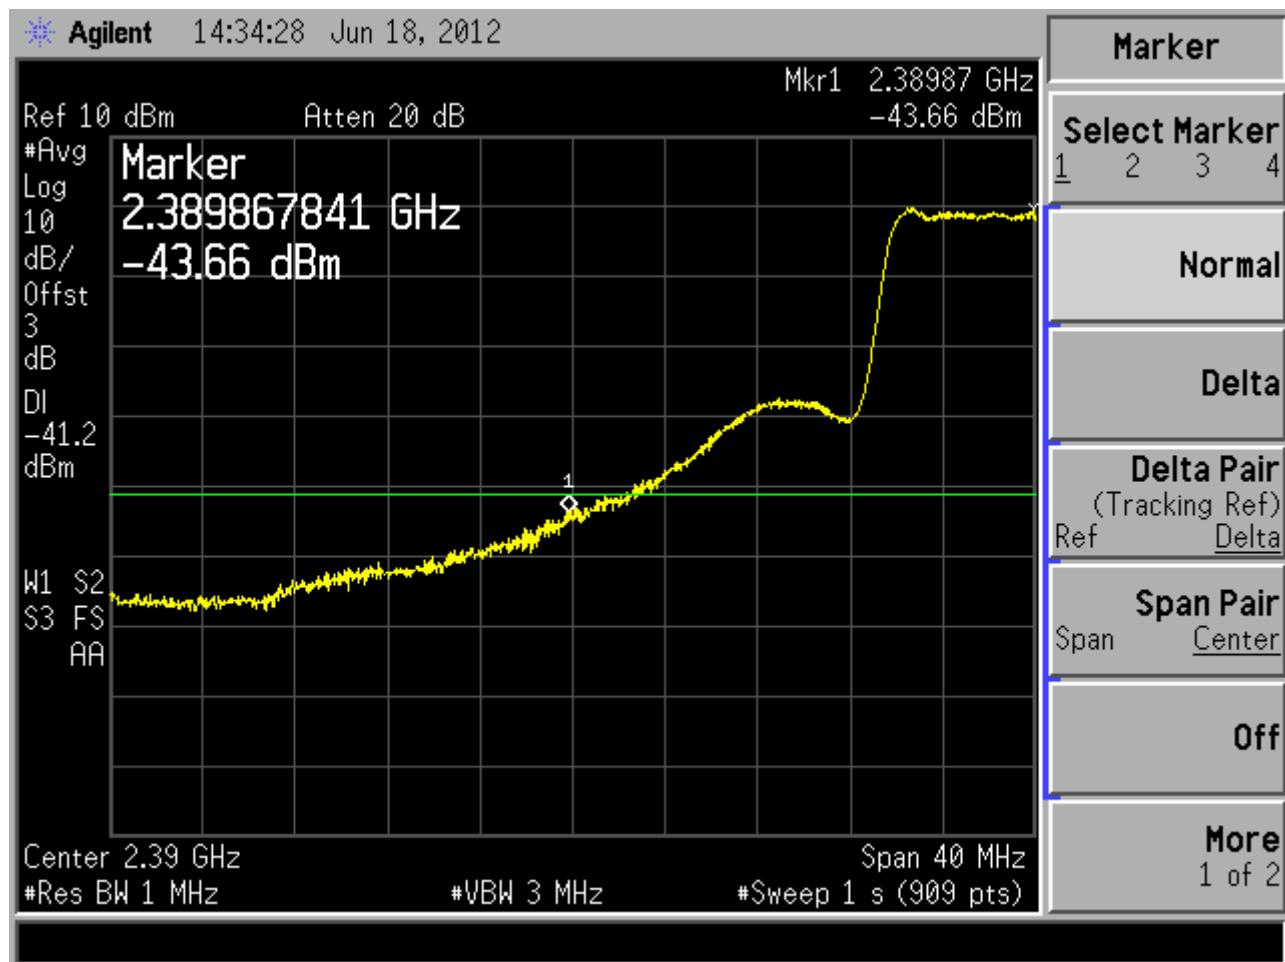

Maximum AV value @ 2389.87MHz = -43.66 dBm
Limit = -41.2 dBm

Result is **PASS**

PK Result on CH 01

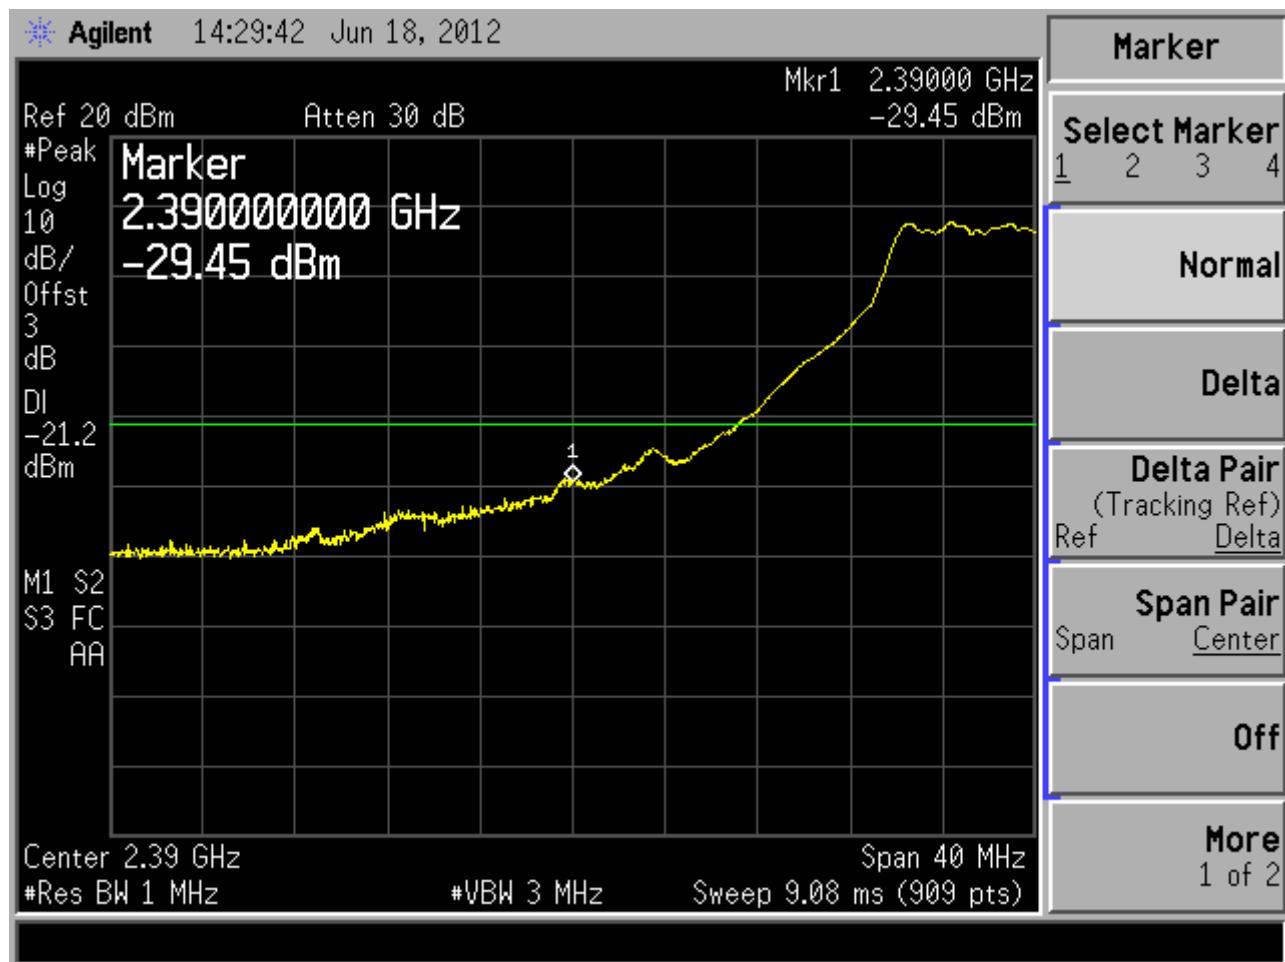


PK Result = -29.45 dBm

Limit = -21.2 dBm

Result is **PASS**


AV Result on CH 11

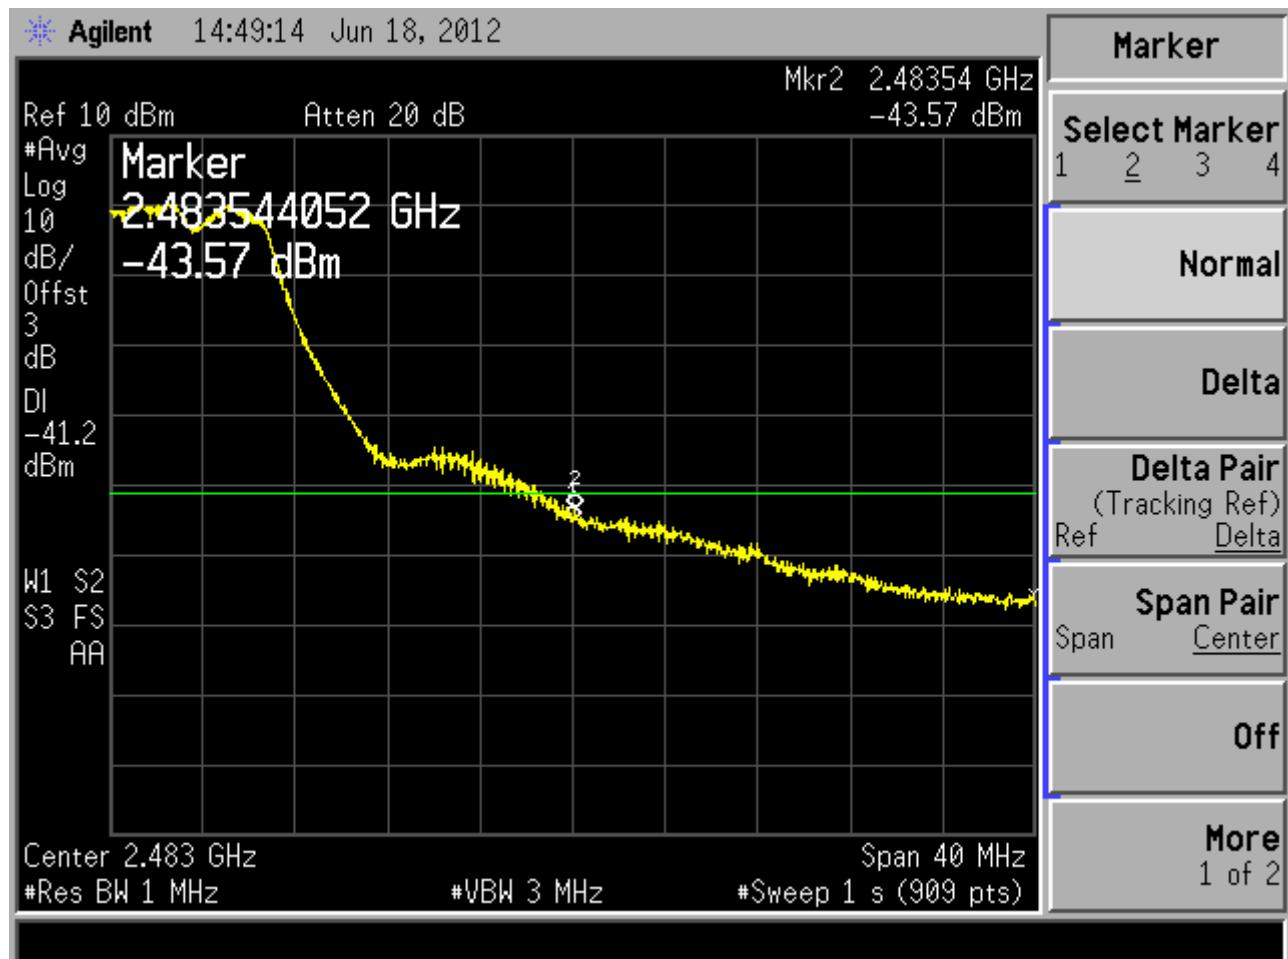

Maximum AV value @ 2483.54MHz = -43.57 dBm
Limit = -41.2 dBm

Result is **PASS**

PK Result on CH 11

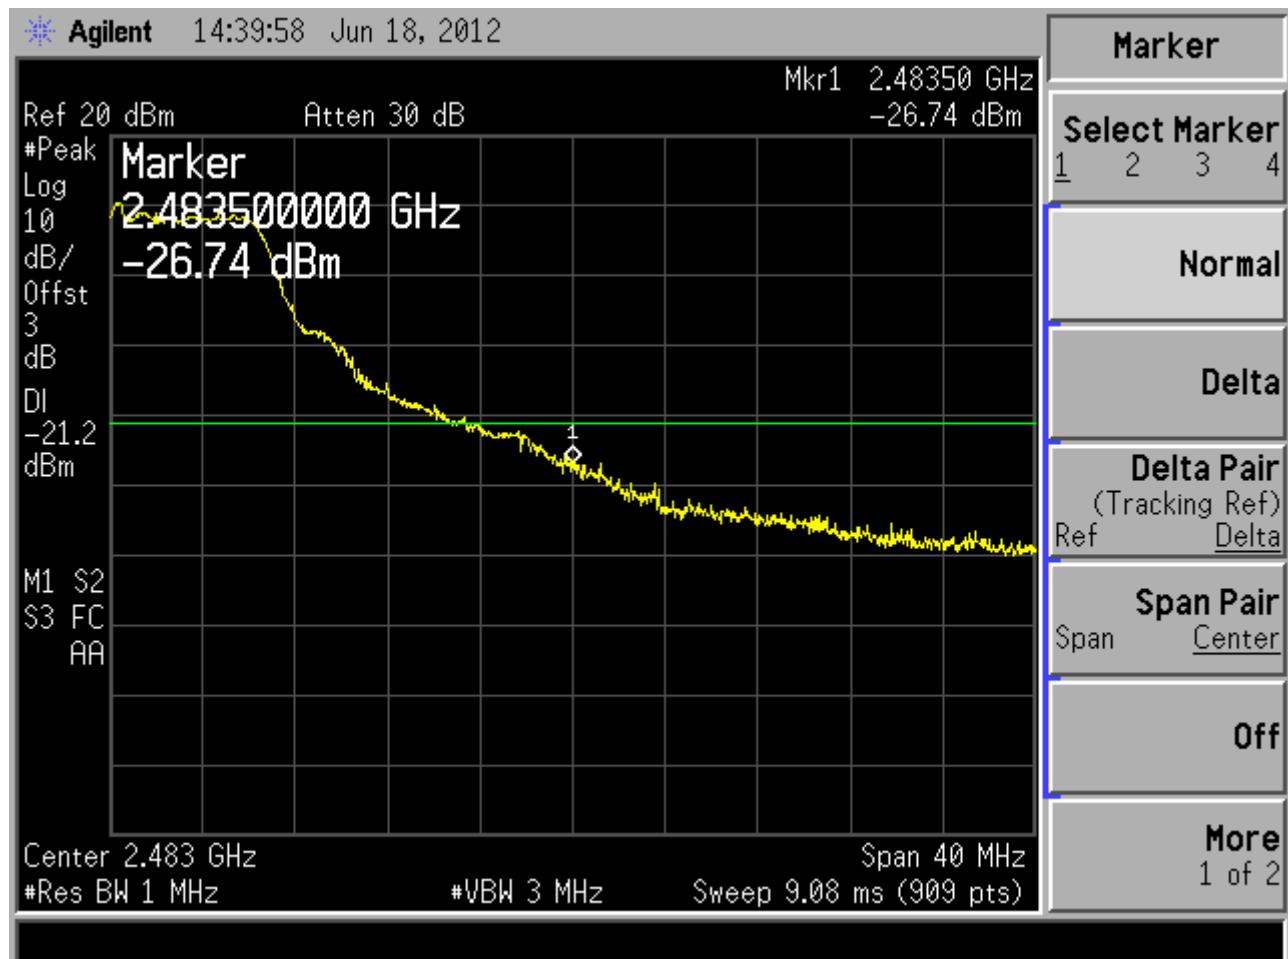

PK Result = -26.74 dBm

Limit = -21.2 dBm

Result is **PASS**


4 6 dB BANDWIDTH MEASUREMENT

4.1 Test Equipment

The following test equipment was used during the Emission Bandwidth measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-----------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | E7405A | MY45106600 | Mar 22, 2012 | Mar 22, 2013 |

4.2 Block Diagram of Test Setup



4.3 Specification Limits (§15.247(a)(2))

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.4 Operating Condition of EUT

The test program “Windows Command” was used to enable the EUT to transmit data at different channel frequency individually.

4.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measure by spectrum analyzer with 100 kHz RBW / 100 kHz VBW.

The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.6 Test Results


PASSED.

All the test results are attached in next pages.


(Test Date: Jun. 13, 2012 Temperature: 25°C Humidity: 48 %)

| Channel | Frequency | 6dB Bandwidth |
|---------|-----------|-------------------|
| 01 | 2412 MHz | 16.388 MHz |
| 06 | 2437 MHz | 16.388 MHz |
| 11 | 2462 MHz | 16.388 MHz |


Ch 01 (2412 MHz)

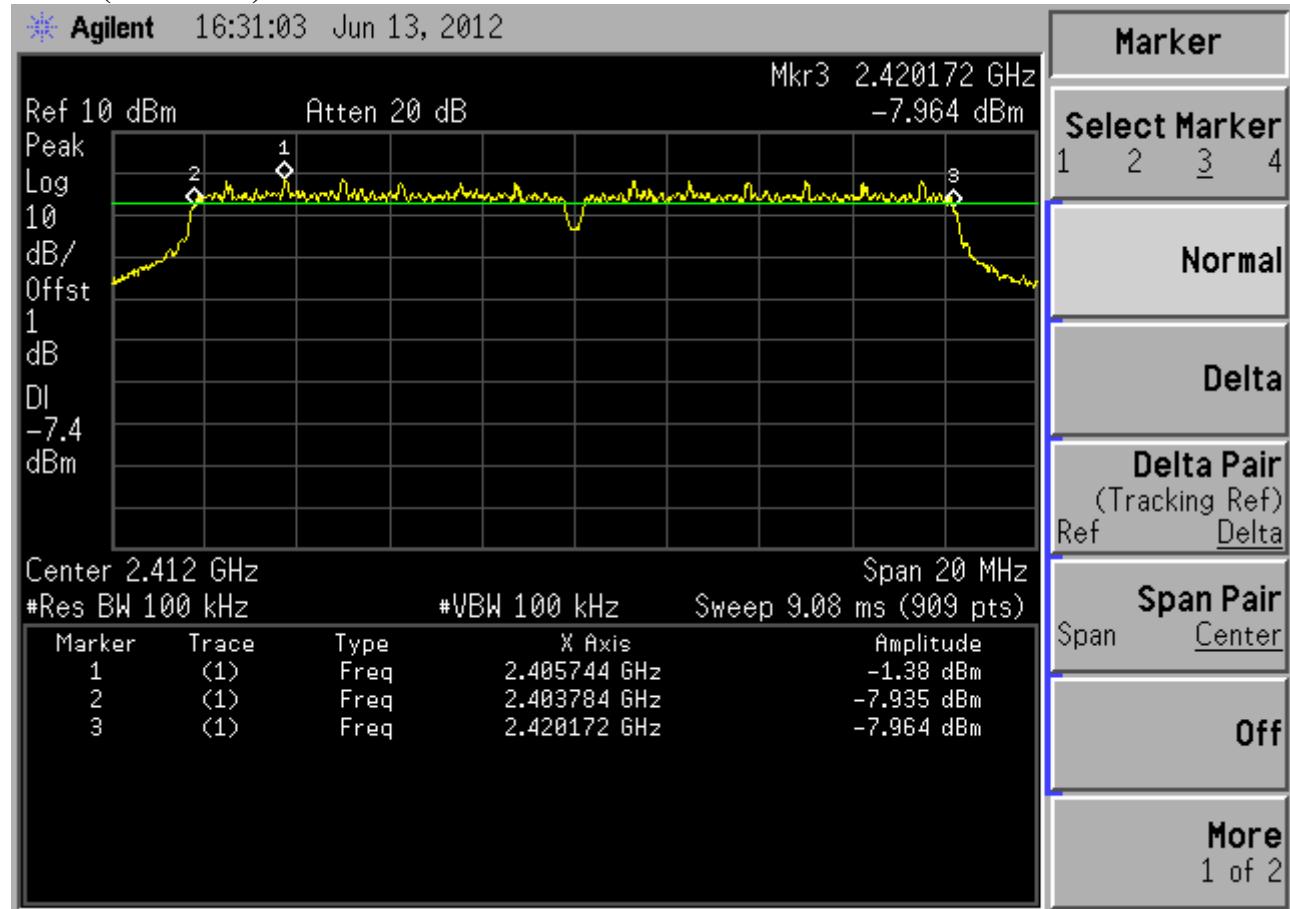

Ch 06 (2437 MHz)

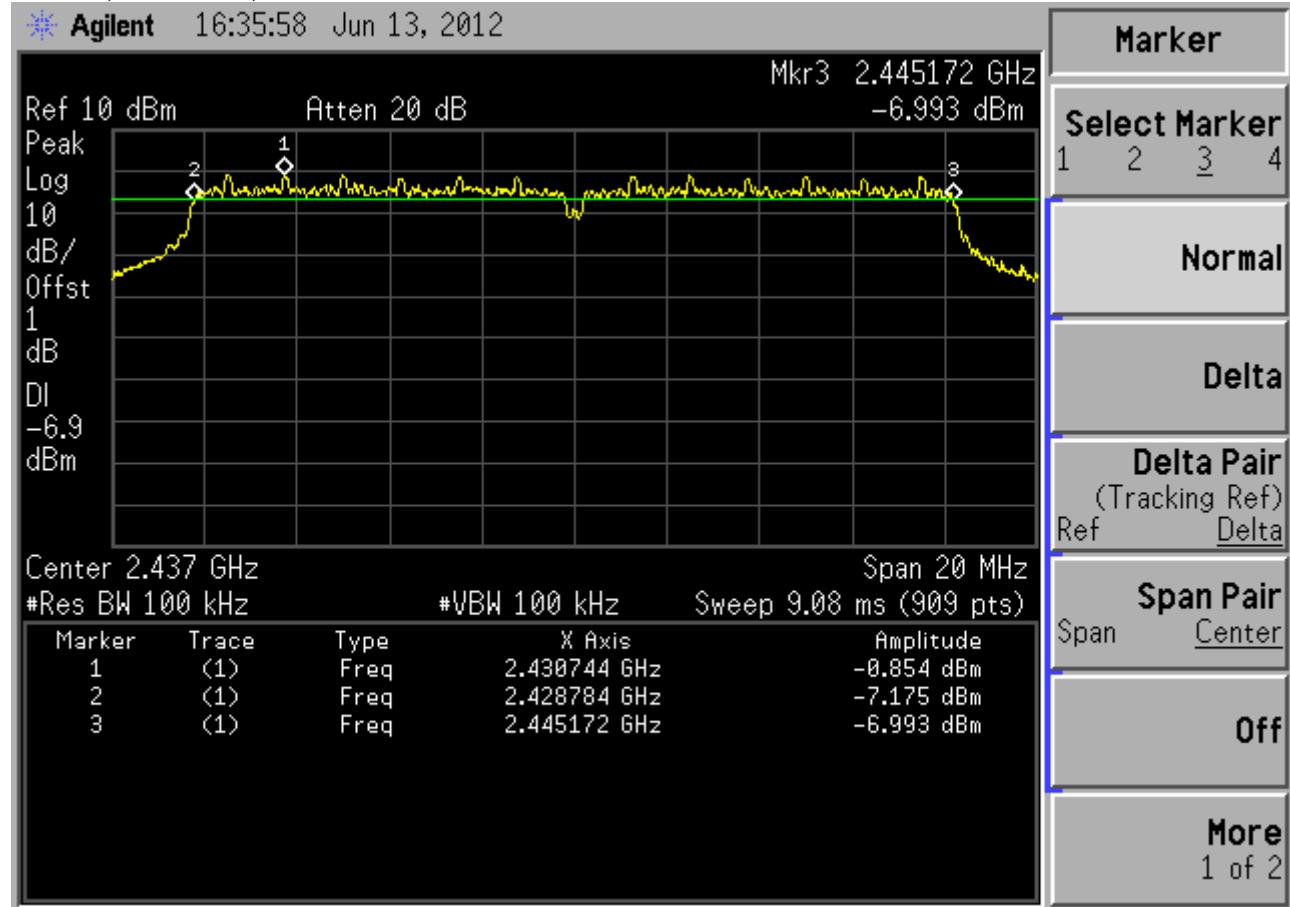

Ch 11 (2462 MHz)

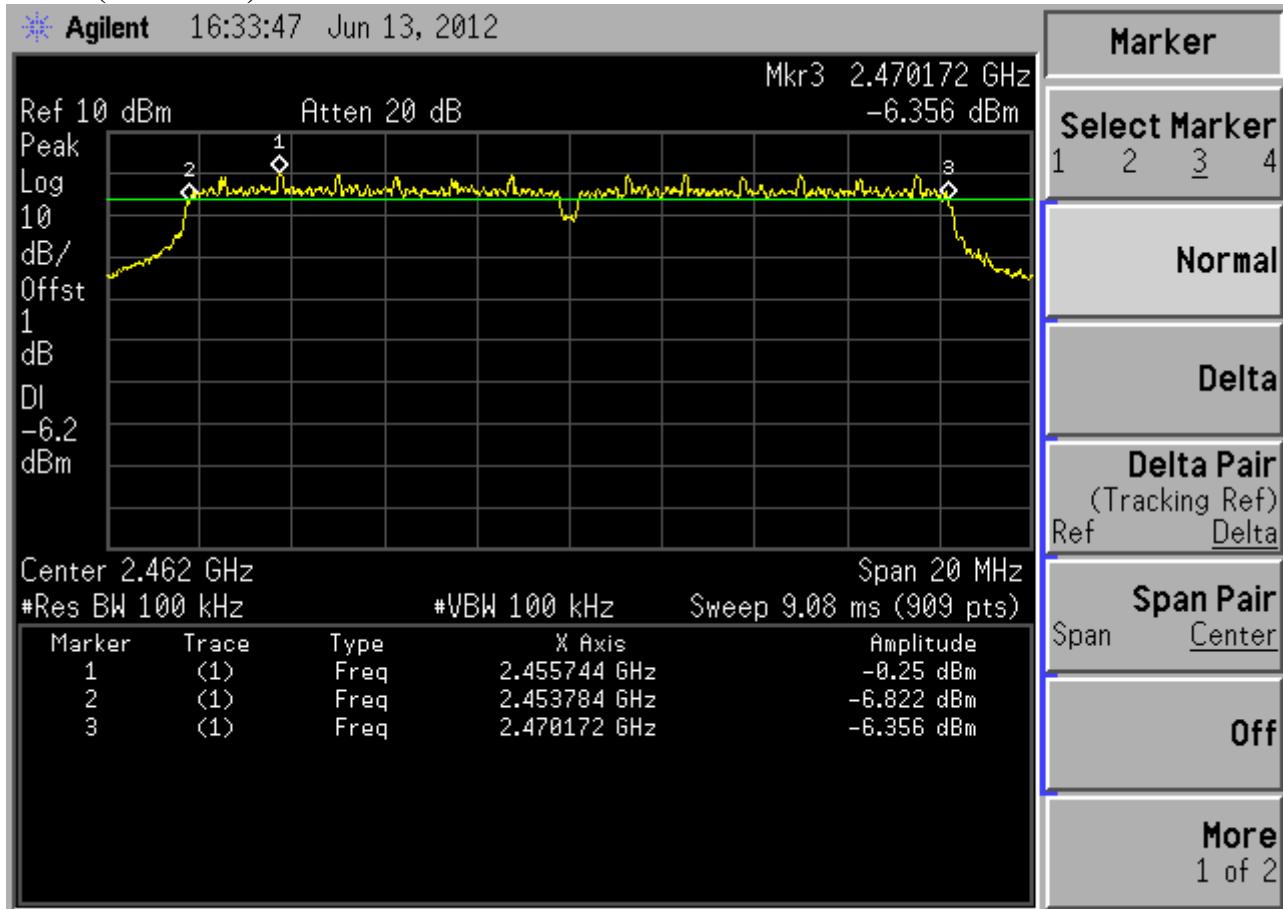

5 MAXIMUM PEAK OUTPUT POWER MEASUREMENT

5.1 Test Equipment

The following test equipment was used during the maximum peak output power measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|--------------|--------------|-----------|------------|--------------|--------------|
| 1. | Power Meter | Anritsu | ML2487A | 6K00003245 | Mar 28, 2012 | Mar 28, 2013 |
| 2. | Power Sensor | Anritsu | MA2491A | 32489 | Mar 28, 2012 | Mar 28, 2013 |

5.2 Block Diagram of Test Setup



5.3 Specification Limits ((§15.247(b)(3))

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5 MHz is: 1 Watt. (30 dBm)

5.4 Operating Condition of EUT

The test program “Windows Command” was used to enable the EUT to transmit data at different channel frequency individually.

5.5 Test Procedure

This is an RF conducted test. Use a direct connection between the antenna port of the transmitter and the power meter, through suitable attenuation. We use Power Output Option 1 (which defined in KDB558074) to measure the power output. Power Output Option 1 is a peak measurement. The transmitter output was connected to the power meter that was designed to detect peak value automatically.

Note: The bandwidth of the power meter is 20MHz.

5.6 Test Results

PASSED.

All the test results are attached in next pages.

(Test Date: Jun. 18, 2012 Temperature: 23°C Humidity: 48 %)

| Channel | Frequency | Peak Output Power | Limit |
|---------|-----------|-------------------|--------|
| 01 | 2412 MHz | 17.81 dBm | 30 dBm |
| 06 | 2437 MHz | 17.91 dBm | 30 dBm |
| 11 | 2462 MHz | 17.78 dBm | 30 dBm |

6 EMISSION LIMITATIONS MEASUREMENT

6.1 Test Equipment

The following test equipment was used during the emission limitations test :

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-----------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | E7405A | MY45106600 | Mar 22, 2012 | Mar 22, 2013 |

6.2 Block Diagram of Test Setup

The same as Section. 4.2.

6.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).(※This test result attaching to Section. 4.7)

6.4 Operating Condition of EUT

The test program “Windows Command” was used to enable the EUT to transmit data at different channel frequency individually.

6.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

The test procedure is defined in KDB558074 v01:2012 (the 5.4.1.1 Measurement Procedure – Reference Level & 5.4.1.2 Measurement Procedure – Unwanted Emission was used).

6.6 Test Results



PASSED.



The test data was attached in the next pages.



Note – The Reference Level refer to Sec. 8.6 PSD (in 100kHz) which tested according to “5.4.1.1 Measurement Procedure – Reference Level” of KDB558074 v01:2012

(Test Date: Jun. 18, 2012 Temperature: 23°C Humidity: 48 %)



Ch 01 (2412 MHz)

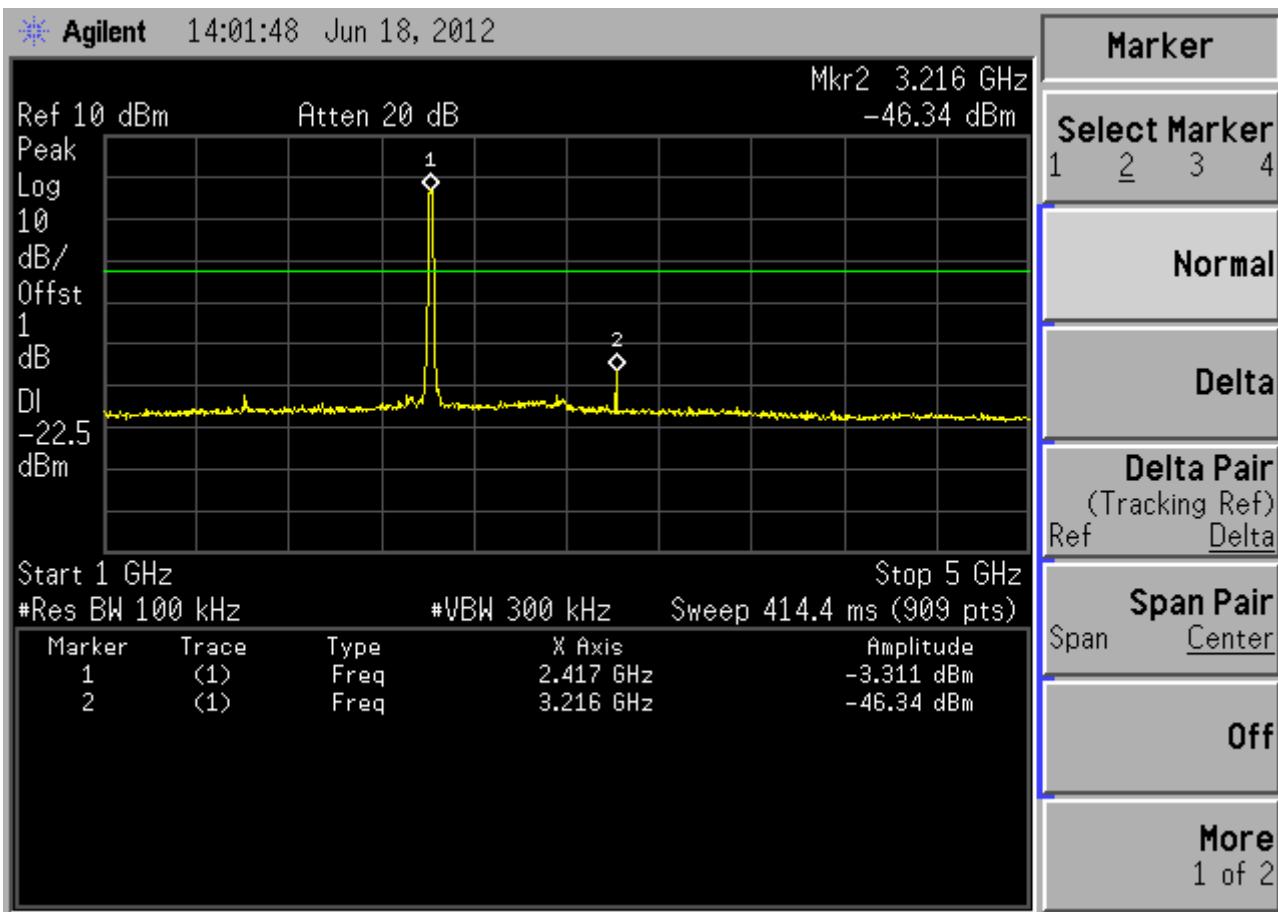
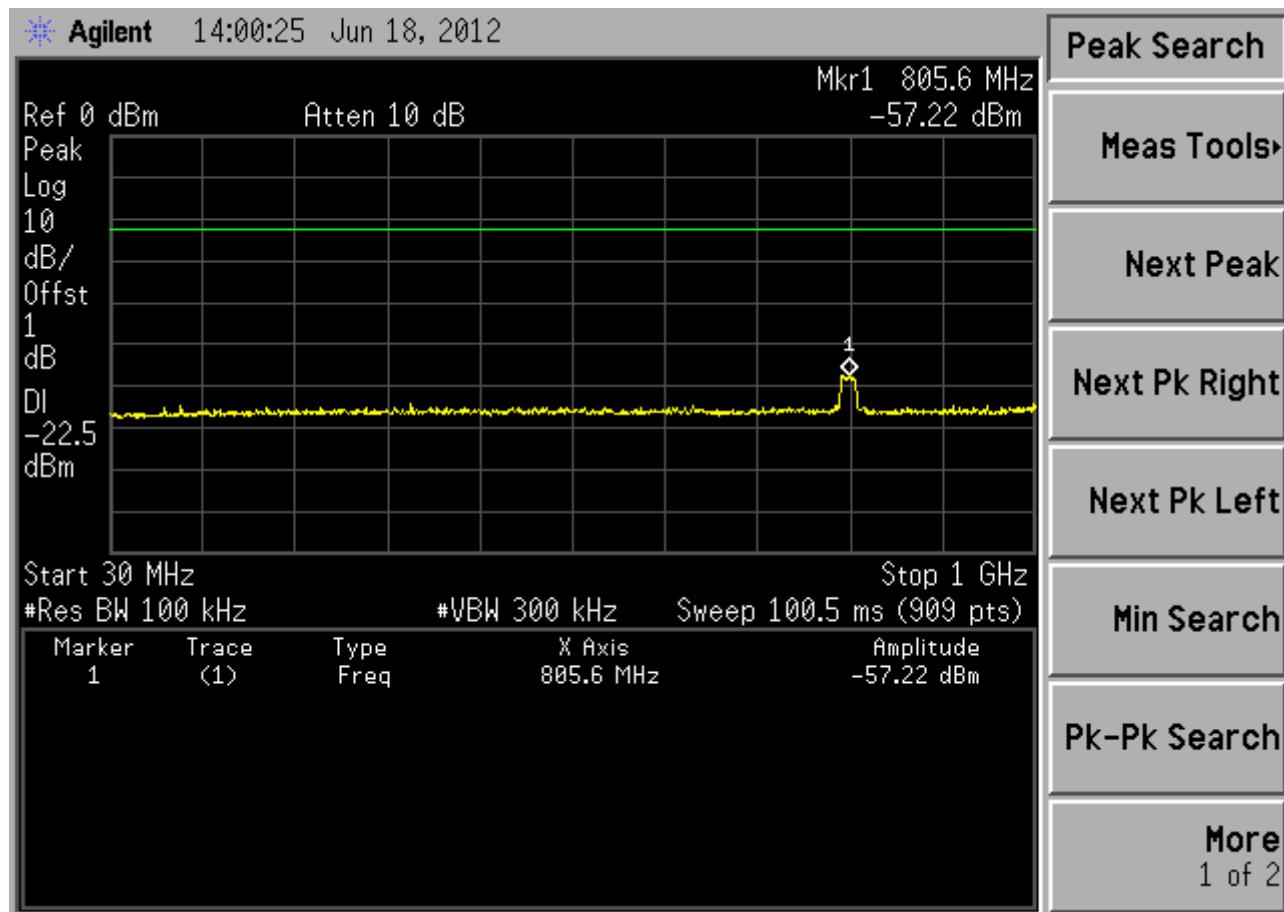


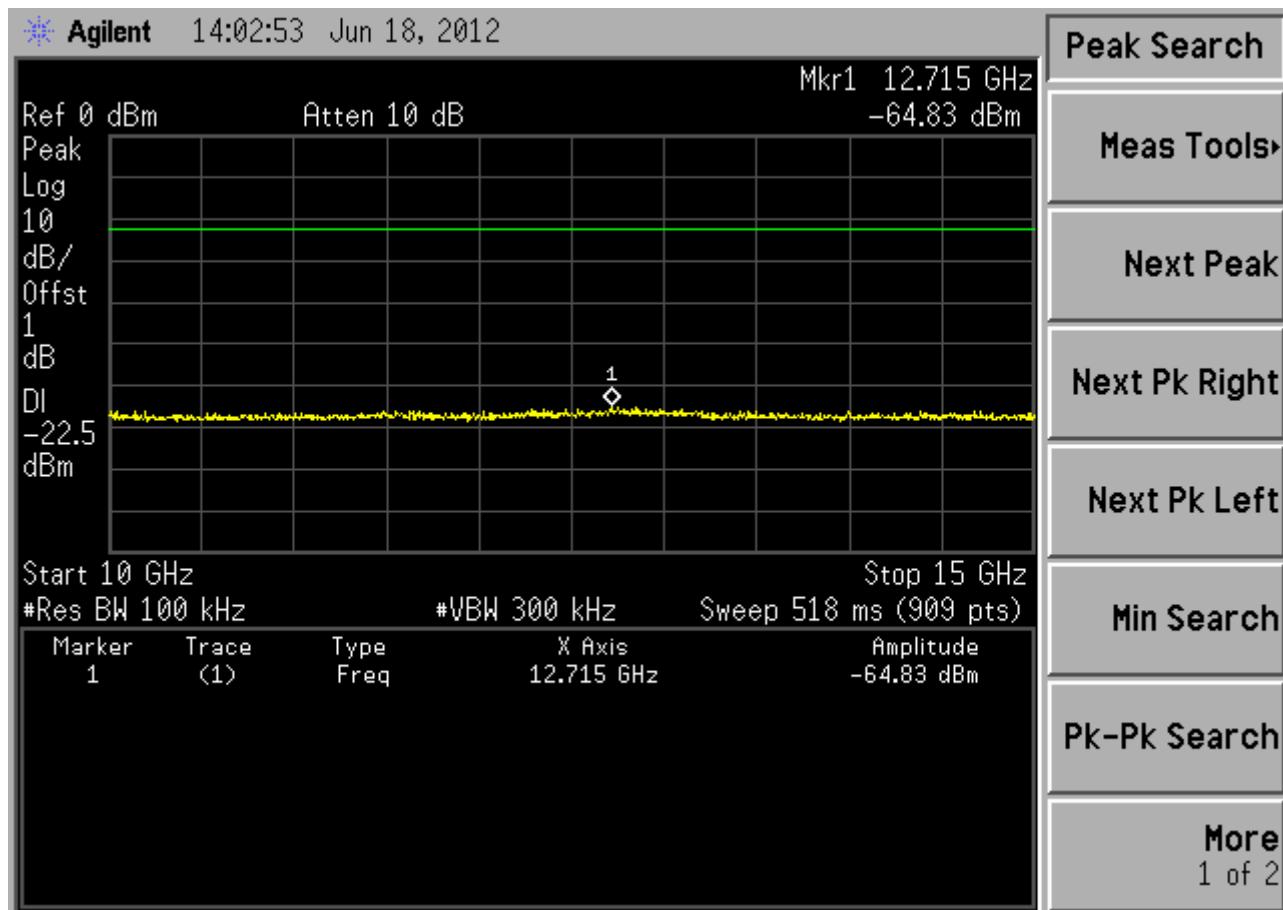
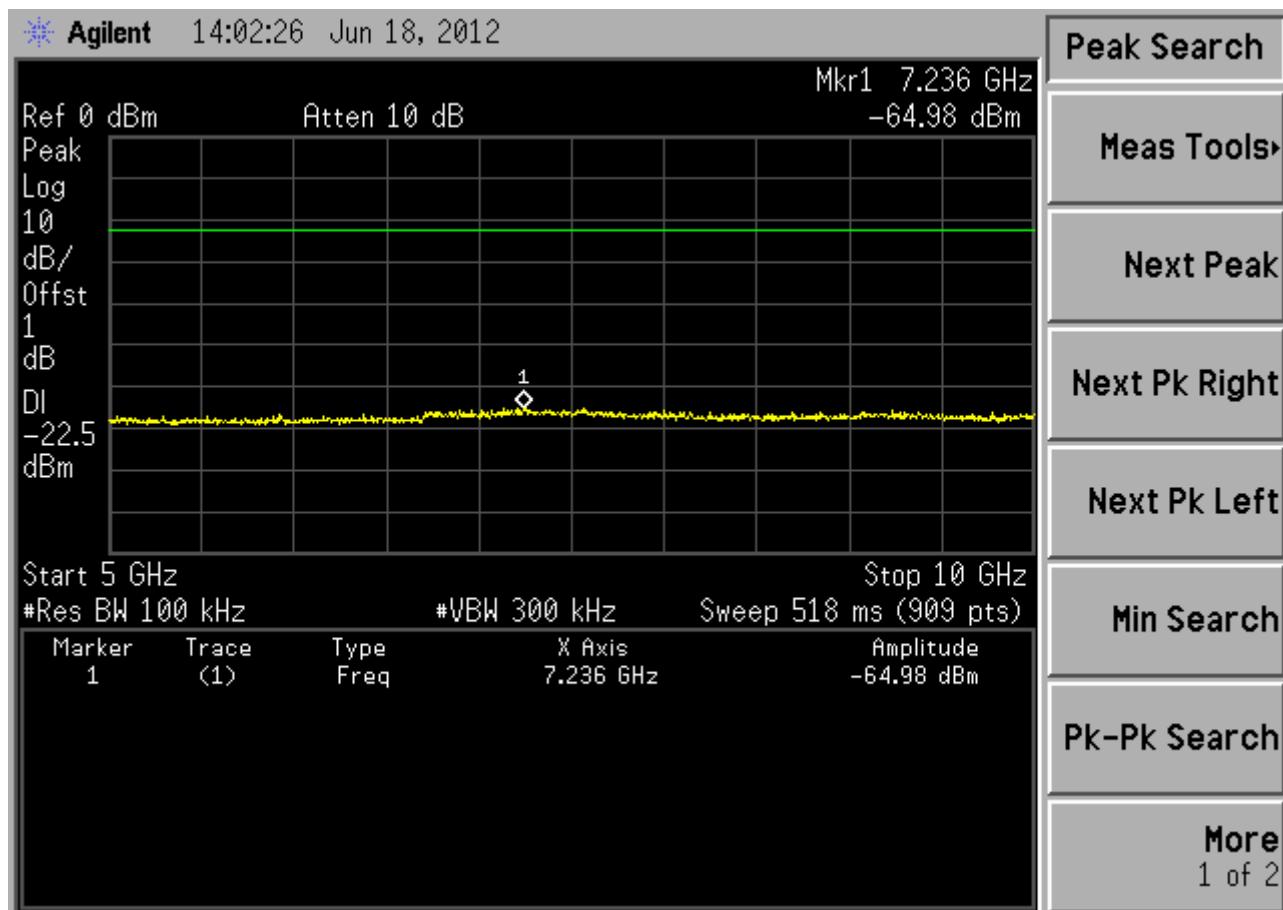


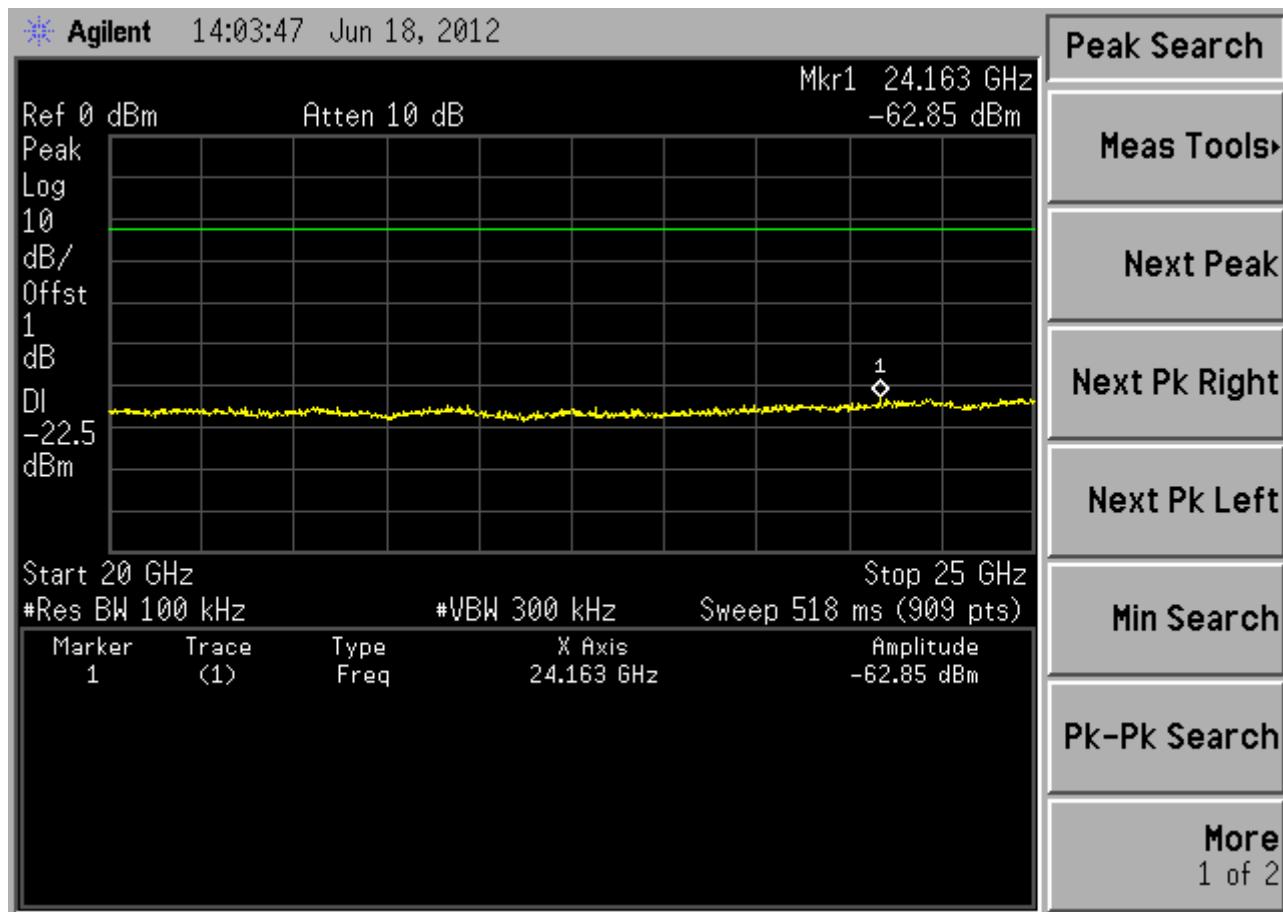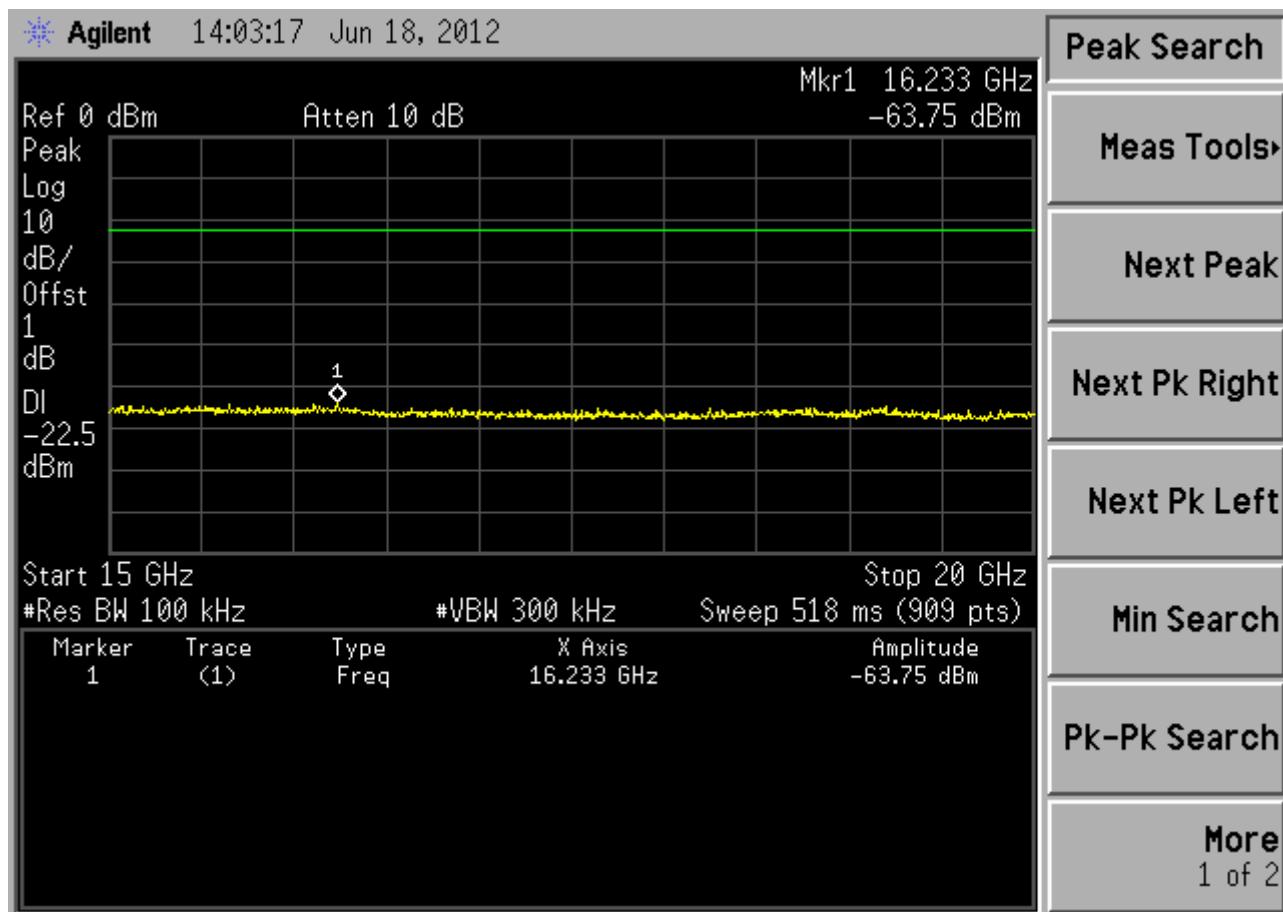



Ch 06 (2437 MHz)

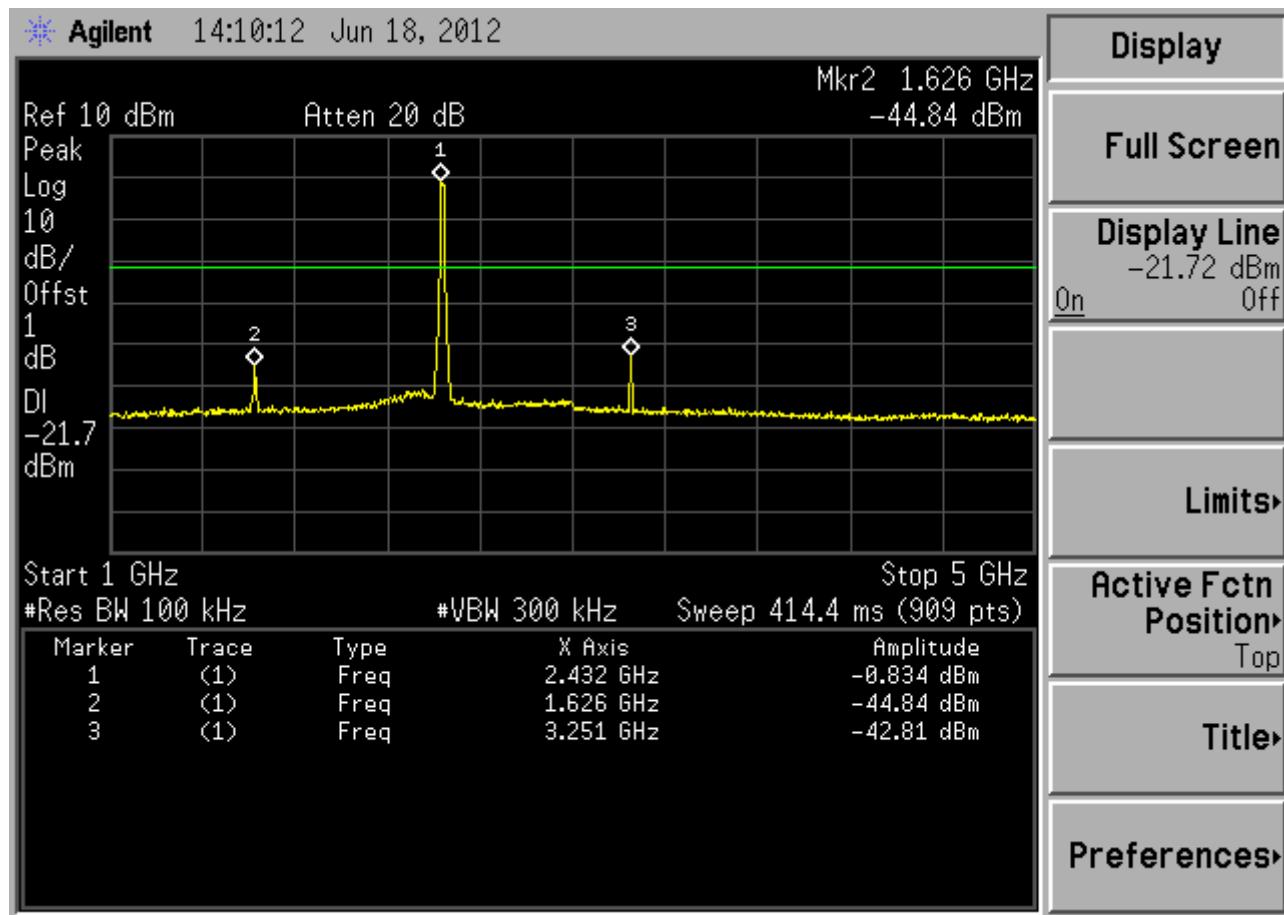
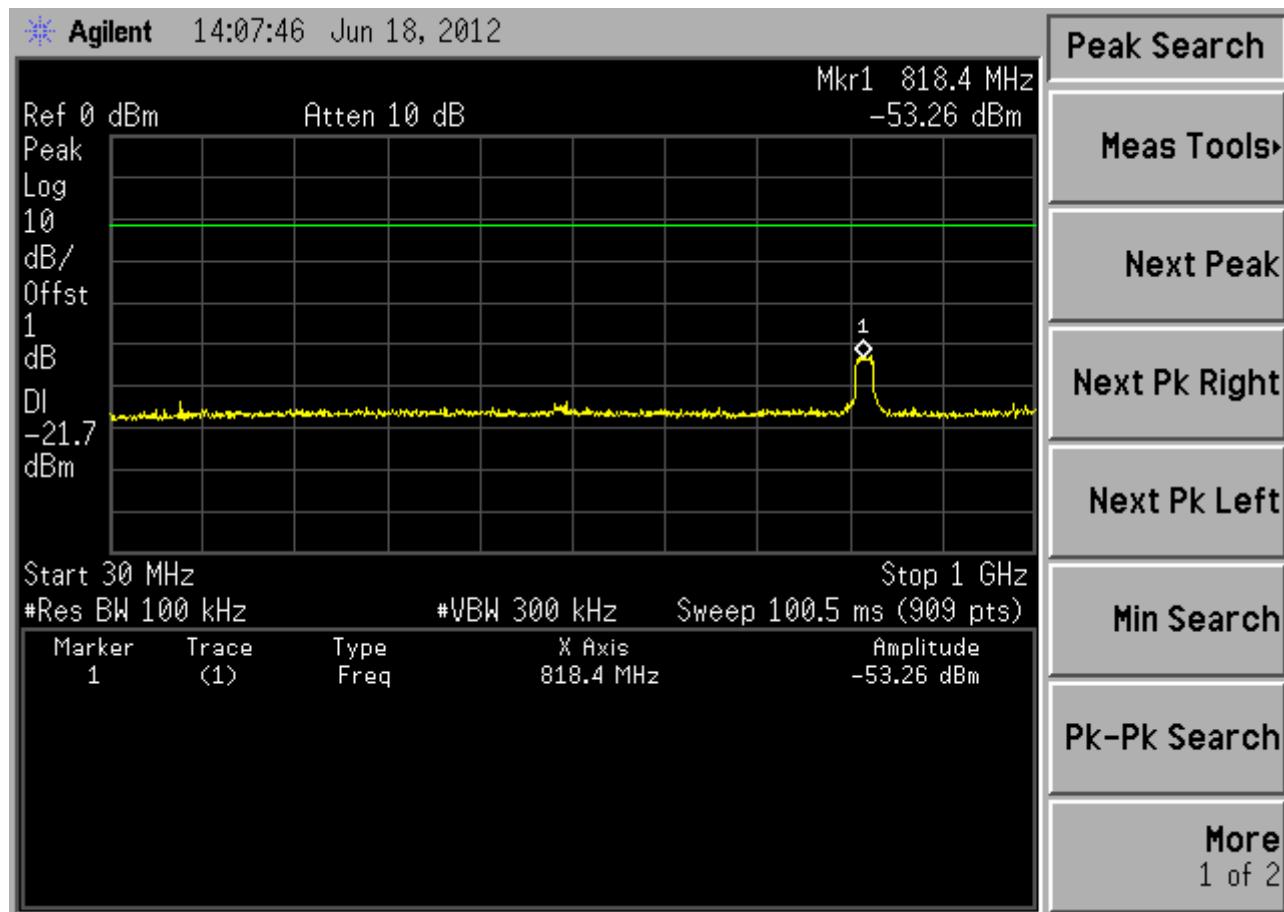


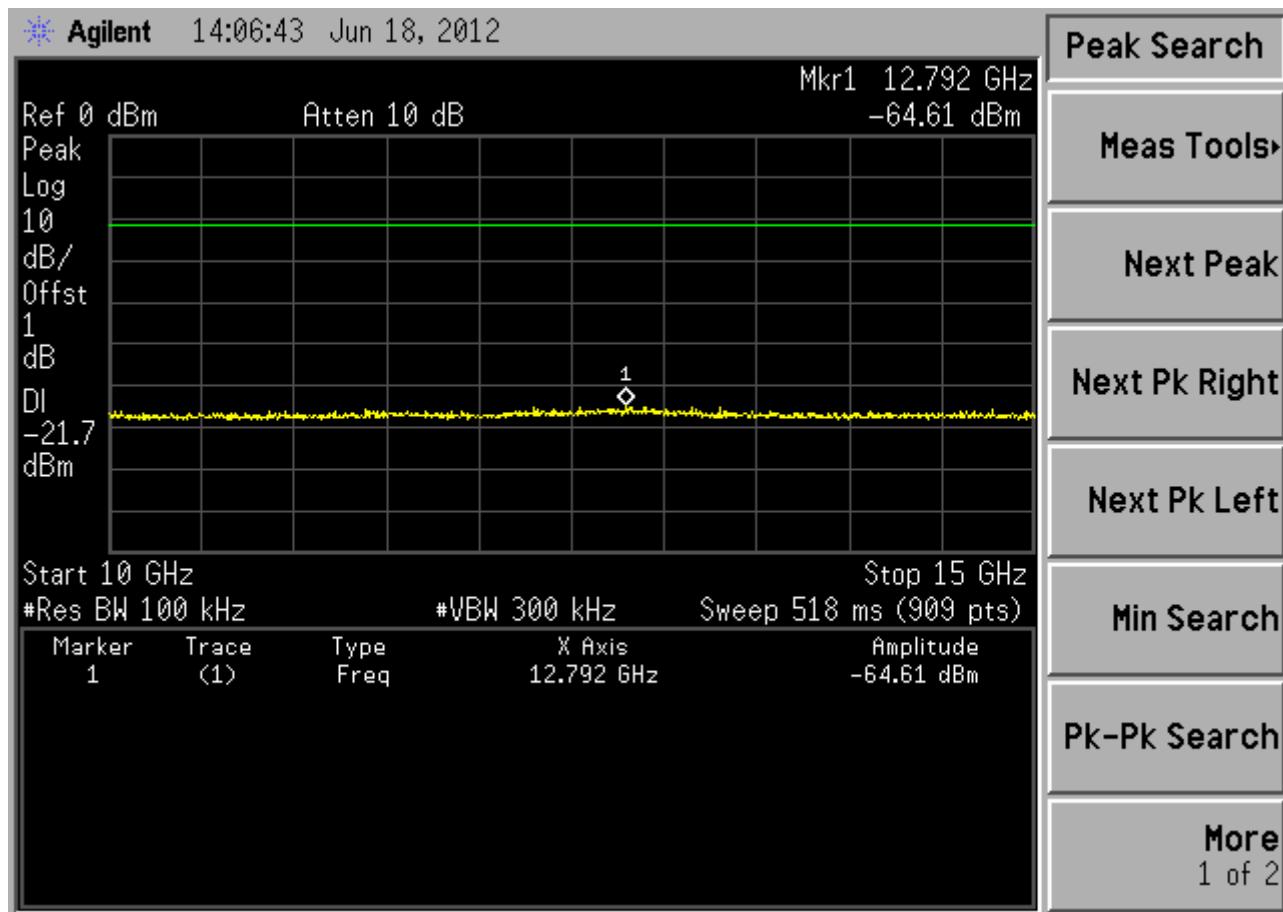
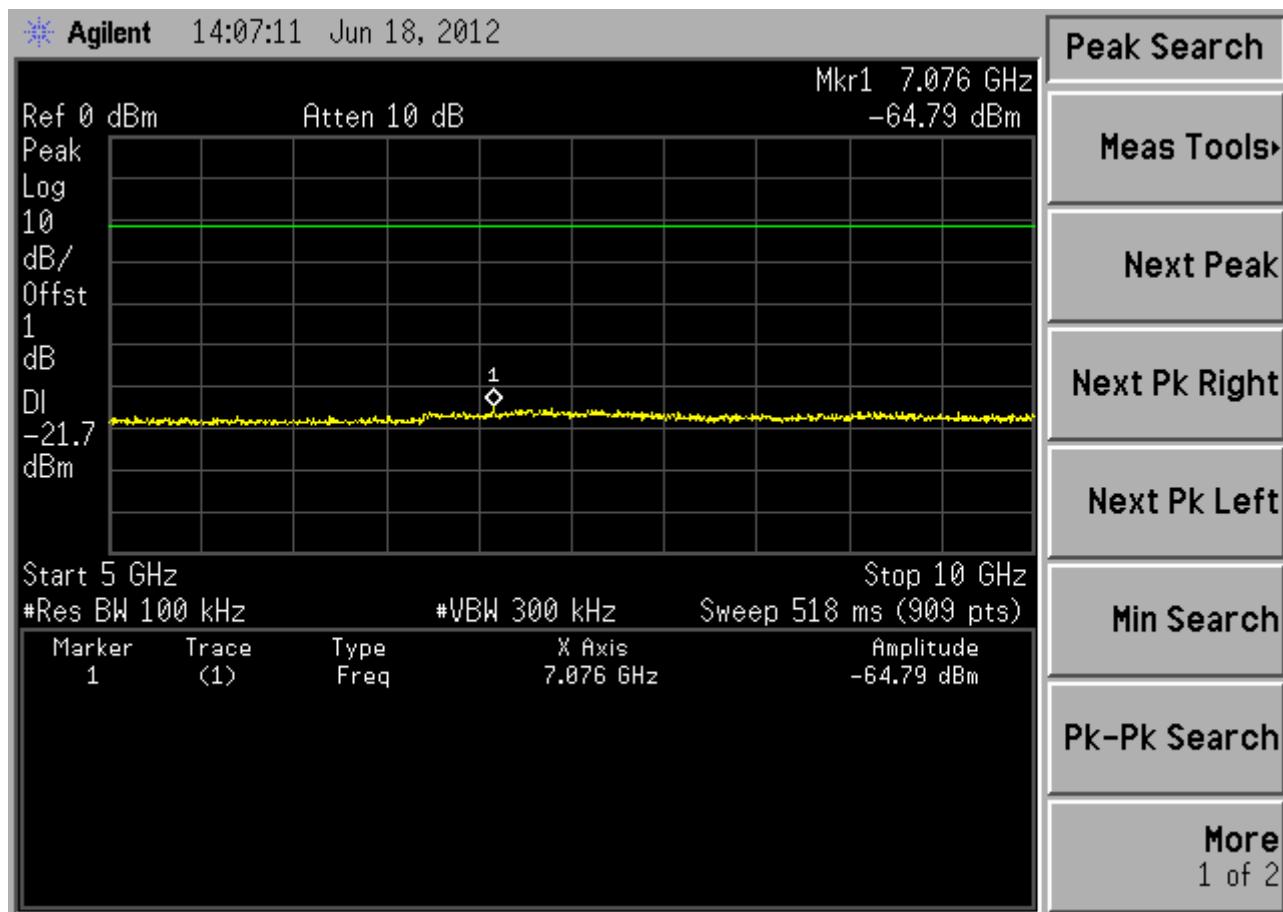


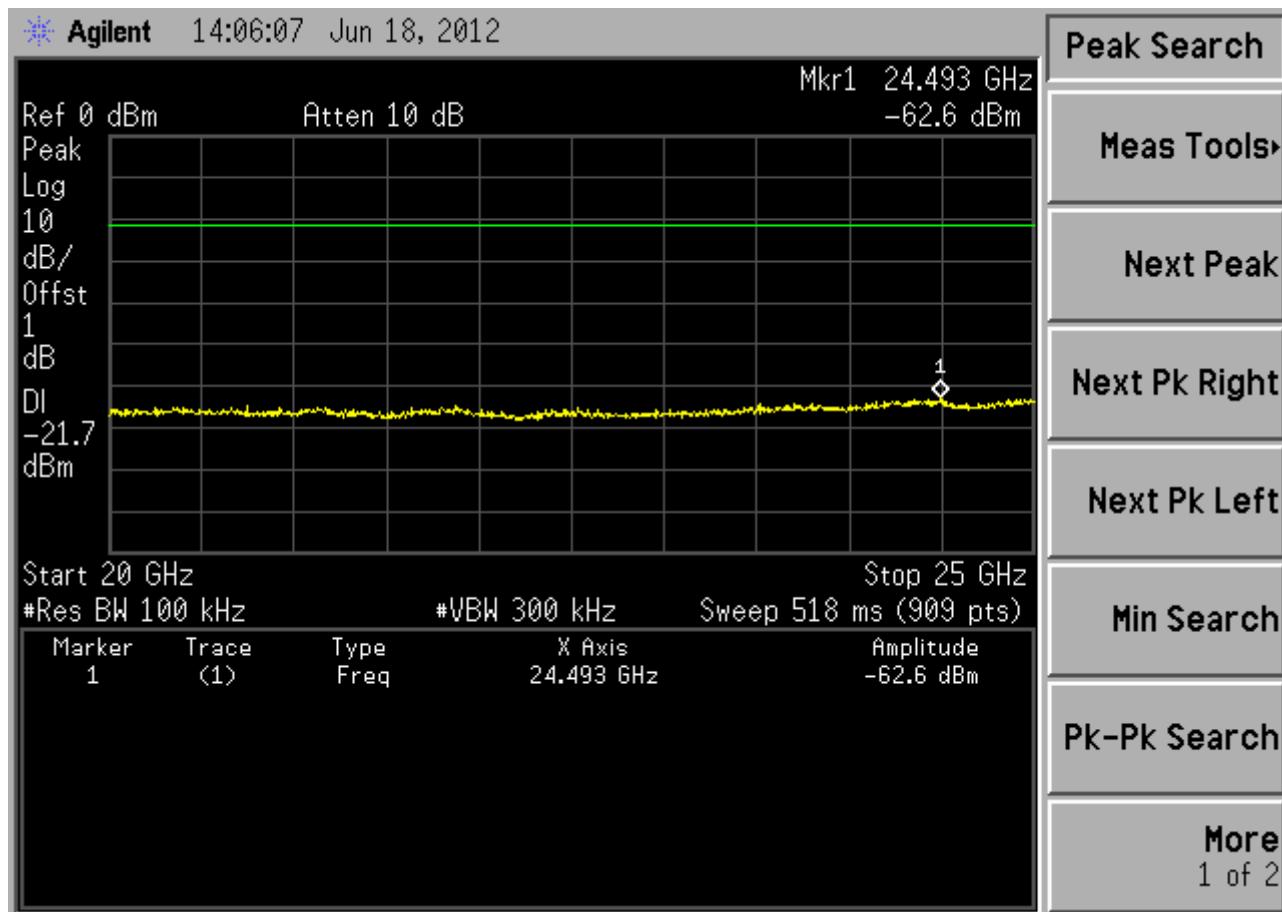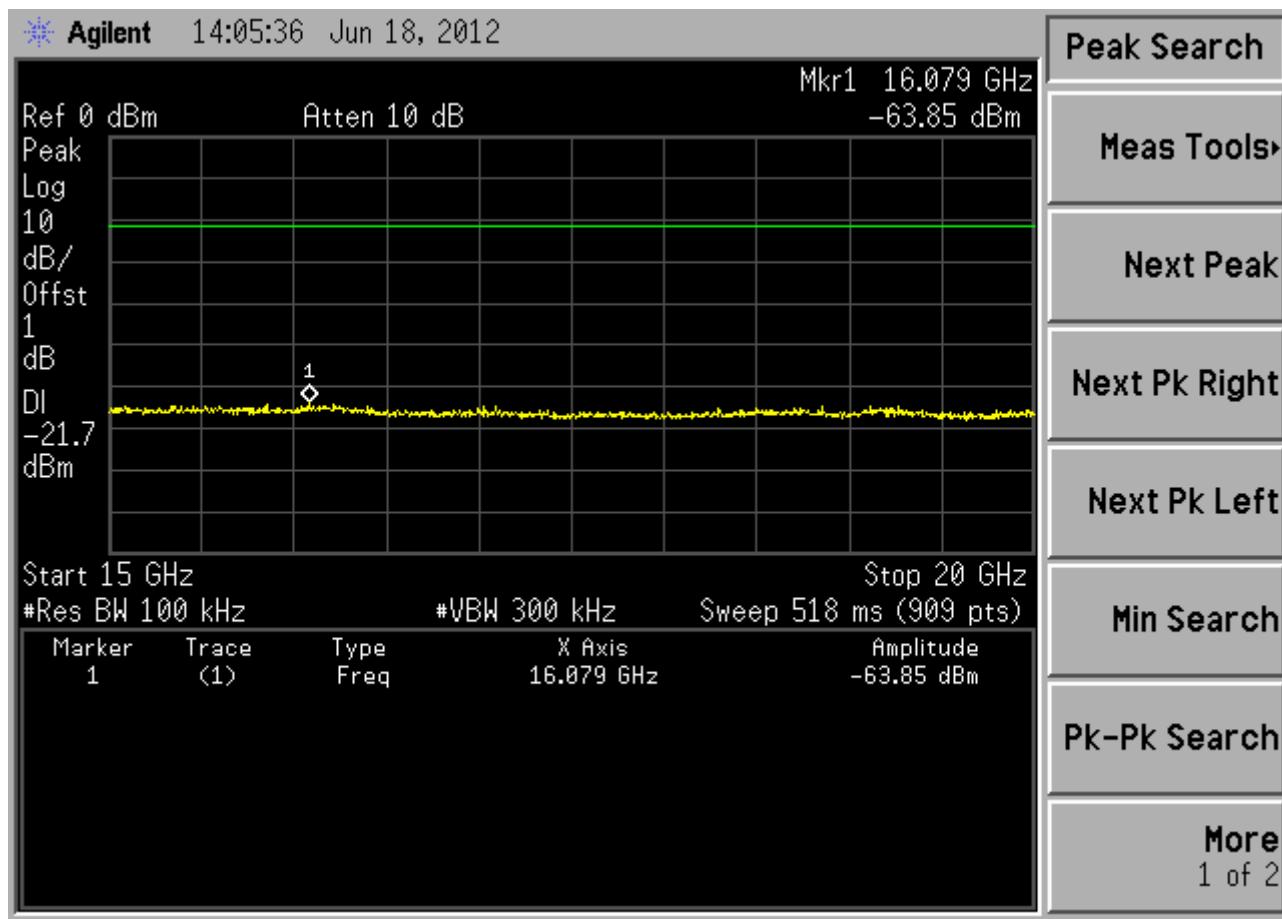

Ch 11 (2462 MHz)

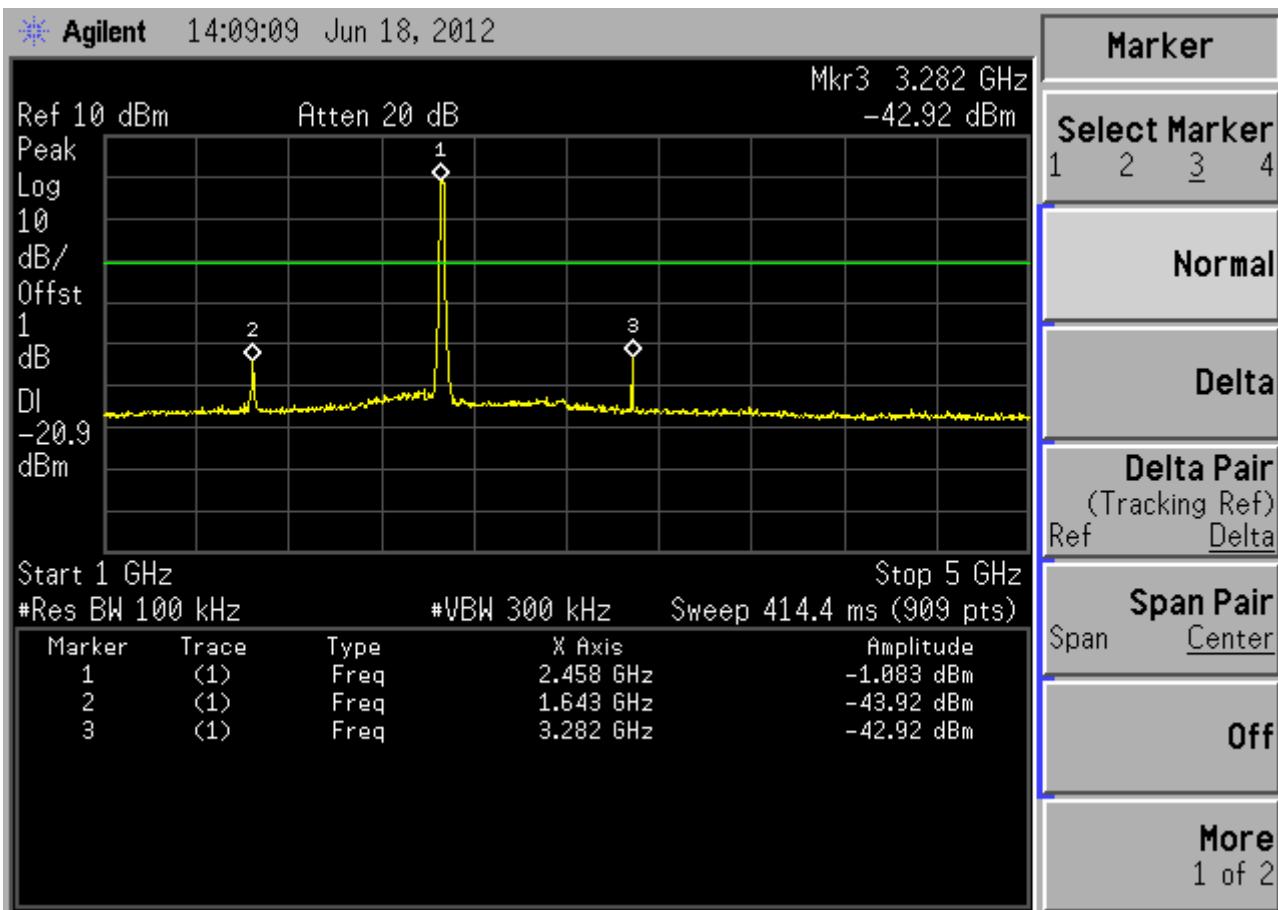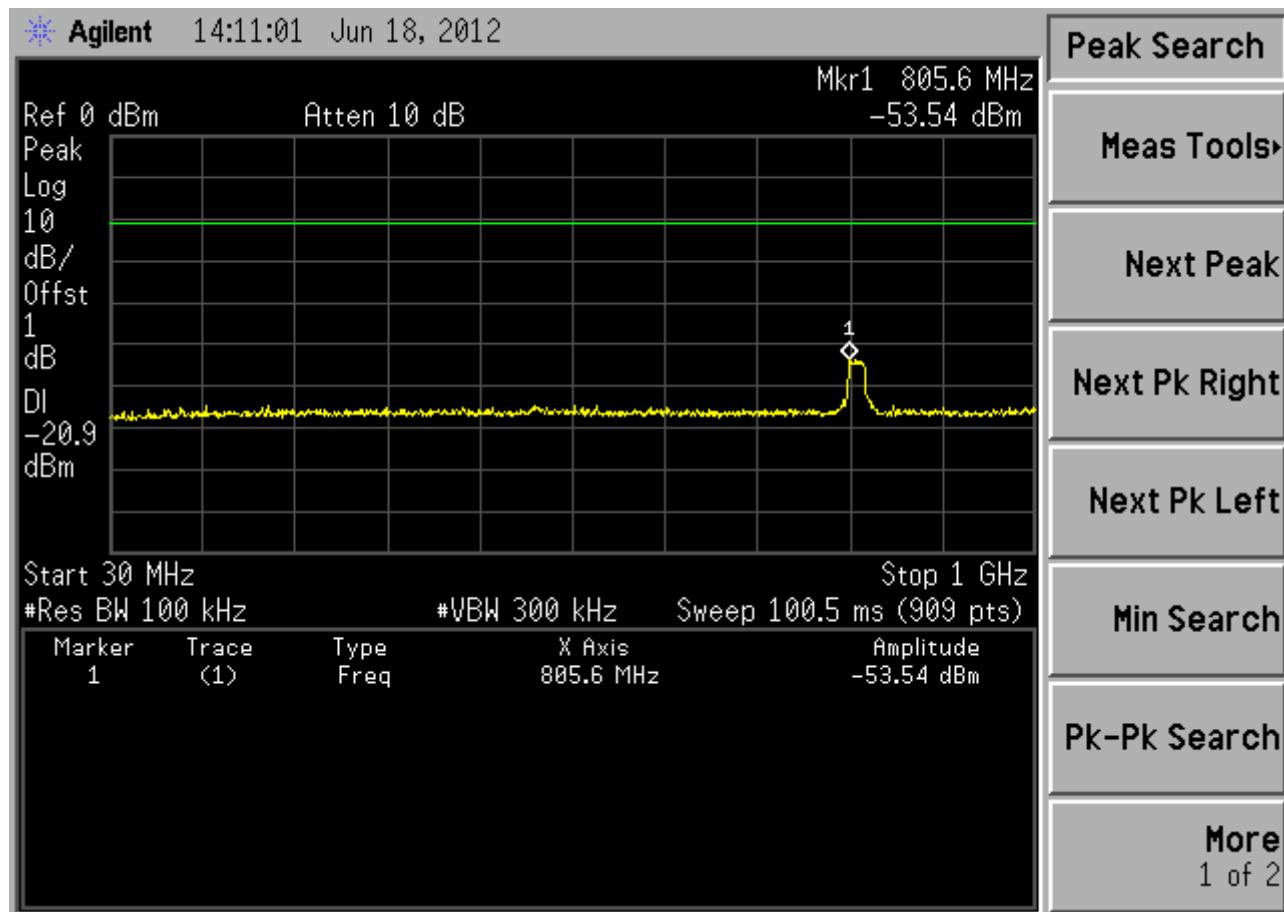

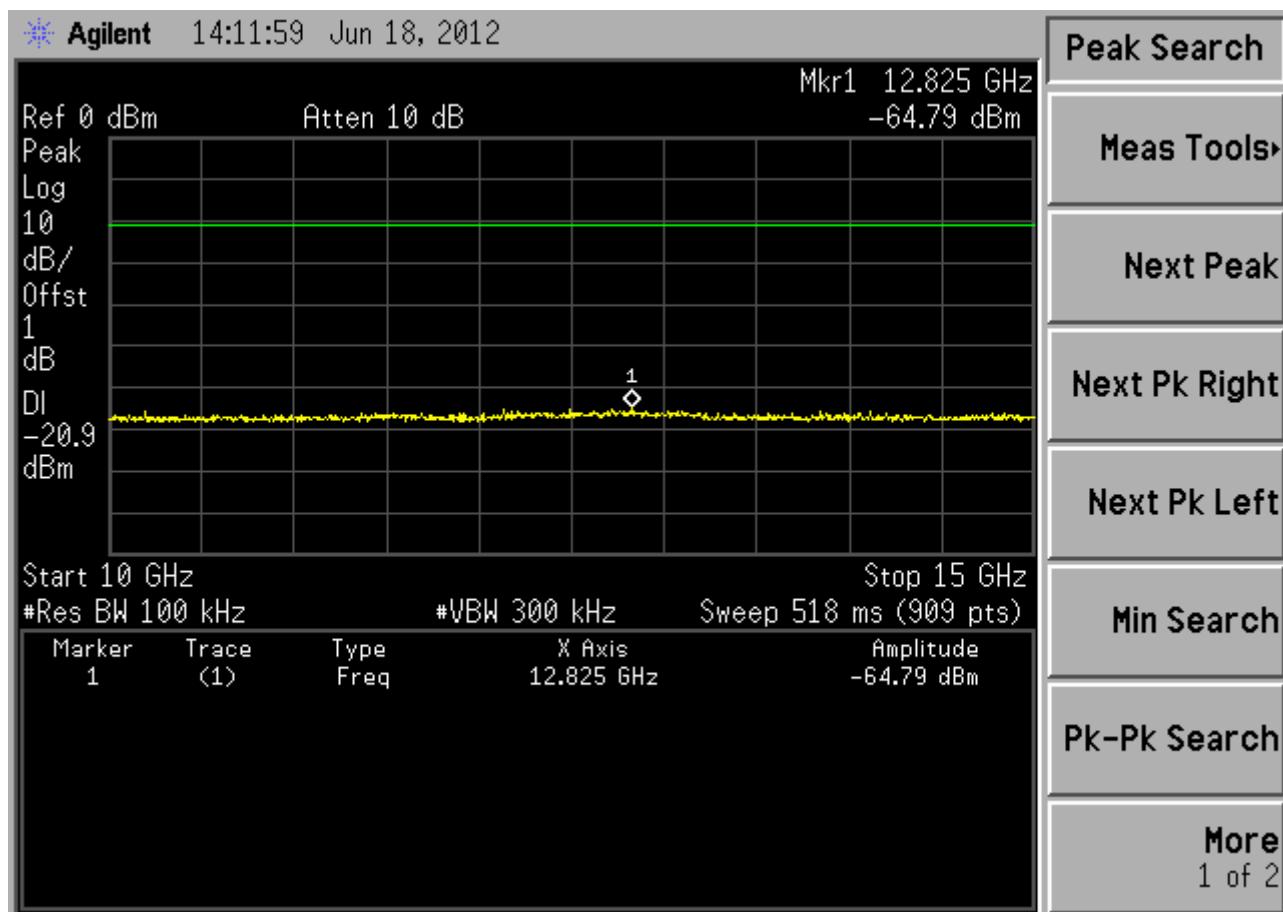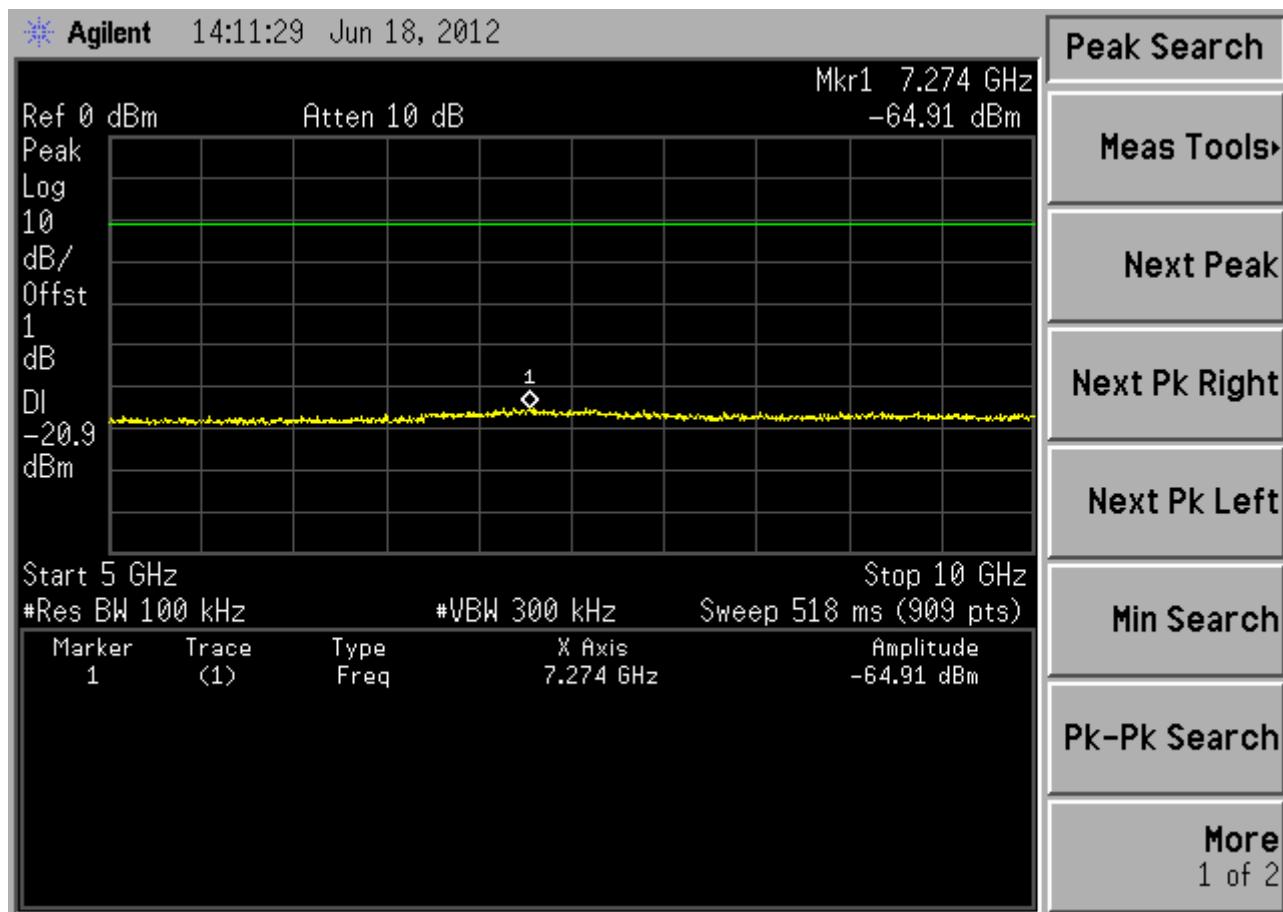

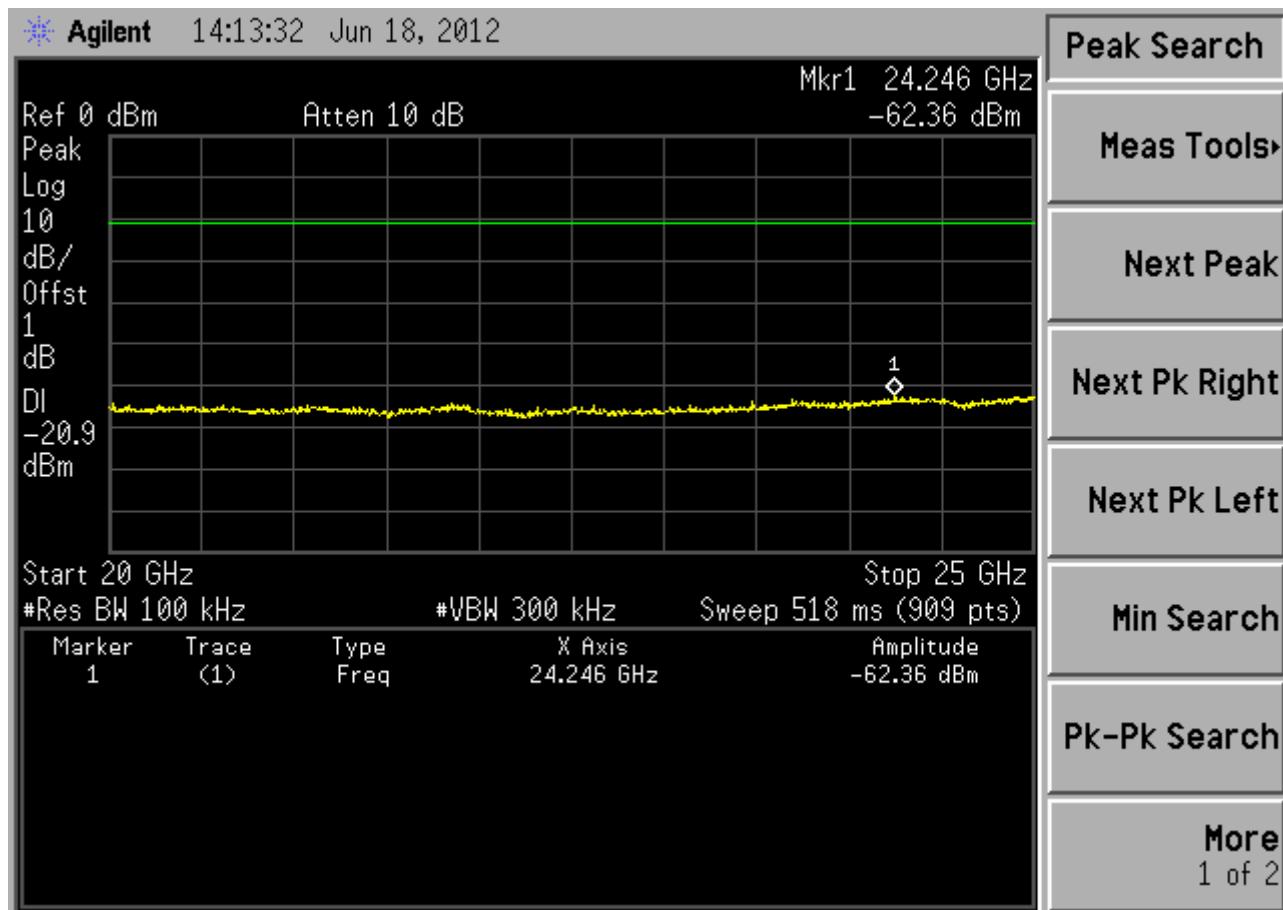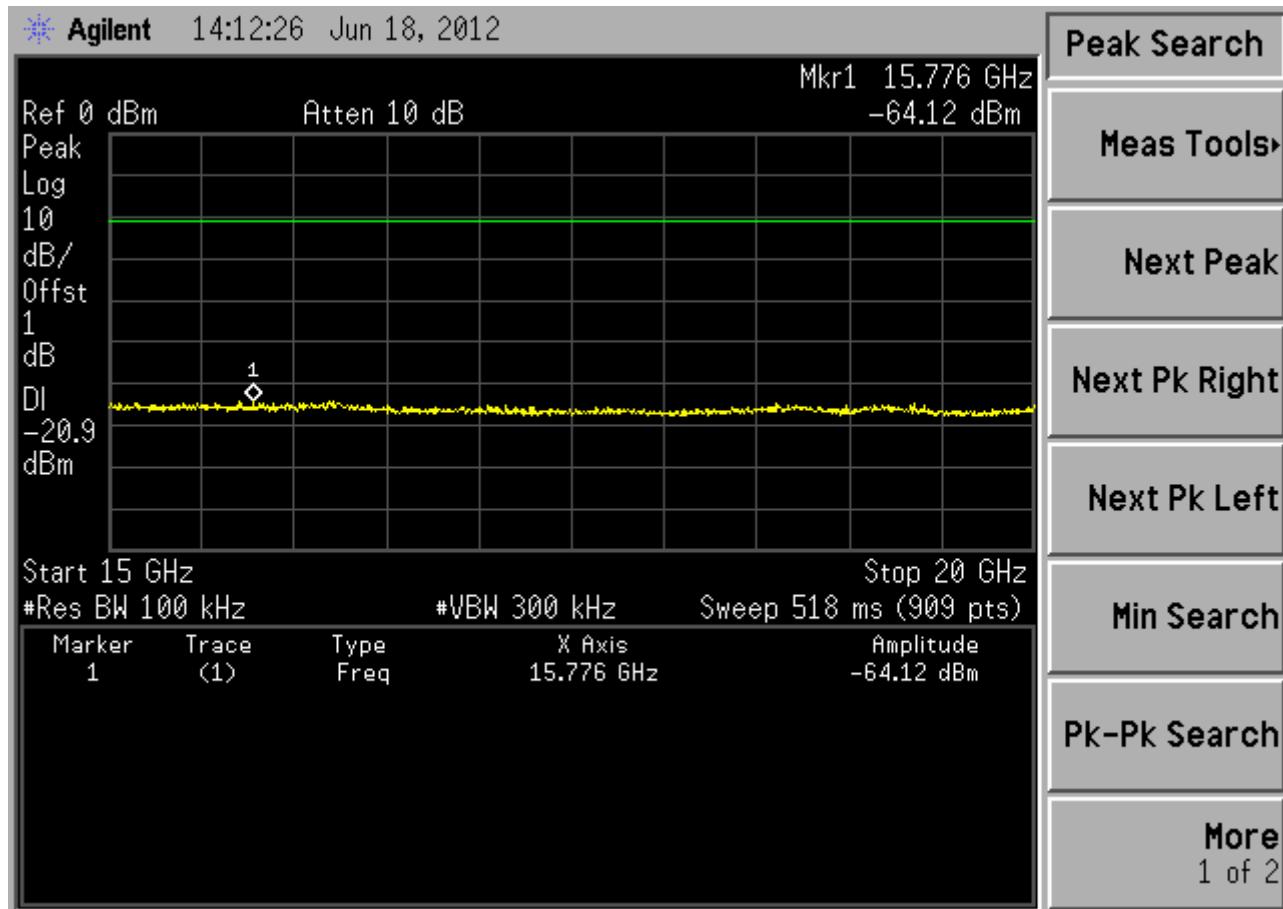

7 BAND EDGES MEASUREMENT

7.1 Test Equipment

The following test equipment was used during the band edges measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-----------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | E7405A | MY45106600 | Mar 22, 2012 | Mar 22, 2013 |

7.2 Block Diagram of Test Setup

The same as section 4.2.

7.3 Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.4 Operating Condition of EUT

The test program “Windows Command” was used to enable the EUT to transmit and receive data at different channel frequency individually.

7.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge.

7.6 Test Results


PASSED. All the test results are attached in next pages.

Note – The Reference Level refer to Sec. 8.6 PSD (in 100kHz) which tested according to “5.4.1.1 Measurement Procedure – Reference Level” of KDB558074 v01: 2012


(Test Date: Jun. 18, 2012 Temperature: 23°C Humidity: 48 %%)

| Location | Channel | Frequency | Delta Marker | Result |
|-----------------------|---------|-----------|------------------|--|
| Below Band Edge | 01 | 2412 MHz | 26.137 dB | More than 20 dB below the highest level of the desired power |
| Upper Band Edge | 11 | 2462 MHz | 39.104 dB | |

Ch01 2412MHz (Below Edge 2400 MHz)

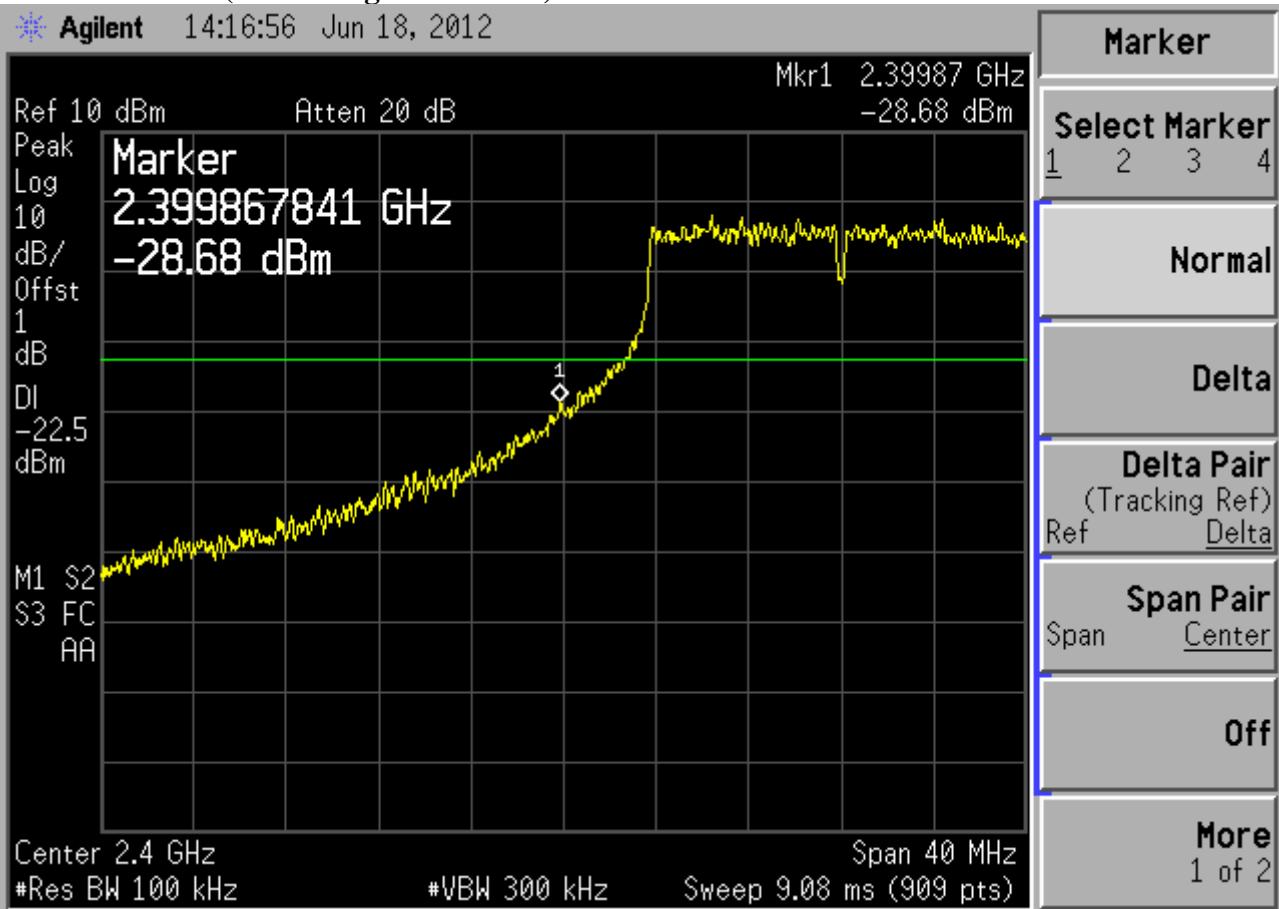

Ch11 2462MHz (Upper Edge 2483.5 MHz)

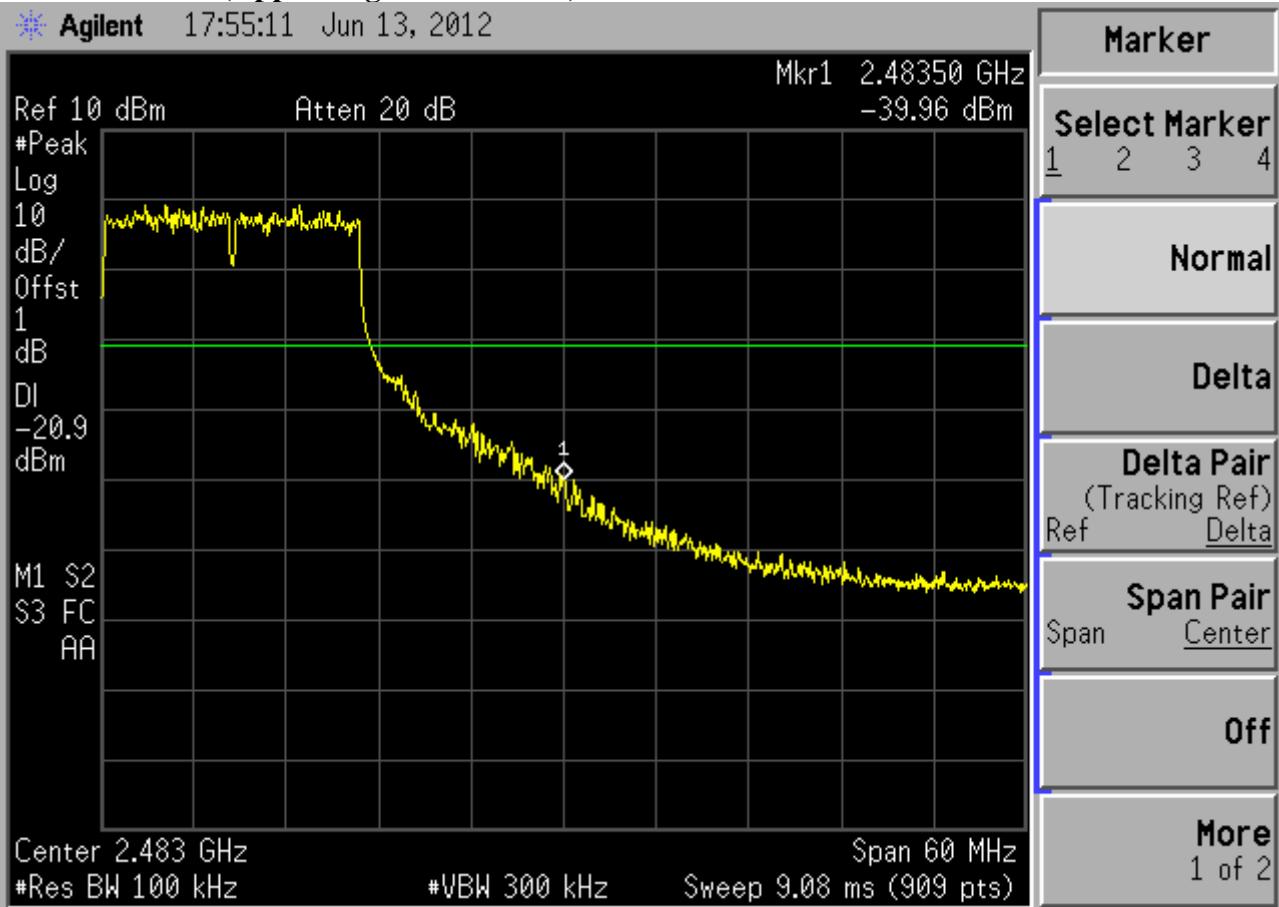

8 POWER SPECTRAL DENSITY MEASUREMENT

8.1 Test Equipment

The following test equipment was used during the power spectral density measurement:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|-------------------|--------------|-----------|------------|--------------|--------------|
| 1. | Spectrum Analyzer | Agilent | E7405A | MY45106600 | Mar 22, 2012 | Mar 22, 2013 |

8.2 Block Diagram of Test Setup

The same as section 4.2.

8.3 Specification Limits (§15.247(e))

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

8.4 Operating Condition of EUT

The test program “Windows Command” was used to enable the EUT to transmit data at different channel frequency individually.

8.5 Test Procedure

The transmitter output was connected to the spectrum analyzer. The spectrum analyzer was set as RBW = 100kHz, VBW = 300kHz, span = 800kHz (5 – 30% greater than the EBW).

The test procedure is defined in KDB558074 v01:2012 (the 5.3.1 Measurement Procedure PKPSD was used).

8.6 Test Results


PASSED. All the test results are attached in next pages.

(Test Date: May. 10, 2012 Temperature: 23°C Humidity: 48 %)


| Channel | Frequency | Power Spectral Density value (in 100kHz) | Power Spectral Density value (in 3kHz) | Limit |
|---------|-----------|--|--|-------|
| 01 | 2412 MHz | -2.543 dBm | -17.743 dBm | 8dBm |
| 06 | 2437 MHz | -1.723 dBm | -16.923 dBm | 8dBm |
| 11 | 2462 MHz | -0.856 dBm | -16.056 dBm | 8dBm |

Note – The PSD (in 3kHz) = PSD (in 100kHz) + BWCF
 Where BWCF = $10\log(3\text{kHz}/100\text{kHz}) = -15.2\text{dB}$


Ch01 2412 MHz

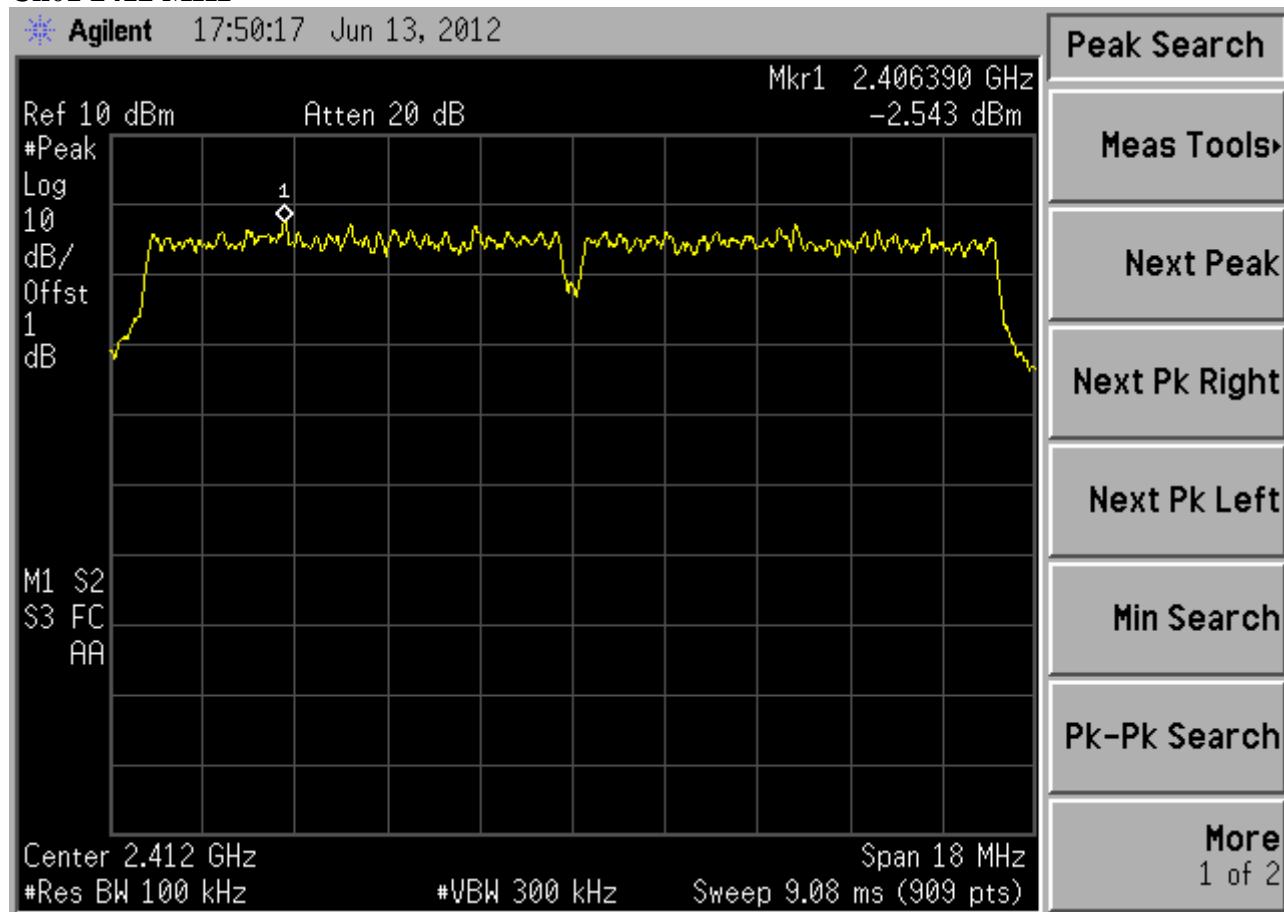

Ch06 2437 MHz

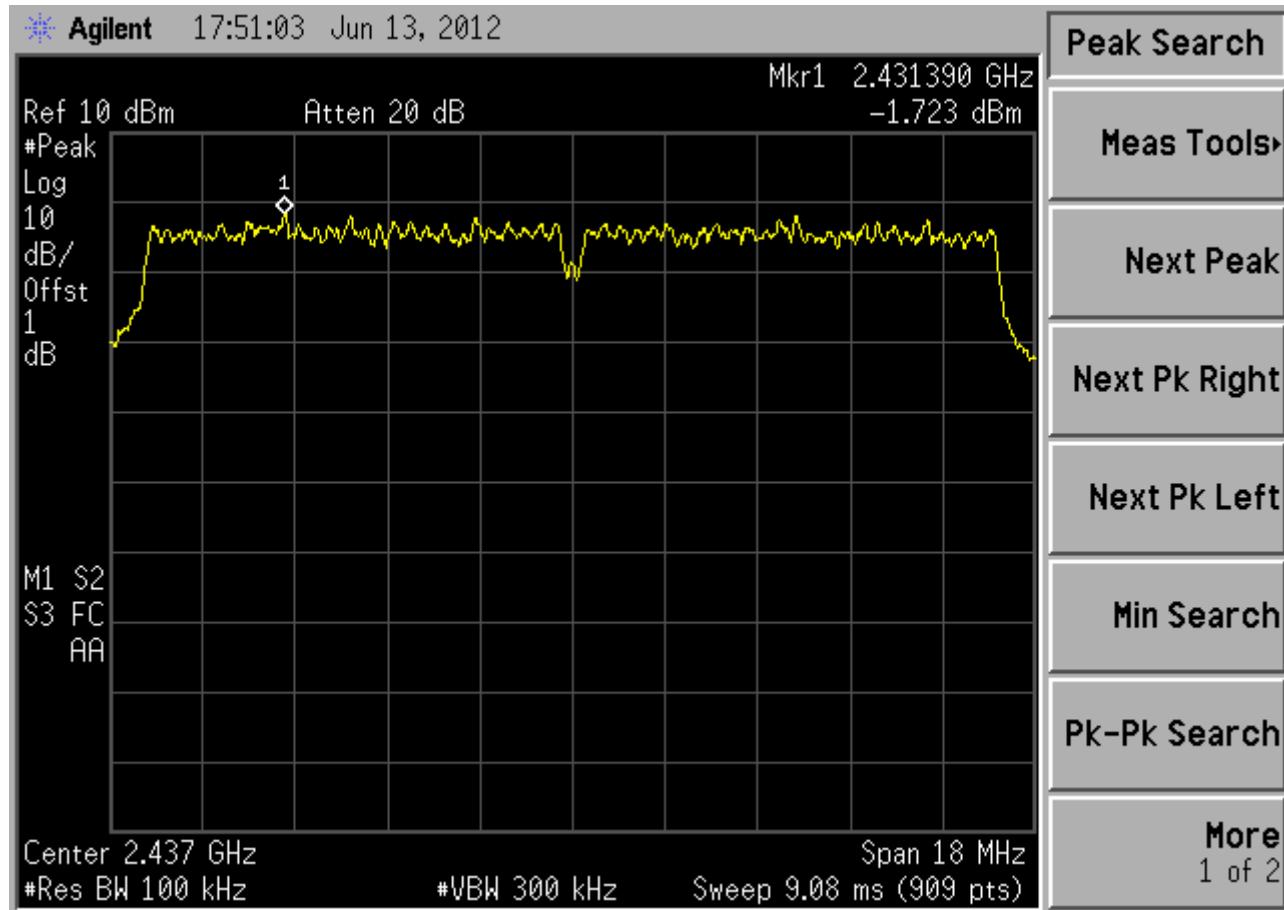

Ch11 2462 MHz

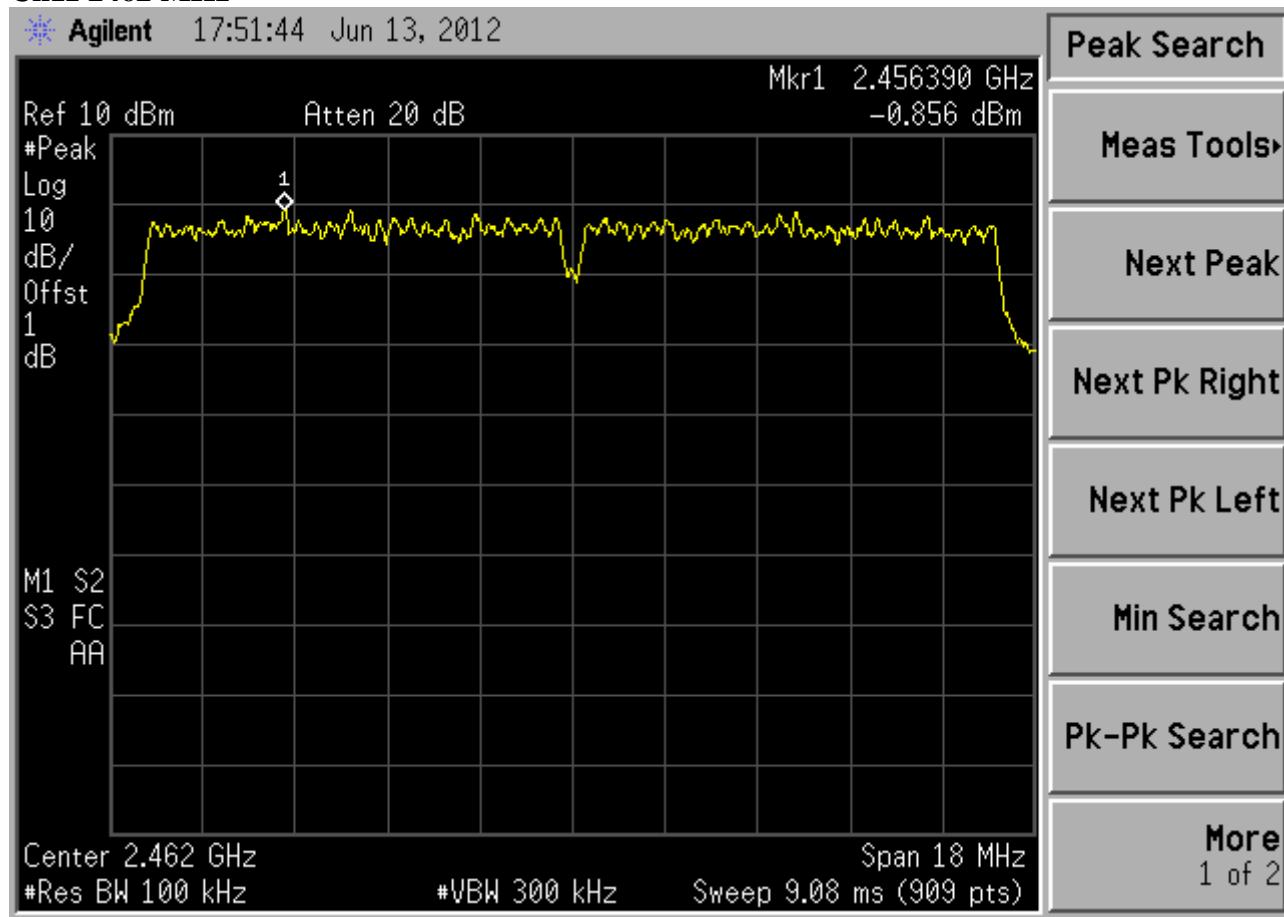

9 DEVIATION TO TEST SPECIFICATIONS

None.