FCC 47 CFR PART 15 SUBPART C

Report No.: T150304W03-RP1

TEST REPORT

For

1200Mbps 802.11AC AP Router

Model: AC-1200R

Trade Name: Air Live

Issued to

OvisLink Corp. 5F, No.6, Lane 130, Min-Chuan Rd., Hsin-Tien Dist., New Taipei City 231, Taiwan

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
http://www.ccsrf.com
service@ccsrf.com
Lagrand Date: March 23, 2015

Issued Date: March 23, 2015





Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Page 1 / 129 Rev. 00

Revision History

Report No.: T150304W03-RP1

ı		Issue		Effect	
ı	Rev.	Date	Revisions	Page	Revised By
	00	March 23, 2015	Initial Issue	ALL	Kelly Cheng

Page 2 Rev. 00

TABLE OF CONTENTS

1.	ΤŦ	EST RESULT CERTIFICATION	4
2.	ΕŲ	UT DESCRIPTION	5
		EST METHODOLOGY	
3.		EUT CONFIGURATION	
3.		EUT EXERCISE	
3.		GENERAL TEST PROCEDURES.	
3.		FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
3.		DESCRIPTION OF TEST MODES	
4.	IN	STRUMENT CALIBRATION	9
4.	1	MEASURING INSTRUMENT CALIBRATION	9
4.	2	MEASUREMENT EQUIPMENT USED	
4.	3	MEASUREMENT UNCERTAINTY	
5.	FA	ACILITIES AND ACCREDITATIONS	11
5.	1	FACILITIES	11
5.	2	EQUIPMENT	11
5.	3	TABLE OF ACCREDITATIONS AND LISTINGS	12
6.	SE	ETUP OF EQUIPMENT UNDER TEST	13
6.	1	SETUP CONFIGURATION OF EUT	13
6.	2	SUPPORT EQUIPMENT	13
7.	FC	CC PART 15.247 REQUIREMENTS	14
7.	1	6DB BANDWIDTH	14
7.	2	PEAK POWER	34
7.	3	AVERAGE POWER	
7.		BAND EDGES MEASUREMENT	
7.		PEAK POWER SPECTRAL DENSITY	
7.		SPURIOUS EMISSIONS	
7.		RADIATED EMISSIONS	
7.	8	POWERLINE CONDUCTED EMISSIONS	124
API	PE	NDIX I PHOTOGRAPHS OF TEST SETUP	127
API	PE	NDIX 1 - PHOTOGRAPHS OF EUT	

1. TEST RESULT CERTIFICATION

Applicant: OvisLink Corp.

5F, No.6, Lane 130, Min-Chuan Rd., Hsin-Tien Dist., New Taipei

Report No.: T150304W03-RP1

City 231, Taiwan

Equipment Under Test: 1200Mbps 802.11AC AP Router

Trade Name: Air Live

Model Number: AC-1200R

Date of Test: March 10 ~ 12, 2015

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart C	No non-compliance noted			

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by: Reviewed by:

Miller Lee

Section Manager

Compliance Certification Services Inc.

Killer Loe

Angel Cheng

Section Manager

Compliance Certification Services Inc.

Angel Chent

Page 4 Rev. 00

2. EUT DESCRIPTION

Product	1200Mbps 802.11AC AP Router	
Trade Name	Air Live	
Model Number	AC-1200R	
Model Discrepancy	N/A	
Received Date	March 04, 2015	
Power Adapter	Vdc from Power Adapter DVE / DSA-12PFA-09 FUS 120100 I/P: 100-240Vac, 50/60Hz, 0.5A O/P: +12Vdc, 1A	
Frequency Range	2412 ~ 2462 MHz	
Transmit Power	IEEE 802.11b mode: 21.77 dBm IEEE 802.11g mode: 25.25 dBm IEEE 802.11n HT 20 mode: 27.49 dBm IEEE 802.11n HT 40 mode: 24.62 dBm	
Modulation Technique	IEEE 802.11b mode: DSSS IEEE 802.11g mode: OFDM IEEE 802.11n HT 20 mode: OFDM IEEE 802.11n HT 40 mode: OFDM	
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 mode: 11 Channels IEEE 802.11n HT 40 mode: 7 Channels	
Antenna Specification	MAGLAYERS / EDA-1313-25GR2-A10-E Dipole Antenna / Gain: 1.81 dBi	

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>ODMAC1200R</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 5 Rev. 00

Report No.: T150304W03-RP1

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB558074.

Report No.: T150304W03-RP1

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 6 Rev. 00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Report No.: T150304W03-RP1

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 7 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (Model: AC-1200R) was found to emit the worst emissions and therefore had been tested under operating condition.

The EUT is a 2x2 configuration spatial MIMO (2Tx & 2Rx) without beam forming function that operate in double TX chains and double RX chains. The 2x2 configuration is implemented with two outside TX & RX chains (Chain 0 and 1).

Report No.: T150304W03-RP1

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate and cyclic delay diversity were chosen for full testing.

IEEE 802.11n HT 20 mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n HT 40 mode:

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Page 8 Rev. 00

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Report No.: T150304W03-RP1

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
Spectrum Analyzer	Agilent	E4446A	US42510252	11/23/2015		
Thermostatic/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/07/2015		
AC Power Source	EXTECH	6205	1140845	N.C.R		
DC Power Supply	ABM	8301HD	D011531	N.C.R		
Power Meter	Anritsu	ML2495A	1012009	06/03/2015		
Power Sensor	Anritsu	MA2411A	0917072	06/03/2015		
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/09/2015		

Wugu 966 Chamber A							
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due			
Spectrum Analyzer	Agilent	E4446A	US42510268	09/18/2015			
EMI Test Receiver	R&S	ESCI	100064	05/30/2015			
Bilog Antenna	Sunol Sciences	JB3	A030105	08/19/2015			
Horn Antenna	EMCO	3117	00055165	01/26/2016			
Horn Antenna	EMCO	3116	26370	12/25/2015			
Turn Table	CCS	CC-T-1F	N/A	N.C.R			
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R			
Controller	CCS	CC-C-1F	N/A	N.C.R			
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016			
Pre-Amplifier	EMC	EMC 01265	4035	08/09/2016			
Pre-Amplifier	MITEQ	AMF-6F-260400-40- 8P	985646	12/25/2015			
Coaxial Cable	Huber+Suhner	102	29212/2	12/25/2015			
Coaxial Cable	Huber+Suhner	102	29406/2	12/25/2015			
Test S/W		EZ-EMC (C	CS-3A1RE)				

Conducted Emission room # B						
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due		
EMI Test Receiver	R&S	ESCI	101073	09/18/2015		
LISN	R&S	ENV216	101054	05/18/2015		
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/25/2015		
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/12/2016		
Test S/W CCS-3A1-CE						

Page 9 Rev. 00

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Page 10 Rev. 00

Report No.: T150304W03-RP1

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
No.139, Wugong Rd., Wugu Dist., New Taipei City 24891, Taiwan (R.O.C.)
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 an CISPR Publication 22

Report No.: T150304W03-RP1

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 11 Rev. 00

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	IH('('	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12,2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method –47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	Testing Laboratory 1309
u anada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	Canada IC 2324G-1 IC 2324G-2

Report No.: T150304W03-RP1

Page 12 Rev. 00

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	TOSHIBA	Satellite M840	N/A	PPD-AR5B225	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Report No.: T150304W03-RP1

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 13 Rev. 00

7. FCC PART 15.247 REQUIREMENTS


7.1 6DB BANDWIDTH

LIMIT

According to \$15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Report No.: T150304W03-RP1

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. Set the RBW=100kHz the emission bandwidth, $VBW \ge 3 \times RBW$, Detector = Peak, Trace mode = max hold, Sweep = auto couple. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

TEST RESULTS

No non-compliance noted.

Page 14 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.3334		PASS
Mid	2437	10.3334	>500	PASS
High	2462	10.3334		PASS

Report No.: T150304W03-RP1

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.9166		PASS
Mid	2437	16.6666	>500	PASS
High	2462	16.75		PASS

Test mode: IEEE 802.11n HT 20 mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.8334		PASS
Mid	2437	17.8334	>500	PASS
High	2462	17.8334		PASS

Test mode: IEEE 802.11n HT 20 mode / Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.8334		PASS
Mid	2437	17.8334	>500	PASS
High	2462	17.8334		PASS

Test mode: IEEE 802.11n HT 40 mode / Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.8333		PASS
Mid	2437	36.9166	>500	PASS
High	2452	36.9166		PASS

Test mode: IEEE 802.11n HT 40 mode / Chain 1


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.5833		PASS
Mid	2437	36.5833	>500	PASS
High	2452	36.5		PASS

Page 15 Rev. 00

Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

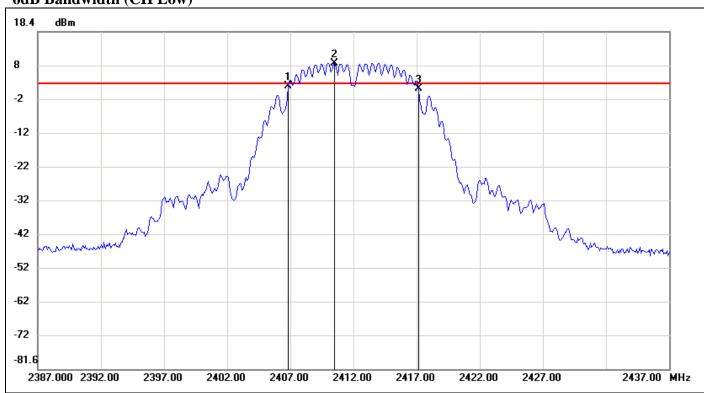

Report No.: T150304W03-RP1


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2406.8333	2.27	3.16	-0.89
2	2410.5000	9.16	3.16	6.00
3	2417.1667	1.47	3.16	-1.69

No.		△Frequency(MHz)	∆Level(dB)
1	mk3-mk1	10.3334	-0.8

Page 16 Rev. 00



6dB Bandwidth (CH Mid)

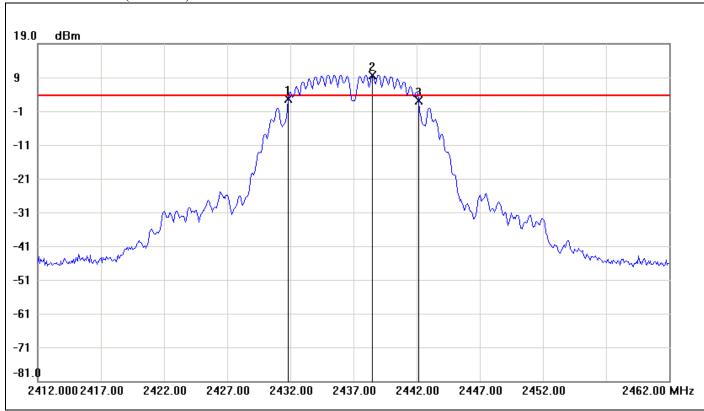


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2431.8333	2.70	3.70	-1.00
2	2438.5000	9.70	3.70	6.00
3	2442.1667	2.17	3.70	-1.53

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	10.3334	-0.53

Page 17 Rev. 00



6dB Bandwidth (CH High)

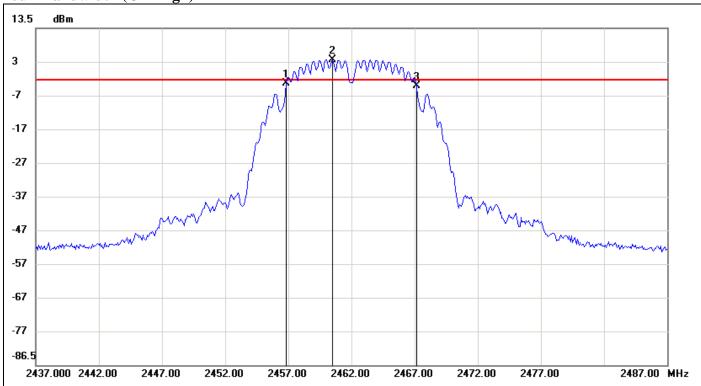


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2456.8333	-2.83	-1.95	-0.88
2	2460.5000	4.05	-1.95	6.00
3	2467.1667	-3.57	-1.95	-1.62

No.		ΔFrequency(MHz)	∆Level(dB)
1	mk3-mk1	10.3334	-0.74

Page 18 Rev. 00

IEEE 802.11g mode

6dB Bandwidth (CH Low)

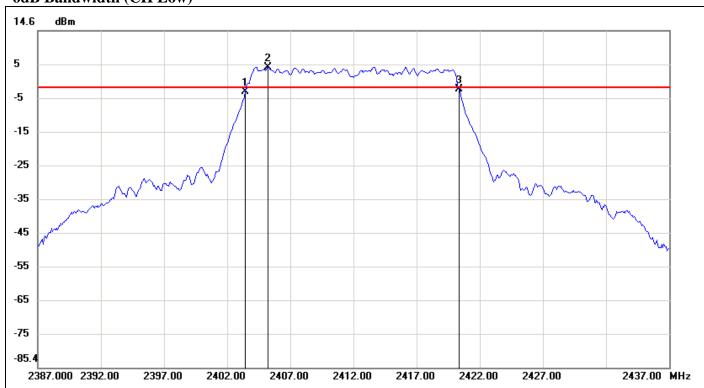


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.4167	-3.60	-2.28	-1.32
2	2405.2500	3.72	-2.28	6.00
3	2420.3333	-2.71	-2.28	-0.43

No.		ΔFrequency (MHz)	∆Level(dB)
1	mk3-mk1	16.9166	0.89

Page 19 Rev. 00



6dB Bandwidth (CH Mid)

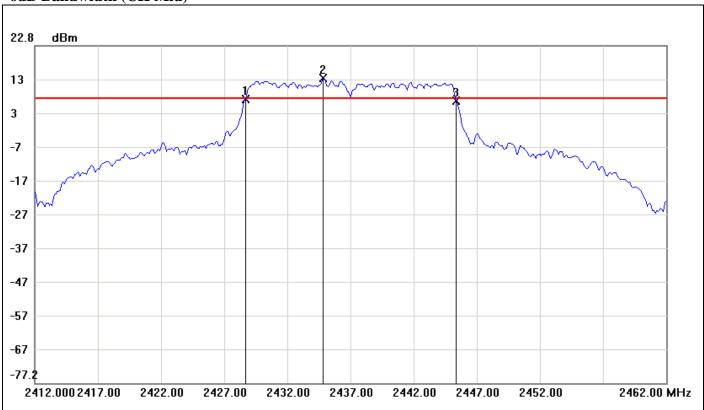


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.6667	6.83	7.07	-0.24
2	2434.8333	13.07	7.07	6.00
3	2445.3333	6.41	7.07	-0.66

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	16.6666	-0.42

Page 20 Rev. 00

6dB Bandwidth (CH High)

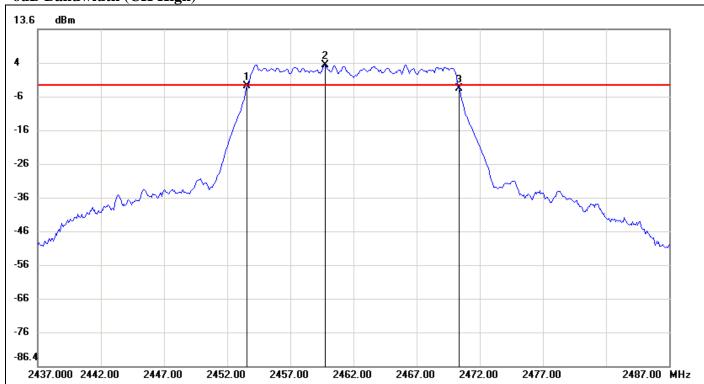


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.5833	-3.18	-2.87	-0.31
2	2459.7500	3.13	-2.87	6.00
3	2470.3333	-3.98	-2.87	-1.11

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	16.75	-0.8

Page 21 Rev. 00

IEEE 802.11n HT 20 mode / Chain 0

6dB Bandwidth (CH Low)

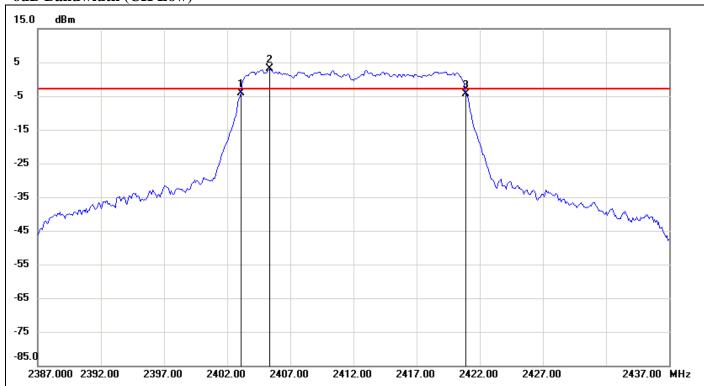


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.0833	-4.09	-2.86	-1.23
2	2405.3333	3.14	-2.86	6.00
3	2420.9167	-4.39	-2.86	-1.53

No.		ΔFrequency(MHz)	∆Level(dB)
1	mk3-mk1	17.8334	-0.3

Page 22 Rev. 00

6dB Bandwidth (CH Mid)

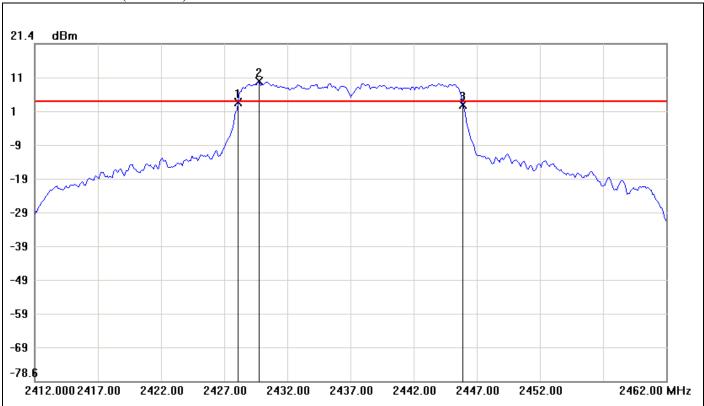


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0833	4.01	4.29	-0.28
2	2429.7500	10.29	4.29	6.00
3	2445.9167	3.43	4.29	-0.86

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.8334	-0.58

Page 23 Rev. 00

6dB Bandwidth (CH High)

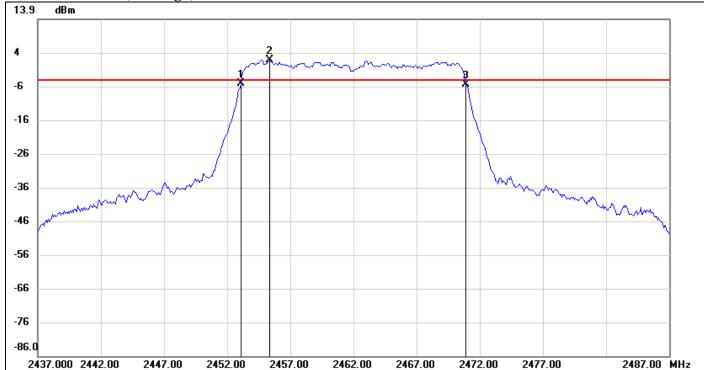


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.0833	-5.07	-4.05	-1.02
2	2455.3333	1.95	-4.05	6.00
3	2470.9167	-5.30	-4.05	-1.25

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.8334	-0.23

Page 24 Rev. 00 **IEEE 802.11n HT 20 mode / Chain 1**

6dB Bandwidth (CH Low)

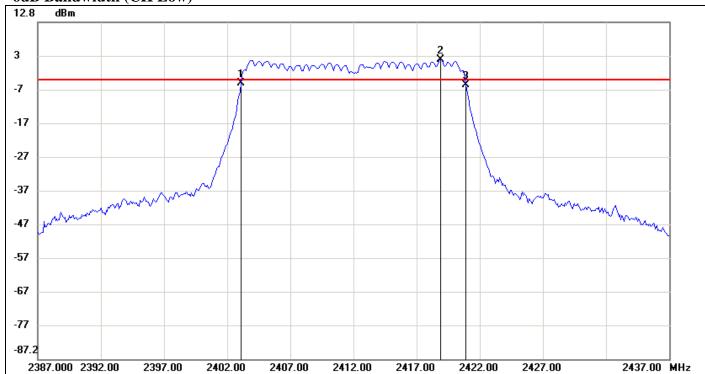


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.0833	-5.19	-4.38	-0.81
2	2418.9167	1.62	-4.38	6.00
3	2420.9167	-5.87	-4.38	-1.49

No.		△Frequency(MHz)	∆Level(dB)
1	mk3-mk1	17.8334	-0.68

Page 25 Rev. 00

6dB Bandwidth (CH Mid)

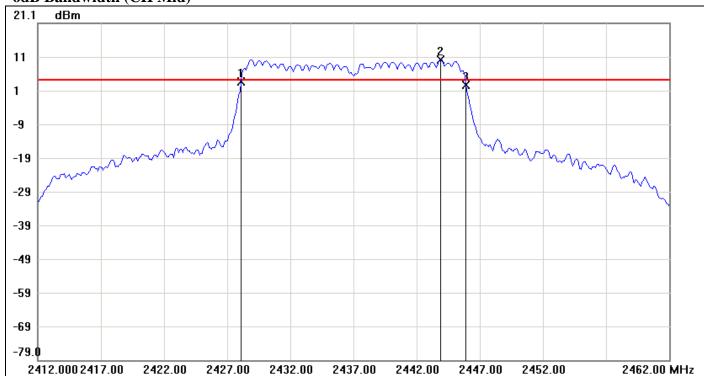


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2428.0833	3.72	4.21	-0.49
2	2443.9167	10.21	4.21	6.00
3	2445.9167	2.78	4.21	-1.43

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.8334	-0.94

Page 26 Rev. 00



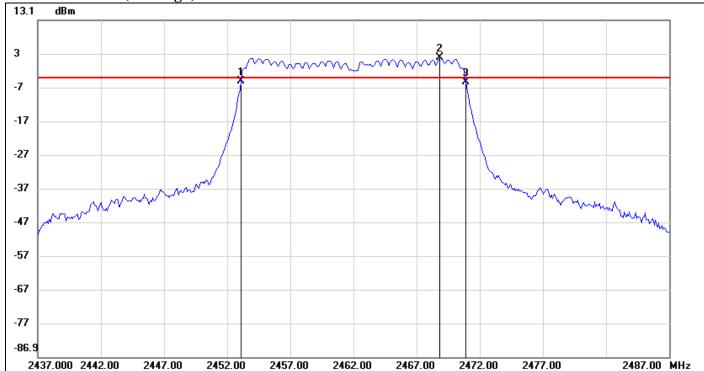


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2453.0833	-4.94	-4.04	-0.90
2	2468.8333	1.96	-4.04	6.00
3	2470.9167	-5.23	-4.04	-1.19

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	17.8334	-0.29

Page 27 Rev. 00

IEEE 802.11n HT 40 mode / Chain 0

6dB Bandwidth (CH Low)

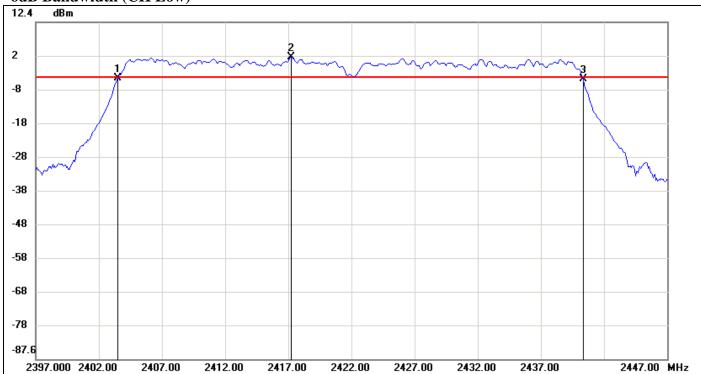


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.5000	-4.15	-3.83	-0.32
2	2417.2500	2.17	-3.83	6.00
3	2440.3333	-4.50	-3.83	-0.67

No.		ΔFrequency(MHz)	∆Level(dB)
1	mk3-mk1	36.8333	-0.35

Page 28 Rev. 00

6dB Bandwidth (CH Mid)

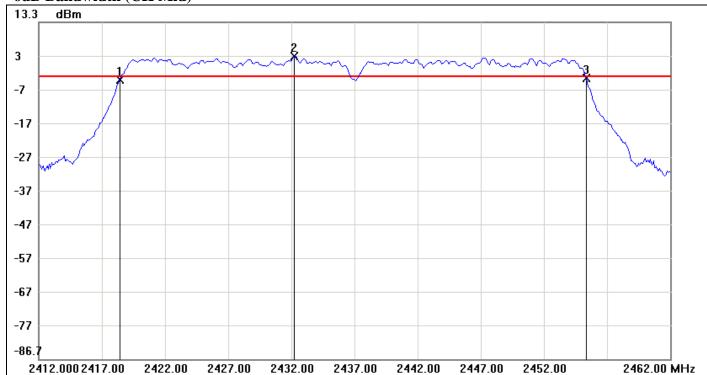


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2418.4167	-3.80	-2.93	-0.87
2	2432.2500	3.07	-2.93	6.00
3	2455.3333	-3.32	-2.93	-0.39

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	36.9166	0.48

Page 29 Rev. 00

6dB Bandwidth (CH High)

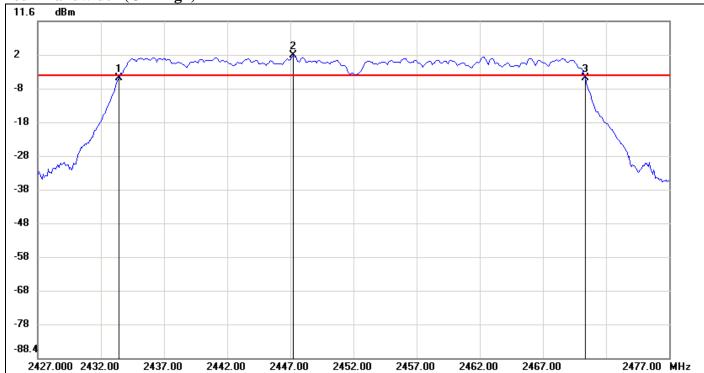

Report No.: T150304W03-RP1


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.4167	-5.13	-4.55	-0.58
2	2447.2500	1.45	-4.55	6.00
3	2470.3333	-5.22	-4.55	-0.67

No.		ΔFrequency(MHz)	ΔLevel(dB)
1	mk3-mk1	36.9166	-0.09

Page 30 Rev. 00

IEEE 802.11n HT 40 mode / Chain 1

6dB Bandwidth (CH Low)

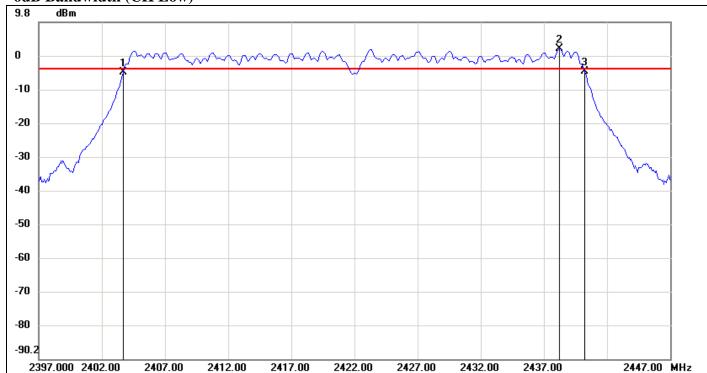


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2403.6667	-5.08	-4.18	-0.90
2	2438.2500	1.82	-4.18	6.00
3	2440.2500	-4.87	-4.18	-0.69

No		ΔFrequency(MHz)	∆Level(dB)	
1	mk3-mk1	36.5833	0.21	

Page 31 Rev. 00

6dB Bandwidth (CH Mid)

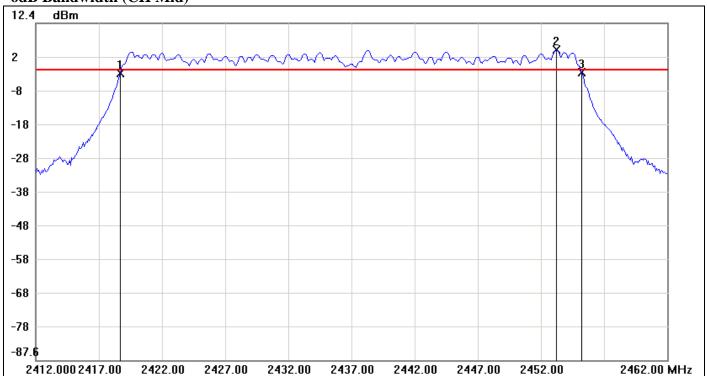


Report No.: T150304W03-RP1

No.	o. Frequency(MHz) Result(dBm)		Limit(dBm)	Margin(dBm)	
1	2418.6667	-2.37	-1.50	-0.87	
2	2453.2500	4.50	-1.50	6.00	
3	2455.2500	-2.29	-1.50	-0.79	

No.		ΔFrequency(MHz)	∆Level(dB)	
1	mk3-mk1	36.5833	0.08	

Page 32 Rev. 00

6dB Bandwidth (CH High)

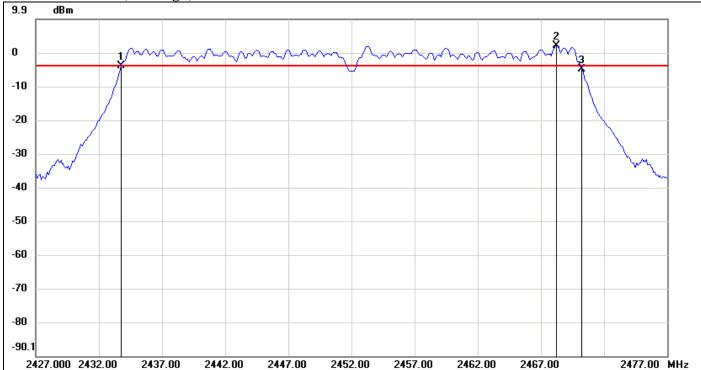

No.	No. Frequency(MHz) Result(dBm)		Limit(dBm)	Margin(dBm)	
1	2433.7500	-3.99	-3.98	-0.01	
2	2468.2500	2.02	-3.98	6.00	
3	2470.2500	-4.87	-3.98	-0.89	

No.		ΔFrequency(MHz)	ΔLevel(dB)	
1	mk3-mk1	36.5	-0.88	

Page 33 Rev. 00

7.2 PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

Report No.: T150304W03-RP1

- 1. According to \$15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

Page 34 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	21.77	0.1503		PASS
Mid	2437	21.47	0.1403	30	PASS
High	2462	21.25	0.1334		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	23.39	0.2183		PASS
Mid	2437	25.25	0.3350	30	PASS
High	2462	23.94	0.2477		PASS

Test mode: IEEE 802.11n HT 20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	23.11	20.72	25.09	0.3228		PASS
Mid	2437	24.33	24.63	27.49	0.5610	30	PASS
High	2462	22.74	21.23	25.06	0.3206		PASS

Test mode: IEEE 802.11n HT 40 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2422	20.01	19.02	22.55	0.1799		PASS
Mid	2437	22.12	21.03	24.62	0.2897	30	PASS
High	2452	21.95	20.78	24.41	0.2761		PASS

Remark: Total Output Power $(w) = Chain \ 0 \ (10^{Output Power}/10)/1000) + Chain \ 1 \ (10^{Output Power}/10)/1000)$

Page 35 Rev. 00


Report No.: T150304W03-RP1

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the avg power detection.

Page 36 Rev. 00

Report No.: T150304W03-RP1

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	18.66	0.0735
Mid	2437	18.23	0.0665
High	2462	17.89	0.0615

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	16.09	0.0406
Mid	2437	20.90	0.1230
High	2462	16.04	0.0402

Test mode: IEEE 802.11n HT 20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2412	15.64	12.52	17.36	0.0545
Mid	2437	18.70	18.49	21.61	0.1449
High	2462	14.43	13.03	16.80	0.0479

Test mode: IEEE 802.11n HT 40 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Output Power (dBm)	Output Power (W)
Low	2422	11.13	10.23	13.71	0.0235
Mid	2437	14.06	12.52	16.37	0.0434
High	2452	13.52	12.31	15.97	0.0395

Remark: Total Output Power $(w) = Chain \ 0 \ (10^{Output Power} / 10) / 1000) + Chain \ 1 \ (10^{Output Power} / 10) / 1000)$

Page 37 Rev. 00

Report No.: T150304W03-RP1

7.4 BAND EDGES MEASUREMENT


LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).


Report No.: T150304W03-RP1

Test Configuration

For Radiated

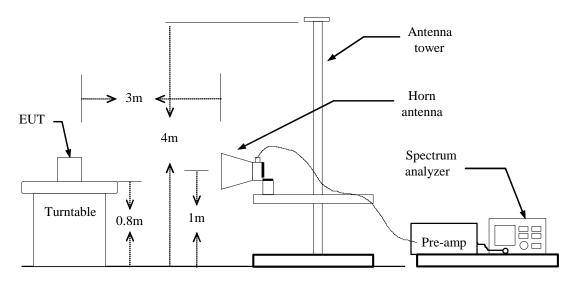

For Conducted



Page 38 Rev. 00

TEST PROCEDURE

For Radiated

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

Report No.: T150304W03-RP1

- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW= 300Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

Page 39 Rev. 00

Band Edges (IEEE 802.11b mode / CH Low)

Polarity: Vertical

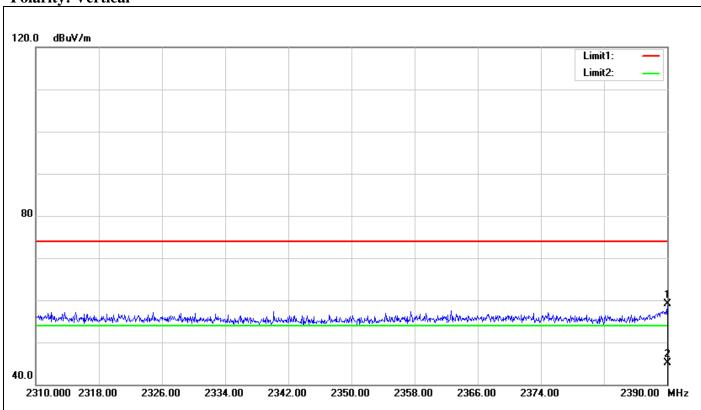


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2390.000	62.79	-3.77	59.02	74.00	-14.98	100	358	peak
2	2390.000	48.93	-3.77	45.16	54.00	-8.84	100	358	AVG

Page 40 Rev. 00

Polarity: Horizontal

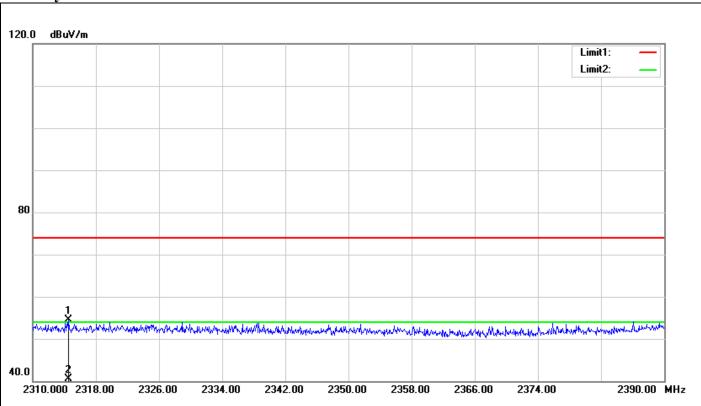


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2314.560	58.72	-4.27	54.45	74.00	-19.55	100	270	peak
2	2314.560	44.69	-4.27	40.42	54.00	-13.58	100	270	AVG

Page 41 Rev. 00

Band Edges (IEEE 802.11b mode / CH High)

Polarity: Vertical

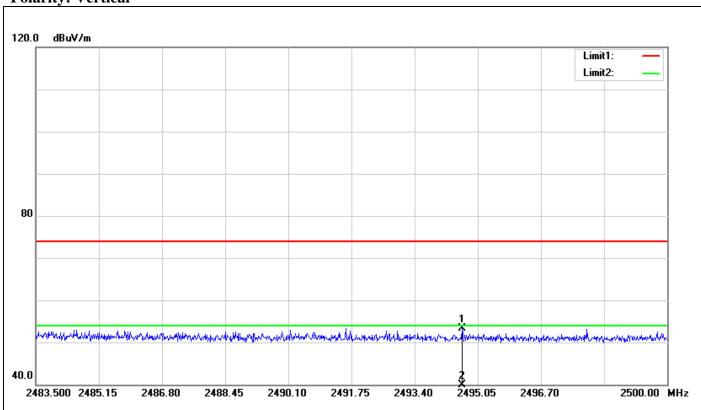


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2494.637	56.45	-3.17	53.28	74.00	-20.72	100	140	peak
2	2494.637	42.68	-3.17	39.51	54.00	-14.49	100	140	AVG

Page 42 Rev. 00

Polarity: Horizontal

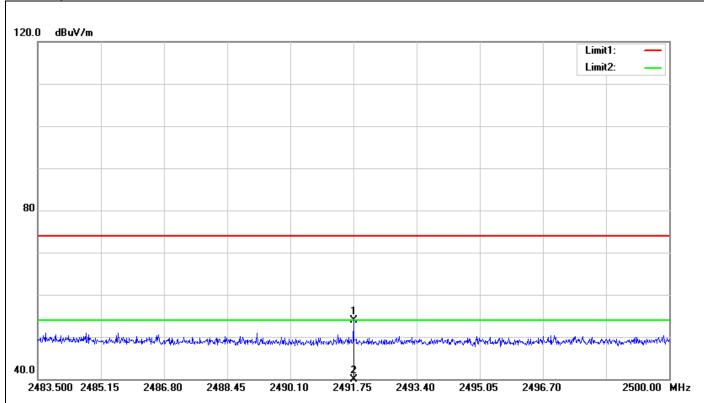


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2491.750	57.02	-3.19	53.83	74.00	-20.17	100	301	peak
2	2491.750	40.16	-3.19	36.97	54.00	-17.03	100	301	AVG

Page 43 Rev. 00

Band Edges (IEEE 802.11g mode / CH Low)

Polarity: Vertical

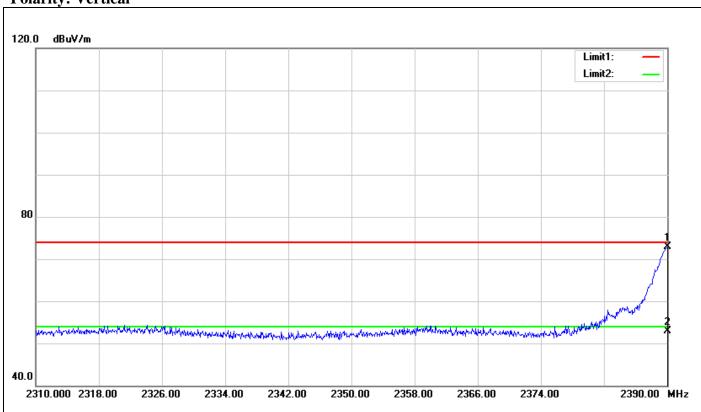


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2390.000	76.62	-3.77	72.85	74.00	-1.15	100	0	peak
2	2390.000	56.66	-3.77	52.89	54.00	-1.11	100	0	AVG

Page 44 Rev. 00

D 1 '4 II ' 4 I

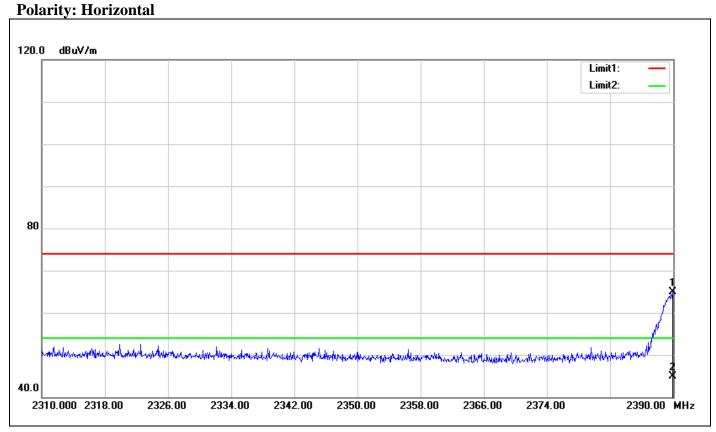


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.920	68.61	-3.77	64.84	74.00	-9.16	100	5	peak
2	2389.920	48.71	-3.77	44.94	54.00	-9.06	100	5	AVG

Page 45 Rev. 00

Band Edges (IEEE 802.11g mode / CH High)

Polarity: Vertical

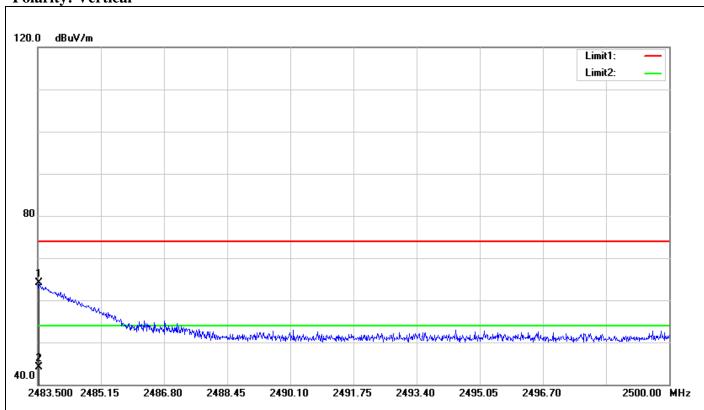


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.533	67.32	-3.27	64.05	74.00	-9.95	100	49	peak
2	2483.533	47.44	-3.27	44.17	54.00	-9.83	100	49	AVG

Page 46 Rev. 00

Polarity: Horizontal

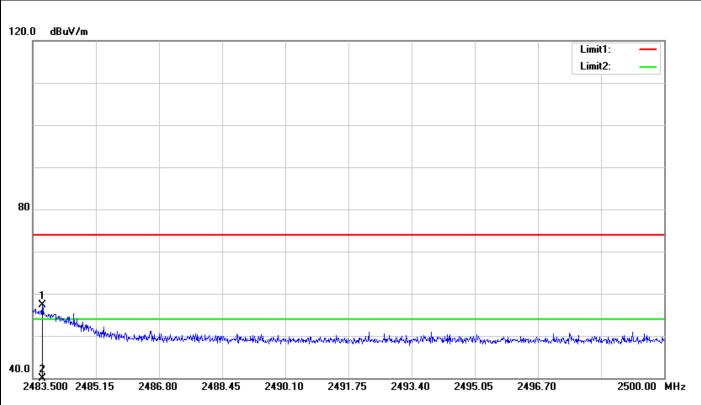


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.747	60.57	-3.27	57.30	74.00	-16.70	100	200	peak
2	2483.747	42.76	-3.27	39.49	54.00	-14.51	100	200	AVG

Page 47 Rev. 00

Band Edges (IEEE 802.11n HT 20 mode / CH Low)

Polarity: Vertical

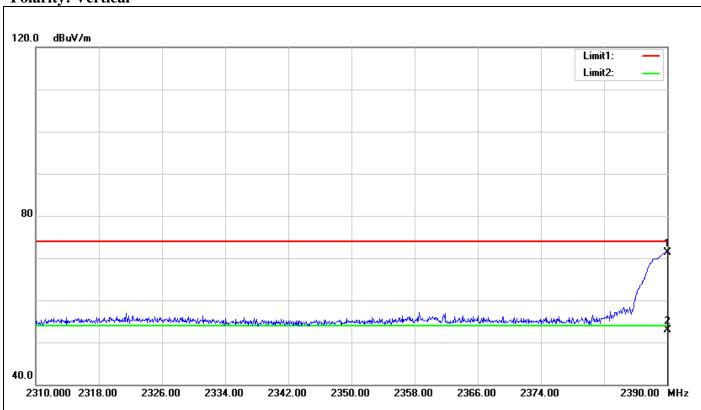


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2390.000	75.16	-3.77	71.39	74.00	-2.61	100	113	peak
2	2390.000	56.70	-3.77	52.93	54.00	-1.07	100	113	AVG

Page 48 Rev. 00

Polarity: Horizontal

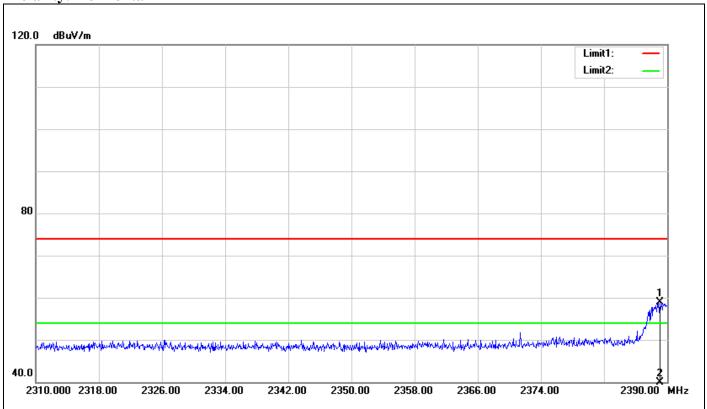


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.040	62.74	-3.78	58.96	74.00	-15.04	100	248	peak
2	2389.040	43.54	-3.78	39.76	54.00	-14.24	100	248	AVG

Page 49 Rev. 00

Band Edges (IEEE 802.11n HT 20 mode / CH High)

Polarity: Vertical

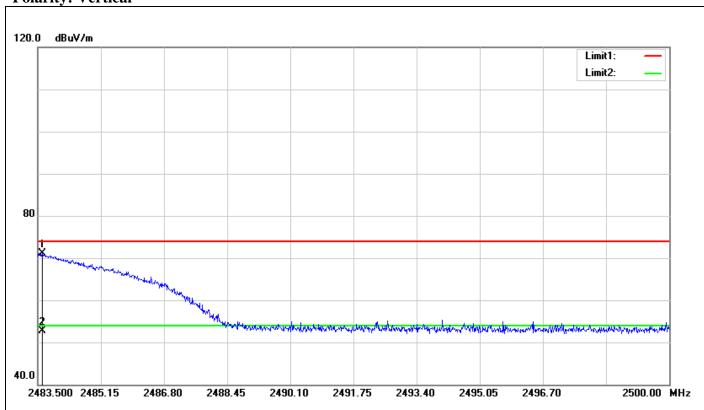


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.615	74.42	-3.27	71.15	74.00	-2.85	100	248	peak
2	2483.615	55.95	-3.27	52.68	54.00	-1.32	100	248	AVG

Page 50 Rev. 00

FCC ID: ODMAC1200R Report No.: T150304W03-RP1



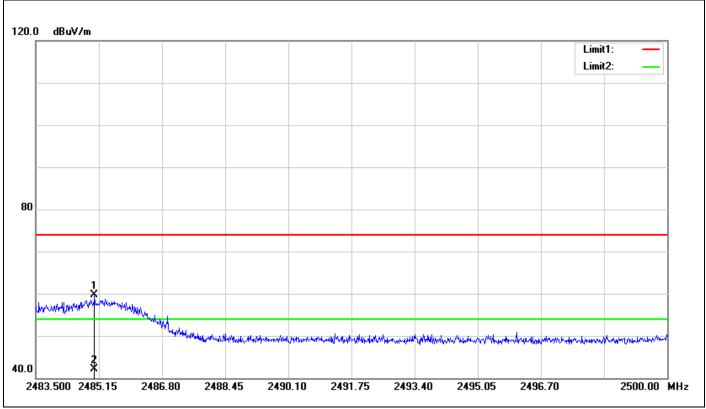


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2485.035	63.05	-3.26	59.79	74.00	-14.21	100	240	peak
2	2485.035	45.28	-3.26	42.02	54.00	-11.98	100	240	AVG

Page 51 Rev. 00

Band Edges (IEEE 802.11n HT 40 mode / CH Low)

Polarity: Vertical

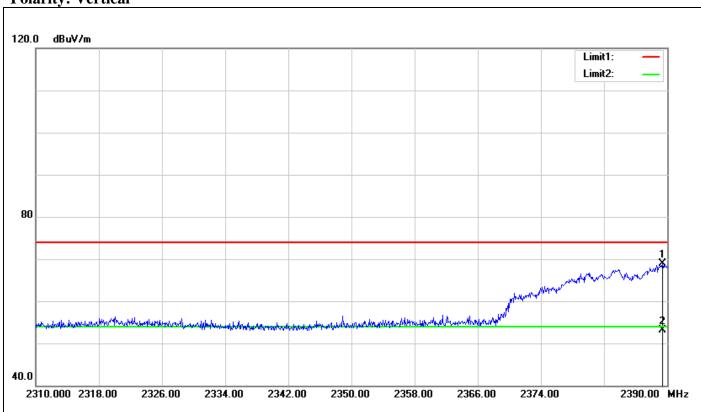


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.440	72.71	-3.78	68.93	74.00	-5.07	100	1	peak
2	2389.440	56.79	-3.78	53.01	54.00	-0.99	100	1	AVG

Page 52 Rev. 00


Polarity: Horizontal

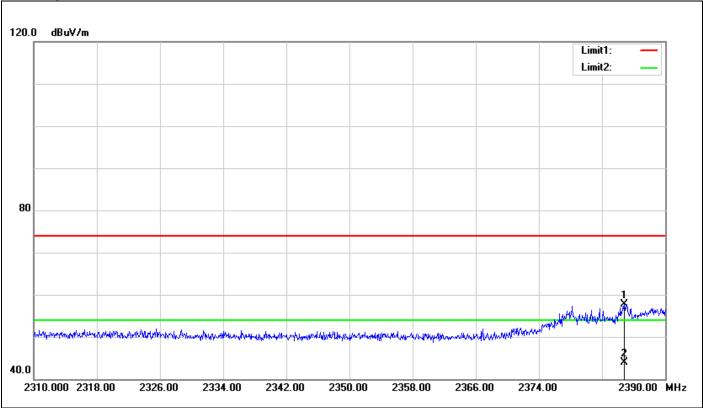

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2384.800	61.60	-3.82	57.78	74.00	-16.22	100	348	peak
2	2384.800	47.79	-3.82	43.97	54.00	-10.03	100	348	AVG

Page 53 Rev. 00 Band Edges (IEEE 802.11n HT 40 mode / CH High)

Polarity: Vertical

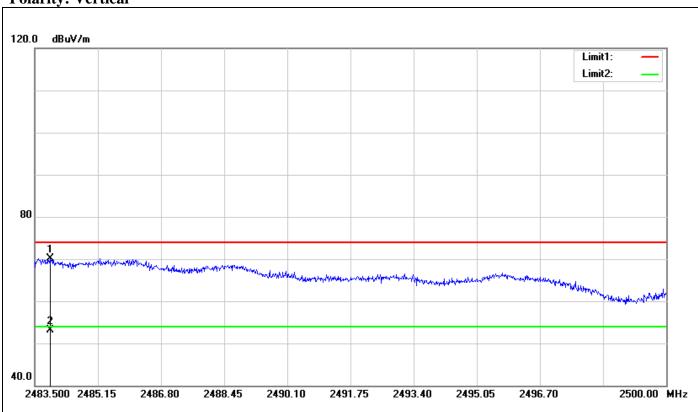


Report No.: T150304W03-RP1

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2483.912	73.37	-3.27	70.10	74.00	-3.90	100	100	peak
2	2483.912	56.39	-3.27	53.12	54.00	-0.88	100	100	AVG

Page 54 Rev. 00




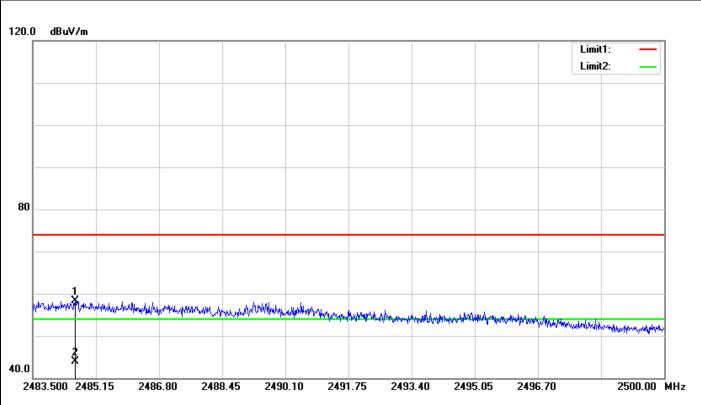

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.606	61.57	-3.26	58.31	74.00	-15.69	100	31	peak
2	2484.606	47.14	-3.26	43.88	54.00	-10.12	100	31	AVG

Page 55 Rev. 00 **Test Plot**

Conducted Band Edges (IEEE 802.11b mode / CH Low)

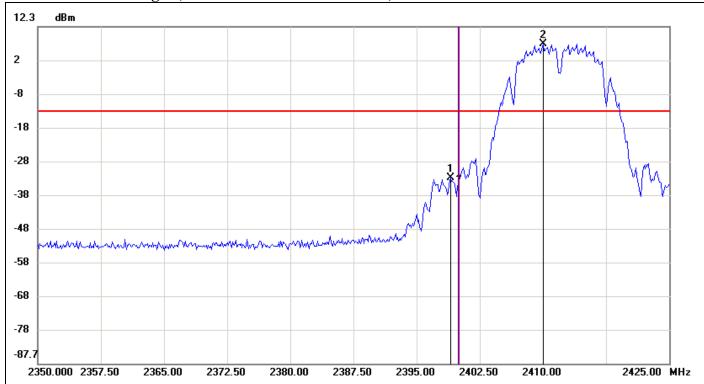


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	1 2399.0000		-12.85	-19.78	
2	2410.0000	7.15	-12.85	20.00	

Page 56 Rev. 00




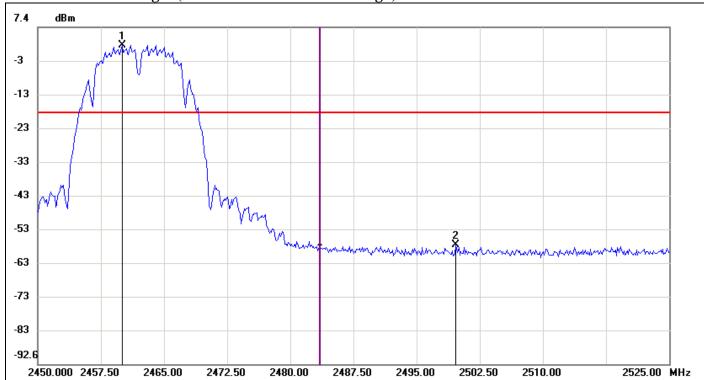

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	1 2460.0000 2 2499.6250		-17.96	20.00	
2			-17.96	-39.17	

Page 57 Rev. 00




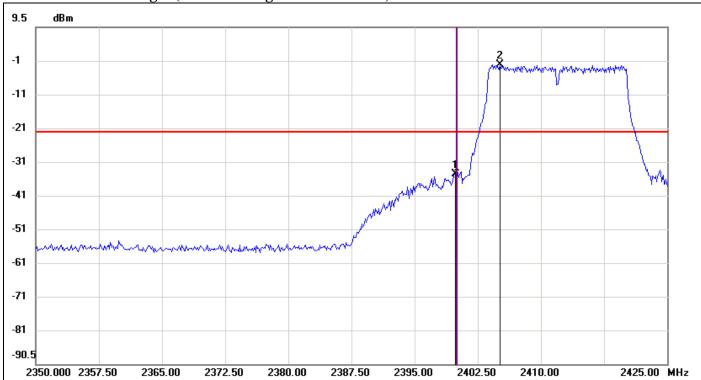

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	2399.8750	-34.02	-21.62	-12.40	
2	2 2405.1250		-21.62	20.00	

Page 58 Rev. 00


Conducted Band Edges (IEEE 802.11g mode / CH High)

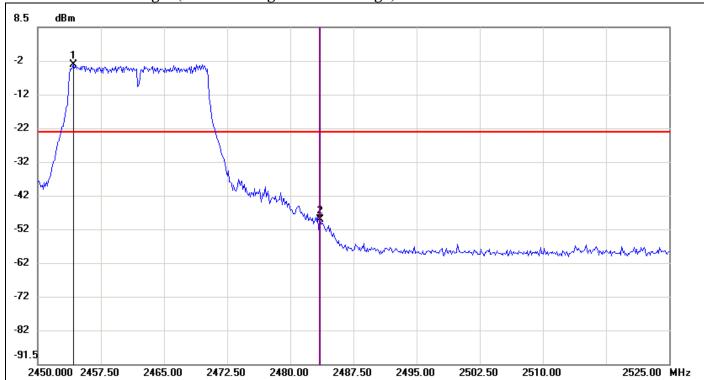

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	2454.2500	-2.62	-22.62	20.00	
2	2483.5000	-48.70	-22.62	-26.08	


Page 59 Rev. 00

Conducted Band Edges (IEEE 802.11n HT 20 mode / CH Low / Chain 0)

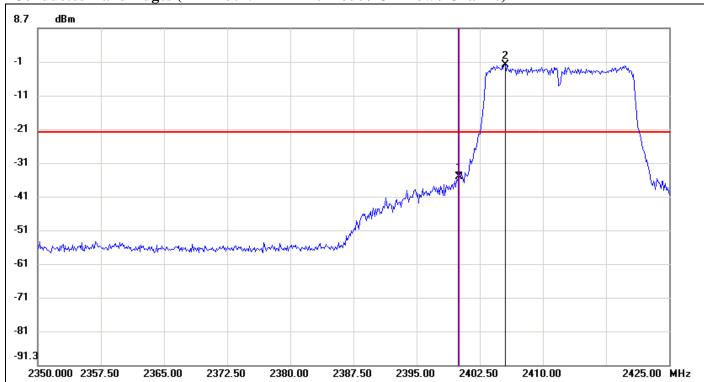

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2400.0000		-35.38	-22.27	-13.11	
2	2405.5000	-2.27	-22.27	20.00	

Page 60 Rev. 00 Conducted Band Edges (IEEE 802.11n HT 20 mode / CH High / Chain 0)

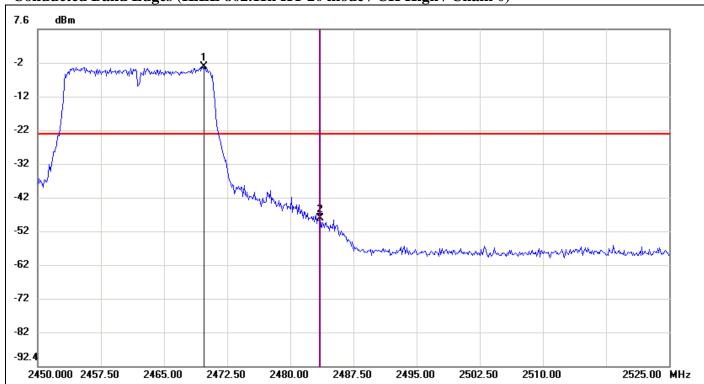


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2469.7500		-3.49	-23.49	20.00	
2 2483.5000		-48.56	-23.49	-25.07	

Page 61 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 20 mode / CH Low / Chain 1)

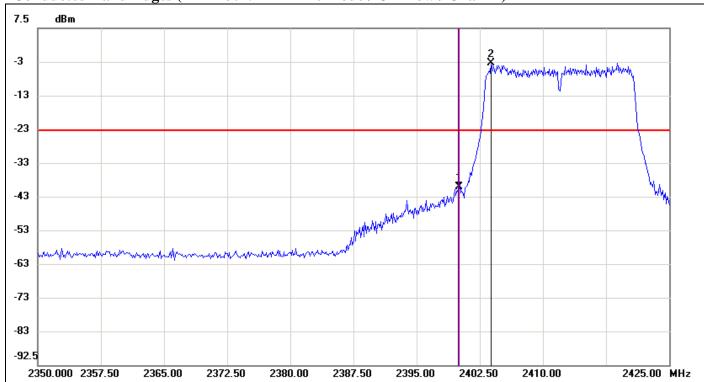

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2400.0000		-39.67	-22.90	-16.77	
2	2403.8750	-2.90	-22.90	20.00	

Page 62 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 20 mode / CH High / Chain 1)

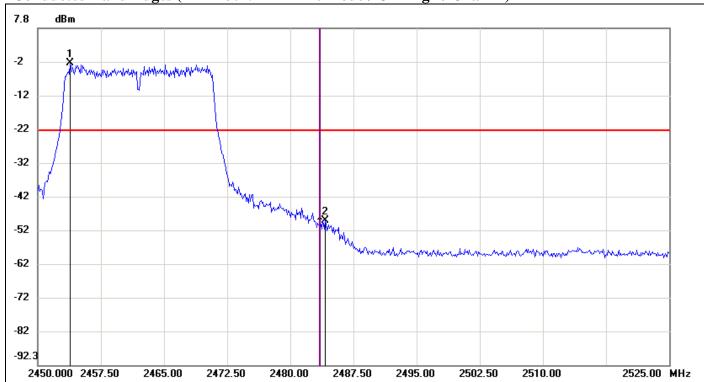

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	1 2453.8750		-22.70	20.00	
2	2484.1250	-49.30	-22.70	-26.60	

Page 63 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 40 mode / CH Low / Chain 0)

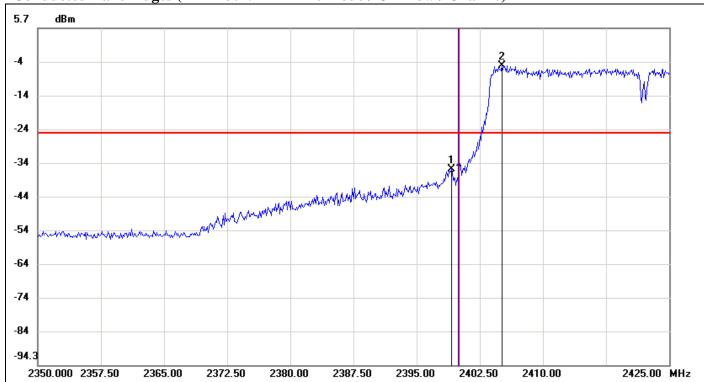

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2399.1250		-36.16	-25.39	-10.77	
2	2405.1250	-5.39	-25.39	20.00	

Page 64 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 40 mode / CH High / Chain 0)

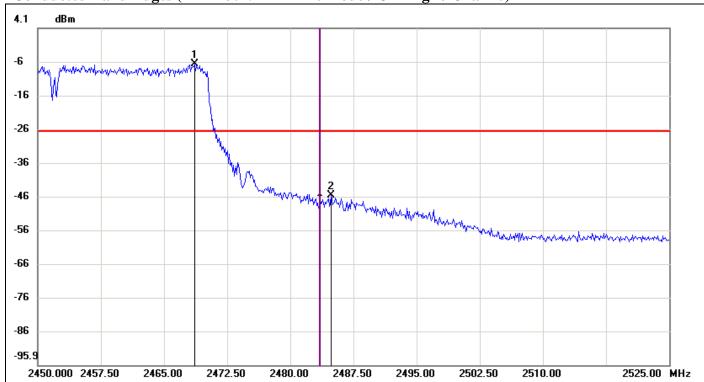

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2468.6250		-6.57	-26.57	20.00	
2	2484.8750	-45.44	-26.57	-18.87	

Page 65 Rev. 00


Conducted Band Edges (IEEE 802.11n HT 40 mode / CH Low / Chain 1)

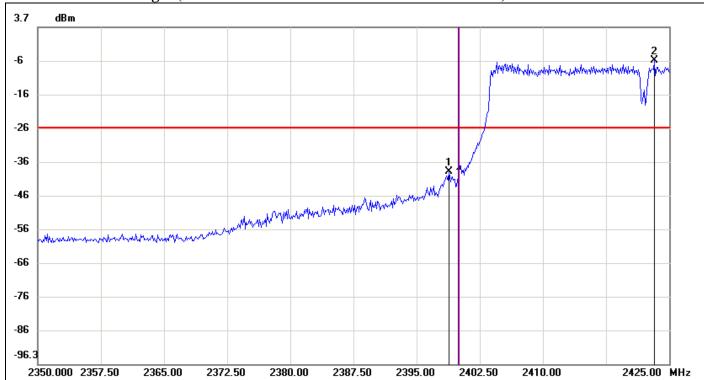

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1 2398.8750		-39.04	-26.22	-12.82	
2	2423.2500	-6.22	-26.22	20.00	

Page 66 Rev. 00

Conducted Band Edges (IEEE 802.11n HT 40 mode / CH High / Chain 1)

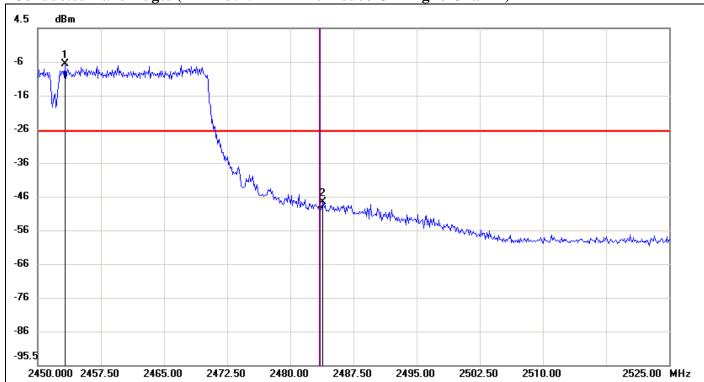

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)	
1	1 2453.2500		-26.02	20.00	
2	2483.8750	-47.01	-26.02	-20.99	

Page 67 Rev. 00

7.5 PEAK POWER SPECTRAL DENSITY


LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Report No.: T150304W03-RP1

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW = 100 kHz, VBW \geq 300 kHz, span to 1.5 times the DTS bandwidth, Detector = peak, Trace mode = max hold, Sweep = auto couple. Use the peak marker function to determine the maximum amplitude level within the RBW $\dot{}$ If measured value exceeds limit, reduce RBW (no less than 3 kHz).

TEST RESULTS

No non-compliance noted.

Page 68 Rev. 00

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-5.19		PASS
Mid	2437	-4.51	7.1	PASS
High	2462	-10.08		PASS

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.08		PASS
Mid	2437	-0.34	7.1	PASS
High	2462	-10.00		PASS

Test mode: IEEE 802.11n HT 20 mode

Channel	Frequency (MHz)	Chain 0 PPSD	Chain 1 PPSD	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-9.25	-11.31	-7.15	4.89	PASS
Mid	2437	-1.93	-3.48	0.37		PASS
High	2462	-10.46	-11.16	-7.79		PASS

Test mode: IEEE 802.11n HT 40 mode

Channel	Frequency (MHz)	Chain 0 PPSD	Chain 1 PPSD	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-12.00	-14.43	-10.04	4.89	PASS
Mid	2437	-11.46	-5.08	-4.18		PASS
High	2462	-12.69	-13.97	-10.27		PASS

Remark: Total PPSD (dBm) = 10*LOG(10^(Chain 0 PPSD / 10)+10^(Chain 1 PPSD /10))


Page 69 Rev. 00

Report No.: T150304W03-RP1

Test Plot

IEEE 802.11b mode

PPSD (CH Low)

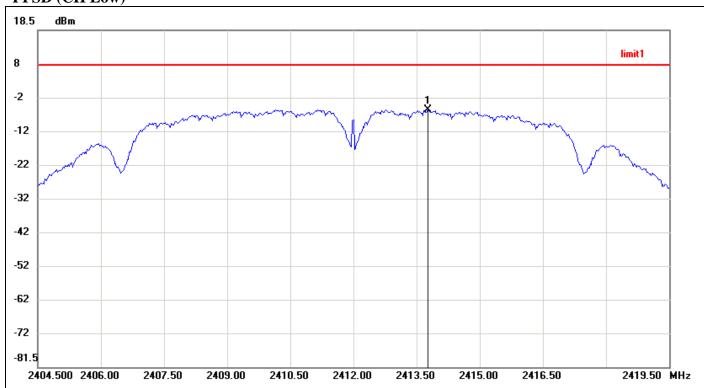


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2413.7750	-5.19	8.00	-13.19

Page 70 Rev. 00


PPSD (CH Mid)

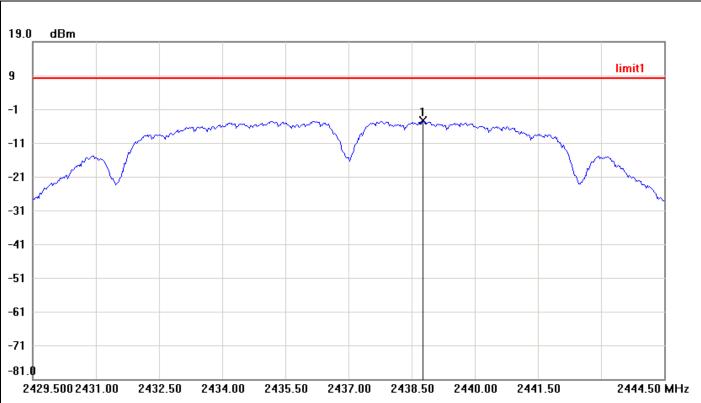

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2438.7750	-4.51	8.00	-12.51

Page 71 Rev. 00

PPSD (CH High)

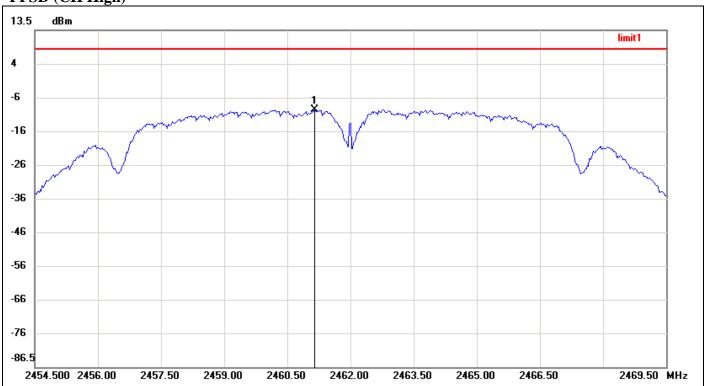


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2461.1500	-10.08	8.00	-18.08

Page 72 Rev. 00

IEEE 802.11g mode

PPSD (CH Low)

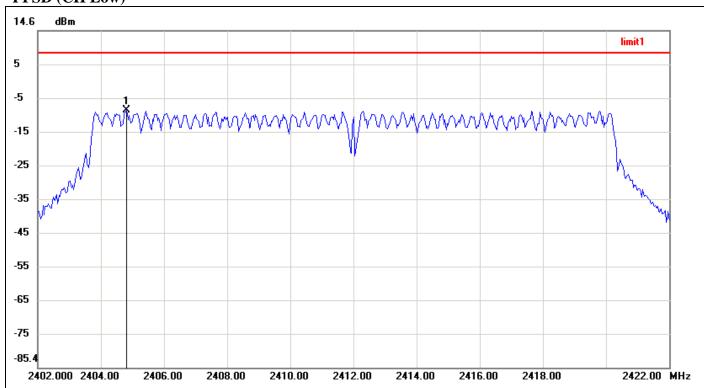


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2404.8000	-9.08	8.00	-17.08

Page 73 Rev. 00


PPSD (CH Mid)

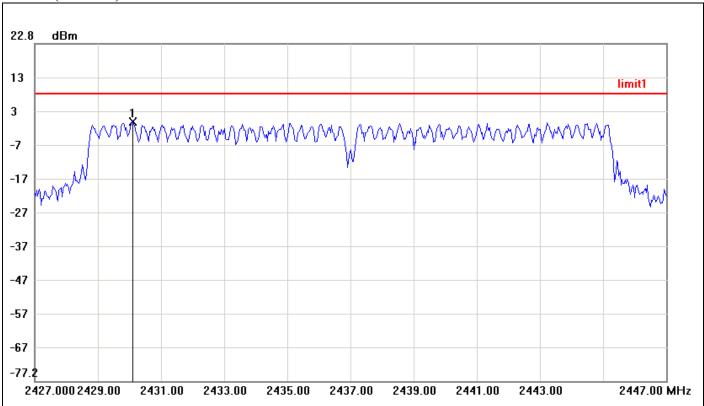

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2430.1000	-0.34	8.00	-8.34

Page 74 Rev. 00

PPSD (CH High)

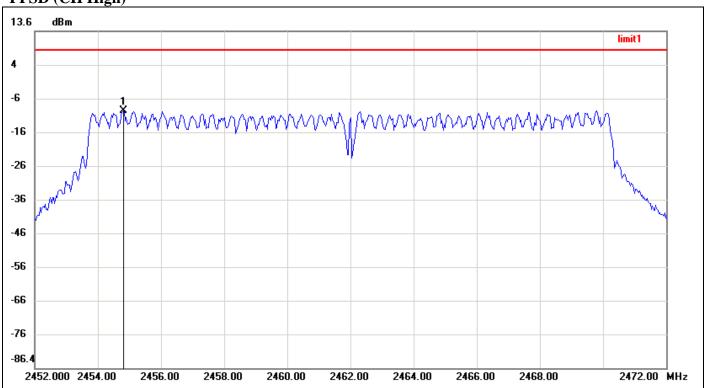


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2454.8000	-10.00	8.00	-18.00

Page 75 Rev. 00

IEEE 802.11n HT 20 mode / Chain 0

PPSD (CH Low)

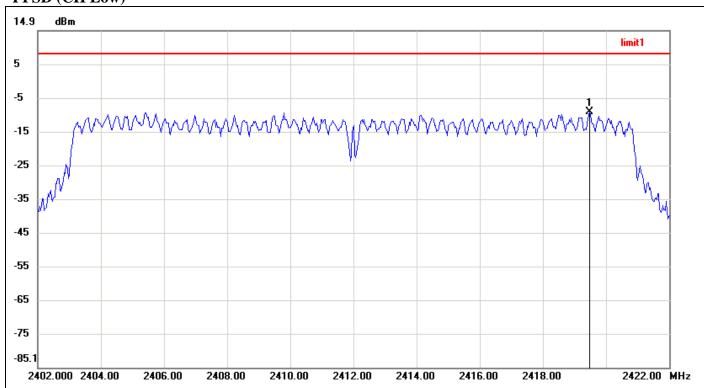


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2419.4667	-9.25	8.00	-17.25

Page 76 Rev. 00


PPSD (CH Mid)

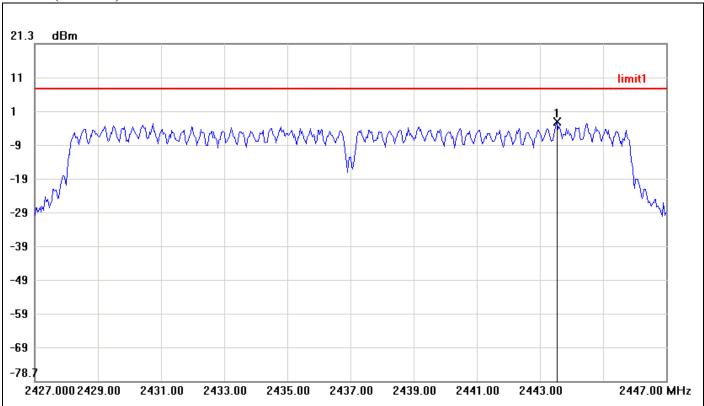

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2443.5333	-1.93	8.00	-9.93

Page 77 Rev. 00

PPSD (CH High)

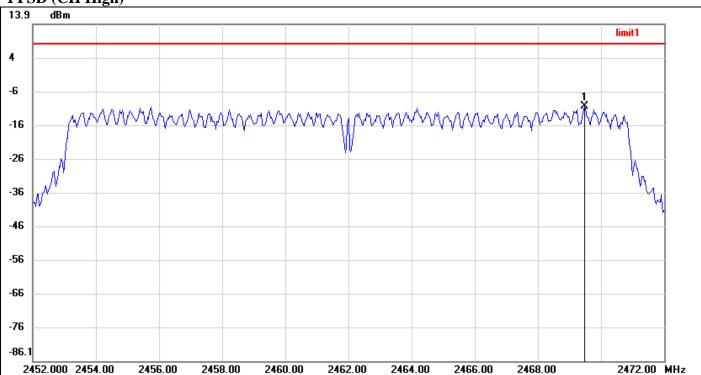


	No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
Ī	1	2469.4667	-10.46	8.00	-18.46

Page 78 Rev. 00

IEEE 802.11n HT 20 mode / Chain 1

PPSD (CH Low)

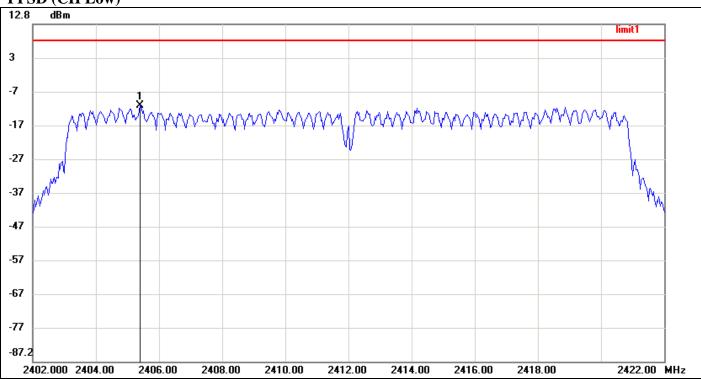


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2405.4000	-11.31	8.00	-19.31

Page 79 Rev. 00


PPSD (CH Mid)

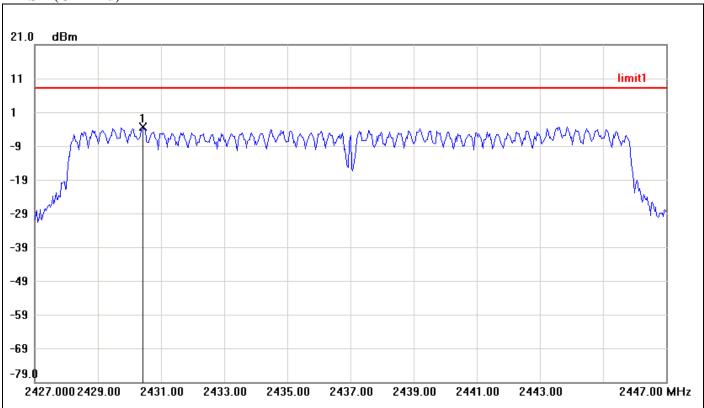

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2430.4333	-3.48	8.00	-11.48

Page 80 Rev. 00

PPSD (CH High)

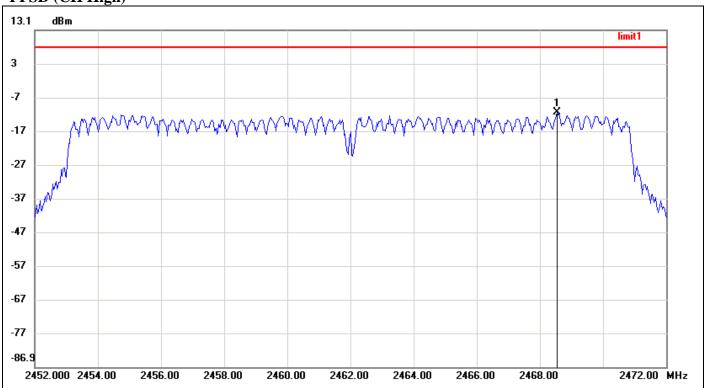


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2468.5333	-11.16	8.00	-19.16

Page 81 Rev. 00

IEEE 802.11n HT 40 mode / Chain 0

PPSD (CH Low)

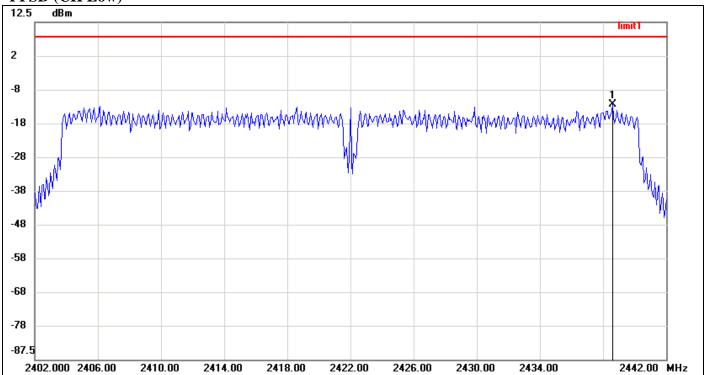


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2438.6000	-12.00	8.00	-20.00

Page 82 Rev. 00


PPSD (CH Mid)

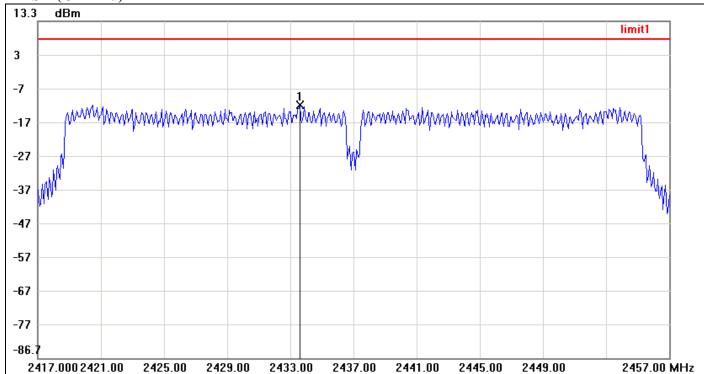

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2433.6000	-11.46	8.00	-19.46

Page 83 Rev. 00

PPSD (CH High)

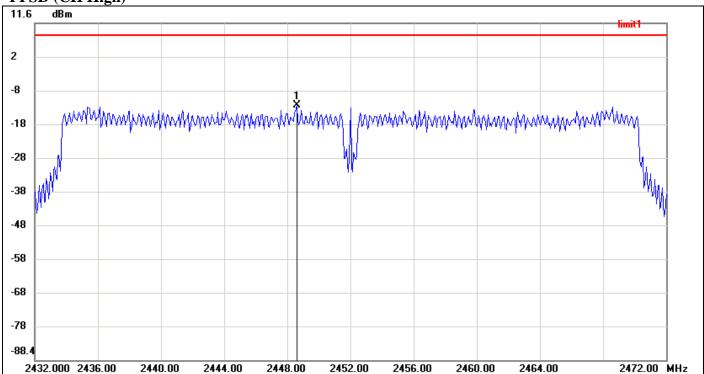


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2448.6000	-12.69	8.00	-20.69

Page 84 Rev. 00

IEEE 802.11n HT 40 mode / Chain 1

PPSD (CH Low)

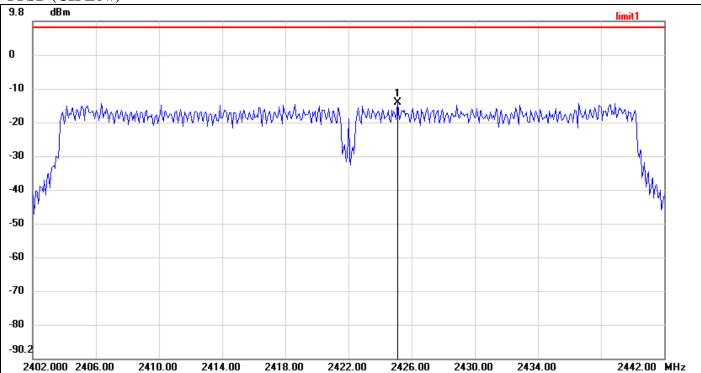


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2425.1333	-14.43	8.00	-22.43

Page 85 Rev. 00


PPSD (CH Mid)

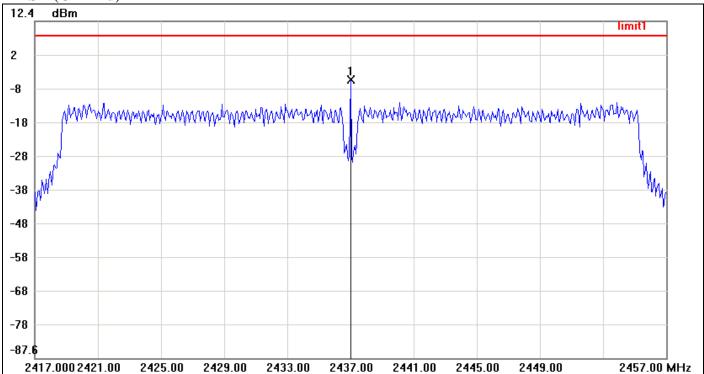

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2437.0000	-5.08	8.00	-13.08

Page 86 Rev. 00

PPSD (CH High)

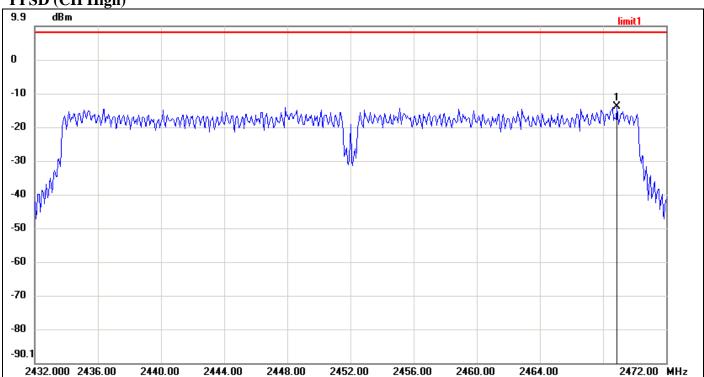

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2468.8667	-13.97	8.00	-21.97

Page 87 Rev. 00

7.6 SPURIOUS EMISSIONS


7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Report No.: T150304W03-RP1

Test Configuration



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. Set the RBW=100 kHz and VBW= 300 kHz. Investigate the frequency from 30 MHz to 26 GHz with L, M and H channels separately.

TEST RESULTS


No non-compliance noted.

Page 88 Rev. 00

Test Plot

IEEE 802.11b mode

CH Low

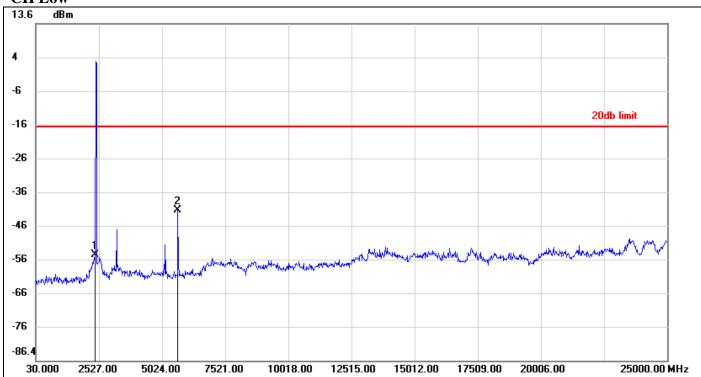

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-55.03	-16.94	-38.09
2	5648.2500	-41.73	-16.94	-24.79

Page 89 Rev. 00

CH Mid



Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2302.2700	-51.73	-11.86	-39.87
2	3251.1300	-48.41	-11.86	-36.55

Page 90 Rev. 00

CH High




Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-54.03	-22.14	-31.89
2	5173.8200	-33.73	-22.14	-11.55

Page 91 Rev. 00

IEEE 802.11g mode


CH Low

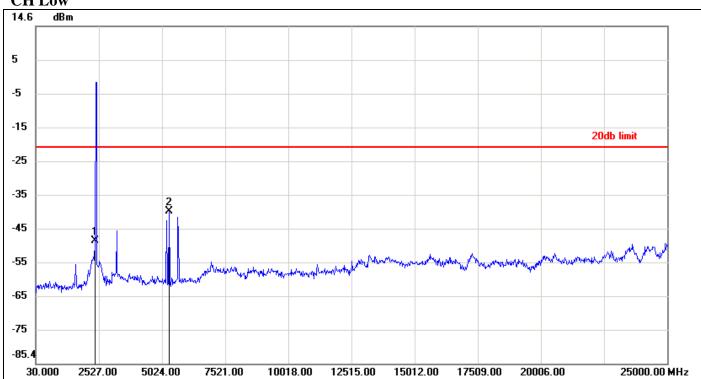

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-49.02	-21.28	-27.74
2	5298.6700	-40.37	-21.28	-19.09

Page 92 Rev. 00 CH Mid

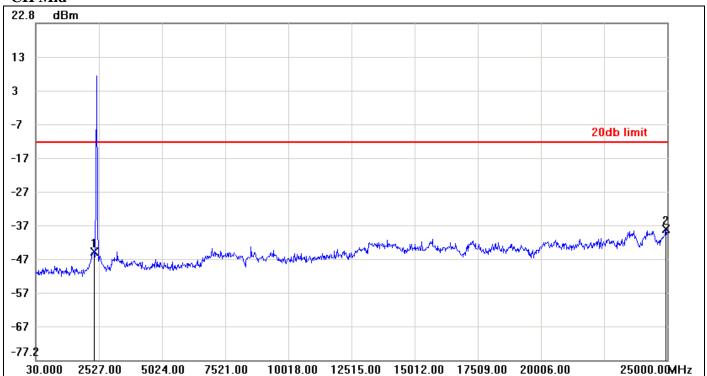


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-45.08	-12.58	-32.50
2	24950.0600	-38.43	-12.58	-25.85

Page 93 Rev. 00

Report No.: T150304W03-RP1

CH High

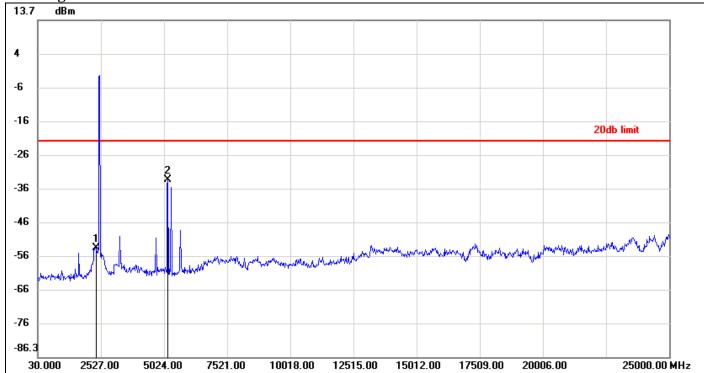


No.	Frequency(MI	Hz) Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-54.03	-22.18	-31.85
2	5173.8200	-33.73	-22.18	-11.55

Page 94 Rev. 00

IEEE 802.11n HT 20 mode / Chain 0

CH Low

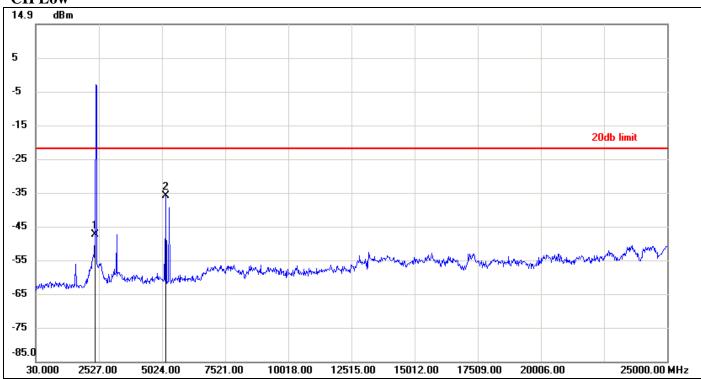


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-47.30	-21.96	-25.34
2	5173.8200	-35.88	-21.96	-13.92

Page 95 Rev. 00


CH Mid

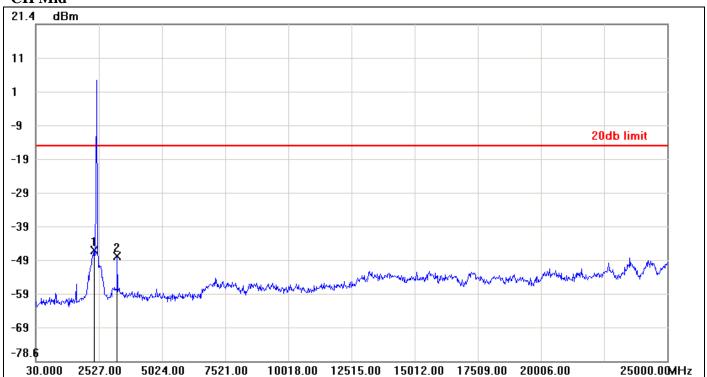

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-45.85	-14.66	-31.19
2	3251.1300	-47.42	-14.66	-32.76

Page 96 Rev. 00

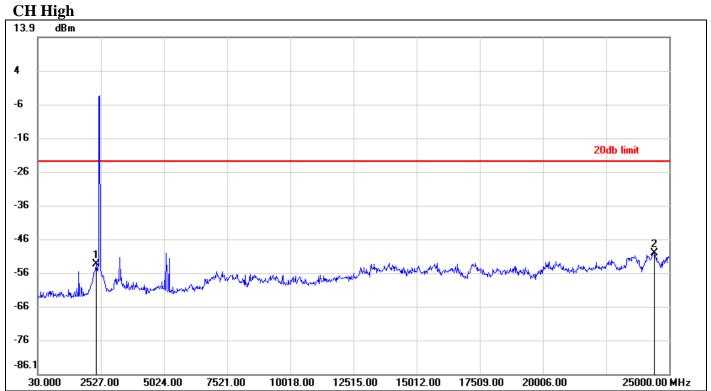


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-53.47	-23.04	-30.43
2	24425.6900	-50.14	-23.04	-27.10

Page 97 Rev. 00

IEEE 802.11n HT 20 mode / Chain 1

CH Low

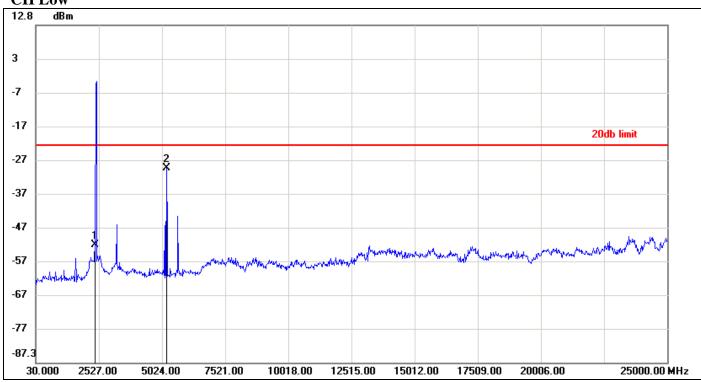

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-52.40	-22.78	-29.62
2	5198.7900	-29.57	-22.78	-6.79

Page 98 Rev. 00

CH Mid




Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2352.2100	-48.73	-14.26	-34.47
2	3251.1300	-46.51	-14.26	-32.25

Page 99 Rev. 00

Report No.: T150304W03-RP1



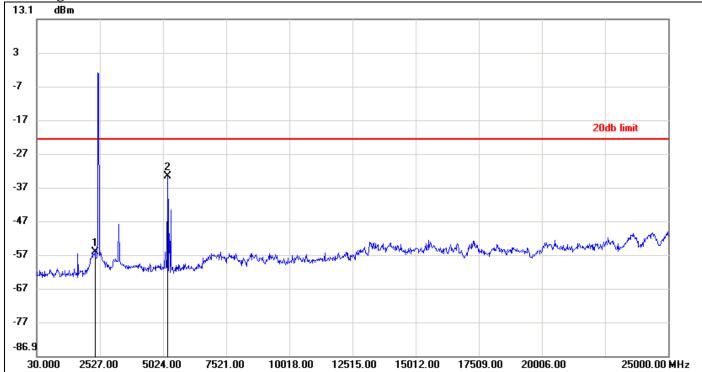

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2327.2400	-56.09	-22.63	-33.46
2	5198.7900	-33.64	-22.63	-11.01

Page 100 Rev. 00

IEEE 802.11n HT 40 mode / Chain 0

CH Low



Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-44.50	-25.03	-19.47
2	5673.2200	-47.00	-25.03	-21.97

Page 101 Rev. 00

CH Mid




Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-48.38	-24.32	-24.06
2	3251.1300	-46.97	-24.32	-22.65

Page 102 Rev. 00

CH High

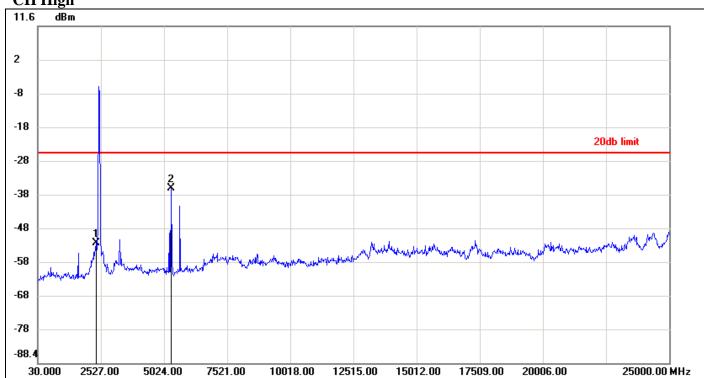


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2352.2100	-52.69	-26.09	-26.60
2	5298.6700	-36.44	-26.09	-10.35

Page 103 Rev. 00

IEEE 802.11n HT 40 mode / Chain 1

CH Low

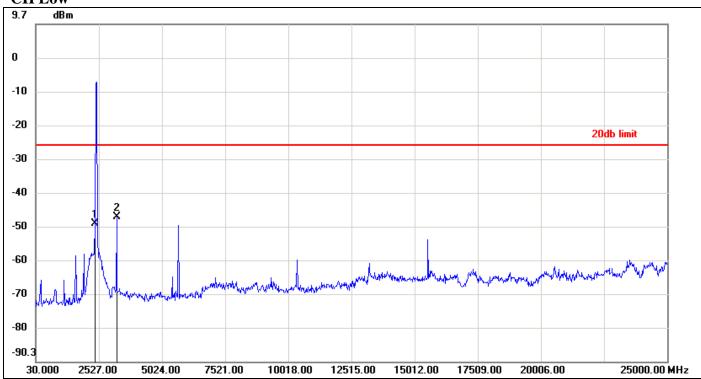


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-49.38	-26.16	-23.22
2	3226.1600	-47.49	-26.16	-21.33

Page 104 Rev. 00

CH Mid

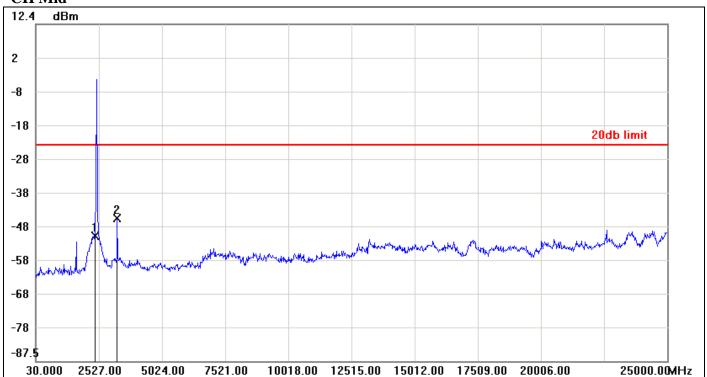


Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2377.1800	-50.45	-23.50	-26.95
2	3251.1300	-45.17	-23.50	-21.67

Page 105 Rev. 00

CH High

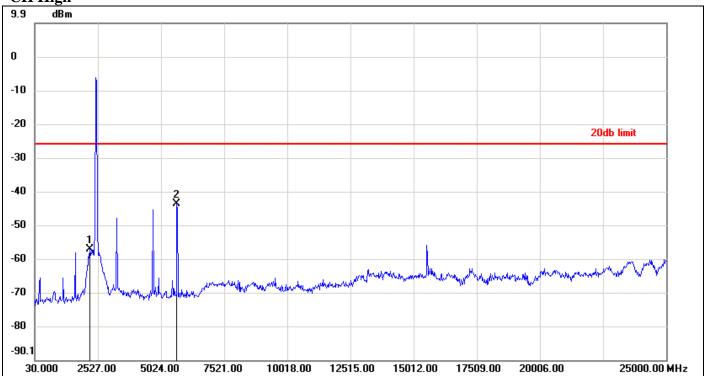

Report No.: T150304W03-RP1

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2202.3900	-57.15	-25.96	-31.19
2	5648.2500	-43.77	-25.96	-17.81

Page 106 Rev. 00

7.7 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Report No.: T150304W03-RP1

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Page 107 Rev. 00

Test Configuration

9kHz ~ 30MHz

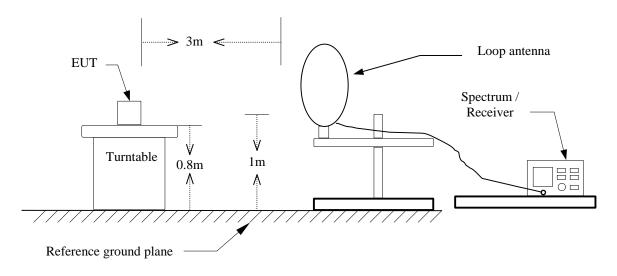


30MHz ~ 1GHz

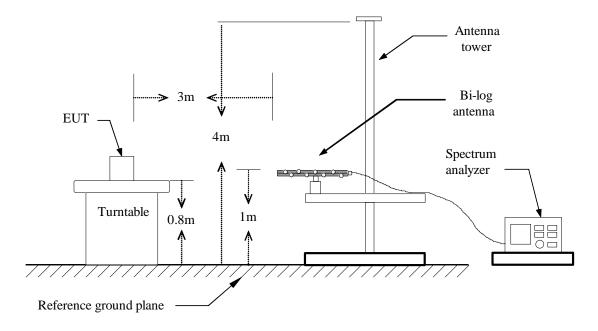

Page 108 Rev. 00



Above 1 GHz

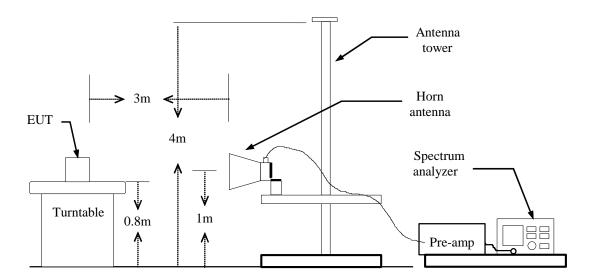

Page 109 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

Report No.: T150304W03-RP1

- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
- 7. Repeat above procedures until the measurements for all frequencies are complete.

TEST RESULTS

No non-compliance noted.

Page 110 Rev. 00

Below 1GHz

Operation Mode: Normal Link **Test Date:** March 12, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
95.9600	54.59	-21.90	32.69	43.50	-10.81	peak	V
192.9600	49.08	-18.17	30.91	43.50	-12.59	peak	V
275.4100	50.39	-16.84	33.55	46.00	-12.45	peak	V
503.3600	40.30	-11.77	28.53	46.00	-17.47	peak	V
695.4200	36.53	-8.84	27.69	46.00	-18.31	peak	V
769.1400	38.39	-7.69	30.70	46.00	-15.30	peak	V
206.5400	54.54	-18.01	36.53	43.50	-6.97	peak	Н
292.8700	49.09	-16.54	32.55	46.00	-13.45	peak	Н
431.5800	41.47	-13.16	28.31	46.00	-17.69	peak	Н
624.6100	45.48	-9.92	35.56	46.00	-10.44	peak	Н
773.0200	45.31	-7.65	37.66	46.00	-8.34	peak	Н
874.8700	38.73	-6.47	32.26	46.00	-13.74	peak	Н

Remark:

- 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 4. Margin(dB) = Result(dBuV/m) Limit(dBuV/m).

Page 111 Rev. 00

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low **Test Date:** March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi

Humidity: 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2054.000	53.58	-4.93	48.65	74.00	-25.35	peak	V
7235.000	43.85	10.64	54.49	74.00	-19.51	peak	V
7235.000	41.69	10.64	52.33	54.00	-1.67	AVG	V
N/A							
1956.000	52.81	-5.11	47.70	74.00	-26.30	peak	Н
7240.000	39.29	10.65	49.94	74.00	-24.06	peak	Н
7310.000	41.76	10.71	52.47	74.00	-21.53	peak	Н
7310.000	39.10	10.71	49.81	54.00	-4.19	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 112 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH Mid Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27 °C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1624.000	51.58	-6.87	44.71	74.00	-29.29	peak	V
3250.000	50.55	-1.51	49.04	74.00	-24.96	peak	V
7310.000	43.65	10.71	54.36	74.00	-19.64	peak	V
7310.000	42.26	10.71	52.97	54.00	-1.03	AVG	V
N/A							
1678.000	51.84	-6.59	45.25	74.00	-28.75	peak	Н
7310.000	41.76	10.71	52.47	74.00	-21.53	peak	Н
7310.000	39.10	10.71	49.81	54.00	-4.19	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 113 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH High **Test Date:** March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27 °C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
54.33	-4.42	49.91	74.00	-24.09	peak	peak	V
3285.000	50.72	-1.43	49.29	74.00	-24.71	peak	V
7385.000	45.79	10.79	56.58	74.00	-17.42	peak	V
7385.000	42.22	10.79	53.01	54.00	-0.99	AVG	V
N/A							
1716.000	49.47	-6.39	43.08	74.00	-30.92	peak	Н
7385.000	40.54	10.79	51.33	74.00	-22.67	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 114 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Low Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1946.000	52.05	-5.17	46.88	74.00	-27.12	peak	V
3215.000	51.79	-1.59	50.20	74.00	-23.80	peak	V
N/A							
1668.000	50.41	-6.64	43.77	74.00	-30.23	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 115 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Mid Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27 °C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
2132.000	55.56	-4.80	50.76	74.00	-23.24	peak	V
7315.000	42.91	10.72	53.63	74.00	-20.37	peak	V
7315.000	42.19	10.72	52.91	54.00	-1.09	AVG	V
N/A							
1496.000	52.44	-7.55	44.89	74.00	-29.11	peak	Н
7310.000	49.54	10.71	60.25	74.00	-13.75	peak	Н
7310.000	40.10	10.71	50.81	54.00	-3.19	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 116 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH High Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1488.000	51.66	-7.58	44.08	74.00	-29.92	peak	V
3285.000	49.06	-1.43	47.63	74.00	-26.37	peak	V
7385.000	43.16	10.79	53.95	74.00	-20.05	peak	V
7385.000	33.89	10.79	44.68	54.00	-9.32	AVG	V
N/A							
1448.000	50.83	-7.76	43.07	74.00	-30.93	peak	Н
7385.000	37.55	10.79	48.34	74.00	-25.66	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 117 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 mode / CH Low Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature:27°CTested by: Andy ShiHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1486.000	51.73	-7.59	44.14	74.00	-29.86	peak	V
3215.000	49.96	-1.59	48.37	74.00	-25.63	peak	V
N/A							
1608.000	50.40	-6.96	43.44	74.00	-30.56	peak	Н
5305.000	40.14	4.88	45.02	74.00	-28.98	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 118 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 mode / CH Mid **Test Date:** March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1952.000	53.20	-5.13	48.07	74.00	-25.93	peak	V
3250.000	51.58	-1.51	50.07	74.00	-23.93	peak	V
7305.000	48.46	10.71	59.17	74.00	-14.83	peak	V
7305.000	37.86	10.71	48.57	54.00	-5.43	AVG	V
N/A							
1952.000	52.29	-5.13	47.16	74.00	-26.84	peak	Н
7320.000	45.28	10.72	56.00	74.00	-18.00	peak	Н
7320.000	34.01	10.72	44.73	54.00	-9.27	AVG	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 119 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 20 mode / CH High **Test Date:** March 10, 2015

Report No.: T150304W03-RP1

Temperature:27 °CTested by: Andy ShiHumidity:53% RHPolarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1946.000	53.65	-5.17	48.48	74.00	-25.52	peak	V
3285.000	47.68	-1.43	46.25	74.00	-27.75	peak	V
N/A							
1486.000	51.39	-7.59	43.80	74.00	-30.20	peak	Н
3285.000	47.21	-1.43	45.78	74.00	-28.22	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 120 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 40 mode Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C Tested by: Andy

Temperature: 27 °C **Tested by:** Andy Shi **Humidity:** 53% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1490.000	53.02	-7.57	45.45	74.00	-28.55	peak	V
3230.000	50.71	-1.56	49.15	74.00	-24.85	peak	V
N/A							
1952.000	53.68	-5.13	48.55	74.00	-25.45	peak	Н
3230.000	46.46	-1.56	44.90	74.00	-29.10	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 121 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 40 mode / CH Mid Test Date: March 10, 2015

Report No.: T150304W03-RP1

Temperature: 27°C **Tested by:** Andy Shi

Humidity: 53% RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1788.000	49.79	-6.00	43.79	74.00	-30.21	peak	V
3250.000	52.86	-1.51	51.35	74.00	-22.65	peak	V
N/A							
1670.000	50.52	-6.63	43.89	74.00	-30.11	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result(dBuV/m) Average\ limit(dBuV/m)$.

Page 122 Rev. 00

Operation Mode: TX / IEEE 802.11n HT 40 mode Test Date: March 10, 2015

Temperature: 27°C Tested by: Andy Shi

Humidity: 53% RH Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
1638.000	54.76	-6.80	47.96	74.00	-26.04	peak	V
3270.000	51.37	-1.46	49.91	74.00	-24.09	peak	V
N/A							
1752.000	50.43	-6.19	44.24	74.00	-29.76	peak	Н
3270.000	47.94	-1.46	46.48	74.00	-27.52	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. $Margin(dB) = Remark\ result(dBuV/m) Average\ limit(dBuV/m)$.

Page 123 Rev. 00

Report No.: T150304W03-RP1

7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to $\S15.207(a)$, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Report No.: T150304W03-RP1

Frequency Range (MHz)	Limits (dBμV)					
(IVITIZ)	Quasi-peak	Average				
0.15 to 0.50	66 to 56*	56 to 46*				
0.50 to 5	56	46				
5 to 30	60	50				

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 124 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Report No.: T150304W03-RP1

Test Data

Operation Mode: Normal Link **Test Date:** March 11, 2014

Temperature: 24°C **Tested by:** Bland Cheng

Humidity: 50% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	•	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1539	33.64	17.17	9.75	43.39	26.92	65.78	55.79	-22.39	-28.87	L1
0.2020	28.86	13.83	9.70	38.56	23.53	63.52	53.53	-24.96	-30.00	L1
0.6060	25.36	11.24	9.74	35.10	20.98	56.00	46.00	-20.90	-25.02	L1
0.9860	23.75	19.19	9.78	33.53	28.97	56.00	46.00	-22.47	-17.03	L1
1.4340	22.56	18.59	9.81	32.37	28.40	56.00	46.00	-23.63	-17.60	L1
1.9820	21.27	17.99	9.84	31.11	27.83	56.00	46.00	-24.89	-18.17	L1
0.1539	32.88	17.24	9.77	42.65	27.01	65.78	55.79	-23.13	-28.78	L2
0.2540	31.83	20.58	9.72	41.55	30.30	61.62	51.63	-20.07	-21.33	L2
0.7740	23.07	12.80	9.77	32.84	22.57	56.00	46.00	-23.16	-23.43	L2
1.1460	21.51	18.30	9.80	31.31	28.10	56.00	46.00	-24.69	-17.90	L2
1.8660	21.82	19.16	9.84	31.66	29.00	56.00	46.00	-24.34	-17.00	L2
3.1660	20.14	17.44	9.89	30.03	27.33	56.00	46.00	-25.97	-18.67	L2


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
- 4. $L1 = Line \ One \ (Live \ Line) / L2 = Line \ Two \ (Neutral \ Line)$


Page 125 Rev. 00

Test Plots

Conducted emissions (Line 1)

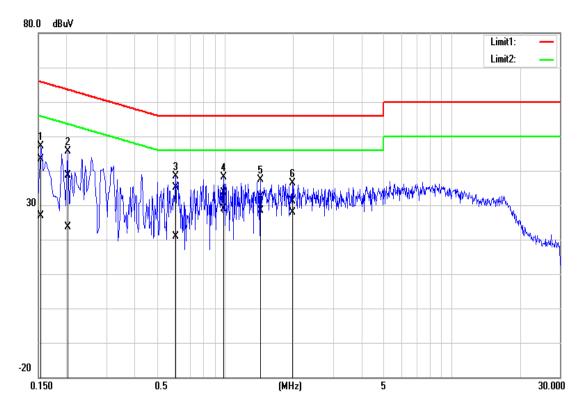

Conducted emissions (Line 2)

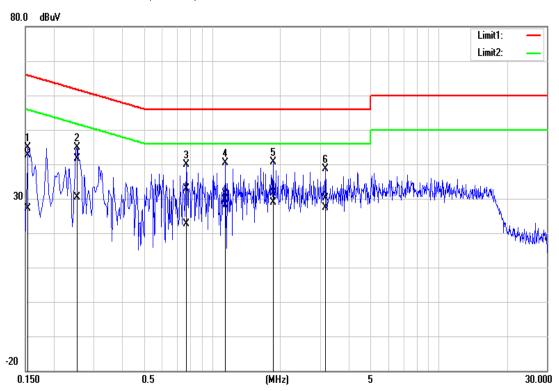

Page 126 Rev. 00