



Model: YER(SB) 26W

Tested By: Hong, Report No.: 9810046


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN	OFF 60dB

Final Measurement: X QP

Transducer No.	Start	Stop	Name
2	9k	30M	BI078

Meas Time: 1 s
Subranges: 16
Ave Margin: 20dB

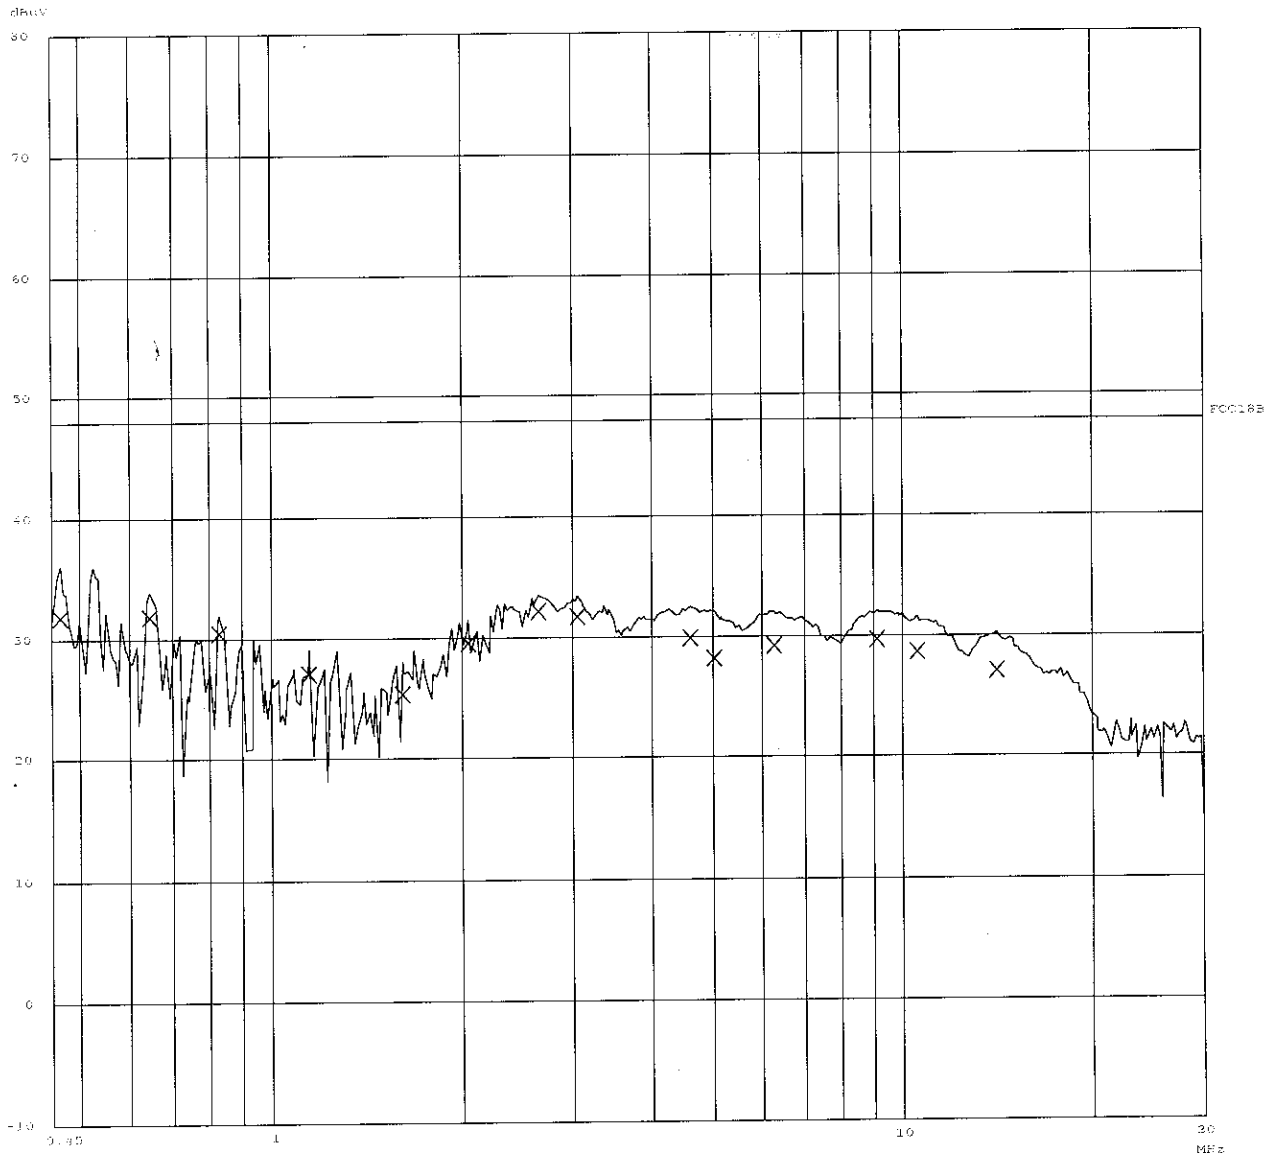

Ctrl. No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 9810046

Model: YER(SB) 26W

Tested By: Hong, Report No.: 9810046

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.46500	31.7	48.0
0.64500	31.8	48.0
0.83000	30.4	48.0
1.15000	26.9	48.0
1.61500	25.3	48.0
2.05000	29.5	48.0
2.65000	32.1	48.0
3.05000	31.7	48.0
4.60500	29.8	48.0
5.02000	28.1	48.0
6.27500	29.2	48.0
9.11500	29.6	48.0
10.56000	28.6	48.0
14.09000	26.9	48.0

* limit exceeded

Ctrl. No.: N/A



Model: YER-2 26W

Tested By: Hong, Report No.: 9810046

Scan Settings (1 Range)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
450k	30M	5k	10k	PK	30ms	AUTO	LN OFF	60dB	


Final Measurement: X QP

Meas Time: 1 s

Subranges: 16

Avg Margin: 20dB

Transducer No.	Start	Stop	Name
3	9k	30M	EI078

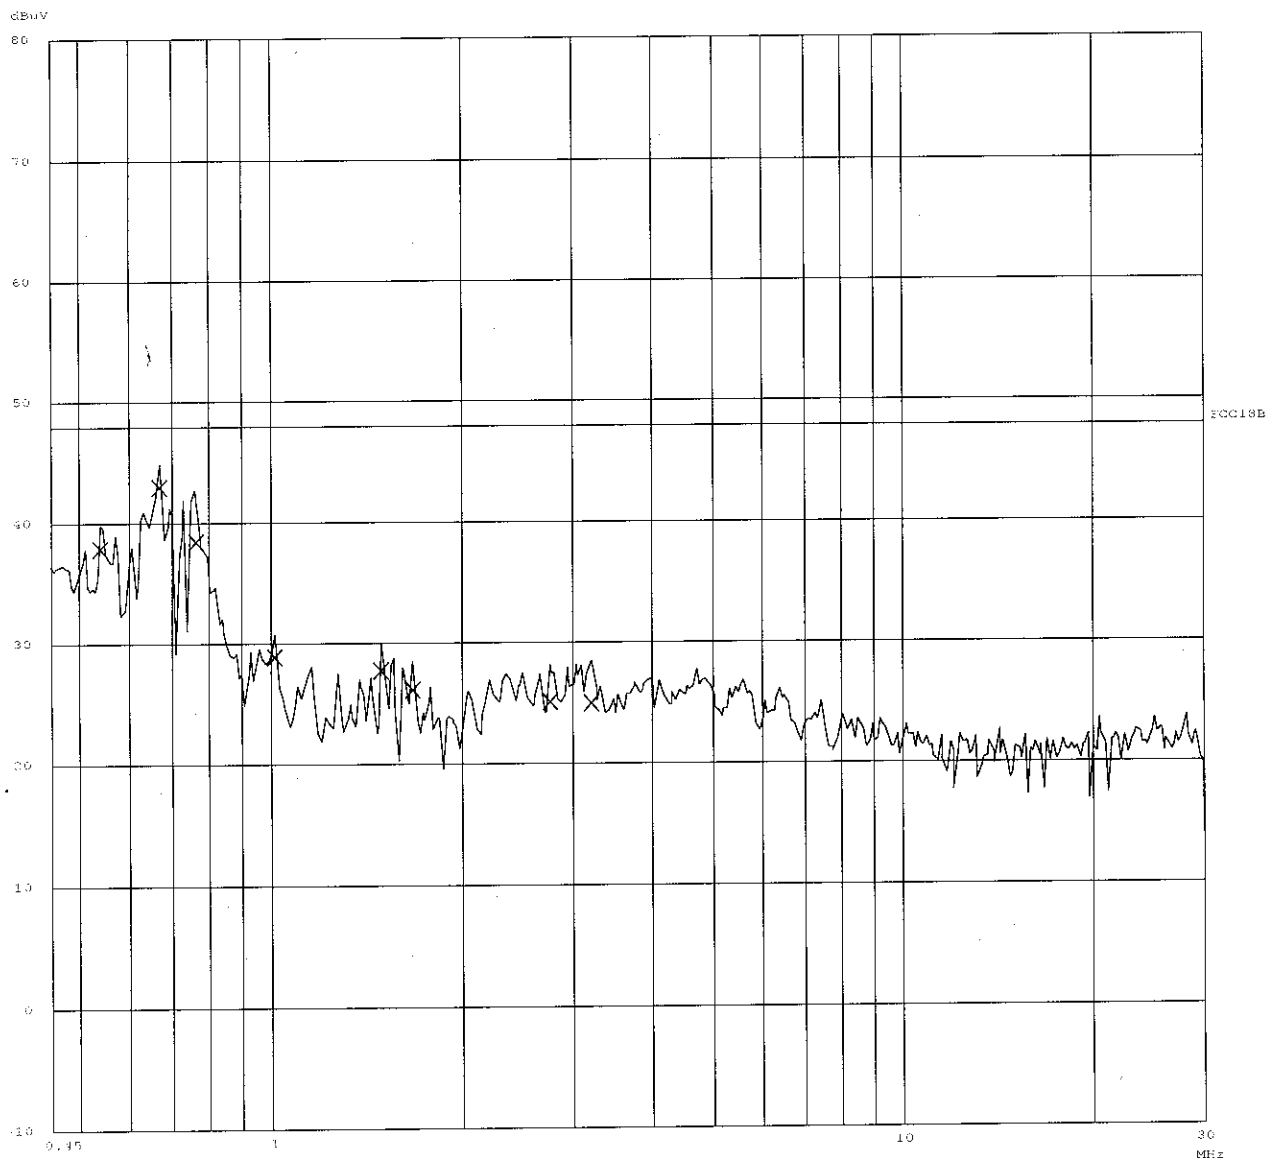

Ctrl. No.: N/A



Report No.: 9810046

Model: YER-2 26W

Tested By: Hong, Report No.: 9810046

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.54000	37.8	48.0
0.67000	42.9	48.0
0.76500	38.4	48.0
1.01500	28.8	48.0
1.49500	27.6	48.0
1.67500	26.0	48.0
2.76000	25.0	48.0
3.21000	24.9	48.0

* limit exceeded

Ctrl. No.: N/A