

Test Report  
For  
Datamatic.Com Ltd.  
Firefly Transceiver FCC ID: ODY-D1000

DUT: Wireless transceiver model D1000

Test Date: 09-May-2002

Manufacturer: Datamatic.Com, Ltd.  
715 North Glenfield Drive, Suite 450  
Plano, Texas  
(972) 234-5000

Conducted by: Control Design & Testing, Inc.  
6010 Red Fox Drive  
Spotsylvania, VA 22553  
(540) 582-2826

CD&amp;T

FCC ID: ODYD-D1000

#### A. DEVICE UNDER TEST

The product is transceiver used for the wireless transmission of public utility water meter data. This device works in conjunction with a receiver (ODYD237) that has been previously certified. This product is designed to operate under the provisions of Part 15.249 of the FCC rules.

The transmit frequency is 916.500 MHz. nominal. The modulation mode is on/off keying using a pulse position scheme. This device is programmed to transmit single data packets at intervals of 1 to 18 seconds. Power for the device is provided by an internal "D" size 3.6 volt lithium battery.

The rf section consists of an RF Monolithics TR1000L transmitter module, a two element antenna matching network and helical wire antenna. The antenna is custom manufactured for the applicant and is soldered to the printed circuit board. The entire assembly will be housed in a sonic welded plastic enclosure. The test sample is in a plastic prototype enclosure. There is no provision to connect an external antenna.

#### B. MEASUREMENT PROCEDURE: RADIATED EMISSIONS

Testing of this device was conducted at the Carl T. Jones test facility located in Springfield, Virginia. Site #90490


The receiver section of this device is a sequenced TRF, clocked at approximately 745 kHz. and does not use a local oscillator. The device was locked in the receive mode and scanned from 30 MHz. to 1 GHz. No emissions were detected.

Transmitter field strength measurements were conducted according to the procedures set forth in ANSI C63.4 (1992). Testing was conducted with a fresh battery and monitored periodically to insure that the battery voltage (under load) was maintained at 95% of nominal or greater.

The device under test was placed on a rotating turntable 0.8 meters high, centered at 3 meters distant from the measurement antenna. The device was placed in the center of the turntable and tested in the two positions shown in the test setup photographs.

For the purpose of radiated emissions testing, the sample was locked in CW mode. For the occupied bandwidth (Plot 1) the sample was set to transmit typical data packets.

Plot 1

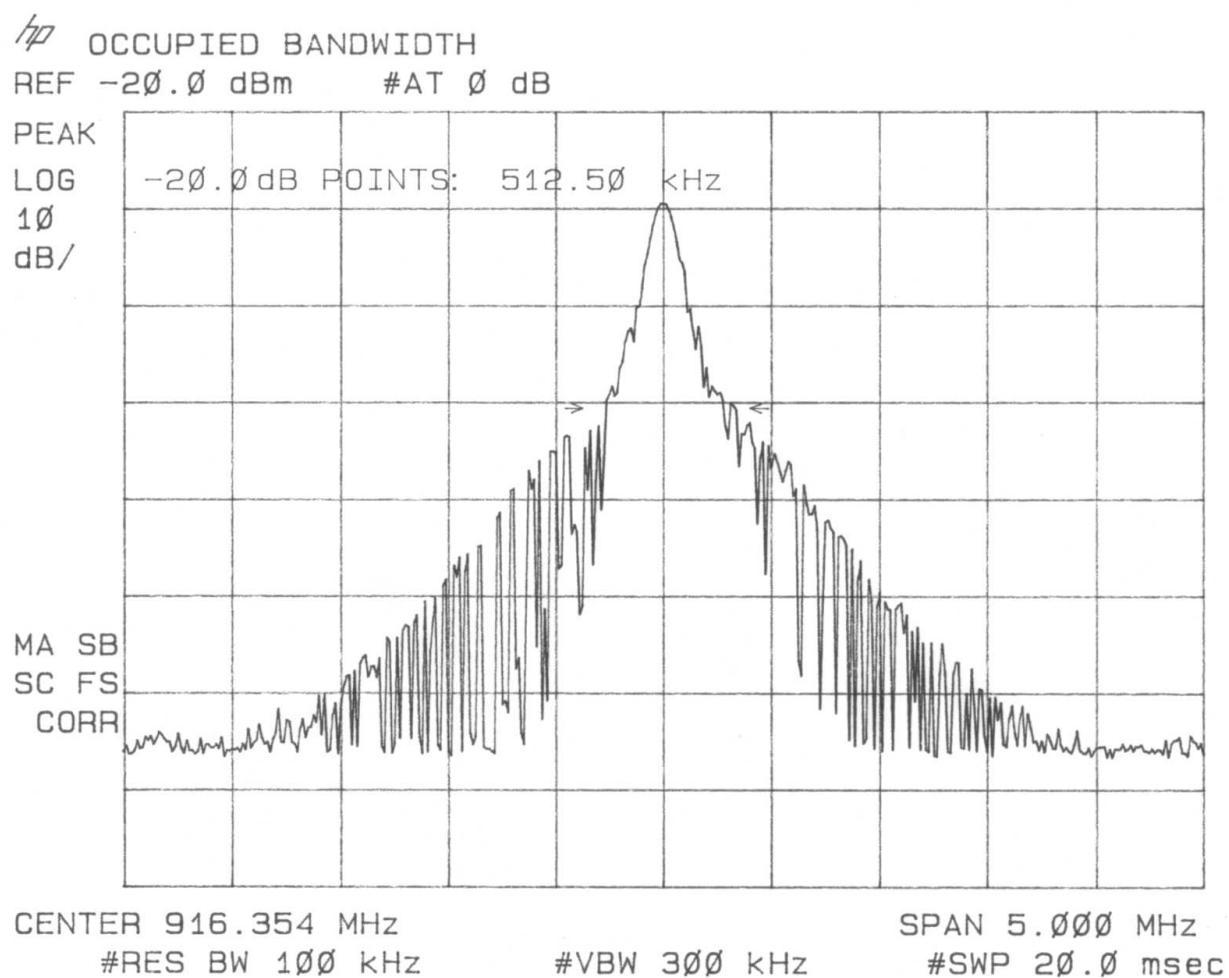

The field strength measurements were taken using an HP8596E spectrum analyzer, an EMCO 3121C dipole set, an EMCO 3115 double ridge guide horn and an Avantek UJ210 preamp. The device was scanned from 30 MHz. to 10 GHz. and all emissions were noted. In this case, the only emissions detected were those harmonically related to the fundamental transmit frequency.

At each detected emission frequency, the device was measured by rotating the turntable and adjusting the antenna height over a range of 1 to 4 meters to obtain the maximum output level. This procedure was performed with both horizontal and vertical antenna polarizations for both of the setup positions shown in the test setup photos. The peak reading for each frequency was recorded in the fourth column in Table 1 below.

Measurements taken for weak emissions were performed by reducing the distance from the measurement antenna to 1 meter and factoring -9.54dB into the calculation. This method was used for the 7<sup>th</sup> harmonic.


**Table 1**

RADIATED EMISSIONS DATA							
CLIENT: DATAMATIC		FCC ID: ODY-D1000					
ANTENNA: DIPOLES/DRG HORN		EUT: DATA TRANSCEIVER					
PART 15.249, 15.35		TEST DATE: 10-May-02					
Frequency In MHz.	Ant. Polar. H/V	Ant. Factor dB	Peak reading dBm	Duty Cycle -dB	Peak Power uV/m@3m	Corrected Power uV/m@3m	FCC Limit uV/m@3m
916.375	V	30.8	-44.31		47261		50000
1832.750	V	30.2	-84.79	11.5	417	111	500
2749.125	H	33.4	-79.98	11.5	1050	279	500
3665.500	H	35.7	-95.43	11.5	231	61	500
4581.875	V	36.6	-91.02	11.5	426	113	500
5498.250	H	38.6	-99.48	11.5	202	54	500
6414.625	H	39.1	-107.35	11.5	87	23	500


### C. DUTY CYCLE AND INTERVAL CALCULATIONS

The occupied bandwidth and duty cycle measurements were made using an HP8594E spectrum analyzer and plotted with an HP7475A pen plotter. The computation for the duty cycle correction factor in column five in Table 1 is derived from the manufacturer's description of the data scheme and is verified by Plot 2 below.

Plot 2

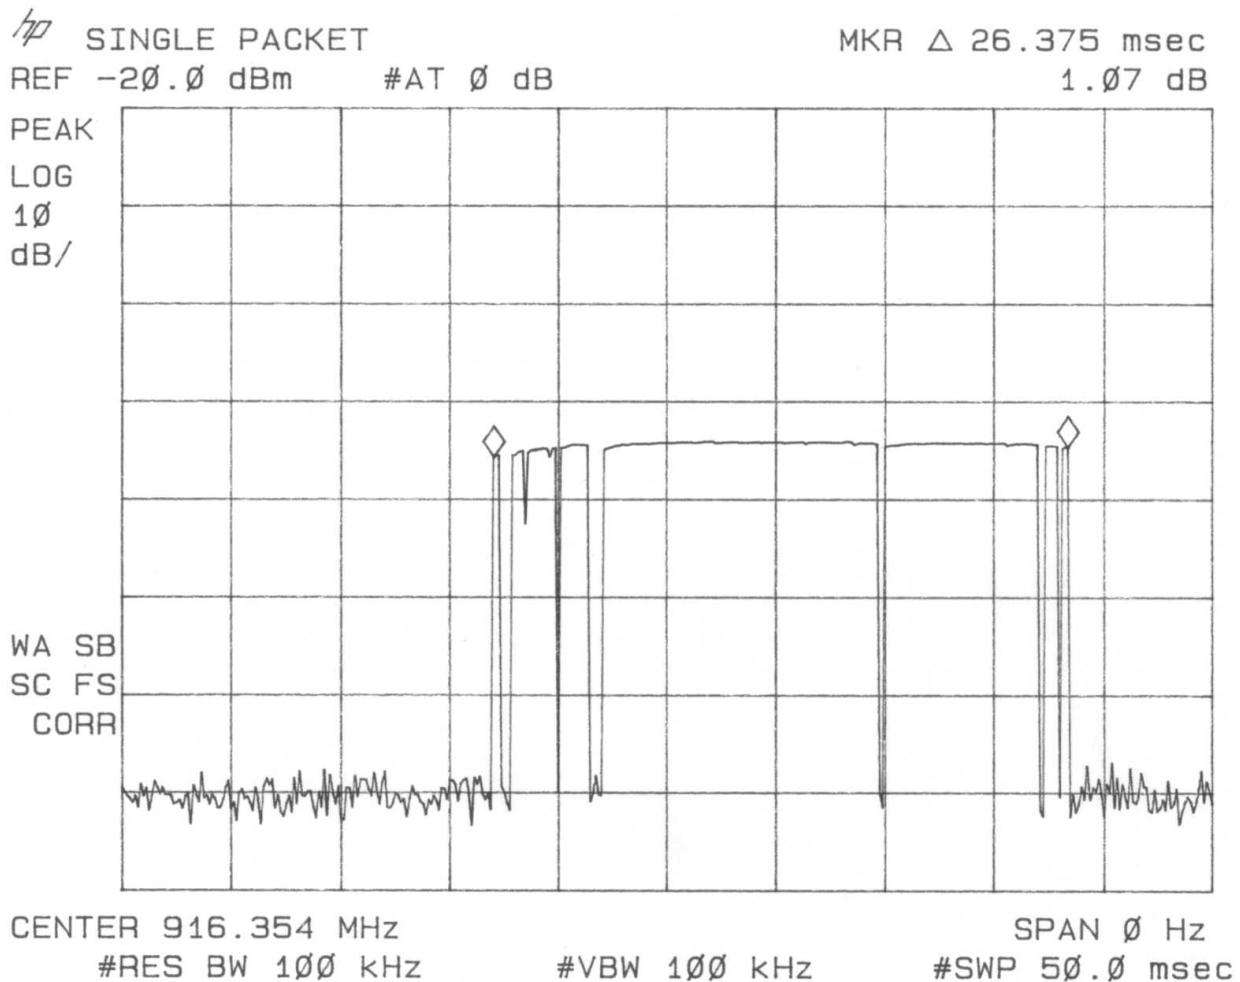

### Plot 3

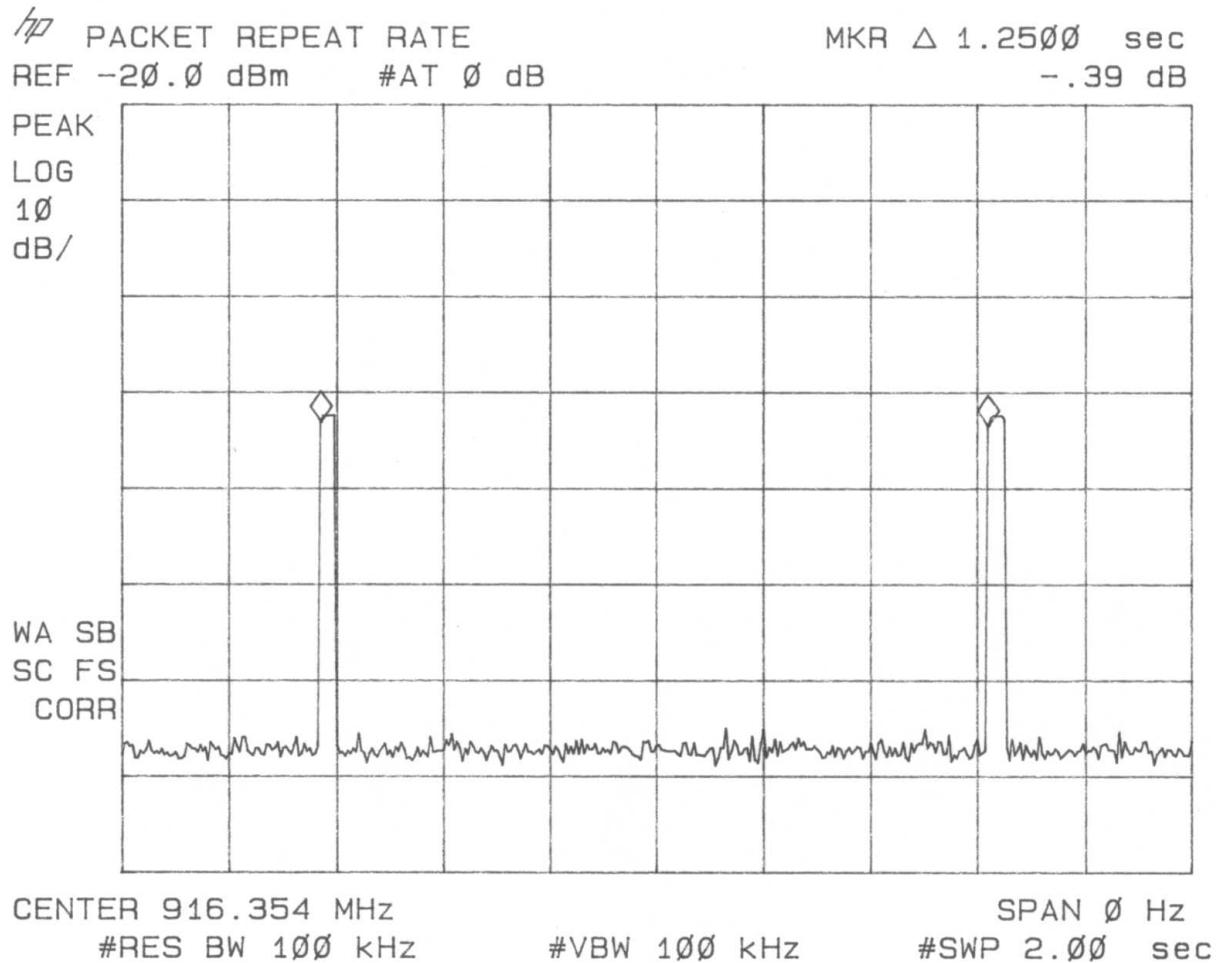

The code format for this device is a pulse position scheme that comprises 260 bit frames of 104 s. each. The entire packet length is 27.04ms. and is transmitted at intervals of 1 second or longer. Spaces between pulses have been ignored in the calculation but would result in a slightly higher correction factor. The correction factor is given by:

$$20\log(26.4/100\text{ms.}) = -11.56 \text{ dB.}$$

As provided in Part 15.35 of the FCC rules, a correction factor of  $-11.5$  dB is used for the calculations on the data sheet. As shown in Plot 3, the packet repeat interval from this sample was approximately 1.25 seconds.