

ELITE ELECTRONIC ENGINEERING COMPANY  
1516 CENTRE CIRCLE  
DOWNERS GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 27503

DATES TESTED: March 13, 1999

TEST PERSONNEL: Daniel E. Crowder

TEST SPECIFICATION: Federal Communication Commission (FCC) Part 22

ENGINEERING TEST REPORT NO. 21518

MEASUREMENT OF RF INTERFERENCE FROM

A MODEL NO. A180100882B 180 WATT AMPLIFIER

FOR: TRL Technologies  
Hoffman Estates, Illinois

PURCHASE ORDER NO: 98-128

Report By:

  
Daniel E. Crowder

Approved By:

  
Raymond J. Kloboda  
Registered Professional  
Engineer of Illinois - 44894

ENGINEERING TEST REPORT NO. 21518

ADMINISTRATIVE DATA AND SUMMARY OF TESTS

**DESCRIPTION OF TEST ITEM:** 180 Watt Amplifier for single channel operation

**MODEL NO:** A180100882B

**SERIAL NO:** None Assigned

**FCC ID:** OEUPA882M180W

**MANUFACTURER:** TRL Technologies

**APPLICABLE SPECIFICATIONS:** FCC Parts 2 and 22

**QUANTITY OF ITEMS TESTED:** One (1)

**TEST PERFORMED BY:** ELITE ELECTRONIC ENGINEERING COMPANY  
Radio Interference Consultants  
Downers Grove, Illinois 60515

**DATES TESTED:** March 13, 1999

**PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):**

**CUSTOMER:** Hiep Lam of TRL Technologies personnel were present for all testing.

**ELITE ELECTRONIC:** Daniel E. Crowder

**ELITE JOB NO.:** 27503

**ABSTRACT:** The Model No. A180100882B, 180 Watt Amplifier complies with the occupied bandwidth, spurious emissions at the antenna terminals and spurious radiated emissions requirements in FCC PART 22. See test results and data pages for more details.

## ENGINEERING TEST REPORT NO. 21518

## TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.0	INTRODUCTION	1
1.1	DESCRIPTION OF TEST ITEM	1
1.2	PURPOSE	1
1.3	DEVIATIONS, ADDITIONS AND EXCLUSIONS	1
1.4	APPLICABLE DOCUMENTS	1
1.5	SUBCONTRACTOR IDENTIFICATION	1
2.0	TEST ITEM SETUP AND OPERATION	2
2.1	SETUP	2
2.2	MODULATION	2
2.3	FREQUENCY SELECTION	2
3.0	TEST EQUIPMENT	2
4.0	REQUIREMENTS, PROCEDURES AND RESULTS	2
4.1	OCCUPIED BANDWIDTH MEASUREMENTS	2
4.1.1	REQUIREMENTS	2
4.1.2	PROCEDURES	3
4.1.3	RESULTS	3
4.2	SPURIOUS EMISSIONS AT ANTENNA TERMINAL	3
4.2.1	REQUIREMENTS	4
4.2.2	PROCEDURES	4
4.2.3	RESULTS	4
4.3	FIELD STRENGTH OF SPURIOUS EMISSIONS	4
4.3.1	REQUIREMENTS	4
4.3.2	PROCEDURES	5
4.3.3	RESULTS	6
5.0	CONCLUSION	6
6.0	CERTIFICATION	6
	TABLE I - EQUIPMENT LIST	8

ENGINEERING TEST REPORT NO. 21518

MEASUREMENT OF RF INTERFERENCE FROM

A MODEL NO. A180100882B 180 WATT AMPLIFIER

**1.0 INTRODUCTION:**

**1.1 DESCRIPTION OF TEST ITEM:** This report present the results of the radio interference measurements were performed on a 180 Watt Amplifier for single channel cellular applications, Model No. A180100882B, (hereinafter referred to as the test item). No serial number was assigned to the test item. The tests were performed for TRL Technologies of Hoffman Estates, Illinois.

**1.2 PURPOSE:** The test series was performed to determine if the test item meets the occupied bandwidth, spurious emissions at antenna terminals and spurious radiated emissions requirements of the FCC Part 22 for 869-894MHz Amplifiers.

**1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS:** There were no deviations, additions to, or exclusions from the test specification during this test series.

**1.4 APPLICABLE DOCUMENTS:** The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 22
- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 2
- ANSI C63.4-1992, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**1.5 SUBCONTRACTOR IDENTIFICATION:** This series of tests was performed by the Elite Electronic Engineering Company, radio

ENGINEERING TEST REPORT NO. 21518

interference consultants of Downers Grove, Illinois.

**2.0 TEST ITEM SETUP AND OPERATION:**

**2.1 SETUP:** The test item was powered with 26VDC from a power supply.

An input signal from a Hewlett Packard model 8648C signal generator (used in conjunction with a Hewlett Packard 8111A function generator) was fed into a Ophir model GRF5064 RF power amplifier. The 15 Watt output of the Ophir amplifier was used to drive the test item. The level of the input signal was adjusted until the power output was at the maximum level.

**2.2 MODULATION:** The test signal was frequency modulated (FM) with a 6.5 kHz audio tone at 12.0kHz deviation which is a typical modulation for 869-894MHz radio services.

**2.3 FREQUENCY SELECTION:** A single frequency in the center of the frequency band was selected.

The specific test frequencies are designated as follows:

Modulation Type	Frequency (MHz)
FM	881.5

**3.0 TEST EQUIPMENT:**

A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

**4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

**4.1 OCCUPIED BANDWIDTH MEASUREMENTS:**

**4.1.1 REQUIREMENTS:** In accordance with Paragraph 22.917(b),

ENGINEERING TEST REPORT NO. 21518

the peak power of any emission shall be attenuated below the unmodulated carrier power (P) in accordance with the following schedule:

- (1) On any frequency removed from the carrier frequency by more than 20kHz but not more than 45kHz: At least 26 dB.
- (2) On any frequency removed from the carrier frequency by more than 45kHz, up to the first multiple of the carrier frequency: at least 60dB or  $43 + 10\log(P)$  dB, whichever is the lesser attenuation.

**4.1.2 PROCEDURES:**

(a) The input signal was set to 881.5MHz. The input signal level was adjusted to provide the maximum level at the test item output.

(b) The input signal was FM modulated.

(c) A spectrum analyzer was connected to the output of the test item. With a bandwidth of the spectrum analyzer set to 1kHz, the output of the test item was measured and recorded.

(d) The input signal from the driving amplifier was measured with the spectrum analyzer and recorded over the same frequency range.

**4.1.3 RESULTS:** The plots of the occupied bandwidth measured with the FM modulation of the carrier are presented on data pages 101 through 105.

The limits, shown on the plots, are referenced to the power measured from the unmodulated carrier.

As can be seen from the data, the test item output met the occupied bandwidth requirements with the FM modulation of the carrier. The sideband emissions measured at the test item output were similar to the sideband emissions measured from the input signals.

**4.2 SPURIOUS EMISSIONS AT ANTENNA TERMINAL:**

ENGINEERING TEST REPORT NO. 21518

**4.2.1 REQUIREMENTS:** This test determines whether the test item produces excessive spurious emissions at the antenna terminals.

In accordance with paragraph FCC 22.917, the mean power of emissions must be attenuated below the mean power of the unmodulated carrier (P) on any frequency twice or more than twice the fundamental frequency by at least  $43 + 10 \log (P)$ . The peak power of the emissions shall be measured at the antenna terminal from 30MHz up to the 10th harmonic of the fundamental frequency.

**4.2.2 PROCEDURES:**

In general, this test will measure spurious emissions at the antenna terminals.

- (a) The test item was setup per para 2.0.
- (b) The frequency span was adjusted to cover 30 MHz up to 1000 MHz. The emission levels over this frequency range were measured and recorded.
- (c) Next, the emissions over the frequency range from 1000 MHz up to 9000 MHz were measured and recorded. This range covers up through the 10th harmonic.

**4.2.3 RESULTS:** The plots of the antenna conducted output measurements are presented on data pages 106 through 109.

As can be seen from the data, the test item did not produce spurious emissions in excess of 65 dB below unmodulated carrier level with the nominal output power of 180 Watts.

**4.3 FIELD STRENGTH OF SPURIOUS EMISSIONS:**

**4.3.1 REQUIREMENTS:** In accordance with Paragraph 22.917, on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: by at least  $43 + 10 \log (P)$  dB.

ENGINEERING TEST REPORT NO. 21518

This requirement translates to a field strength limit of -13dBm (ERP). The emissions shall be measured from 30MHz up to the 10th harmonic of the fundamental frequency.

**4.3.2 PROCEDURES:** The radiated tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI 63.4 and CISPR 16 requirements for site attenuation.

Preliminary radiated measurements are performed to determine the frequencies where the significant emissions might be found. With the test item at one set position and the measurement antenna at a set height (i.e. without maximizing), the radiated emissions were measured using peak detection. This data was then automatically plotted. The frequencies where significant emission levels found were remeasured taking the extra pains to maximize the emission levels.

Measurements were performed with the input signal modulated.

(a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.

(b) The input frequency was set to 881.5MHz with (CW) no modulation. The level was adjusted for 180 Watts output. The output was terminated in 50 Ohm load. The modulation was reapplied.

(c) Preliminary emission levels were measured over the frequency range from 30MHz to 9GHz. These preliminary levels were then plotted. The readings were taken with a peak detector function. The measurement

ENGINEERING TEST REPORT NO. 21518

BW was 100kHz up to 1GHz and 1MHz up to 9GHz.

(d) Significant emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. Measurement BW was 1MHz for frequencies above 1GHz and 100kHz for frequencies 1GHz or less. Peak reading were recorded. No averaging methods or corrections were applied. As a minimum measurements were made at each harmonic of the transmit frequency up through the tenth harmonic. If no signal was detected above the noise floor, the noise level was recorded and noted as ambient.

**4.3.3 RESULTS:** The preliminary plots are presented on data pages 110 and 111. This data is only presented for a reference, and is not used as to determine compliance. All significant radiated emissions were subsequently remeasured manually maximizing the level.

The final radiated levels are presented on data page 112. The radiated emissions were measured through the 10th harmonic. Field strength levels are presented as equivalent radiated power from a standard tuned dipole.

The radiated emission levels for the harmonics were below the specification limit.

**5.0 CONCLUSION:**

The Model No. A180100882B 180 Watt Amplifier for 869-894MHz, complies with the Occupied Bandwidth, Spurious Emissions at Antenna Terminals and the Field Strength of Spurious Emissions requirements of the FCC Part 22 and 2.

**6.0 CERTIFICATION:**

Elite Electronic Engineering Company certifies that the

ENGINEERING TEST REPORT NO. 21518

information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

## ENGINEERING TEST REPORT NO. 21518

TABLE I: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENG. INC.							Page:	
Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
<b>Equipment Type: ANTENNAS</b>								
NTAO	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL611	2057	.03-2GHZ	03/18/98	12	03/18/99
NWH0	DOUBLE RIDGED WAVEGUIDE	TENSOR	4105	2081	1-12.4GHZ	08/26/98	12	08/26/99
<b>Equipment Type: ATTENUATORS</b>								
T2F1	200W, 100W ATTENUATOR	WEINSCHEL	48-20-33	AZ0083	DC-18GHZ	02/20/98	12	02/20/99
T2F2	200W, 100W ATTENUATOR	WEINSCHEL	48-20-33	AZ0084	DC-18GHZ	02/20/98	12	02/20/99
<b>Equipment Type: CONTROLLERS</b>								
CDD2	COMPUTER	HEWLETT PACKARD	04171A#ABA	SUS61654645	N/A		N/A	
CMA0	MULTI-DEVICE CONTROLLER	EMCO	2090	9701-1213	---		N/A	
<b>Equipment Type: PRINTERS AND PLOTTERS</b>								
HRE1	LASER JET 5P	HEWLETT PACKARD	C3150A	USRBO61052	---		N/A	
<b>Equipment Type: RECEIVERS</b>								
RAC2	SPECTRUM ANALYZER	HEWLETT PACKARD	85660B	3638A08770	100HZ-22GHZ	10/30/98	12	10/30/99
RAC2	RF PRESELECTOR	HEWLETT PACKARD	85685A	2648A00507	20HZ-2GHZ	02/01/99	12	02/01/00
RAF4	QUASipeak ADAPTER	HEWLETT PACKARD	85650A	2043A00320	.01-1000MHZ	02/01/99	12	02/01/00

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable  
 Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

ELITE ELECTRONIC ENGINEERING CO

REF 115.5 dBuV ATTEN 30 dB + 60 dB Ext + 24dB Loss MKR 881.500 1 MHz 95.40 dBuV

MANUFACTURER : TRL TECHNOLOGIES  
MODEL : A/807/20 8826  
SERIAL : 1

TEST PERFORMED : FCC-22 OCCUPIED BANDWIDTH  
 MODE : Tx CW @ 881.5MHz 180W (FULL POWER)  
 NOTES :  
 SERIAL NO. : 10000000000000000000000000000000  
 FIRMWARE : 1.0.0  
 DATE : 10/10/2023  
 TIME : 10:10:10  
 LOCATION : 123 Main St, Anytown, USA  
 COMPANY : Acme Electronics, Inc.  
 ADDRESS : 123 Main St, Anytown, USA  
 CITY : Anytown  
 STATE : USA  
 ZIP : 12345  
 PHONE : (555) 123-4567  
 FAX : (555) 123-4568  
 EMAIL : info@acme.com  
 WEBSITE : www.acme.com  
 COMMENTS : None assigned

A line graph on a grid background. The x-axis is labeled "281 500 M" and the y-axis has a "G" label. The top series is a noisy, upward-sloping line starting at approximately (0, 10) and ending at (10, 50). The bottom series is a smooth, downward-sloping line starting at approximately (0, 25) and ending at (10, 15).

RES B1 500 MHz SPAN 100 kHz




## ELITE ELECTRONIC ENGINEERING CO

MKR 881.500 3 MHz

ATTEN 30 dB + 60dB Ext + Cables Loss

93.20 dBmU

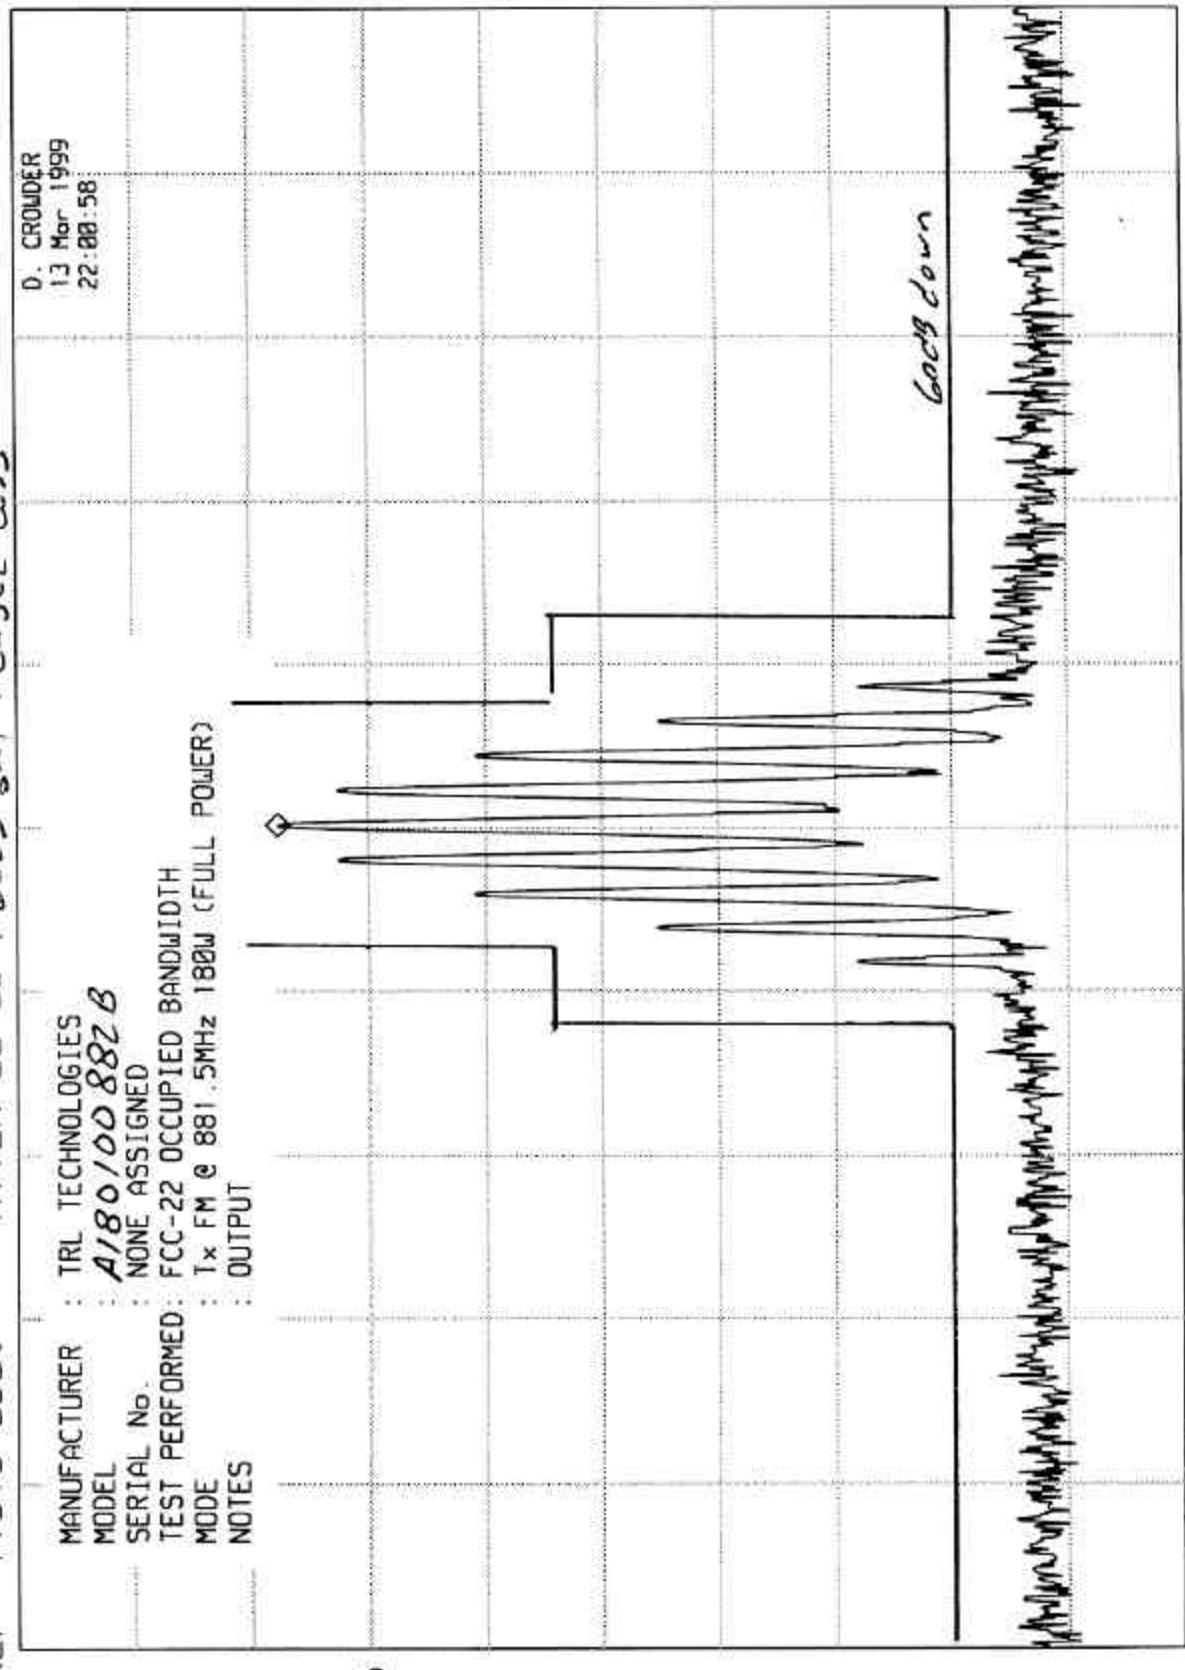INTER 881.500 MHz  
RES BW 1 kHz (i) VBU 10 kHzSPAN 300 kHz  
SWP 2.25 sec


ELITE ELECTRONIC ENGINEERING CO

REF 122.1 dBuV ATTEN 30 dB +40 dB Ext. +12.4 dB 1055 102.10 dBuV MKR 881.500 1 MHz

MANUFACTURER	TRL TECHNOLOGIES
MODEL	A180/00 88Z3
SERIAL No.	NONE ASSIGNED
TEST PERFORMED	FCC-22 OCCUPIED BANDWIDTH
MODE	Tx FM @ 881.5MHz 180W (FULL POWER)
NOTES	INPUT

D. CROWDER  
13 Mar 1999  
22-07-37


EJR 21518

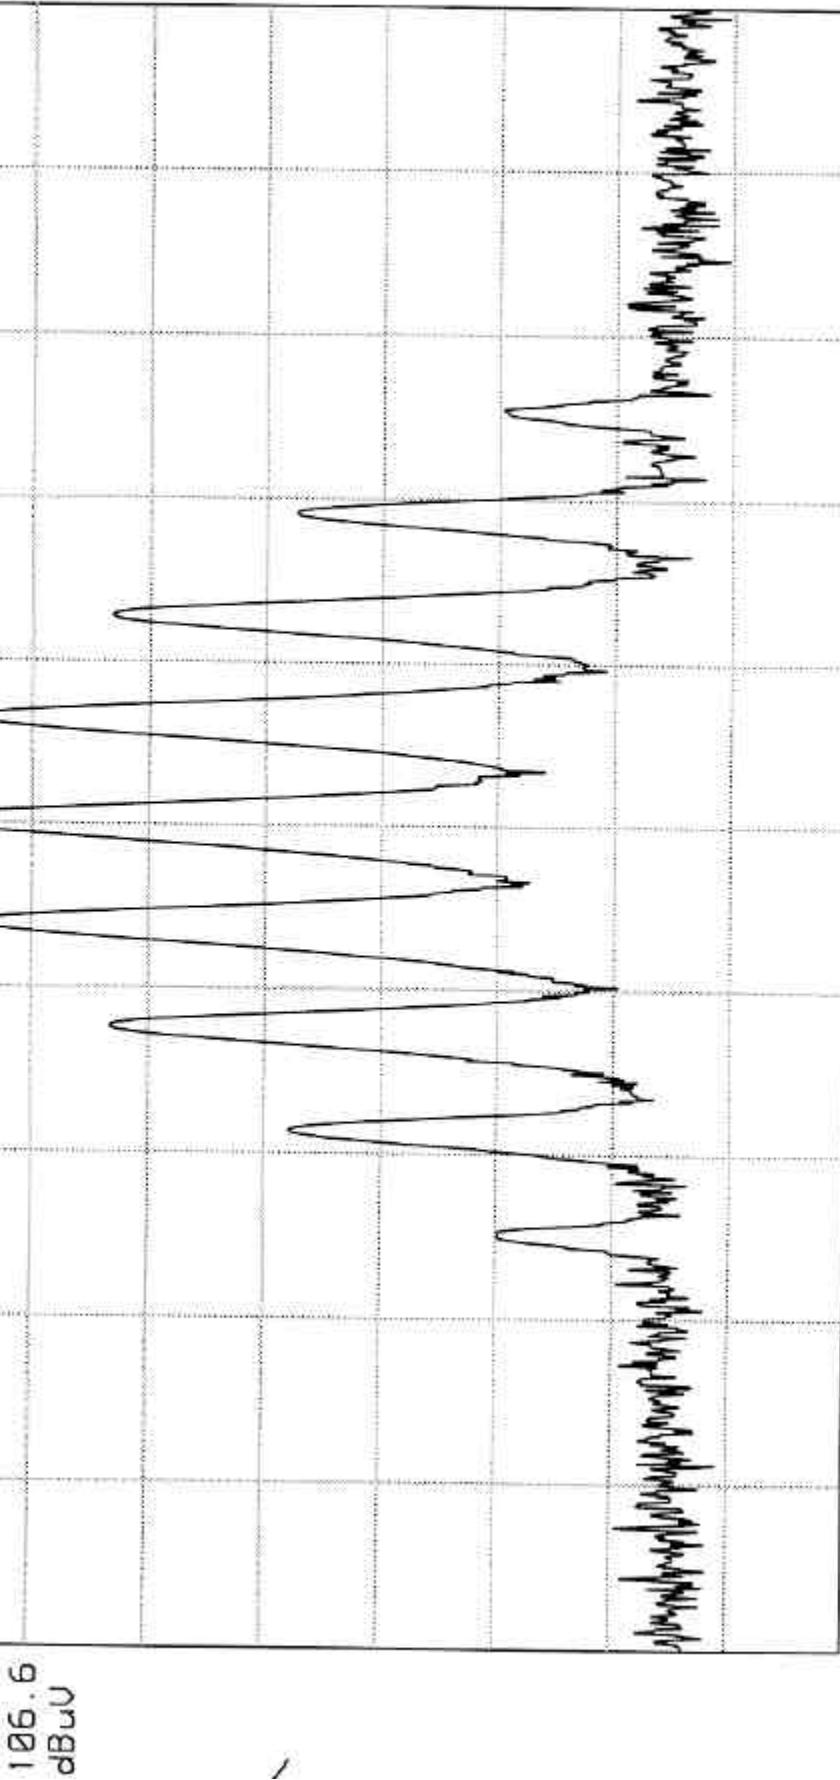

INTER 881.500 MHz RES BW 1 kHz (i) UBL 10 kHz SPAN 100 kHz SWP 750 msec


## ELITE ELECTRONIC ENGINEERING CO

ETR 21518

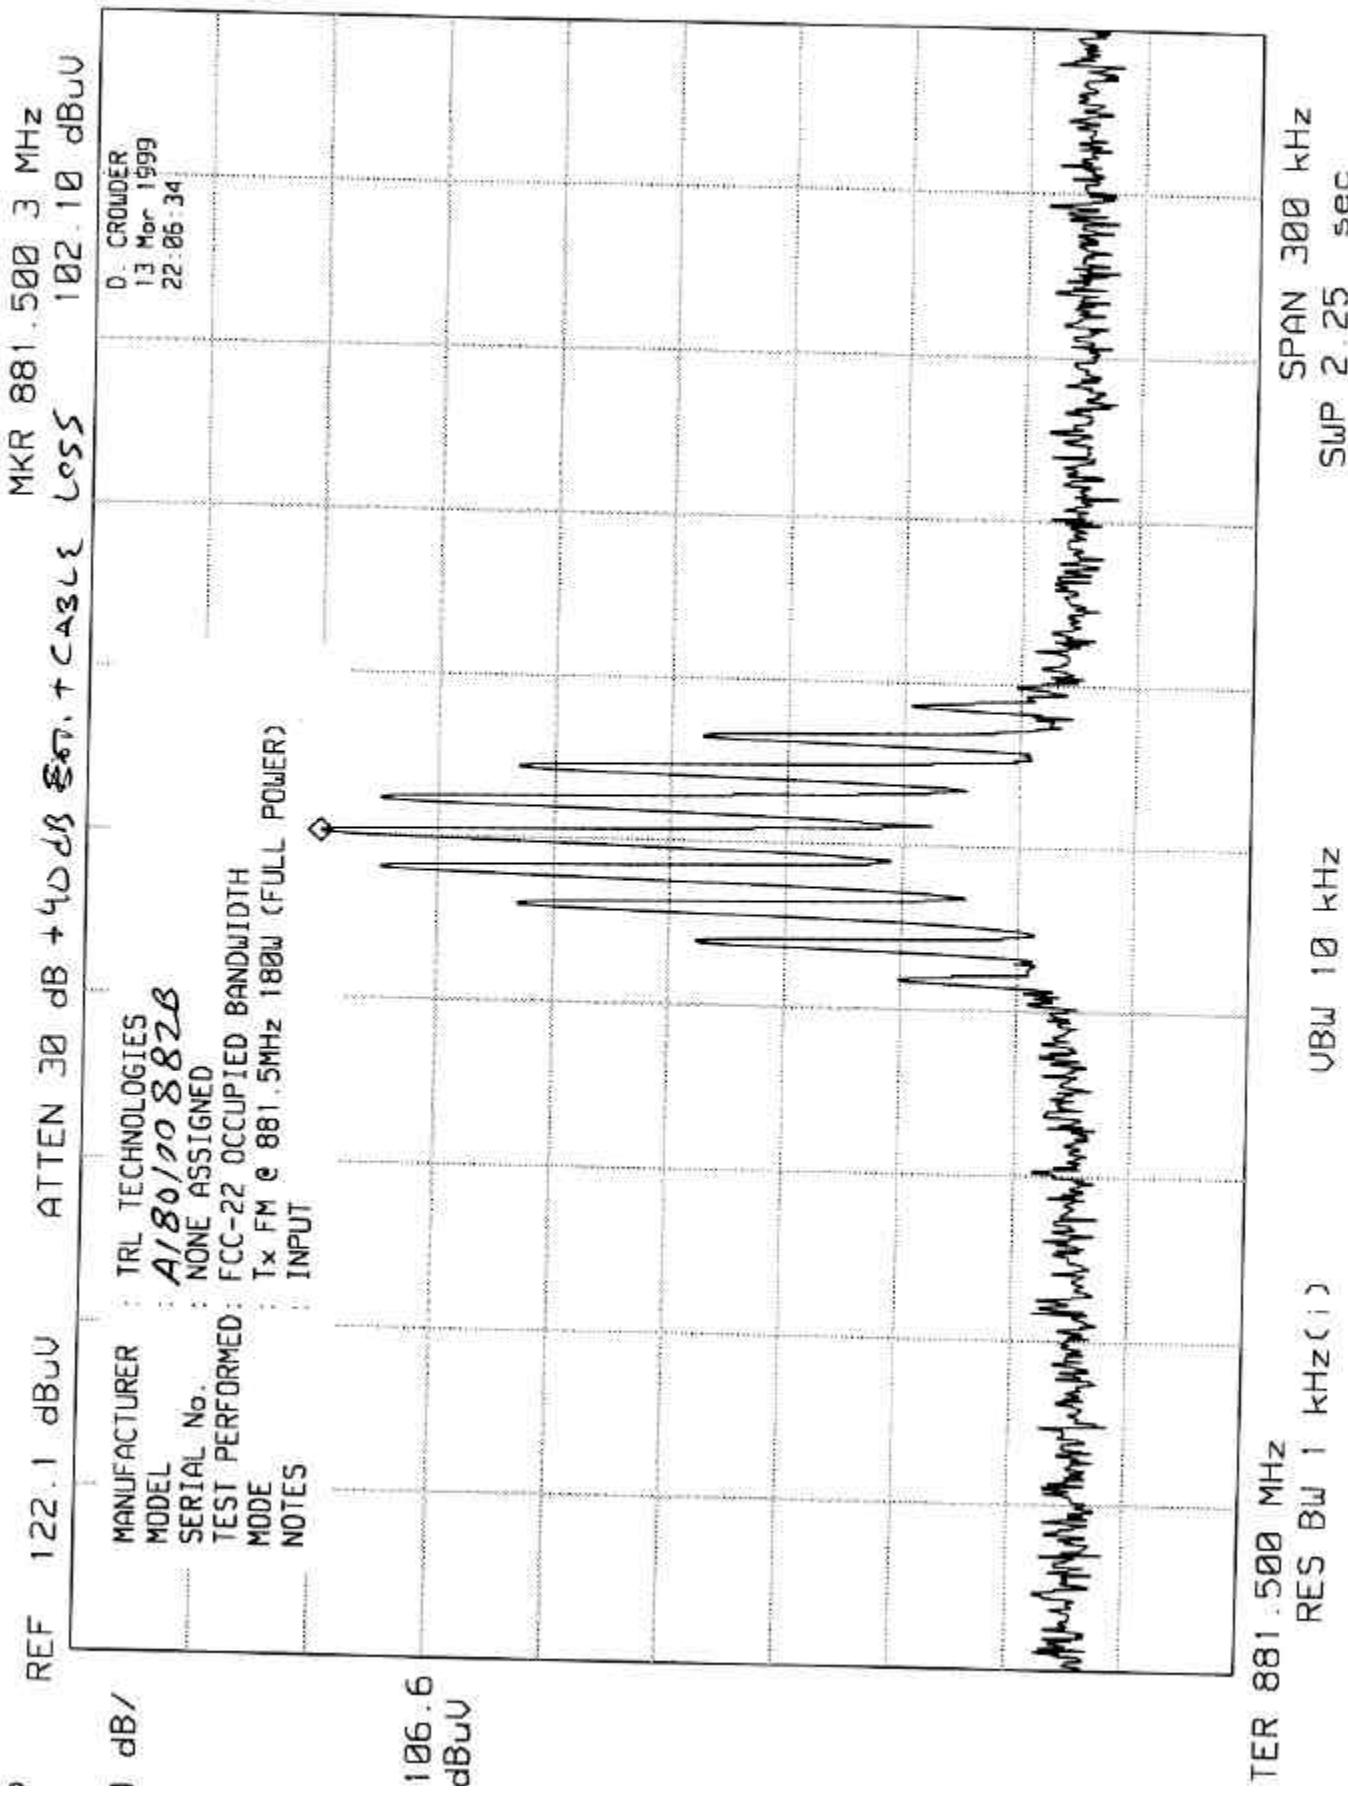


ELITE ELECTRONIC ENGINEERING CO

ETR 21518

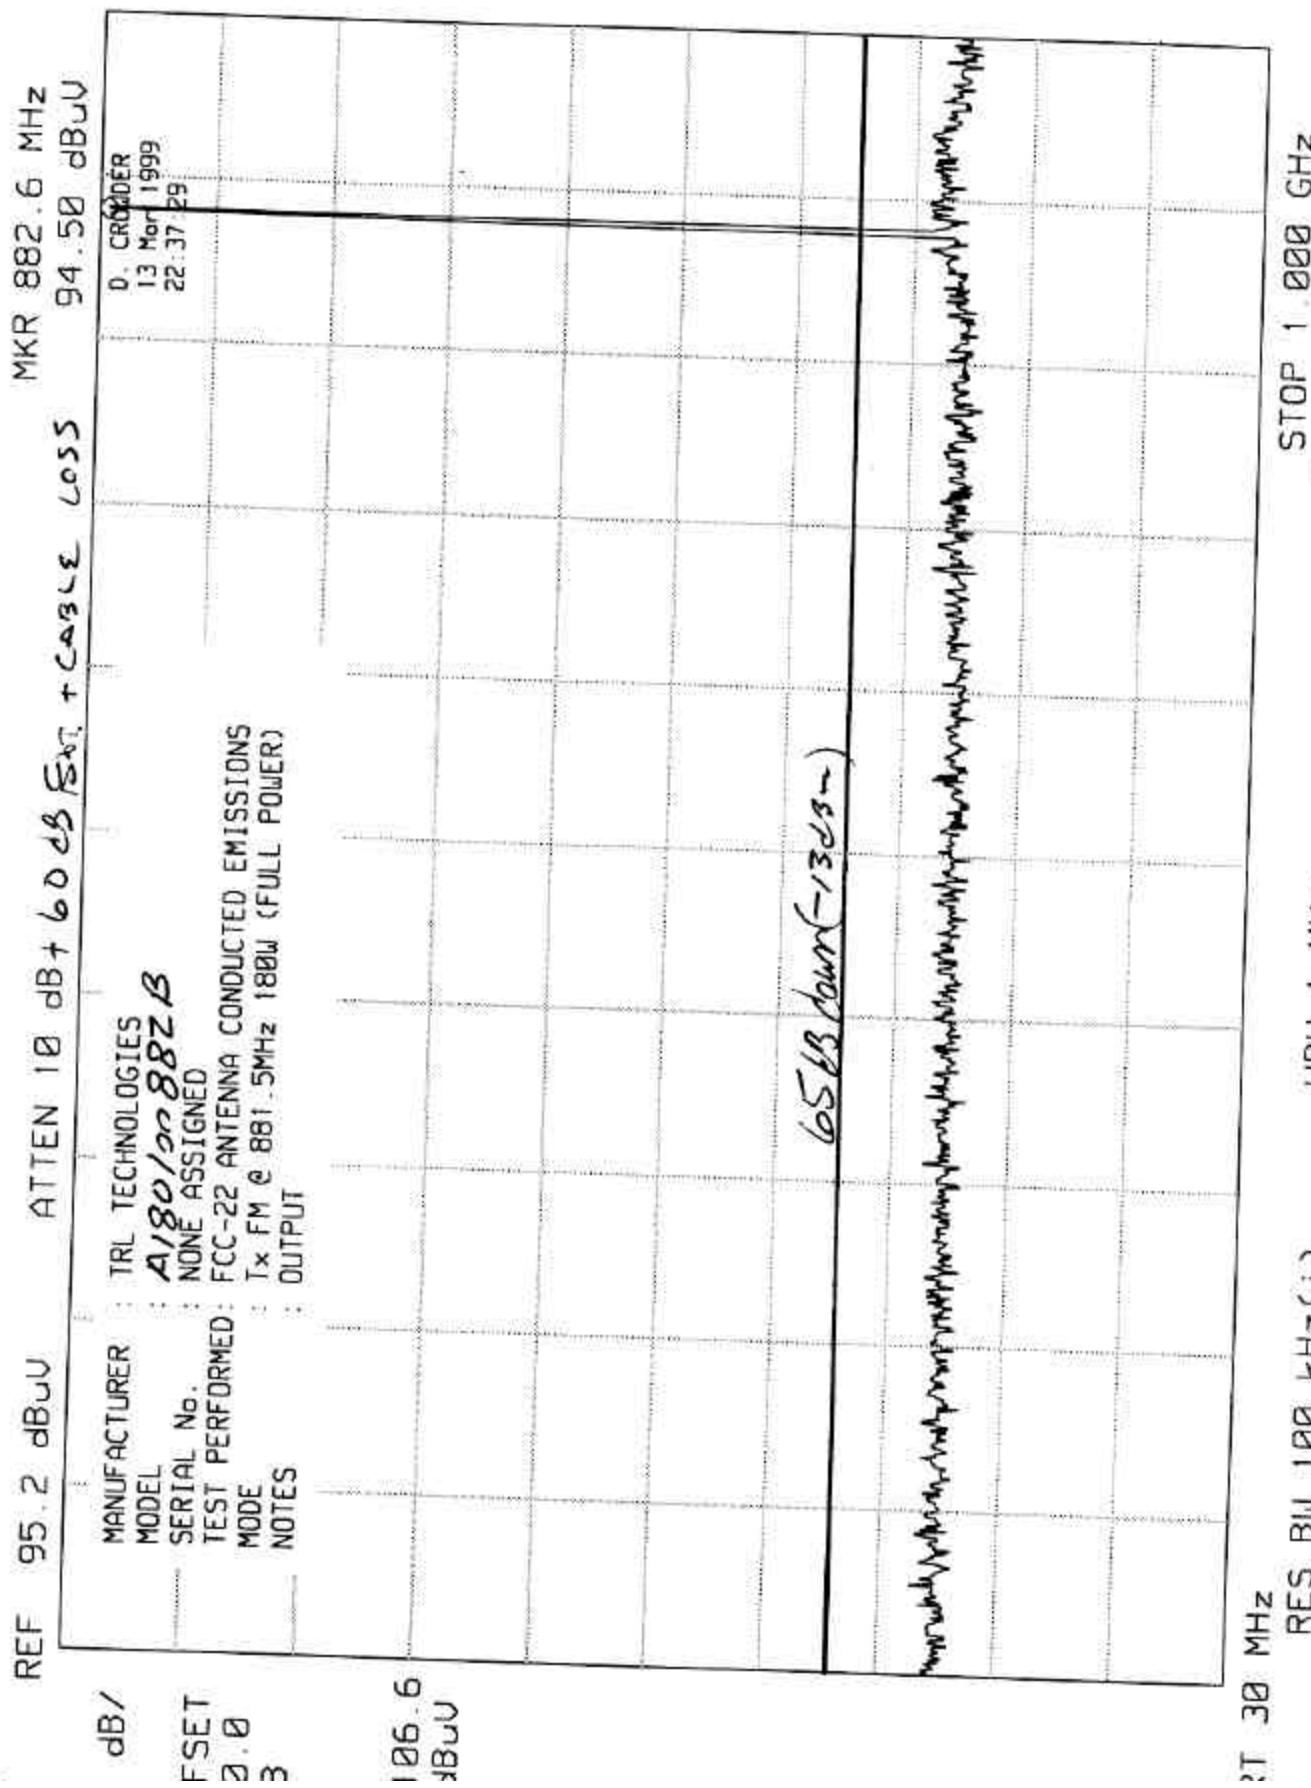


## ELITE ELECTRONIC ENGINEERING CO

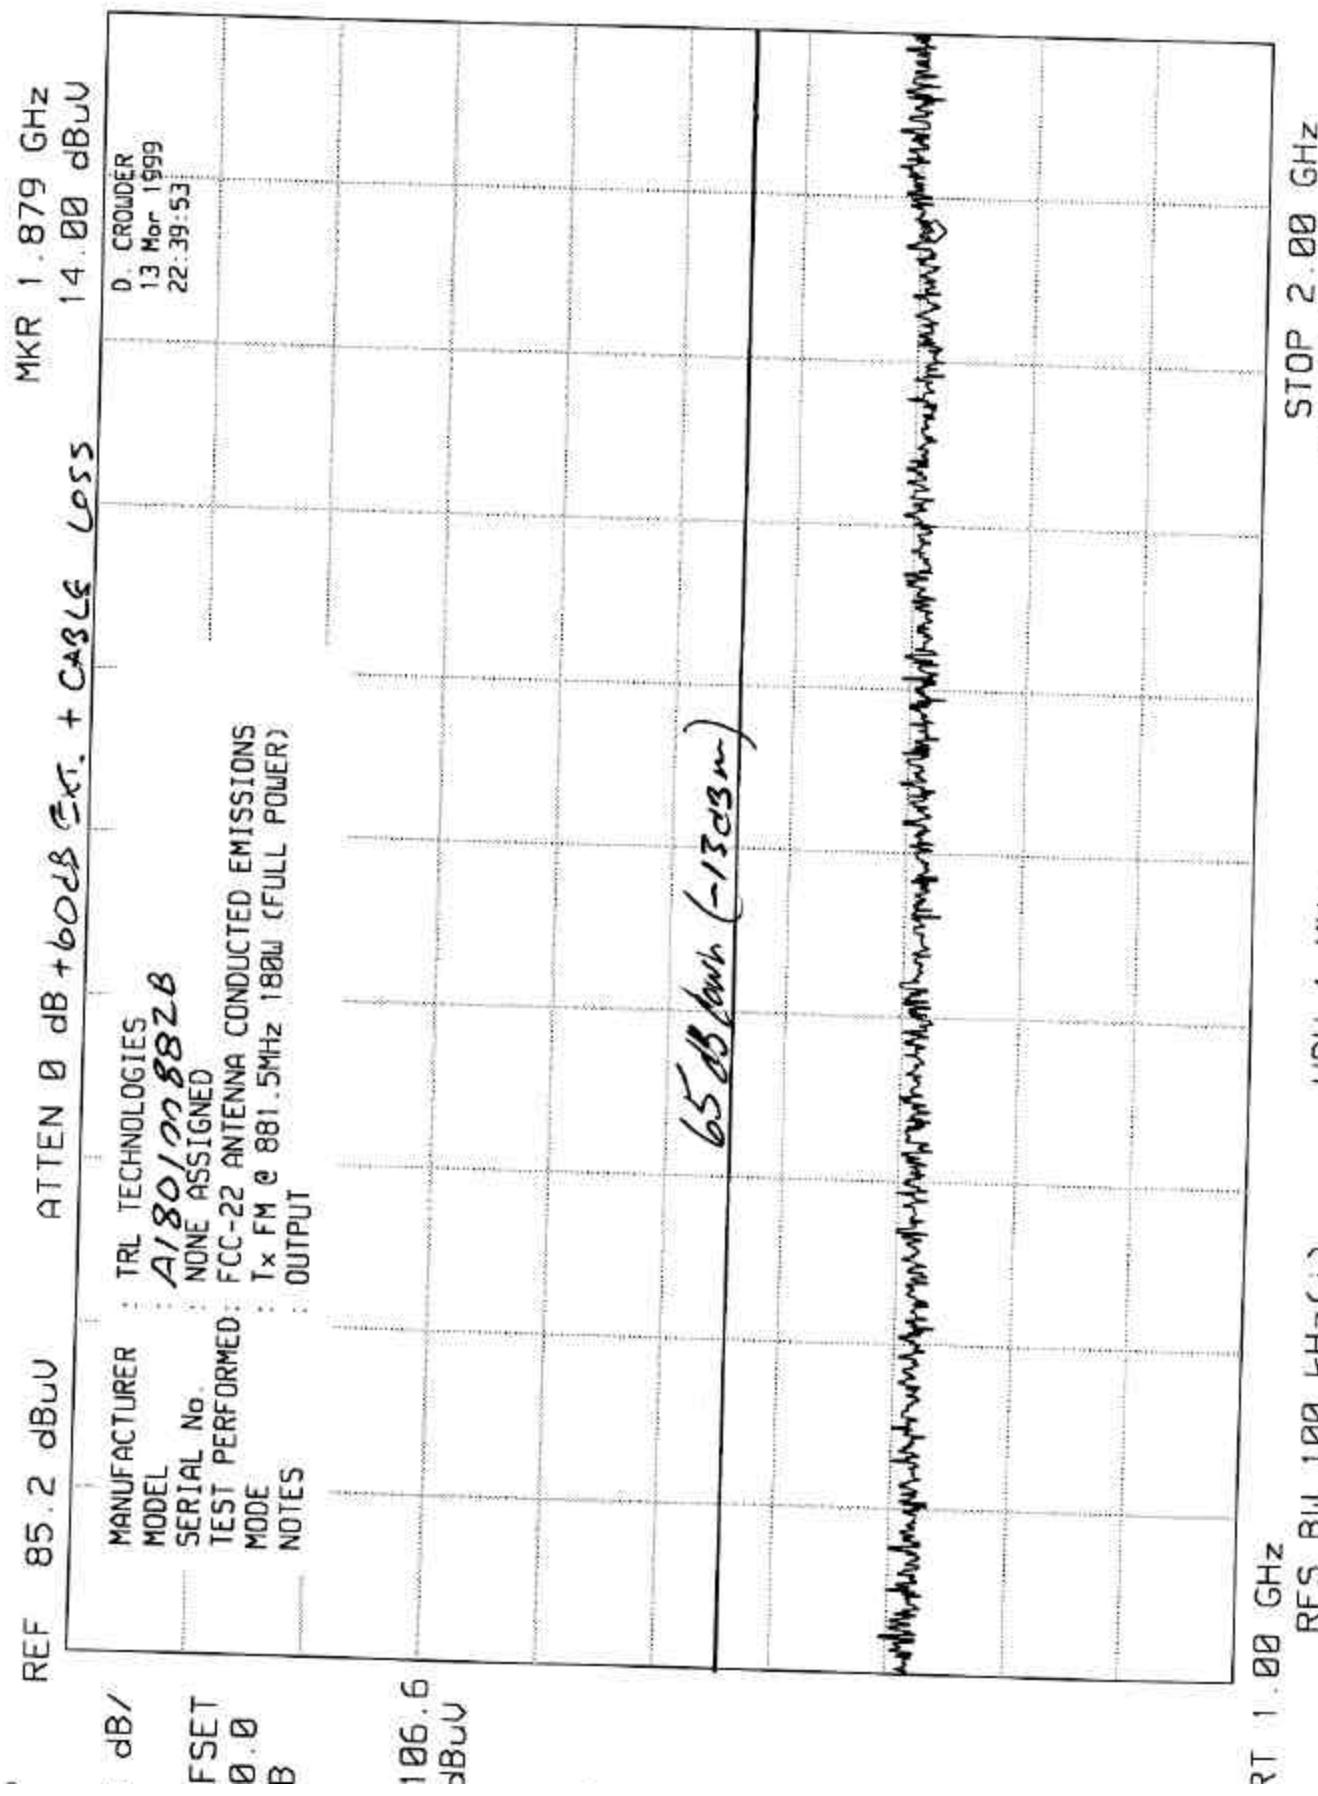


## ELITE ELECTRONIC ENGINEERING CO

REF 85.2 dBuU ATTN 0 dB + 60 dB GAT.

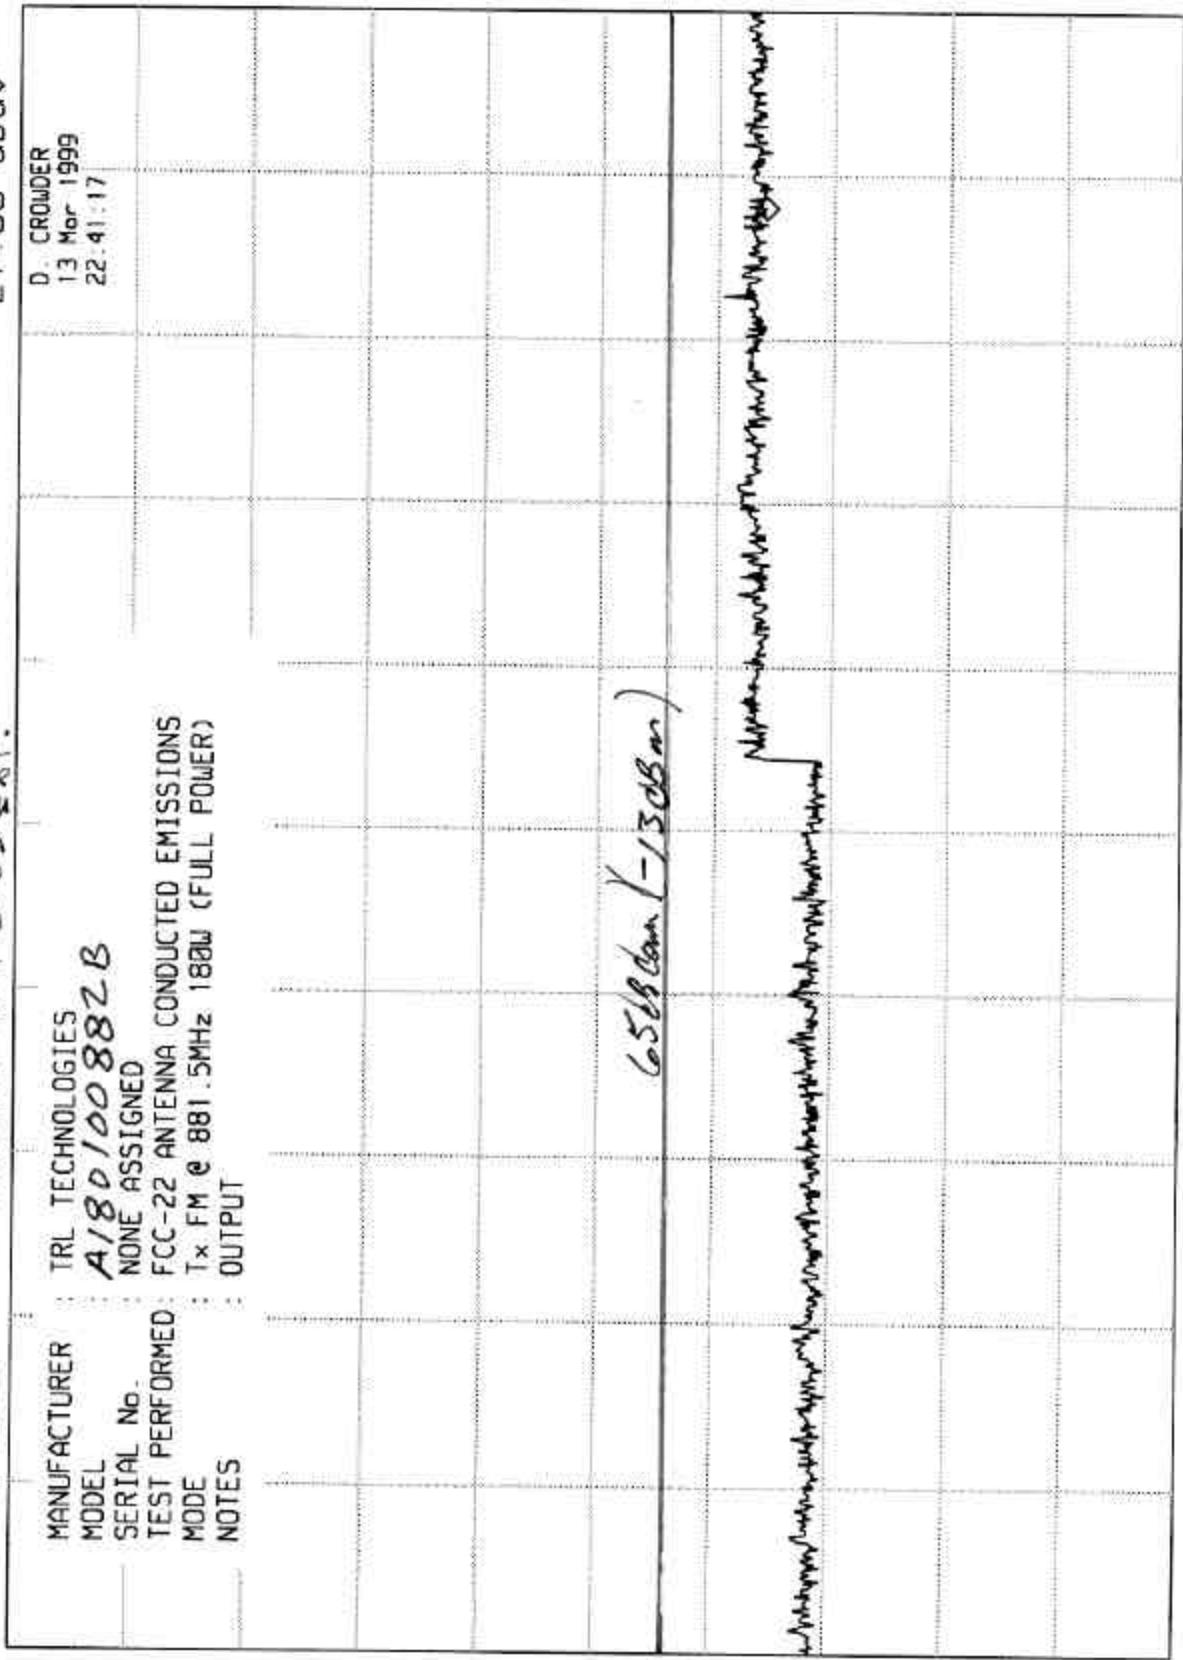MKR 8.153 GHz  
21.00 dBuU

ART 2.00 GHz  
RES BW 1 MHz (i) VBU 3 MHz  
STOP 9.00 GHz SUP 175 msec

## ELITE ELECTRONIC ENGINEERING CO

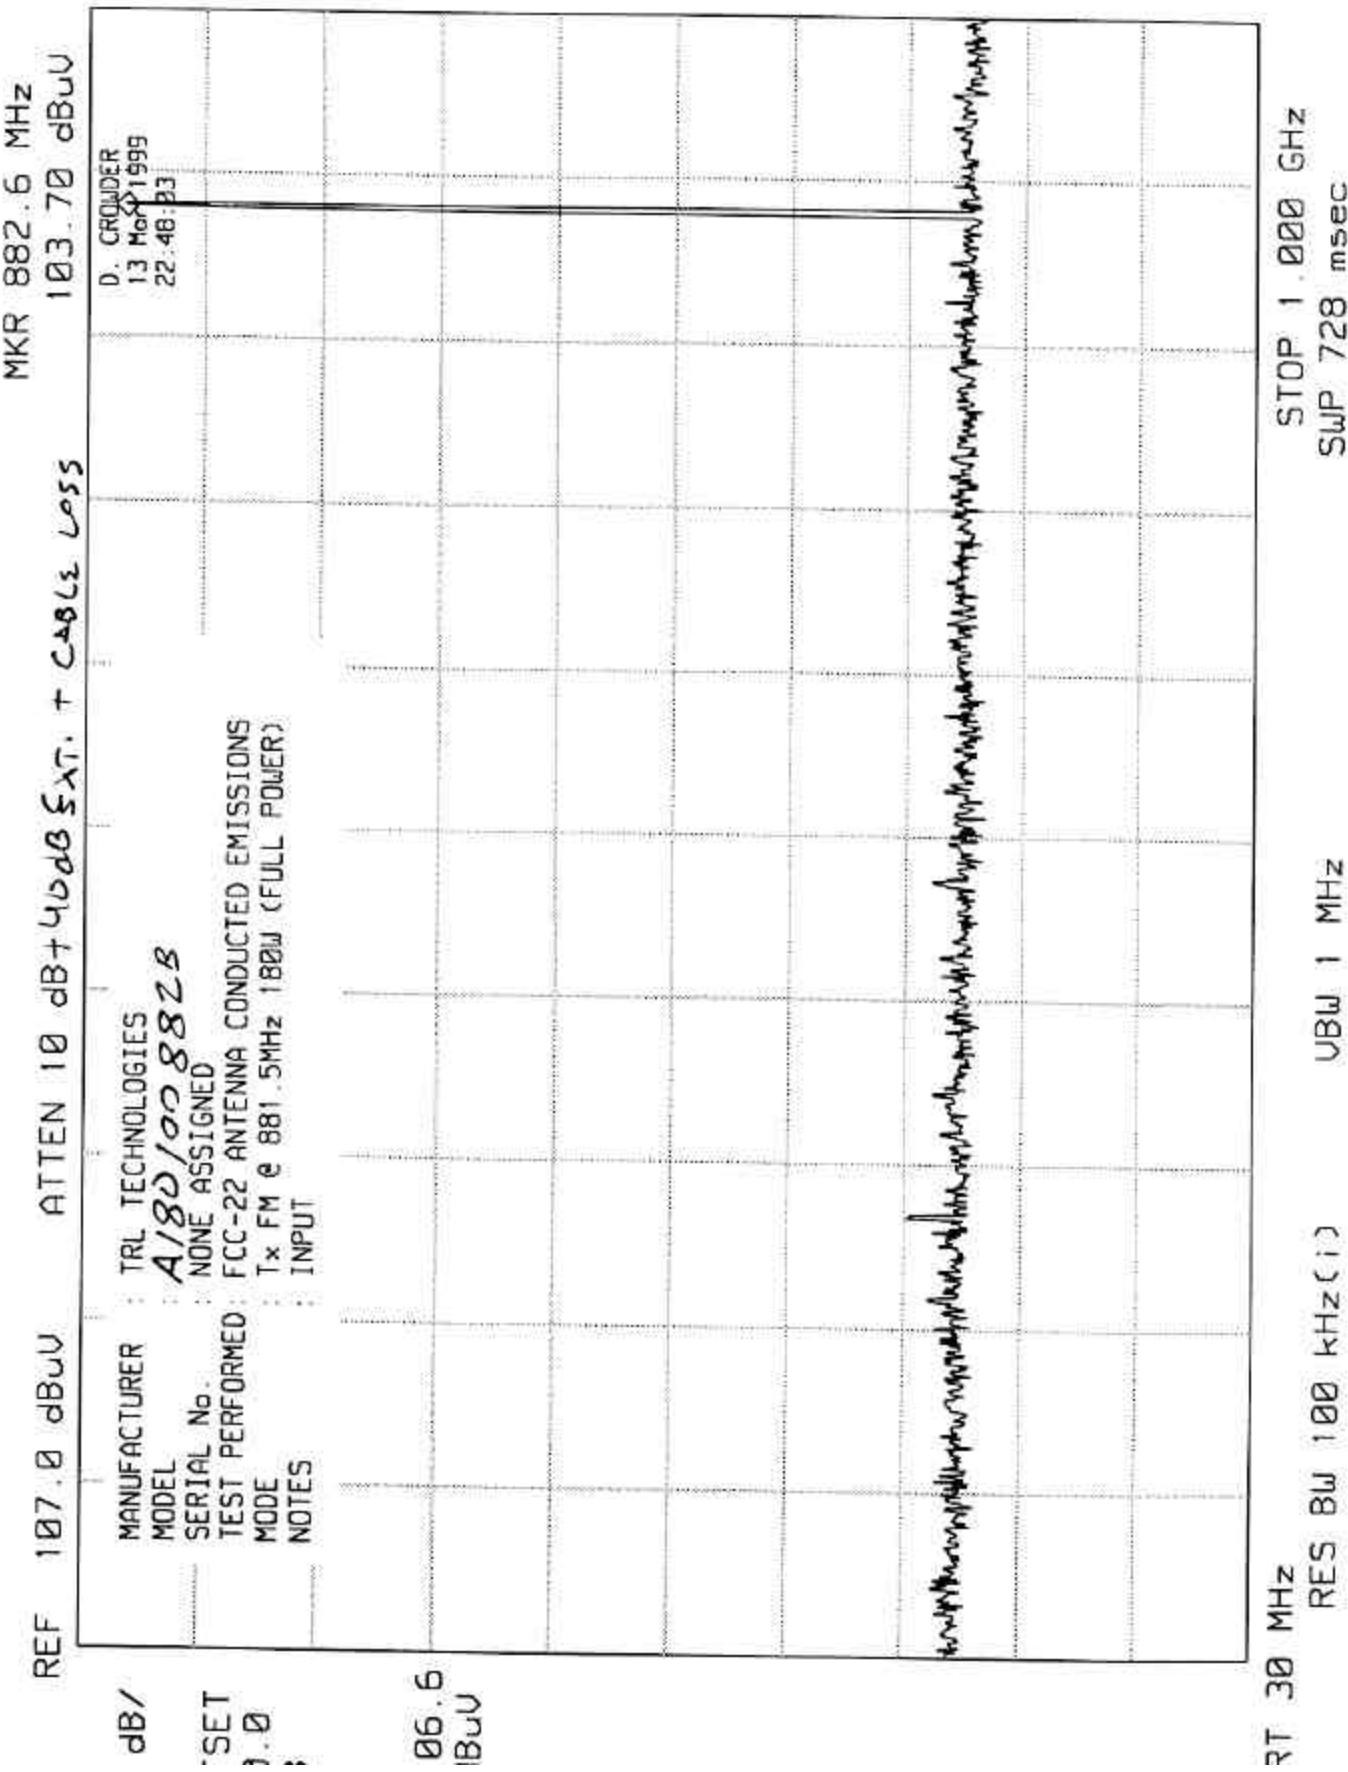


ELITE ELECTRONIC ENGINEERING Co.  
Downers Grove, Ill. 60515

UK03 82/24/98

UNIUEM BIN BIN 1

TEST SPEC	RADIATED NARROWBAND EMISSIONS FCC-22 SPURIOUS RAD EMISSIONS @ 3m		
MANUFACTURER	TRL TECHNOLOGIES		
MODEL No.	A180/00 8823		
S/N	NONE ASSIGNED		
MODE	Tx @ 881.5MHz 18dB (FULL POWER)		
DATE TESTED	13 Mar 1999		
NOTES	D. CROWDER INTO 50 OHMS VERTICAL		

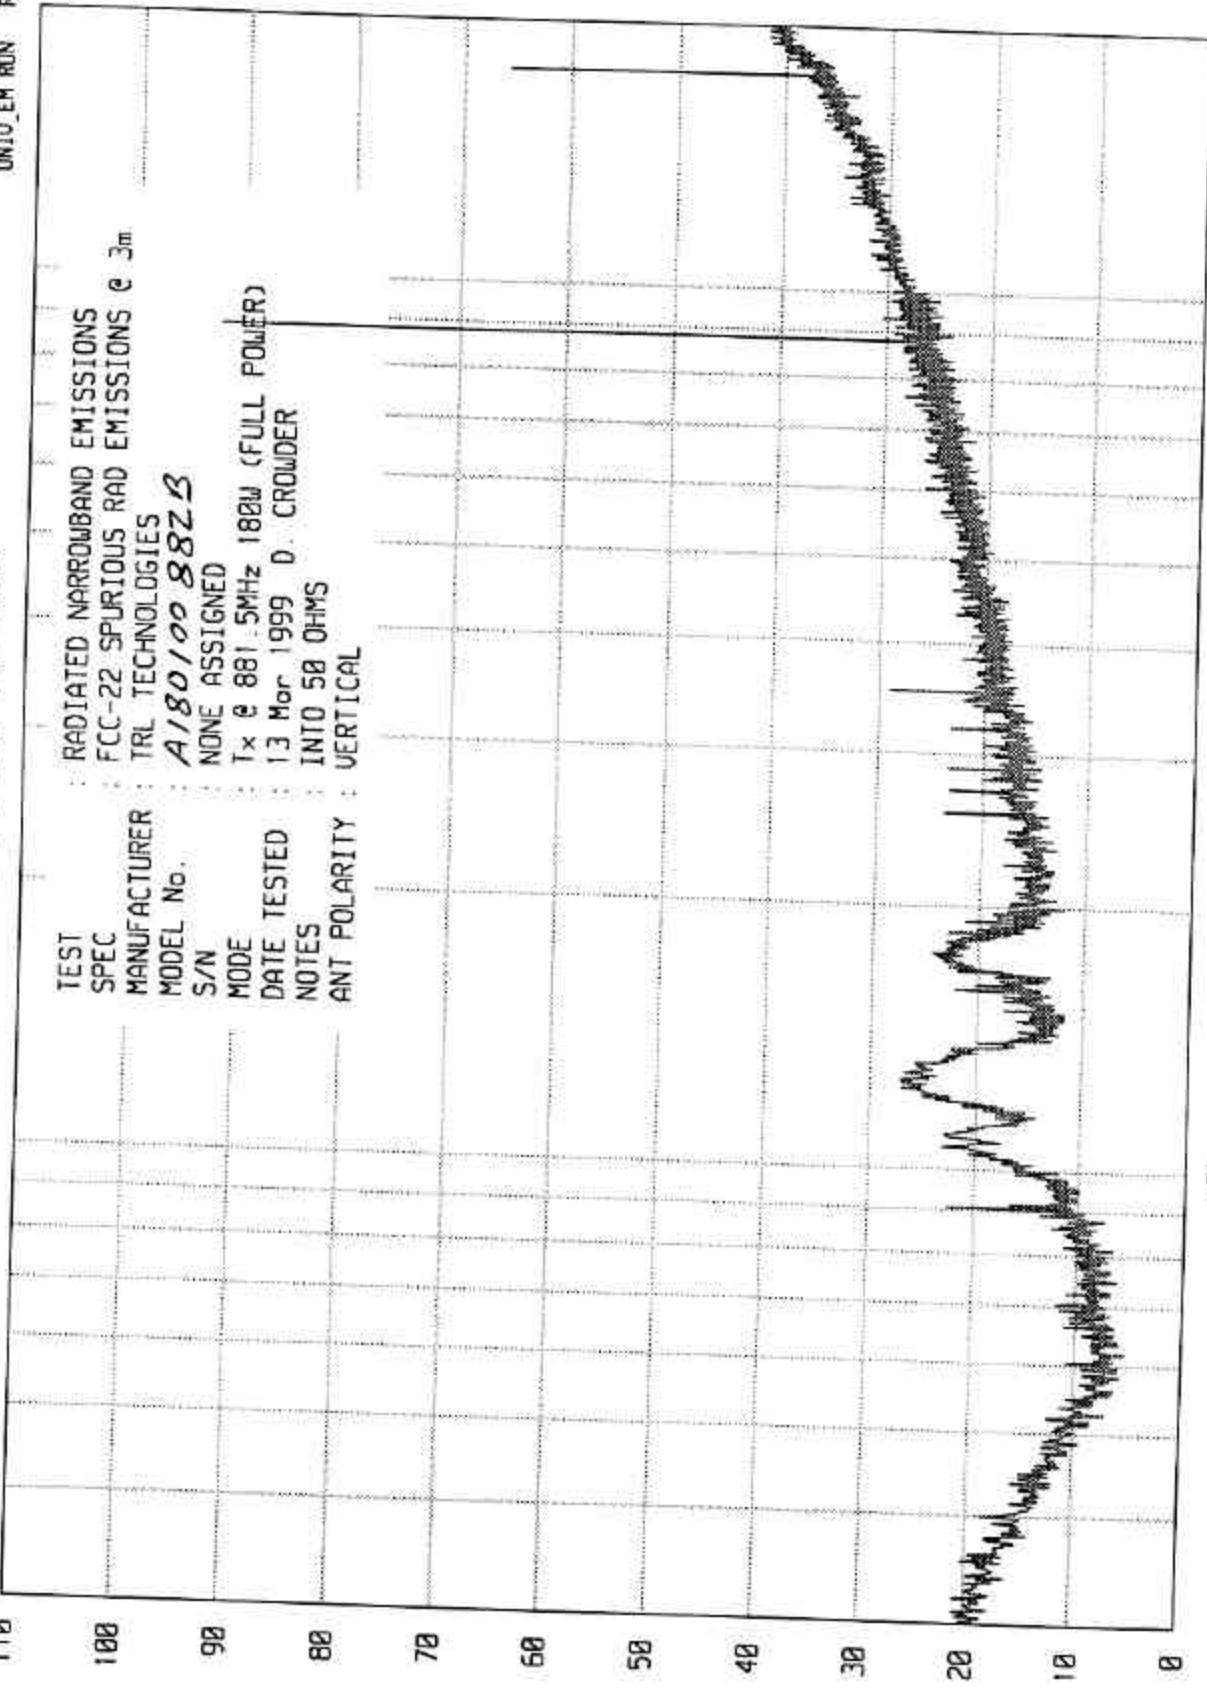

ETR 21518

STOP = 2000

FREQUENCY = MHz

1000

188

DE


EEC

ELITE ELECTRONIC ENGINEERING Co.

Downers Grove, IL 60515

WKA9 8/24/98

UNIT\_EM RUN RUN 2

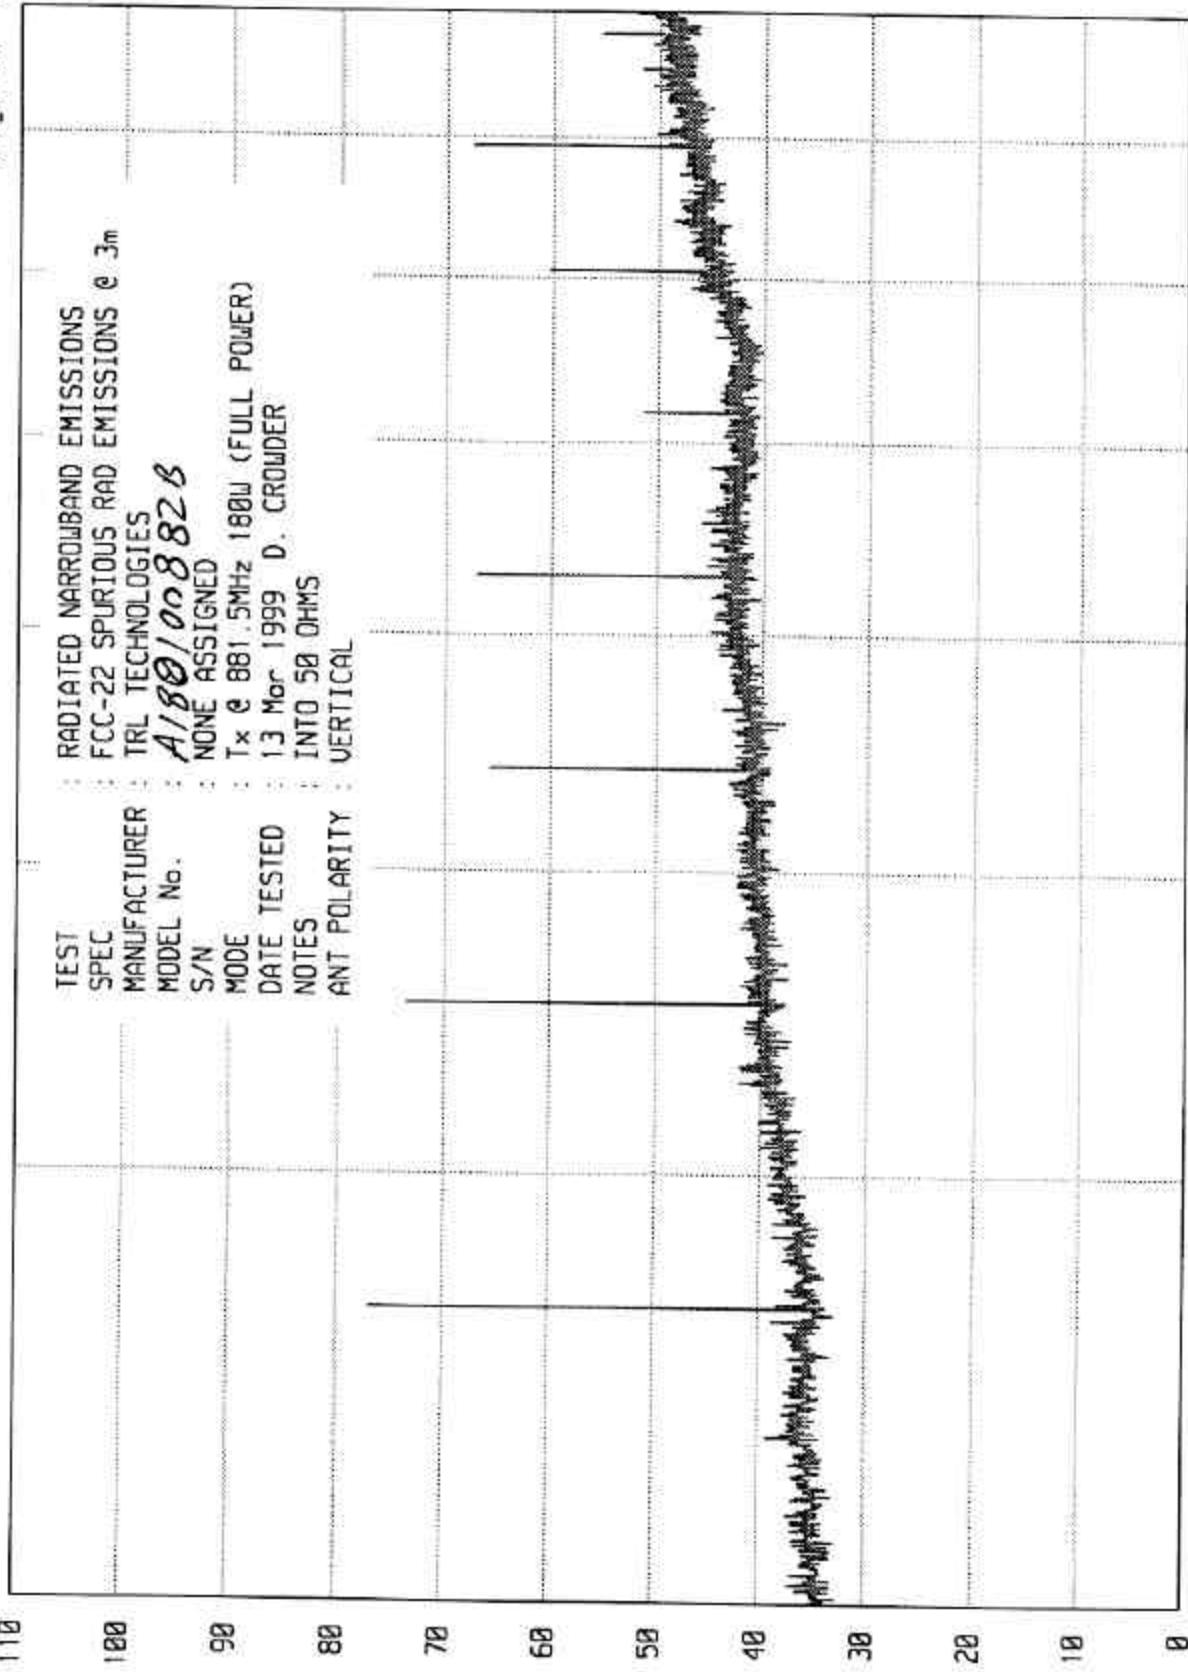

RT = 2000

STOP = 9000

ENGINEERING TEST REPORT NO. *Z1518*  
 ELITE ELECTRONIC ENGINEERING COMPANY

MANUFACTURER : TRL TECHNOLOGIES  
 MODEL : *A1801008826*  
 S/N : NONE ASSIGNED  
 SPECIFICATION : FCC-22 OPEN FIELD SPURIOUS RADIATED EMISSIONS  
 DATE : MARCH 13, 1999  
 NOTES : TRANSMIT AT 881.5MHz INTO 50 OHMS  
       : TEST DISTANCE IS 3 METERS

FREQ. (MHz)	ANT POL	MTR RDG (dBuV)	ANT FAC dB	CABLE FAC dB	PRE-AMP GAIN dB	CONV. F.I. to dBm(dipole)	TOTAL dBm	LIMIT dBm
1763.0	H	87.8	27.8	3.6	36.5	-97.2	-14.5	-13
	V	85.5	27.8	3.6	36.5	-97.2	-16.8	-13
2644.5	H	74.8	30.4	4.3	36.0	-97.2	-23.7	-13
	V	71.2	30.4	4.3	36.0	-97.2	-27.3	-13
3526.0	H	73.0	32.8	5.0	35.8	-97.2	-22.2	-13
	V	73.7	32.8	5.0	35.8	-97.2	-21.5	-13
4407.5	H	59.3	35.0	5.6	35.3	-97.2	-32.6	-13
	V	59.6	35.0	5.6	35.3	-97.2	-32.3	-13
5289.0	H	58.9	35.5	6.2	35.1	-97.2	-31.7	-13
	V	57.7	35.5	6.2	35.1	-97.2	-32.9	-13
6170.5	H	53.5	36.5	6.6	35.2	-97.2	-35.8	-13
	V	51.5	36.5	6.6	35.2	-97.2	-37.8	-13
7052.0	H	48.7	37.9	7.3	35.3	-97.2	-38.6	-13
	V	45.0	37.9	7.3	35.3	-97.2	-42.3	-13
7933.5	H	52.0	37.9	7.9	35.7	-97.2	-35.1	-13
	V	47.6	37.9	7.9	35.7	-97.2	-39.5	-13
8815.0	H	44.8	38.5	8.3	35.8	-97.2	-41.4	-13
	V	44.6	38.5	8.3	35.8	-97.2	-41.6	-13

CHECKED BY: *DLC*

*112*