

ELITE ELECTRONIC ENGINEERING COMPANY
1516 CENTRE CIRCLE
DOWNERS GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 28475

DATES TESTED: February 3, 2000

TEST PERSONNEL: Daniel E. Crowder

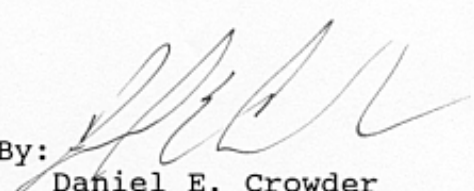
TEST SPECIFICATION: Federal Communication Commission (FCC) Part 22

ENGINEERING TEST REPORT NO. 22443
MEASUREMENT OF RF INTERFERENCE FROM
A MODEL NO. A180320882B 180 WATT AMPLIFIER

FOR: TRL Technologies
Hoffman Estates, Illinois

PURCHASE ORDER NO: 98-678

Report By:


Daniel E. Crowder

Approved By:


Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

ENGINEERING TEST REPORT NO. 22443

ADMINISTRATIVE DATA AND SUMMARY OF TESTS

DESCRIPTION OF TEST ITEM: 180 Watt Amplifier for single channel operation

MODEL NO: A180320882B

SERIAL NO: None Assigned

FCC ID: OEUPA882M180WS2

MANUFACTURER: TRL Technologies, Inc.

APPLICABLE SPECIFICATIONS: FCC Parts 2 and 22

QUANTITY OF ITEMS TESTED: One (1)

TEST PERFORMED BY: ELITE ELECTRONIC ENGINEERING COMPANY
Radio Interference Consultants
Downers Grove, Illinois 60515

DATES TESTED: February 3, 2000

PERSONNEL (OPERATORS, OBSERVERS, AND CO-ORDINATORS):

CUSTOMER: Hiep Lam of TRL Technologies was present for all testing.

ELITE ELECTRONIC: Daniel E. Crowder

ELITE JOB NO.: 28475

ABSTRACT: The Model No. A180320882B, 180 Watt Amplifier complies with the occupied bandwidth and spurious radiated emissions requirements in FCC PART 22. See test results and data pages for more details.

ENGINEERING TEST REPORT NO. 22443

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.0	INTRODUCTION	1
1.1	DESCRIPTION OF TEST ITEM	1
1.2	PURPOSE	1
1.3	DEVIATIONS, ADDITIONS AND EXCLUSIONS	1
1.4	APPLICABLE DOCUMENTS	1
1.5	SUBCONTRACTOR IDENTIFICATION	1
2.0	TEST ITEM SETUP AND OPERATION	2
2.1	SETUP	2
2.2	MODULATION	2
2.3	FREQUENCY SELECTION	2
3.0	TEST EQUIPMENT	2
4.0	REQUIREMENTS, PROCEDURES AND RESULTS	2
4.1	OCCUPIED BANDWIDTH MEASUREMENTS	2
4.1.1	REQUIREMENTS	3
4.1.2	PROCEDURES	3
4.1.3	RESULTS	3
4.2	FIELD STRENGTH OF SPURIOUS EMISSIONS	4
4.2.1	REQUIREMENTS	4
4.2.2	PROCEDURES	4
4.2.3	RESULTS	5
5.0	CONCLUSION	5
6.0	CERTIFICATION	6
TABLE I	EQUIPMENT LIST	7

ENGINEERING TEST REPORT NO. 22443**MEASUREMENT OF RF INTERFERENCE FROM****A MODEL NO. A180320882B 180 WATT AMPLIFIER****1.0 INTRODUCTION:**

1.1 DESCRIPTION OF TEST ITEM: This report present the results of the radio interference measurements were performed on a 180 Watt Amplifier for single channel cellular applications, Model No. A180320882B, (hereinafter referred to as the test item). No serial number was assigned to the test item. The tests were performed for TRL Technologies of Hoffman Estates, Illinois.

1.2 PURPOSE: The test series was performed to determine if the test item meets the occupied bandwidth and spurious radiated emissions requirements of the FCC Part 22 for 869-894MHz Amplifiers.

1.3 DEVIATIONS, ADDITIONS AND EXCLUSIONS: There were no deviations, additions to, or exclusions from the test specification during this test series.

1.4 APPLICABLE DOCUMENTS: The following documents of the exact issue designated form part of this document to the extent specified herein:

Federal Communications commission "Code of Federal Regulations", Title 47, Part 22

Federal communications Commission "Code of Federal Regulations", Title 47, Part 2

ANSI C63.4-1992, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

1.5 SUBCONTRACTOR IDENTIFICATION: This series of tests was performed by the Elite Electronic Engineering Company, radio interference consultants of Downers Grove, Illinois.

ENGINEERING TEST REPORT NO. 22443

2.0 TEST ITEM SETUP AND OPERATION:

2.1 SETUP: The test item was powered with 26VDC from a power supply. An input signal from a Hewlett Packard model 8648C signal generator (used in conjunction with a Hewlett Packard 8111A function generator) was fed into an Ophir model GRF5064 RF power amplifier. The 15 Watt output of the Ophir amplifier was used to drive the test item. The level of the input signal was adjusted until the power output was at the maximum level.

2.2 MODULATION: The test signal was frequency modulated (FM) with a 6.5 kHz audio tone at 12.0kHz deviation which is a typical modulation for 869-894MHz radio services.

2.3 FREQUENCY SELECTION: A single frequency in the center of the frequency band was selected.

The specific test frequencies are designated as follows:

Modulation Type	Frequency (MHz)_____
FM	881.5

3.0 TEST EQUIPMENT:

A list of the test equipment used can be found on Table 1. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**4.1 OCCUPIED BANDWIDTH MEASUREMENTS:**

4. 1. 1 REQUIREMENTS: In accordance with Paragraph 22.917(b), the peak power of any emission shall be attenuated below the

ENGINEERING TEST REPORT NO. 22443

Unmodulated carrier power(P)in accordance with the following schedule:

(1)On any frequency removed from the carrier frequency by more than 20kHz but not more than 45kHz: At least 26 dB.

(2)On any frequency removed from the carrier frequency by more than 45kHz, up to the first multiple of the carrier frequency: at least 60dB or $43 + 10\log (P)$ dB, whichever is the lesser attenuation.

4.1.2 PROCEDURES:

(a) The input signal was set to 881.5MHz. The input signal level was adjusted to provide the maximum level at the test item output.

(b) The input signal was FM modulated.

(c) A spectrum analyzer was connected to the output of the test item. With a bandwidth of the spectrum analyzer set to 1kHz, the output of the test item was measured and recorded.

(d) The input signal from the driving amplifier was measured with the spectrum analyzer and recorded over the same frequency range.

4.1.3 RESULTS: The plots of the occupied bandwidth measured with the FM modulation of the carrier are presented on data pages 101 through 105.

The limits, shown on the plots, are referenced to the power measured from the unmodulated carrier.

As can be seen from the data, the test item output met the occupied bandwidth requirements with the FM modulation of the carrier. The sideband emissions measured at the test item output were similar to the sideband emissions measured from the input signals.

4.2 FIELD STRENGTH OF SPURIOUS EMISSIONS:

4.2.1 REQUIREMENTS: In accordance with Paragraph 22.917,

ENGINEERING TEST REPORT NO. 22443

on any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: by at least $43 + 10 \log(P)$ dB. This requirement translates to a field strength limit of -13dBm (ERP). The emissions shall be measured from 30MHz up to the 10th harmonic of the fundamental frequency.

4.2.2 PROCEDURES: The radiated tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI 63.4 and CISPR 16 requirements for site attenuation.

Preliminary radiated measurements are performed to determine the frequencies where the significant emissions might be found. With the test item at one set position and the measurement antenna at a set height (i.e. without maximizing), the radiated emissions were measured using peak detection. This data was then automatically plotted. The frequencies where significant emission levels found were remeasured taking the extra pains to maximize the emission levels.

Measurements were performed with the input signal modulated.

(a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.

(b) The input frequency was set to 881.5MHz with (CW) no modulation. The level was adjusted for 180 Watts output. The output was terminated in 50 Ohm load. The modulation was reapplied.

(c) Preliminary emission levels were measured over the frequency

ENGINEERING TEST REPORT NO. 22443

range from 30MHz to 9GHz. These preliminary levels were then plotted. The readings were taken with a peak detector function. The measurement BW was 100kHz up to 1GHz and 1MHz up to 9GHz.

(d) Significant emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. Measurement BW was 1MHz for frequencies above 1GHz and 100kHz for frequencies 1GHz or less. Peak readings were recorded. No averaging methods or corrections were applied. As a minimum measurements were made at each harmonic of the transmit frequency up through the tenth harmonic. If no signal was detected above the noise floor, the noise level was recorded and noted as ambient.

4.2.3 RESULTS: The preliminary plots are presented on data pages 106 and 107. This data is only presented for a reference, and is not used as to determine compliance. All significant radiated emissions were subsequently remeasured manually maximizing the level.

The final radiated levels are presented on data page 108. The radiated emissions were measured through the 10th harmonic. Field strength levels are presented as equivalent radiated power from a standard tuned dipole.

The radiated emission levels for the harmonics were below the specification limit.

5.0 CONCLUSION:

The Model No. A180320882B 180 Watt Amplifier for 869-894MHz, complies with the Occupied Bandwidth and the Field Strength of Spurious Emissions requirements of the FCC Part 22 and 2.

ENGINEERING TEST REPORT NO. 22443

6.0 CERTIFICATION:

Elite Electronic Engineering Company certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.

ENGINEERING TEST REPORT NO. 22443

TABLE 1: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENG. INC.

Page: 1

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
Equipment Type: ACCESSORIES, MISCELLANEOUS								
XZG0	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	3439A02724	---	01/29/99	N/A	
Equipment Type: AMPLIFIERS								
APK0	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	3008A00662	1-26.5GHZ	01/31/00	12	01/31/01
Equipment Type: ANTENNAS								
N7A0	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL611	2057	.03-2GHZ	04/10/99	12	04/10/00
NWH0	DOUBLE RIDGED WAVEGUIDE	TENSOR	4105	2081	1-12.4GHZ	08/27/99	12	08/27/00
Equipment Type: ATTENUATORS								
T1E5	100B, 25W ATTENUATOR	WEINSCHTEL	46-10-34	BG3492	DC-18GHZ	11/24/99	12	11/24/00
T2D1	200B, 25W ATTENUATOR	WEINSCHTEL	46-20-43	AV5814	DC-18GHZ	03/09/99	12	03/09/00
TTA0	300B, 500W ATTENUATOR	BIRD ELECTRONIC	8325	2148	DC-1000MHZ	09/15/99	12	09/15/00
Equipment Type: CONTROLLERS								
CDD2	COMPUTER	HEWLETT PACKARD	D4171A#ABA	US61654645	---		N/A	
CMA0	MULTI-DEVICE CONTROLLER	EMCO	2090	9701-1213	---		N/A	
Equipment Type: RECEIVERS								
RAC1	SPECTRUM ANALYZER	HEWLETT PACKARD	85660B	3407A08369	100HZ-22GHZ	01/19/00	12	01/19/01
RAC2	RF PRESELECTOR	HEWLETT PACKARD	85685A	2648A00507	20HZ-2GHZ	01/10/00	12	01/10/01
RAF3	QUASIPeAK ADAPTER	HEWLETT PACKARD	85650A	3303A01775	0.01-1000MHZ	01/19/00	12	01/19/01
Equipment Type: TEST CHAMBERS (EMI)								
RM17	3M ANECHOIC CHAMBER MEETS	EMC TEST SYSTEM	3M ANECHOIC		30MHZ-18GHZ	03/30/99	12	03/30/00

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.