






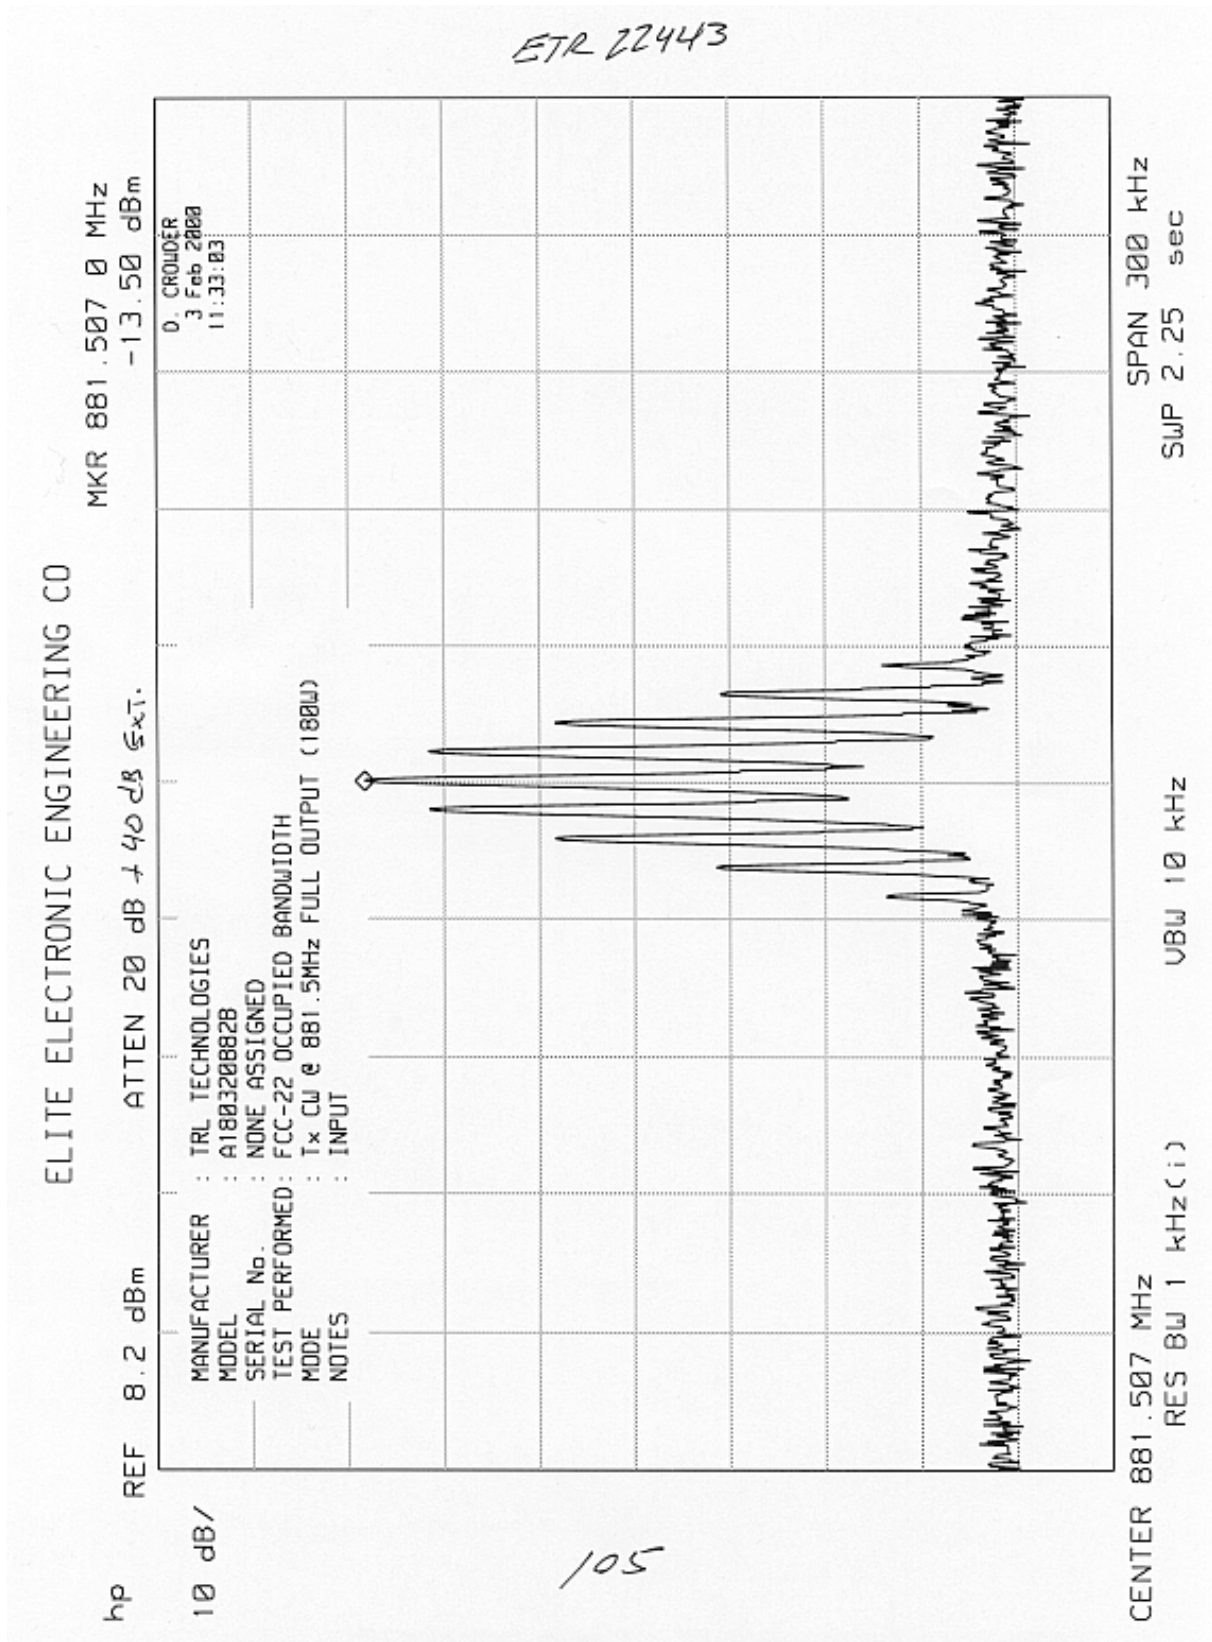

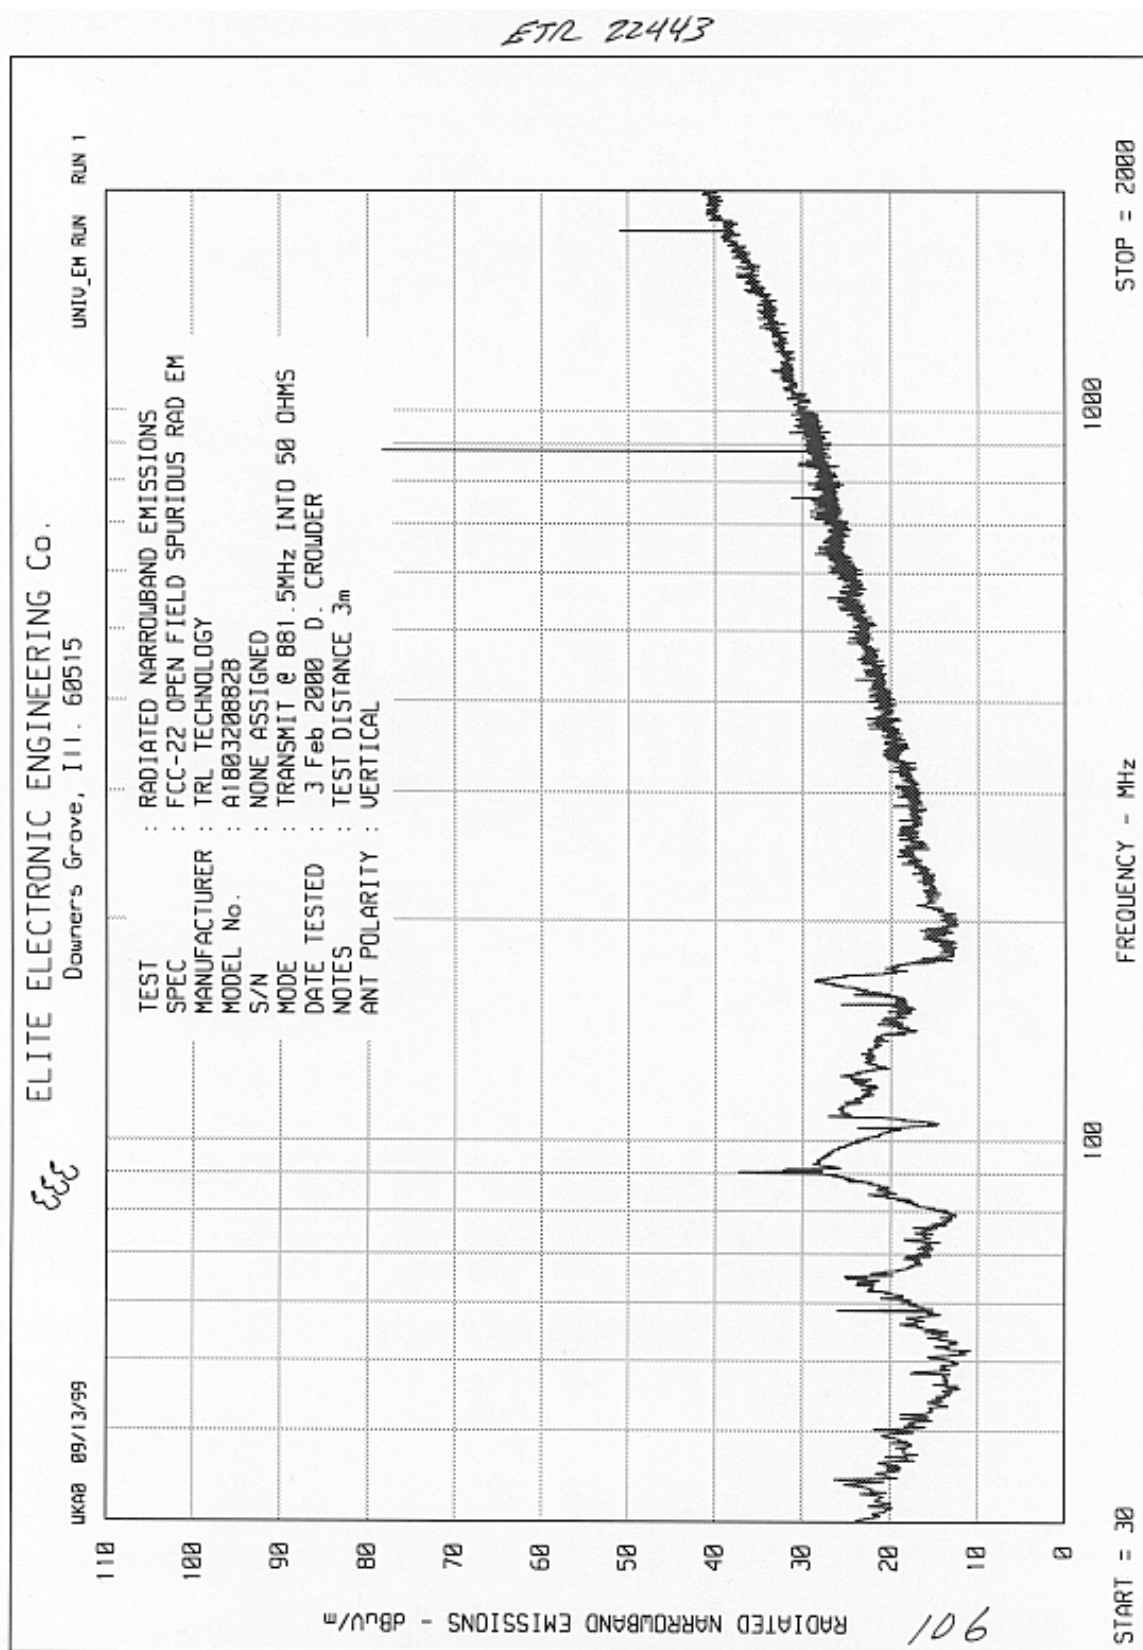

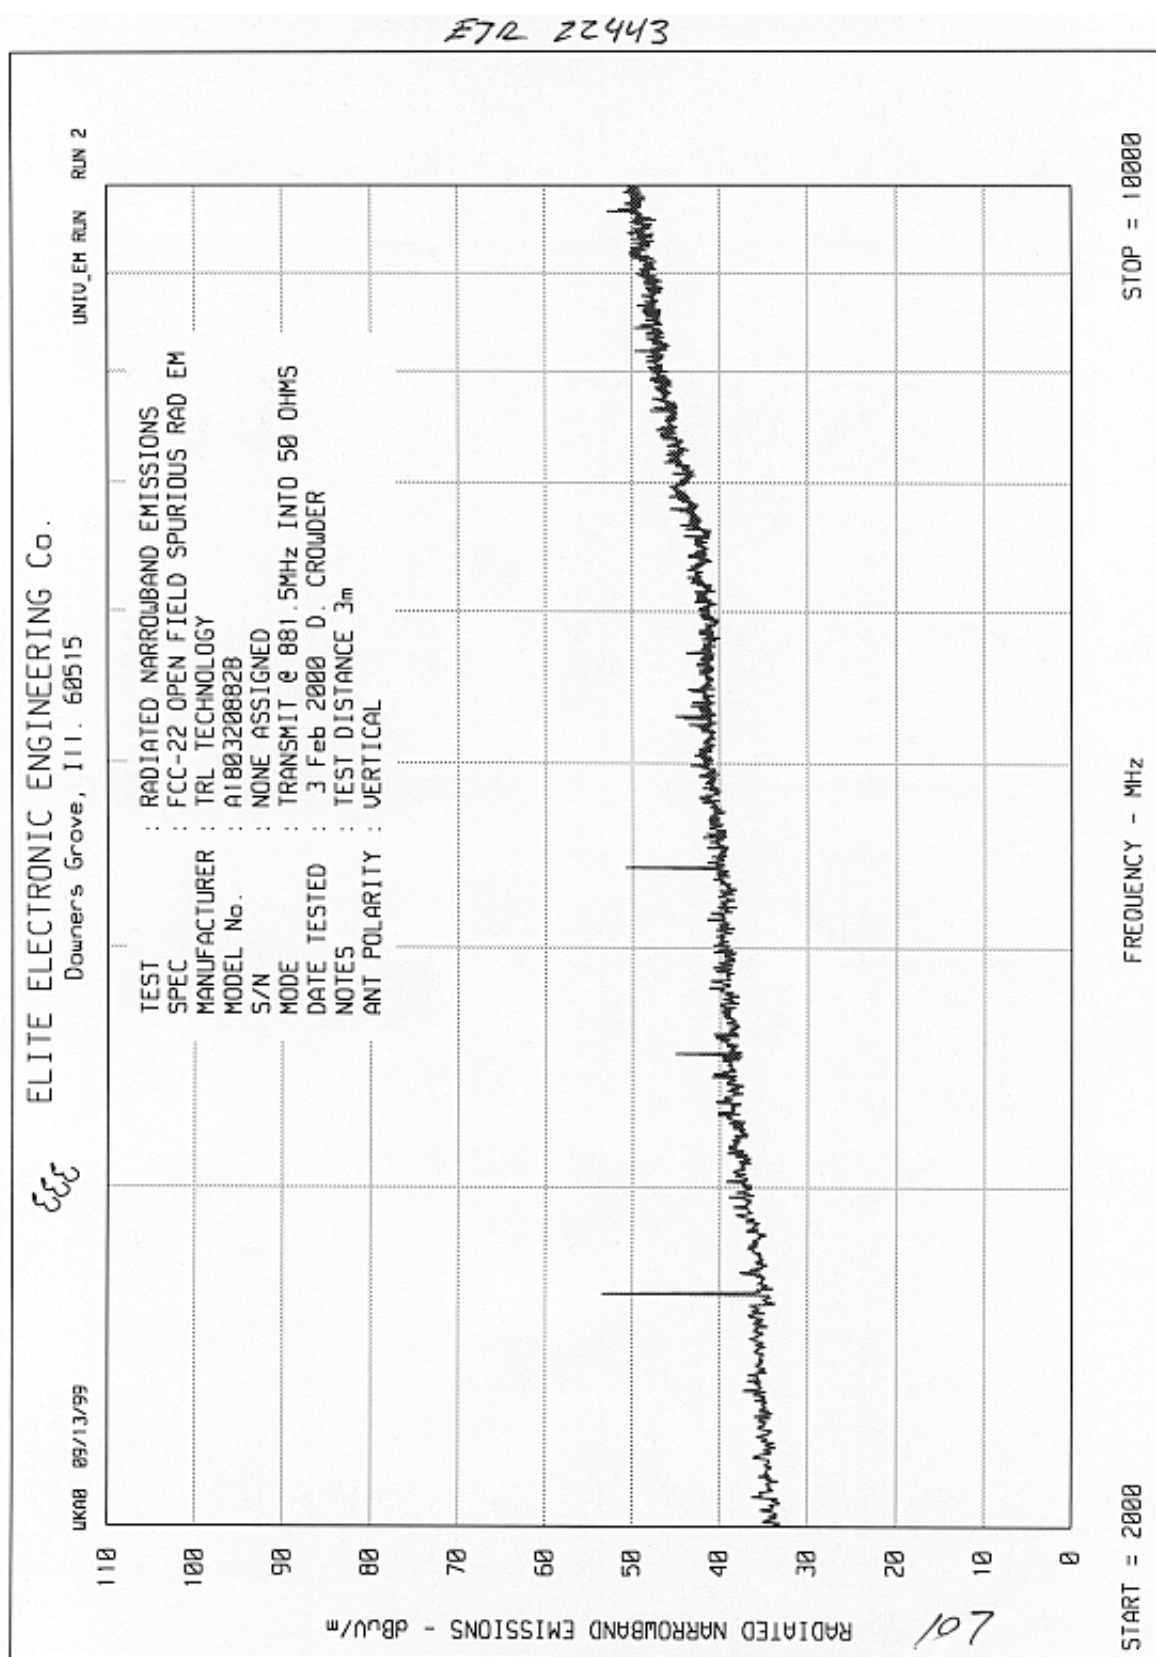

ETR 22443
DATA SHEET

MANUFACTURER : TRL TECHNOLOGIES
 MODEL : A180320882B
 S/N : NONE ASSIGNED
 SPECIFICATION : FCC-22 OPEN FIELD SPURIOUS RADIATED EMISSIONS
 DATE : FEBRUARY 3, 2000
 NOTES : TRANSMIT AT 881.5MHz INTO 50 OHMS
 : TEST DISTANCE IS 3 METERS

FREQ. (MHz)	ANT POL	MTR RDG (dBuV)	ANT FAC dB	CABLE FAC dB	PRE- AMP GAIN	CONV. F.I. to dBm(dipole)	TOTAL dBm	LIMIT dBm
1763.0	H	57.8	27.8	3.6	36.2	-97.2	-44.2	-13
	V	59.7	27.8	3.6	36.2	-97.2	-42.3	-13
2644.5	H	53.3	30.4	4.3	36.0	-97.2	-45.2	-13
	V	55.8	30.4	4.3	36.0	-97.2	-42.7	-13
3526.0	H	49.4	32.8	5.0	35.8	-97.2	-45.8	-13
	V	50.2	32.8	5.0	35.8	-97.2	-45.0	-13
4407.5	H	49.9	35.0	5.6	35.3	-97.2	-42.0	-13
	V	46.8	35.0	5.6	35.3	-97.2	-45.1	-13
5289.0	H	48.2	35.5	6.2	35.1	-97.2	-42.4	-13
	V	48.6	35.5	6.2	35.1	-97.2	-42.0	-13
6170.5	H	43.3	36.5	6.6	35.2	-97.2	-46.0	-13
	V	42.0	36.5	6.6	35.2	-97.2	-47.3	-13
7052.0	H	47.5	37.9	7.3	35.3	-97.2	-39.8	-13
	V	44.1	37.9	7.3	35.3	-97.2	-43.2	-13
7933.5	H	42.3 AMB	37.9	7.9	35.7	-97.2	-44.8	-13
	V	41.9 AMB	37.9	7.9	35.7	-97.2	-45.2	-13
8815.0	H	42.3 AMB	38.5	8.3	35.8	-97.2	-43.9	-13
	V	41.7 AMB	38.5	8.3	35.8	-97.2	-44.5	-13

CHECKED BY: *DMV*