



## **FCC TEST REPORT**

**FCC ID: OF6EIMWRC10**

On Behalf of

**Expedite International, Inc.**

**LD2X**

**Model No.: EI-MW-RC-10**

Prepared for : Expedite International, Inc.  
Address : 1950 8th Ave. Baldwin, WI 54002, USA.

Prepared By : Shenzhen PSI Testing Co., Ltd.  
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road,  
Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2412121-C01-R01  
Date of Receipt : January 13, 2025  
Date of Test : January 14 – March 18, 2025  
Date of Report : March 20, 2025  
Version Number : V0

## TABLE OF CONTENTS

| Description                                                       | Page      |
|-------------------------------------------------------------------|-----------|
| <b>1. Summary of Standards And Results .....</b>                  | <b>5</b>  |
| 1.1. Description of Standards and Results .....                   | 5         |
| <b>2. General Information.....</b>                                | <b>6</b>  |
| 2.1. Description of Device (EUT).....                             | 6         |
| 2.2. Accessories of Device (EUT) .....                            | 7         |
| 2.3. Tested Supporting System Details .....                       | 7         |
| 2.4. Block Diagram of connection between EUT and simulators ..... | 7         |
| 2.5. Test Mode Description .....                                  | 7         |
| 2.6. Test Conditions.....                                         | 8         |
| 2.7. Test Facility .....                                          | 8         |
| 2.8. Measurement Uncertainty .....                                | 8         |
| 2.9. Test Equipment List .....                                    | 9         |
| <b>3. Power Line Conducted Emission Test.....</b>                 | <b>10</b> |
| 3.1. Block Diagram of Test Setup.....                             | 10        |
| 3.2. Test Limits .....                                            | 10        |
| 3.3. Configuration of EUT on Test.....                            | 11        |
| 3.4. Operating Condition of EUT .....                             | 11        |
| 3.5. Test Procedure .....                                         | 11        |
| 3.6. Test Results .....                                           | 12        |
| <b>4. Radiated Emission Test and Band Edge Test .....</b>         | <b>13</b> |
| 4.1. Block Diagram of Test Setup.....                             | 13        |
| 4.2. Test Limit.....                                              | 14        |
| 4.3. Configuration of EUT on Test.....                            | 15        |
| 4.4. Operating Condition of EUT .....                             | 15        |
| 4.5. Test Procedure .....                                         | 15        |
| 4.6. Test Results .....                                           | 16        |
| <b>5. Occupied Bandwidth Test .....</b>                           | <b>23</b> |
| 5.1. Block Diagram of Test Setup.....                             | 23        |
| 5.2. Test Limit.....                                              | 23        |
| 5.3. Test Procedure .....                                         | 23        |
| 5.4. Test Results .....                                           | 23        |
| <b>6. Transmission time .....</b>                                 | <b>24</b> |
| 6.1. Standard Requirement Test limit .....                        | 24        |
| 6.2. Method of measurement .....                                  | 24        |
| 6.3. Test Setup .....                                             | 24        |
| 6.4. Results .....                                                | 24        |
| <b>7. Antenna Requirement.....</b>                                | <b>26</b> |
| 7.1. Standard Requirement.....                                    | 26        |
| 7.2. Antenna Connected Construction.....                          | 26        |
| 7.3. Results .....                                                | 26        |
| <b>8. Photos of test setup .....</b>                              | <b>27</b> |
| <b>9. Photos of EUT .....</b>                                     | <b>27</b> |

## TEST REPORT DECLARATION

Applicant : Expedite International, Inc.  
Address : 1950 8th Ave. Baldwin, WI 54002, USA.  
Manufacturer : MW PRODUCTS LTD.  
Address : 2D, Effort Ind., Bldg 2-8 Kung Yip St., Kwai Chung, Hong Kong.  
EUT Description : LD2X  
(A) Model No. : EI-MW-RC-10  
(B) Trademark : LUCKY DUCK

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231**

**ANSI C63.10-2013**

**Test Result: PASS**

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part15 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Jensen Wang  
Test Engineer

*Jensen Wang*

Approved by (name + signature).....:

Simple Guan  
Project Manager

*Simple Guan*

Date of issue.....:

March 20, 2025

**Revision History**

| Revision | Issue Date     | Revisions              | Revised By  |
|----------|----------------|------------------------|-------------|
| V0       | March 20, 2025 | Initial released Issue | Jensen Wang |



## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

| EMISSION                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |                       |         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------------|---------|
| Description of Test Item                                                                                                                                                                                                                                                                                                                                                                                                                       | Test Requirement | Standard Paragraph    | Results |
| Power Line Conducted Emission Test                                                                                                                                                                                                                                                                                                                                                                                                             | FCC Part 15      | Section 15.207        | N/A     |
| Spurious Emission Test                                                                                                                                                                                                                                                                                                                                                                                                                         | FCC Part 15      | Section 15.231&15.209 | P       |
| Occupied bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                             | FCC Part 15      | Section 15.231        | P       |
| Transmission time                                                                                                                                                                                                                                                                                                                                                                                                                              | FCC Part 15      | Section 15.231        | P       |
| Band edge Requirement                                                                                                                                                                                                                                                                                                                                                                                                                          | FCC Part 15      | Section 15.231        | P       |
| Antenna Requirement                                                                                                                                                                                                                                                                                                                                                                                                                            | FCC Part 15      | Section 15.203        | P       |
| Note: 1. P is an abbreviation for Pass.<br>2. F is an abbreviation for Fail.<br>3. N/A is an abbreviation for Not Applicable.<br>4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.<br>5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02. |                  |                       |         |

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT Name : LD2X

Model No. : EI-MW-RC-10

DIFF. : N/A

Power supply : DC 4.5V from battery

#### SRD

Operation frequency : 434.10MHz

Channel No. : 1

Modulation type : ASK

Antenna Type : Internal Antenna, max gain 2.15dBi

Software version : V1.0

Hardware version : V1.0

Note : Antenna information is provided by applicant.  
Testing lab is not responsible for the accuracy of the information.

## 2.2. Accessories of Device (EUT)

Accessories : /  
 Manufacturer : /  
 Model : /  
 Power supply : /

## 2.3. Tested Supporting System Details

| No. | Description | Manufacturer | Model | Serial Number | Certification |
|-----|-------------|--------------|-------|---------------|---------------|
| 1.  | N/A         | N/A          | N/A   | N/A           | N/A           |

## 2.4. Block Diagram of connection between EUT and simulators



## 2.5. Test Mode Description

Test mode:

| Mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Channel | Frequency(MHz) |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------------|
| ASK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1       | 434.10         |
| Note: <ol style="list-style-type: none"> <li>1. The test was used to control EUT work in Continuous TX mode, and select test channel, wireless mode</li> <li>2. The EUT has been tested as an independent unit. And Continual Transmitting in maximum power.</li> <li>3. New battery is used during all tests.</li> <li>4. For the relevant Conducted Measurement, the temporary antenna connector is used during the measurement. Antenna Connector Impedance: 50Ω, Cable Loss: 1.0 dB</li> </ol> |         |                |

## 2.6. Test Conditions

| Items             | Required  | Actual |
|-------------------|-----------|--------|
| Temperature range | 15-35°C   | 26°C   |
| Humidity range    | 25-75%    | 54%    |
| Pressure range    | 86-106kPa | 101kPa |

## 2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

| Item                                 | Uncertainty    |         |
|--------------------------------------|----------------|---------|
| Power Line Conducted Emissions       | 0.009~0.15MHz  | 1.92 dB |
|                                      | 0.15~30 MHz    | 2.17 dB |
| Magnetic field radiation disturbance | 0.009~30 MHz   | 2.00 dB |
| Power spectral density               | 100KHz~6GHz    | 0.39 dB |
| Conducted RF Power                   | 100KHz~6GHz    | 0.41 dB |
| Radio frequency                      | 9KHz~6GHz      | 79Hz    |
| Conducted-Spurious Emission          | 9KHz~18GHz     | 0.59 dB |
| Radiation Spurious Emission          | 0.009~30 MHz   | 3.50 dB |
|                                      | 30~1000 MHz(V) | 4.17 dB |
|                                      | 30~1000 MHz(H) | 4.08 dB |
|                                      | 1~18 GHz(V)    | 4.29 dB |
|                                      | 1~18 GHz(H)    | 4.82 dB |
|                                      | 18~40 GHz(V)   | 4.31 dB |
|                                      | 18~40 GHz(H)   | 4.30 dB |



## 2.9. Test Equipment List


| Item | Equipment                 | Manufacturer  | Model No.            | Serial No.                  | Firmware Version | Last Cal.  | Cal. Interval |
|------|---------------------------|---------------|----------------------|-----------------------------|------------------|------------|---------------|
| 1.   | 9*6*6 anechoic chamber    | SKET          | 9*6*6                | N/A                         | /                | 2022.12.20 | 3 Year        |
| 2.   | Test Receiver             | Rohde&Schwarz | ESCI 7               | 101032/003                  | 4.42 SP3         | 2024.12.18 | 1 Year        |
| 3.   | L.I.S.N.#1                | Rohde&Schwarz | ENV216               | 102282                      | /                | 2024.12.18 | 1 Year        |
| 4.   | L.I.S.N.#2                | RFT           | NNB111               | 13835240                    | /                | 2024.12.18 | 1 Year        |
| 5.   | Loop Antenna              | Schwarz beck  | FMZB 1519B           | 00128                       | /                | 2025.01.02 | 2 Year        |
| 6.   | Bilog Antenna             | Schwarz beck  | VULB 9168            | 01448                       | /                | 2025.01.02 | 2 Year        |
| 7.   | Spectrum Analyzer         | Rohde&Schwarz | FSV-40N              | 101648                      | 3.70             | 2024.12.18 | 1 Year        |
| 8.   | Horn Antenna              | Schwarz beck  | BBHA 9120 D          | 02706                       | /                | 2025.01.02 | 2 Year        |
| 9.   | Amplifier                 | SKET          | LAPA_01G18<br>G-45dB | SK202203290<br>1            | /                | 2024.12.18 | 1 Yea         |
| 10.  | Horn Antenna              | Schwarz beck  | BBHA 9170            | 00946                       | /                | 2024.12.31 | 2 Year        |
| 11.  | Amplifier                 | SKET          | LNPA_0118G-<br>45    | SK202001080<br>1            | /                | 2024.12.18 | 1 Yea         |
| 12.  | RF Power Probe            | Rohde&Schwarz | NRP-Z11              | 1138.3004.02<br>-1111533-Fz | /                | 2024.12.18 | 1 Yea         |
| 13.  | RF Sensor Unit            | Tachoy        | TR1029-2             | 20220428P0<br>08            | /                | 2024.12.18 | 1 Yea         |
| 14.  | Temp. & Humid Chamber     | Auchno        | 9606                 | /                           | /                | 2024.12.18 | 1 Year        |
| 15.  | Regulated DC Power Supply | Xinouhua      | ADC120V10<br>A       | 2022112516<br>38            |                  | 2024.12.18 | 1 Year        |
| 16.  | Spectrum Analyzer         | Agilent       | N9020A               | MY51281067                  | A.14.03          | 2024.12.18 | 1 Year        |

## For Test Software Information

| Item | Software Name | Manufacturer | Version |
|------|---------------|--------------|---------|
| RE   | EZ_EMC        | Farad        | PSI-3A1 |
| CE   | EZ_EMC        | Farad        | PSI-3A1 |
| RF   | RTS           | TACHOY       | V1.0.0  |

### 3. Power Line Conducted Emission Test

#### 3.1. Block Diagram of Test Setup

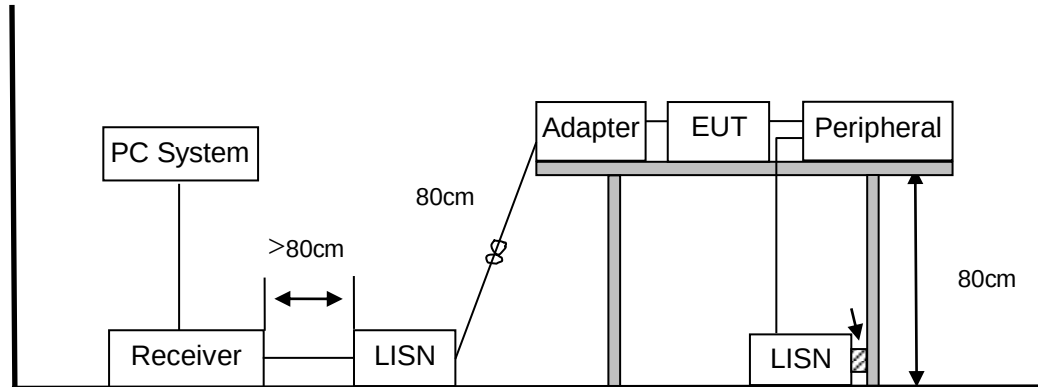

#### 3.2. Test Limits

| Frequency       | Maximum RF Line Voltage          |                               |
|-----------------|----------------------------------|-------------------------------|
|                 | Quasi-Peak Level<br>dB( $\mu$ V) | Average Level<br>dB( $\mu$ V) |
| 150kHz ~ 500kHz | 66 ~ 56*                         | 56 ~ 46*                      |
| 500kHz ~ 5MHz   | 56                               | 46                            |
| 5MHz ~ 30MHz    | 60                               | 50                            |

- Notes:
1. Emission level=Read level + LISN factor-Preamp factor + Cable loss
  2. \* Decreasing linearly with logarithm of frequency.
  3. The lower limit shall apply at the transition frequencies.

### 3.3. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

### 3.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 3.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

### 3.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on conducted Emission test.
- (2) The frequency range from 150kHz to 30MHz is checked, the bandwidth of test receiver is set at 9kHz.
- (3) The frequency range from 30MHz to 1000MHz was pre-scanned with a Peak detector and all final readings of measurement from Test Receiver are Quasi-Peak and Average values.
- (4) The test results are reported on Section 3.6.

### 3.6. Test Results


|                                            |           |             |       |
|--------------------------------------------|-----------|-------------|-------|
| EUT                                        | : LD2X    | Temperature | : N/A |
| M/N                                        | : NK-8006 | Humidity    | : N/A |
| Test Engineer                              | : N/A     |             |       |
| Test Mode                                  | : N/A     |             |       |
| Test Voltage                               | : N/A     |             |       |
| Note: 1. Not applicable (battery powered). |           |             |       |




## 4. Radiated Emission Test and Band Edge Test

### 4.1. Block Diagram of Test Setup


In Semi Anechoic Chamber (3m) Test Setup Diagram for 9KHz~30MHz

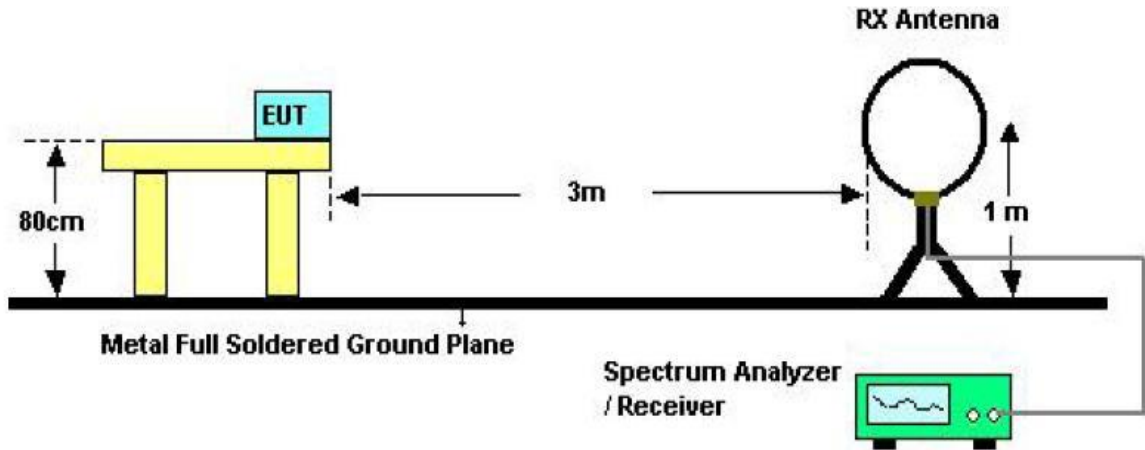

In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

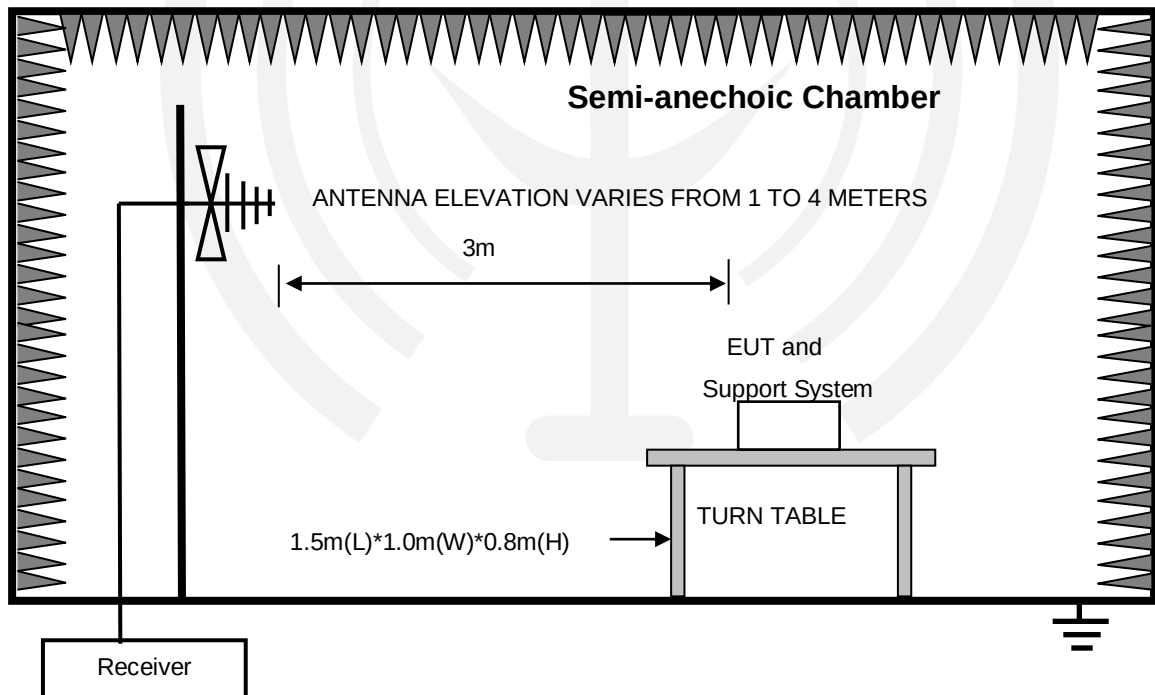

In Semi Anechoic Chamber (3m) Test Setup Diagram for Above 1GHz

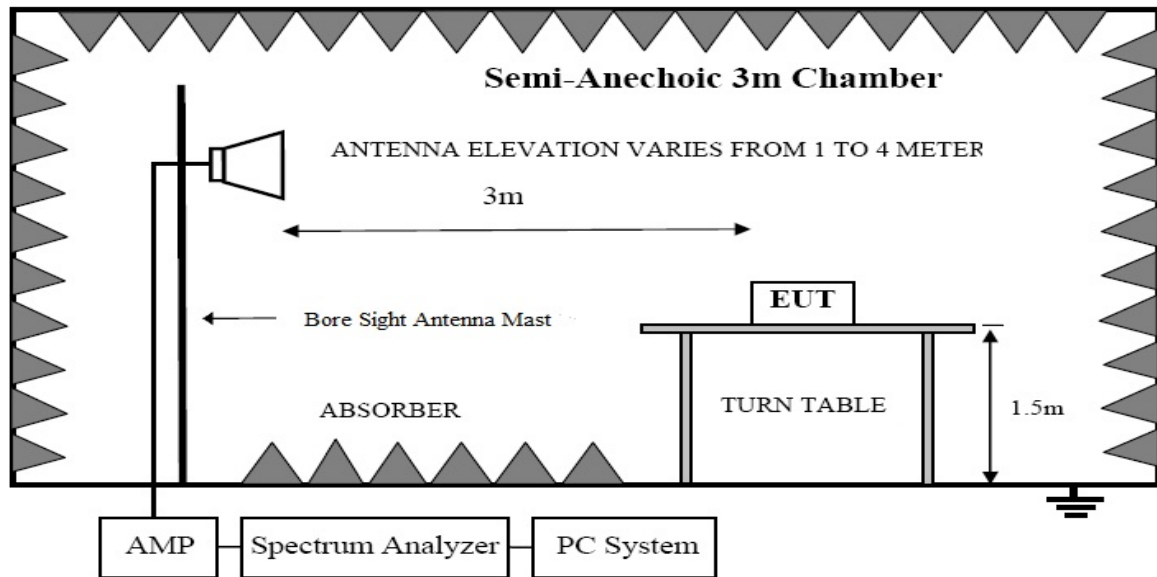

#### 4.2. Test Limit

| Frequency<br>MHz  | Distance<br>(Meters) | Field Strengths Limits |                            |
|-------------------|----------------------|------------------------|----------------------------|
|                   |                      | uV/m                   | dB uV/m                    |
| 0.009 ~ 0.490     | 300                  | 2400/F(kHz)            | ---                        |
| 0.490 ~ 1.705     | 30                   | 24000/F(kHz)           | ----                       |
| 1.705 ~ 30        | 30                   | 30                     | 29.5                       |
| 30 ~ 88           | 3                    | 100(3nW)               | 40                         |
| 88 ~ 216          | 3                    | 150(6.8nW)             | 43.5                       |
| 216 ~ 960         | 3                    | 200(12nW)              | 46                         |
| Above 960         | 3                    | 500(75nW)              | 54                         |
| Carrier frequency | 3                    | 50000(AVG)             | 113.97(Peak)<br>93.97(AVG) |

Notes:

1. Emission level = Read level + Antenna Factor - Preamp Factor + Cable Loss
2. The smaller limit shall apply at the cross point between two frequency bands.
3. Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
4. For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 4.3. Configuration of EUT on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

### 4.4. Operating Condition of EUT

- (1) Setup the EUT as shown as Section 4.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in test mode taking the test.

### 4.5. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10: 2013 on Radiated Emission test.
- (2) For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- (3) Test antenna was located 4m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
  - (a) Change work frequency or channel of device if practicable.
  - (b) Change modulation type of device if practicable.
  - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP
- (5) The frequency range from 9KHz to 150KHz is checked, the bandwidth of test receiver is set at 200Hz.  
The frequency range from 150KHz to 30MHz is checked, the bandwidth of test receiver is set at 9KHz.  
The frequency range from 30MHz to 1000MHz is checked, the bandwidth of test receiver is set at

120kHz.

The frequency range from above 1GHz is checked, the bandwidth of Signal Analyzer is set at 1MHz.

- (6) The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values, the frequency range from 1GHz to 6GHz was pre-scanned with a peak detector and all final readings of measurement from Spectrum Analyzer are peak and average values checked, all measurement distance is 3m in 3m semi anechoic chamber.
- (7) Test for all x, y, z axes is performed and only the worst case of X xes was recorded in the test report.
- (8) The test results are reported on Section 4.6.


#### 4.6. Test Results

|                 |                                                                                                                                             |             |       |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|
| Frequency Range | : <b>9KHz~30MHz</b>                                                                                                                         |             |       |
| EUT             | : LD2X                                                                                                                                      | Temperature | : 26℃ |
| M/N             | : NK-8006                                                                                                                                   | Humidity    | : 54% |
| Test Engineer   | : Jensen Wang                                                                                                                               |             |       |
| Test Mode       | : 434.10MHz                                                                                                                                 |             |       |
| Test Results    | : <b>PASS</b>                                                                                                                               |             |       |
| Note:           | 1. Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported. |             |       |

|                 |                                                                                                                                                                                                                                                                                                                                                                                       |             |       |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------|
| Frequency Range | : <b>30MHz~1000MHz`</b>                                                                                                                                                                                                                                                                                                                                                               |             |       |
| EUT             | : LD2X                                                                                                                                                                                                                                                                                                                                                                                | Temperature | : 26℃ |
| M/N             | : NK-8006                                                                                                                                                                                                                                                                                                                                                                             | Humidity    | : 54% |
| Test Engineer   | : Jensen Wang                                                                                                                                                                                                                                                                                                                                                                         |             |       |
| Test Mode       | : 434.10MHz                                                                                                                                                                                                                                                                                                                                                                           |             |       |
| Test Results    | : <b>PASS</b>                                                                                                                                                                                                                                                                                                                                                                         |             |       |
| Note:           | 1. The test results are listed in next pages.<br>2. This mode is worst case mode, and this report only reflected the worst mode.<br>3. If the limits for the measurement with the quasi-peak detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out. |             |       |



## Vertical:

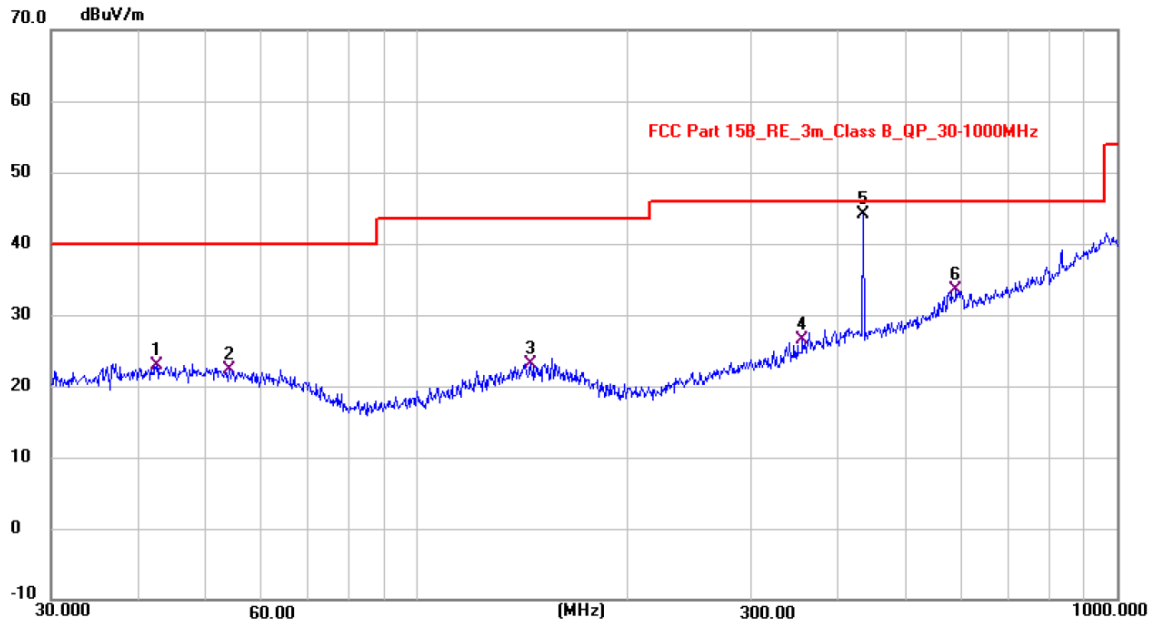

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 42.5067         | 8.45           | 14.46         | 22.91          | 40.00          | -17.09      | QP       |
| 2   | 54.0000         | 8.63           | 13.73         | 22.36          | 40.00          | -17.64      | QP       |
| 3   | 145.6056        | 9.06           | 14.02         | 23.08          | 43.50          | -20.42      | QP       |
| 4   | 356.5195        | 10.09          | 16.50         | 26.59          | 46.00          | -19.41      | QP       |
| 5 * | 434.0651        | 25.61          | 18.55         | 44.16          | 46.00          | -1.84       | peak     |
| 6   | 590.1972        | 10.91          | 22.61         | 33.52          | 46.00          | -12.48      | QP       |


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1   | 434.10          | 25.61          | 18.55       | 44.16            | 100.83         | -56.67      | PK       |
| 2   | 434.10          | /              | /           | 38.06            | 80.83          | -42.77      | AV       |

Remark: 1. All readings are Quasi-Peak and Average values.

2. Margin = Result (Result = Reading + Factor) – Limit

3. When peak value applied to AVG limit, the AVG value is not calculated.

4. Average = peak value + (-6.1 dB) = 44.16 - 6.1 = 38.06

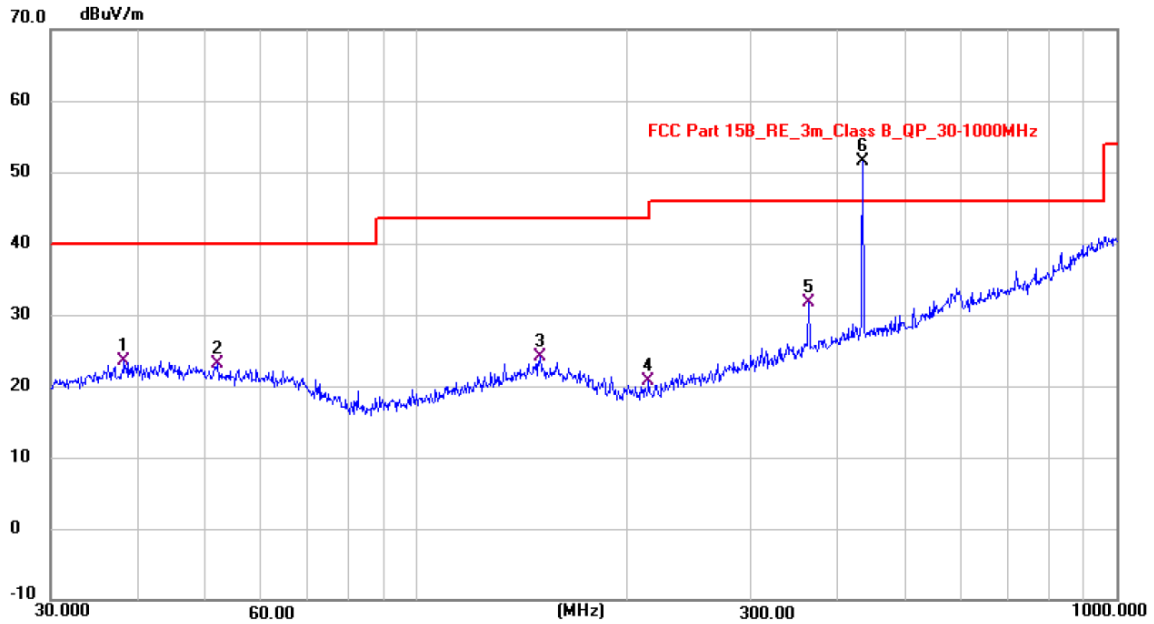**Horizontal:**

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 38.3293         | 9.13           | 14.33         | 23.46          | 40.00          | -16.54      | QP       |
| 2   | 52.1621         | 9.23           | 13.92         | 23.15          | 40.00          | -16.85      | QP       |
| 3   | 150.4718        | 9.90           | 14.14         | 24.04          | 43.50          | -19.46      | QP       |
| 4   | 214.7024        | 9.02           | 11.70         | 20.72          | 43.50          | -22.78      | QP       |
| 5   | 364.0999        | 14.93          | 16.71         | 31.64          | 46.00          | -14.36      | QP       |
| 6 * | 434.0651        | 32.99          | 18.55         | 51.54          | 46.00          | 5.54        | peak     |

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1   | 434.10          | 32.99          | 18.55       | 51.54            | 100.83         | -49.25      | PK       |
| 2   | 434.10          | /              | /           | 45.44            | 80.83          | -35.39      | AV       |

Remark: 1. All readings are Quasi-Peak and Average values.


2. Margin = Result (Result = Reading + Factor) - Limit

3. When peak value applied to AVG limit, the AVG value is not calculated.

4. Average = peak value + (-6.1 dB) = 51.54 - 6.1 = 45.44

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |        |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|
| Frequency Range : <b>Above 1GHz</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |        |
| EUT                                 | : LD2X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Temperature | : 26°C |
| M/N                                 | : NK-8006                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Humidity    | : 54%  |
| Test Engineer : Jensen Wang         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |        |
| Test Mode : 434.10MHz               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |        |
| Test Results : <b>PASS</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |        |
| Note:                               | <p>1. Means other frequency and mode comply with standard requirements and at least have 20dB margin.</p> <p>2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain.</p> <p>Result=Reading + Correct Factor.</p> <p>Margin= Result-Limit.</p> <p>3. Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK.</p> <p>4. Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: Avg.</p> <p>5. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.</p> |             |        |

## Vertical:

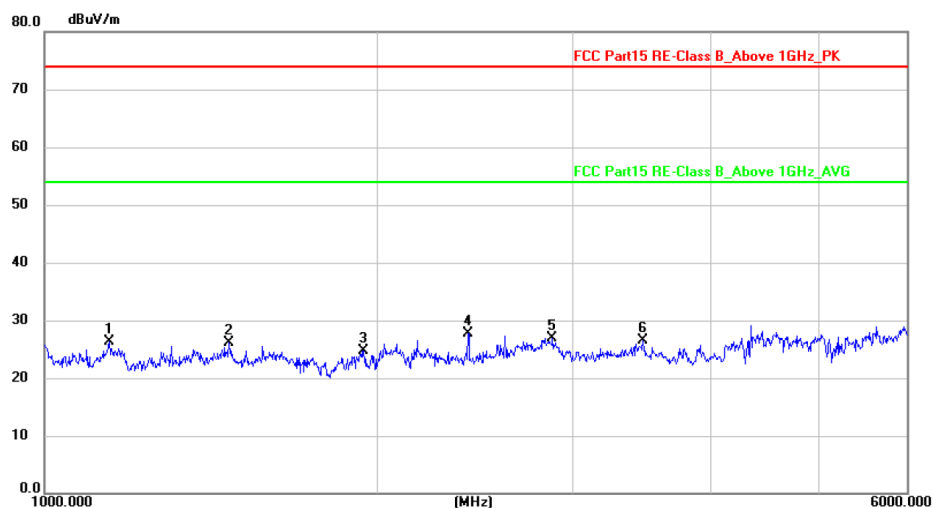


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 1143.830        | 53.97          | -27.57        | 26.40          | 74.00          | -47.60      | peak     |
| 2   | 1469.620        | 53.48          | -27.47        | 26.01          | 74.00          | -47.99      | peak     |
| 3   | 1943.120        | 52.05          | -27.32        | 24.73          | 74.00          | -49.27      | peak     |
| 4 * | 2411.927        | 53.82          | -26.05        | 27.77          | 74.00          | -46.23      | peak     |
| 5   | 2873.613        | 51.49          | -24.65        | 26.84          | 74.00          | -47.16      | peak     |
| 6   | 3472.327        | 49.60          | -23.18        | 26.42          | 74.00          | -47.58      | peak     |

Level = Reading + Factor Margin = Level - Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1   | 1143.830        | 53.97          | -27.57      | 26.40            |                |             | PK       |
| 2   | 1143.830        | /              | /           | 20.30            | 54.00          | -33.70      | AV       |
| 3   | 1469.620        | 53.48          | -27.47      | 26.01            | 74.00          | -47.99      | PK       |
| 4   | 1469.620        | /              | /           | 19.91            | 54.00          | -34.09      | AV       |
| 5   | 1943.210        | 52.05          | -27.32      | 24.73            | 74.00          | -49.27      | PK       |
| 6   | 1943.210        | /              | /           | 18.63            | 54.00          | -35.37      | AV       |
| 7   | 2411.927        | 53.82          | -26.05      | 27.77            | 74.00          | -46.23      | PK       |
| 8   | 2411.927        | /              | /           | 21.67            | 54.00          | -32.33      | AV       |
| 9   | 2873.613        | 51.49          | -24.65      | 26.84            | 74.00          | -47.16      | PK       |
| 10  | 2873.613        | /              | /           | 20.74            | 54.00          | -33.26      | AV       |
| 11  | 3472.327        | 49.60          | -23.18      | 26.42            | 74.00          | -47.58      | PK       |
| 12  | 3472.327        | /              | /           | 20.32            | 54.00          | -33.68      | AV       |

Remark: 1. Margin = Result (Result = Reading + Factor) - Limit

2. Average = peak value + (-6.1 dB)

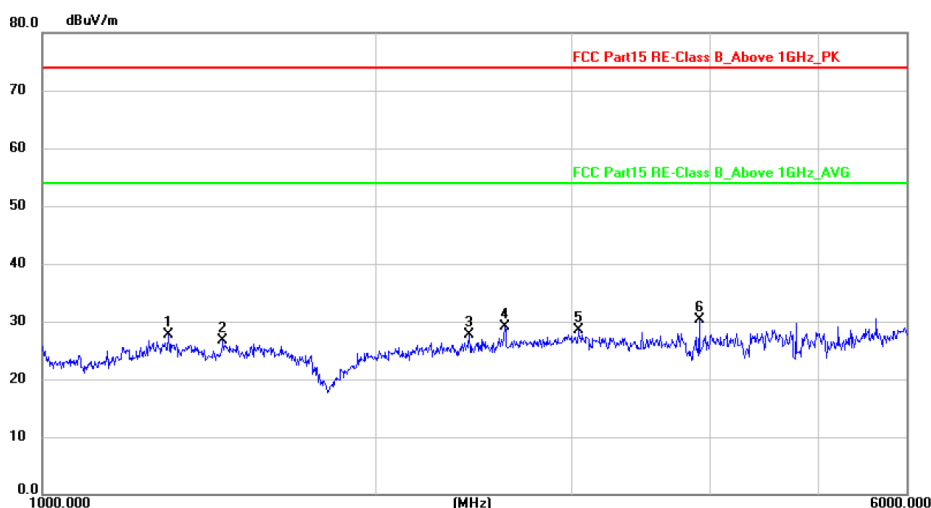**Horizontal:**

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|
| 1   | 1301.332        | 55.22          | -27.52        | 27.70          | 74.00          | -46.30      | peak     |
| 2   | 1455.535        | 54.17          | -27.48        | 26.69          | 74.00          | -47.31      | peak     |
| 3   | 2424.383        | 53.76          | -26.01        | 27.75          | 74.00          | -46.25      | peak     |
| 4   | 2609.189        | 54.52          | -25.44        | 29.08          | 74.00          | -44.92      | peak     |
| 5   | 3037.743        | 52.67          | -24.17        | 28.50          | 74.00          | -45.50      | peak     |
| 6 * | 3905.591        | 52.51          | -22.19        | 30.32          | 74.00          | -43.68      | peak     |

Level = Reading + Factor Margin = Level - Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Results (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|-----|-----------------|----------------|-------------|------------------|----------------|-------------|----------|
| 1   | 1301.332        | 55.22          | -27.52      | 27.70            | 74.00          | -46.30      | PK       |
| 2   | 1301.332        | /              | /           | 21.60            | 54.00          | -32.40      | AV       |
| 3   | 1455.535        | 54.17          | -27.48      | 26.69            | 74.00          | -47.31      | PK       |
| 4   | 1455.535        | /              | /           | 20.59            | 54.00          | -33.41      | AV       |
| 5   | 2424.383        | 53.76          | -26.01      | 27.75            | 74.00          | -46.25      | PK       |
| 6   | 2424.383        | /              | /           | 21.65            | 54.00          | -32.35      | AV       |
| 7   | 2609.189        | 54.52          | -24.44      | 30.08            | 74.00          | -43.92      | PK       |
| 8   | 2609.189        | /              | /           | 23.98            | 54.00          | -30.02      | AV       |
| 9   | 3037.743        | 52.67          | -24.17      | 28.50            | 74.00          | -45.50      | PK       |
| 10  | 3037.743        | /              | /           | 22.40            | 54.00          | -31.60      | AV       |
| 11  | 3905.591        | 52.51          | -22.19      | 30.32            | 74.00          | -43.68      | PK       |
| 12  | 3905.591        | /              | /           | 24.22            | 54.00          | -29.78      | AV       |

Remark: 1. Margin = Result (Result = Reading + Factor) - Limit

2. Average = peak value + (-6.1 dB)

**Duty cycle factor:**

$T_{on}=447.0\text{ms}$

$T_{on}+T_{off}=447+456=903\text{ms}$

Duty Cycle =  $T_{on}/(T_{on}+T_{off})=447/903=0.495$


Average should be determined by duty cycle factor.

Duty cycle factor =  $20 \log (0.495)=-6.1$

Average = peak value+ ( -6.1 dB)

## 5. Occupied Bandwidth Test

### 5.1. Block Diagram of Test Setup



### 5.2. Test Limit

Please refer section RSS-210 & 15.231

According to §15.231(C), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz.

### 5.3. Test Procedure

- (1) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- (2) The test receiver RBW set 30KHz, VBW set 100KHz, Sweep time set auto.

### 5.4. Test Results

| Mode | Frequency (MHz) | 20dB Bandwidth (KHz) | 99% Bandwidth (KHz) | Limit(kHz) | Results |
|------|-----------------|----------------------|---------------------|------------|---------|
| ASK  | 434.10          | 207.1                | 174.09              | 1084.8     | Pass    |

Limit = 434.10MHz \* 0.25% = 1.0848MHz



## 6. Transmission time

### 6.1. Standard Requirement Test limit


Please refer section RSS-210 & 15.231

According to §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 6.2. Method of measurement

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Center= 434.10MHz, Span = 0MHz, Sweep = 5s.
4. Set the spectrum analyzer as RBW, VBW=1MHz,
5. Max hold, view and count how many channel in the band

### 6.3. Test Setup




### 6.4. Results

| Freq (MHz) | Test Result(s) | Limit (s) | Conclusion |
|------------|----------------|-----------|------------|
| 434.10     | 0.4403         | < 5s      | PASS       |

EUT After Release the button, EUT emission Continue 0.4403 seconds, Compliance with 15.231 a(1) section.



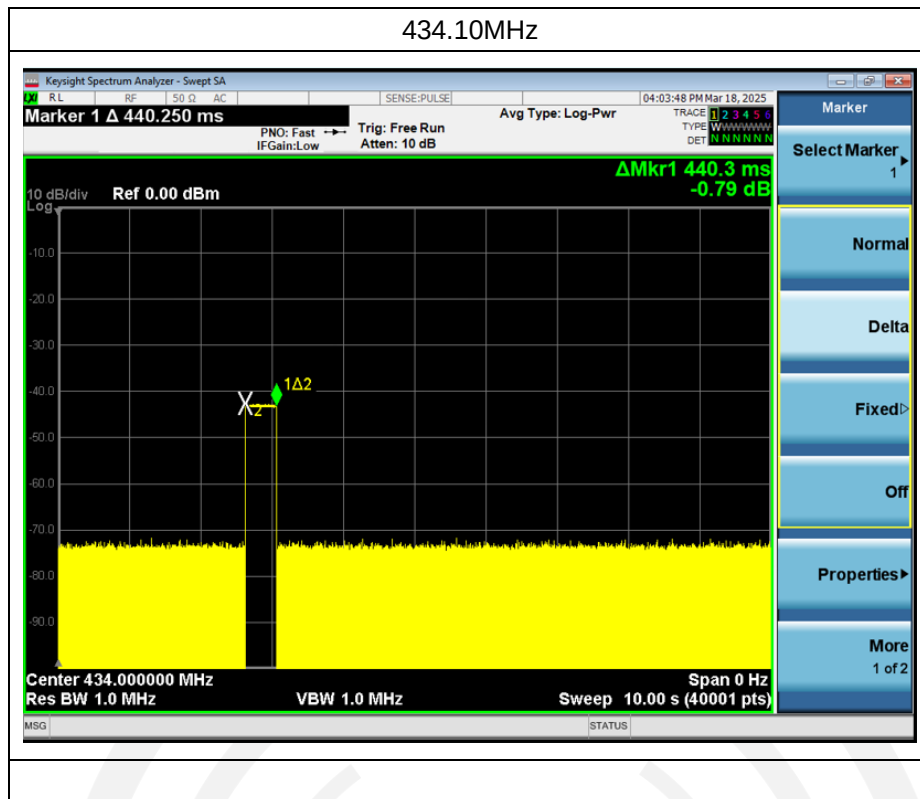

## 7. Antenna Requirement

### 7.1. Standard Requirement


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 7.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 0dBi, and the antenna is fixed antenna no consideration of replacement. Please see EUT photo for details.

### 7.3. Results

The EUT antenna is Internal Antenna. It complies with the standard requirement.

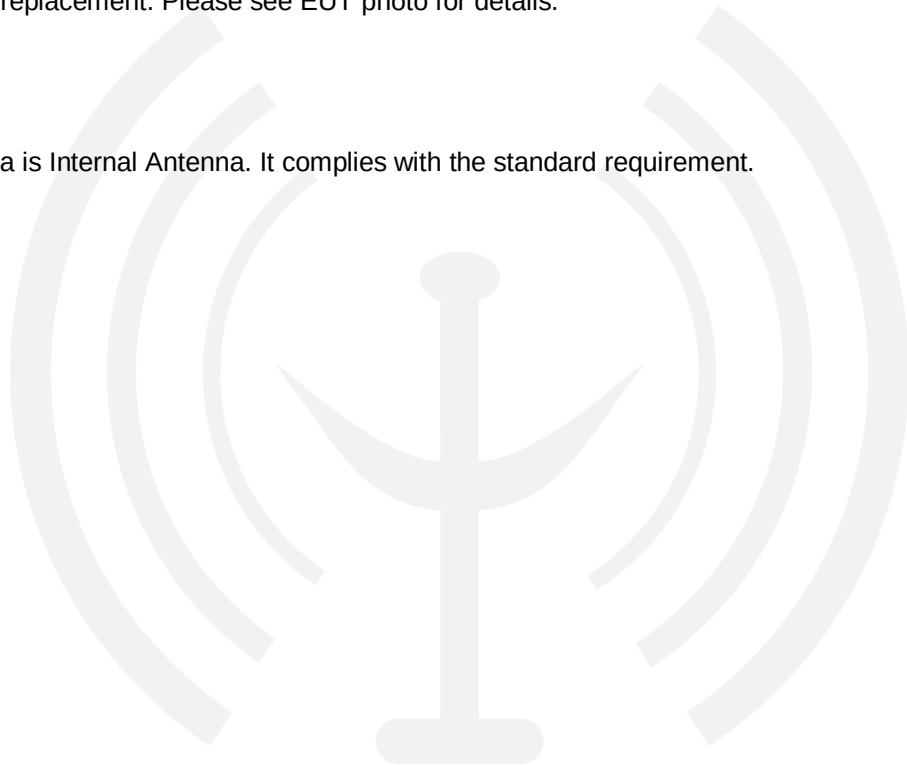

## 8. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

## 9. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----

