

Test Report of FCC Part 15 C for FCC Certificate  
On Behalf of  
**SoundWorks, Inc.**

**FCC ID:** OFIOontz  
**Product Description:** The Ultra Portable Wireless Bluetooth Speaker  
**Model No.:** Oontz  
**Supplementary Model No.:** N/A

**Prepared for:** SoundWorks, Inc

**Prepared by:** 2995 Woodside Road Suite 400 Woodside Ca. 94062  
Bontek Compliance Testing Laboratory Ltd  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East  
Road, Nanshan, Shenzhen, China  
Tel: 86-755-86337020  
Fax: 86-755-86337028

**Report No.:** BCT12FR-0893E

**Issue Date:** June 29, 2012

**Test Date:** June 26 ~29, 2012

**Test by:**

**Reviewed By:**

Nie Quan

---

Nie Quan

kevin chi

---

Kevin Chi

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	5
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
2.1 EUT CONFIGURATION .....	6
2.2 EUT EXERCISE .....	6
2.3 GENERAL TEST PROCEDURES .....	6
2.4 LIST OF MEASURING EQUIPMENTS USED .....	7
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>4 – DISTURBANCE VOLTAGE AT THE MAINS TERMINALS.....</b>	<b>10</b>
4.1 MEASUREMENT UNCERTAINTY.....	10
4.2 APPLICABLE STANDARD .....	10
4.4 INSTRUMENT SETUP .....	10
4.5 TEST PROCEDURE .....	11
4.6 TEST RESULT.....	11
<b>5. TEST OF HOPPING CHANNEL BANDWIDTH .....</b>	<b>14</b>
5.1 APPLICABLE STANDARD .....	14
5.2 EUT SETUP .....	14
5.3 TEST EQUIPMENT LIST AND DETAILS .....	14
5.4 TEST PROCEDURE .....	14
5.5 TEST RESULT.....	14
<b>6. TEST OF HOPPING CHANNEL SEPARATION.....</b>	<b>17</b>
6.1 APPLICABLE STANDARD .....	17
6.2 EUT SETUP .....	17
6.3 TEST EQUIPMENT LIST AND DETAILS .....	17
6.4 TEST PROCEDURE .....	17
6.5 TEST RESULT.....	17
<b>7. TEST OF NUMBER OF HOPPING FREQUENCY .....</b>	<b>20</b>
7.1 APPLICABLE STANDARD .....	20
7.2 EUT SETUP .....	20
7.3 TEST EQUIPMENT LIST AND DETAILS .....	20
7.4 TEST PROCEDURE .....	20
7.5 TEST RESULT.....	20
<b>8. TEST OF DWELL TIME OF EACH FREQUENCY .....</b>	<b>22</b>
8.1 APPLICABLE STANDARD .....	22
8.2 EUT SETUP .....	22
8.3 TEST EQUIPMENT LIST AND DETAILS .....	22
8.4 TEST PROCEDURE .....	22
8.5 TEST RESULT.....	22
<b>9. TEST OF MAXIMUM PEAK OUTPUT POWER.....</b>	<b>27</b>
9.1 APPLICABLE STANDARD .....	27
9.2 EUT SETUP .....	27
9.3 TEST EQUIPMENT LIST AND DETAILS .....	27
9.4 TEST PROCEDURE .....	27
9.5 TEST RESULT.....	27
<b>10. TEST OF BAND EDGES EMISSION.....</b>	<b>30</b>
10.1 APPLICABLE STANDARD .....	30
10.2 EUT SETUP .....	31

10.3 TEST EQUIPMENT LIST AND DETAILS.....	31
10.4 TEST PROCEDURE.....	31
10.5 TEST RESULT .....	32
<b>11. TEST OF SPURIOUS RADIATED EMISSION.....</b>	<b>34</b>
11.1 APPLICABLE STANDARD .....	34
11.2 EUT SETUP .....	34
11.3 TEST EQUIPMENT LIST AND DETAILS.....	35
11.4 TEST PROCEDURE.....	35
11.5 TEST RESULT .....	36

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: **SoundWorks, Inc.**  
Address of applicant: 2995 Woodside Road Suite 400 Woodside Ca. 94062  
Manufacturer: **Shenzhen 3nod Electronics Co.,Ltd**  
Address of manufacturer: 3NOD High-Tech Park 15# Zhongfu Road Tangxiayong Village, Industrial Zone Songgang Town, Baoan District, Shenzhen City, China

#### General Description of E.U.T

Items	Description
EUT Description:	The Ultra Portable Wireless Bluetooth Speaker
Model No.:	Oontz
Supplementary Model No.:	N/A
Type of Modulation:	FHSS
Frequency Band:	2402 MHz ~ 2480 MHz
Number of Channels:	79
Channel Bandwidth:	1 MHz
Antenna Type:	Built-in Antenna
Rated Voltage:	DC 5 V

\* The test data gathered are from the production sample provided by the manufacturer.

### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

## **1.4 Test Facility**

All measurement required was performed at laboratory of Bontek Compliance Testing Laboratory Ltd at 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China.

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC – Registration No.: 338263**

BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 03, 2011.

### **IC Registration No.: 7631A**

The 3m alternate test site of BONTEK COMPLIANCE TESTING LABORATORY LTD. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on January 25, 2011.

### **CNAS - Registration No.: L3923**

BONTEK COMPLIANCE TESTING LABORATORY LTD. to ISO/IEC 17025:25 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. The acceptance letter from the CNAS is maintained in our files: Registration: L3923, March 22, 2012.

### **TUV - Registration No.: UA 50203122-0001**

BONTEK COMPLIANCE TESTING LABORATORY LTD. An assessment of the laboratory was conducted according to the "Procedures and Conditions for EMC Test Laboratories" with reference to EN ISO/IEC 17025 by a TUV Rheinland auditor. Audit Report NO. 17010783-002.

## **2. SYSTEM TEST CONFIGURATION**

The tests documented in this report were performed in accordance with ANSI C63.4-2009 and FCC CFR 47 Part 15 Subpart C.

### **2.1 EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **2.2 EUT Exercise**

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

### **2.3 General Test Procedures**

**Conducted Emissions** The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

**Radiated Emissions** The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

## 2.4 List of Measuring Equipments Used

Test equipments list of Shenzhen Bontek Compliance Testing Laboratory Co., Ltd .

No.	Equipment	Manufacturer	Model No.	S/N	Calculator date	Calculator due date
1	EMI Test Receiver	R&S	ESCI	100687	2012-4-6	2013-4-5
2	EMI Test Receiver	R&S	ESPI	100097	2011-7-25	2012-7-24
3	Amplifier	HP	8447D	1937A02492	2012-4-6	2013-4-5
4	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07101	2012-4-6	2013-4-5
5	Single Power Conductor Module	FCC	FCC-LISN-5-50-1-01-CISPR25	07102	2012-4-6	2013-4-5
6	Power Clamp	SCHWARZBECK	MDS-21	3812	2012-4-6	2013-4-5
7	Positioning Controller	C&C	CC-C-1F	MF7802113	N/A	N/A
8	Electrostatic Discharge Simulator	TESEQ	NSG437	125	2011-4-11	2012-4-10
9	Fast Transient Burst Generator	SCHAFFNER	MODULA6150	34572	2012-4-6	2013-4-5
10	Fast Transient Noise Simulator	Noiseken	FNS-105AX	10501	2011-6-16	2012-6-15
11	Color TV Pattern Generator	PHILIPS	PM5418	TM209947	N/A	N/A
12	Power Frequency Magnetic Field Generator	EVERFINE	EMS61000-8K	608002	2012-4-6	2013-4-5
14	Capacitive Coupling Clamp	TESEQ	CDN8014	25096	2012-4-6	2013-4-5
15	High Field Biconical Antenna	ELECTRO-METRICS	EM-6913	166	2011-11-28	2012-11-27
16	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	811	2011-11-28	2012-11-27
17	Remote Active Vertical Antenna	ELECTRO-METRICS	EM-6892	304	2011-11-28	2012-11-27
18	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9163	9163-324	N/A	N/A
19	Horn Antenna	SCHWARZBECK	BBHA9120A	0499	2011-11-28	2012-11-27
20	Teo Line Single Phase Module	SCHWARZBECK	NSLK8128	8128247	2011-10-24	2012-10-23
21	Triple-Loop Antenna	EVERFINE	LLA-2	711002	2012-4-6	2013-4-5
22	Electric bridge	Jhai	JK2812C	803024	N/A	N/A
23	RF POWER AMPLIFIER	FRANKONIA	FLL-75	1020A1109	2012-4-6	2013-4-5
24	CDN	FRANKONIA	CDN M2+M3	A3027019	2012-4-6	2013-4-5
25	6DB Attenuator	FRANKONIA	N/A	1001698	2012-4-6	2013-4-5
26	EM Injection clamp	FCC	F-203I-23mm	091536	2012-4-6	2013-4-5

27	9kHz-2.4GHz signal generator 2024	MARCONI	10S/6625-99-457-8730	112260/042	2012-4-6	2013-4-5
28	10dB attenuator	ELECTRO-METRICS	EM-7600	836	2012-4-6	2013-4-5
29	ISN	TESEQ	ISN-T800	30301	2011-6-23	2012-6-22
30	10KV surge generator	SANKI	SKS-0510M	048110003E 321	2011-11-14	2012-11-13
31	HRMONICS&FLICK RE ANALYSER	VOLTECH	PM6000	200006700433	2011-6-27	2012-6-26
32	Spectrum Analyzer	R&S	FSP	100397	2011-11-2	2012-11-1
33	Broadband preamplifier	SCH WARZBECK	BBV9718	9718-182	2012-4-6	2013-4-5
34	Temperature & Humidity Chamber	TOPSTAT	TOS-831A	3438A05208	2012-4-6	2013-4-5

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.207	Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass
15.203/15.247(b)/(c)	Antenna Requirement	Pass

## 4 – DISTURBANCE VOLTAGE AT THE MAINS TERMINALS

### 4.1 Measurement Uncertainty

All test results complied with Section 15.207 requirements. Measurement Uncertainty is 2.4 dB.

### 4.2 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

Note: (1)The tighter limit shall apply at the edge between two frequency bands.

### 4.3 EUT Setup


The setup of EUT is according with ANSI C63.4-2009 measurement procedure.

The EUT was placed center and the back edge of the test table.

The AV cables were draped along the test table and bundled to 30-40cm in the middle.

The spacing between the peripherals was 10 cm.

Maximum emission emitted from EUT was determined by manipulating the EUT, support equipment, interconnecting cables and varying the mode of operation and the levels in the final result of the test were recorded with the EUT running in the operating mode that maximum emission was emitted.

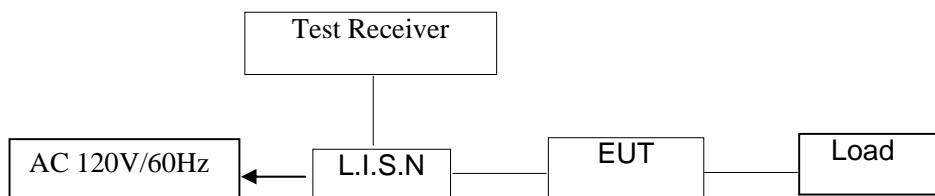

### 4.4 Instrument Setup

The test receiver was set with the following configurations:

Test Receiver Setting:

Frequency Range.....150 KHz to 30 MHz  
Detector.....Peak & Quasi-Peak & Average  
Sweep Speed.....Auto  
IF Band Width.....9 KHz

## **4.5 Test Procedure**

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first Artificial Mains.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination.

All data was recorded in the peak detection mode. Quasi-peak and Average readings were only performed when an emission was found to be marginal (within -10 dB $\mu$ V of specification limits). Quasi-peak readings are distinguished with a "QP". Average readings are distinguished with a "AV".


## **4.6 Test Result**

**PASS**

## Conducted Emission Test Data

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Normal Operation  
 Test Site: Shielded Room  
 Operator: Cheng  
 Test Specification: AC 120V60Hz for PC  
 Comment: N Line  
 Start of Test: 6/28/12/16: 39      Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

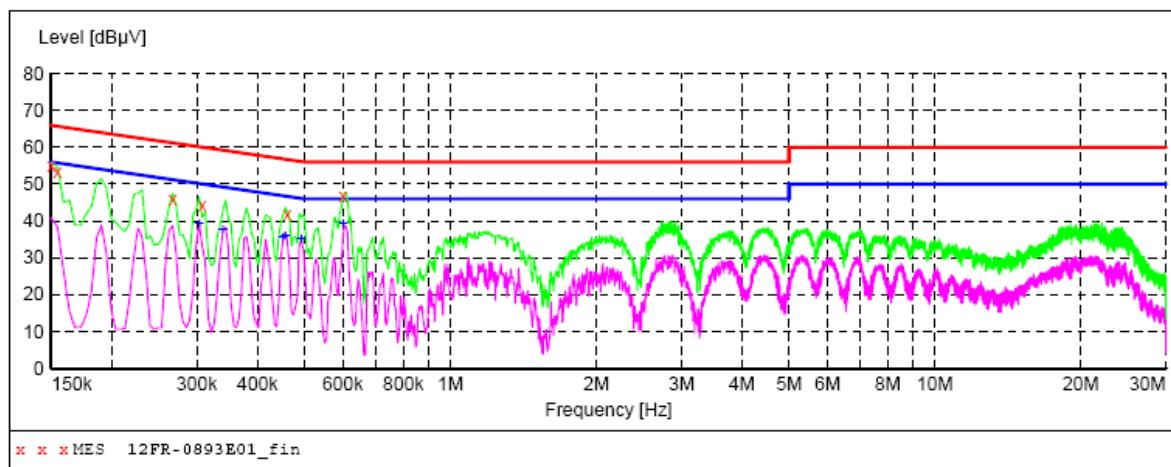

### MEASUREMENT RESULT: "12FR-0893E01\_fin"

6/28/2012 4:39PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB			
	0.150000	54.90	11.4	66	11.1	QP	N	GND
	0.154500	53.60	11.4	66	12.2	QP	N	GND
	0.267000	45.80	10.6	61	15.4	QP	N	GND
	0.307500	44.10	10.5	60	15.9	QP	N	GND
	0.460500	42.00	10.3	57	14.7	QP	N	GND
	0.600000	47.00	10.2	56	9.0	QP	N	GND


### MEASUREMENT RESULT: "12FR-0893E01\_fin2"

6/28/2012 4:39PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB			
	0.303000	39.50	10.6	50	10.7	AV	N	GND
	0.339000	37.50	10.5	49	11.7	AV	N	GND
	0.451500	35.50	10.3	47	11.3	AV	N	GND
	0.456000	36.20	10.3	47	10.6	AV	N	GND
	0.492000	35.10	10.3	46	11.0	AV	N	GND
	0.600000	39.30	10.2	46	6.7	AV	N	GND

## Conducted Emission Test Data

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Normal Operation  
 Test Site: Shielded Room  
 Operator: Cheng  
 Test Specification: AC 120V60Hz for PC  
 Comment: L Line  
 Start of Test: 6/28/12/16: 39      Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
 Short Description: 150K-30M Voltage

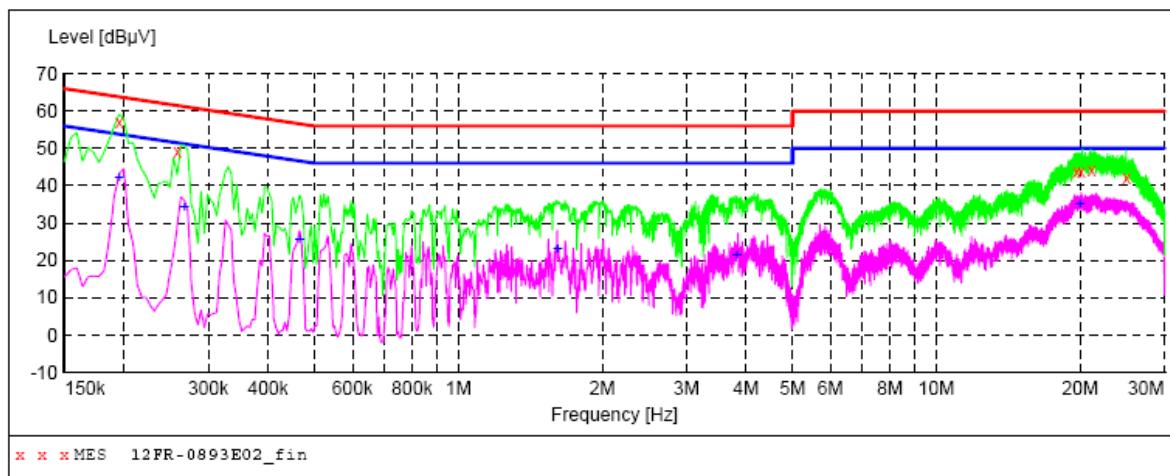

### MEASUREMENT RESULT: "12FR-0893E02\_fin"

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.195000	56.90	10.9	64	6.9	QP	L1	GND
0.258000	49.20	10.7	62	12.3	QP	L1	GND
19.635000	44.00	10.6	60	16.0	QP	L1	GND
20.071500	43.90	10.6	60	16.1	QP	L1	GND
21.124500	44.20	10.7	60	15.8	QP	L1	GND
24.972000	42.20	10.9	60	17.8	QP	L1	GND

### MEASUREMENT RESULT: "12FR-0893E02\_fin2"


Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.195000	42.30	10.9	54	11.5	AV	L1	GND
0.267000	34.30	10.6	51	16.9	AV	L1	GND
0.465000	25.40	10.3	47	21.2	AV	L1	GND
1.612500	22.90	10.2	46	23.1	AV	L1	GND
3.822000	21.60	10.3	46	24.4	AV	L1	GND
19.954500	35.30	10.6	50	14.7	AV	L1	GND

## 5. Test of Hopping Channel Bandwidth

### 5.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 EUT Setup

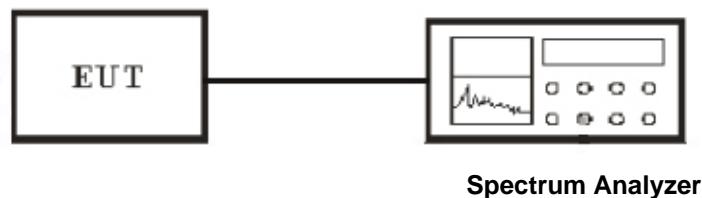

### 5.3 Test Equipment List and Details

See section 2.4.

### 5.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The spectrum width with level higher than 20dB below the peak level.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 5.5 Test Result


Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	Low	2402.00	276	>25
FHSS	Middle	2440.00	278	>25
FHSS	High	2480.00	274	>25


### Channel Low :

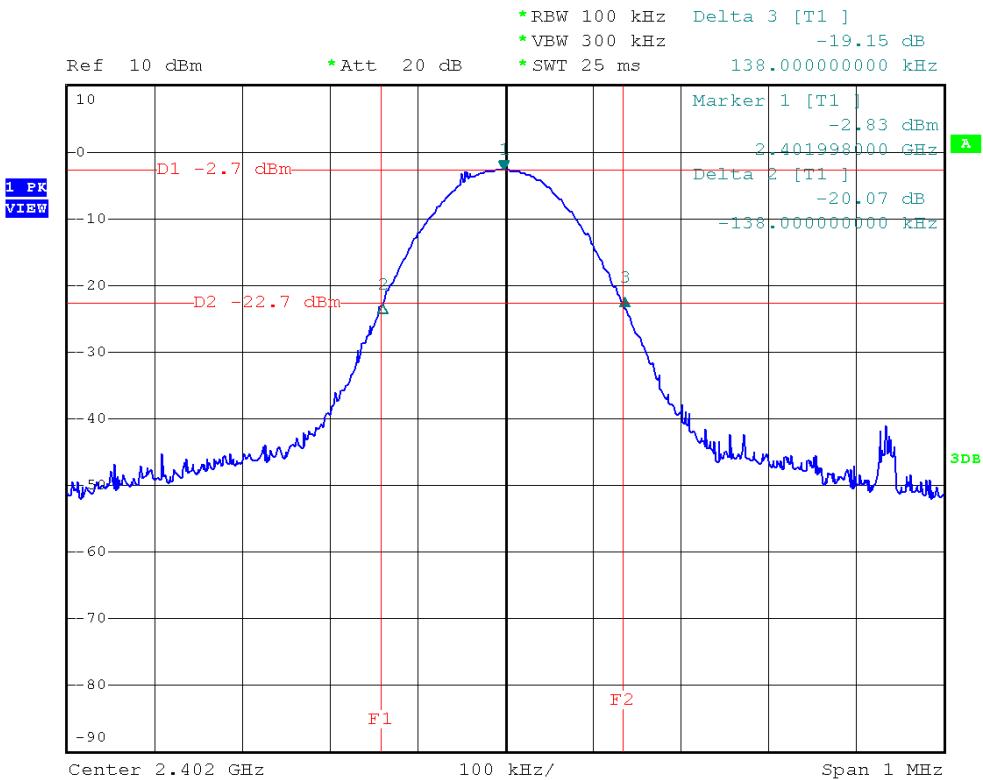

### Channel Middle :

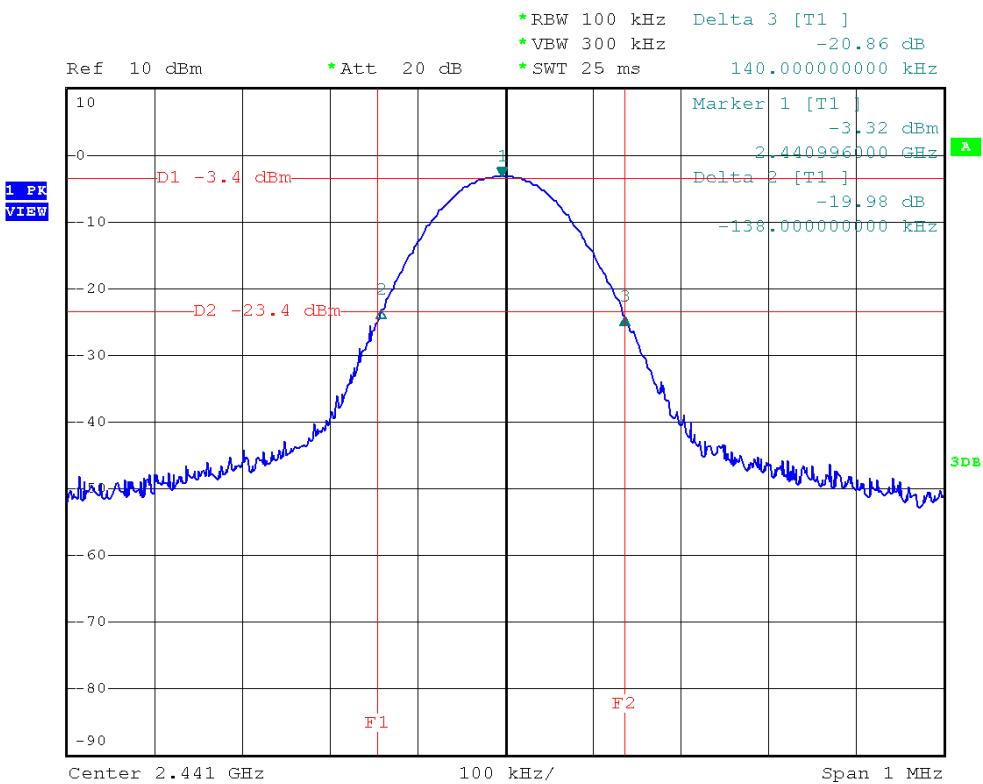

## Channel High :

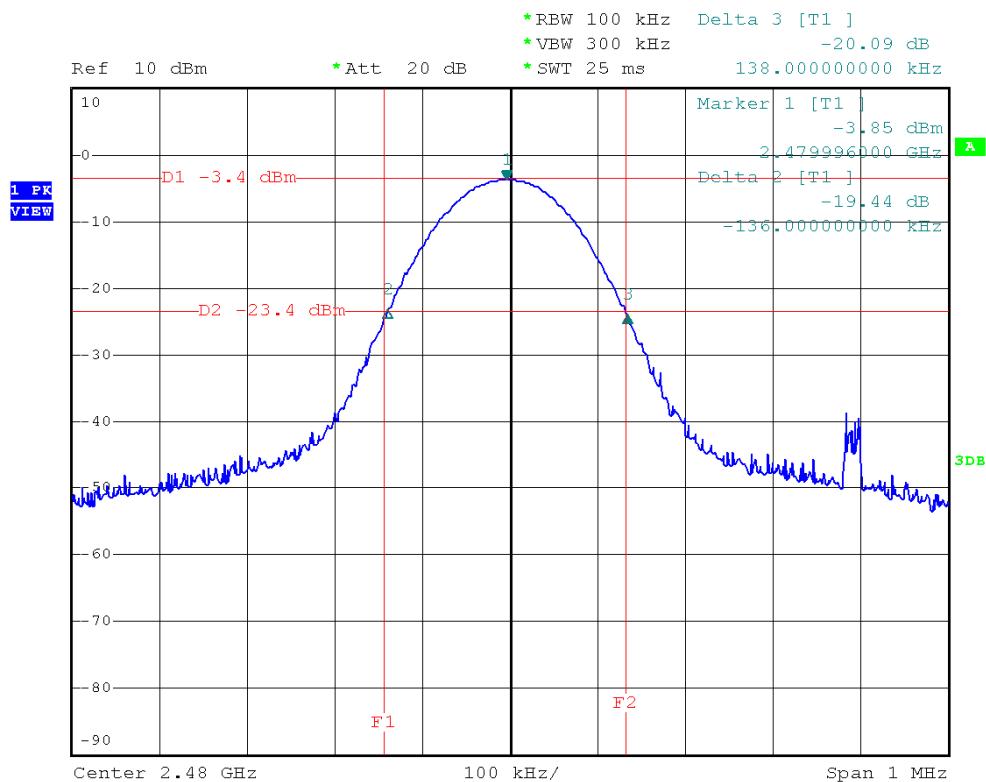


## 6. Test of Hopping Channel Separation

### 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 6.2 EUT Setup

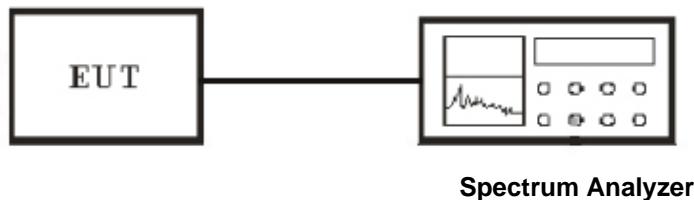

### 6.3 Test Equipment List and Details

See section 2.4.


### 6.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.


### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ) : 50~54	M/N: Oontz
Barometric Pressure ( mbar ) : 950~1000	Operation Condition: Tx Mode


### Channel Low :

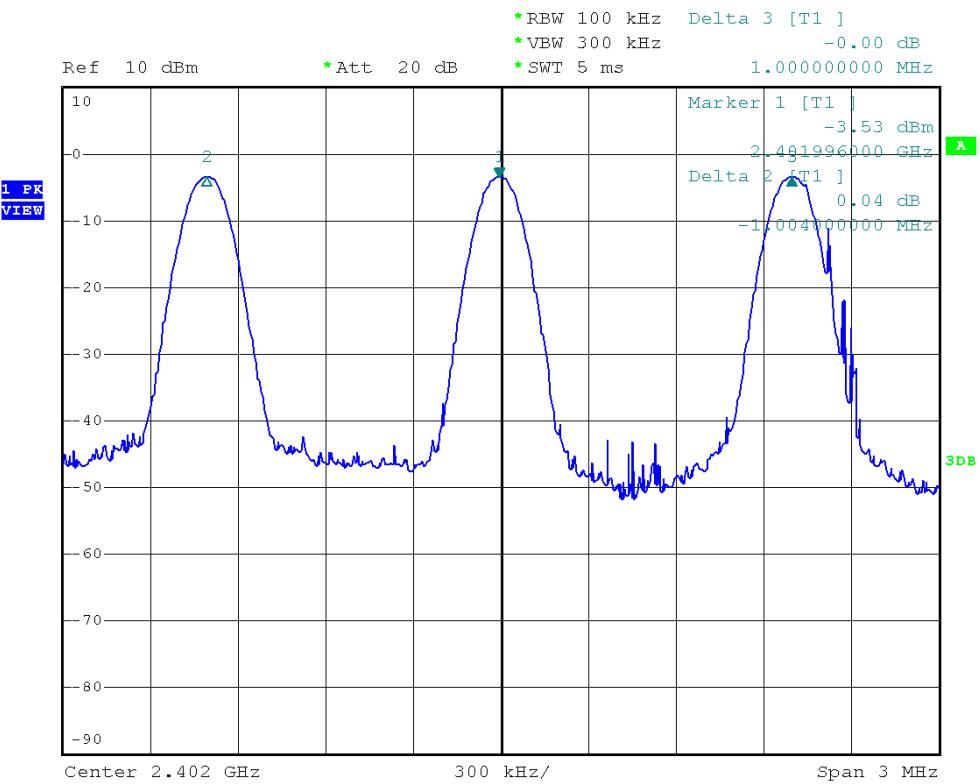

### Channel Middle :

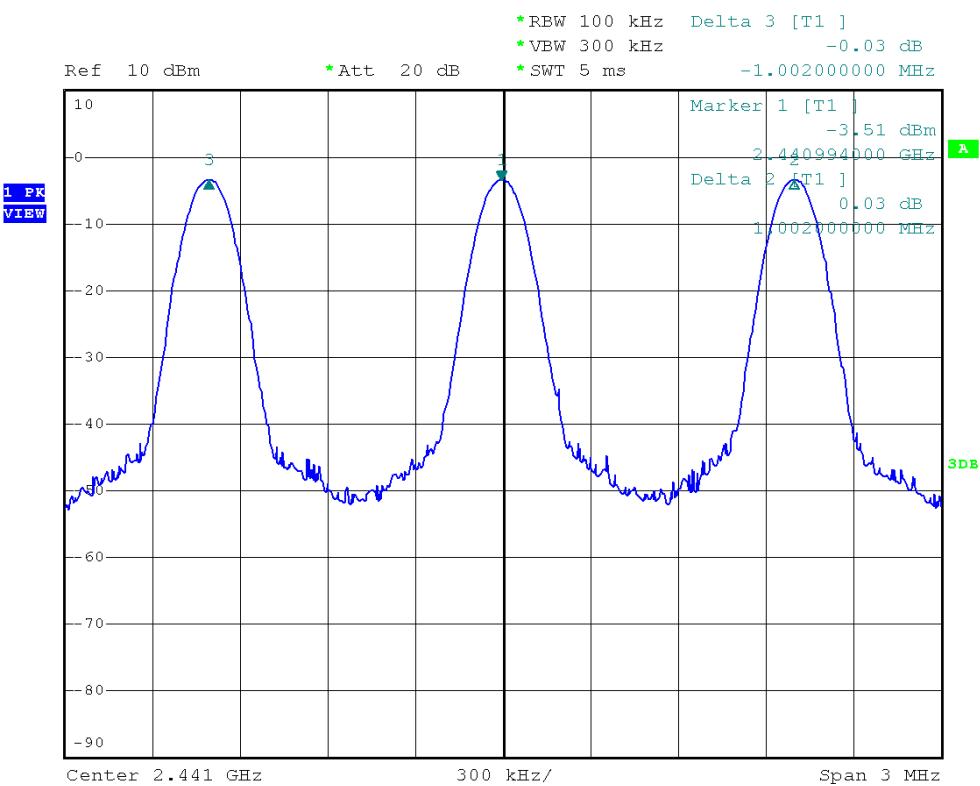

## Channel High :

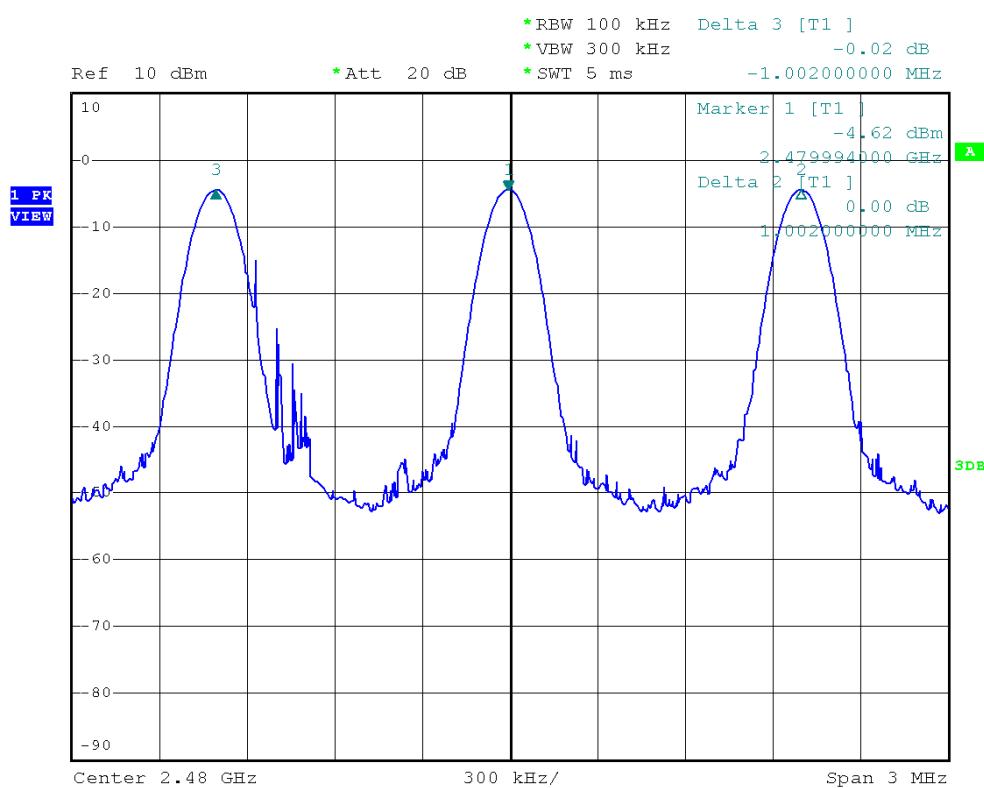


## 7. Test of Number of Hopping Frequency

### 7.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

### 7.2 EUT Setup

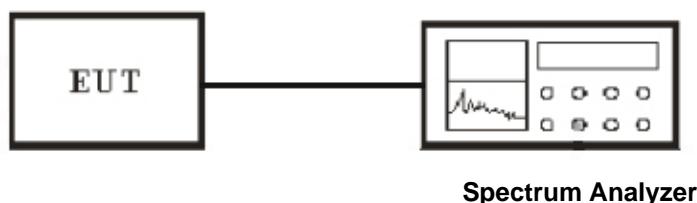

### 7.3 Test Equipment List and Details

See section 2.4.


### 7.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
5. Repeat above 1~3 points for the middle and highest channel of the EUT.

### 7.5 Test Result

Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

Modulation Type	Frequency (MHz)	Number of Hopping Channels	Min. Limit (kHz)
FHSS	2402.0~2480.0	79	>15

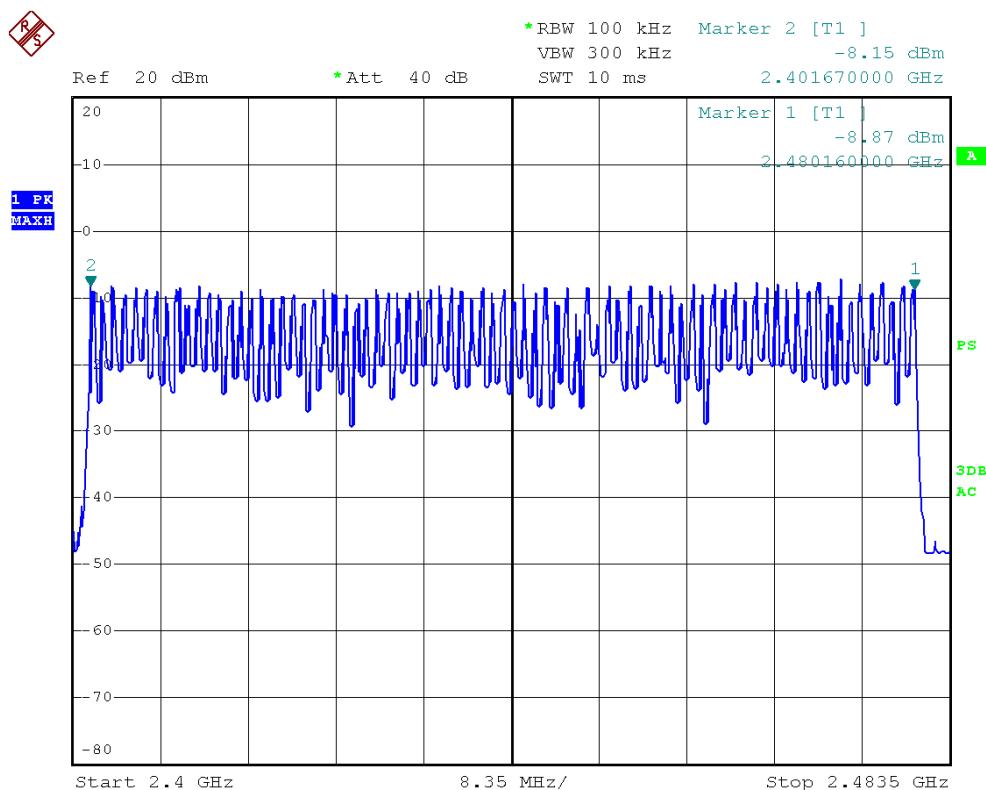


## 8. Test of Dwell Time of Each Frequency

### 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 8.2 EUT Setup

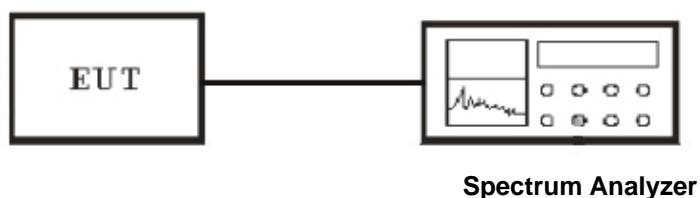

### 8.3 Test Equipment List and Details

See section 2.4.

### 8.4 Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
5. Measure the maximum time duration of one single pulse.

### 8.5 Test Result

Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2402.00	115.20	400
FHSS	Middle	2441.00	119.04	400
FHSS	High	2480.00	119.04	400

A period time = 0.4 (ms) \* 79 = 31.6 (s)

CH Low:

DH1 time slot = 0.360 (ms) \* (1600/(2\*79)) \* 31.6 = 115.20 (ms)


CH Mid:

DH1 time slot = 0.372 (ms) \* (1600/(2\*79)) \* 31.6 = 119.04 (ms)


CH High:

DH1 time slot = 0.372 (ms) \* (1600/(2\*79)) \* 31.6 = 119.04 (ms)


## Channel Low :

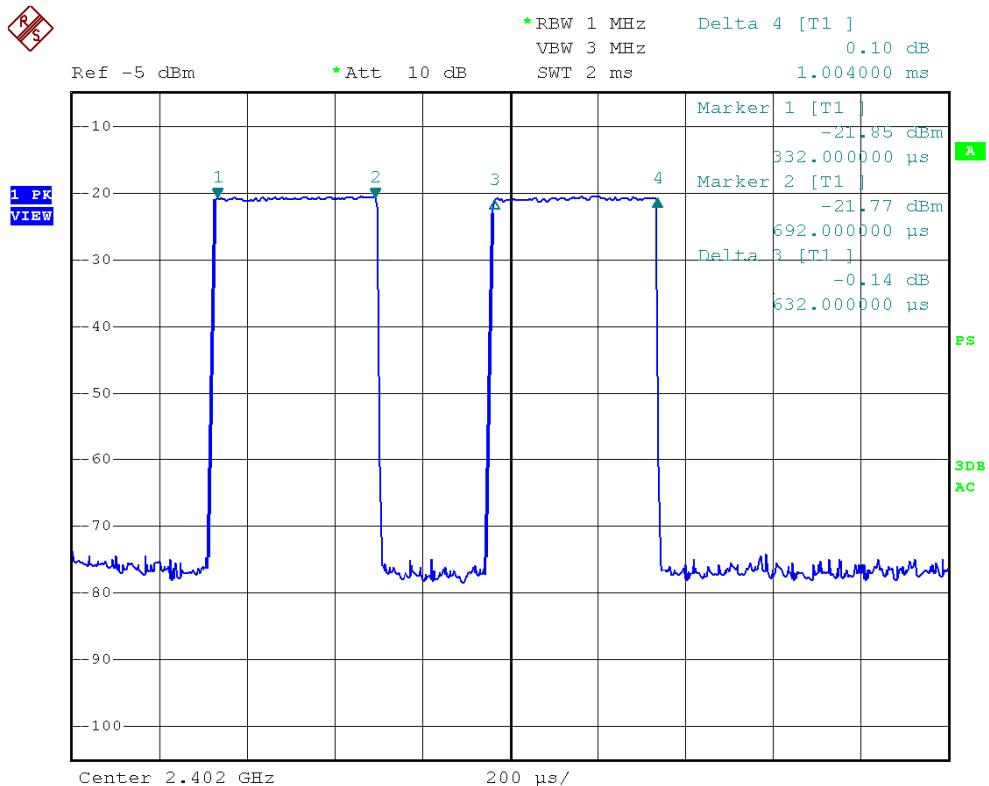

## Channel Middle :

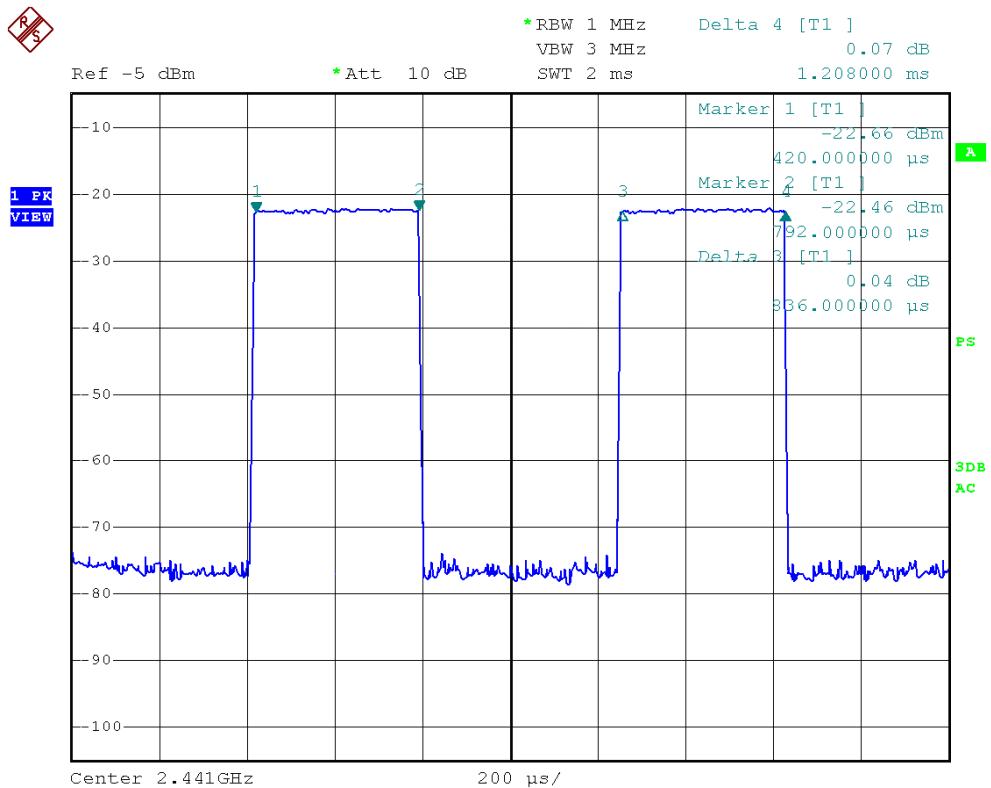

## Channel High :

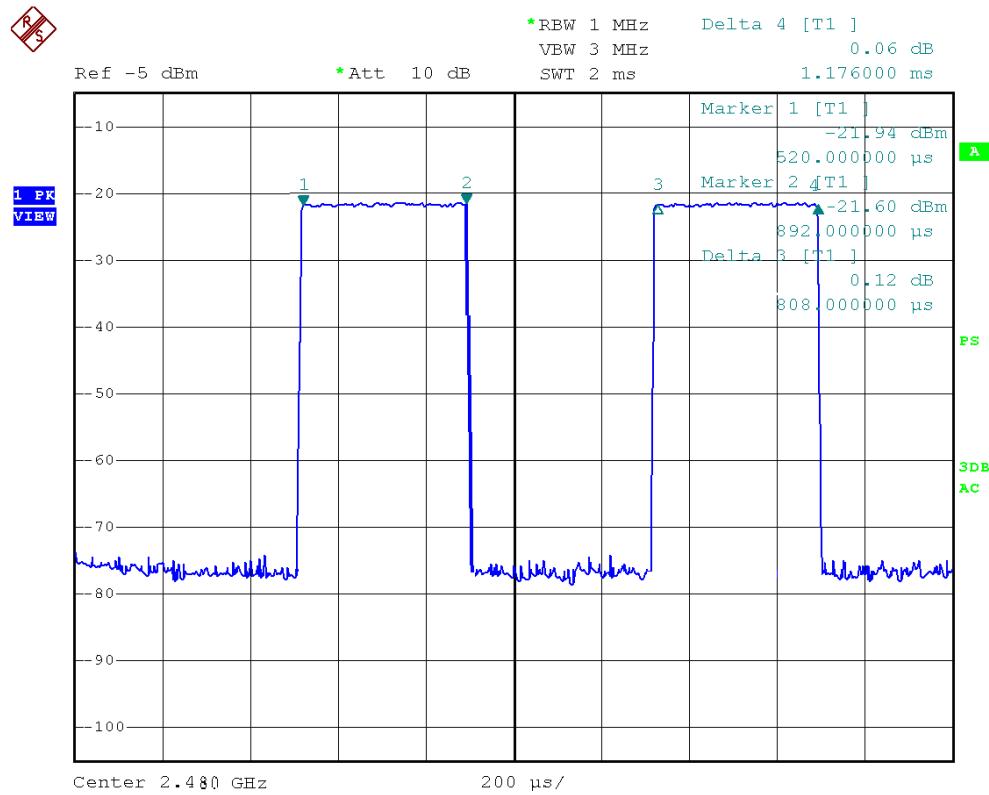


## 9. Test of Maximum Peak Output Power

### 9.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

### 9.2 EUT Setup

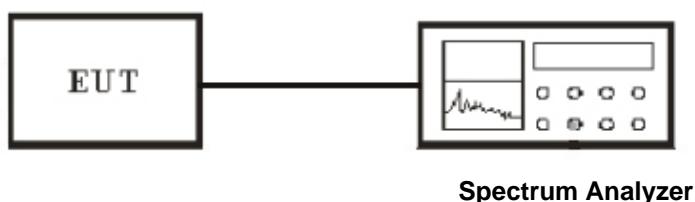

### 9.3 Test Equipment List and Details

See section 2.4.

### 9.4 Test Procedure


1. The transmitter output was connected to the peak power meter and recorded the peak value.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

### 9.5 Test Result


Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2402.00	-3.77	30	33.77
FHSS	Middle	2441.00	-3.38	30	33.38
FHSS	High	2480.00	-3.98	30	33.98


## Channel Low :

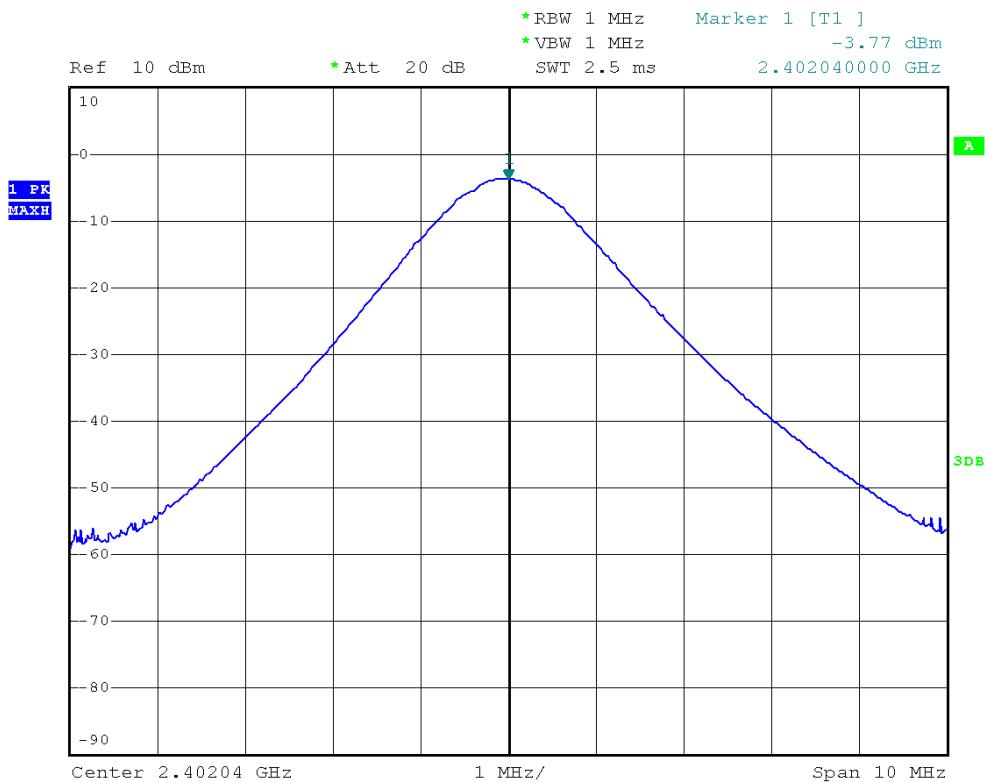

### Channel Middle :

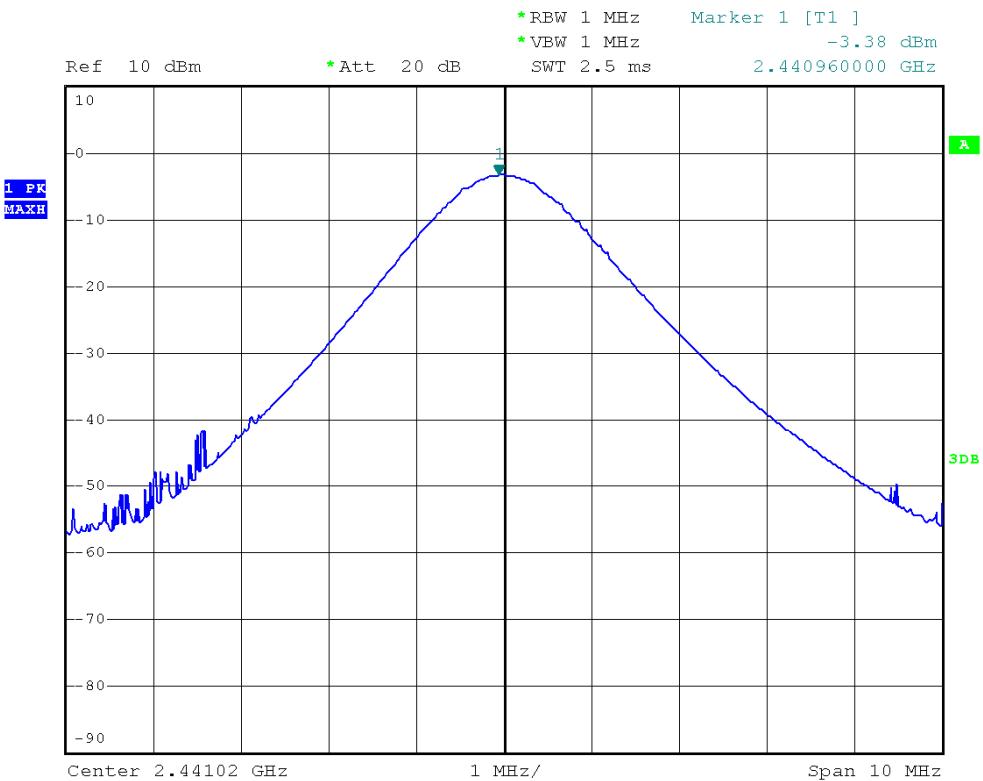

## Channel High :

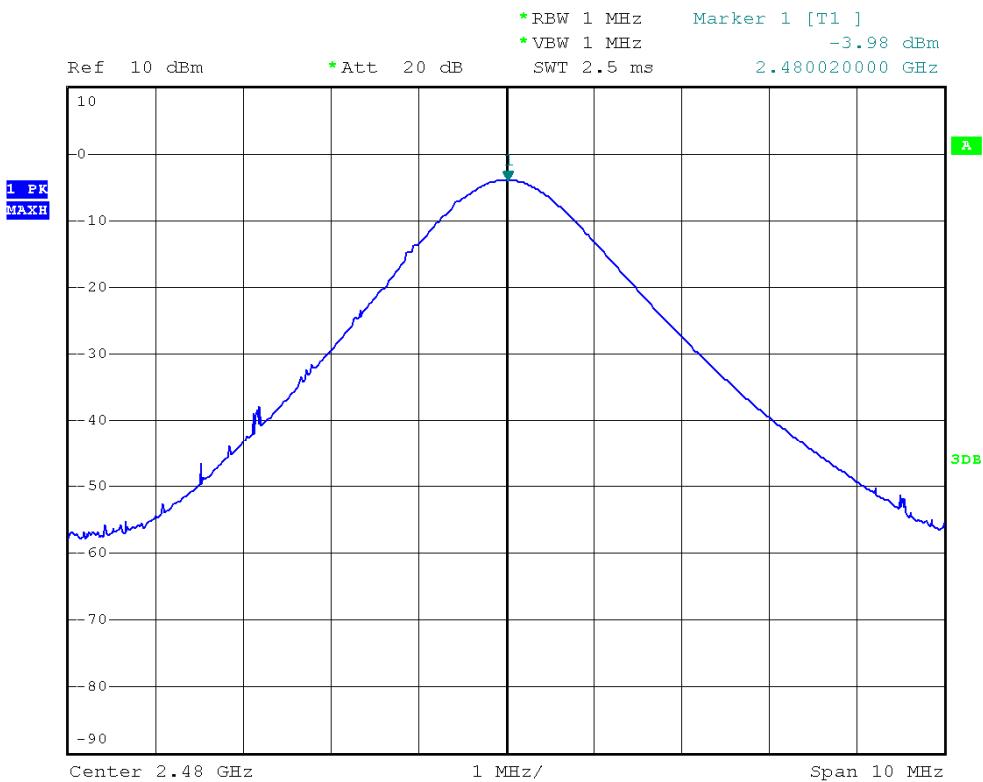


## 10. Test of Band Edges Emission

### 10.1 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

## 10.2 EUT Setup

### Radiated Measurement Setup

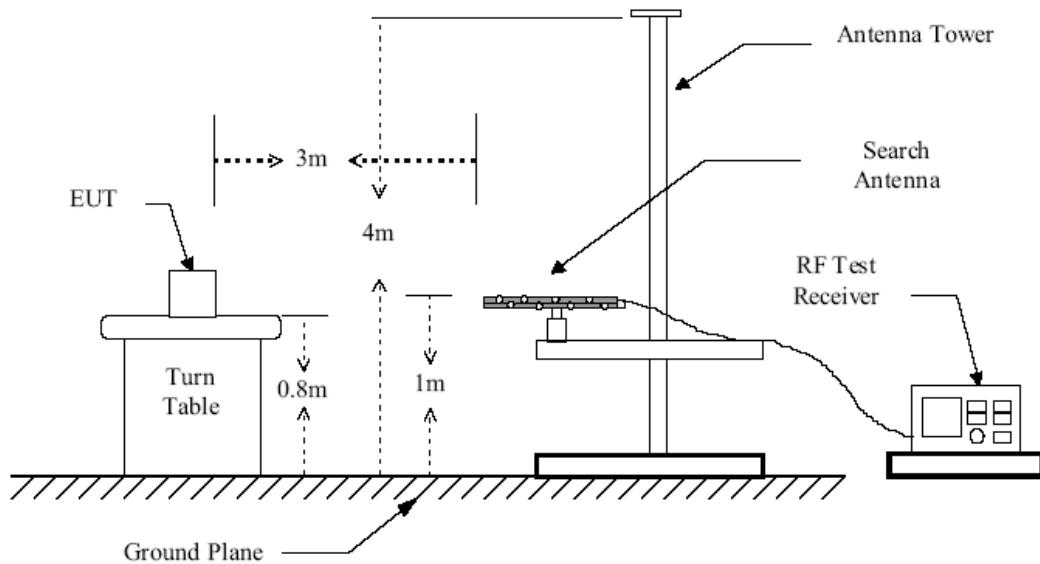

### Conducted Measurement Setup

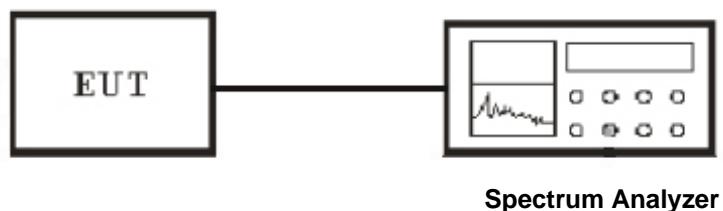

## 10.3 Test Equipment List and Details

See section 2.4.

## 10.4 Test Procedure

### Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span

including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.

4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

### **Radiated Measurement**

1. Configure the EUT according to ANSI C63.4-2009
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission, use 1MHz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.


### **10.5 Test Result**

Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx Mode


### **Radiated Test Result**

Frequency(MHz)
<2400
>2483.5

*The worst frequency range of Low Channel*

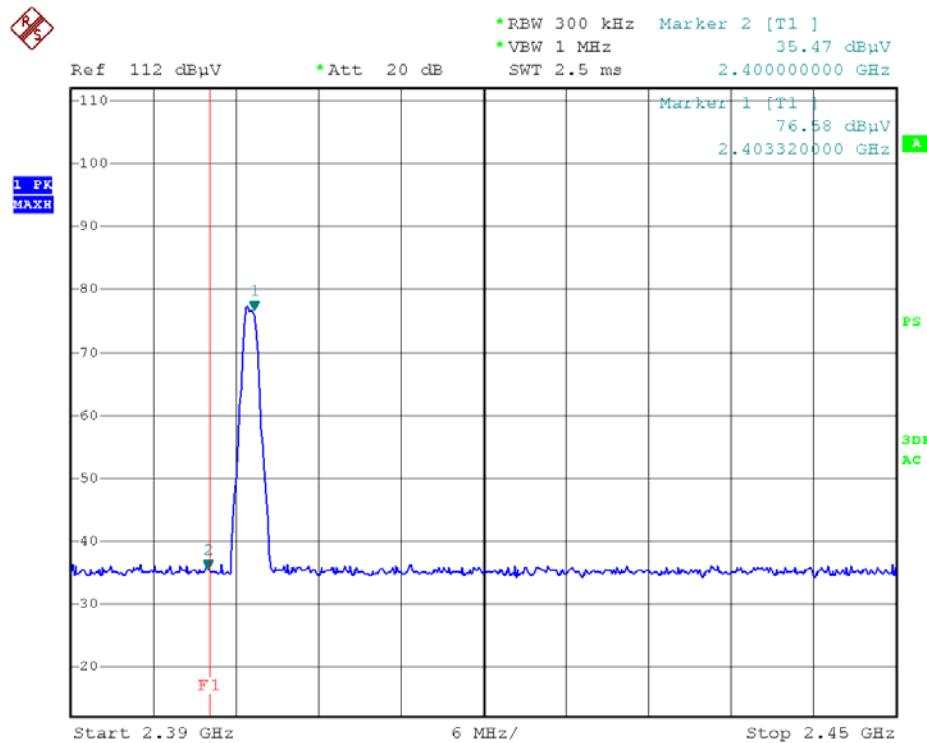

*The worst frequency range of High Channel*

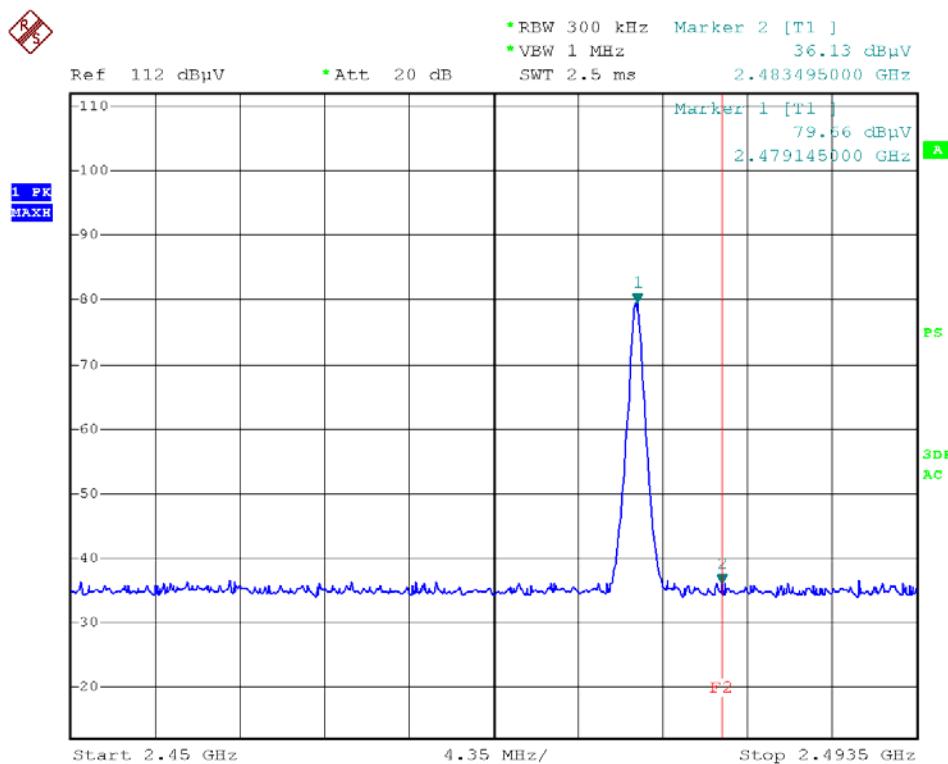

## 11. Test of Spurious Radiated Emission

### 11.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 11.2 EUT Setup

#### Radiated Measurement Setup

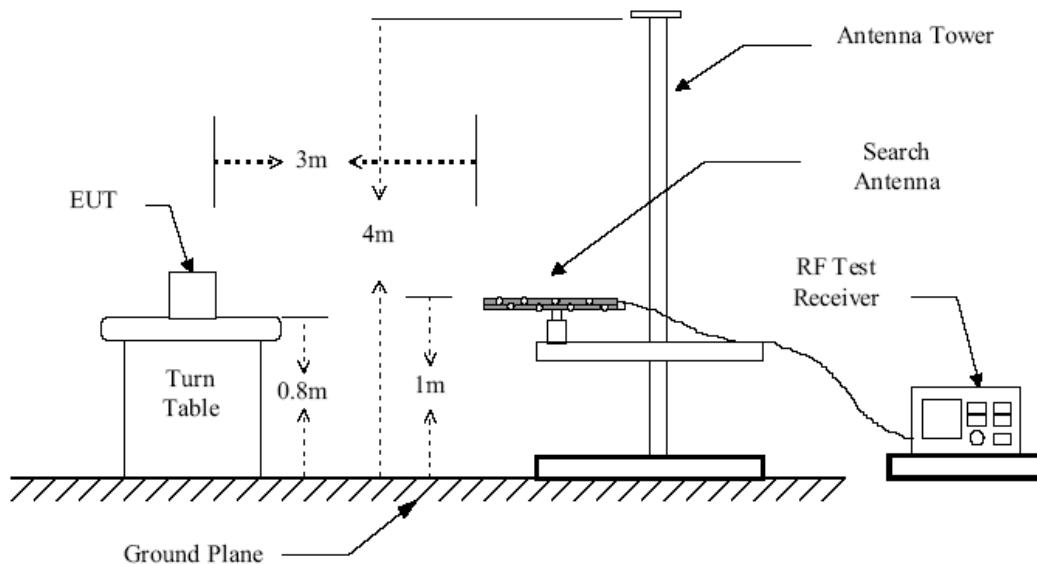


Figure 1 : Frequencies measured below 1 GHz configuration


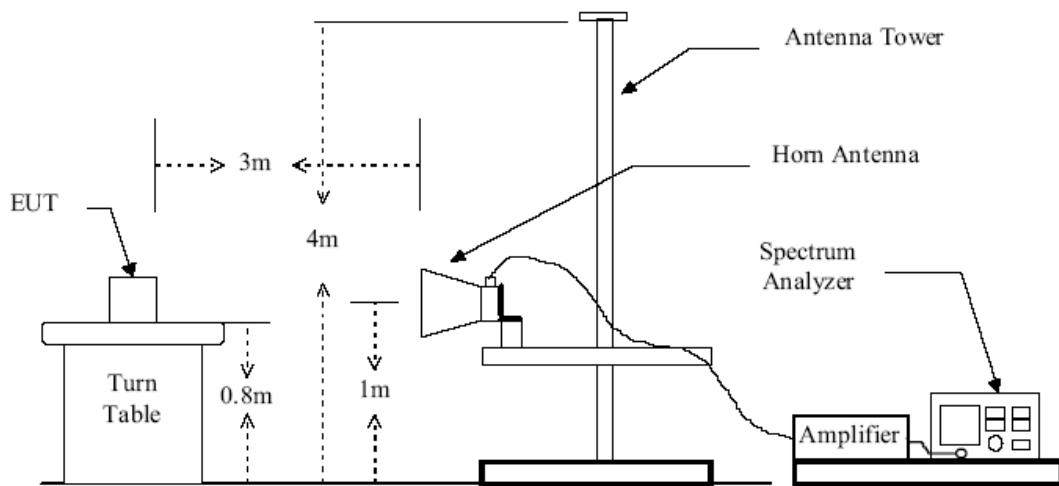


Figure 2 : Frequencies measured above 1 GHz configuration

### Conducted Measurement Setup

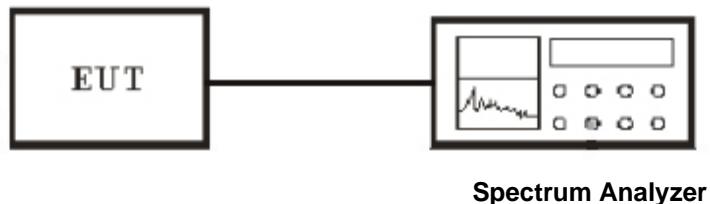

### 11.3 Test Equipment List and Details

See section 2.4.

### 11.4 Test Procedure

#### Radiated Measurement

1. Configure the EUT according to ANSI C63.4-2009
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.

6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

### **Conducted Measurement**

1. For emission above 1GHz, conducted measurement method is used.
2. The transmitter is set to the lowest channel.
3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
5. The lowest band edges emission was measured and recorded.
6. The transmitter set to the highest channel and repeated 2~4.

### **11.5 Test Result**


Temperature ( °C ) : 22~23	EUT: The Ultra Portable Wireless Bluetooth Speaker
Humidity (%RH ): 50~54	M/N: Oontz
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Charging, playing

## Spurious Emission (30~1000MHz)

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Charging  
 Test Site: 3m CHAMBER  
 Operator: Chen  
 Test Specification: AC 120V60Hz for PC  
 Comment: Polarization: Horizontal  
 Tem:25°C Hum:50%

### ***SWEEP TABLE: "test (30M-1G)"***

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Time Coupled	Bandw. 100 kHz	VULB9163 NEW

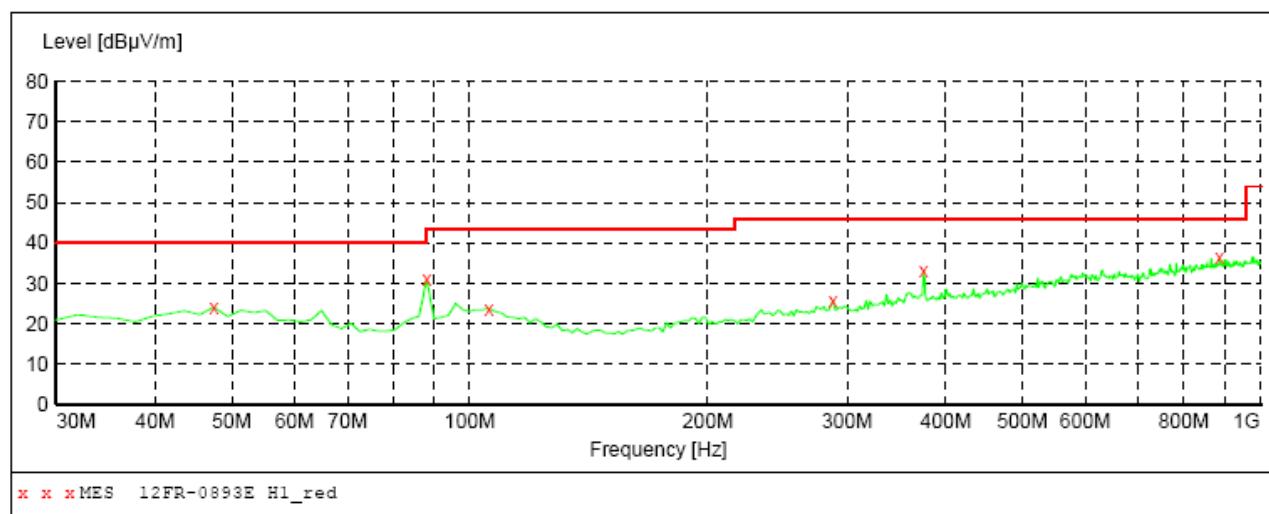

### ***MEASUREMENT RESULT: "12FR-0893E H1\_red"***

6/27/2012 00:22


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	24.10	15.8	40.0	15.9	QP	100.0	0.00	HORIZONTAL
88.200000	30.90	15.5	43.5	12.6	QP	100.0	0.00	HORIZONTAL
105.660000	23.80	16.9	43.5	19.7	QP	100.0	0.00	HORIZONTAL
288.020000	25.60	18.4	46.0	20.4	QP	100.0	0.00	HORIZONTAL
375.320000	33.30	20.8	46.0	12.7	QP	100.0	0.00	HORIZONTAL
887.480000	36.30	29.1	46.0	9.7	QP	100.0	0.00	HORIZONTAL

## Spurious Emission (30~1000MHz)

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Charging  
 Test Site: 3m CHAMBER  
 Operator: Chen  
 Test Specification: AC 120V60Hz for PC  
 Comment: Polarization: Vertical  
 Tem:25°C Hum:50%

### ***SWEEP TABLE: "test (30M-1G)"***

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

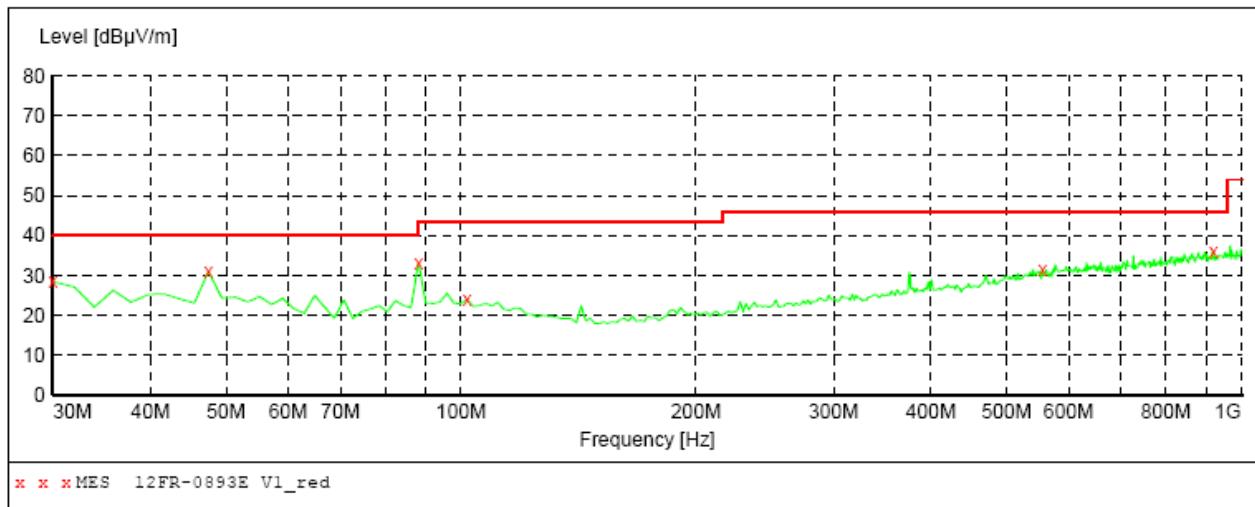

### ***MEASUREMENT RESULT: "12FR-0893E V1\_red"***

6/27/2012 00:20


Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
30.000000	28.40	14.3	40.0	11.6	QP	100.0	0.00	VERTICAL
47.460000	31.00	15.8	40.0	9.0	QP	100.0	0.00	VERTICAL
88.200000	33.30	15.5	43.5	10.2	QP	100.0	0.00	VERTICAL
101.780000	24.00	17.3	43.5	19.5	QP	100.0	0.00	VERTICAL
555.740000	31.50	25.1	46.0	14.5	QP	100.0	0.00	VERTICAL
920.460000	36.00	29.3	46.0	10.0	QP	100.0	0.00	VERTICAL

## Spurious Emission (30~1000MHz)

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Palying  
 Test Site: 3m CHAMBER  
 Operator: Chen  
 Test Specification: AC 120V60Hz for PC  
 Comment: Polarization: Horizontal  
 Tem:25°C Hum:50%

### ***SWEEP TABLE: "test (30M-1G)"***

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

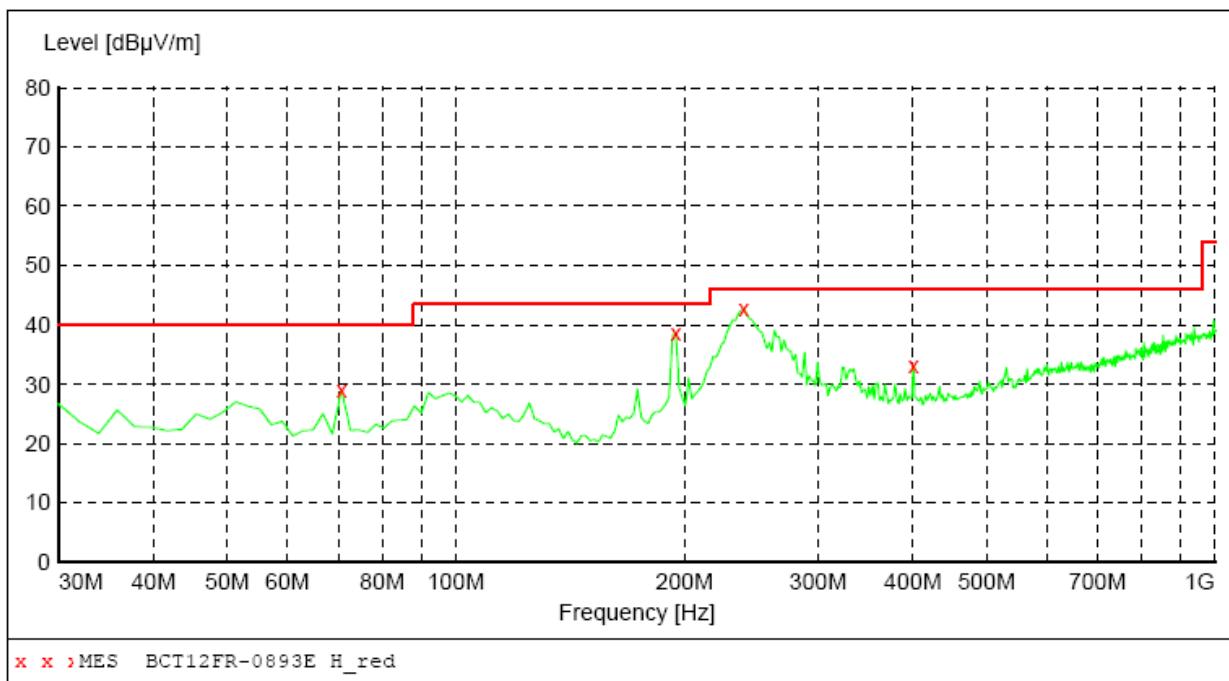

### ***MEASUREMENT RESULT: "BCT12FR-0893E H\_red"***


Frequency	Level	Transd	Limit	Margin	Det.	Height	Azimuth	Polarization
MHz	dB $\mu$ V/m	dB	dB $\mu$ V/m	dB		cm	deg	
70.740000	29.10	12.4	40.0	10.9	QP	300.0	0.00	HORIZONTAL
194.900000	38.70	16.1	43.5	4.8	QP	100.0	0.00	HORIZONTAL
239.520000	42.70	17.1	46.0	3.3	QP	100.0	0.00	HORIZONTAL
400.540000	33.20	21.5	46.0	12.8	QP	100.0	0.00	HORIZONTAL

## Spurious Emission (30~1000MHz)

EUT: The Ultra Portable Wireless Bluetooth Speaker  
 M/N: Oontz  
 Operating Condition: Playing  
 Test Site: 3m CHAMBER  
 Operator: Chen  
 Test Specification: AC 120V60Hz for PC  
 Comment: Polarization: Vertical  
 Tem:25°C Hum:50%

### ***SWEET TABLE: "test (30M-1G)"***

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

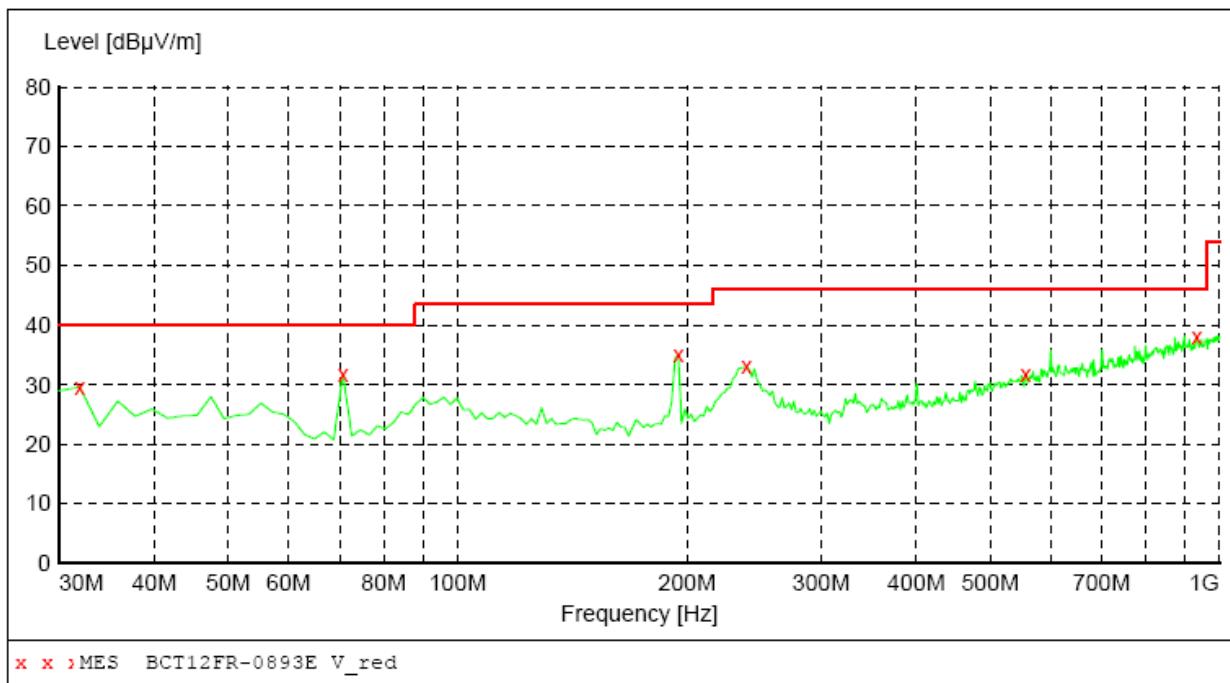

### ***MEASUREMENT RESULT: "BCT12FR-0893E V\_red"***

6/27/2012 00:04

Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
31.940000	29.60	14.4	40.0	10.4	QP	100.0	0.00	VERTICAL
70.740000	31.80	12.4	40.0	8.2	QP	100.0	0.00	VERTICAL
194.900000	35.00	16.1	43.5	8.5	QP	100.0	0.00	VERTICAL
239.520000	33.00	17.1	46.0	13.0	QP	100.0	0.00	VERTICAL
555.740000	31.70	25.3	46.0	14.3	QP	100.0	0.00	VERTICAL
932.100000	38.20	31.6	46.0	7.8	QP	100.0	0.00	VERTICAL

## Spurious Emission test data above 1G

Maximum Frequency (MHz)	Polarity and Level					Limit (dB $\mu$ V/m)	Margin (dB $\mu$ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB $\mu$ V	Transd	Result dB $\mu$ V/m			
2390.00	H	1.00	30.1	24.3	54.4	74.0	19.6	P
			22.3	24.3	45.6	54.0	7.4	A
2390.00	V	1.00	32.8	24.3	57.1	74.0	16.9	P
			24.1	25.2	49.3	54.0	3.7	A
2402.01	H	1.00	68.7	24.3	93.1	114	20.9	P
			67.0	24.3	91.3	94	2.7	A
2402.01	V	1.00	68.6	24.8	93.4	114	20.6	P
			65.4	24.8	90.2	94	3.9	A
4804.03	H	1.00	21.7	24.3	46.0	74.0	28.0	P
			17.8	24.3	42.1	54.0	11.9	A
4804.03	V	1.00	25.0	24.3	49.3	74.0	24.7	P
			11.6	24.3	45.9	54.0	8.1	A
7206.05	H	1.00	23.6	24.3	47.9	74.0	26.1	P
			20.0	24.3	44.3	54.0	9.7	A
7206.05	V	1.00	25.2	24.8	50.0	74.0	24.0	P
			18.8	24.8	43.6	54.0	10.4	A
9608.06	H	1.00	21.3	25.1	46.4	74.0	27.6	P
			15.7	25.1	40.8	54.0	13.2	A
9608.06	V	1.00	21.4	25.1	46.5	74.0	27.5	P
			18.2	25.1	43.3	54.0	10.7	A
12010.07	---	---	---	---	---	---	---	
14412.08	---	---	---	---	---	---	---	
16814.09	---	---	---	---	---	---	---	
19216.11	---	---	---	---	---	---	---	
21618.12	---	---	---	---	---	---	---	
24020.13	---	---	---	---	---	---	---	

**Remark:** 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier  
Margin = Level-Limit  
Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value  
2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.  
3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.  
4. The test limit distance is 3m limit

Channel Mid								
Maximum Frequency (MHz)	Polarity and Level					Limit (dB $\mu$ V/m)	Margin (dB $\mu$ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB $\mu$ V	Transd	Result dB $\mu$ V/m			
2441.02	H	1.00	68.8	24.3	93.1	114	20.9	P
			67.0	24.3	91.3	94	2.7	A
2441.02	V	1.00	67.4	24.8	92.2	114	22.7	P
			66.3	24.8	91.1	94	2.9	A
4882.05	H	1.00	25.1	24.3	49.4	74.0	24.6	P
			18.3	24.3	44.6	54.0	9.4	A
4882.05	V	1.00	24.4	24.3	48.7	74.0	25.3	P
			18.3	25.2	43.5	54.0	10.5	A
7323.07	H	1.00	25.4	25.2	50.6	74.0	23.4	P
			18.9	25.2	44.1	54.0	9.9	A
7323.07	V	1.00	27.1	25.2	52.3	74.0	21.7	P
			21.5	24.9	46.4	54.0	7.6	A
9764.10	H	1.00	19.4	24.9	44.3	74.0	27.9	P
			18.9	24.9	43.8	54.0	10.2	A
9764.10	V	1.00	18.3	25.2	43.5	74.0	30.5	P
			16.7	25.2	41.9	54.0	12.1	A
12205.11	---	---	---	---	---	---	---	
14646.13	---	---	---	---	---	---	---	
17087.14	---	---	---	---	---	---	---	
19528.16	---	---	---	---	---	---	---	
21969.20	---	---	---	---	---	---	---	
24410.21	---	---	---	---	---	---	---	
<b>Remark:</b> 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier <b>Margin</b> = Level-Limit <b>Mark:</b> P means Peak Value, Q means Quasi Peak Value, A means Average Value 2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz. 4. The test limit distance is 3m limit								

Channel High								
Maximum Frequency (MHz)	Polarity and Level					Limit (dB $\mu$ V/m)	Margin (dB $\mu$ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB $\mu$ V	Transd	Result dB $\mu$ V/m			
2480.01	H	1.00	67.3	24.8	88.5	114.0	25.5	P
			63.1	24.8	87.9	94.0	6.1	A
2480.01	V	1.00	67.2	25.1	92.3	114.0	21.7	P
			66.4	25.1	91.5	94.0	2.5	A
2500.00	H	1.00	29.3	24.3	53.6	74.0	20.4	P
			23.7	24.3	48.0	54.0	6.0	A
2500.00	V	1.00	33.5	24.3	58.8	74.0	15.2	P
			24.3	25.2	49.5	54.0	3.5	A
4960.02	H	1.00	21.7	24.3	46.0	74.0	28.0	P
			17.8	24.3	42.1	54.0	11.9	A
4960.02	V	1.00	25.0	24.3	49.3	74.0	24.7	P
			11.6	24.3	45.9	54.0	8.1	A
7440.03	H	1.00	25.2	25.2	50.4	74.0	23.6	P
			19.1	25.2	44.3	54.0	9.7	A
7440.03	V	1.00	23.6	25.2	48.8	74.0	25.2	P
			19.1	25.2	44.3	54.0	9.7	A
9920.04	H	1.00	19.7	24.9	44.6	74.0	29.4	P
			16.4	24.9	41.3	54.0	12.7	A
9920.04	V	1.00	22.4	24.9	47.3	74.0	26.7	P
			19.9	24.9	44.8	54.0	9.2	A
12400.05	---	---	---	---	---	---	---	---
14880.06	---	---	---	---	---	---	---	---
17360.07	---	---	---	---	---	---	---	---
19840.08	---	---	---	---	---	---	---	---
22320.09	---	---	---	---	---	---	---	---
24800.10	---	---	---	---	---	---	---	---
<b>Remark:</b> 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier <b>Margin</b> = <b>Level-Limit</b> <b>Mark:</b> P means Peak Value, Q means Quasi Peak Value, A means Average Value 2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. 3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz. 4. The test limit distance is 3m limit								