

PPLICATION FOR CERTIFICATION
On Behalf of
Viva Home Improvement Co., Ltd.
Electronic Ballast

Model: 84155

Prepared for : Viva Home Improvement Co., Ltd.
No.888, Zhangcao Rd, Caojing,
Jinshan, Shanghai.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755)663-9496

Report Number • ACS-20F001
Date of Test • Dec. 30, 1999 / Jan. 04, 2000
Date of Report • Jan. 11, 2000

TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| Test Report Declaration | |
| 1.GENERAL INFORMATION..... | 4 |
| 1.1. Description of Device (EUT)..... | 4 |
| 1.2. Test Facility | 5 |
| 1.3. Test Uncertainty | 5 |
| 2.POWER LINE CONDUCTED EMISSION TEST..... | 6 |
| 2.1. Test Equipment..... | 6 |
| Block Diagram of Test Setup..... | 6 |
| 2.3. Power Line Conducted Emission Limit | 6 |
| 2.4. EUT Configuration on Test..... | 6 |
| 2.5. Operating Condition of EUT | 7 |
| 2.6. Test Procedure | 7 |
| 2.7. Power Line Conducted Emission Test Results..... | 8 |
| 3.RADIATED EMISSION TEST | 9 |
| 3.1. Test Equipment..... | 9 |
| 3.2. Block Diagram of Test Setup..... | 9 |
| 3.3. Radiation Limit | 10 |
| 3.4. EUT Configuration on Test..... | 10 |
| 3.5. Operating Condition of EUT | 10 |
| 3.6. Test Procedure | 10 |
| 3.7. Radiated Emission Test Results..... | 11 |
| 4.PHOTOGRAPH..... | 13 |
| 4.1. Photos of Power Line Conducted Emission Test..... | 13 |
| 4.2. Photos of Radiated Emission Test | 14 |
| APPENDIX I | (2 pages) |
| APPENDIX II | (3 pages) |
| APPENDIX III (Photos of the EUT) | (2 pages) |

TEST REPORT DECLARATION

Test Procedure Used:

FCC RULES AND REGULATIONS PART 18 SUBPART C RF LIGHTING DEVICES
CONSUMER PRODUCT (1998) AND MP-5/1986

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC 18 Part RF Lighting Device limits both radiated and conducted emissions.

The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed of full responsibility for the accuracy and completeness of these tests. Also, this report shows that the EUT is technically compliant with the FCC official limits.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Date of Test : Dec. 30, 1999 / Jan.04, 2000

Prepared by : Fanny Yang 2/16, 2000
(FANNY YANG / ASSISTANT)

Reviewer : Martin Lu 16/2
(MARTIN LU / SUPERVISOR)

For and on behalf of
AUDIX TECHNOLOGY (SHENZHEN) CO.,LTD.

Approved & Authorized Signer : John Doe
(SMARTCARD MANAGER)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | | |
|--------------|---|--|
| Description | • | Electronic Ballast |
| Model Number | • | 84155 |
| Power Cord | • | Unshielded Detachable 1.5m |
| Applicant | • | Viva Home Improvement Co., Ltd. No.888, Zhangcao Rd, Caojing, Jinshan, Shanghai. |
| Manufacturer | • | Elec-Mart Co., Ltd. 4th, Ind. Zone, Paisha, Humen, Dongguan. |
| Date of Test | • | Dec. 30, 1999 / Jan. 04, 2000 |

1.2. Test Facility

Site Description

3m Anechoic Chamber : certificated by FCC, USA
Aug. 18, 1997

3m & 10m Open Site : certificated by FCC, USA
Feb. 13, 1998

EMC Lab. certificated by VCCI, Japan
Oct. 29, 1998

certificated by DATech, German
Feb. 02, 1999

certificated by NVLAP, USA
until Mar. 03, 2000
NVLAP Code: 200372-0

certificated by DNV, Norway
May 26, 1999

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.

Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.3. Test Uncertainty

Conducted Emission Uncertainty = ±2.66dB

Radiated Emission Uncertainty = ±4.26dB


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted Emission test:

| Item | Type | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|----------------|-----------------|-----------|------------|-------------|---------------|
| 1. | Test Receiver | Rohde & Schwarz | ESHS20 | 836600/006 | Jun. 06, 99 | 1 Year |
| 2. | L.I.S.N. | Kyoritsu | KNW-407 | 8-541-4 | Jun. 06, 99 | 1 Year |
| 3. | Terminator | EMCO | 50• | No. 1 | Jun. 06, 99 | 1 Year |
| 4. | Terminator | EMCO | 50• | No. 2 | Jun. 06, 99 | 1 Year |
| 5. | RF Cable | FUJIKURA | RG-55/U | LISN Cable | Aug. 30, 99 | 1/2 Year |
| 6. | Coaxial Switch | Anritsu | MP59B | M73989 | Dec. 05, 99 | 1/2 Year |

2.2. Block Diagram of Test Setup

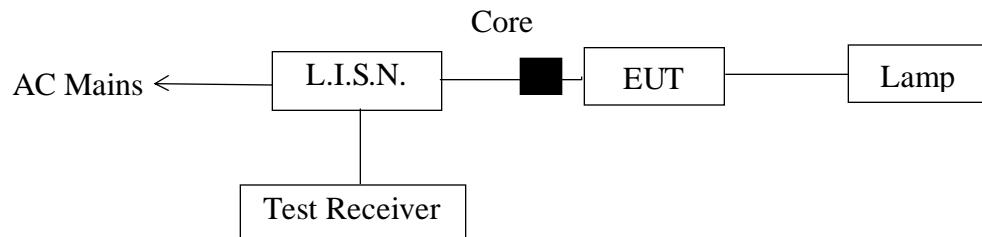

(EUT: Electronic Ballast)

2.3. Power Line Conducted Emission Limit

| Frequency MHz | Limit dB(µV) |
|------------------|-----------------|
| 0.45 ~ 30 | 48 |

2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE test to meet the FCC 18 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. Electronic Ballast•EUT)

| | | |
|---------------|---|---------------------|
| Model Number | • | 84155 |
| Serial Number | • | F2000010401 |
| Manufacturer | • | Elec-Mart Co., Ltd. |

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT as shown in Section 2.2.
- 2.5.2. Turn on the power of all equipments.
- 2.5.3. Let the EUT works in test mode (ON) and measure it.

2.6. Test Procedure

The EUT is put on table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the tested equipments. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission Levels, the relative positions of equipments and all of the interface cables must be changed according to MP-5/1986 on conducted Emission test.

The bandwidth of the test receiver (R & S Test Receiver ESHS20) is set at 10KHz.

The frequency range from 450KHz to 30MHz is checked.

All the test results are listed in Section 2.7. and all the scanning waveforms are attached within Appendix I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 450KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

| | | | |
|-----------------|--------------------|---------------|------|
| Date of Test • | Jan. 04, 2000 | Temperature • | 25 • |
| EUT • | Electronic Ballast | Humidity • | 60 • |
| Model No. • | 84155 | Test Mode • | ON |
| Test Engineer • | Rees Zeng | | |

| Frequency MHz | Reading | | Limit dB(μV) |
|------------------|--------------------|--------------------|-----------------|
| | Phase VA dB(μV) | Phase VB dB(μV) | |
| 0.474 | * | 32.4 | 48.0 |
| 0.476 | 36.6 | * | 48.0 |
| 0.515 | 35.7 | * | 48.0 |
| 0.663 | * | 35.2 | 48.0 |
| 0.737 | 36.4 | 33.3 | 48.0 |

Remark •

1. All readings are Quasi-Peak values.
2. The worst emission is detected at 0.476 MHz with corrected signal level of 36.6 dB(μV) (limit is 48 dB(μV)) when the VA side of the EUT is connected to L.I.S.N.

Martin Lin 16/2

Reviewer:

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission test:

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|-----------------|-----------|-----------------|-------------|---------------|
| 1. | EMI Test Receiver | HP | 85422E | 3625A00181 | Jun. 06, 99 | 1 Year |
| 2. | Test Receiver | Rohde & Schwarz | ESVS20 | 830350/005 | Jun. 06, 99 | 1 Year |
| 3. | Amplifier | HP | 8447D | 2944A07794 | Dec. 05, 99 | 1/2 Year |
| 4. | Bilog Antenna | Chase | CBL6112A | 2176 | Sep. 26, 99 | 1 Year |
| 5. | Computer | N/A | N/A | N/A | N/A | N/A |
| 6. | Printer | NEC | P3800 | 568101448 | N/A | N/A |
| 7. | RF Cable | MIYAZAKI | 5D-2W | 3# Chamber No.1 | Aug.11, 99 | 1/2 Year |
| 8. | RF Cable | MIYAZAKI | 5D-2W | 3# Chamber No.2 | Aug.11, 99 | 1/2 Year |
| 9. | RF Cable | FUJIKURA | RG-55/U | 3# Chamber No.3 | Aug.11, 99 | 1/2 Year |
| 10. | RF Cable | FUJIKURA | RG-55/U | 3# Chamber No.4 | Aug.11, 99 | 1/2 Year |
| 11. | Coaxial Switch | Anritsu | MP59B | M74389 | Dec. 05, 99 | 1/2 Year |

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of EUT



(EUT: Electronic Ballast)

3.2.2. Anechoic Chamber Test Setup Diagram

ANTENNA TOWER

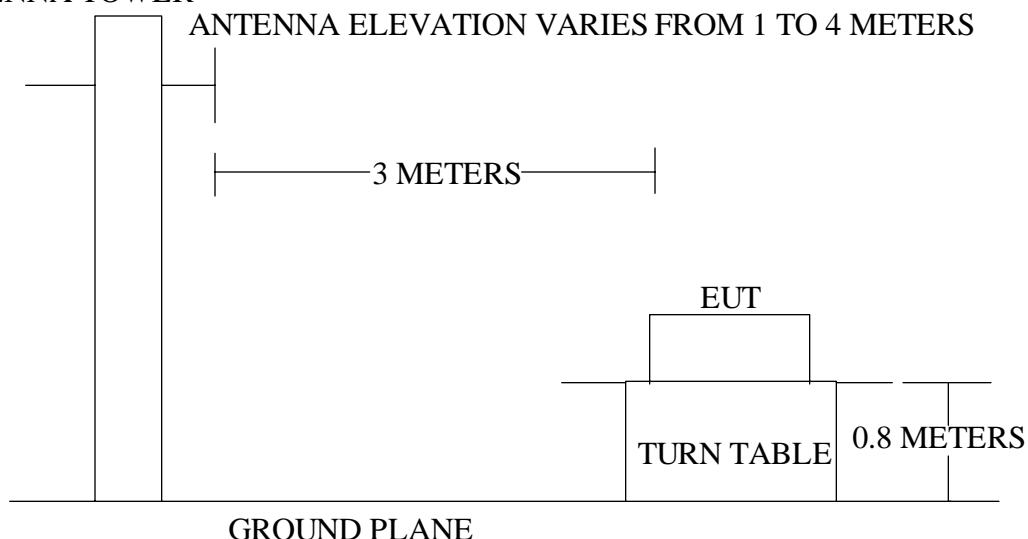

3.3. Radiation Limit

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMITS dB(μ V)/m |
|------------------|--------------------|--|
| 30 ~ 88 | 3 | 40.0 |
| 88 ~ 216 | 3 | 43.5 |
| 216 ~ 1000 | 3 | 46.0 |

Remark • (1) The tighter limit shall apply at the edge between two frequency bands.
(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. EUT Configuration on Test

The configuration of EUT is same as those used in conducted Emission test. Please refer to Section 2.4.

3.5. Operating Condition of EUT

Same as conducted Emission test which is listed in Section 2.5.

3.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The Resolution bandwidth setting on the test receiver (R&S Test Receiver ESVS20) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (ON) are tested in Anechoic Chamber and all the scanning waveform are attached within Appendix II.

3.7. Radiated Emission Test Results.

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

3.7.1. Horizontal Value Test Results.

As the Horizontal peak-value is too low against the limit, So the Quasi-peak value had been omitted.

3.7.2. Vertical Value Test Results

Date of Test : Dec 30, 1999 Temperature : 25•

EUT : Electronic Ballast Humidity : 60•

Model No. : 84155 Test Mode : ON

Test Site : Anechoic Chamber Test Engineer : Rees Zeng

| Frequency MHz | Antenna Factor dB/m | Cable Loss dB | Meter Reading Vertical dB μ V | Emission Level Vertical dB μ V/m | Over Limits dB μ V/m | Limits dB μ V/m |
|------------------|---------------------------|---------------------|---|--|--------------------------------|------------------------|
| 37.928 | 16.62 | 1.29 | 18.30 | 36.21 | -3.79 | 40.00 |
| 77.348 | 13.00 | 2.35 | 12.30 | 27.65 | -12.35 | 40.00 |


Remark: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading

Reviewer:

Martin Lin 16/2

Data#: File#: VIVA.EMI

Date: 12-30,1999 Time: 12:11:11

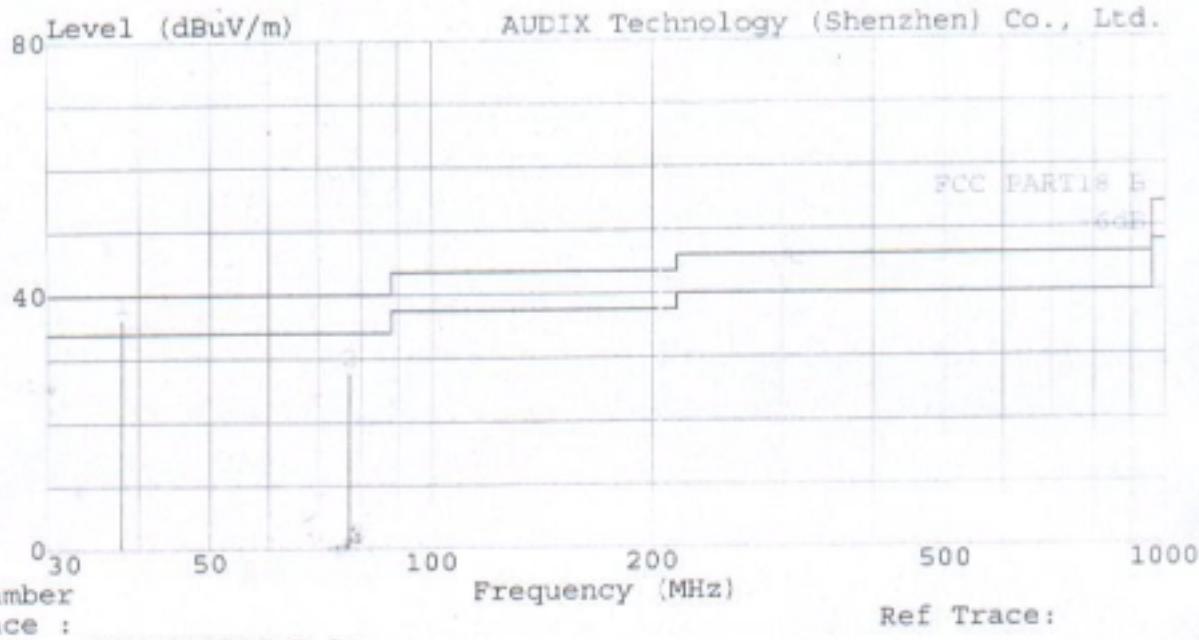

Chamber

Trace :

Limit : FCC PART18 B 3m

Probe : 2176FACTOR VERTICAL

Margin: -6.0dB

EUT : Electronic Ballast M/N:84155

Power : 120V/60Hz

Memo : On

:

:

Ref Trace:

Page: 1

| | Freq | Level | Over Limit | Limit Line | Read Level | Probe Factor | Cable Loss | Preamp Factor | Remark |
|---|--------|-------|------------|------------|------------|--------------|------------|---------------|--------|
| | MHz | dB | dB | dB | dB | dB | dB | dB | |
| 1 | 37.928 | 36.21 | -3.79 | 40.00 | 18.30 | 16.62 | 1.29 | 0.00 | |
| 2 | 77.348 | 27.65 | -12.35 | 40.00 | 12.30 | 13.00 | 2.35 | 0.00 | |

4. PHOTOGRAPH

4.1. Photos of Power Line Conducted Emission Test




FRONT VIEW OF CONDUCTED EMISSION TEST



BACK VIEW OF CONDUCTED EMISSION TEST

4.2. Photos of Radiated Emission Test

4.2.1. Photos of Radiated Emission Test in Chamber

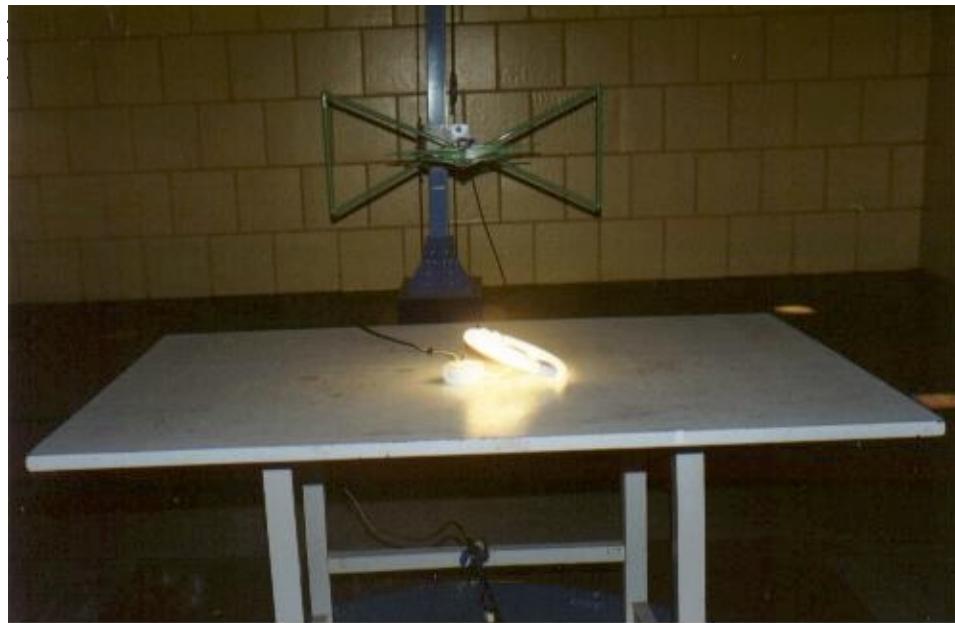

APPENDIX I


Conduction Test

FCC Part18

04. Jan 00 18:18

EUT: Electronic Ballast M/N:84155
 Manuf: Viva
 Op Cond: On
 Operator: Rees
 Test Spec: Va 120V/60Hz
 Comment: Temp:25°C
 Humi:60%

dBuV Mkr : 515.00 kHz 39.5 dBuV

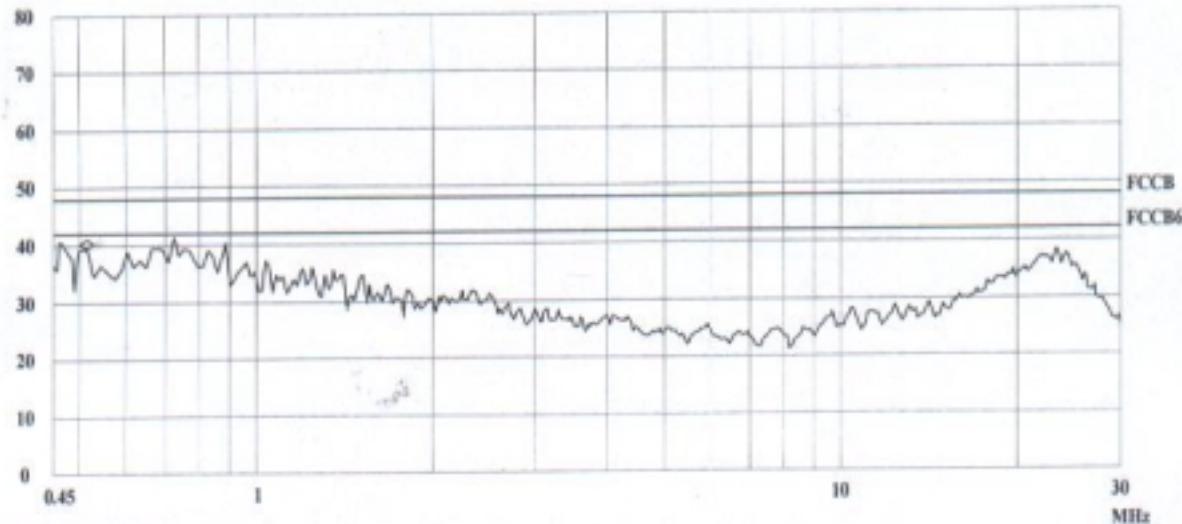


Conduction Test

FCC Part18

04. Jan 00 18:16

EUT: Electronic Ballast M/N:84155
 Manuf: Viva
 Op Cond: On
 Operator: Rees
 Test Spec: Vb 120V/60Hz
 Comment: Temp:25°C
 Humi:60%

dBuV Mkr : 530.00 kHz 31.6 dBuV

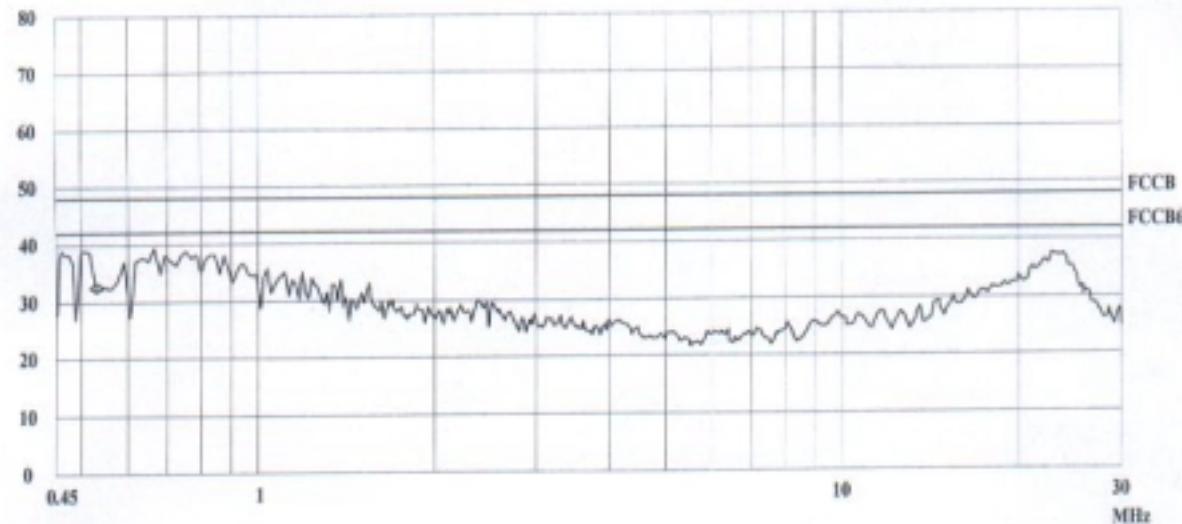

APPENDIX II

AUDIX


52 Block

Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China

AUDIX Technology (Shenzhen) Co., Ltd: 0755-6639495..7 Fax: 0755-6632877

Data#: 129 File#: VIVA.EMI


Date: 12-30-1999 Time: 12:14:50

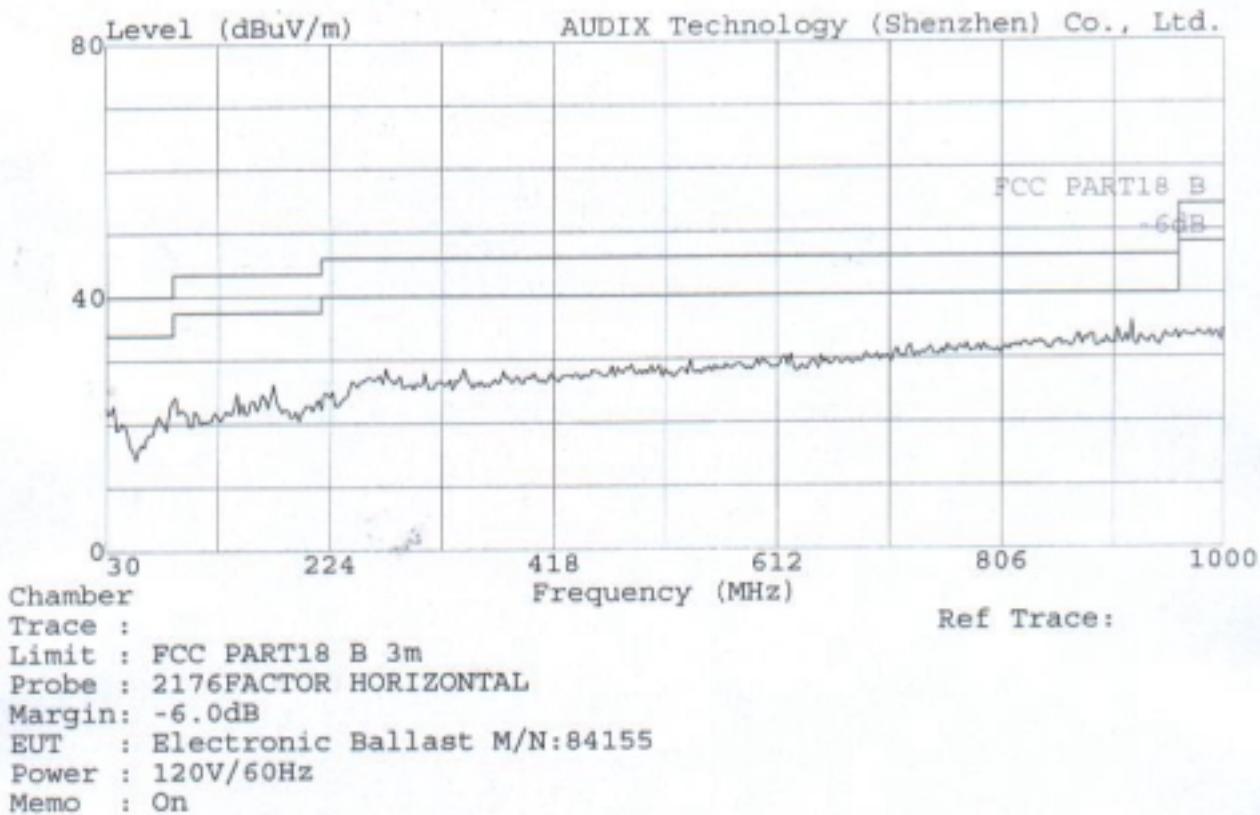

AUDIX

page 17
FCC ID: OGB84155
52 Block
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: 0755-6639495..7 Fax: 0755-6632877

AUDIX Technology (Shenzhen) Co., Ltd. Data#: 127 File#: VIVA.EMI Date: 12-30,1999 Time: 12:10:02

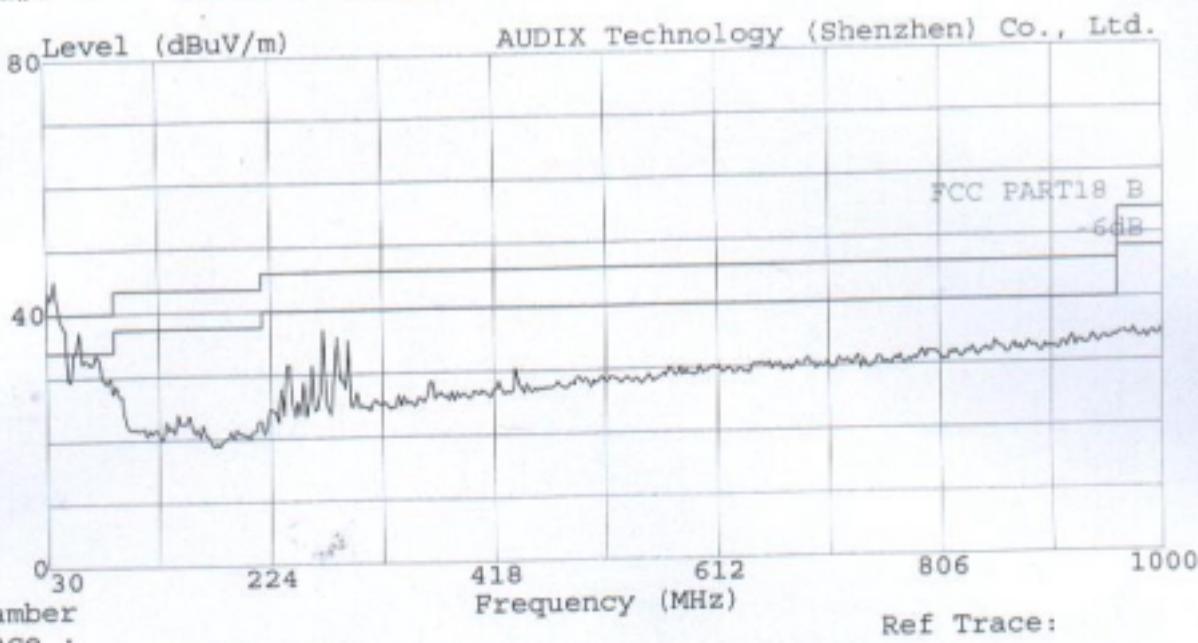

Trace :
Limit : FCC PART18 B 3m
Probe : 2176FACTOR VERTICAL
Margin: -6.0dB
EUT : Electronic Ballast M/N:84155
Power : 120V/60Hz
Memo : On