


24W

Customer: [illegible]
 Project: [illegible]
 Location: [illegible]
 Date: [illegible]
 Test: [illegible]
 Operator: [illegible]
 Instrument: [illegible]
 Method: [illegible]
 Standard: [illegible]
 Result: [illegible]
 Unit: [illegible]
 Remarks: [illegible]

Figure 1: [illegible]

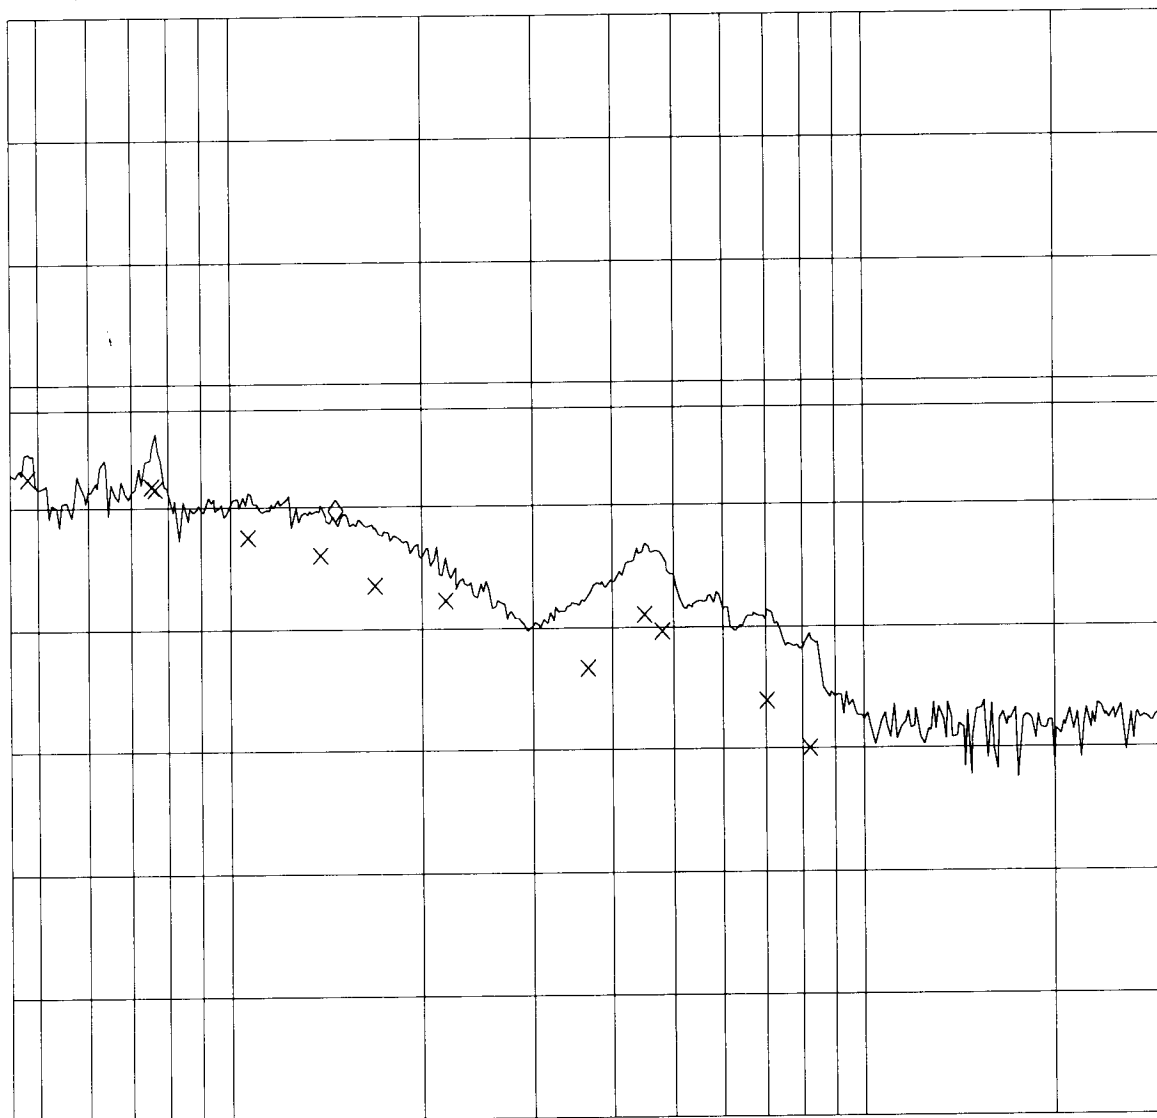

Ctrl. No.: N/A

24W

Tested By: Hong, Report No.: 980

Scan Settings (1 Range)

----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.48000	42.4	48.0
0.75500	41.6	48.0
0.76500	41.5	48.0
1.07000	37.5	48.0
1.38500	36.0	48.0
1.69000	33.5	48.0
2.18000	32.0	48.0
3.67000	26.6	48.0
4.51000	31.0	48.0
4.81500	29.6	48.0
7.04500	23.9	48.0
8.20500	20.1	48.0

* limit exceeded

Ctrl. No.: N/A



Intertek Testing Services

ETL Testing Laboratories

Report No.: 981126

18W

Tested By: Hong, Report No.: 980

Scan Settings (1 Range)

```
----- Frequencies -----+----- Receiver Settings -----!
Start      Stop      Step      LF BW  Detector  M-Time Atten Preamp OpRge
450K      300      5K        10K    PK        20ms AUTO LN OFF   60dB
Final Measurement Results:
```

Frequency MHz	QP Level dBuV	QP Limit dBuV
0.45500	38.1	48.0
0.55000	31.2	48.0
0.80000	41.1	48.0
1.25000	32.1	48.0
1.35000	34.3	48.0

* limit exceeded

Ctrl. No.: N/A