



FCC Part 15.247


TEST REPORT

For

AAEON Technology Inc.

5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C

FCC ID: OHBFWS2275WB

Report Type	Original Report
Product Name:	Desktop Network Appliance
Model Name:	FWS-2275E3-A10-00
Serial Model Name:	xFWS-2275x (x - Where x may be any combination of alphanumeric characters or "-" or blank.)
Report Number :	RLK191018001-00C
Report Date :	2019/11/25
Reviewed By :	Zeus Chen 
Prepared By:	Bay Area Compliance Laboratories Corp.(Linkou Laboratory) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Revision History

Revision	Report Number	Issue Date	Description
1.0	RLK191018001-00C	2019/11/25	Original Report

TABLE OF CONTENTS

1	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	OPERATION CONDITION OF EUT	5
1.3	OBJECTIVE AND TEST METHODOLOGY	6
1.4	MEASUREMENT UNCERTAINTY	6
1.5	ENVIRONMENTAL CONDITIONS AND TEST DATE	6
1.6	TEST FACILITY	6
2	SYSTEM TEST CONFIGURATION	7
2.1	DESCRIPTION OF TEST CONFIGURATION	7
2.2	SUPPORT EQUIPMENT LIST AND DETAILS	7
2.3	BLOCK DIAGRAM OF TEST SETUP	8
3	SUMMARY OF TEST RESULTS.....	9
4	FCC§15.247(I), §1.1307, § 2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	10
4.1	APPLICABLE STANDARD	10
4.2	RF EXPOSURE EVALUATION RESULT	10
5	FCC §15.203 – ANTENNA REQUIREMENTS	11
5.1	APPLICABLE STANDARD	11
5.2	ANTENNA LIST AND DETAILS	11
6	FCC §15.207 - AC LINE CONDUCTED EMISSIONS	12
6.1	APPLICABLE STANDARD	12
6.2	EUT SETUP AND TEST PROCEDURE	12
6.3	TEST EQUIPMENT LIST AND DETAILS	13
6.4	TEST RESULT	14
7	FCC §15.209, §15.205, §15.247(D) – SPURIOUS EMISSIONS.....	15
7.1	APPLICABLE STANDARD	15
7.2	EUT SETUP AND TEST PROCEDURE	17
7.3	TEST EQUIPMENT LIST AND DETAILS	18
7.4	TEST RESULT	19
8	FCC §15.247(A)(1) – 20 DB EMISSION BANDWIDTH	28
8.1	APPLICABLE STANDARD	28
8.2	TEST PROCEDURE	28
8.3	TEST EQUIPMENT LIST AND DETAILS	28
8.4	TEST RESULTS.....	29
9	FCC §15.247(A)(1) – CHANNEL SEPARATION TEST	33
9.1	APPLICABLE STANDARD	33
9.2	TEST PROCEDURE	33
9.3	TEST EQUIPMENT LIST AND DETAILS	33
9.4	TEST RESULTS.....	34
10	FCC §15.247(A)(1)(III) – TIME OF OCCUPANCY (DWELL TIME)	38
10.1	APPLICABLE STANDARD	38
10.2	TEST PROCEDURE	38
10.3	TEST EQUIPMENT LIST AND DETAILS	39
10.4	TEST RESULTS.....	39
11	FCC §15.247(A)(1)(III) –QUANTITY OF HOPPING CHANNEL TEST	41
11.1	APPLICABLE STANDARD	41
11.2	TEST PROCEDURE	41
11.3	TEST EQUIPMENT LIST AND DETAILS	41
11.4	TEST RESULTS.....	42

12 FCC §15.247(B)(1) – MAXIMUM OUTPUT POWER.....43

 12.1 APPLICABLE STANDARD43

 12.2 TEST PROCEDURE43

 12.3 TEST EQUIPMENT LIST AND DETAILS43

 12.4 TEST RESULTS.....44

13 FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE45

 13.1 APPLICABLE STANDARD45

 13.2 TEST PROCEDURE45

 13.3 TEST EQUIPMENT LIST AND DETAILS45

 13.4 TEST RESULTS.....46

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	AAEON Technology Inc. 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C
Manufacturer	AAEON Technology Inc. 5F, No. 135, Lane 235, Pao Chiao Rd., Hsin-Tien Dist., New Taipei City 23145, Taiwan, R.O.C
Brand Name	AAEON
Product (Equipment)	Desktop Network Appliance
Model Name	FWS-2275E3-A10-00
Serial Model Name	xFWS-2275x (x - Where x may be any combination of alphanumeric characters or "-" or blank.)
Model Discrepancy	For marketing purpose.
Frequency Range	2402 - 2480 MHz
Number of Channels	79 Channels
Output Power	BR-1Mbps: 2.87 dBm (0.0019 W) EDR-2Mbps: 2.06 dBm (0.0016 W) EDR-3Mbps: 2.36 dBm (0.0017 W)
Modulation Type	BR-1Mbps: GFSK EDR-2Mbps: $\pi/4$ -DQPSK EDR-3Mbps: 8-DPSK
Related Submittal(s)/Grant(s)	FCC Part 15.247 DTS with FCC ID: OHBFW52275WB
Received Date	Oct. 18, 2019
Date of Test	Oct. 30, 2019 ~ Nov. 19, 2019

*All measurement and test data in this report was gathered from production sample serial number: 191018001 (Assigned by BACL, Linkou Laboratory).

1.2 Operation Condition of EUT

Power Operation (Voltage Range)	☒ AC 120 V/60 Hz ☒ Adapter <i>Brand Name: AOEM</i> <i>Model: A0403TD-120033</i> <i>I/P: 100-240Vac, 1.2A</i> <i>O/P: 12Vdc, 3.34A</i> ☐ By Power Cord.
	☒ DC Type ☒ DC Power: 9-32Vdc ☐ Battery: ☐ External from USB Cable ☐ External DC Adapter

1.3 Objective and Test Methodology

The Objective of this Test Report was to document the compliance of the AAEON Technology Inc.. Appliance (Model: FWS-2275E3-A10-00, xFWS-2275x (x - Where x may be any combination of alphanumeric characters or "-" or blank.)) to the requirements of the following Standards:

- Part 2, Subpart J, Part 15, Subparts A and C, section 15.247 of the Federal Communication Commission's rules.
- ANSI C63.10-2013 of the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.4 Measurement Uncertainty

Parameter	Expanded Measurement uncertainty
RF output power	± 1.488 dB
Occupied Channel Bandwidth	± 453.927 Hz
RF Conducted Emission test	± 2.77 dB
AC Power Line Conducted Emission	± 2.66 dB
Radiated Below 1G	± 3.57 dB
Radiated Above 1G	± 5.32 dB

1.5 Environmental Conditions and Test Date

Test Site	Test Date	Temperature (°C)	Relative Humidity (% RH)	Test Engineer
Conduction (CON-01)	2019-10-30	23.2	46	Leo Cheng
Radiated (966A)	2019-11-12 - 2019-11-19	20.6-23	46-51	Leo Cheng
Conducted (TH-02)	2019-11-18 - 2019-11-19	21.9-22.2	59-60	Ethan Shao

1.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

☒ No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW3546. The Test Firm Registration No.: 181430.

2 System Test Configuration

2.1 Description of Test Configuration

The system was configured for testing in testing mode which was provided by manufacturer.

No special accessory, No modification was made to the EUT and No special equipment used during test.

For BT (BR/EDR), there are totally 79 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	39	2441
1	2403	--	--
2	2404	--	--
3	2405	76	2478
--	--	77	2479
38	2440	78	2480


For BLE: Channel 0, 39 and 78 were tested.

Worst Case of Power Setting				
EUT Exercise Software		Command		
Configuration	NTX	Low CH	Mid CH	High CH
BR-1Mbps mode	1	Default	Default	Default
EDR-2Mbps mode	1	Default	Default	Default
EDR-3Mbps mode	1	Default	Default	Default

2.2 Support Equipment List and Details

No.	Description	Manufacturer	Model Number
A	Monitor	DELL	P2415Qb
B	Monitor(Remote)	ViewSonic	VX2475Smhl-4K/VS16024
C	Keyboard	ASUS	AW211
D	Mouse	ASUS	MOBTU0A
E	Mouse (Remote)	Aibo	8733(KX5)
F	Laptop(Remote)	DELL	E6410
G	Laptop Adapter(Remote)	DELL	LA130PM121

2.3 Block Diagram of Test Setup

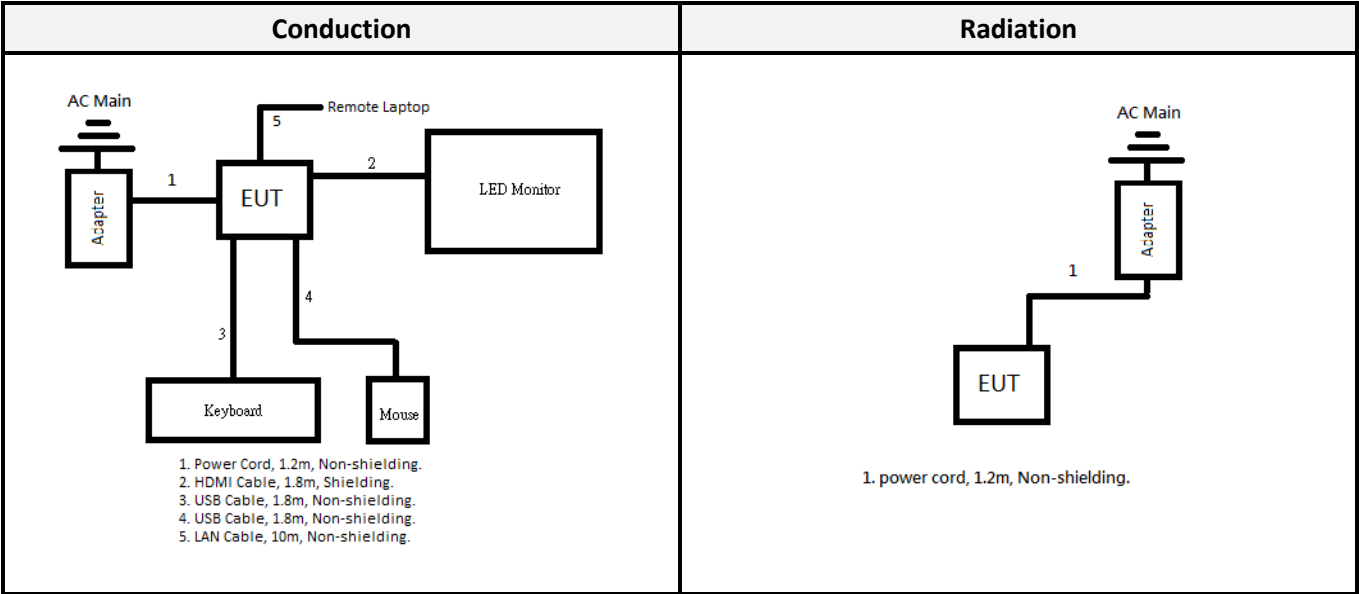

3 Summary of Test Results

FCC Rules	Description of Test	Result
§15.247(i), §1.1310, §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance

4 FCC§15.247(i), §1.1307, § 2.1091 – Maximum Permissible Exposure (MPE)

4.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary: Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

4.2 RF Exposure Evaluation Result

MPE Evaluation:

Mode	Frequency Range (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi 2.4G	2412-2462	2.00	1.5849	24.50	281.8383	20	0.0889	1.0
BLE	2402-2480	2.00	1.5849	8.00	6.3096	20	0.0020	1.0
BR+EDR	2402-2480	2.00	1.5849	3.00	1.9953	20	0.0006	1.0

Note: Wi-Fi and BT can't simultaneously.

Result: MPE evaluation of single and simultaneous transmission meet the requirement of standard.

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi

5.2 Antenna List and Details

Model	Antenna Type	Antenna Gain	Result
RFA-25-C52M3-B70	Dipole Antenna	2.00 dBi	Compliance

The EUT has an external dedicated antennas arrangement and the connector type is RP-SMA Male, fulfill the requirement of this section.

6 FCC §15.207 - AC Line Conducted Emissions

6.1 Applicable Standard


According to FCC §15.207,

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency. Note 2: A linear average detector is required

6.2 EUT Setup and Test Procedure

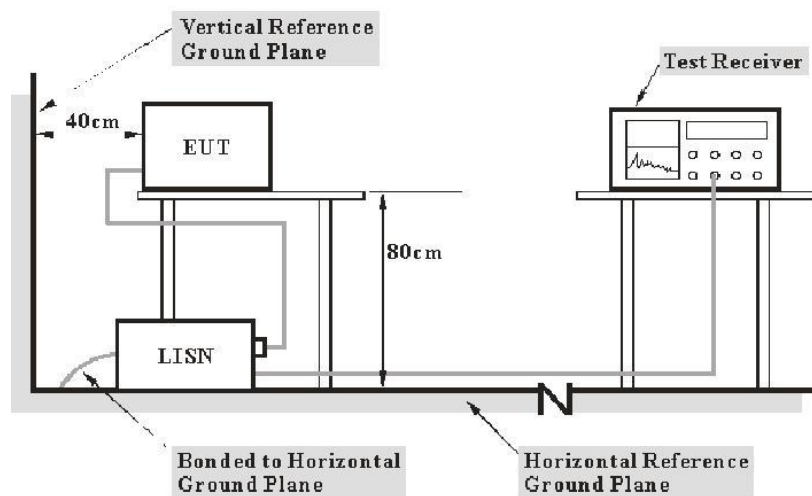

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz. During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	Receiver RBW
150 kHz - 30 MHz	9 kHz


During the conducted emission test, the adapter was connected to the outlet of the LISN. Maximizing procedure was performed on the six (6) highest emissions of the EUT. All data was recorded in the Quasi-peak and average detection mode.

6.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
AC Line Conduction Room (CON-01)					
Two-Line V-Network	Rohde & Schwarz	ENV216	100010	2019/09/02	2020/09/01
Pulse Limiter	SCHWARZBECK	VSTD 9561-F	00432	2019/08/28	2020/08/27
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2019/03/27	2020/03/26
RF Cable	EMCI	EMCCFD300-BM-BM-8000	180526	2019/08/08	2020/08/07
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

6.4 Test Result

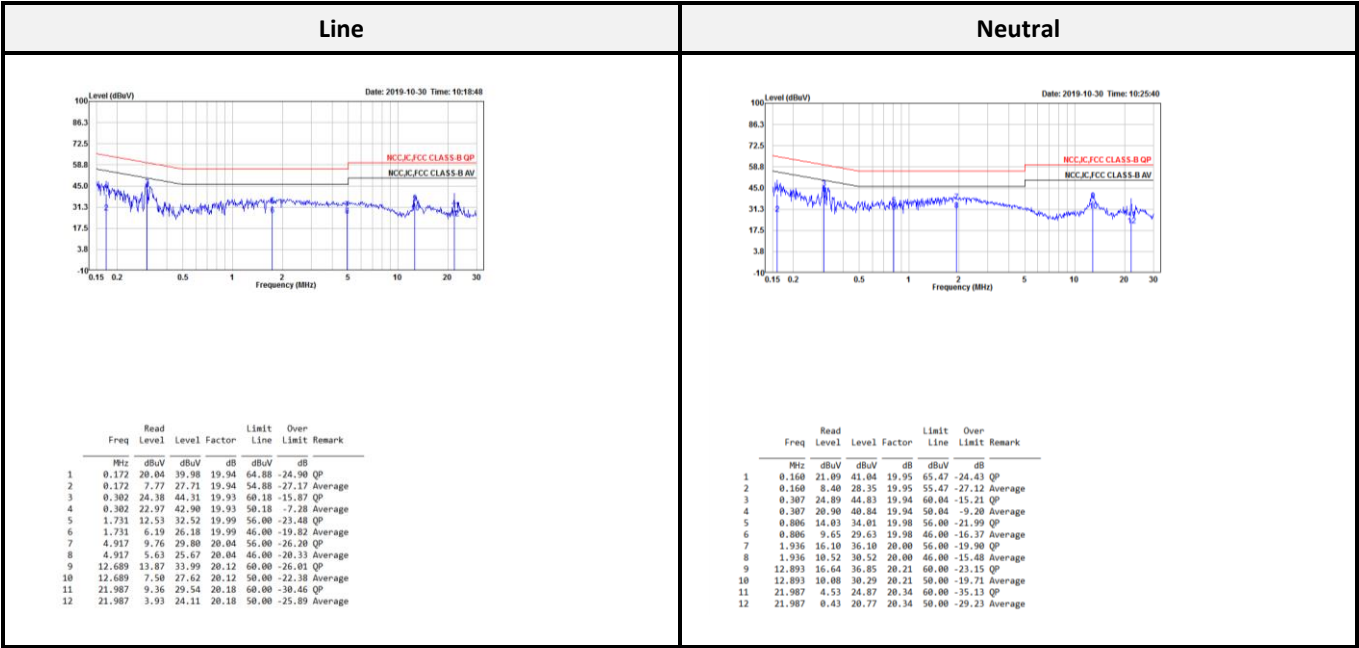

Note1: Transmit mode

Note2:

Level = Read Level + Factor

Over Limit (Margin) = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

7 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

7.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	4.5-5.15
0.495-0.505	16.42-16.423	608-614	5.35-5.46
2.1735-2.1905	16.69475-16.69525	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6



As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.2 EUT Setup and Test Procedure

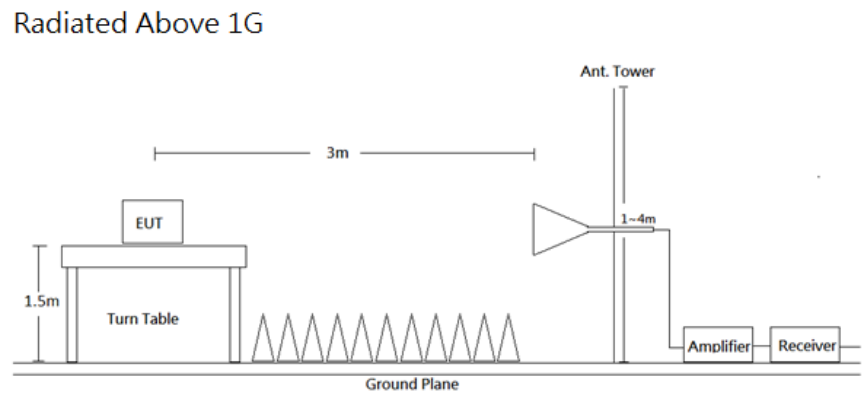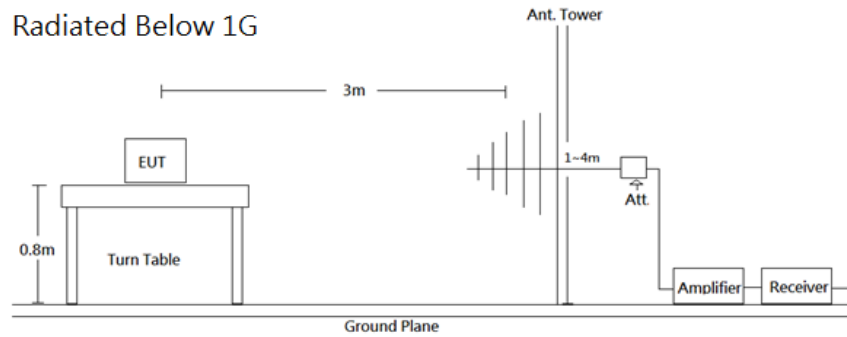

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	-	QP
Above 1 GHz	1 MHz	3 MHz	-	PK
	1 MHz	10 Hz	>98%	Ave

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations. All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

7.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Radiation 3M Room (966A)					
Active Loop	EMCO	6502	0001-3322	2019/03/15	2020/03/14
Bilog Antenna/6 dB Attenuator	SUNOL SCIENCES & EMEC /EMCI	JB3/N-6-06	A111513/AT-N0668	2019/03/29	2020/03/28
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2019/04/17	2020/04/16
Horn Antenna	ETS-Lindgren	3115	00109141	2019/07/05	2020/07/04
Horn Antenna	ETS-Lindgren	3160-09	00123852	2019/07/11	2020/07/10
Preamplifier	A.H. Systems	PAM-1840VH	174	2019/02/18	2020/02/17
Preamplifier	A.H. Systems	PAM-0118	478	2019/03/28	2020/03/27
Microflex Cable (1m)	EMCI	EMC106-SM-SM-2000	180515	2019/08/07	2020/08/06
Microflex Cable (2m)	MTJ	H0919	00000-MT28A-100	2019/08/07	2020/08/06
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-001	2019/08/07	2020/08/06
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

7.4 Test Result

Transmitting mode (Pre-scan with three orthogonal axis, and worse case as Y axis)

Below 1G (30 MHz-1 GHz) test the worst mode

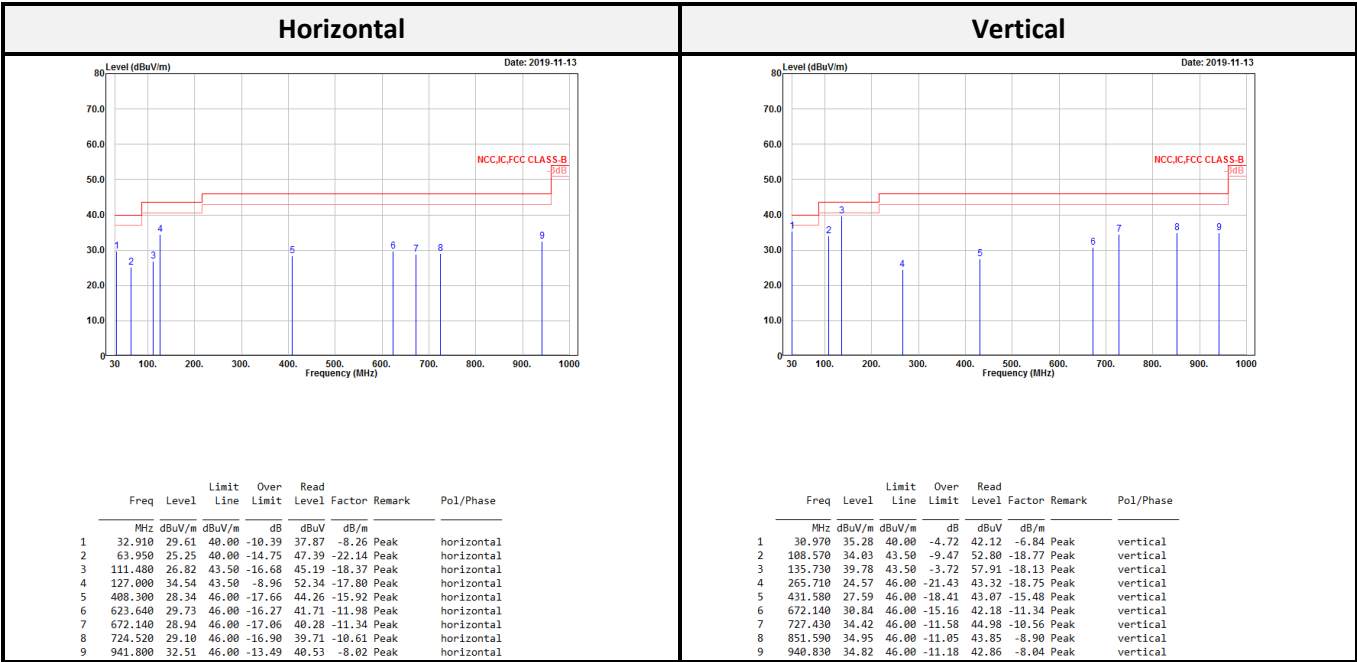

Level = Read Level + Factor

Over Limit = Level – Limit

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

Above 1G (1 GHz-26.5 GHz)**BR-1Mbps mode:**

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2313.100	30.83	54.00	-23.17	38.65	-7.82	Average	2339.500	30.86	54.00	-23.14	38.63	-7.77	Average
2313.100	45.91	74.00	-28.09	53.73	-7.82	Peak	2339.500	45.31	74.00	-28.69	53.08	-7.77	Peak
2402.200	77.29			84.91	-7.62	Average	2402.200	66.70			74.32	-7.62	Average
2402.200	90.42			98.04	-7.62	Peak	2402.200	77.15			84.77	-7.62	Peak
4804.000	43.05	74.00	-30.95	42.43	0.62	Peak	4804.000	30.26	54.00	-23.74	29.64	0.62	Average
4808.000	30.07	54.00	-23.93	29.45	0.62	Average	4804.000	43.96	74.00	-30.04	43.34	0.62	Peak
7206.000	33.12	54.00	-20.88	27.87	5.25	Average	7206.000	32.98	54.00	-21.02	27.73	5.25	Average
7206.000	46.31	74.00	-27.69	41.06	5.25	Peak	7206.000	45.95	74.00	-28.05	40.70	5.25	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2349.688	31.63	54.00	-22.37	39.36	-7.73	Average	2331.296	31.04	54.00	-22.96	38.84	-7.80	Average
2349.688	46.30	74.00	-27.70	54.03	-7.73	Peak	2331.296	44.87	74.00	-29.13	52.67	-7.80	Peak
2441.164	78.00			85.52	-7.52	Average	2441.164	69.01			76.53	-7.52	Average
2441.164	91.28			98.80	-7.52	Peak	2441.164	80.00			87.52	-7.52	Peak
2523.928	31.89	54.00	-22.11	39.14	-7.25	Average	2535.060	31.49	54.00	-22.51	38.69	-7.20	Average
2523.928	45.37	74.00	-28.63	52.62	-7.25	Peak	2535.060	45.86	74.00	-28.14	53.06	-7.20	Peak
4882.000	30.37	54.00	-23.63	29.55	0.82	Average	4882.000	30.12	54.00	-23.88	29.32	0.80	Average
4882.000	43.95	74.00	-30.05	43.15	0.80	Peak	4882.000	44.15	74.00	-29.85	43.35	0.80	Peak
7323.000	33.50	54.00	-20.50	27.78	5.72	Average	7323.000	33.56	54.00	-20.44	27.84	5.72	Average
7323.000	47.06	74.00	-26.94	41.34	5.72	Peak	7323.000	46.98	74.00	-27.02	41.26	5.72	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2479.922	79.52			86.87	-7.35	Average	2480.168	67.90			75.25	-7.35	Average
2479.922	92.99			100.34	-7.35	Peak	2480.168	78.57			85.92	-7.35	Peak
2538.798	31.67	54.00	-22.33	38.86	-7.19	Average	2532.976	31.42	54.00	-22.58	38.64	-7.22	Average
2538.798	46.17	74.00	-27.83	53.36	-7.19	Peak	2532.976	45.83	74.00	-28.17	53.05	-7.22	Peak
4960.000	30.41	54.00	-23.59	29.59	0.82	Average	4960.000	30.34	54.00	-23.66	29.52	0.82	Average
4960.000	43.95	74.00	-30.05	43.13	0.82	Peak	4960.000	44.10	74.00	-29.90	43.28	0.82	Peak
7440.000	34.10	54.00	-19.90	28.04	6.06	Average	7440.000	34.25	54.00	-19.75	28.19	6.06	Average
7440.000	46.89	74.00	-27.11	40.83	6.06	Peak	7440.000	47.23	74.00	-26.77	41.17	6.06	Peak

EDR-2Mbps mode:

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2324.600	30.68	54.00	-23.32	38.49	-7.81	Average	2334.000	30.97	54.00	-23.03	38.75	-7.78	Average
2324.600	45.54	74.00	-28.46	53.35	-7.81	Peak	2334.000	46.91	74.00	-27.09	54.69	-7.78	Peak
2401.900	72.48			80.10	-7.62	Average	2402.200	63.01			70.63	-7.62	Average
2401.900	87.74			95.36	-7.62	Peak	2402.200	75.80			83.42	-7.62	Peak
4804.000	30.16	54.00	-23.84	29.54	0.62	Average	4804.000	30.26	54.00	-23.74	29.64	0.62	Average
4804.000	42.99	74.00	-31.01	42.37	0.62	Peak	4804.000	44.52	74.00	-29.48	43.90	0.62	Peak
7206.000	32.93	54.00	-21.07	27.68	5.25	Average	7206.000	33.02	54.00	-20.98	27.77	5.25	Average
7206.000	45.94	74.00	-28.06	40.69	5.25	Peak	7206.000	46.18	74.00	-27.82	40.93	5.25	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2347.994	30.80	54.00	-23.20	38.54	-7.74	Average	2327.182	30.76	54.00	-23.24	38.57	-7.81	Average
2347.994	44.54	74.00	-29.46	52.28	-7.74	Peak	2327.182	45.19	74.00	-28.81	53.00	-7.81	Peak
2440.922	74.35			81.87	-7.52	Average	2440.922	65.72			73.24	-7.52	Average
2440.922	90.06			97.58	-7.52	Peak	2440.922	79.16			86.68	-7.52	Peak
2504.568	31.34	54.00	-22.66	38.64	-7.30	Average	2545.708	31.36	54.00	-22.64	38.51	-7.15	Average
2504.568	45.68	74.00	-28.32	52.98	-7.30	Peak	2545.708	45.69	74.00	-28.31	52.84	-7.15	Peak
4882.000	30.42	54.00	-23.58	29.62	0.80	Average	4882.000	30.34	54.00	-23.66	29.54	0.80	Average
4882.000	43.23	74.00	-30.77	42.43	0.80	Peak	4882.000	43.95	74.00	-30.05	43.15	0.80	Peak
7323.000	33.50	54.00	-20.50	27.78	5.72	Average	7323.000	35.61	54.00	-18.39	29.89	5.72	Average
7323.000	46.85	74.00	-27.15	41.13	5.72	Peak	7323.000	46.51	74.00	-27.49	40.79	5.72	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2479.840	74.45			81.80	-7.35	Average	2479.840	65.37			72.72	-7.35	Average
2479.840	90.19			97.54	-7.35	Peak	2479.840	78.63			85.98	-7.35	Peak
2519.364	31.55	54.00	-22.45	38.81	-7.26	Average	2498.700	31.28	54.00	-22.72	38.60	-7.32	Average
2519.364	46.35	74.00	-27.65	53.61	-7.26	Peak	2498.700	45.64	74.00	-28.36	52.96	-7.32	Peak
4960.000	29.85	54.00	-24.15	29.03	0.82	Average	4960.000	30.66	54.00	-23.34	29.84	0.82	Average
4960.000	43.74	74.00	-30.26	42.93	0.81	Peak	4960.000	44.19	74.00	-29.81	43.37	0.82	Peak
7440.000	34.25	54.00	-19.75	28.19	6.06	Average	7440.000	34.06	54.00	-19.94	28.00	6.06	Average
7440.000	47.25	74.00	-26.75	41.19	6.06	Peak	7440.000	46.91	74.00	-27.09	40.85	6.06	Peak


EDR-3Mbps mode (8-DPSK):

Low CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2326.300	30.73	54.00	-23.27	38.54	-7.81	Average	2371.300	30.83	54.00	-23.17	38.51	-7.68	Average
2326.300	45.08	74.00	-28.92	52.89	-7.81	Peak	2371.300	45.46	74.00	-28.54	53.14	-7.68	Peak
2402.100	72.48			80.10	-7.62	Average	2402.100	64.53			72.15	-7.62	Average
2402.100	88.12			95.74	-7.62	Peak	2402.100	78.08			85.70	-7.62	Peak
4804.000	30.35	54.00	-23.65	29.73	0.62	Average	4804.000	30.39	54.00	-23.61	29.77	0.62	Average
4804.000	43.77	74.00	-30.23	43.15	0.62	Peak	4804.000	43.52	74.00	-30.48	42.90	0.62	Peak
7206.000	33.11	54.00	-20.89	27.86	5.25	Average	7206.000	32.96	54.00	-21.04	27.71	5.25	Average
7206.000	46.13	74.00	-27.87	40.88	5.25	Peak	7206.000	45.44	74.00	-28.56	40.19	5.25	Peak

Middle CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2373.888	30.81	54.00	-23.19	38.47	-7.66	Average	2346.542	31.23	54.00	-22.77	38.98	-7.75	Average
2373.888	45.05	74.00	-28.95	52.71	-7.66	Peak	2346.542	44.83	74.00	-29.17	52.58	-7.75	Peak
2441.164	74.03			81.55	-7.52	Average	2441.164	64.24			71.76	-7.52	Average
2441.164	89.84			97.36	-7.52	Peak	2441.164	77.69			85.21	-7.52	Peak
2494.888	31.30	54.00	-22.70	38.63	-7.33	Average	2532.156	31.51	54.00	-22.49	38.73	-7.22	Average
2494.888	45.41	74.00	-28.59	52.74	-7.33	Peak	2532.156	45.77	74.00	-28.23	52.99	-7.22	Peak
4882.000	30.45	54.00	-23.55	29.65	0.80	Average	4882.000	30.68	54.00	-23.32	29.88	0.80	Average
4882.000	43.71	74.00	-30.29	42.91	0.80	Peak	4882.000	44.60	74.00	-29.40	43.80	0.80	Peak
7323.000	33.65	54.00	-20.35	27.93	5.72	Average	7323.000	33.75	54.00	-20.25	28.03	5.72	Average
7323.000	47.14	74.00	-26.86	41.42	5.72	Peak	7323.000	46.70	74.00	-27.30	40.98	5.72	Peak

High CH													
Horizontal							Vertical						
Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark	Freq	Level	Limit Line	Over Limit	Read Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
2480.004	74.62			81.97	-7.35	Average	2480.004	65.45			72.80	-7.35	Average
2480.004	90.75			98.10	-7.35	Peak	2480.004	79.25			86.60	-7.35	Peak
2516.084	31.36	54.00	-22.64	38.63	-7.27	Average	2485.826	31.40	54.00	-22.60	38.74	-7.34	Average
2516.084	45.64	74.00	-28.36	52.91	-7.27	Peak	2485.826	45.87	74.00	-28.13	53.21	-7.34	Peak
4960.000	30.51	54.00	-23.49	29.69	0.82	Average	4960.000	30.46	54.00	-23.54	29.64	0.82	Average
4960.000	43.27	74.00	-30.73	42.45	0.82	Peak	4960.000	43.98	74.00	-30.02	43.16	0.82	Peak
7440.000	34.29	54.00	-19.71	28.23	6.06	Average	7440.000	34.05	54.00	-19.95	27.99	6.06	Average
7440.000	46.82	74.00	-27.18	40.76	6.06	Peak	7440.000	47.32	74.00	-26.68	41.26	6.06	Peak

Above 1G (1 GHz-26.5 GHz): The worst mode

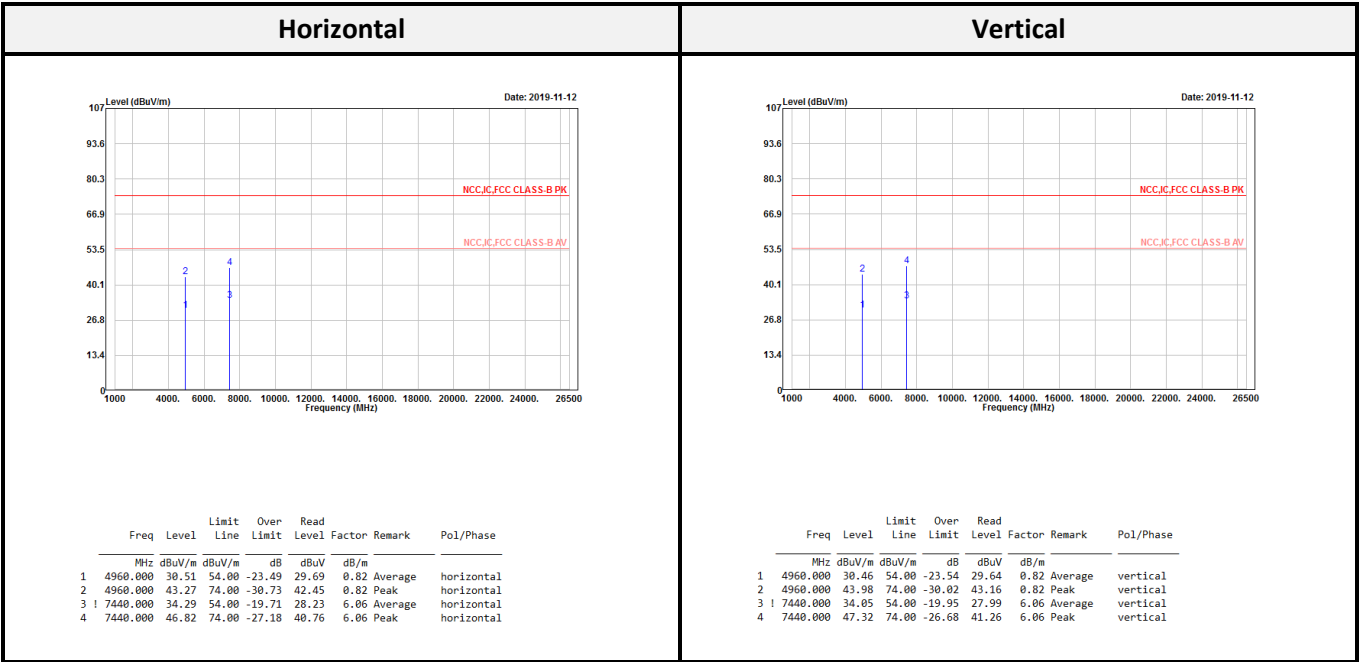

$Level = Read\ Level + Factor$

$Over\ Limit = Level - Limit$


$Correct\ Factor = Antenna\ Factor + Cable\ Loss - Amplifier\ Gain$

Spurious emissions more than 20 dB below the limit were not reported


Conducted Spurious Emissions:

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BR-1Mbps mode				
Low	2402	51.32	≥ 20	Compliance
Mid	2441	52.27	≥ 20	Compliance
High	2480	49.53	≥ 20	Compliance
EDR-2Mbps mode				
Low	2402	45.28	≥ 20	Compliance
Mid	2441	46.09	≥ 20	Compliance
High	2480	46.94	≥ 20	Compliance
EDR-3Mbps mode				
Low	2402	44.19	≥ 20	Compliance
Mid	2441	47.57	≥ 20	Compliance
High	2480	47.79	≥ 20	Compliance


BR-1Mbps mode:

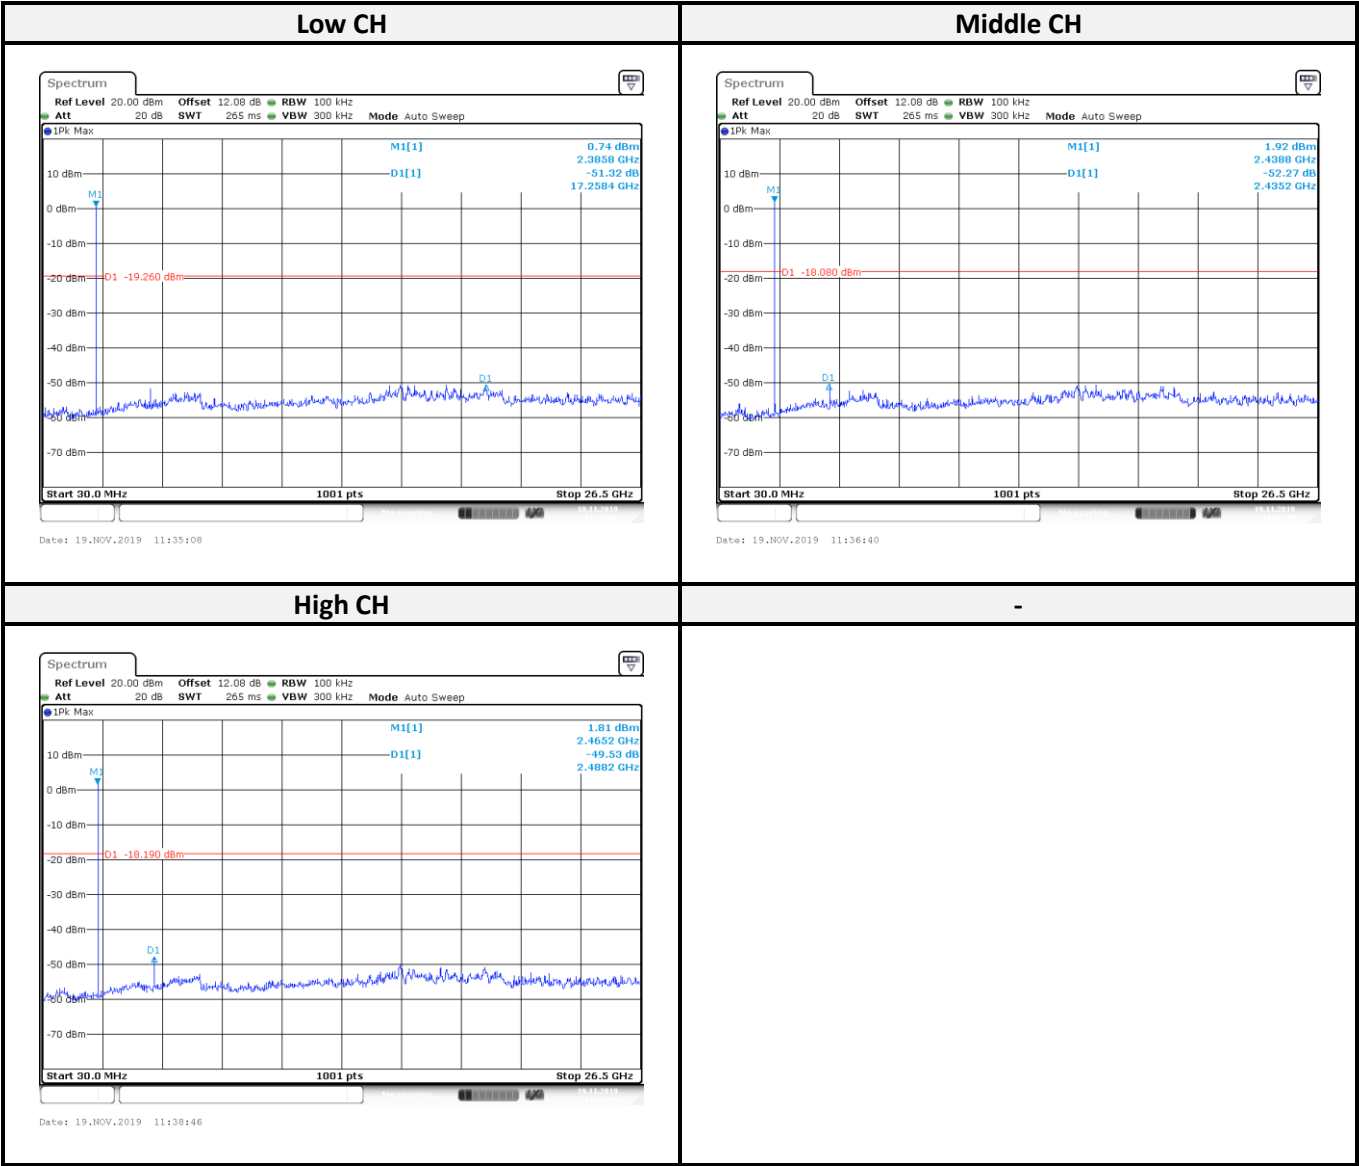

EDR-2Mbps mode:

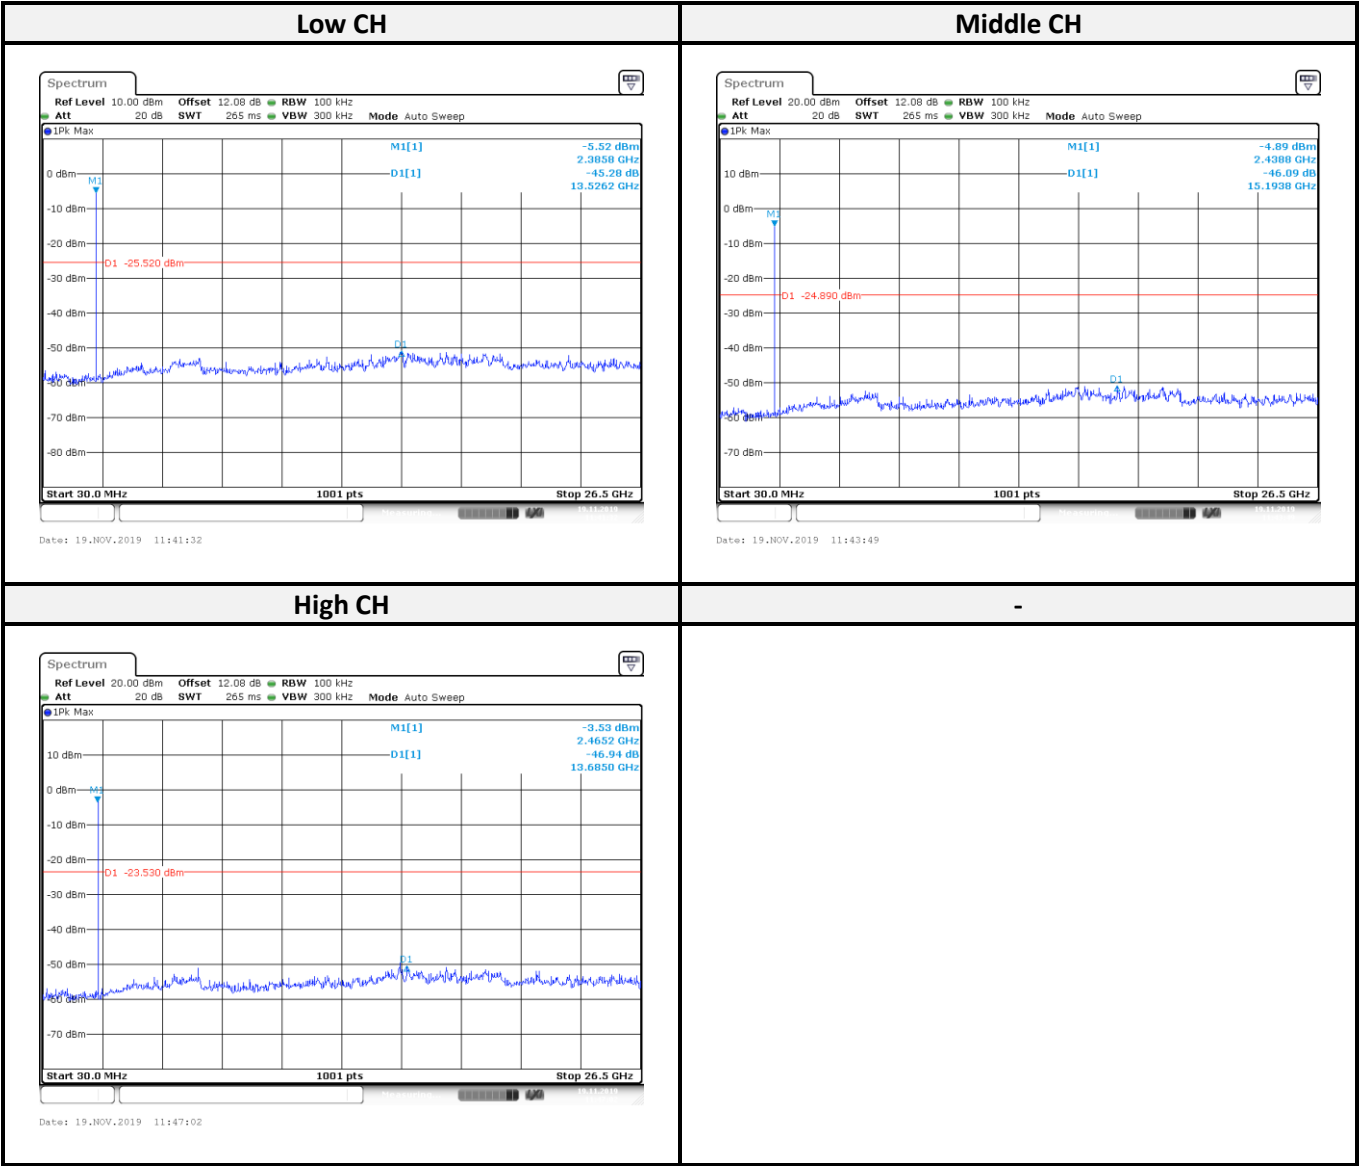

EDR-3Mbps mode:

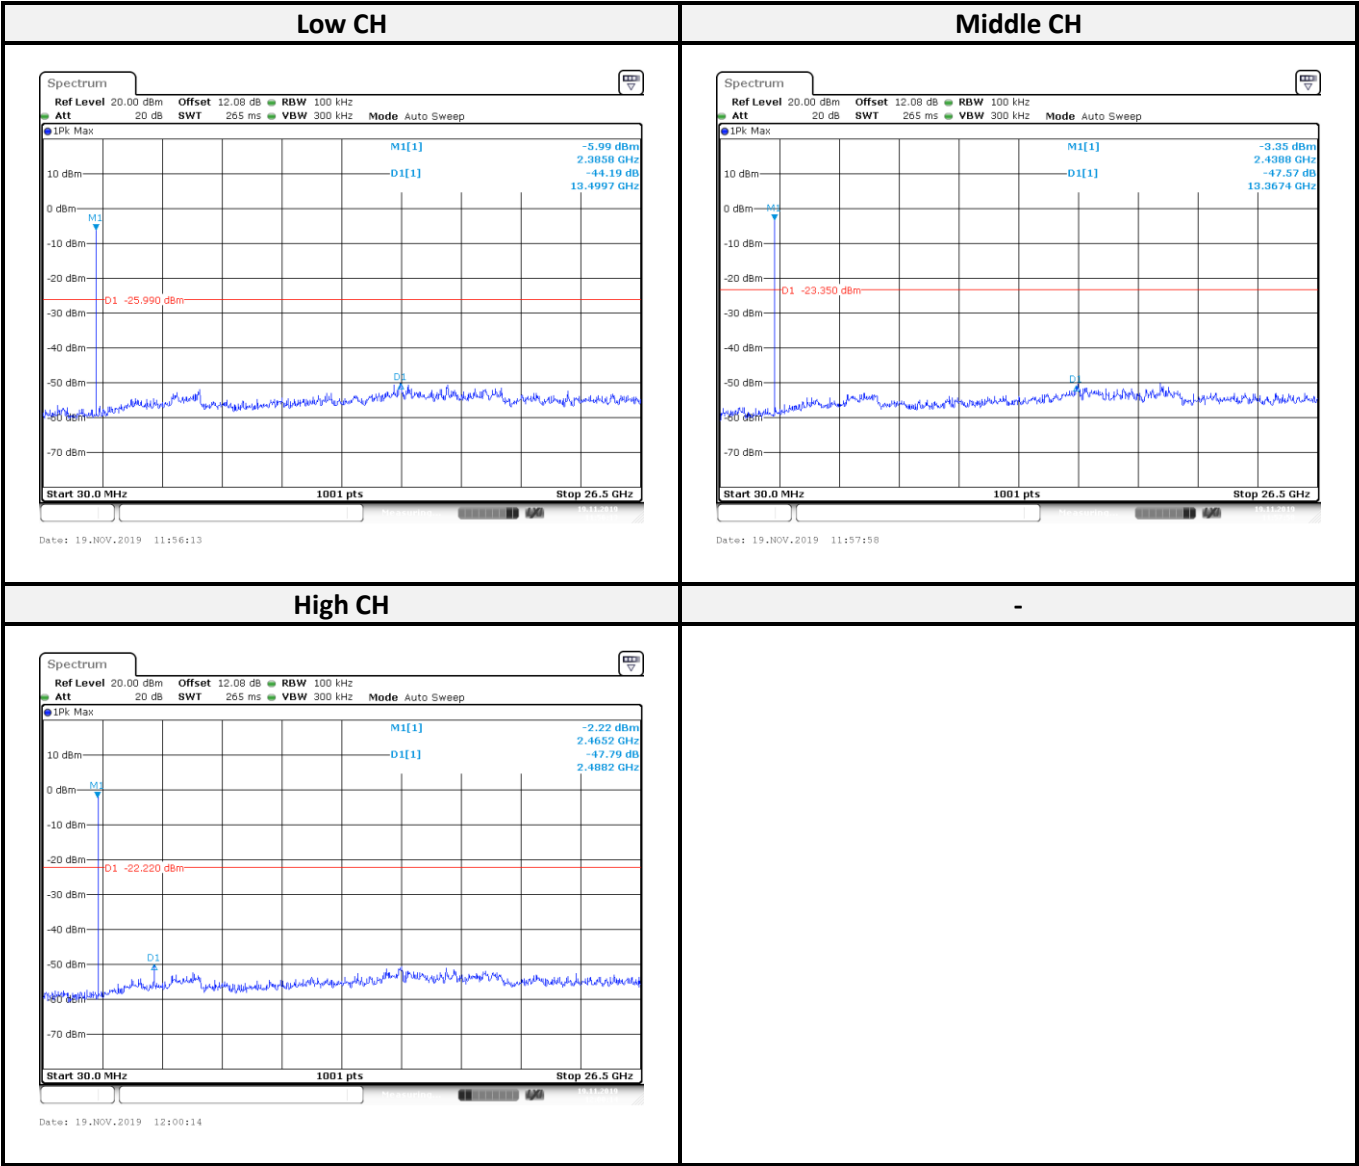

8 FCC §15.247(a)(1) – 20 dB Emission Bandwidth

8.1 Applicable Standard

According to FCC §15.247(a) (1) the maximum 20 dB bandwidth of the hopping channel shall be presented.

8.2 Test Procedure

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

8.3 Test Equipment List and Details


Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).


8.4 Test Results

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BR-1Mbps Mode (GFSK)		
Low	2402	1.03
Middle	2441	1.03
High	2480	1.03
EDR-2Mbps Mode ($\pi/4$-DQPSK)		
Low	2402	1.35
Middle	2441	1.35
High	2480	1.35
EDR-3Mbps Mode (8DPSK)		
Low	2402	1.33
Middle	2441	1.33
High	2480	1.33


BR-1Mbps mode:

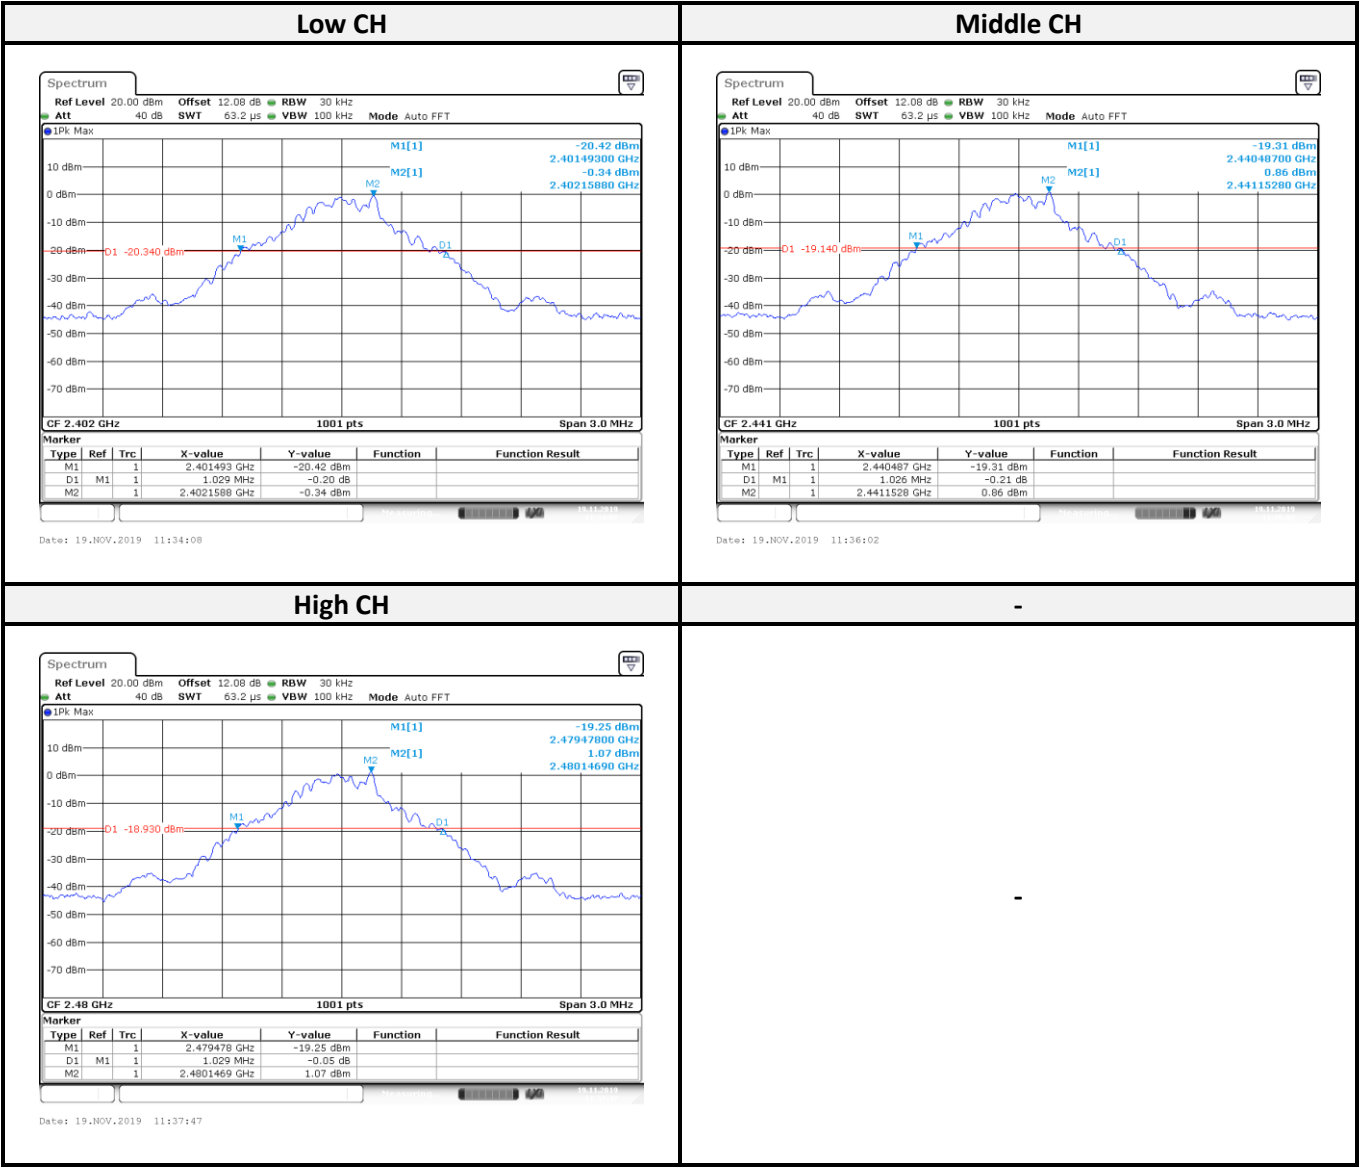

EDR-2Mbps Mode:

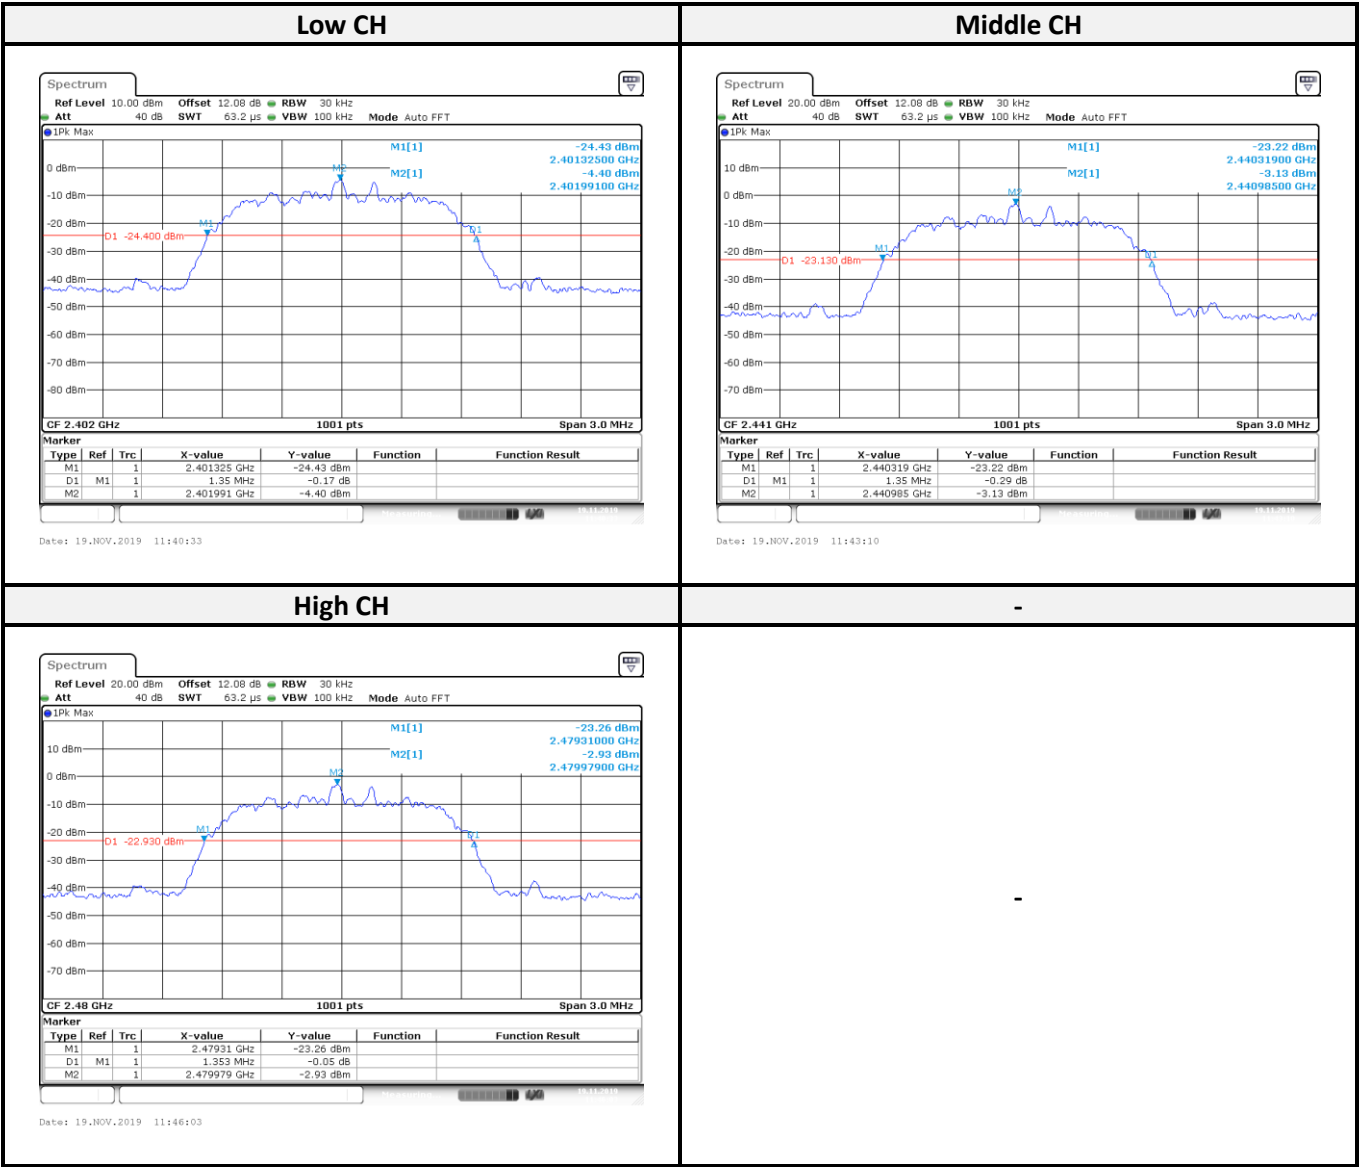

EDR-3Mbps Mode:

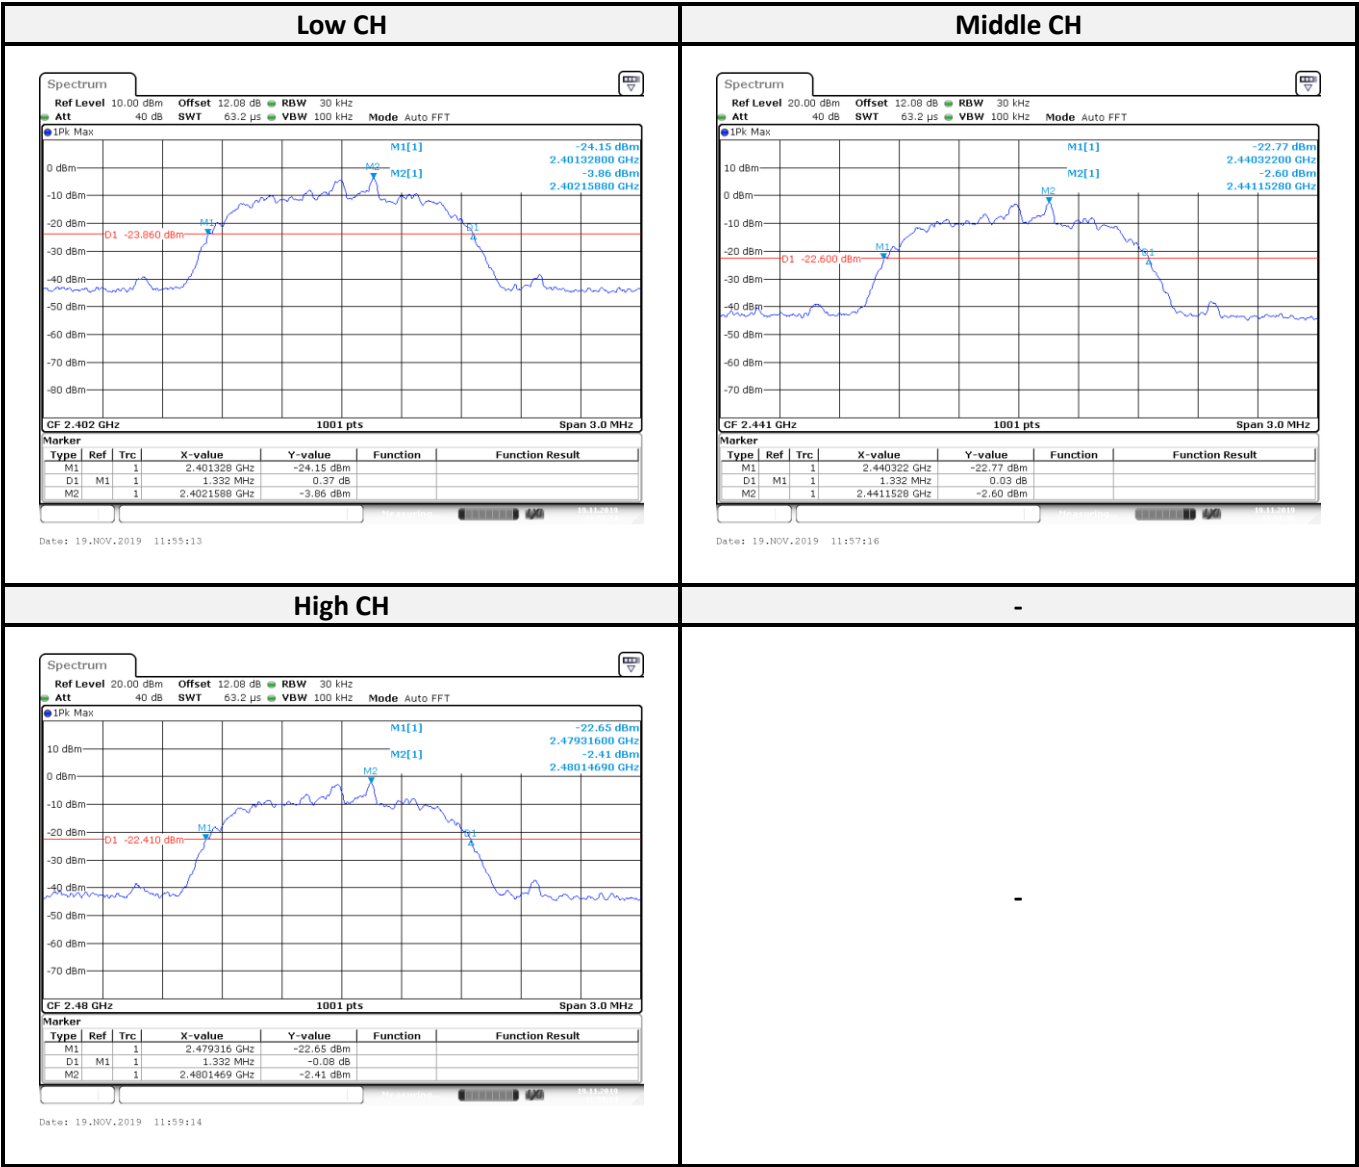

9 FCC §15.247(a)(1) – Channel Separation Test

9.1 Applicable Standard

According to FCC §15.247(a) (1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

9.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\approx$ 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel. Video (or Average) Bandwidth (VBW) $\geq$ RBW. Sweep = auto

Detector function = peak Trace = max hold

9.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27


***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

9.4 Test Results


Channel	Frequency (MHz)	Channel Separation (MHz)	20 dBc BW (MHz)	Limit (MHz)	Result
BR-1Mbps mode					
Low	2402	1.00	1.03	0.686	Compliance
Middle	2441	1.00	1.03	0.684	Compliance
High	2480	1.00	1.03	0.686	Compliance
EDR-2Mbps mode					
Low	2402	1.00	1.35	0.900	Compliance
Middle	2441	1.00	1.35	0.900	Compliance
High	2480	1.00	1.35	0.902	Compliance
EDR-3Mbps mode					
Low	2402	1.00	1.33	0.888	Compliance
Middle	2441	1.00	1.33	0.888	Compliance
High	2480	1.00	1.33	0.888	Compliance

**Note: Limit = Two-thirds of the 20 dB bandwidth*


BR-1Mbps mode:

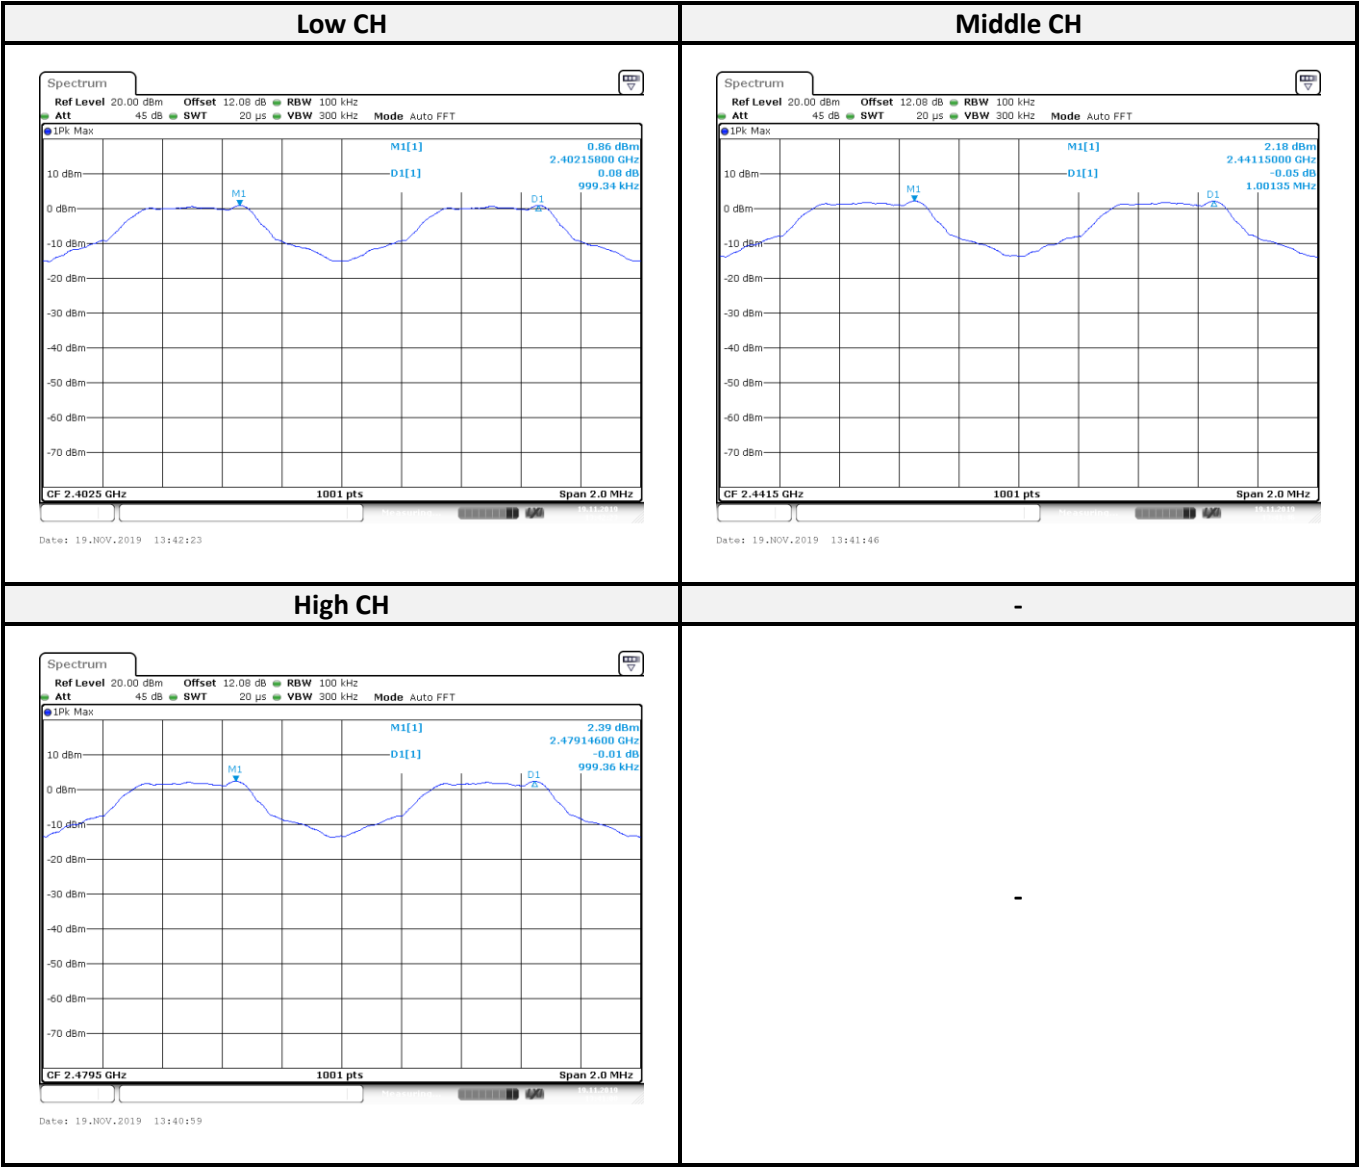

EDR-2Mbps mode:

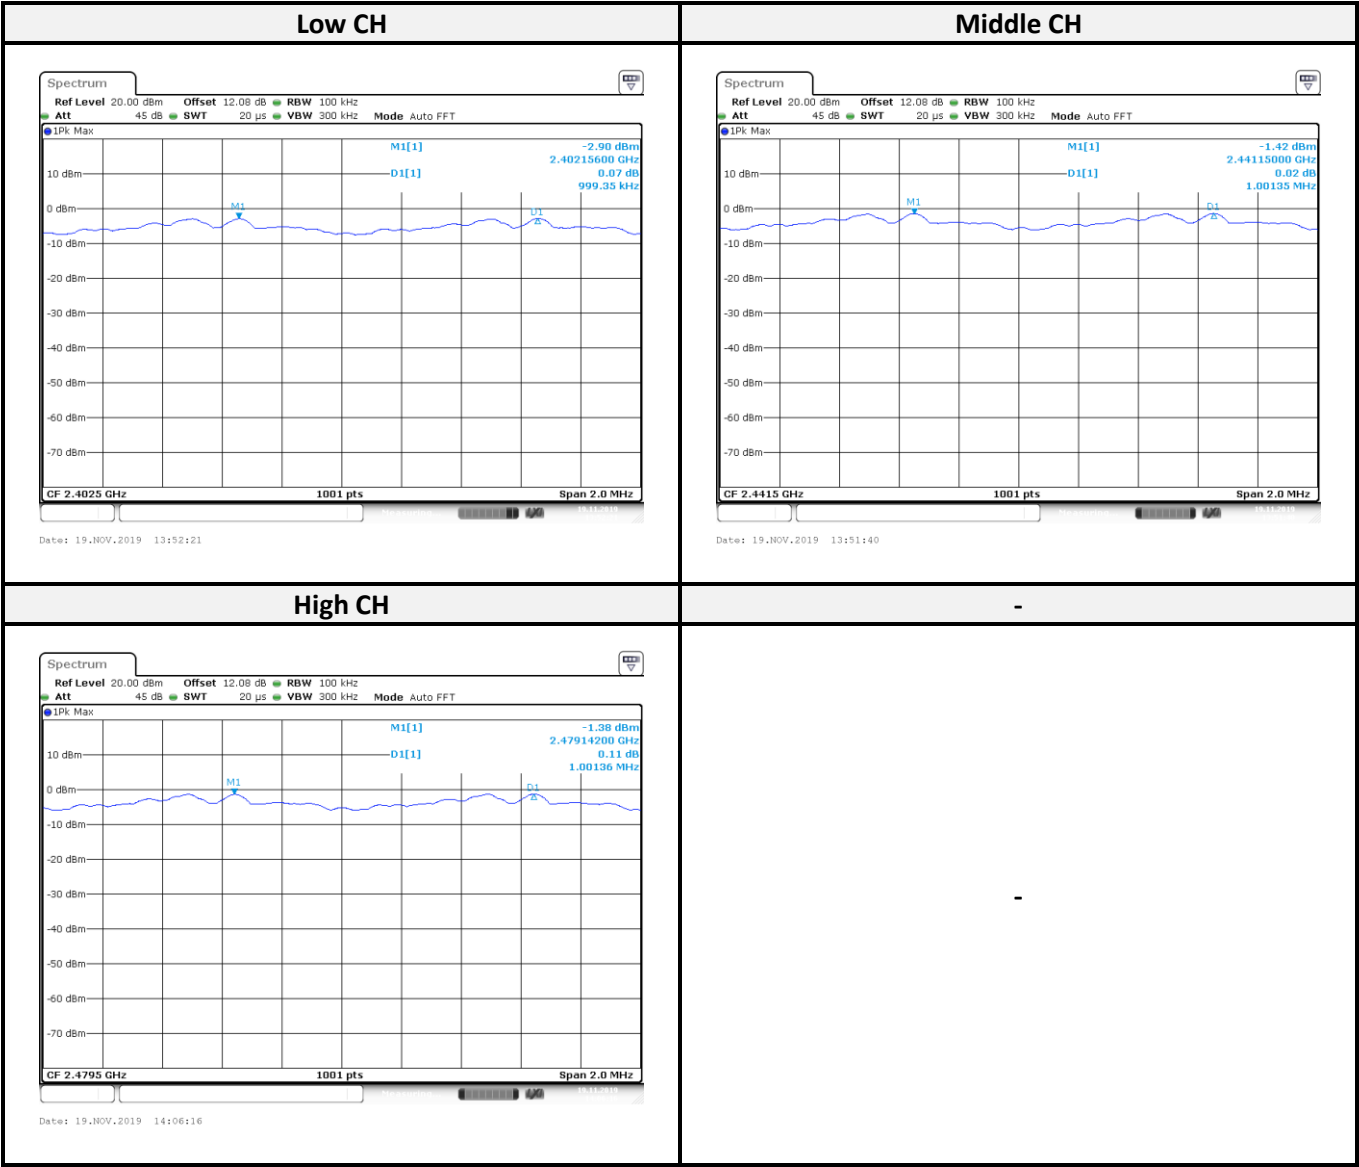

EDR-3Mbps mode:

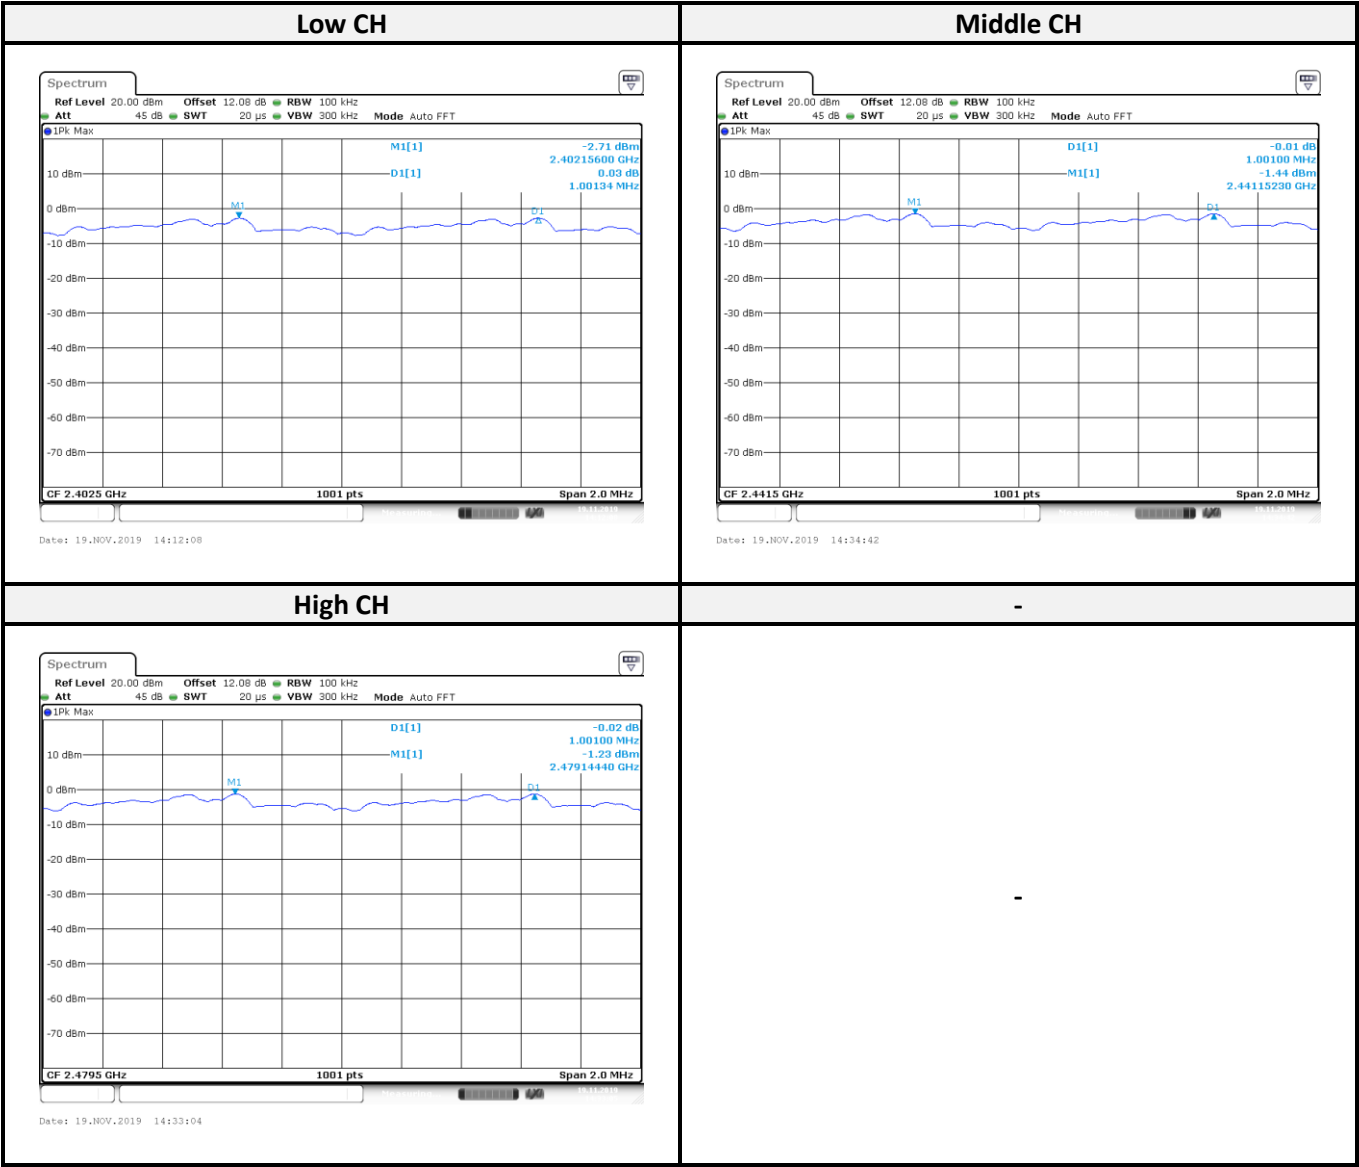

10 FCC §15.247(a)(1)(iii) – Time of Occupancy (Dwell Time)

10.1 Applicable Standard

According to FCC §15.247(a)(1)(iii),

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel

RBW $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements.

Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

(Number of hops in the period specified in the requirements) = (number of hops on spectrum analyzer) x (period specified in the requirements / analyzer sweep time)

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

10.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

10.4 Test Results


Modulation Mode	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec]	Dwell Time Limits (s)
		(s)	(s)	
BR-1Mbps mode (GFSK)	2.96	106.7	0.315	0.4
EDR-2Mbps mode ($\pi/4$ -DQPSK)	2.96	106.7	0.315	0.4
EDR-3Mbps mode (8DPSK)	2.99	106.7	0.318	0.4

*Number of Pulse in [0.4 x N sec] = $1600/79/6 \times (0.4 \times 79)$


*Dwell Time in [0.4 x N sec] = (Pulse Time * Number of Pulse in [0.4 x N sec])/1000

* Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.


DH5

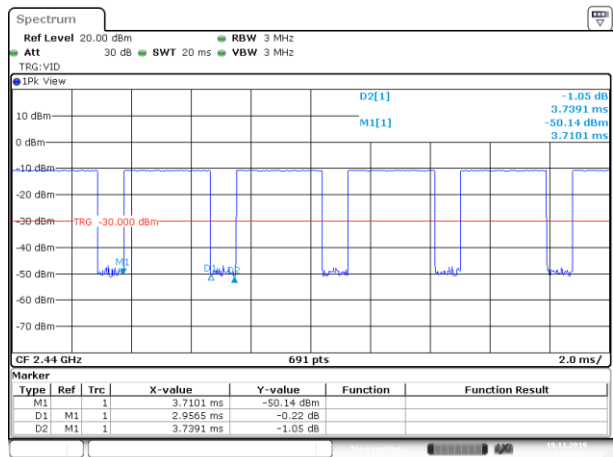

2-DH5

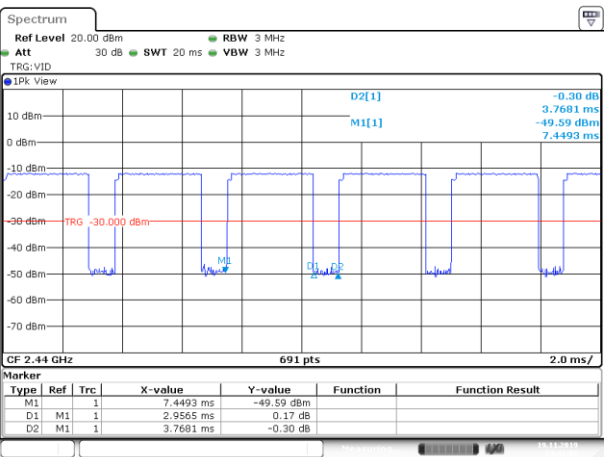

3-DH5

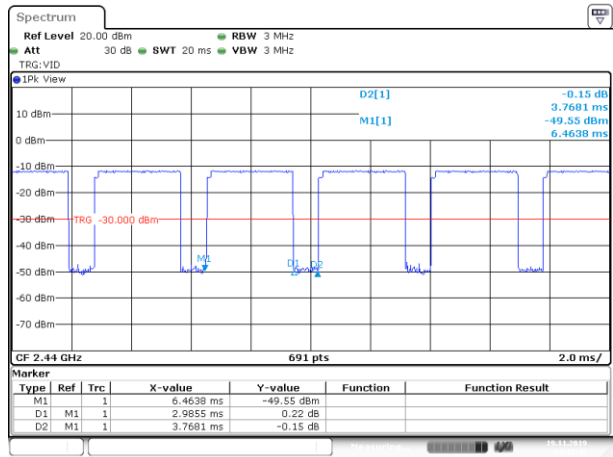

-

-

11 FCC §15.247(a)(1)(iii) –Quantity of hopping channel Test

11.1 Applicable Standard

According to FCC §15.247(a)(1)(iii),

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Test Procedure

Span = the frequency band of operation.

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller VBW ≥ RBW.

Sweep = auto. Detector function = peak Trace = max hold.


11.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

11.4 Test Results

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit (CH)	Result
BR-1Mbps mode	2402-2480	79	>15	Compliance
EDR-2Mbps mode	2402-2480	79	>15	Compliance
EDR-3Mbps mode	2402-2480	79	>15	Compliance

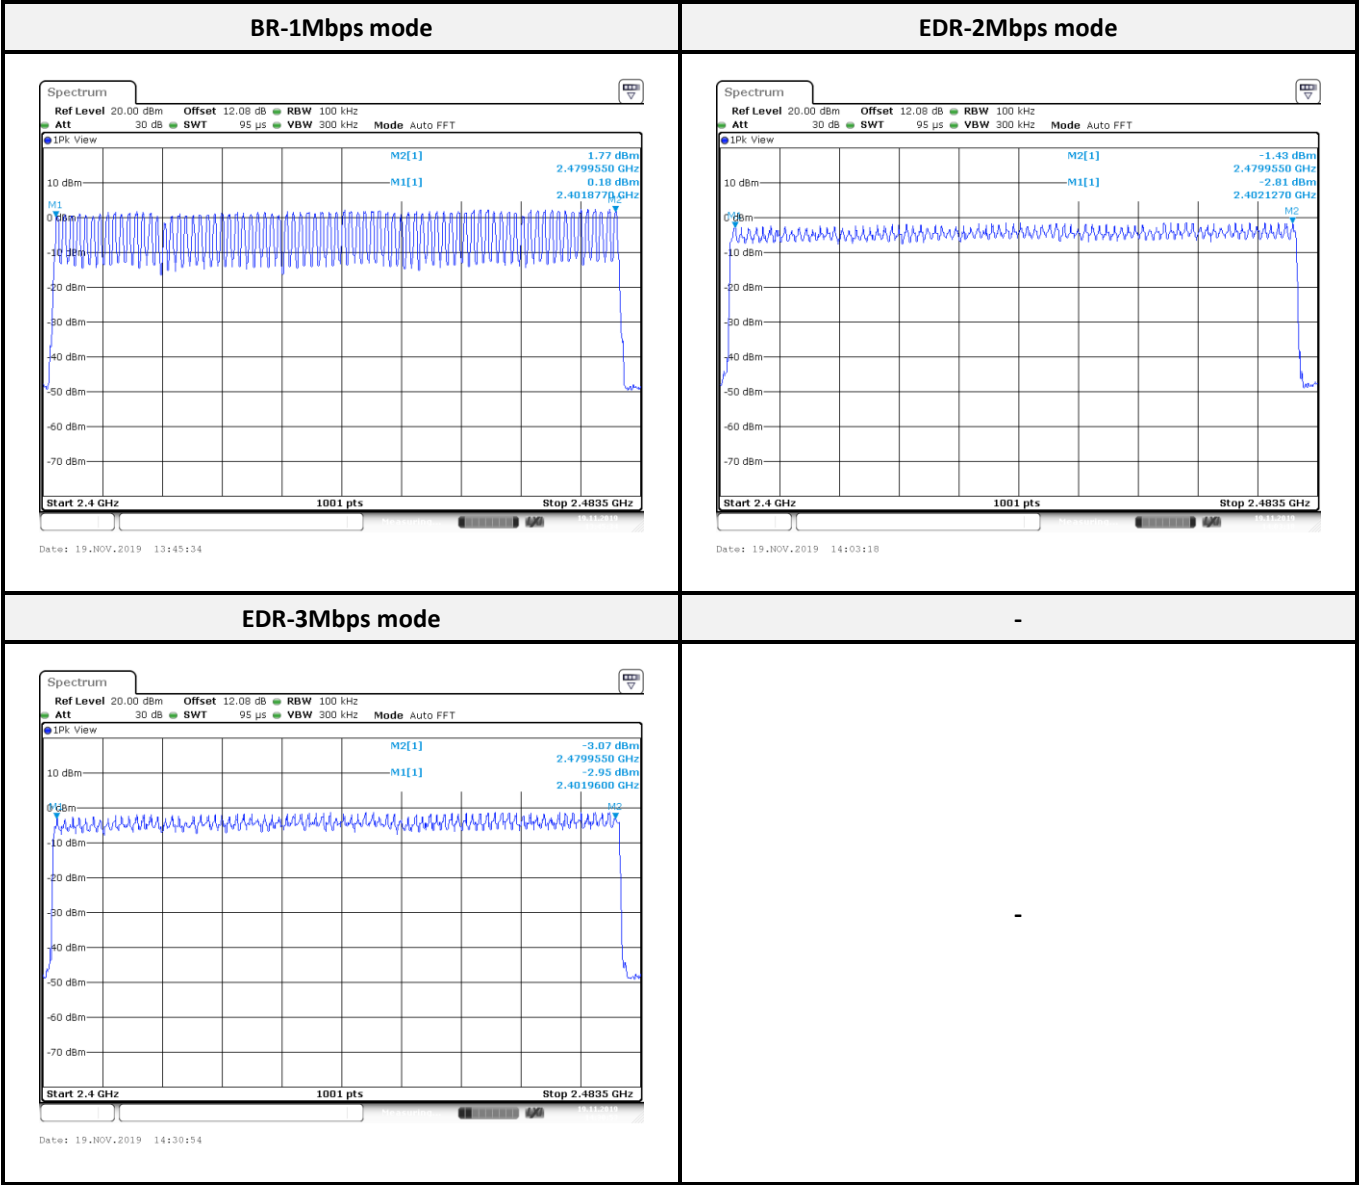

12 FCC §15.247(b)(1) – Maximum Output Power

12.1 Applicable Standard

According to FCC §15.247(b) (1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

12.2 Test Procedure

Place the EUT on a bench and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Power sensor.

12.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
USB Wideband Power Sensor	Agilent	U2021XA	MY54250014	2018/11/22	2019/11/21
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

12.4 Test Results

Channel	Frequency (MHz)	Maximum Peak Output Power (dBm)	Maximum Peak Output Power (W)	Limit (dBm)	Result
BR-1Mbps mode					
Low	2402	1.70	0.0014	21	Compliance
Middle	2441	2.87	0.0019	21	Compliance
High	2480	2.80	0.0019	21	Compliance
EDR-2Mbps mode					
Low	2402	0.66	0.0011	21	Compliance
Middle	2441	1.90	0.0015	21	Compliance
High	2480	2.06	0.0016	21	Compliance
EDR-3Mbps mode					
Low	2402	0.90	0.0012	21	Compliance
Middle	2441	2.19	0.0016	21	Compliance
High	2480	2.36	0.0017	21	Compliance

13 FCC §15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

13.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c)

13.2 Test Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW = 100 kHz VBW = 300 kHz.

Sweep = coupled. Detector function = peak Trace = max hold.

13.3 Test Equipment List and Details

Description	Manufacture	Model	Serial No.	Cal. Date.	Cal. Due.
Conducted Room(TH-02)					
Spectrum Analyzer	Rohde & Schwarz	FSU26	100406	2019/03/19	2020/03/18
Cable	MTJ	MT40S	620620-MT40S-100	2018/12/28	2019/12/27

***Statement of Traceability:** The testing equipment's listed above have finished the calibration by Electronics Testing Center, Taiwan (ETC) or other laboratories which were accredited by TAF or equivalent organizations. The calibration result could be traceable to the International System of Units (SI).

13.4 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BR-1Mbps mode				
Low	2402	58.16	≥ 20	Compliance
High	2480	60.55	≥ 20	Compliance
BR-1Mbps Hopping mode				
Low	2402	57.15	≥ 20	Compliance
High	2480	59.26	≥ 20	Compliance
EDR-2Mbps mode				
Low	2402	54.82	≥ 20	Compliance
High	2480	56.75	≥ 20	Compliance
EDR-2Mbps Hopping mode				
Low	2402	54.88	≥ 20	Compliance
High	2480	56.14	≥ 20	Compliance
EDR-3Mbps mode				
Low	2402	54.64	≥ 20	Compliance
High	2480	55.78	≥ 20	Compliance
EDR-3Mbps Hopping mode				
Low	2402	54.35	≥ 20	Compliance
High	2480	55.45	≥ 20	Compliance

Left Side




Date: 19.NOV.2019 11:38:25

Left Side




Date: 19.NOV.2019 13:40:16


EDR-2Mbps mode:

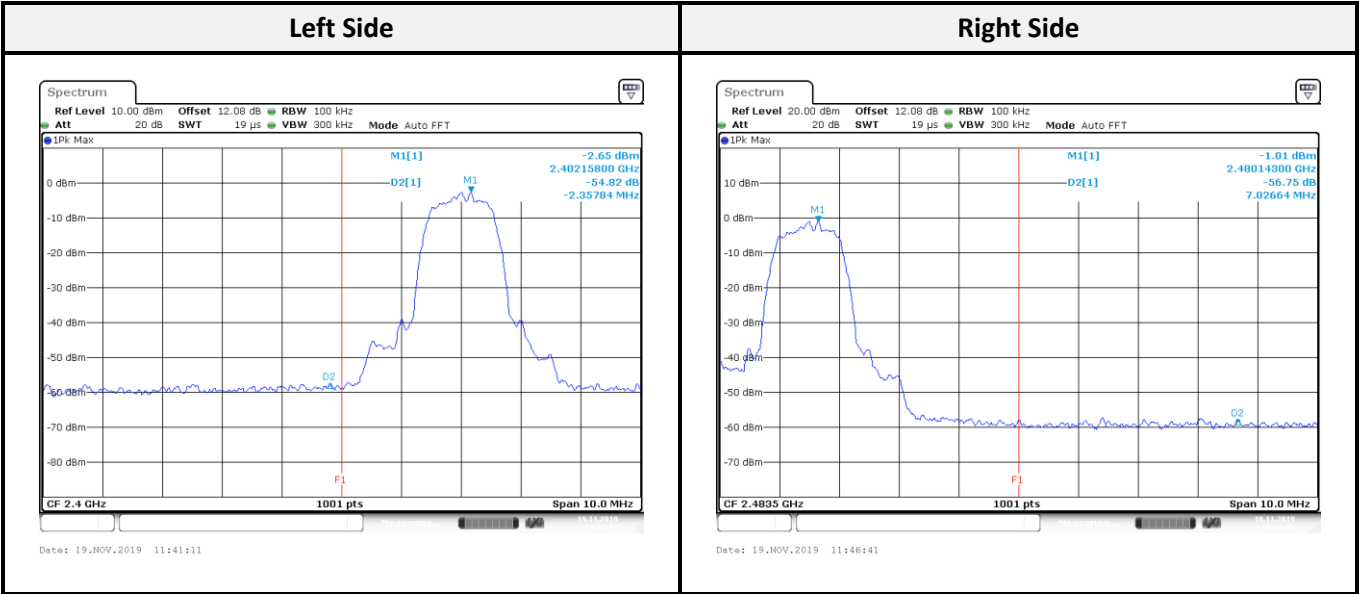


EDR-2Mbps Hopping mode:

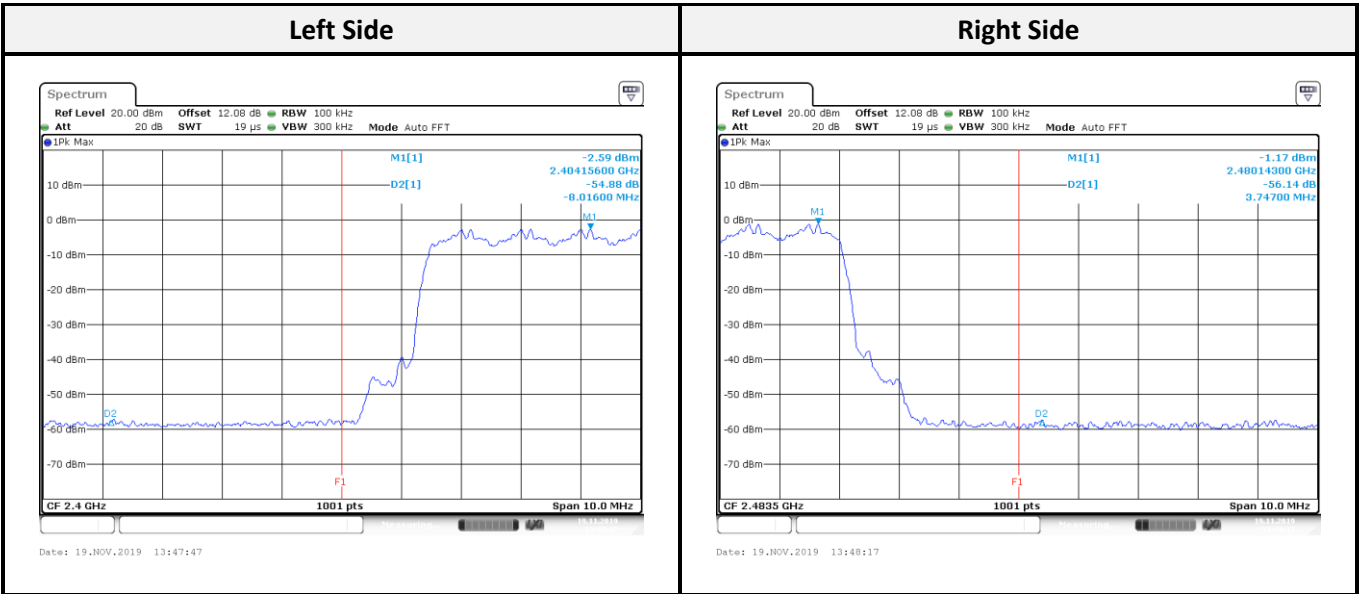

EDR-3Mbps mode:

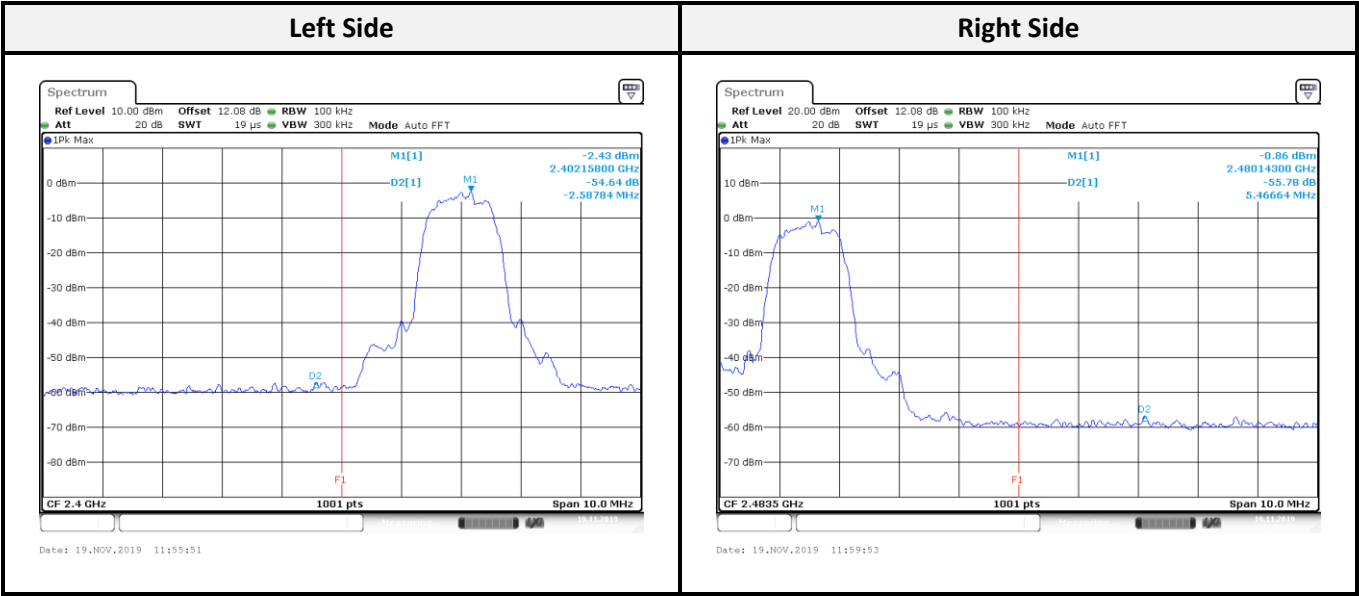

EDR-3Mbps Hopping mode:

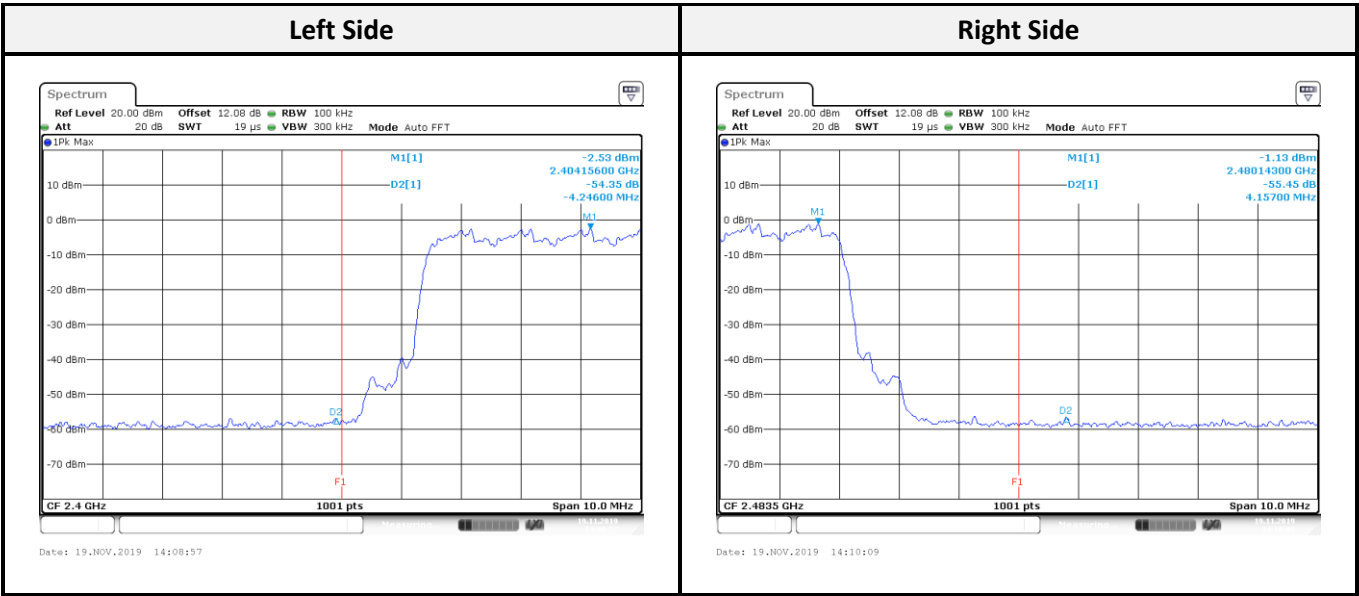

----- END OF REPORT -----