

JQA APPLICATION NO.: 400-90577  
Issue Date : December 7, 1999  
Page 1 of 24

### EMI TEST REPORT

JQA APPLICATION NO. : 400-90577  
Model No. : SBJR03016  
Type of Equipment : REMOTE CONTROL UNIT(Transmitter)  
Regulations Applied : CFR 47 FCC Rules and Regulations Part 15  
FCC ID : OHEJR03016  
Applicant : Alps Electric Co., Ltd. Mechatronic Devices Division 2  
Address : 230 Shibue, Wakuya-cho, Toda-gun,  
Miyagi 987-0195, Japan  
Manufacture : Alps Electric Co., Ltd. Mechatronic Devices Division 2  
Address : 230 Shibue, Wakuya-cho, Toda-gun,  
Miyagi 987-0195, Japan  
**Final Judgment** : Passed



**TEST RESULTS IN THIS REPORT** are obtained in use of equipment that is traceable to  
Electrotechnical Lab. of MITI Japan and Communications Research Lab. of MPT Japan.

The **test results** only respond to the tested sample. It is not allowed to copy this  
report even partly without the allowance of the JQA EMC Engineering Dept. Testing Div.

**TABLE OF CONTENTS**

	Page
<b>1 Documentation</b>	
1.1 Test Regulation	<u>3</u>
1.2 General Information	<u>3</u>
1.3 Test Condition	<u>4 - 7</u>
1.4 EUT Modifications	<u>8</u>
1.5 Test results	<u>9</u>
1.6 Summary	<u>10</u>
1.7 Test Configuration / Operation of EUT	<u>11</u>
1.8 Preliminary Test and Test-setup (Drawings)	<u>12 - 16</u>
1.9 EUT Arrangement (Photographs)	<u>17 - 18</u>
<b>2 Test Data</b>	
2.1 AC Power Line Conducted Emission 0.45 MHz - 30 MHz	<u>N/A</u>
2.2 Radiated Emission (Electric Field)	<u>19 - 22</u>
2.3 Frequency Stability	<u>N/A</u>
2.4 Occupied Bandwidth	<u>23 - 24</u>

## 1 DOCUMENTATION

### 1.1 TEST REGULATION

FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) Intentional Radiators

#### Test procedure :

AC power line conducted emission, radiated emission, frequency stability and occupied bandwidth tests were performed according to the procedures in ANSI C63.4-1992.

### 1.2 GENERAL INFORMATION

#### 1.2.1 Test facility :

1) Test Facility located at EMC Engineering Dept. Testing Div. : No.2 and 3 Anechoic Chambers( 3 meters Site )  
FCC filing No. : 31040/SIT 1300F2

2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.  
NVLAP Lab Code : 200189-0 (Effective through : June 30, 2000)

#### 1.2.2 Description of the Equipment Under Test (EUT) :

1) Type of Equipment	: REMOTE CONTROL UNIT(Transmitter)
2) Product Type	: Pre-Production
3) Category	: Security/Remote Control Transmitter
4) EUT Authorization	: Certification
5) FCC ID	: OHEJR03016
6) Trade Name	: JVC
7) Model No.	: SBJR03016
8) Operating Frequency Range	: 433.9 MHz
9) Highest Frequency Used in the EUT	: 433.9 MHz
10) Serial No.	: -
11) Date of Manufacture	: November 1999
12) Power Rating	: DC 3.0(Battery)
13) EUT Grounding	: None

#### 1.2.3 Definitions for symbols used in this test report :

x - indicates that the listed condition, standard or equipment is applicable for this report.  
— - indicates that the listed condition, standard or equipment is not applicable for this report.

**1.3 TEST CONDITION****1.3.1 The measurement of the AC Power Line Conducted Emission**

- was performed in the following test site.  
 - was not applicable.

**Test location :**

Safety Testing Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Shielded Enclosure  
 - Anechoic Chamber No. 2 (portable Type)

**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Field Strength Meter	ESH-2	Rohde & Schwarz	880370/016	May 1999	1 Year
<input type="checkbox"/> - Field Strength Meter	ESH-3	Rohde & Schwarz	881460/016	May 1999	1 Year
<input type="checkbox"/> - Field Strength Meter	ESH-3	Rohde & Schwarz	881460/030	Nov 1999	1 Year
<input type="checkbox"/> - LISN	KNW-407	Kyoritsu Electrical	8-833-6	Apr. 1999	1 Year
<input type="checkbox"/> - LISN	KNW-407	Kyoritsu Electrical	8-855-2	Apr. 1999	1 Year
<input type="checkbox"/> - LISN	KNW-407	Kyoritsu Electrical	8-757-1	Apr. 1999	1 Year
<input type="checkbox"/> - RF Cable	3D-2W	Fujikura	155-21-005	Apr. 1999	1 Year
<input type="checkbox"/> - RF Cable	3D-2W	Fujikura	155-21-006	Apr. 1999	1 Year

**1.3.2 The measurement of the Radiated Emission(30 MHz - 1000 MHz)**

x - was performed in the following test site.  
  - was not applicable.

**Test location :**

Safety Testing Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

x - Anechoic Chamber No. 2 (3 meters)  
  - Anechoic Chamber No. 3 (3 meters)

**Validation of Site Attenuation :**

1) Last Confirmed Date :March, 1999  
2) Interval :1 year

**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u> </u> - Field Strength Meter	ESV	Rohde & Schwarz	872148/039	May 1999	1 Year
<u> </u> - Field Strength Meter	ESVP	Rohde & Schwarz	879783/030	May 1999	1 Year
<u>x</u> - Field Strength Meter	ESVP	Rohde & Schwarz	881478/004	May 1999	1 Year
<u> </u> - Field Strength Meter	ESVP	Rohde & Schwarz	881478/005	May 1999	1 Year
<u> </u> - Antenna	KBA-511A	Kyoritsu Electrical	0-201-13	Nov. 1999	1 Year
<u>x</u> - Antenna	KBA-511A	Kyoritsu Electrical	0-170-1	Nov. 1999	1 Year
<u> </u> - Antenna	KBA-611	Kyoritsu Electrical	0-210-5	Nov. 1999	1 Year
<u>x</u> - Antenna	KBA-611	Kyoritsu Electrical	0-147-14	Nov. 1999	1 Year
<u>x</u> - RF Cable	5D-2W	Fujikura	155-21-001	Feb. 1999	1 Year
<u> </u> - RF Cable	5D-2W	Fujikura	155-21-002	Feb. 1999	1 Year

**1.3.3 The measurement of the Radiated Emission(Above 1000 MHz)**

- was performed in the following test site.  
 - was not applicable.

**Test location :**

Safety Testing Center EMC Engineering Dept. Testing Div.  
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan


- No. 2 site (3 meters)  
 - No. 3 site (3 meters)

**Validation of Site Attenuation :**

1) Last Confirmed Date :March, 1999  
2) Interval :1 year

**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 1999	1 Year
<input checked="" type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	May 1999	1 Year
<input checked="" type="checkbox"/> - Log-Periodic Antenna	HL 025	Rohde & Schwarz	340182/015	Nov. 1999	1 Year
<input checked="" type="checkbox"/> - RF Cable	S 04272B	Suhner	155-21-011	May 1999	1 Year

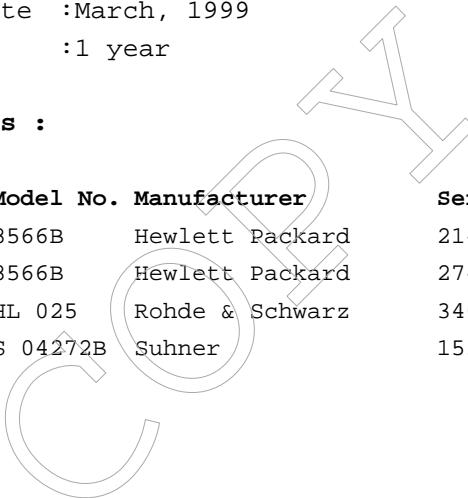

**1.3.4 The measurement of the Frequency Stability**   - was performed.x - was not applicable.**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u>  </u> - Frequency Counter	53131A	Hewlett Packard	3546A11807	June 1999	1 Year
<u>  </u> - Oven	-	Ohnishi Co. Ltd.	-	Aug. 1999	1 Year
<u>  </u> - DC Power Supply	6628A	Hewlett Packard	3224A00284	July 1999	1 Year

**1.3.5 The measurement of the Occupied Bandwidth**x - was performed.   - was not applicable.**Used test instruments :**

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<u>x</u> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 1999	1 Year
<u>  </u> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	May 1999	1 Year
<u>  </u> - Function Generator	3325A	Hewlett Packard	2512A21776	June 1999	1 Year
<u>  </u> - FM Linear Detector	MS61A	Anritsu Corp.	M77486	Sep. 1999	1 Year
<u>  </u> - Level Meter	ML422C	Anritsu Corp.	M87571	June 1999	1 Year

**1.4 EUT MODIFICATION**

-No modifications were conducted by JQA to achieve compliance to Class B levels.  
 -To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.


**The modifications will be implemented in all production models of this equipment.**

Applicant :

Date :

Typed Name :

Position :

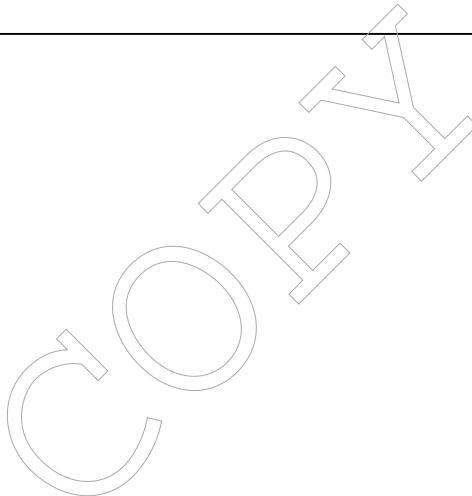A large, stylized, light-gray watermark or stamp is positioned in the center of the page. It features the word "COPY" in a bold, blocky font. A vertical line, resembling a stylized 'Y' or a checkmark, is drawn through the middle of the 'O' and the top of the 'P'. The entire watermark is oriented diagonally, sloping upwards from the bottom-left towards the top-right.

**1.5 TEST RESULTS****AC Power Line Conducted Emission**  - Applicable  - NOT ApplicableThe requirements are  - PASSED  - NOT PASSED**Remarks :****Radiated Emission [§15.231(b)]**  - Applicable  - NOT ApplicableThe requirements are  - PASSED  - NOT PASSED**Remarks:****Frequency Stability**  - Applicable  - NOT ApplicableThe requirements are  - PASSED  - NOT PASSED**Remarks:****Occupied Bandwidth [§15.231(c)]**  - Applicable  - NOT ApplicableThe requirements are  - PASSED  - NOT PASSED**Remarks:**

**1.6 SUMMARY****General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) under the test configuration, as shown in clause 1.7 to 1.9.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

**Final Judgment :**

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : December 1, 1999

End of testing : December 1, 1999

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Signatories:



Masaaki Takahashi  
Manager  
JQA EMC Engineering Dept.



Shigeru Osawa  
Assistant Manager  
JQA EMC Engineering Dept.


**1.7 TEST CONFIGURATION / OPERATION OF EUT****1.7.1 Test Configuration****The equipment under test (EUT) consists of :**

Item	Manufacturer	Model No.	FCC ID	Serial No.
REMOTE CONTROL UNIT (Transmitter)	Alps Electric Co., Ltd. Mechatronic Devices Division	SBJR03016	OHEJR03016	-

**1.7.2 Operating condition**

Power supply Voltage : 3.0 VDC(Battery)

The tests have been carried out under the transmitting condition.

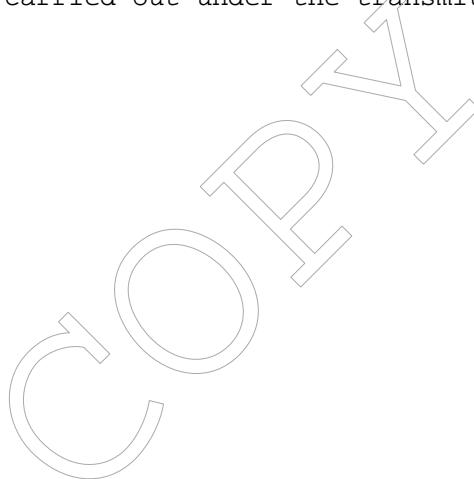

## 1.8 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

### 1.8.1 AC Power Line Conducted Emission ( 450 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.3.1, the AC power line preliminary conducted emissions measurements were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

#### Shielded Enclosure

##### - Side View -


Vertical  
Ground  
Plane

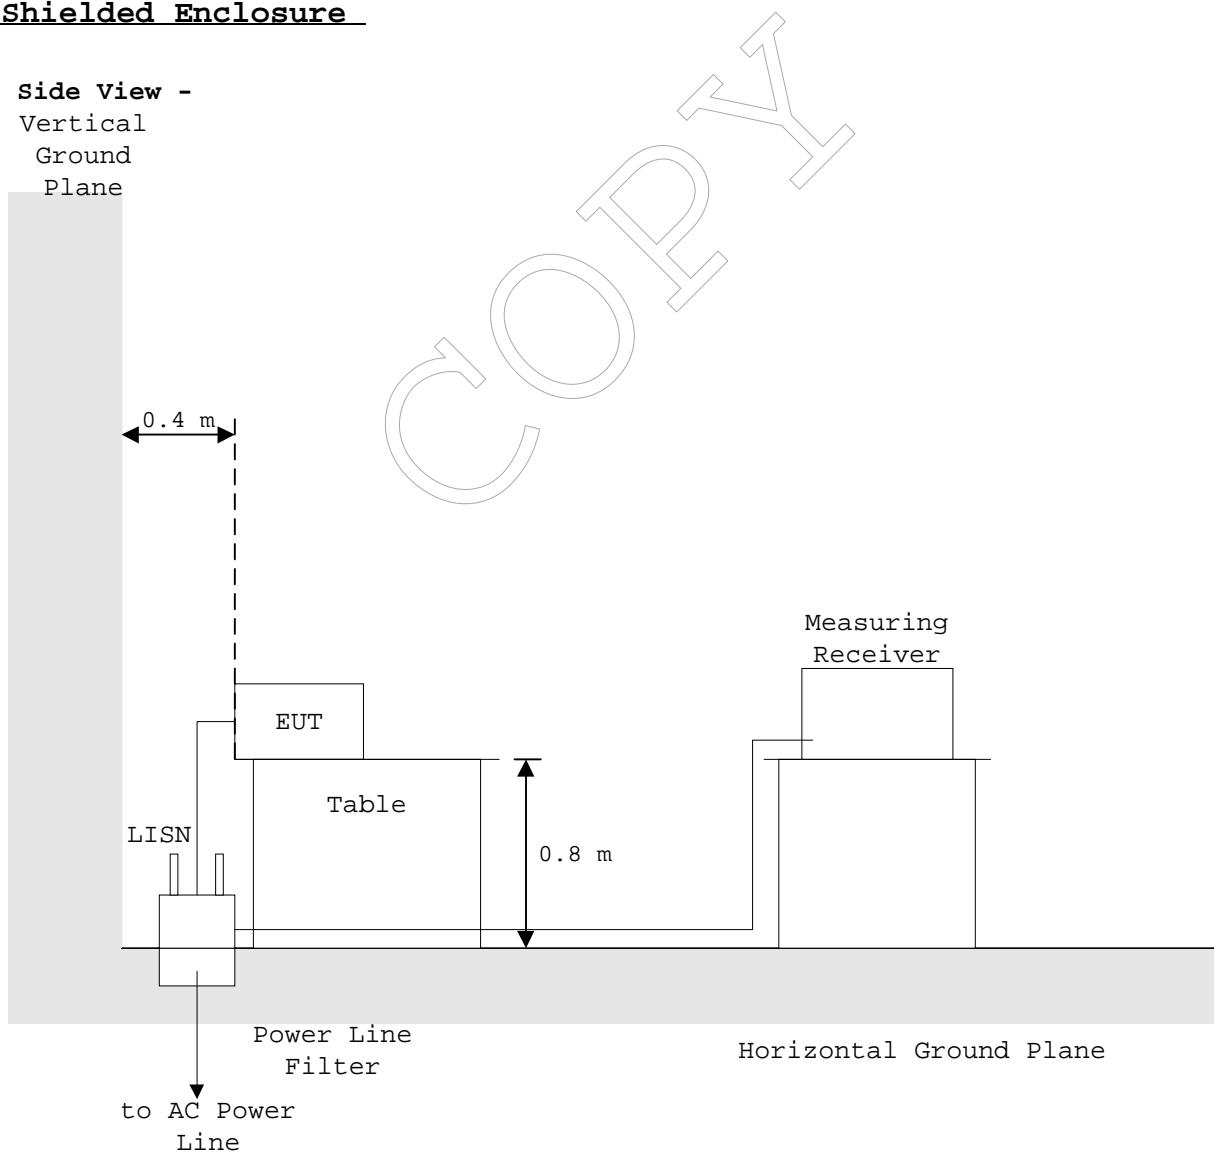

**1.8.2 Radiated Emission ( 30 MHz - 1000 MHz) :**

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

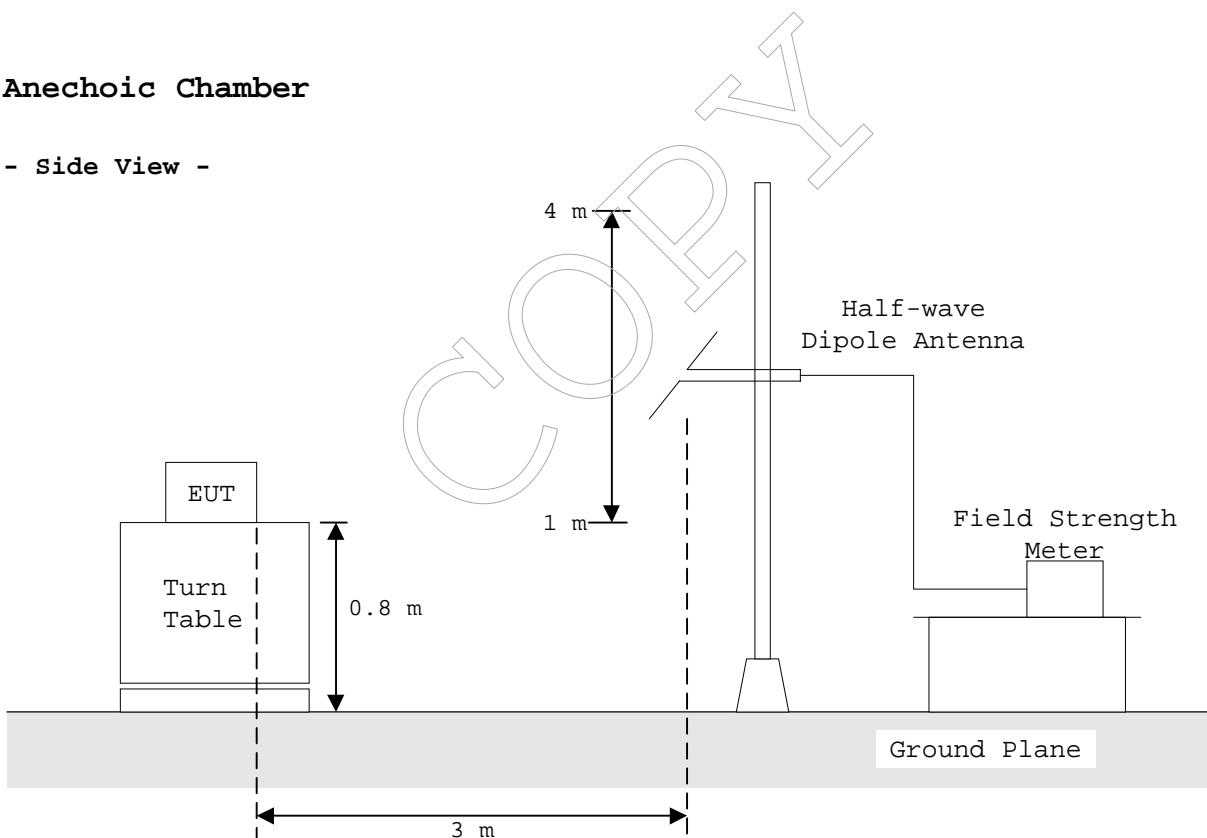**Anechoic Chamber****- Side View -**

**1.8.3 Radiated Emission (Above 1 GHz) :**

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.


The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

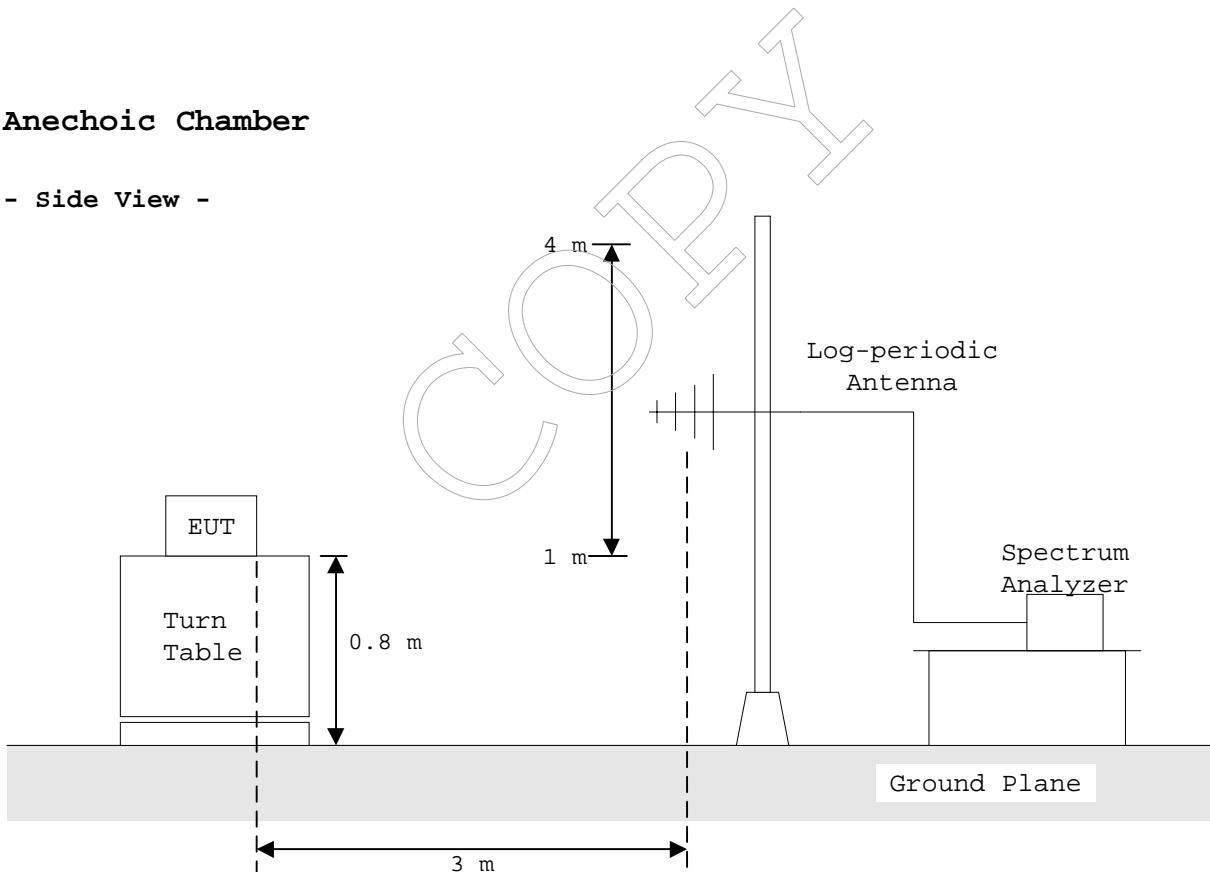**Anechoic Chamber****- Side View -**

**1.8.4 Frequency Stability :**

According to description of ANSI C63.4-1992 sec.13.1.5 and sec.13.1.6, the frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  at the normal supply voltage, and if required, with a variation in the primary voltage from 85 % to 115 % the rated supply voltage at the temperature of  $+20^{\circ}\text{C}$ .


These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

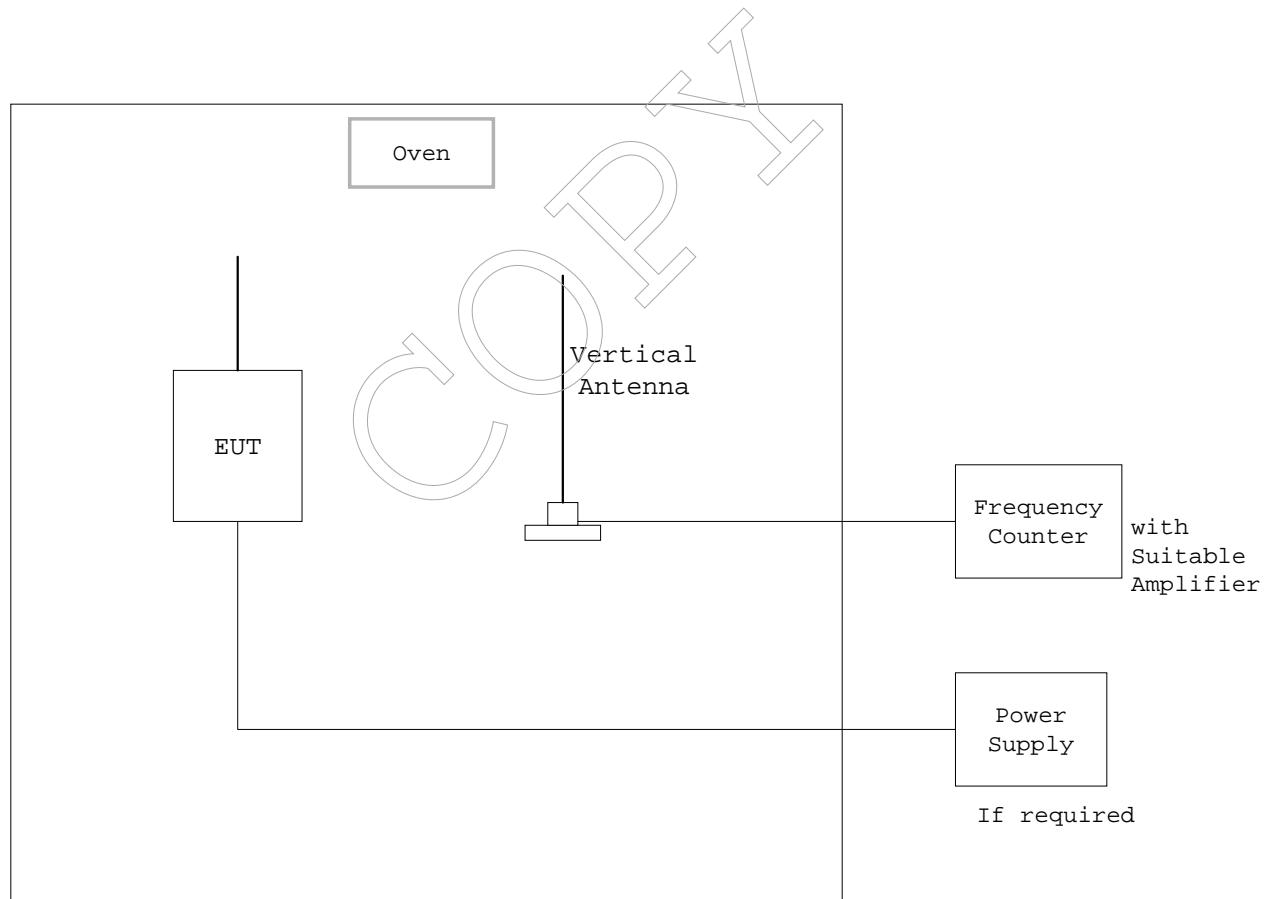

**1.8.5 Occupied Bandwidth :**


According to description of ANSI C63.4-1992 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.

The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

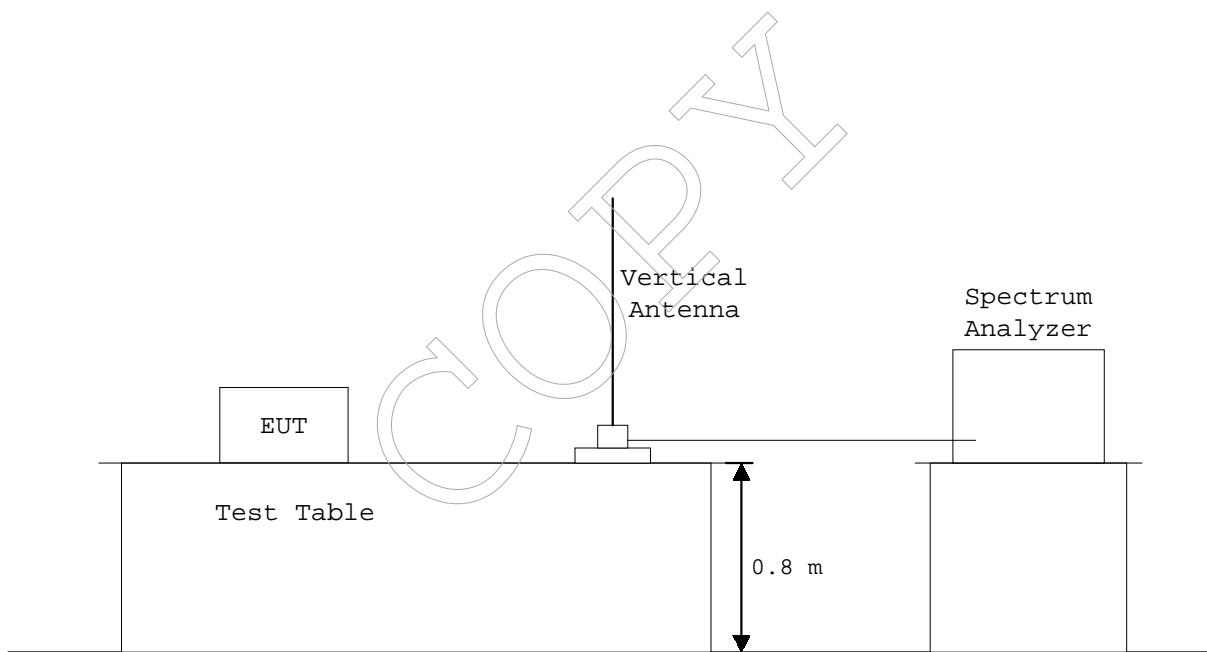

**1.9 TEST ARRANGEMENT (PHOTOGRAPHS)**

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

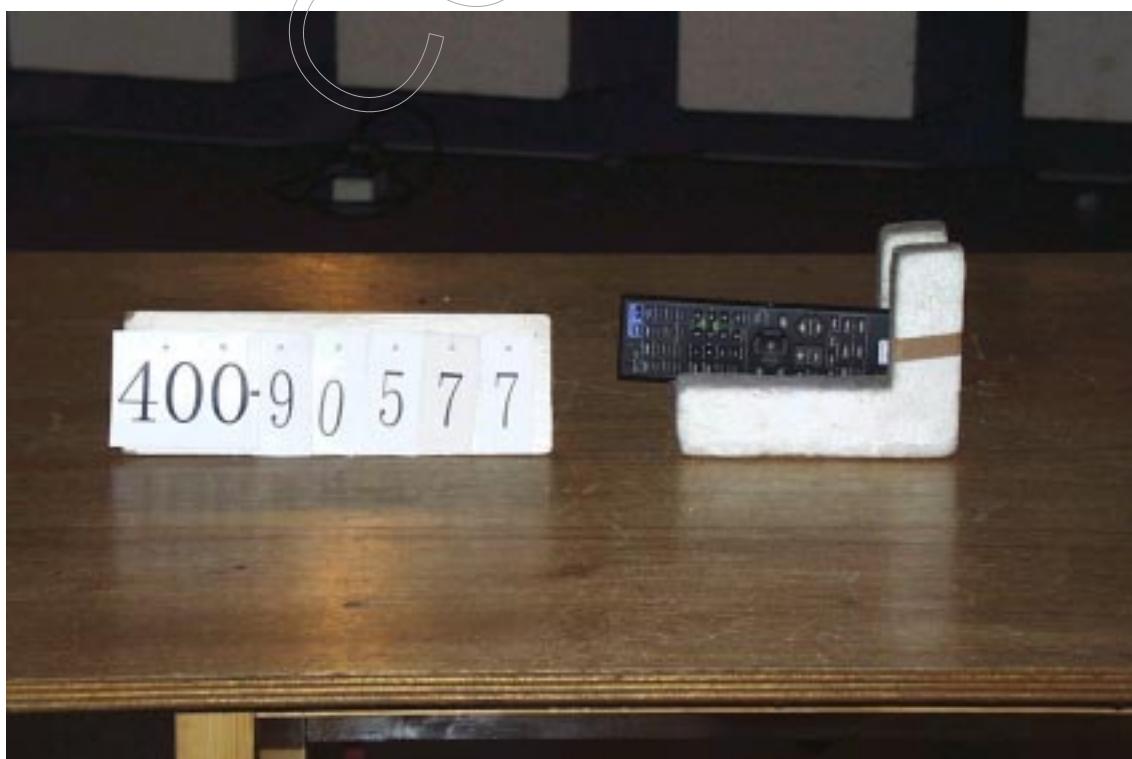Photograph present configuration with maximum emission  
for Horizontal Plane

for Vertical Plane



OPY1  
COPY1

---

**TEST DATA****2.2 Radiated Emissions Measurement**Date : December 1, 1999  
Temp.: 22 °C Humi.: 48 %Operating Frequency : 433.9 MHz  
Distance of Measurement : 3.0 meters

Frequency (MHz)	Factor (dB/m)	Correction		Meter Reading		Field Strength at 3 m		
		Horiz. (dB $\mu$ V)	Vert. (dB $\mu$ V)	Factor*	Limits (dB $\mu$ V/m)	Horiz. (dB $\mu$ V/m)	Vert. (dB $\mu$ V/m)	
<b>Fundamental</b>								
433.9	24.0	55.7	56.7	-17.0	80.8	62.7	63.7	
<b>Harmonics &amp; other Frequency components</b>								
867.8	31.7	42.6	38.9	-17.0	60.8	57.3	53.6	
1301.7	27.1	35.8	37.4	-17.0	60.8	45.9	47.5	
1735.6	30.5	33.6	31.9	-17.0	60.8	47.1	45.4	
2169.5	-13.4	84.3	80.4	-17.0	60.8	53.9	50.0	
2603.4	-11.9	73.4	72.1	-17.0	60.8	44.5	43.2	
3037.3	-10.0	71.6	72.6	-17.0	60.8	44.6	45.6	
3471.2	-8.2	64.8	64.1	-17.0	60.8	39.6	38.9	
3905.1	-6.6	69.5	68.5	-17.0	60.8	45.9	41.9	
4339.0	-5.3	64.6	63.8	-17.0	60.8	42.3	41.5	

Note: 1. The spectrum was checked from 30 MHz to tenth harmonics.

All emissions not listed were found to be more than 20 dB below the limits.

2. The symbol of "<" means "or less".

3. The cable loss and amplifier gain were included in the correction factor.

4. Sample calculation :

at 433.9 MHz

$$Cf + Mr + F = 24.0 + 56.7 - 17.0 = 63.7 \text{ dB}\mu\text{V/m}$$

Where,

Cf = Correction Factor

Mr = Meter Reading

F = Peak to Average Factor

5. "\*": The factor due to the pulsed waveform as shown in the attached sheet.

6. Measuring Instrument Setting:

Less than 1000 MHz

Detector function

IF Bandwidth

: Peak

: 120 kHz

Above 1000 MHz

Resolution Bandwidth

: 1 MHz

Tested by :



Shigeru Osawa


Testing Engineer

## Radiated Fundamental & Spurious Emissions

FCC ID : OHEJR03016

Operating Frequency : 434 MHz

FUNDAMENTAL LIMITS [Sec. 15.231 (b) ] : 10996uV/m

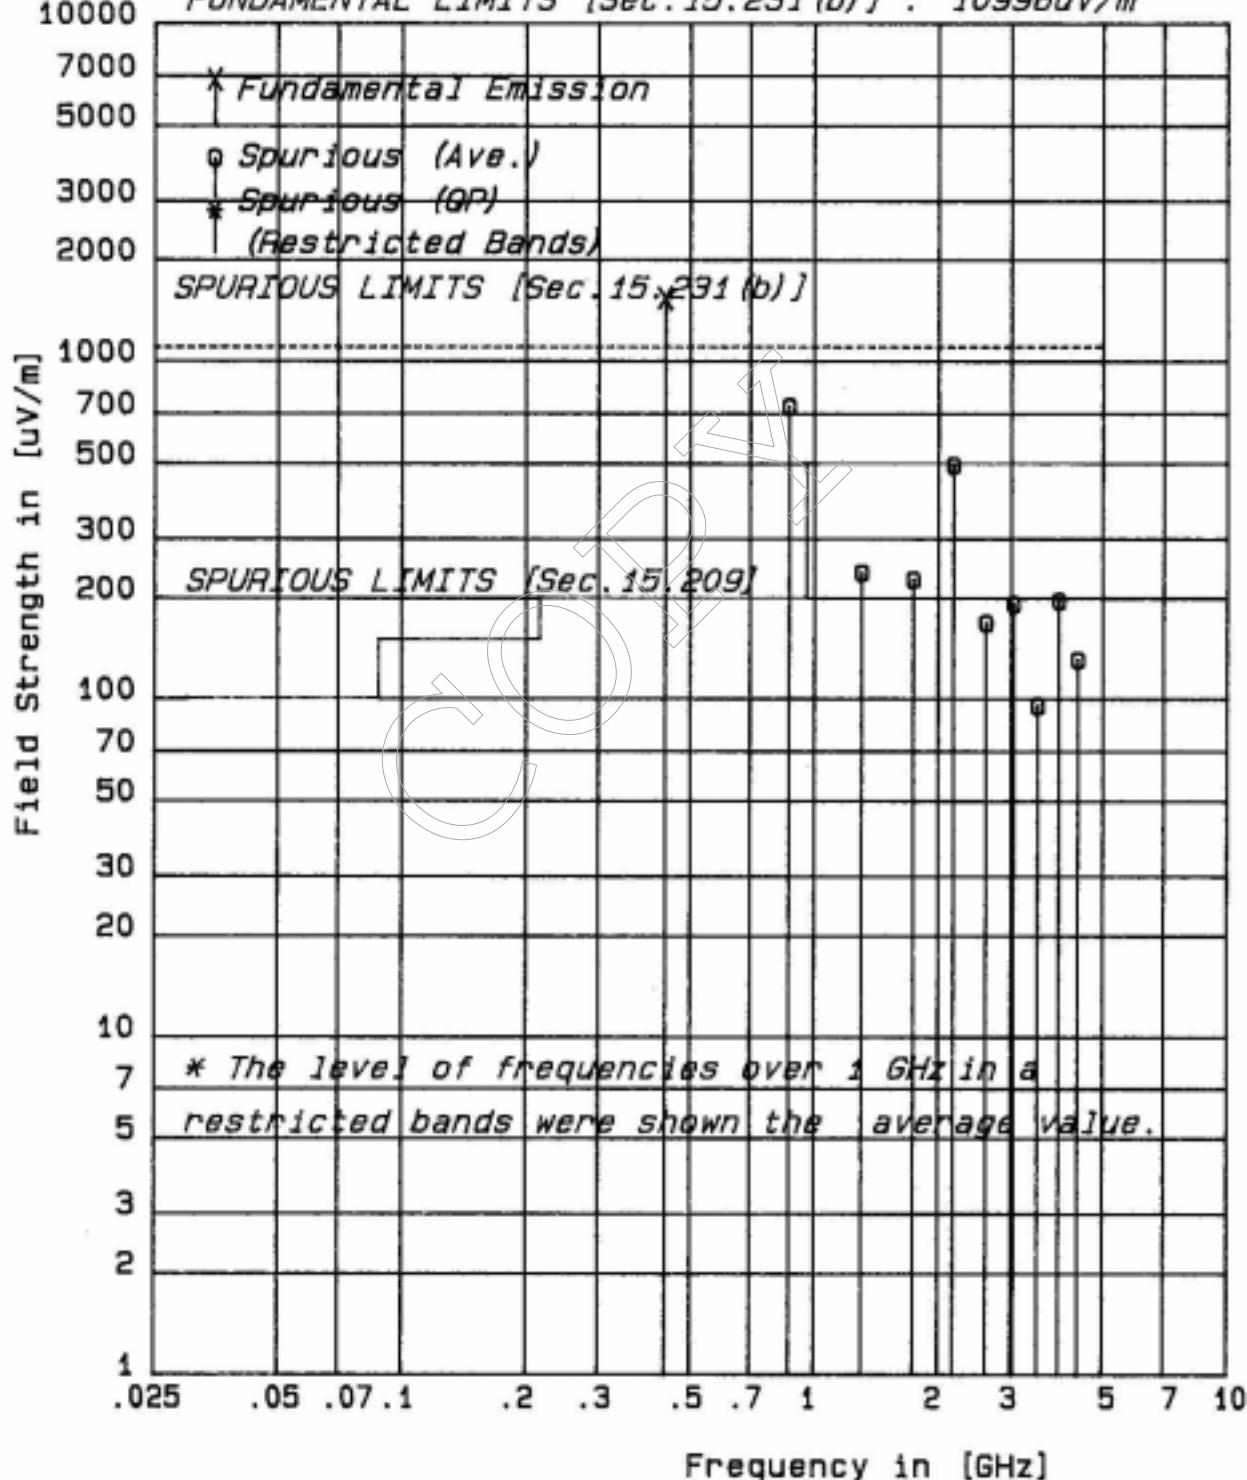


\* The level of frequencies over 1 GHz in a  
restricted bands were shown the average value.

## The encoded waveform in the time domain

FCC ID : OHEJR03016  
Model : SBJR03016

Mode of EUT : Transmit

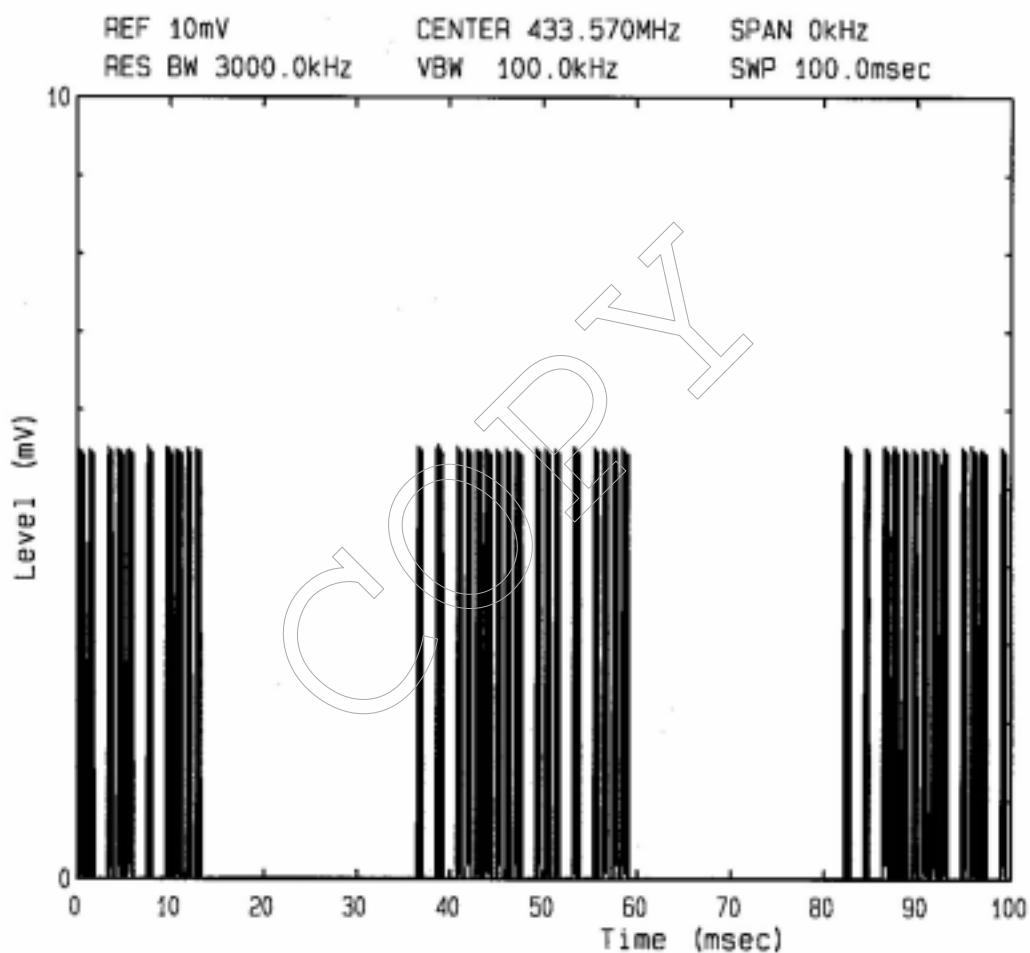

The above waveform indicates the case when field strength averaged over 100 milliseconds was maximum value. In order to obtain the peak to average factor, calculation of the period of total on-time was computed by personal computer. Results was obtained by following.


$$\begin{aligned}\text{Duty cycle} &= (\text{Maximum total on-time} / 100 \text{ msec}) \times 100 \\ &= (14.1 \text{ msec} / 100 \text{ msec}) \times 100 = 14.1 \%\end{aligned}$$

Therefore

$$\text{Factor is } 20\log(0.1410) = -17.0 \text{ dB}$$

**2.4 Occupied Bandwidth Measurement**Date : December 1, 1999Temp.: 26 °C Humi.: 29 %Measurements Results :Specified Limits : 0.25 % of the fundamental frequency  
433.9 MHz x 0.0025 = 1085 kHz

Refer to the attached graphs.

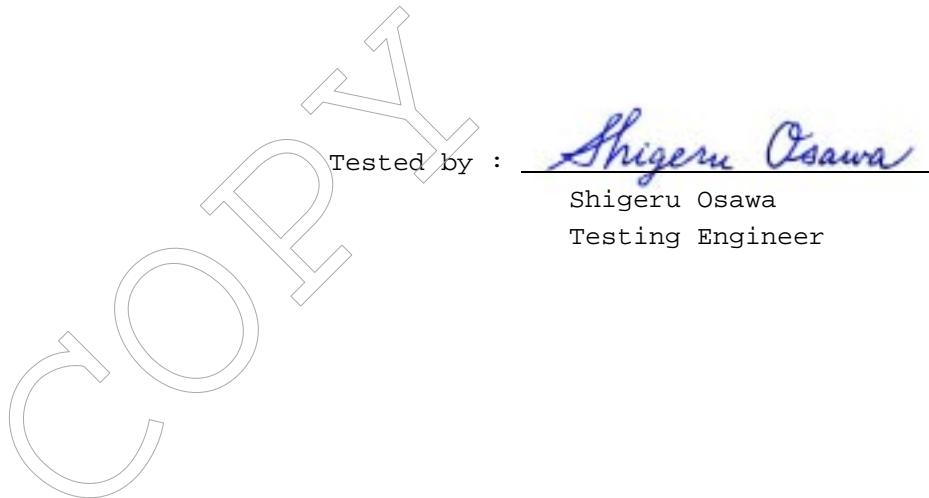

Tested by : Shigeru Osawa  
Shigeru Osawa  
Testing Engineer

**Emission Limitation**

FCC ID : OHEJR03016

Model : SBJR03016

Mode of EUT : Transmit

