

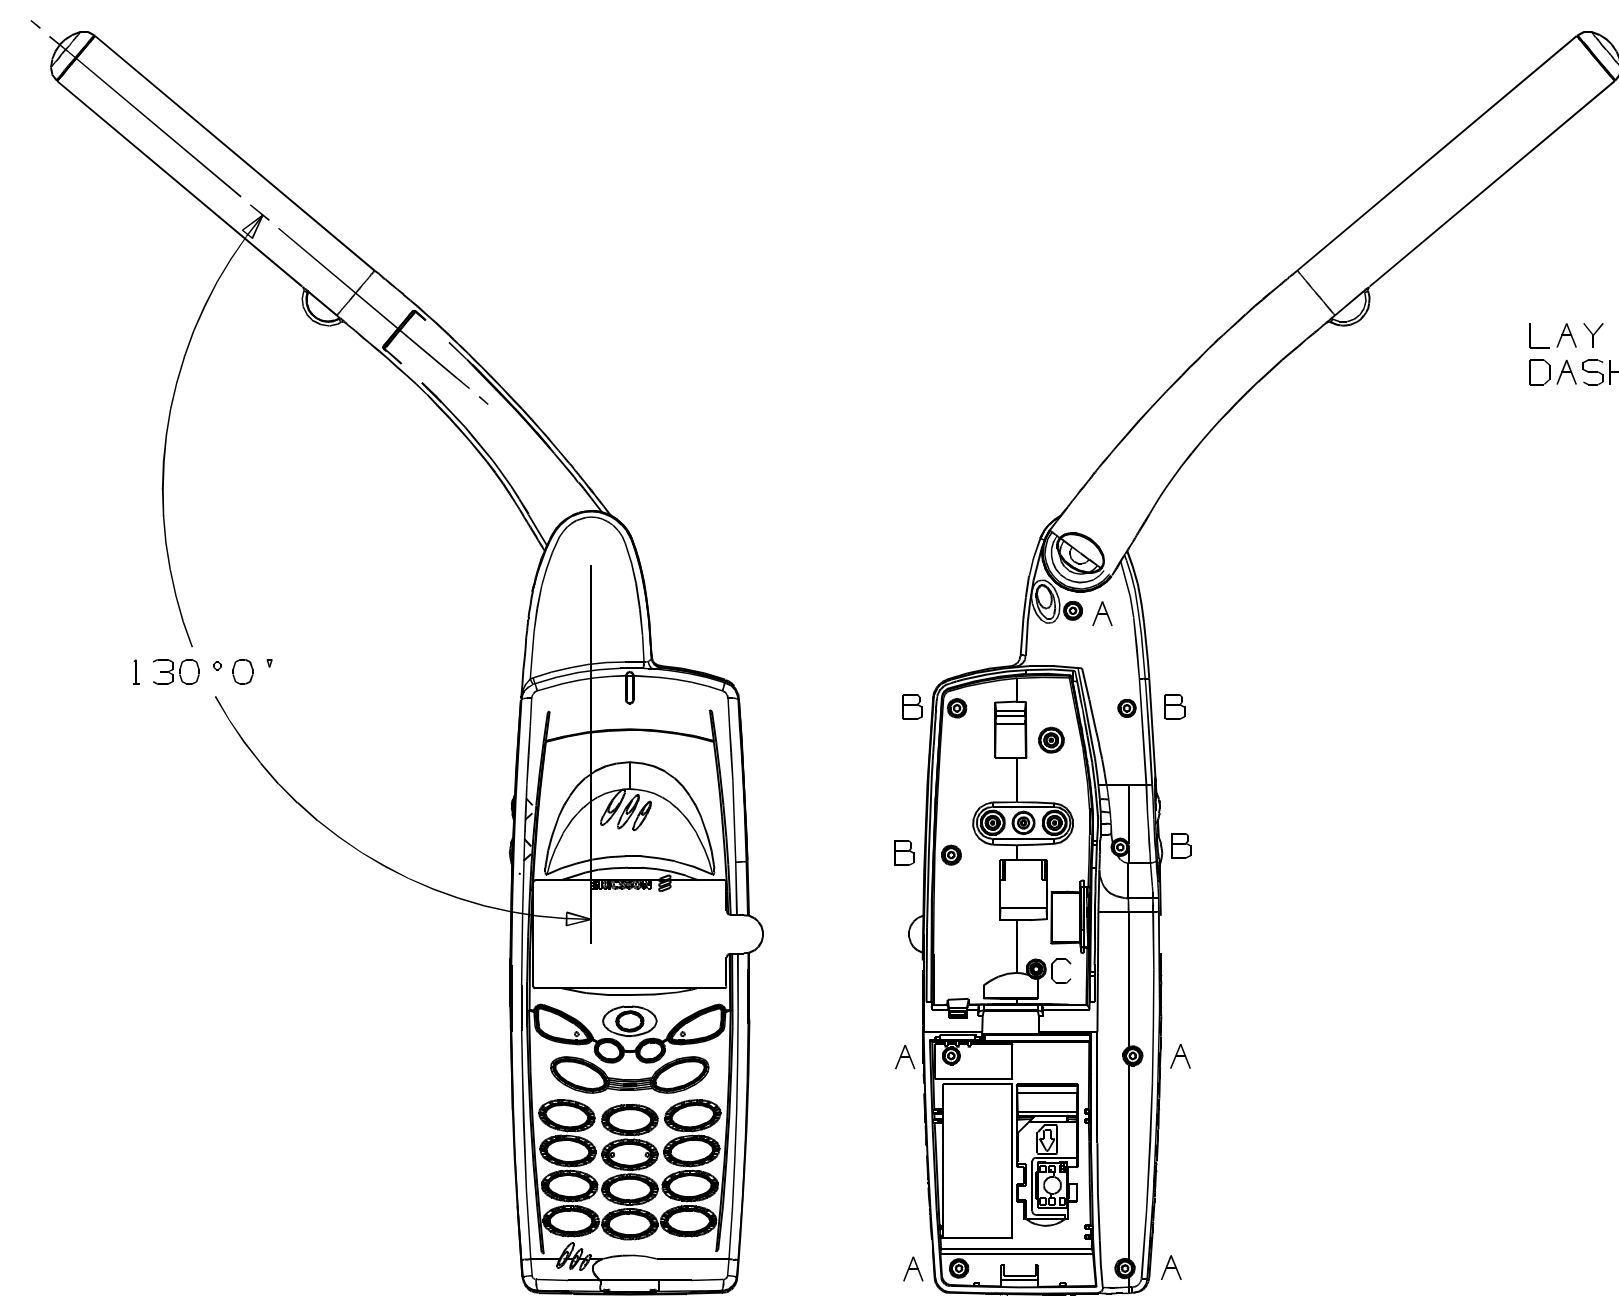


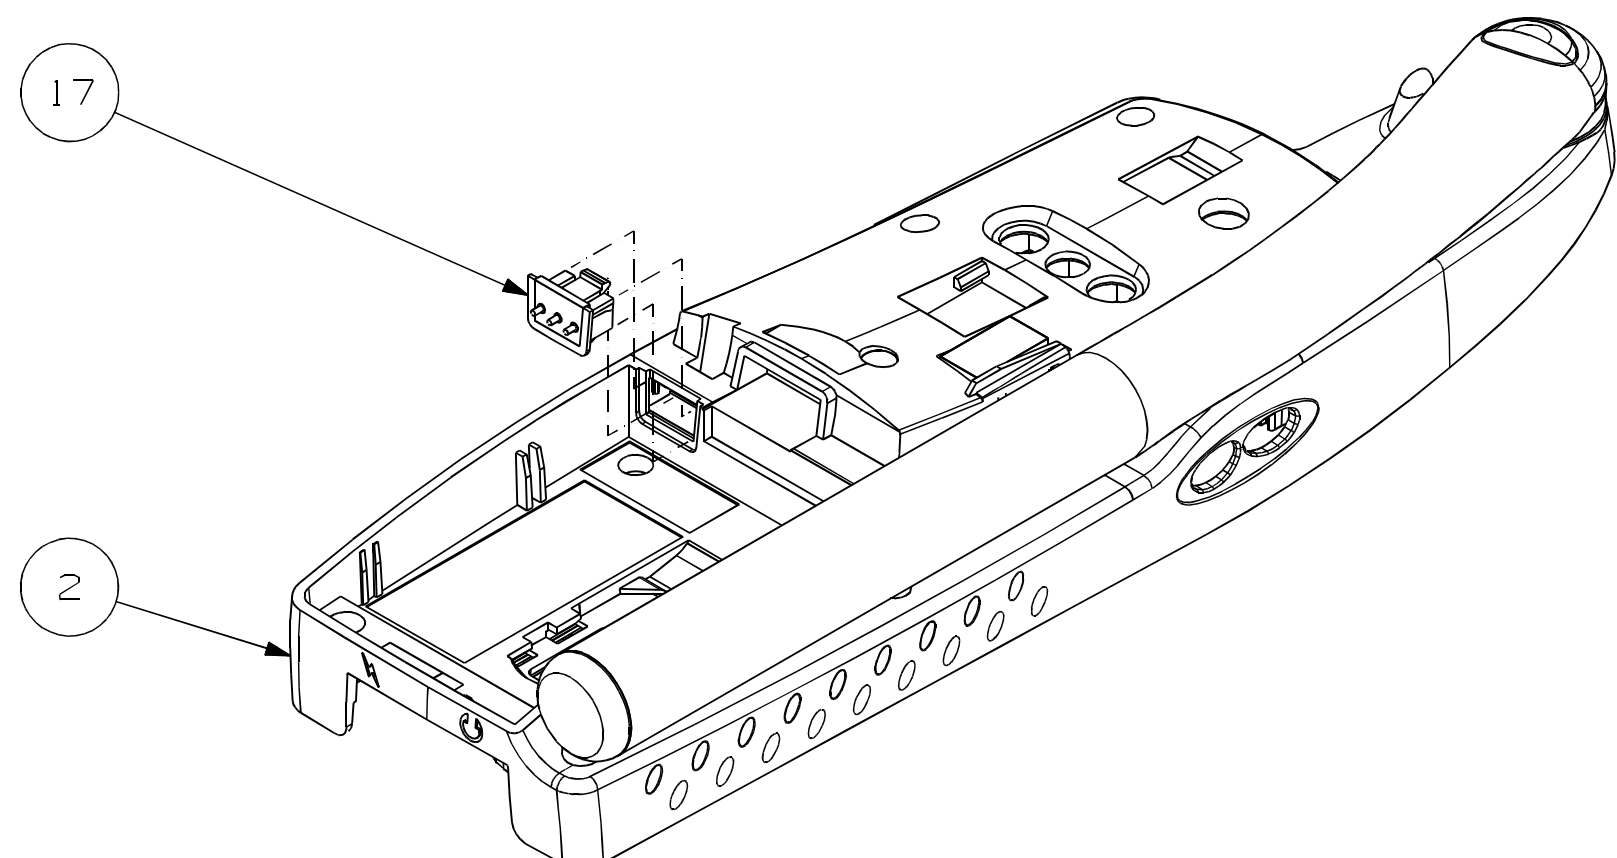

- NOTES
- 1, ANTENNA TO BE POSITIONED AS SHOWN- 130° OF BODY CENTRE LINE, PRIOR TO ASSEMBLY AND CONNECTION OF COAXIAL'S.
 - 2, DURING ASSEMBLY AVOID PINCHING COAXIAL CABLES.
 - 3, AVOID DAMAGING EXTERNAL FACES AND INTERNAL PAINT FACES.
 - 4, TORQUE SCREWS ITEMS 18 AND 19 TO 20cNm.

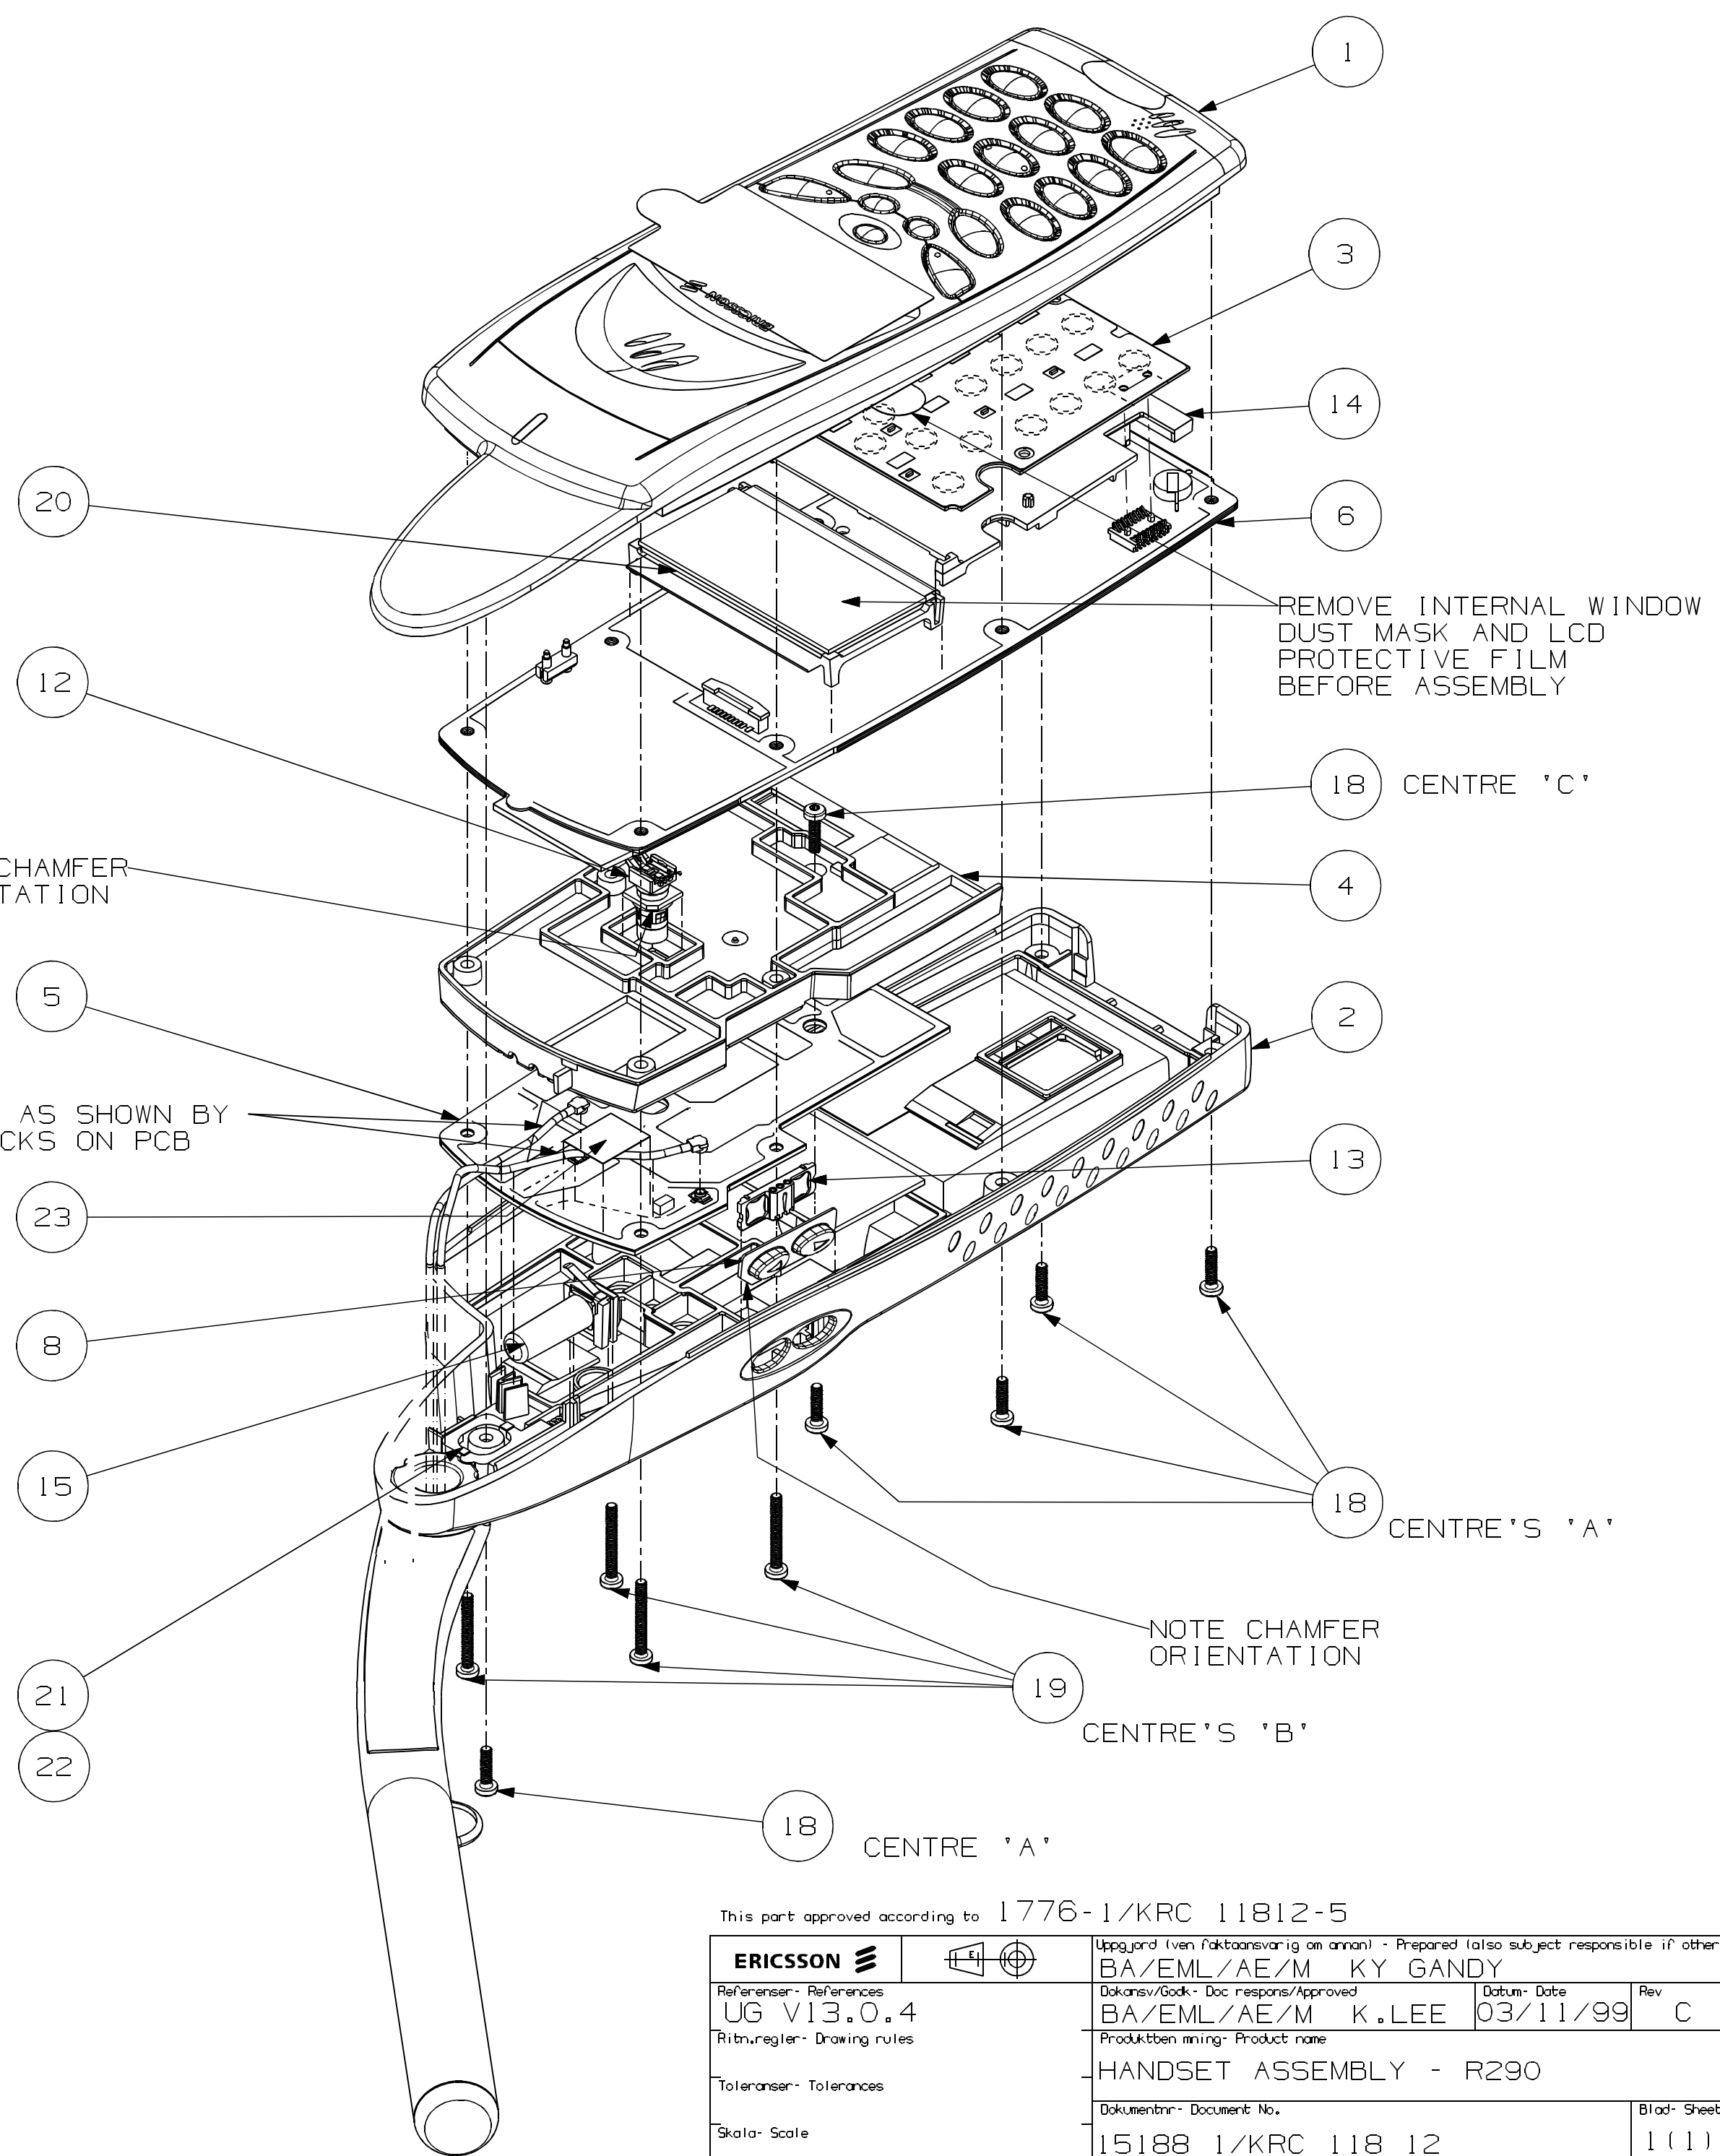

This part approved according to 1776-1/KRC 11812-5			
ERICSSON 		 Uppgjord (ven faktansvarig om annan) - Prepared (also subject responsible if other)	
Referenser- References		BA/EML/AE/M KY GANDY	
UG V13.0.4		Dokansv/Godk- Doc respons/Approved	Datum- Date
Ritn,regler- Drawing rules		BA/EML/AE/M K.LEE	03/11/99
Toleranser- Tolerances		Rev C	
Skala- Scale		Produktben mning- Product name	
		HANDSET ASSEMBLY - R290	
		Dokumentnr- Document No.	Blad- Sheet
		15188 1/KRC 118 12	1 (1)