

Amber Helm Development L.C.

92723 Michigan Hwy-152

Sister Lakes, Michigan 49047 USA

Tel: 888-847-8027

EMC Test Report

STAM8-WR2001TX

Issued: January 26, 2020

regarding

USA: CFR Title 47, Part 15.231 (Emissions)
Canada: IC RSS-210v10/GENv5 (Emissions)

for



AM83STNA, AM83VLTA

Category: RKE Transmitter

Judgments:

15.231 / RSS-210v9 Compliant

Testing Completed: January 26, 2020



Prepared for:


Strattec Security Corporation

3333 West Good Hope Road, Milwaukee Wisconsin United States


Phone: 414 247-3333, Fax: 414 247-3329

Contact: Brian Reetz, breetz@strattec.com


Data Recorded by:

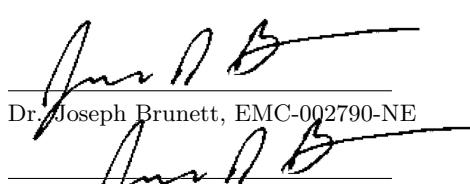
Dr. Joseph Brunett, EMC-002790-NE

Prepared by:


Dr. Joseph Brunett, EMC-002790-NE

Reviewed by:


Gordon Helm, EMC-002401-NE

Date of Issue: January 26, 2020

Revision History

Rev. No.	Date	Details	Revised By
r0	January 26, 2020	Initial Release.	J. Brunett
r1	January 30, 2020	Minor typo correction.	J. Brunett

Contents

Revision History	2
Table of Contents	2
1 Test Report Scope and Limitations	4
1.1 Laboratory Authorization	4
1.2 Report Retention	4
1.3 Subcontracted Testing	4
1.4 Limitation of Results	4
1.5 Copyright	4
1.6 Endorsements	4
1.7 Test Location	5
1.8 Traceability and Equipment Used	5
2 Test Specifications and Procedures	6
2.1 Test Specification and General Procedures	6
3 Configuration and Identification of the Equipment Under Test	7
3.1 Description and Declarations	7
3.1.1 EUT Configuration	8
3.1.2 Modes of Operation	8
3.1.3 Variants	8
3.1.4 Test Samples	8
3.1.5 Functional Exerciser	8
3.1.6 Modifications Made	8
3.1.7 Production Intent	8
3.1.8 Declared Exemptions and Additional Product Notes	8
4 Emissions	9
4.1 General Test Procedures	9
4.1.1 Radiated Test Setup and Procedures	9
4.1.2 Conducted Emissions Test Setup and Procedures	11
4.1.3 Power Supply Variation	11
4.2 Intentional Emissions	12
4.2.1 Fundamental Emission Pulsed Operation	12
4.2.2 Fundamental Emission Bandwidth	15
4.2.3 Fundamental Emission Field Strength	17
4.3 Unintentional Emissions	18
4.3.1 Transmit Chain Spurious Emissions	18
4.3.2 Radiated Digital Spurious	19
5 Measurement Uncertainty and Accreditation Documents	20

List of Tables

1	Test Site List.	5
2	Equipment List.	5
3	EUT Declarations.	7
4	Fundamental Emission Pulsed Operation.	12
5	Fundamental Emission Bandwidth.	15
6	Fundamental Emission Field Strength.	17
7	Transmit Chain Spurious Emissions.	18
8	Measurement Uncertainty.	20

List of Figures

1	Photos of EUT.	7
2	EUT Test Configuration Diagram.	8
3	Radiated Emissions Diagram of the EUT.	9
4	Radiated Emissions Test Setup Photograph(s).	10
5	Fundamental Emission Pulsed Operation.	13
5	Fundamental Emission Pulsed Operation.	14
5	Fundamental Emission Pulsed Operation.	14
6	Fundamental Emission Bandwidth.	16
7	Accreditation Documents	20

1 Test Report Scope and Limitations

1.1 Laboratory Authorization

Test Facility description and attenuation characteristics are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: US5348 and US5356) and with ISED Canada, Ottawa, ON (File Ref. No: 3161A and 24249).

1.2 Report Retention

For equipment verified to comply with the regulations herein, the manufacturer is obliged to retain this report with the product records for the life of the product, and no less than ten years. A copy of this Report will remain on file with this laboratory until February 2030.

1.3 Subcontracted Testing

This report does not contain data produced under subcontract.

1.4 Limitation of Results

The test results contained in this report relate only to the item(s) tested. Any electrical or mechanical modification made to the test item subsequent to the test date shall invalidate the data presented in this report. Any electrical or mechanical modification made to the test item subsequent to this test date shall require reevaluation.

1.5 Copyright

This report shall not be reproduced, except in full, without the written approval of Amber Helm Development L.C.

1.6 Endorsements

This report shall not be used to claim product endorsement by any accrediting, regulatory, or governmental agency.

1.7 Test Location

The EUT was fully tested by **Amber Helm Development L.C.**, headquartered at 92723 Michigan Hwy-152, Sister Lakes, Michigan 49047 USA. Table 1 lists all sites employed herein. Specific test sites utilized are also listed in the test results sections of this report where needed.

Table 1: Test Site List.

Description	Location	Quality Num.
OATS (3 meter)	3615 E Grand River Rd., Williamston, Michigan 48895	OATSC

1.8 Traceability and Equipment Used

Pertinent test equipment used for measurements at this facility is listed in Table 2. The quality system employed at Amber Helm Development L.C. has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, other recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

Table 2: Equipment List.

Description	Manufacturer/Model	SN	Quality Num.	Cal/Ver By / Date Due
Biconical	EMCO / 93110B	9802-3039	BICEMCO01	Keysight / Aug-2020
Log Periodic Antenna	EMCO / 3146	9305-3614	LOGEMCO01	Keysight / Aug-2020
BNC-BNC Coax	WRTL / RG58/U	001	CAB001-BLACK	AHD / Jul-2020
3.5-3.5MM Coax	PhaseFlex / PhaseFlex	001	CAB015-PURP	AHD / Jul-2020
Spectrum Analyzer	R & S / FSV30	101660	RSFSV30001	RS / Apr-2021
Quad Ridge Horn	Singer / A6100	C35200	HQR1TO18S01	Keysight / Aug-2020

2 Test Specifications and Procedures

2.1 Test Specification and General Procedures

The goal of Strattec Security Corporation is to demonstrate that the Equipment Under Test (EUT) complies with the Rules and/or Directives below. Detailed in this report are the results of testing the Strattec Security Corporation AM83STNA, AM83VLTA for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.231
Canada	ISED Canada	IC RSS-210v10/GENv5

It has been determined that the equipment under test is subject to the rules and directives above at the date of this testing. In conjunction with these rules and directives, the following specifications and procedures are followed herein to demonstrate compliance (in whole or in part) with these regulations.

ANSI C63.4:2014	”Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz”
ANSI C63.10:2013	”American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”
TP0102RA	”AHD Internal Document TP0102 - Radiated Emissions Test Procedure”
TP0106RC	”AHD Internal Document TP0106 - Emissions Measurement Procedures (above 40 GHz)”
ISED Canada	”The Measurement of Occupied Bandwidth”

3 Configuration and Identification of the Equipment Under Test

3.1 Description and Declarations

The equipment under test is a Remote Keyless Entry transceiver. The EUT is approximately 9.5 x 4 x 2 cm in dimension, and is depicted in Figure 1. It is powered by 3 VDC Lithium cell battery. In use, this device is a transceiver intended for remote control of automobile door locks, trunk, and remote start functionality. Table 3 outlines provider declared EUT specifications.



Figure 1: Photos of EUT.

Table 3: EUT Declarations.

General Declarations

Equipment Type:	RKE Transmitter
Country of Origin:	USA
Nominal Supply:	3 VDC
Oper. Temp Range:	-40°C to +85°C
Frequency Range:	312 – 318 MHz
Antenna Dimension:	Not Declared
Antenna Type:	PCB Trace
Antenna Gain:	Integral
Number of Channels:	3
Channel Spacing:	450 kHz
Alignment Range:	Not Declared
Type of Modulation:	FSK

United States

FCC ID Number:	OHT3731568
Classification:	DSC

Canada

IC Number:	5461A-3731568
Classification:	Remote Control Device, Vehicular Device

3.1.1 EUT Configuration

The EUT is configured for testing as depicted in Figure 2.

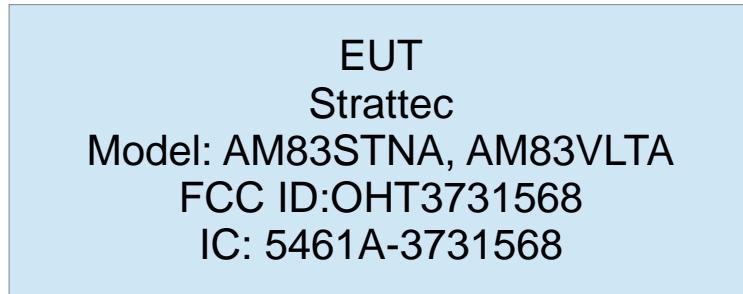


Figure 2: EUT Test Configuration Diagram.

3.1.2 Modes of Operation

This EUT is capable of transmitting in manual activated mode (normal button press) or in two automatically activated modes (Passive Entry Passive Start, Comfort) wherein it responds to a combined LF / UHF encoded signal. All three modes are evaluated herein, with the worst case (greatest) on time demonstrated to be in the RKE mode. The EUT employs between one (1) and three (3) sequentially operated channels in a given transmission set. Operating channels are at 314.00 MHz, 314.45 MHz, and 314.90 MHz.

3.1.3 Variants

There are two housing variants of the EUT, a Satin Chrome Key (HVIN: AM83STNA) and a Valet key (HVIN: AM83VLTA) that both employ the exact same PCB / circuitry.

3.1.4 Test Samples

Four samples of the EUT were provided, including one normal operating sample of each of two variants as well as one photo sample of each. A laptop computer with custom software and a control box was supplied for testing the various EUT modes of operation.

3.1.5 Functional Exerciser

Normal operating EUT functionality was verified by observation of transmitted signal.

3.1.6 Modifications Made

There were no modifications made to the EUT by this laboratory, however extensive pretesting was performed after which the manufacturer selected the final power settings for the device (Setting: x1E + Ant Tune On).

3.1.7 Production Intent

The EUT appears to be a production ready sample.

3.1.8 Declared Exemptions and Additional Product Notes

As the three channels employed are all within a 1 MHz operating band, only CW at the middle channel is fully evaluated for radiated emissions in line with FCC 15.31(m) and ISED regulations.

4 Emissions

4.1 General Test Procedures

4.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first pre-scanned in our screen room. Spectrum and modulation characteristics of all emissions are recorded. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.7 are employed. After pre-scan, emission measurements are made on the test site of record. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in relevant test standards are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All intentionally radiating elements that are not fixed-mounted in use are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. If the EUT is fixed-mounted in use, measurements are made with the device oriented in the manner consistent with installation and then emissions are recorded. If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied.

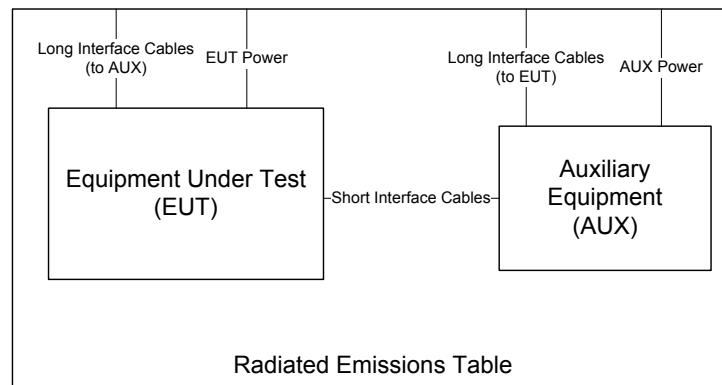


Figure 3: Radiated Emissions Diagram of the EUT.

For devices with intentional emissions below 30 MHz, a shielded loop antenna and/or E-field and H-Field broadband probes are used depending on the regulations. Shielded loops are placed at a 1 meter receive height at the desired measurement distance. For exposure in this band, the broadband probes employed are 10cm diameter single-axis shielded transducers and measurements are repeated and summed over three axes.

Emissions between 30 MHz and 1 GHz are measured using calibrated broadband antennas. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through 360° in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded. Emissions above 1 GHz are characterized using standard gain or broadband ridge-horn antennas on our OATS with a 4 × 5 m rectangle of ECCOSORB absorber covering the OATS ground screen and a 1.5m table height. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced. Photographs of the test setup employed are depicted in Figure 4.

Where regulations allow for direct measurement of field strength, power values (dBm) measured on the test receiver / analyzer are converted to dB μ V/m at the regulatory distance, using

$$E_{dist} = 107 + P_R + K_A - K_G + K_E - C_F$$

where P_R is the power recorded on spectrum analyzer, in dBm, K_A is the test antenna factor in dB/m, K_G is the combined pre-amplifier gain and cable loss in dB, K_E is duty correction factor (when applicable) in dB, and C_F is a distance conversion (employed only if limits are specified at alternate distance) in dB. This field strength value is then compared with the regulatory limit. If effective isotropic radiated power (EIRP) is computed, it is computed as

$$EIRP(dBm) = E_{3m}(dB\mu V/m) - 95.2.$$

When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported.



Figure 4: Radiated Emissions Test Setup Photograph(s).

4.1.2 Conducted Emissions Test Setup and Procedures**4.1.3 Power Supply Variation**

Tests at extreme supply voltages are made if required by the procedures specified in the test standard, and results of this testing are detailed in this report.

4.2 Intentional Emissions

4.2.1 Fundamental Emission Pulsed Operation

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Duty cycle is reported for all relevant modes of operation. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 4. Plots showing the measurements made to obtain these values are provided in Figure 5.

Table 4: Fundamental Emission Pulsed Operation.

Detector Pk	Span 0	IF Bandwidth 10 MHz	Video Bandwidth 10 MHz	Internal Frame Characteristics				Test Date: 22-Jan-20	Test Engineer: J. Burnett	EUT: Strattec AM800 Series	EUT Mode: FSK Modulated	Meas. Distance: 10 cm
				Min. Repetition Rate (sec)	Max. No. of Frames	Total Transmission Length (sec)	Max. Frame Length (ms)	Min. Frame Period (ms)	Frame Encoding			
R0	Test Freq. (MHz)	EUT Test Mode*	Overall Transmission									FCC/IC
R1	314.45	Manual Activated RKE (subfigure 5(a))	Min. Repetition Rate (sec)	single	6	0.490	207.50	>100ms	The EUT can transmit 6 frames on a single channel, or interleave those frames between the 3 channels. Worst case on time at a single channel is > 100 ms.	100.0	0.0	
R2	314.45	Auto Activated, PEPS (subfigure 5(b))	Max. No. of Frames	single	2	0.015	8.02	> 100ms	In the worse case, the EUT transmits two frames within a 8.02 ms window.	8.0	-20.0	
R3	314.45	Auto Activated, Comfort (subfigure 5(c))	Total Transmission Length (sec)	single	9	0.600	207.90	> 100ms	The EUT can transmit 6 long and 3 short frames on a single channel, or interleave frames between the 3 channels. Worst case on time at a single channel is > 100 ms.	100.0	0.0	
#	C1	C2	C3	C4	C5	C6	C7	C8		C9	C10	

Example Calculation: Lowest Duty (%) =(>100 ms) / 100 ms = 100 % on-time.

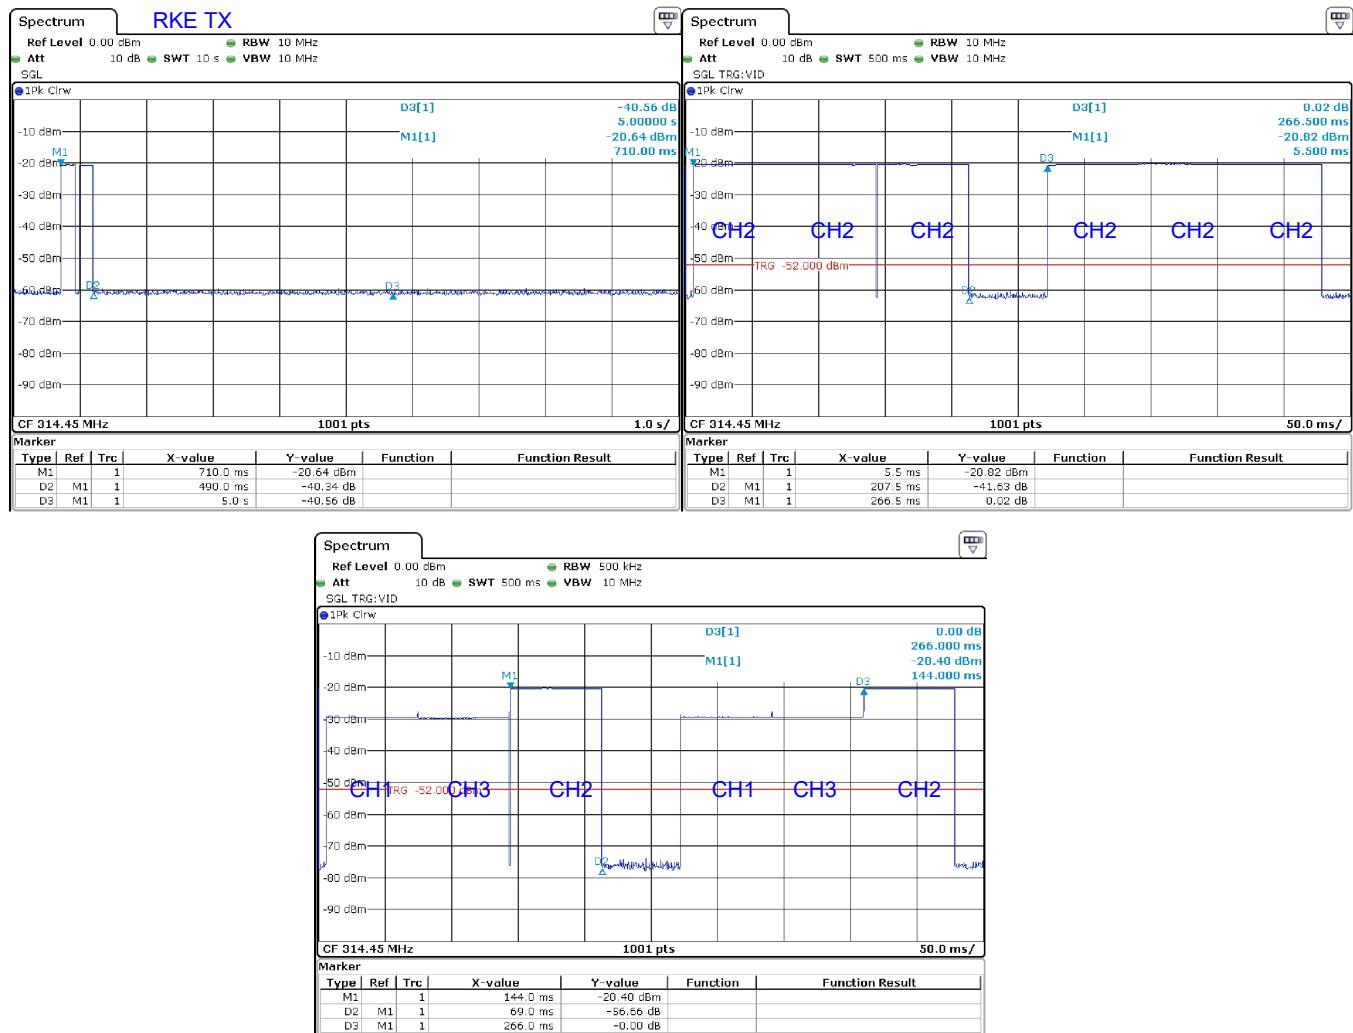


Figure 5(a): Fundamental Emission Pulsed Operation.

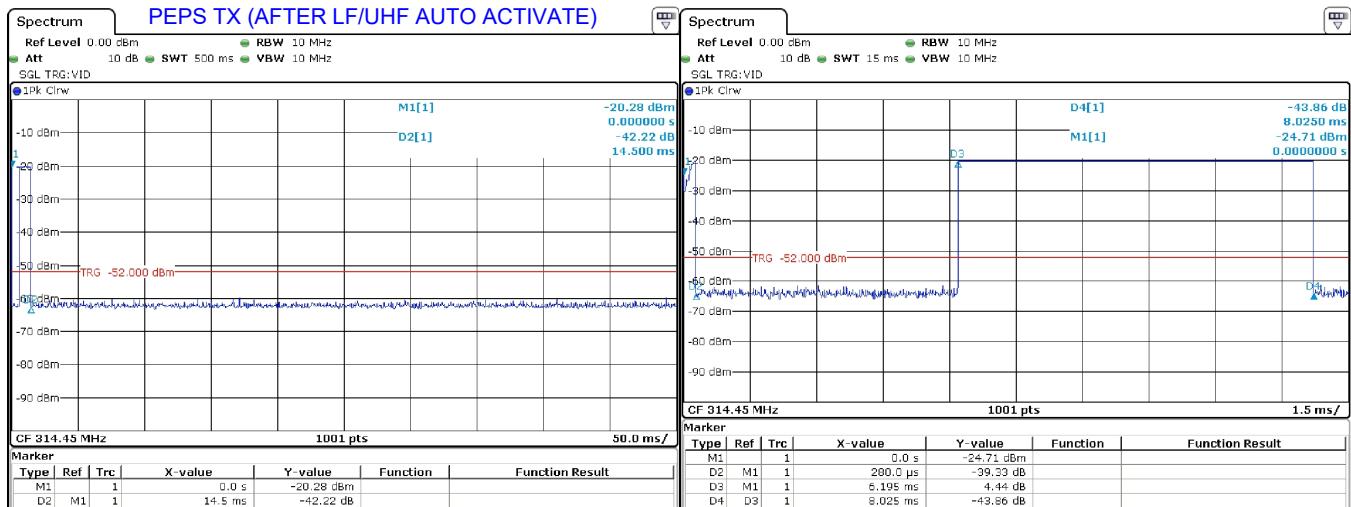


Figure 5(b): Fundamental Emission Pulsed Operation.

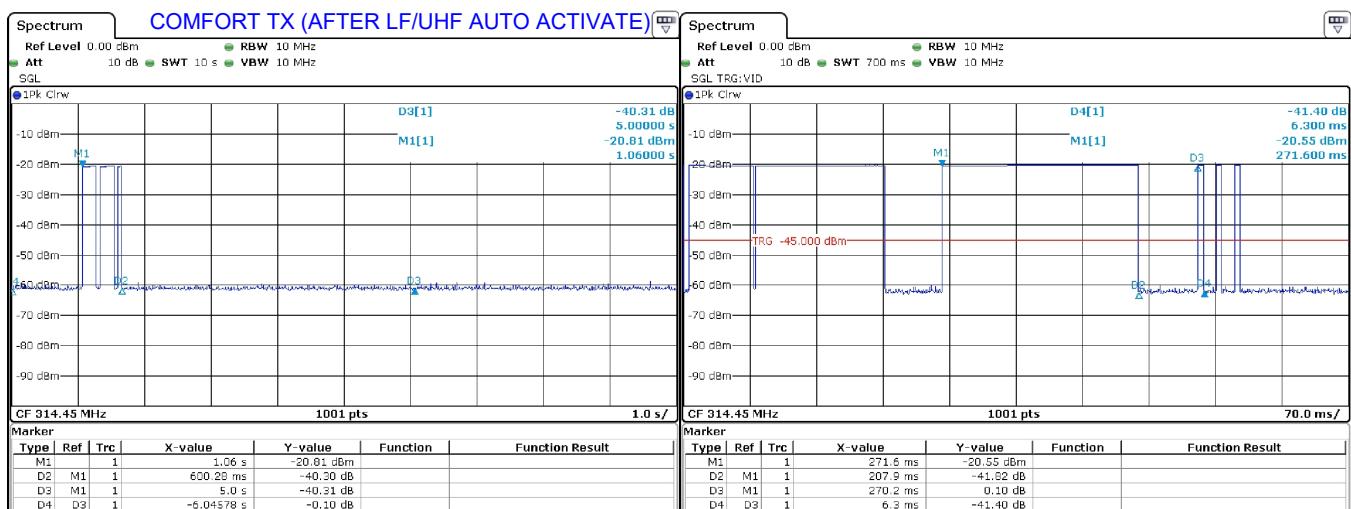


Figure 5(c): Fundamental Emission Pulsed Operation.

4.2.2 Fundamental Emission Bandwidth

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Emission bandwidth (EBW) of the EUT is measured with the device placed in the test mode(s) with the shortest available frame length and minimum frame spacing. The 20 dB EBW is measured as the max-held peak-detected signal when the IF bandwidth is greater than or equal to 1% of the receiver span. For complex modulations other than ASK and FSK, the 99% emission bandwidth per IC test procedures has a different result, and is also reported. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 5. Plots showing the measurements made to obtain these values are provided in Figure 6.

Table 5: Fundamental Emission Bandwidth.

Detector	IF Bandwidth	Video Bandwidth	Test Date:		22-Jan-20	
			Pk	10 kHz	30 kHz	Test Engineer:
						J. Brunett
						EUT: Strattec AM800 Series
						EUT Mode: FSK Modulated
						Meas. Distance: 10 cm
FCC/IC						
R0	Mode	Center Frequency (MHz)	20 dB EBW (MHz)	EBW Limit (MHz)	99% OBW (MHz)	3CH Sum 20dB OBW (MHz)
R1	FSK	314.00	0.064	0.785	0.066	0.194
R2	FSK	314.45	0.064	0.786	0.066	
R3	FSK	314.90	0.066	0.787	0.065	
#	C1	C2	C3	C4	C5	C7
						C8

(ROW) (COLUMN) NOTE:

R0 C8 Per KDB 926416, for FCC 15.231 non-sweeping devices, total bandwidth is sum of the individual occupied 20 dB bandwidths. At most the manuf. uses 3 channels. Device bandwidth is restricted to 0.0025 (.25%) of the center frequency. Three Maximum 20dB EBWs summation is $0.064 \text{ MHz} + 0.064 \text{ MHz} + 0.066 \text{ MHz} = 0.194 \text{ MHz}$

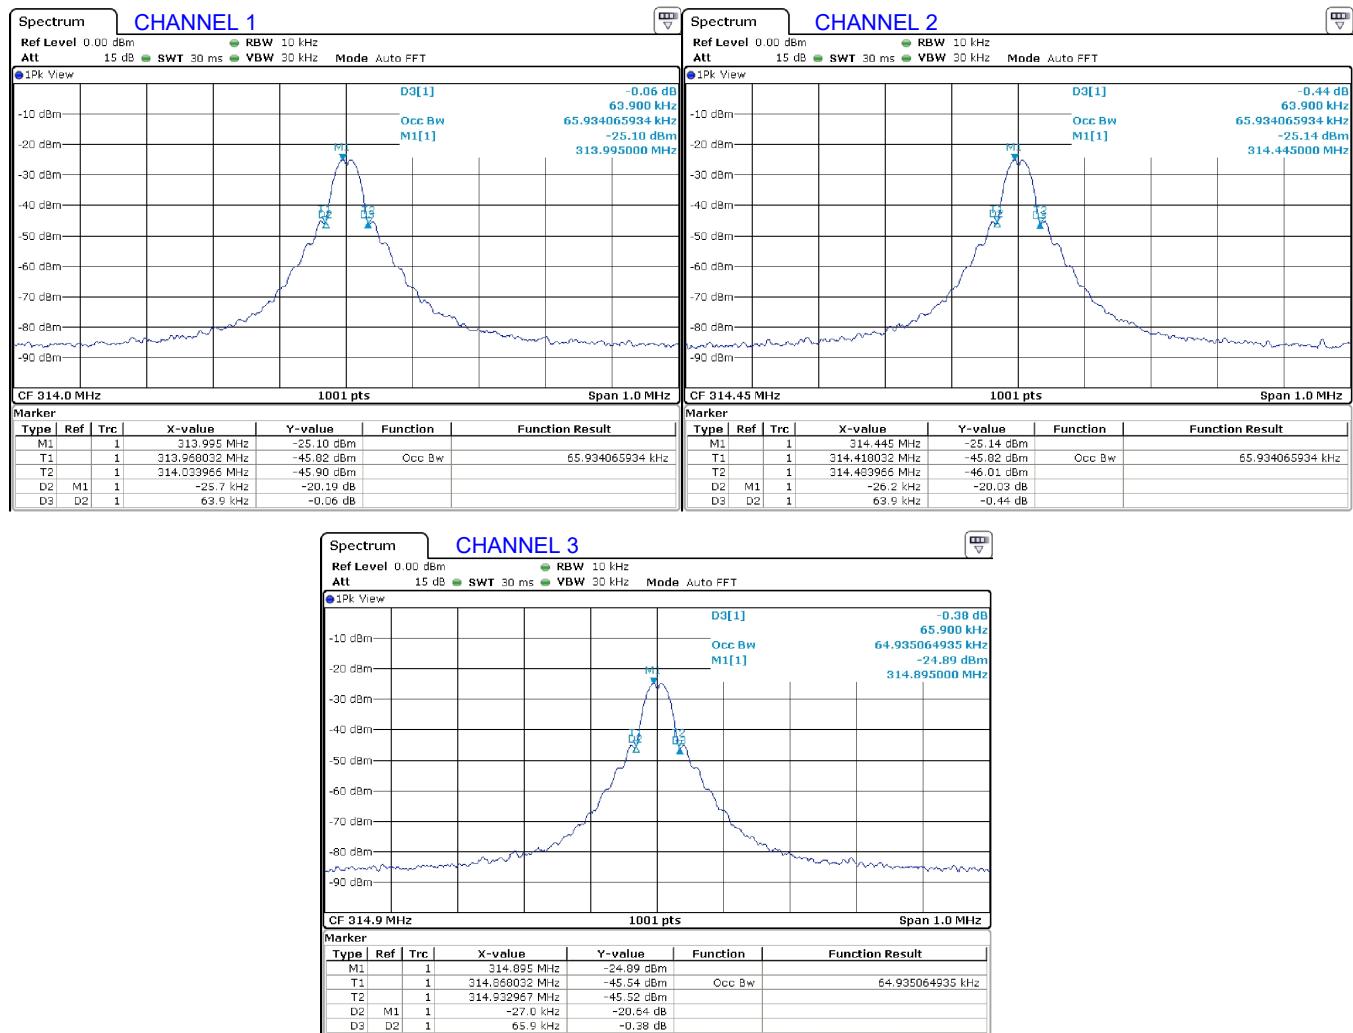


Figure 6: Fundamental Emission Bandwidth.

4.2.3 Fundamental Emission Field Strength

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Fundamental emissions are measured at the regulatory distance on our OATS. The test equipment employed includes RSFSV30001, LOGEMCO01.

Measurement Results The details and results of testing the EUT are summarized in Table 6.

Table 6: Fundamental Emission Field Strength.

		EUT Modes:		a1	AM83STNA (chrome), CW (x1E), Key In				a5																				
				a2	AM83STNA (chrome), CW (x1E), Key Out				a6																				
Test Date(s):		12/12/19		a3	AM83VLTA (plastic), CW (x1E), Key In				a7																				
Test Engineer:		J. Burnett		a4	AM83VLTA (plastic), CW (x1E), Key Out				a8																				
#	Frequency	Start	Stop	Temp. (C)	Table	MR Angle	DR	N/F	CF	EUT	Test Antenna	Cable	Receiver	Field Strength @ DR	EIRP	Details													
		MHz	MHz	%	deg	m	dB			Mode see table	Volt. (V)	Dim. cm	Ka	Kg	Rx Power Pk	Bandwidth													
										H/V	m	cm	dB/m	dB	Pk	RBW	VBW	Meas.											
														dBm	MHz														
R0	SETUP	OATSC				AM83STNA				EMCOLOG		CAB001	RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient														
R1	314.5	314.5	2 / 72	0.0	3.0	3.0		0.0		a1	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	75.5	95.6	95.6	75.5	75.6	-19.6	.1		
R2	314.5	314.5	2 / 72	90.0	3.0	3.0		0.0		a1	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	73.7	95.6	95.6	73.7	75.6	-21.4	1.9		
R3	314.5	314.5	2 / 72	90.0	3.0	3.0		0.0		a1	3.0	8.0																	
R4	SETUP	OATSC				AM83STNA				EMCOLOG		CAB001	RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient														
R5	314.5	314.5	2 / 72	0.0	3.0	3.0		0.0		a2	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	75.1	95.6	95.6	75.1	75.6	-20.0	.5		
R6	314.5	314.5	2 / 72	90.0	3.0	3.0		0.0		a2	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	73.3	95.6	95.6	73.3	75.6	-21.8	2.3		
R7																													
R8	SETUP	OATSC				AM83VLTA				EMCOLOG		CAB001	RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient														
R9	314.5	314.5	2 / 72	0.0	3.0	3.0		0.0		a3	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	75.0	95.6	95.6	75.0	75.6	-20.1	.6		
R10	314.5	314.5	2 / 72	90.0	3.0	3.0		0.0		a3	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	73.2	95.6	95.6	73.2	75.6	-21.9	2.4		
R11	SETUP	OATSC				AM83VLTA				EMCOLOG		CAB001	RSFSV30001		NOTES: H-POL - FLAT, V-POL SIDE Worst Case Orient														
R12	314.5	314.5	2 / 72	0.0	3.0	3.0		0.0		a4	3.0	8.0	H	1.0	100.0	14.1	-0.1		0.12	0.30	74.6	95.6	95.6	74.6	75.6	-20.5	1.0		
R13	314.5	314.5	2 / 72	90.0	3.0	3.0		0.0		a4	3.0	8.0	V	2.0	100.0	14.1	-0.1		0.12	0.30	72.8	95.6	95.6	72.8	75.6	-22.3	2.8		
R14																													
R15																													
R16																													
R17																													
R18																													
R19																													
R20																													
R21																													
R22																													
R23																													
R24																													
R25																													
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29
(ROW)	(COLUMN)	NOTE:																											
R0	C5	MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																											
R0	C6	DR is the regulatory Desired Range measurement distance.																											
R0	C7	N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) when applicable.																											
R0	C8	CF is computed using a 20 dB/decade Decay Rate.																											
R0	C18/19	When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable losses are included directly in SA settings and Pr is not reported.																											

4.3 Unintentional Emissions

4.3.1 Transmit Chain Spurious Emissions

Test Setup & Procedure The test equipment and facilities were setup in accordance with the standards and procedures listed in Section 2.1. Environmental conditions were set at the appropriate temperature and thermal balance was checked with a thermocouple based probe. Spurious radiated emissions measurements are performed to 10 times the highest fundamental operating frequency. The test equipment employed includes RSFSV30001, LOGEMCO01, HQR1TO18S01.

Measurement Results The details and results of testing the EUT are summarized in Table 7.

Table 7: Transmit Chain Spurious Emissions.

EUT Modes:				AM83STNA (chrome), CW (x1E), Key In										a5																
Test Date(s): 12/12/16/2019				AM83VLTA (plastic), CW (x1E), Key In										a6																
Test Engineer: J. Brunett														a7																
R0		Frequency		Site		EUT		Test Antenna		Cable		Receiver		Field Strength @ DR		EIRP		Details												
		Start	Stop	Temp. (C)	Table Angle	MR	DR	N/F	CF	Mode see table	Volt.	Dim	Pol.	Ant.	Height	Dim.	Ka	Kg	Rx Power Pk	Bandwidth RBW	Meas.	Pk	Qpk / Avg	Calc.	Limit	USA	CAN	Calc.	dBm	Pass
MHz		MHz		Hum. %		deg		m		dB		(V)		cm		H/V		m		cm		dB/m		dB		dBM		dB		
R1		SETUP		OATSC		AM83STNA		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - SIDE, V-POL END Worst Case Orient																
R2	629.8	629.8	2/72	0.0	3.0	3.0		0.0	a1	3.0	8.0	H	1.2	100.0	10.5	-0.1		0.12	0.30	28.0	75.6	75.6	28.0	55.6	55.6	-67.2		27.6		
R3	629.8	629.8	2/72	90.0	3.0	3.0		0.0	a1	3.0	8.0	V	1.4	100.0	10.5	-0.1		0.12	0.30	29.1	75.6	75.6	29.1	55.6	55.6	-66.1		26.5		
R4	944.7	944.7	2/72	0.0	3.0	3.0		0.0	a1	3.0	8.0	H	1.0	100.0	16.7	-0.2		0.12	0.30	39.4	75.6	75.6	39.4	55.6	55.6	-55.8		16.2		
R5	944.7	944.7	2/72	90.0	3.0	3.0		0.0	a1	3.0	8.0	V	1.1	100.0	16.7	-0.2		0.12	0.30	38.2	75.6	75.6	38.2	55.6	55.6	-57.0		17.4		
R6																														
R7		SETUP		OATSC		AM83STNA		HQRLTO18S01		CAB015		RSFSV30001		NOTES: Max all EUT orientations and test antenna polarizations.																
R8	1259.2	1259.2	2/72	all	3.0	3.0	0.2	0.0	a1	3.0	8.0	H/V	all	15.0	21.5	-0.2		1.00	3.00	36.1	74.0	74.0	36.1	54.0	54.0	-59.1		17.9		
R9	1573.6	1573.6	2/72	all	3.0	3.0	0.2	0.0	a1	3.0	8.0	H/V	all	15.0	25.2	-0.2		1.00	3.00	27.8	74.0	74.0	27.8	54.0	54.0	-67.4		26.2		
R10	1888.1	1888.1	2/72	all	3.0	3.0	0.3	0.0	a1	3.0	8.0	H/V	all	15.0	27.9	-0.2		1.00	3.00	31.8	74.0	74.0	31.8	54.0	54.0	-63.4		22.2		
R11	2202.5	2202.5	2/72	all	3.0	3.0	0.3	0.0	a1	3.0	8.0	H/V	all	15.0	29.7	-0.3		1.00	3.00	36.3	74.0	74.0	36.3	54.0	54.0	-58.9		17.7		
R12	2517.0	2517.0	2/72	all	3.0	3.0	0.4	0.0	a1	3.0	8.0	H/V	all	15.0	30.9	-0.3		1.00	3.00	39.9	74.0	74.0	39.9	54.0	54.0	-55.3		14.1		
R13	2831.4	2831.4	2/72	all	3.0	3.0	0.4	0.0	a1	3.0	8.0	H/V	all	15.0	31.6	-0.3		1.00	3.00	37.8	74.0	74.0	37.8	54.0	54.0	-57.4		16.2		
R14	3145.9	3145.9	2/72	all	3.0	3.0	0.5	0.0	a1	4.0	8.0	H/V	all	15.0	31.8	-0.3		1.00	3.00	38.5	74.0	74.0	38.5	54.0	54.0	-56.7		15.5		
R15																														
R16		SETUP		OATSC		AM83VLTA		EMCOLOG		CAB001		RSFSV30001		NOTES: H-POL - SIDE, V-POL END Worst Case Orient																
R17	629.8	629.8	2/72	0.0	3.0	3.0		0.0	a3	3.0	8.0	H	1.2	100.0	19.5	-0.1		0.12	0.30	30.6	75.6	75.6	30.6	55.6	55.6	-68.7		25.0		
R18	629.8	629.8	2/72	90.0	3.0	3.0		0.0	a3	3.0	8.0	V	1.4	100.0	19.5	-0.1		0.12	0.30	31.2	75.6	75.6	31.2	55.6	55.6	-68.1		24.4		
R19	944.7	944.7	2/72	0.0	3.0	3.0		0.0	a3	3.0	8.0	H	1.0	100.0	23.1	-0.2		0.12	0.30	40.2	75.6	75.6	40.2	55.6	55.6	-55.0		15.4		
R20	944.3	944.3	2/72	90.0	3.0	3.0		0.0	a3	3.0	8.0	H	1.1	100.0	23.1	-0.2		0.12	0.30	38.3	75.6	75.6	38.3	55.6	55.6	-56.9		17.3		
R21																														
R22		SETUP		OATSC		AM83VLTA		HQRLTO18S01		CAB015		RSFSV30001		NOTES: Max all EUT orientations and test antenna polarizations.																
R23	1258.7	1258.7	2/72	all	3.0	3.0	0.2	0.0	a3	3.0	8.0	H/V	all	15.0	21.5	-0.2		1.00	3.00	35.6	74.0	74.0	35.6	54.0	54.0	-59.6		18.4		
R24	1573.2	1573.2	2/72	all	3.0	3.0	0.2	0.0	a3	3.0	8.0	H/V	all	15.0	25.2	-0.2		1.00	3.00	34.1	74.0	74.0	34.1	54.0	54.0	-61.1		19.9		
R25	1887.6	1887.6	2/72	all	3.0	3.0	0.3	0.0	a3	3.0	8.0	H/V	all	15.0	27.9	-0.2		1.00	3.00	37.8	74.0	74.0	37.8	54.0	54.0	-57.4		16.2		
R26	2202.1	2202.1	2/72	all	3.0	3.0	0.3	0.0	a3	3.0	8.0	H/V	all	15.0	29.7	-0.3		1.00	3.00	36.3	74.0	74.0	36.3	54.0	54.0	-58.9		17.7		
R27	2516.5	2516.5	2/72	all	3.0	3.0	0.4	0.0	a3	3.0	8.0	H/V	all	15.0	30.9	-0.3		1.00	3.00	35.7	74.0	74.0	35.7	54.0	54.0	-59.5		18.3		
R28	2831.0	2831.0	2/72	all	3.0	3.0	0.4	0.0	a3	4.0	8.0	H/V	all	15.0	31.6	-0.3		1.00	3.00	37.6	74.0	74.0	37.6	54.0	54.0	-57.6		16.4		
R29	3145.4	3145.4	2/72	all	3.0	3.0	0.5	0.0	a3	4.0	8.0	H/V	all	15.0	31.8	-0.3		1.00	3.00	38.9	74.0	74.0	38.9	54.0	54.0	-56.3		15.1		
R30																														
#	C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	C17	C18	C19	C20	C21	C22	C23	C24	C25	C26	C27	C28	C29	
(ROW)		(COLUMN)		NOTE:																										
R0		C5	MR is Measurement Range, which is reduced from DR to achieve necessary SNR.																											
R0		C6	DR is the regulatory Desired Range measurement distance.																											
R0		C7	N/F is Near-Field / Far-Field distance computed for max of EUT Antenna Dimension (C10) and Test Antenna dimension (C12), where applicable.																											
R0		C8	CF is computed using a 20 dB/decade Decay Rate.																											
R0		C18/19	When E-field or EIRP is reported directly from Spectrum Analyzer, Antenna Factors and Cable Losses are included directly in SA settings and P is not reported.																											

4.3.2 Radiated Digital Spurious

The results for the measurement of digital spurious emissions are not reported herein as all digital emissions were greater than 20 dB below the regulatory limit. Radiation from digital components was measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

5 Measurement Uncertainty and Accreditation Documents

The maximum values of measurement uncertainty for the laboratory test equipment and facilities associated with each test are given in the table below. This uncertainty is computed for a 95.45% confidence level based on a coverage factor of $k = 2$.

Table 8: Measurement Uncertainty.

Measured Parameter	Measurement Uncertainty [†]
Radio Frequency Conducted Emm. Amplitude	$\pm(f_{Mkr}/10^7 + RBW/10 + (SPN/(PTS - 1))/2 + 1 \text{ Hz})$ $\pm1.9 \text{ dB}$
Radiated Emm. Amplitude (30 – 200 MHz)	$\pm4.0 \text{ dB}$
Radiated Emm. Amplitude (200 – 1000 MHz)	$\pm5.2 \text{ dB}$
Radiated Emm. Amplitude ($f > 1000 \text{ MHz}$)	$\pm3.7 \text{ dB}$

[†]Ref: CISPR 16-4-2:2011+A1:2014



Figure 7: Accreditation Documents