



RF TEST REPORT

Report No.: SET2014-01808
Product: Toughshield
FCC ID: OHV-R750
Model No.: R750
Applicant: Toughshield devices ltd
Address: 2nd Floor, Belgravia House, 34-44 Circular Road, Douglas, Isle of Man. IM1 1AE
Issued by: CCIC-SET
Lab Location: Electronic Testing Building, Shahe Road , Xili, Nanshan District, Shenzhen China
Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 157 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product.....: Toughshield

Brand Name: Toughshield

Trade Name: Toughshield

Applicant.....: Toughshield devices ltd


Applicant Address.....: 2nd Floor, Belgravia House, 34-44 Circular Road, Douglas,
Isle of Man. IM1 1AE

Manufacturer.....: Toughshield devices ltd


Manufacturer Address.....: 2nd Floor, Belgravia House, 34-44 Circular Road, Douglas,
Isle of Man. IM1 1AE

Test Standards: 47 CFR Part 2(10-1-12 Edition) Frequency Allocations and
Radio Treaty Matters; General Rules and Regulations
47 CFR Part 22(10-1-12 Edition) Public Mobile Services
47 CFR Part 24(10-1-12 Edition) Personal Communications
Services

Test Result.....: PASS

Tested by:  2014-03-05

Lu Lei, Test Engineer

Reviewed by.....:  2014-03-05

Shuangwen Zhang, Senior EGINEER

Product.....:  2014-03-05

Wu Li'an, Manager



Table of Contents

1. GENERAL INFORMATION	4
1.1 EUT Description	4
1.2 Test Standards and Results	6
1.3 Facilities and Accreditations	7
2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS	8
2.1 Conducted RF Output Power	8
2.2 Peak to Average Ratio.....	20
2.3 99% Occupied Bandwidth	26
2.4 Frequency Stability	49
2.5 Conducted Out of Band Emissions	56
2.6 Band Edge.....	94
2.7 Transmitter Radiated Power (EIRP/ERP)	108
2.8 Radiated Out of Band Emissions	119

Change History		
Issue	Date	Reason for change
1.0	March 05, 2014	First edition

middle and highest channel numbers (ARFCHs) used and tested in this report are separately 512 (1850.2MHz), 661 (1880.0MHz) and 810 (1909.8MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA 850MHz band used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4183(836.6MHz) and 4233 (846.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA 1900MHz band used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22 and Part 24 for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 2 (10-1-12 Edition)	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	47 CFR Part 22 (10-1-12 Edition)	Public Mobile Services
3	47 CFR Part 24 (10-1-12 Edition)	Personal Communications Services

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	2.1046	Conducted RF Output Power	PASS
2	24.232(d)	Peak to average radio	PASS
2	2.1049 22.917 24.238	99% Occupied Bandwidth	PASS
3	2.1055 22.355 24.235	Frequency Stability	PASS
4	2.1051 2.1057 22.917 24.238	Conducted Out of Band Emissions	PASS
5	2.1051 2.1057 22.917 24.238	Band Edge	PASS
6	22.913 24.232	Transmitter Radiated Power (EIPR/ERP)	PASS
7	2.1053 2.1057 22.917 24.238	Radiated Out of Band Emissions	PASS

NOTE: Measurement method according to TIA/EIA 603.D-2010



1.3 Facilities and Accreditations

1.3.1 Test Facilities

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4(m) fully anechoic chamber was used for the radiated spurious emissions test.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% - 60%
Atmospheric Pressure (kPa):	86KPa - 106KPa

2. 47 CFR PART 2, PART 22H & 24E REQUIREMENTS


2.1 Conducted RF Output Power

2.1.1 Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2 Test Description

1. Test Setup:

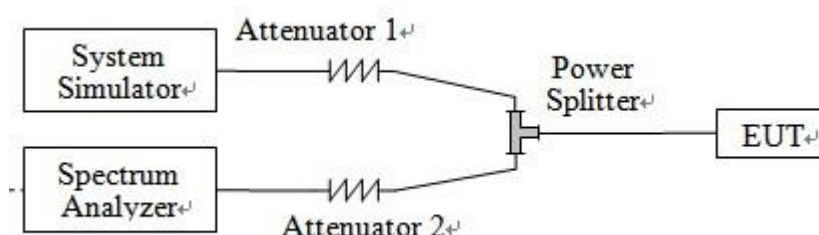

The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Due Date
System Simulator	Agilent	E5515C	GB43130131	2014.06.10
Spectrum Analyzer	Agilent	E7405A	US44210471	2014.06.10
Power Meter	Agilent	E4418B	GB43318055	2014.06.10
Power Sensor	Agilent	8482A	MY41091706	2014.06.10
Power Splitter	Weinschel	1506A	NW521	2014.06.10
Attenuator 1	Resnet	20dB	(n.a.)	2014.06.10
Attenuator 2	Resnet	3dB	(n.a.)	2014.06.10

2.1.3 Test Results

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

1. GSM Model Test Verdict:


Band	Channel	Frequency (MHz)	Measured Output Power		Verdict
			dBm	Refer to Plot	
GSM 850MHz	128	824.2	31.58	Plot A1 to A3	PASS
	190	836.6	32.35		PASS
	251	848.8	33.16		PASS
GSM 1900MHz	512	1850.2	30.31	Plot B1 to B3	PASS
	661	1880.0	30.47		PASS
	810	1909.8	29.20		PASS
GPRS 850MHz	128	824.2	30.18	Plot C1 to C3 ^{Note 1}	PASS
	190	836.6	30.89		PASS
	251	848.8	31.69		PASS
GPRS 1900MHz	512	1850.2	28.83	Plot D1 to D3 ^{Note 1}	PASS
	661	1880.0	29.03		PASS
	810	1909.8	27.77		PASS
EGPRS 850MHz	128	824.2	31.60	Plot E1 to E3 ^{Note 1}	PASS
	190	836.6	32.37		PASS
	251	848.8	33.25		PASS
EGPRS 1900MHz	512	1850.2	30.36	Plot F1 to F3 ^{Note 1}	PASS
	661	1880.0	30.51		PASS
	810	1909.8	29.24		PASS

Note 1: For the GPRS and EGPRS model, all the slots were tested and just the worst data was record in this report.


2. WCDMA Model Test Verdict:

Item	band	WCDMA 850			WCDMA 1900		
	ARFCN	4132	4175	4233	9262	9400	9538
	subtest	dBm			dBm		
5.2(WCDMA)	non	23.52	23.60	23.58	23.35	23.52	22.90
HSDPA	1	23.58	23.63	23.31	23.33	23.33	22.89
	2	23.53	23.61	23.52	23.28	23.26	22.84
	3	22.57	22.45	22.23	22.74	22.71	22.36
	4	23.04	23.02	22.21	22.77	22.72	22.34
HSUPA	1	23.50	23.61	23.55	23.28	23.28	22.89
	2	22.66	22.72	22.67	21.26	21.23	20.87
	3	22.58	22.60	22.56	22.19	22.20	21.88
	4	22.63	22.71	22.53	21.23	21.29	20.86
	5	23.55	23.61	23.60	23.24	23.25	22.85
HSPA+	1	23.50	23.51	23.42	23.26	23.29	22.89
Note:	The Conducted RF Output Power test of WCDMA/HSDPA /HSUPA/HSPA+ was tested by power meter.						


3. GSM Model Test Plots:

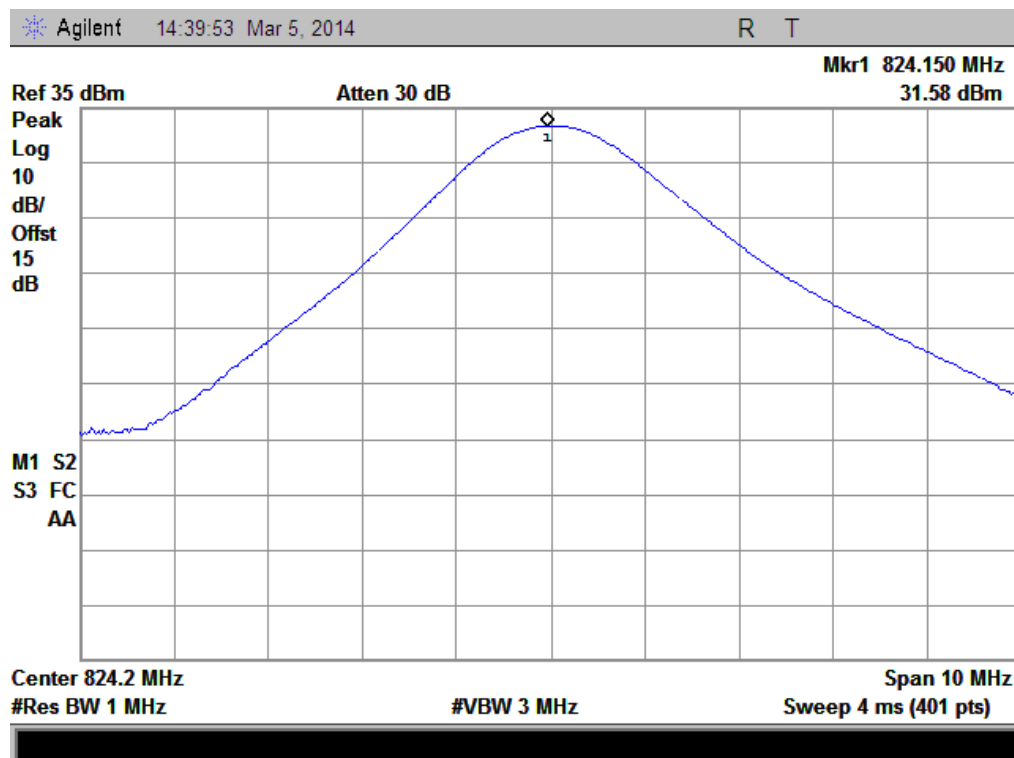


(Plot A1: GSM 850MHz Channel = 128)

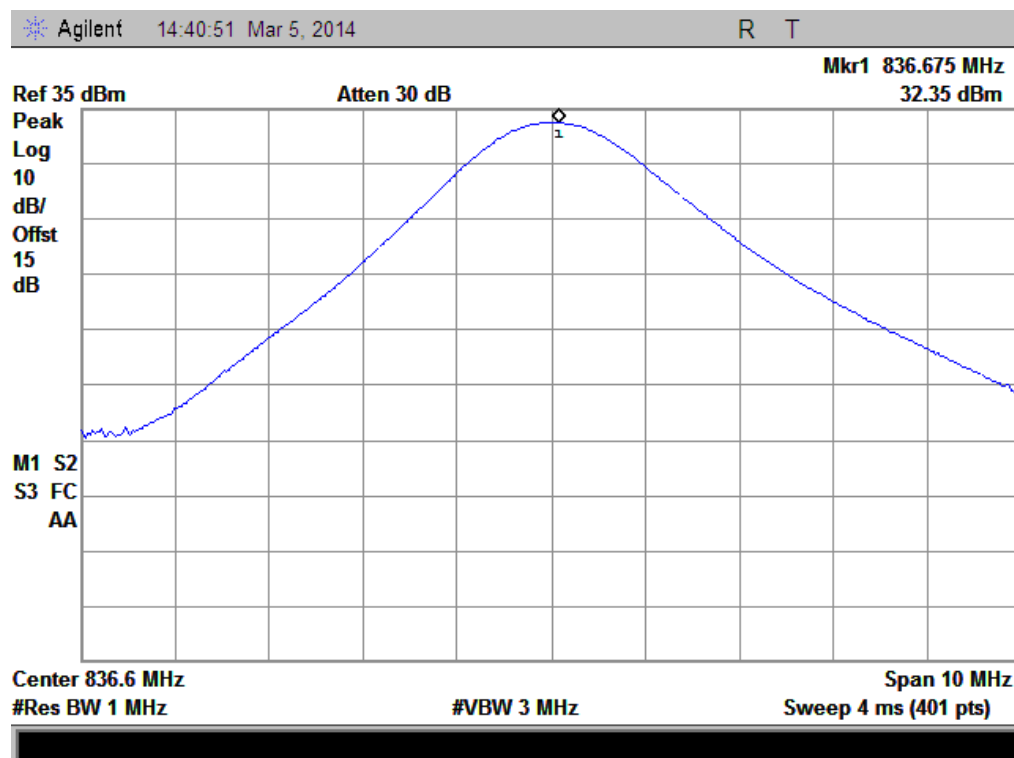


(Plot A2: GSM 850MHz Channel = 190)

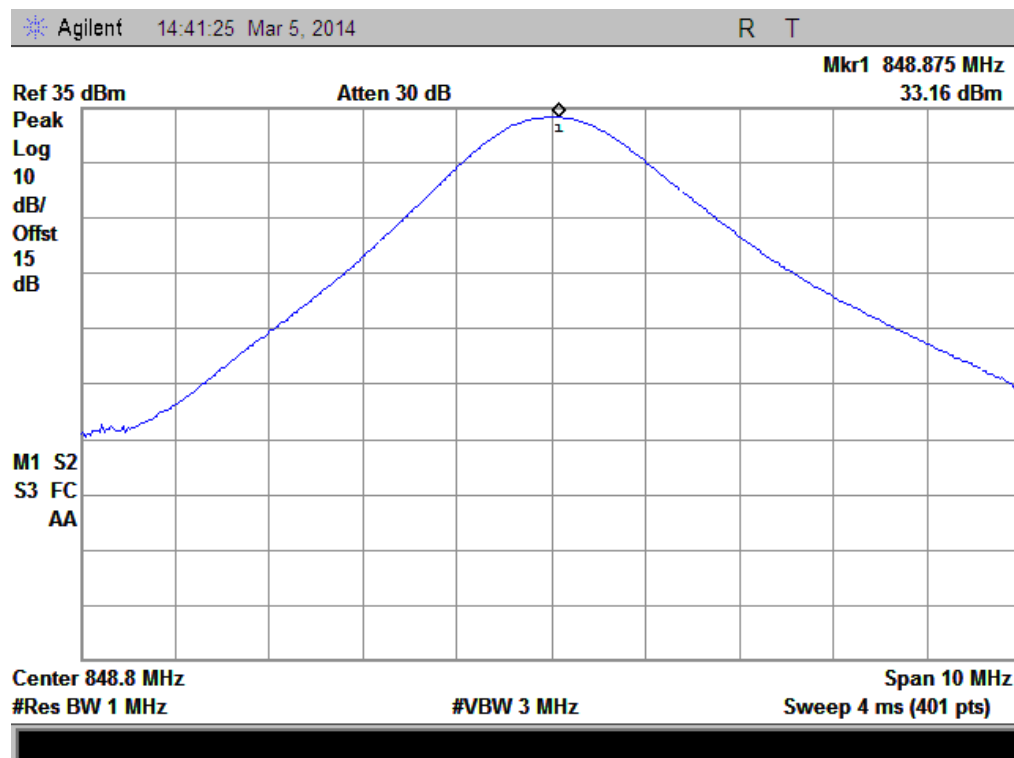


(Plot A3: GSM 850MHz Channel = 251)

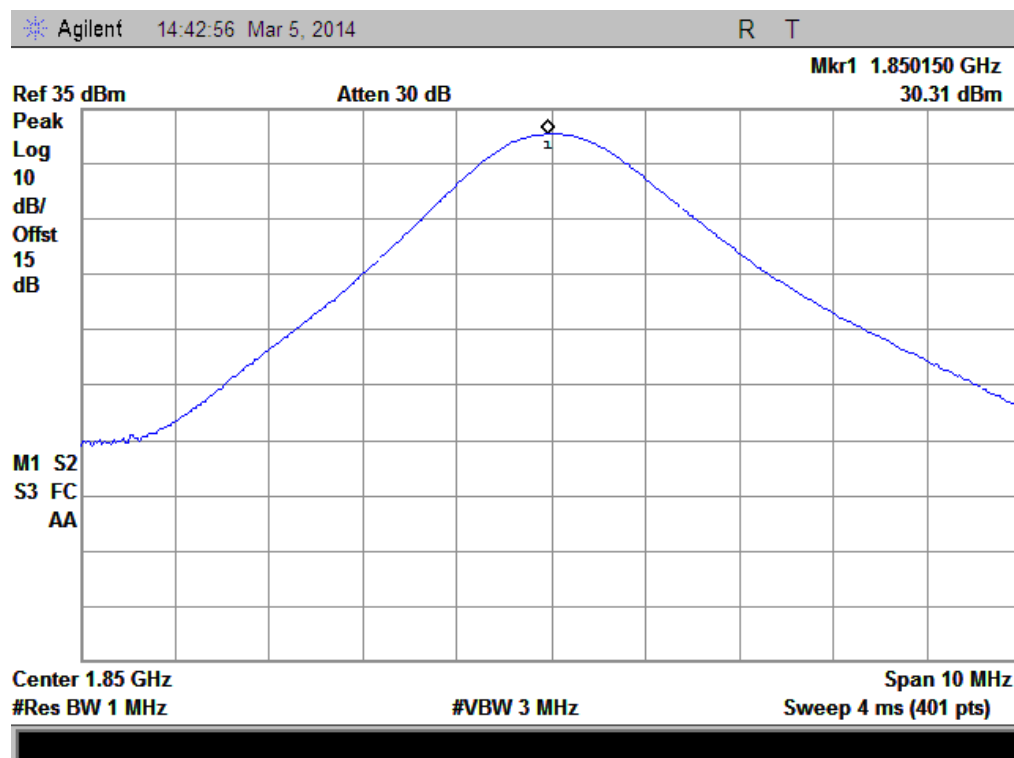

(Plot B1: GSM 1900MHz Channel = 512)


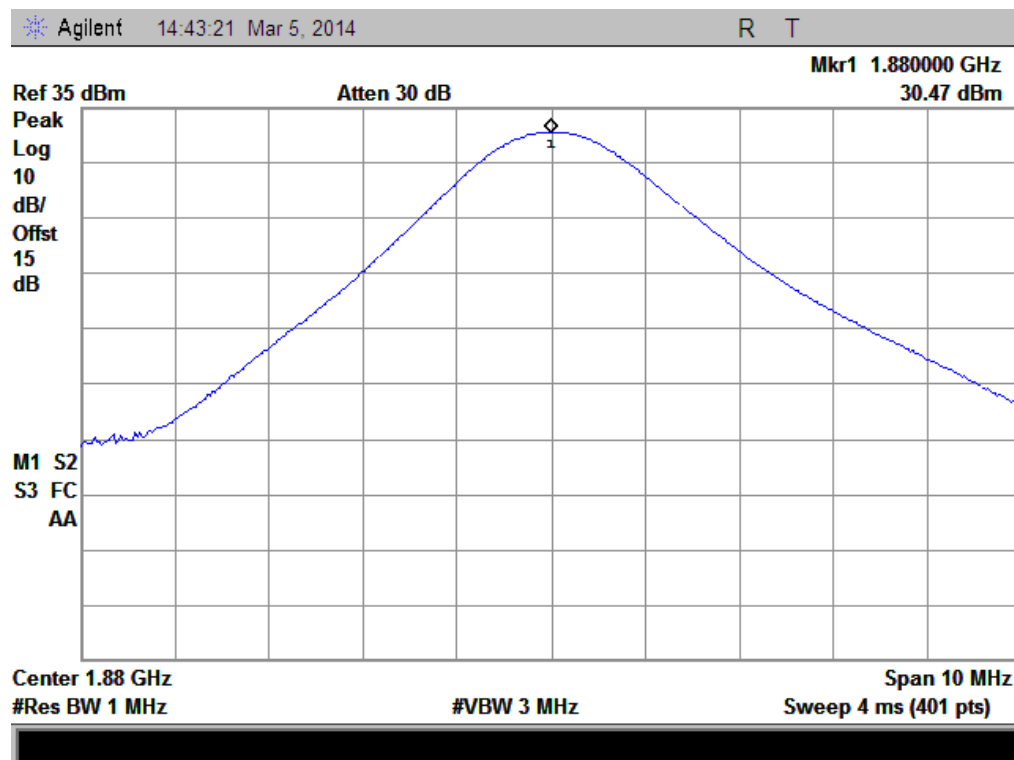



(Plot B2: GSM 1900MHz Channel= 661)

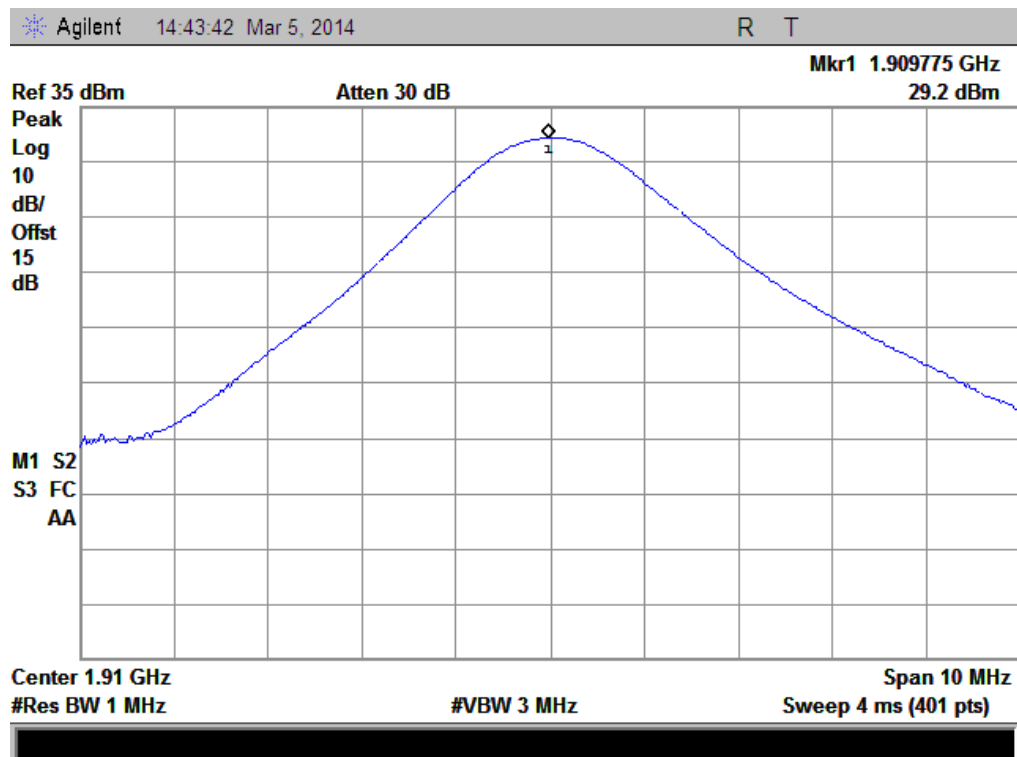


(Plot B3: GSM 1900MHz Channel= 810)

4. GPRS Model Test Plots:

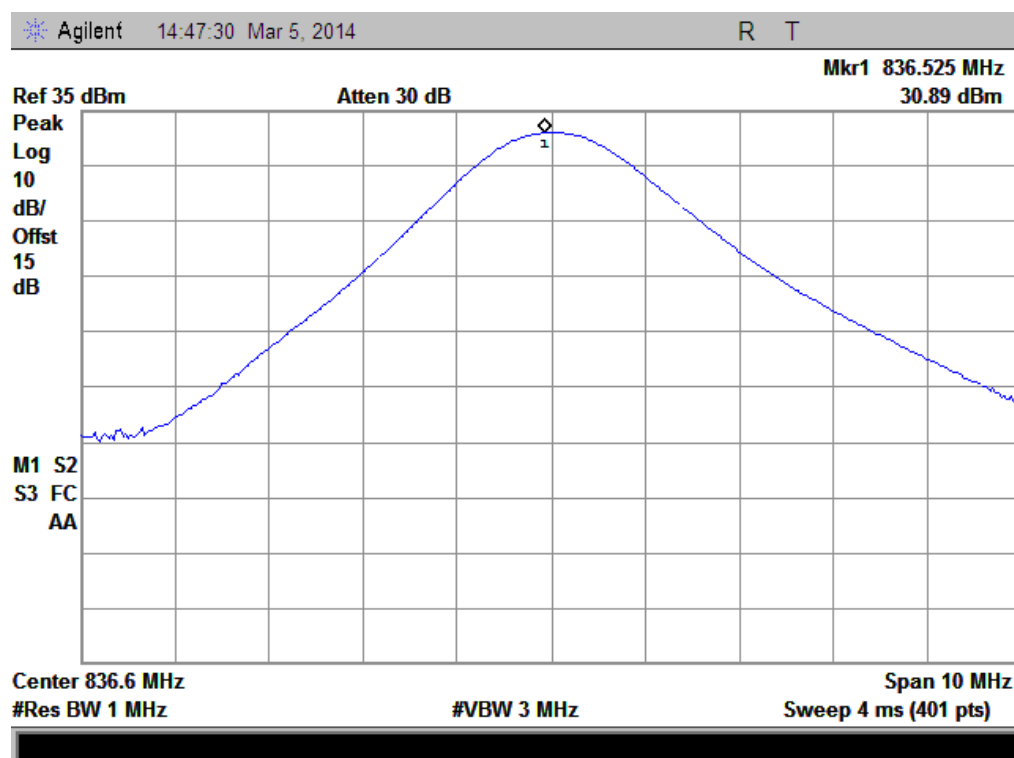
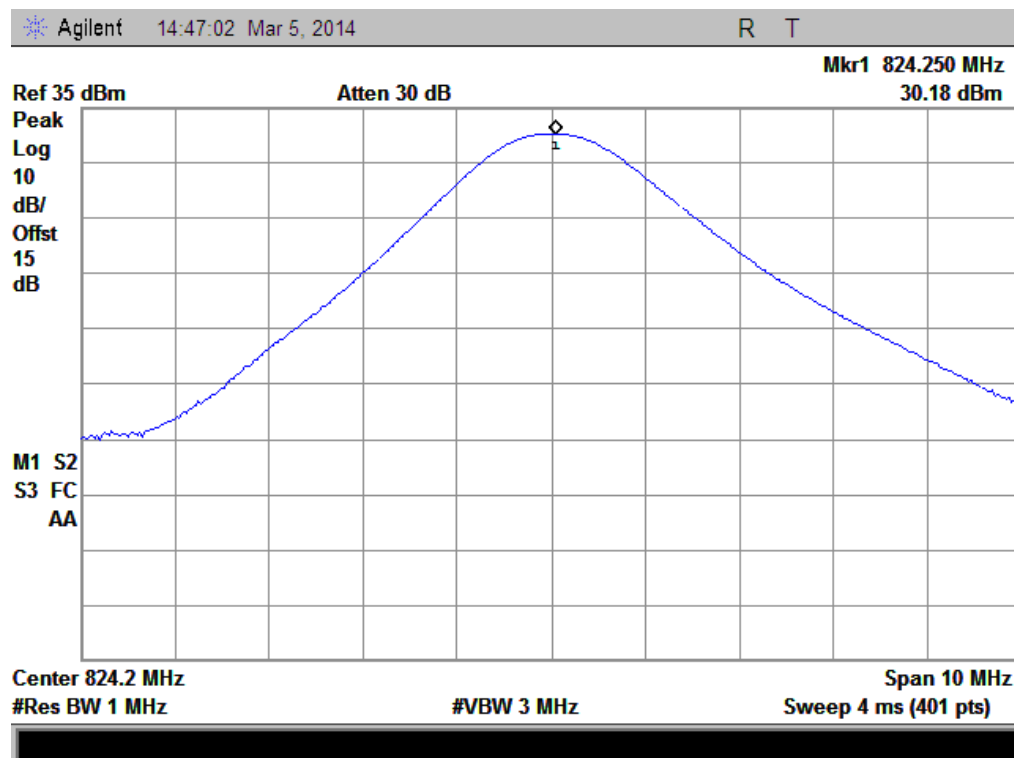


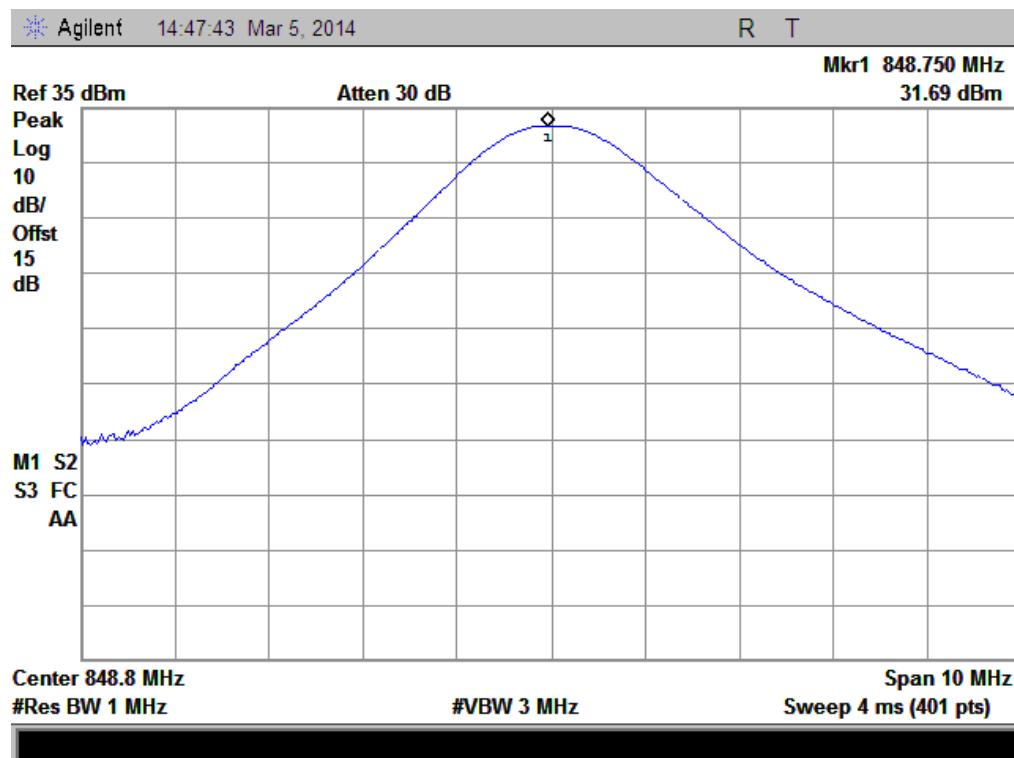


(Plot C3: GPRS 850MHz Channel= 251)

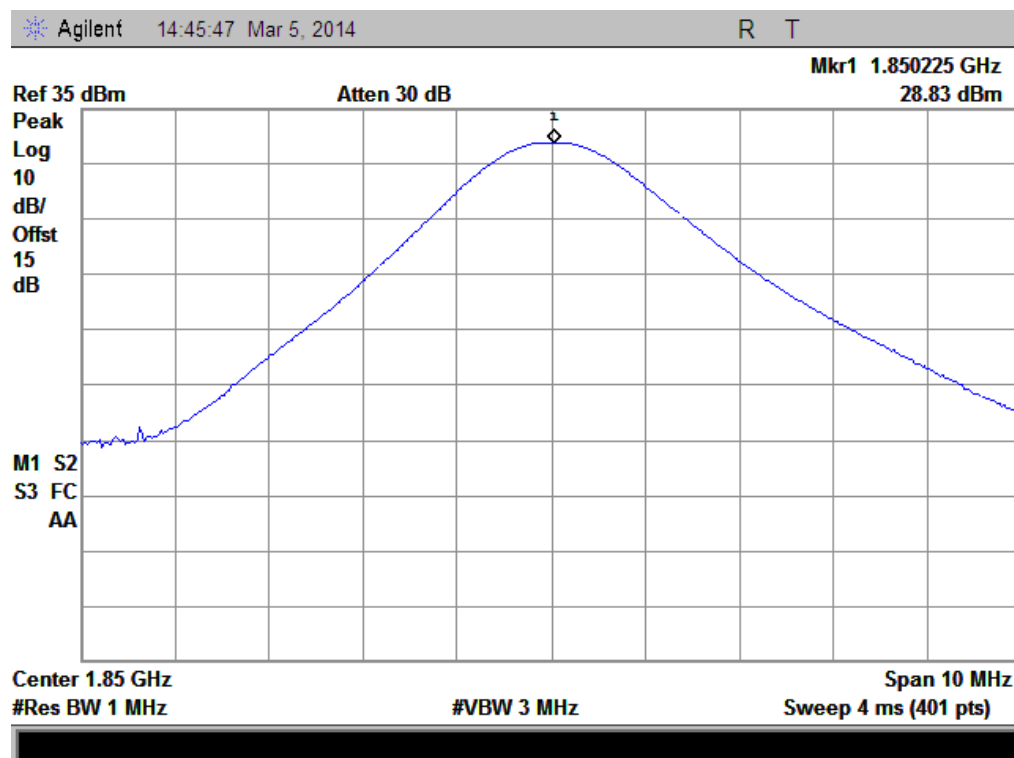


(Plot D1: GPRS 1900MHz Channel= 512)

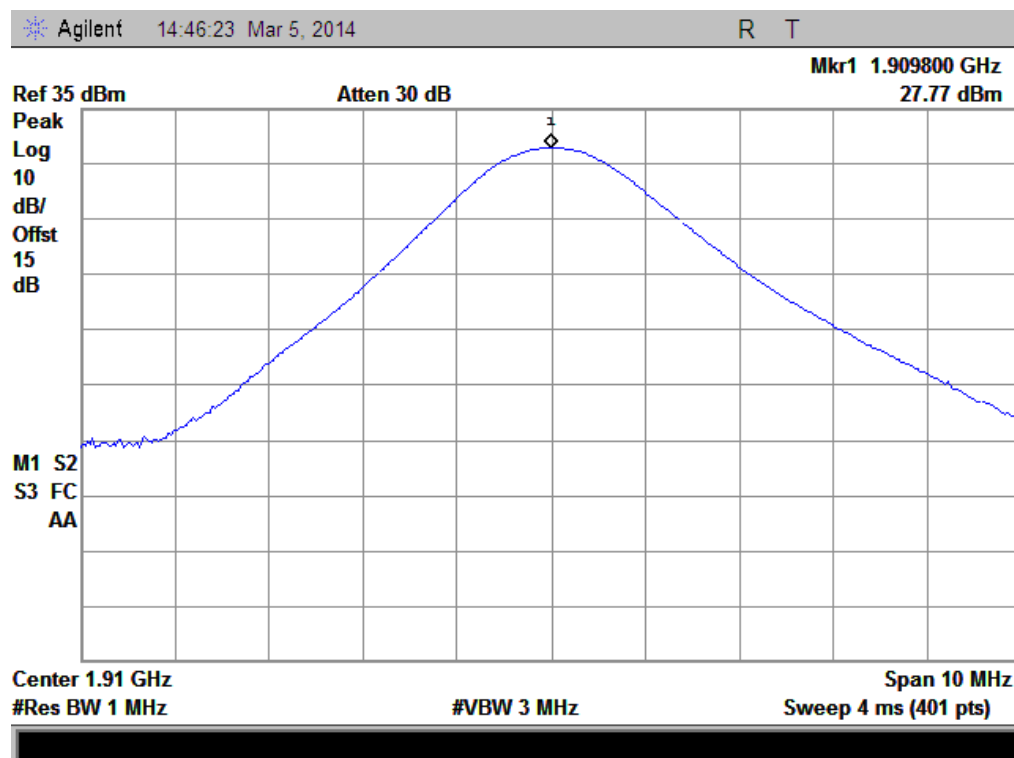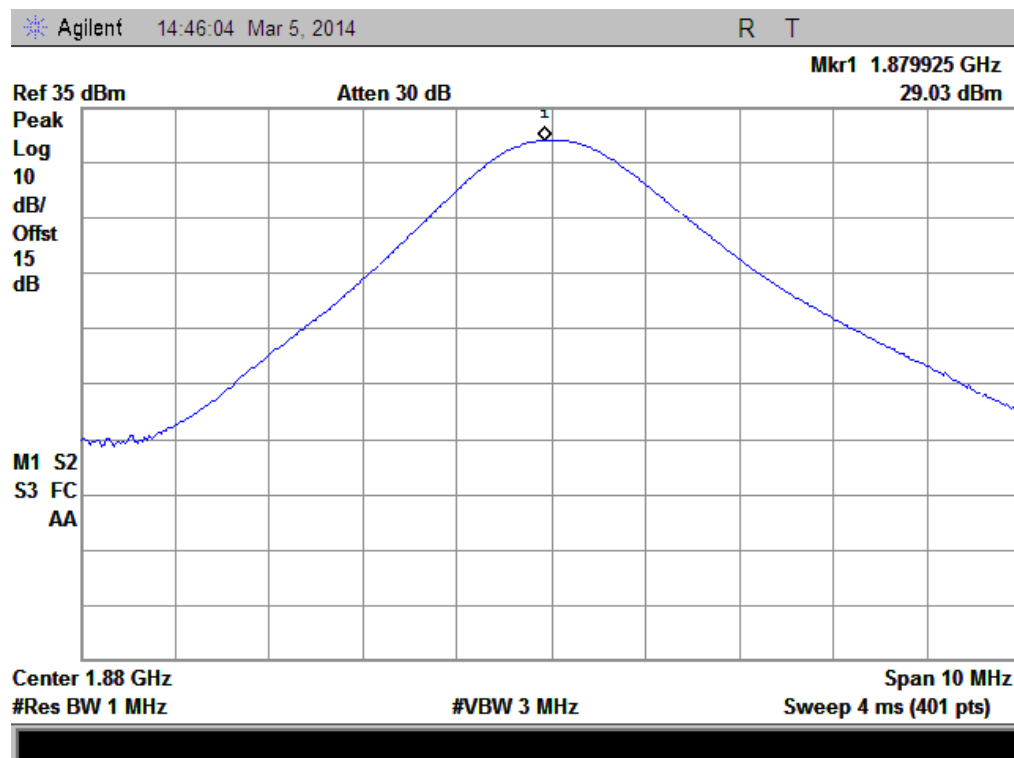


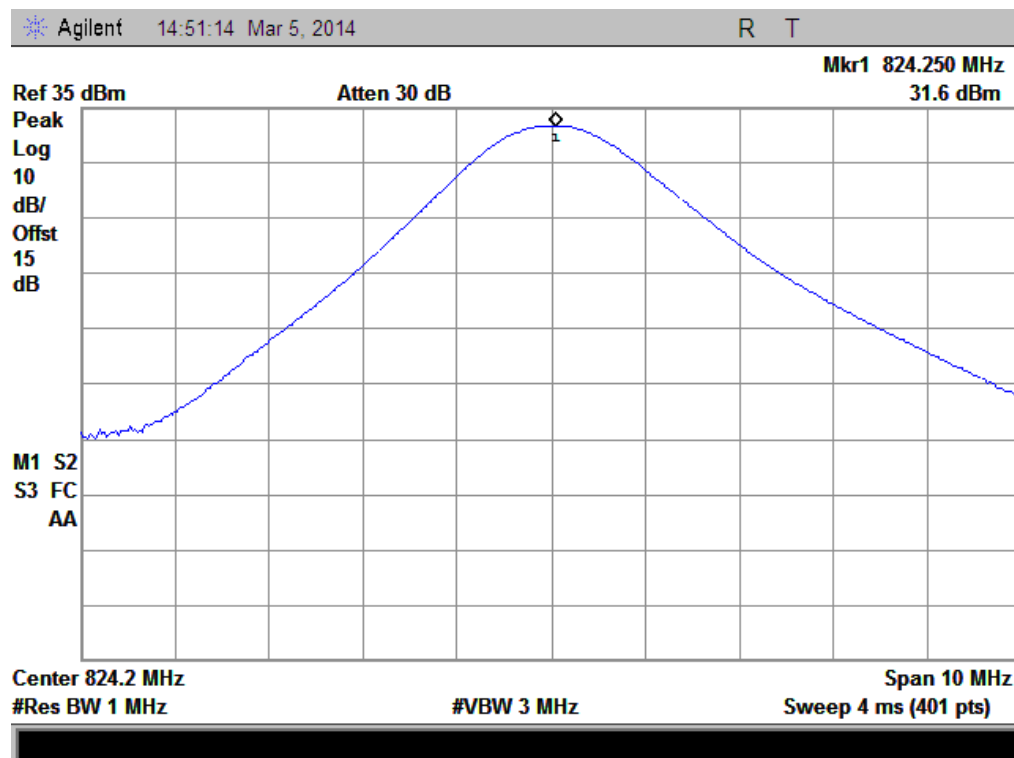


(Plot E1: EDGE 850MHz Channel = 128)

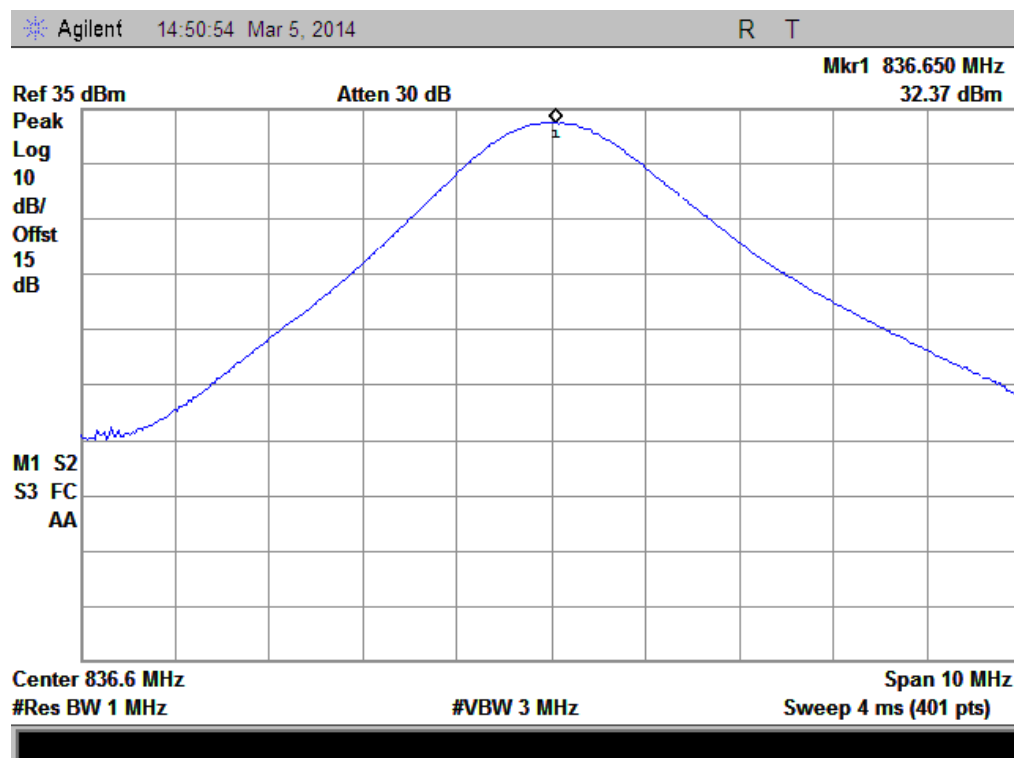


(Plot E2: EDGE 850MHz Channel = 190)

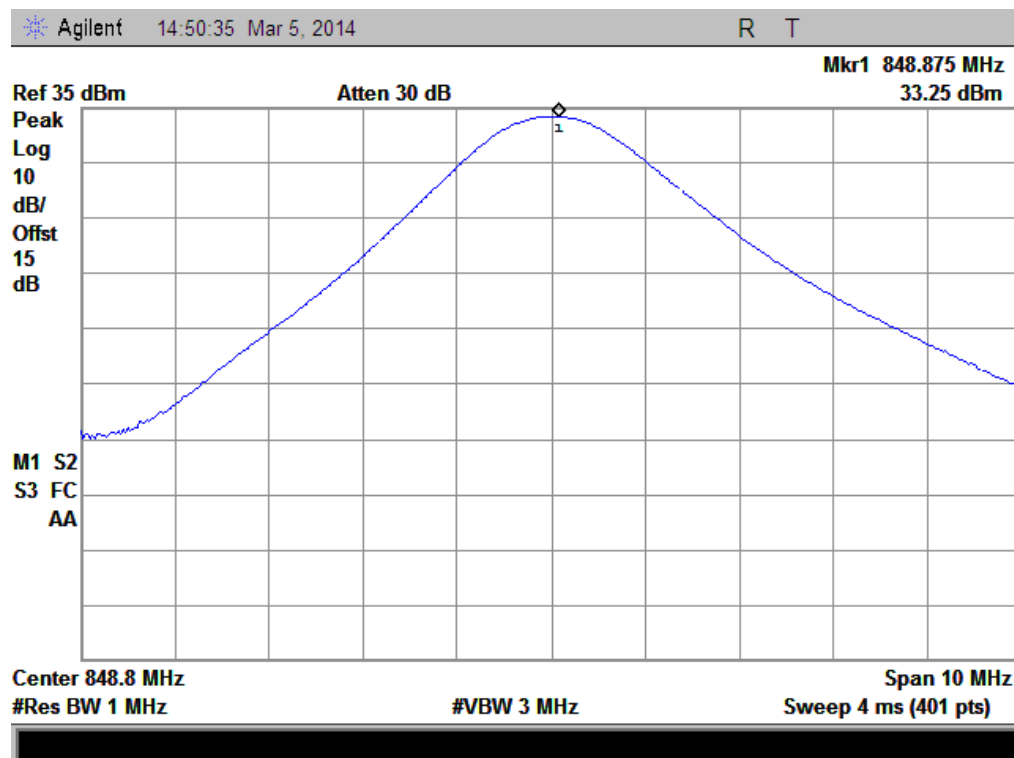


(Plot E3: EDGE 850MHz Channel = 251)

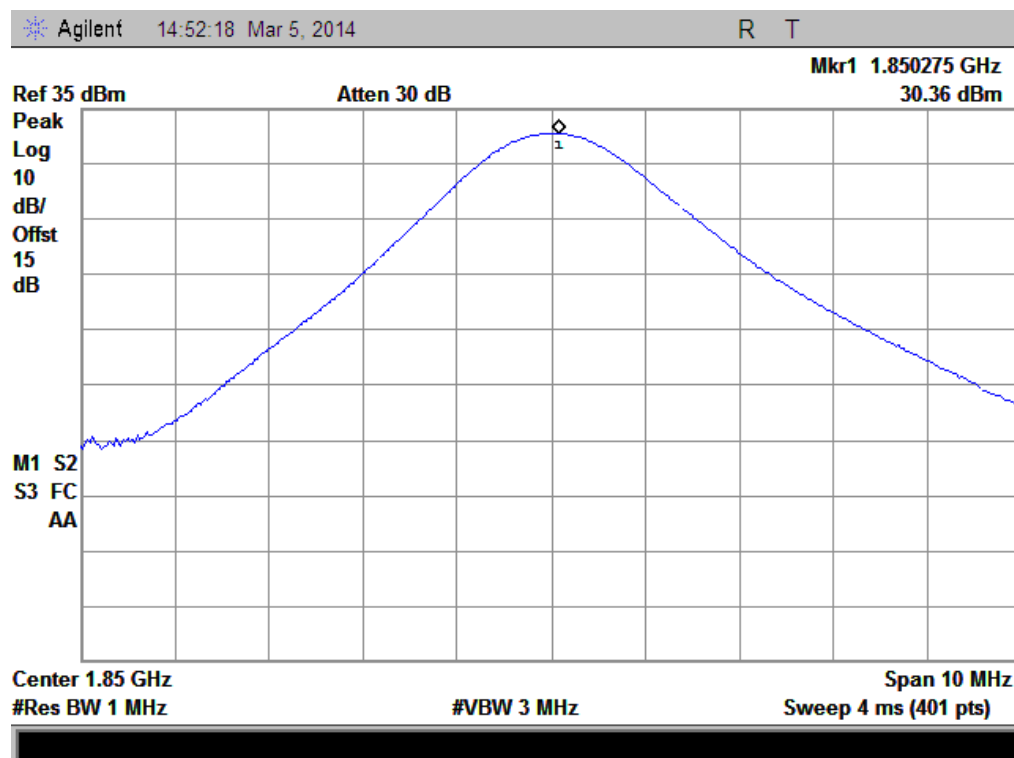

(Plot F1: EDGE 1900MHz Channel = 512)

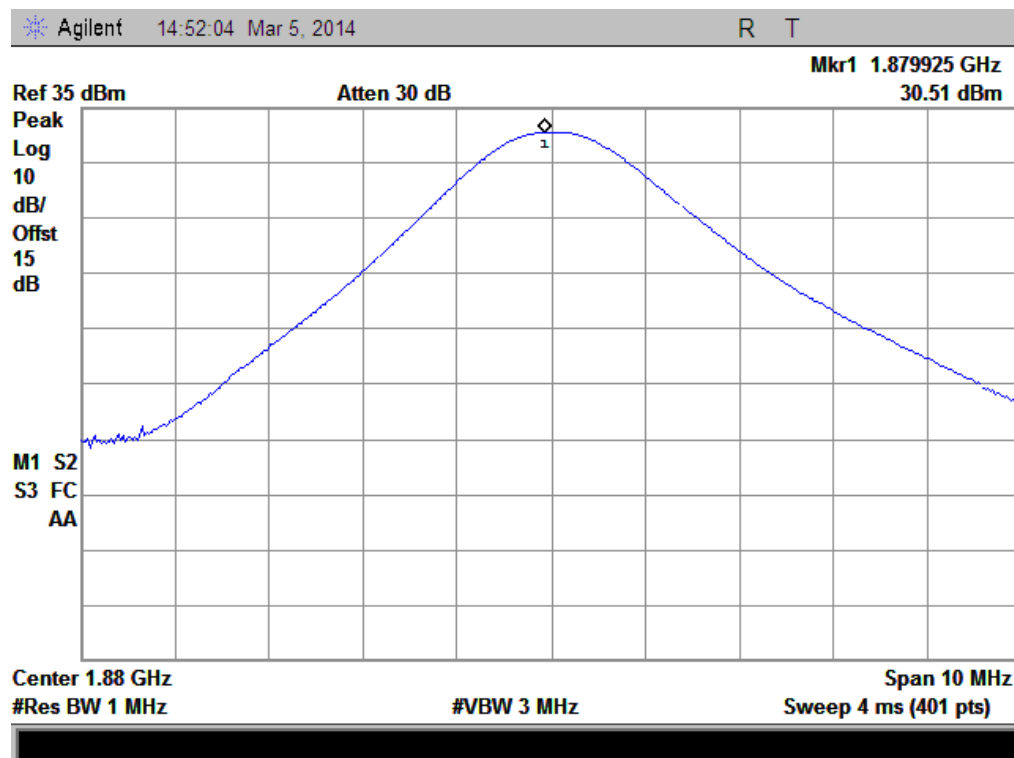

(Plot F2: EDGE 1900MHz Channel = 661)

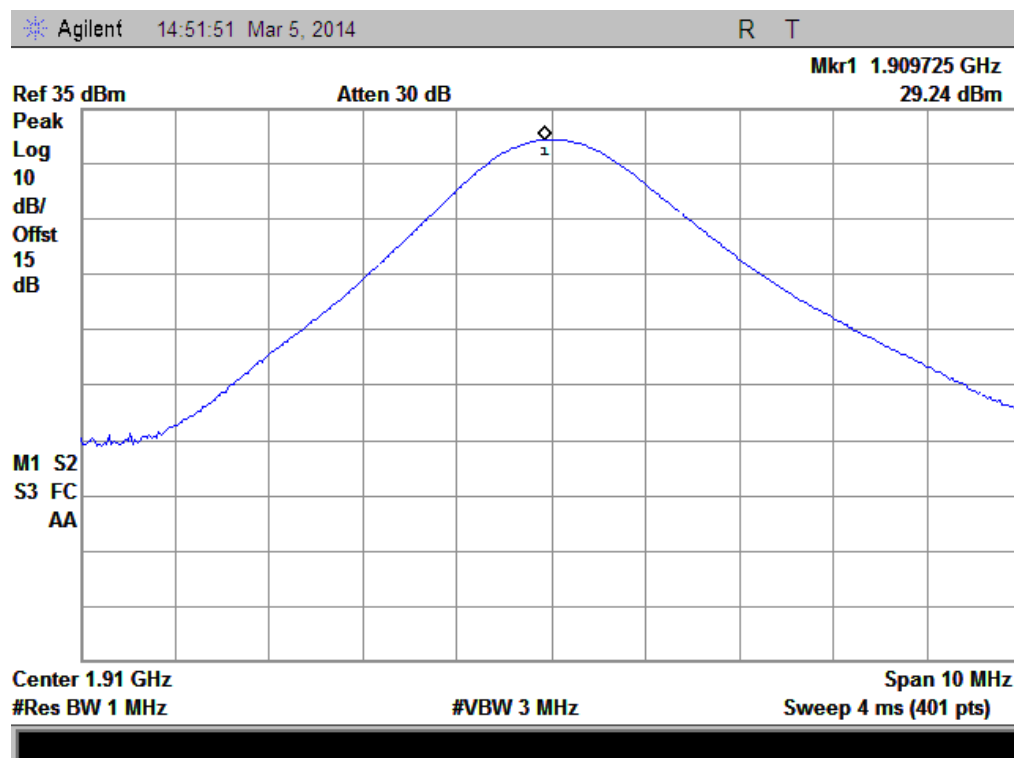

(Plot F3: EDGE 1900MHz Channel = 810)

2.2 Peak to Average Ratio

2.2.1 Definition

According to FCC section 2.1049 and FCC 24.232(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Verdict

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

Test procedures:

A. For GSM/EGPRS operating mode:

- a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
- b. Set EUT in maximum output power, and triggered the burst signal.
- c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.


B. For UMTS operating mode:

- a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.




1. Test Verdict:


Band	Channel	Frequency (MHz)	Peak to Average ratio		Limit	Verdict
			dBm	Refer to Plot	dBm	
GSM 1900MHz	512	1850.2	0.01	Plot A1 to A3	13	PASS
	661	1880.0	0.01			PASS
	810	1909.8	0.01			PASS
EGPRS 1900MHz	512	1850.2	0.01	Plot B1 to B3	13	PASS
	661	1880.0	0.01			PASS
	810	1909.8	0.02			PASS
WCDMA 1900MHz	9262	1852.4	3.02	Plot C1 to C3	13	PASS
	9400	1880	3.06			PASS
	9538	1907.6	2.69			PASS

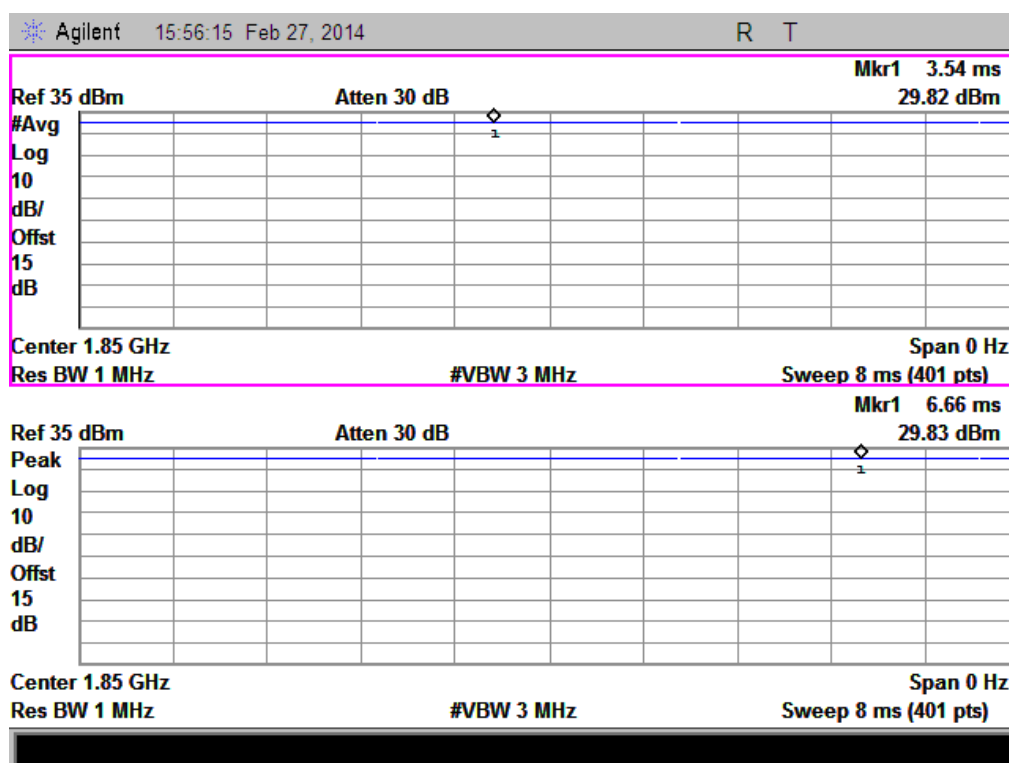


(Plot A1: GSM 1900 MHz Channel = 512)

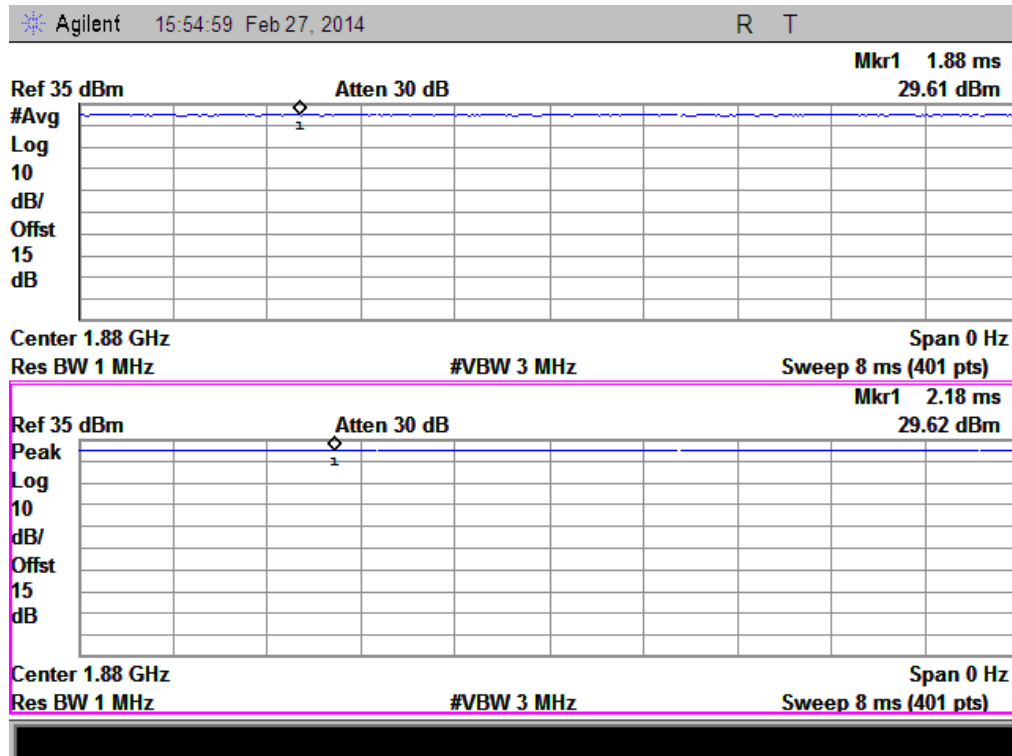


(Plot A2: GSM 1900 MHz Channel = 661)

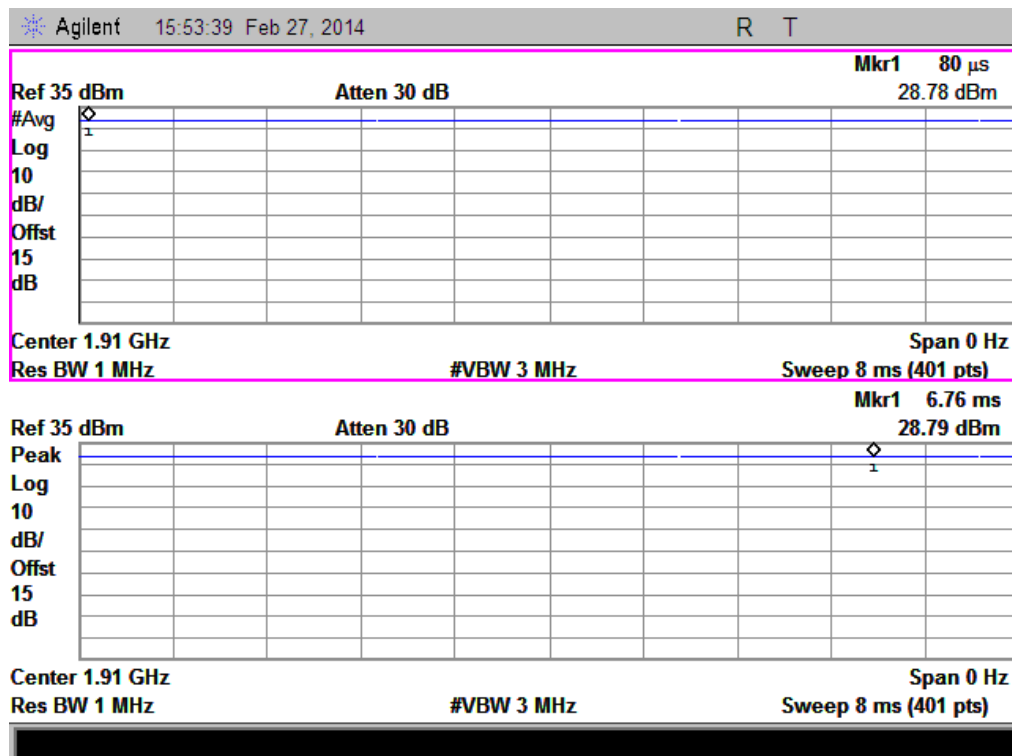


(Plot A3: GSM 1900MHz Channel = 810)

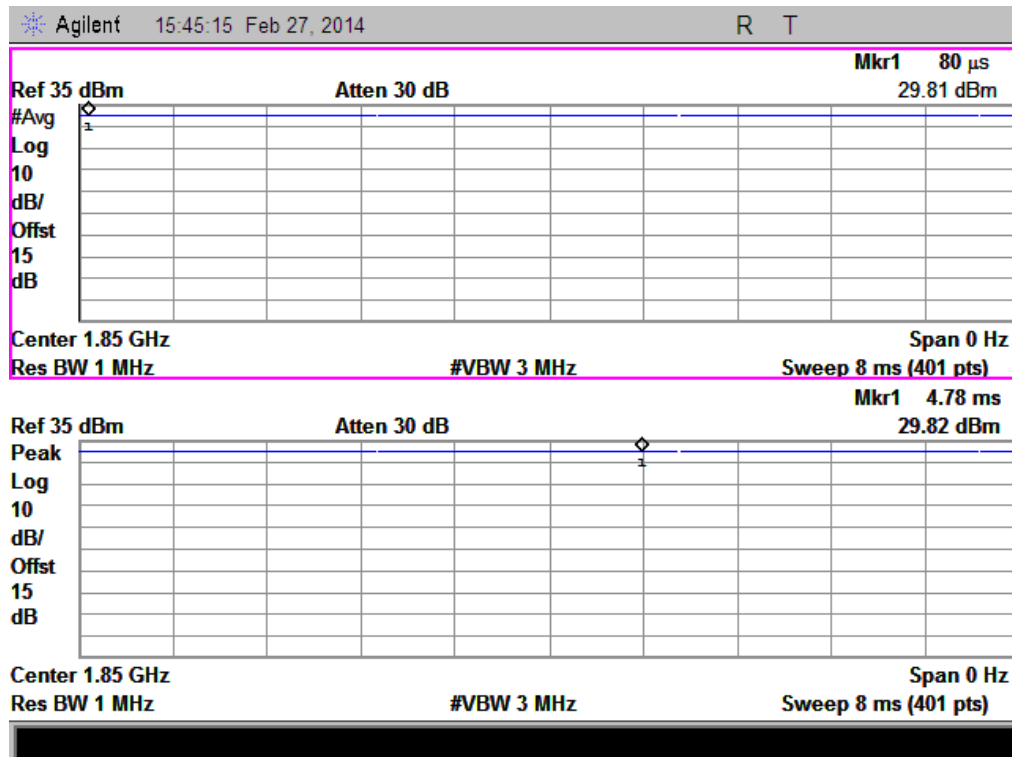


(Plot B1: EGPRS 1900MHz Channel = 512)

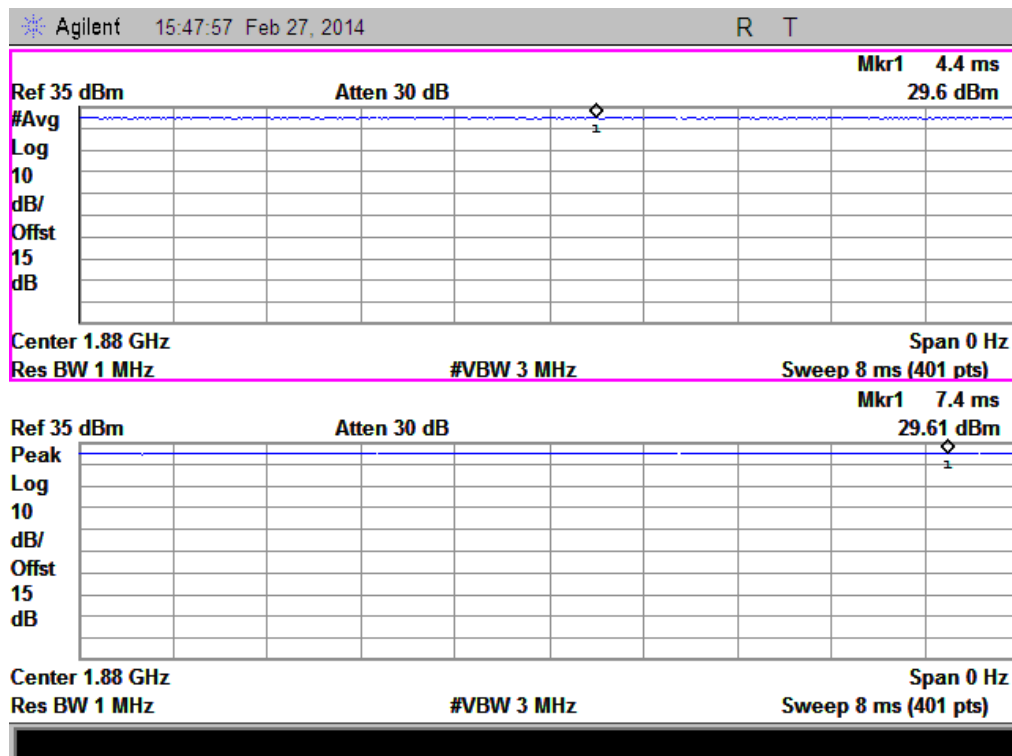


(Plot B2: EGPRS 1900MHz Channel = 661)

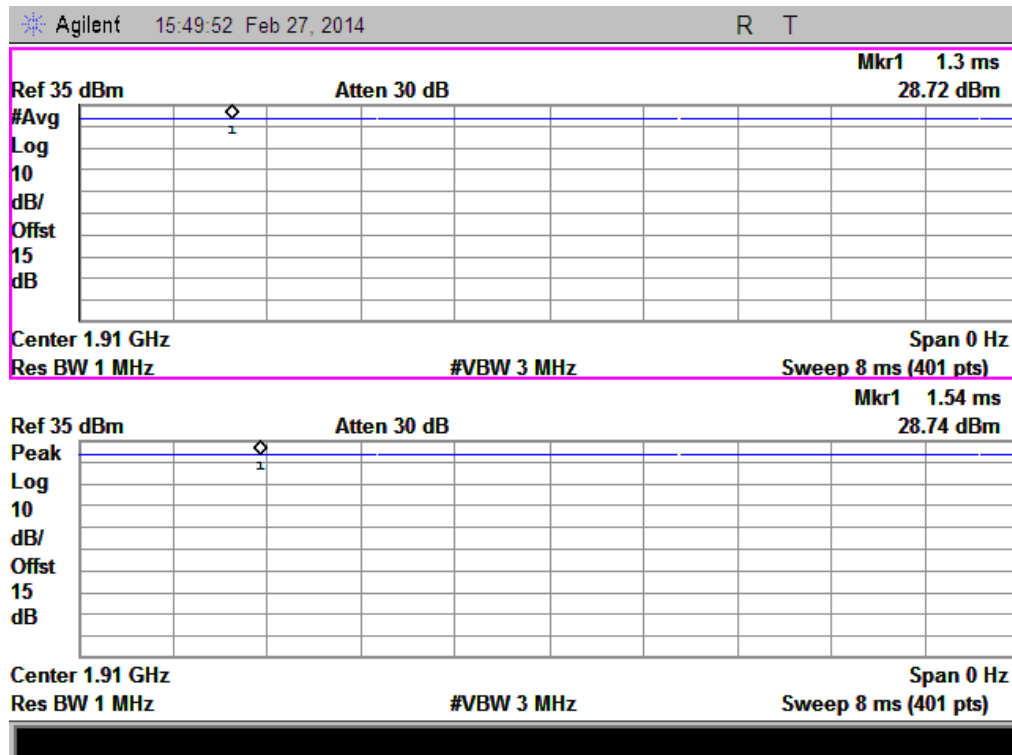


(Plot B3: EGPRS 1900MHz Channel = 810)

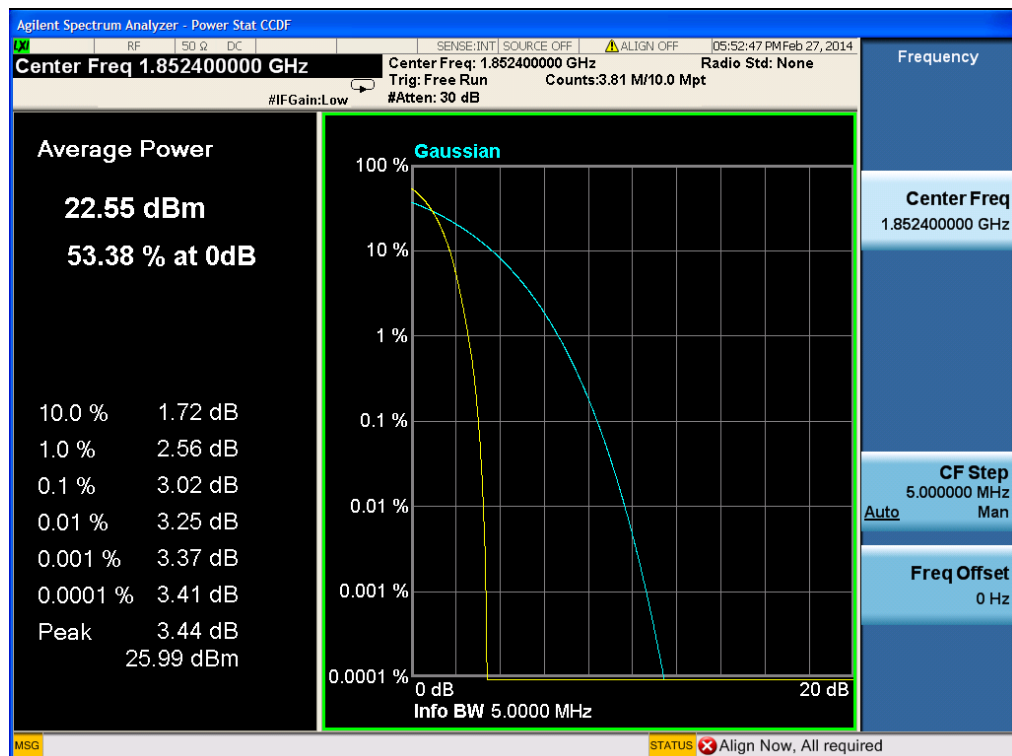

(Plot C1: WCDMA 1900MHz Channel = 9262)

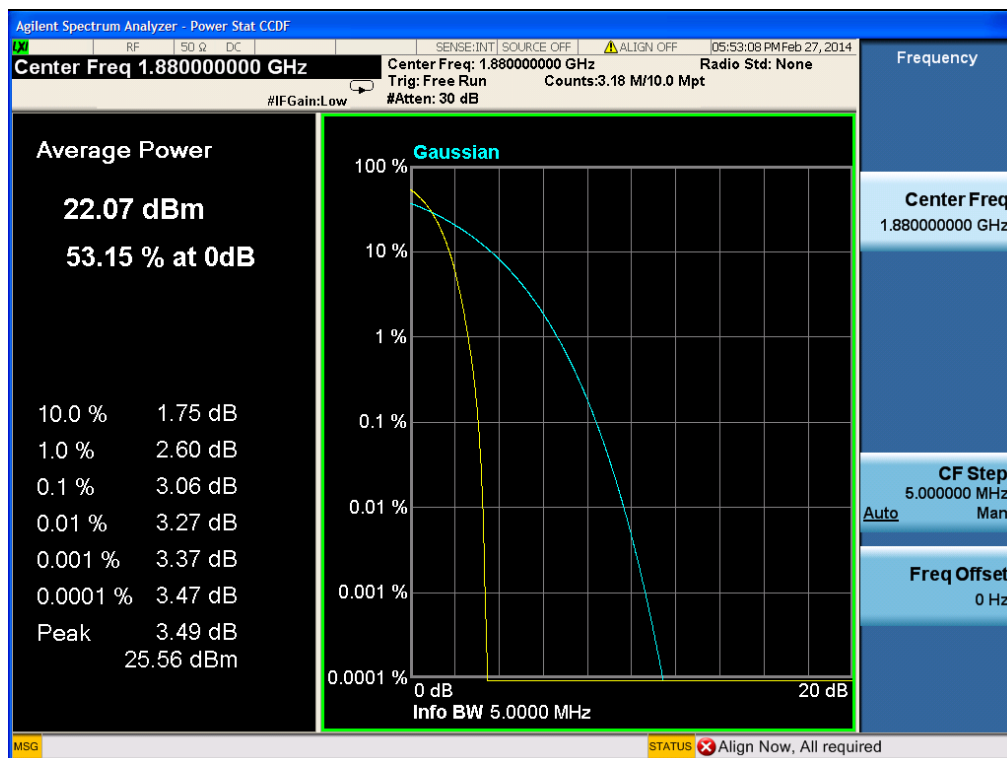

(Plot C2: WCDMA 1900MHz Channel = 9400)

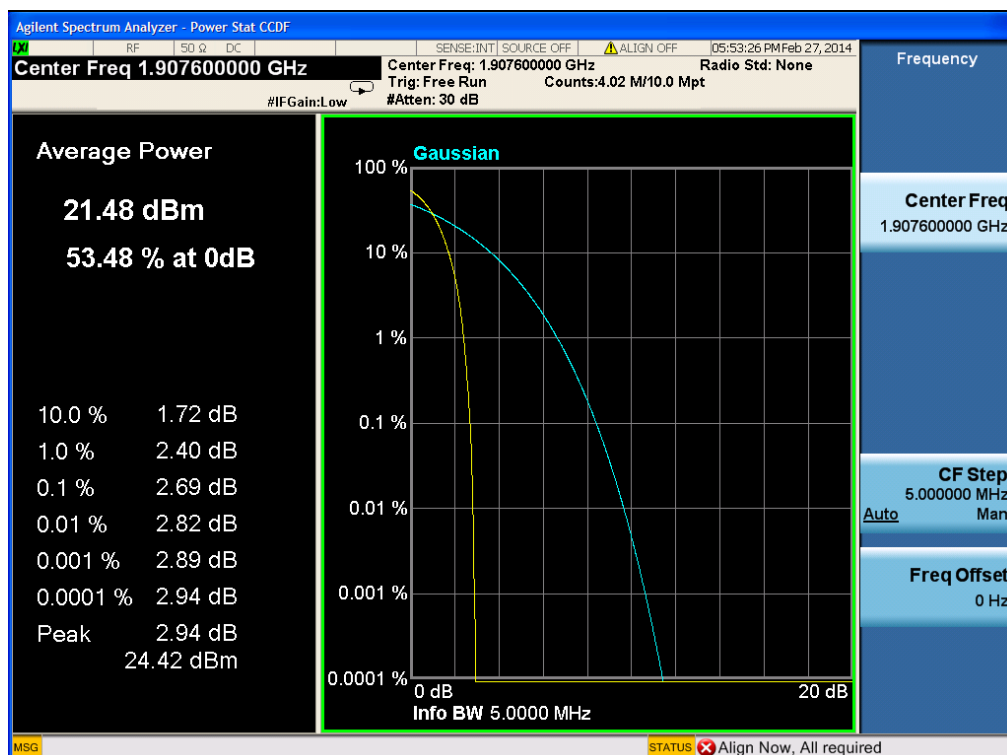

(Plot C3: WCDMA 1900MHz Channel = 9538)

2.3 99% Occupied Bandwidth

2.3.1 Definition

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Verdict


Here the lowest, middle and highest channels are selected to perform testing to verify the 99% occupied bandwidth.

1. Test Verdict:


Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
EDGE 850MHz	128	824.2	311.567 KHz	248.7285 KHz	Plot A
	190	836.6	312.971 KHz	247.0389 KHz	Plot B
	251	848.8	313.665 KHz	241.6867 KHz	Plot C
EDGE 1900MHz	512	1850.2	313.191 KHz	250.6528 KHz	Plot D
	661	1880.0	314.241 KHz	242.0114 KHz	Plot E
	810	1909.8	323.209 KHz	249.6888 KHz	Plot F
WCDMA 850MHz	4132	826.4	4.628MHz	4.1493MHz	Plot G
	4175	835	4.648MHz	4.1692MHz	Plot H
	4233	846.6	4.644MHz	4.1739MHz	Plot I
WCDMA 1900MHz	9262	1852.4	4.641MHz	4.1637MHz	Plot J
	9400	1880	4.648MHz	4.1448MHz	Plot K
	9538	1907.6	4.642MHz	4.1588MHz	Plot L
HSDPA 850MHz	4132	826.4	4.627MHz	4.1452MHz	Plot M
	4175	835	4.651MHz	4.1575MHz	Plot N
	4233	846.6	4.641MHz	4.1656MHz	Plot O
HSDPA 1900MHz	9262	1852.4	4.633MHz	4.1515MHz	Plot P
	9400	1880	4.627MHz	4.1524MHz	Plot Q
	9538	1907.6	4.642MHz	4.1474MHz	Plot R
HSUPA 850MHz	4132	826.4	4.626MHz	4.1379MHz	Plot S

Band	Channel	Frequency (MHz)	26dB bandwidth	99% Occupied Bandwidth	Refer to Plot
	4175	835	4.646MHz	4.1648MHz	Plot T
	4233	846.6	4.643MHz	4.1565MHz	Plot U
HSUPA 1900MHz	9262	1852.4	4.657MHz	4.1532MHz	Plot V
	9400	1880	4.624MHz	4.1578MHz	Plot W
	9538	1907.6	4.643MHz	4.1532MHz	Plot X
HSPA+ 850MHz	4132	826.4	4.643MHz	4.1628MHz	Plot Y
	4175	835	4.651MHz	4.1613MHz	Plot Z
	4233	846.6	4.641MHz	4.1615MHz	Plot A1
HSPA+ 1900MHz	9262	1852.4	4.641MHz	4.1666MHz	Plot B1
	9400	1880	4.635MHz	4.1587MHz	Plot C1
	9538	1907.6	4.628MHz	4.1682MHz	Plot D1
GSM 850MHz	128	824.2	321.093 KHz	249.1861 KHz	Plot E1
	190	836.6	317.749 KHz	244.5970 KHz	Plot F1
	251	848.8	320.148 KHz	245.6376 KHz	Plot G1
GSM 1900MHz	512	1850.2	322.072 KHz	242.7920 KHz	Plot H1
	661	1880.0	316.365 KHz	247.4608 KHz	Plot I1
	810	1909.8	322.536 KHz	243.9680 KHz	Plot J1
GPRS 850MHz	128	824.2	322.802 KHz	247.0350 KHz	Plot K1
	190	836.6	324.524 KHz	249.2726 KHz	Plot L1
	251	848.8	323.235 KHz	245.9105 KHz	Plot M1
GPRS 1900MHz	512	1850.2	315.623 KHz	246.1419 KHz	Plot N1
	661	1880.0	324.722 KHz	249.8708 KHz	Plot O1
	810	1909.8	326.277 KHz	248.1185 KHz	Plot P1


2. Test Plots:

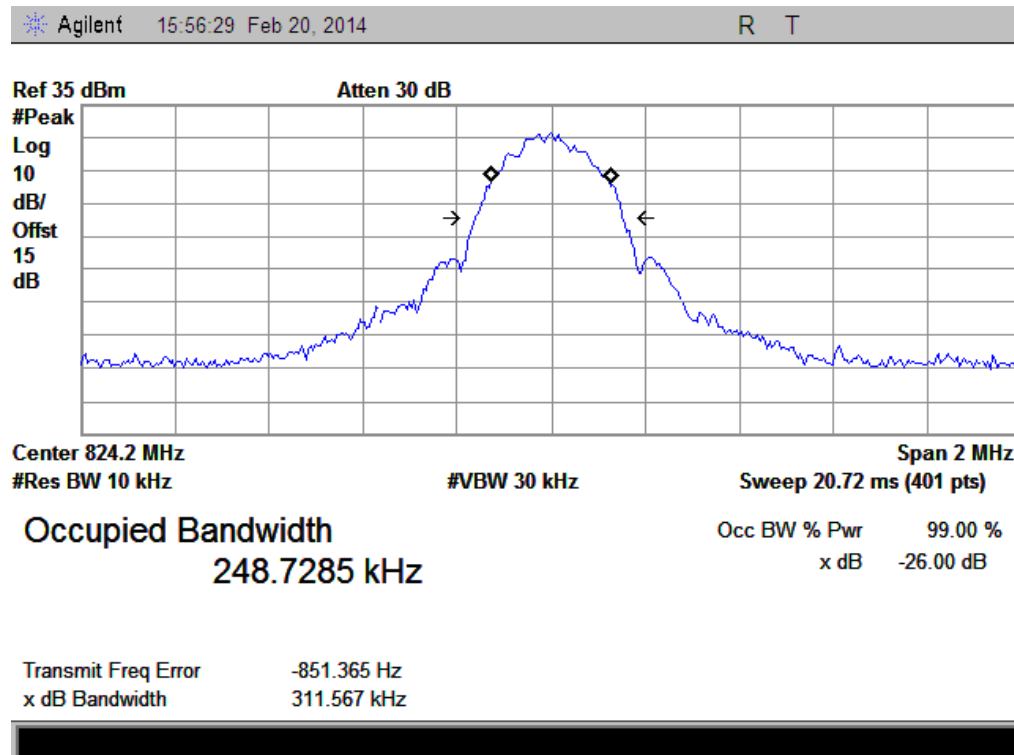


(Plot A: EGPRS 850MHz Channel = 128)

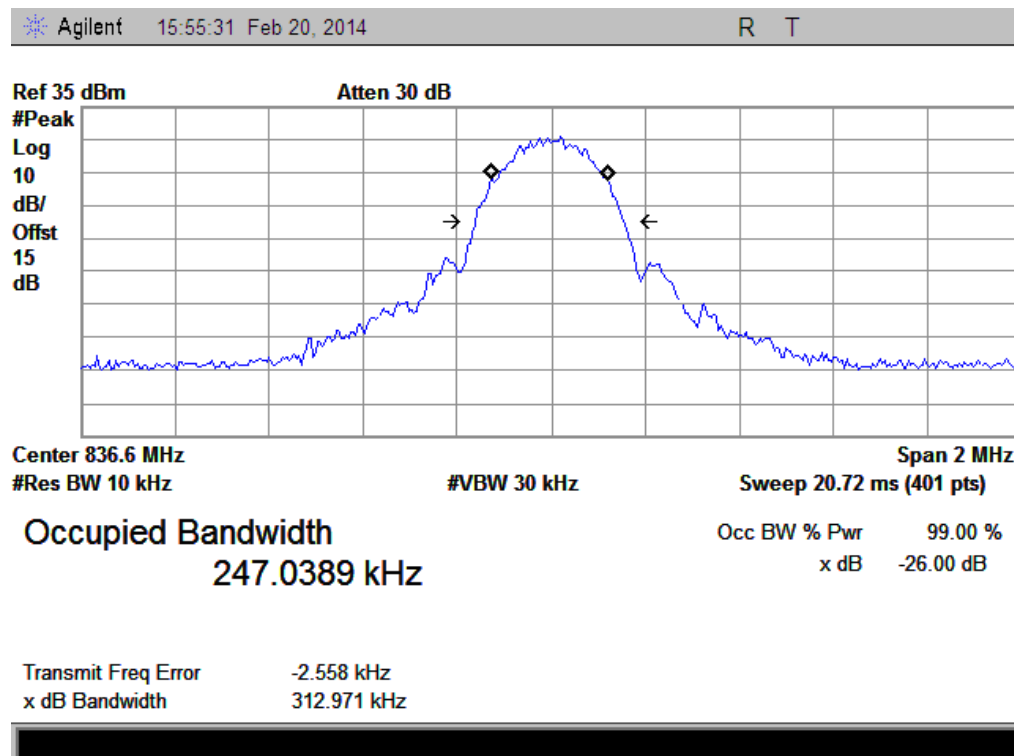


(Plot B: EGPRS 850MHz Channel = 190)

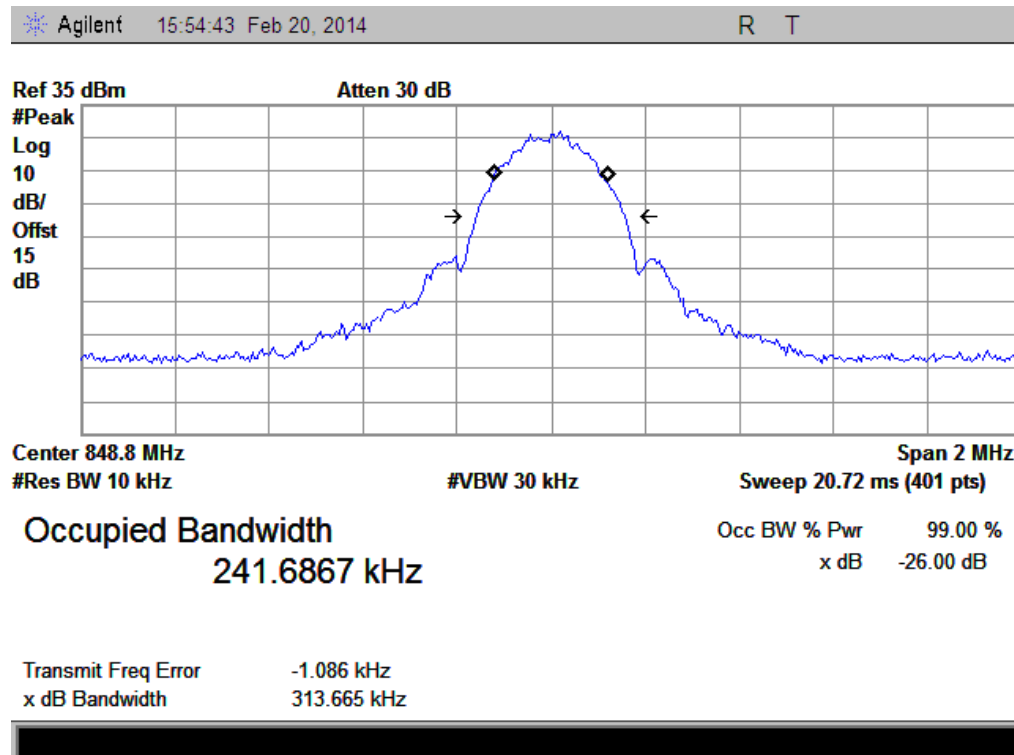


(Plot C: EGPRS 850MHz Channel = 251)

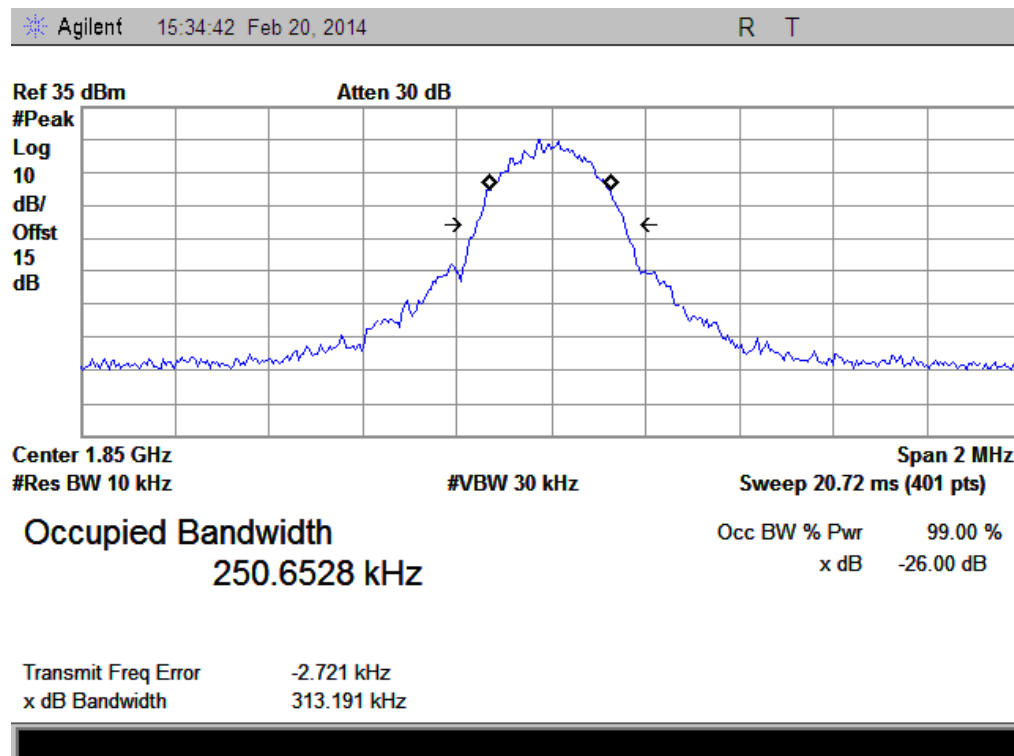


(Plot D: EGPRS1900MHz Channel = 512)

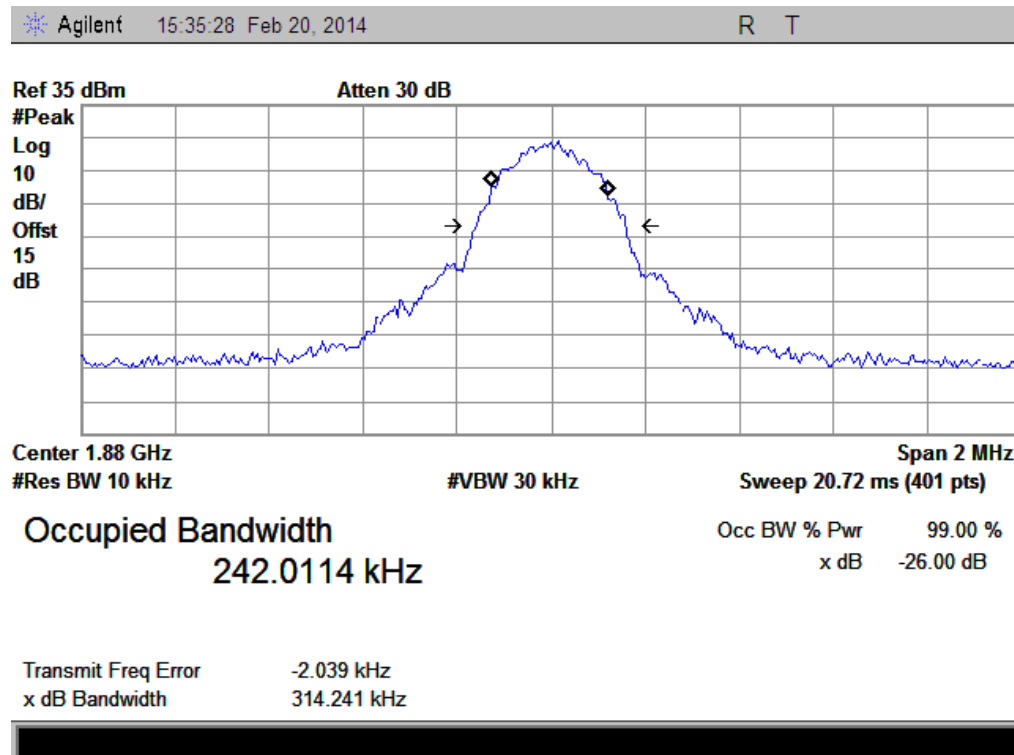


(Plot E: EGPRS1900MHz Channel = 661)

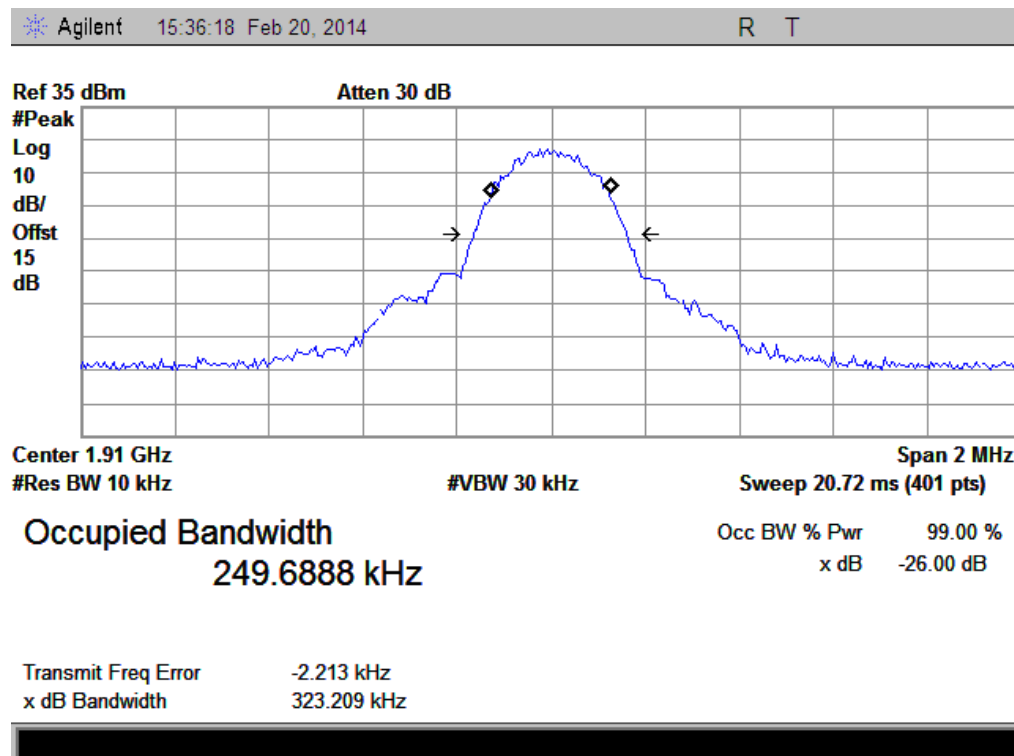


(Plot F: EGPRS 1900MHz Channel = 810)

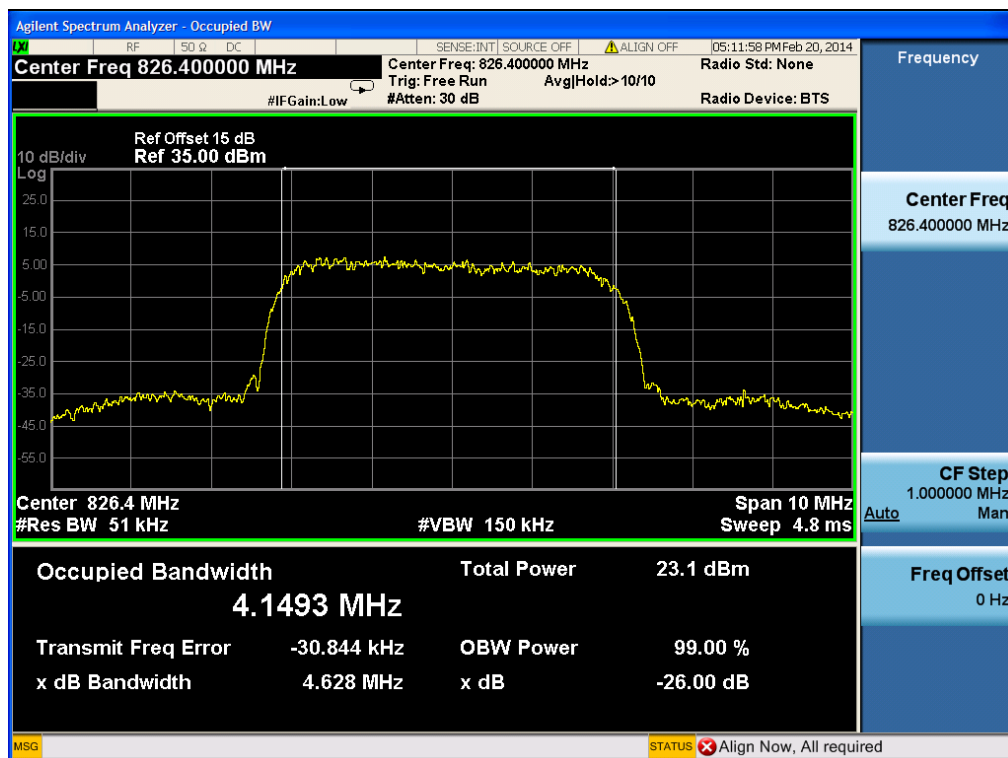


(Plot G: WCDMA 850MHz Channel = 4132)

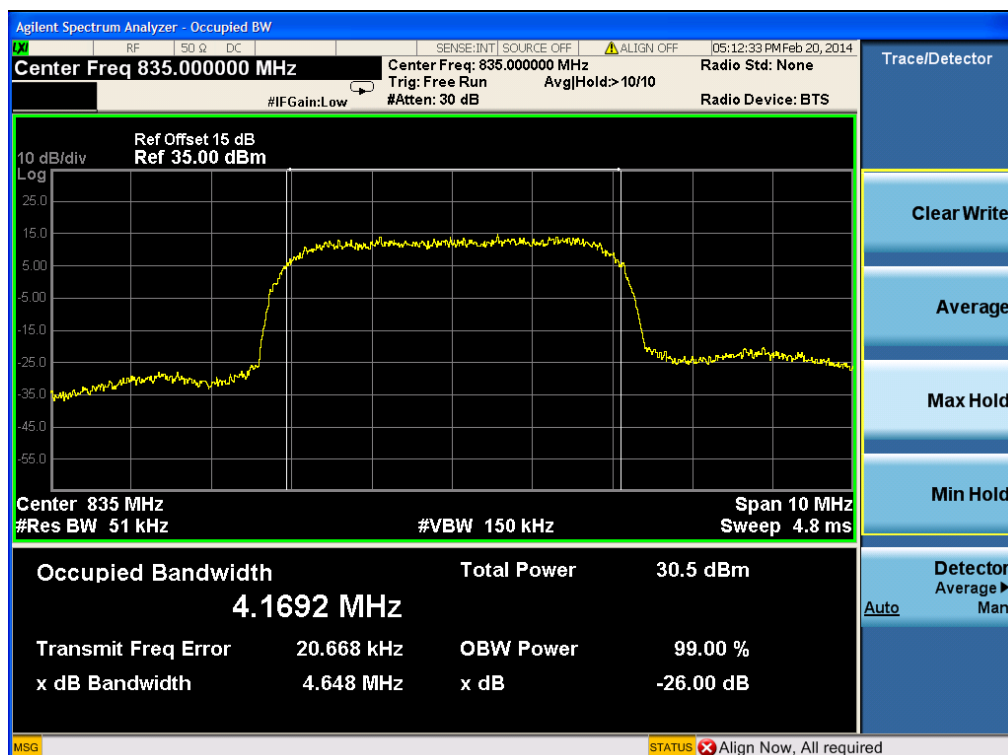


(Plot H: WCDMA 850 MHz Channel = 4175)

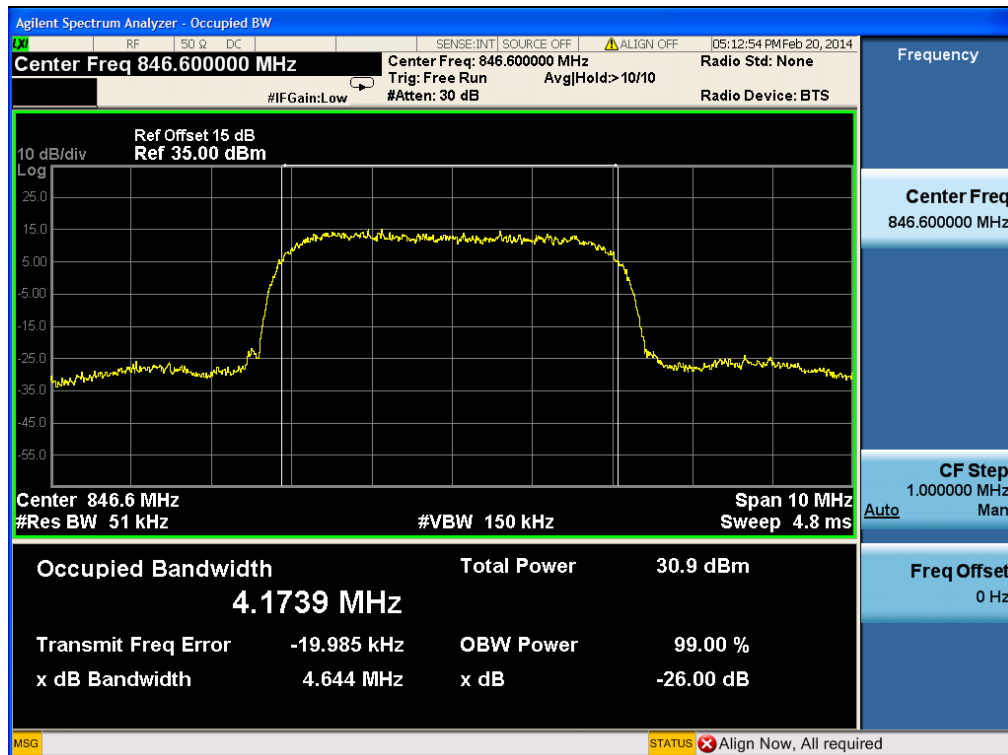


(Plot I: WCDMA 850MHz Channel = 4233)

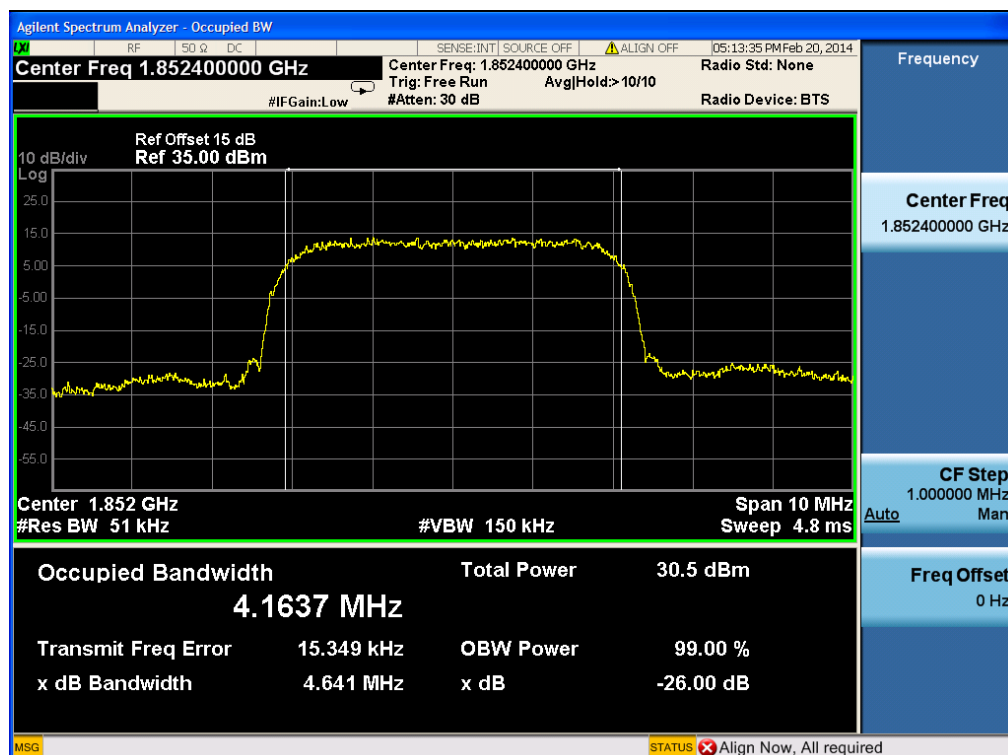


(Plot J: WCDMA 1900MHz Channel = 9262)

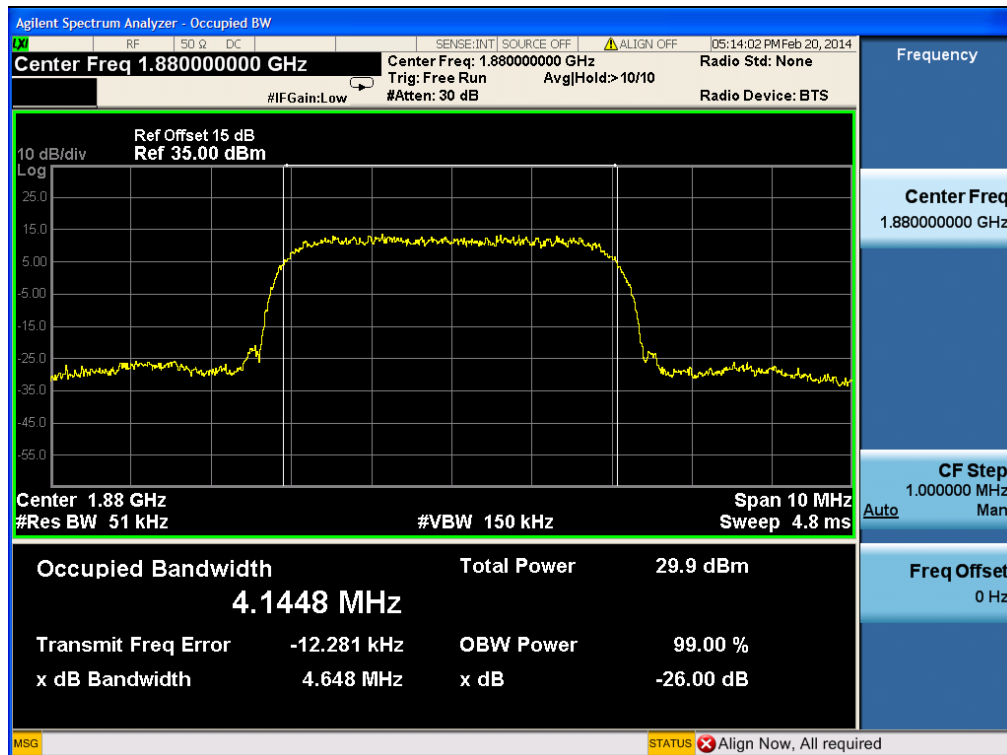


(Plot K: WCDMA 1900 MHz Channel = 9400)

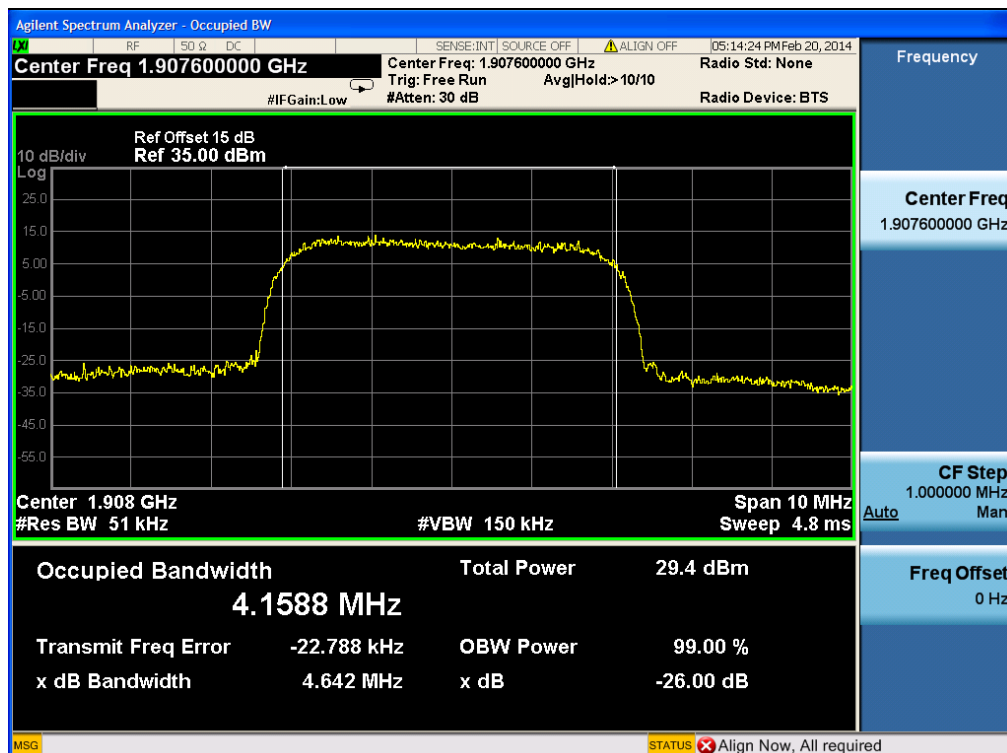


(Plot L: WCDMA 1900MHz Channel = 9538)

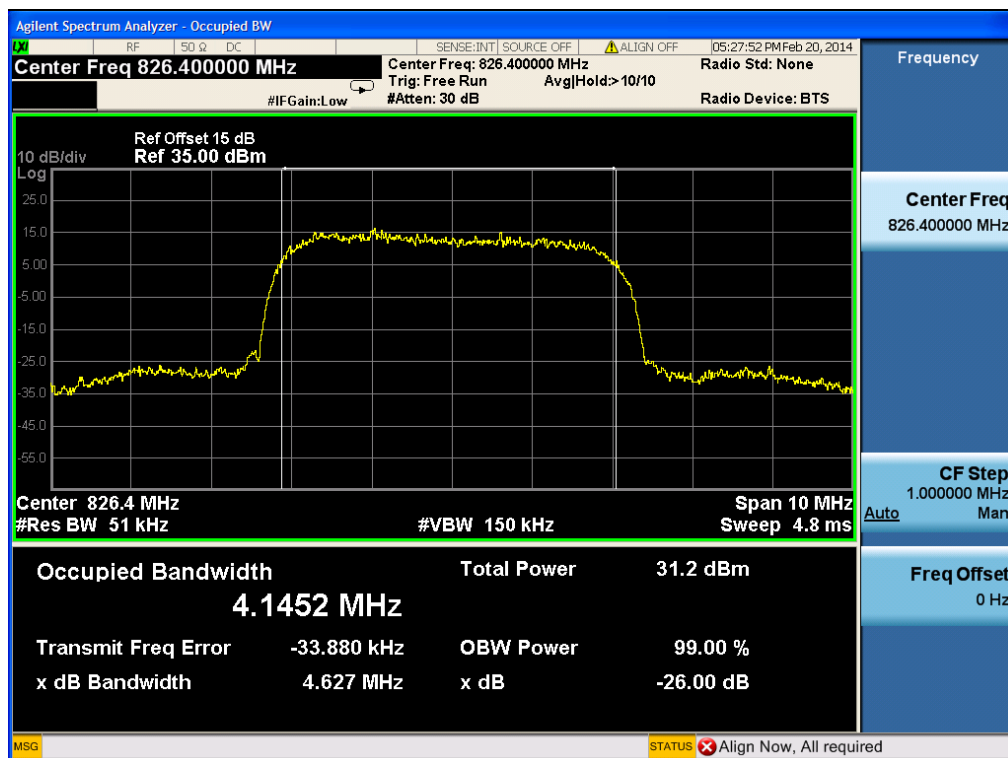


(Plot M: HSDPA 850MHz Channel = 4132)

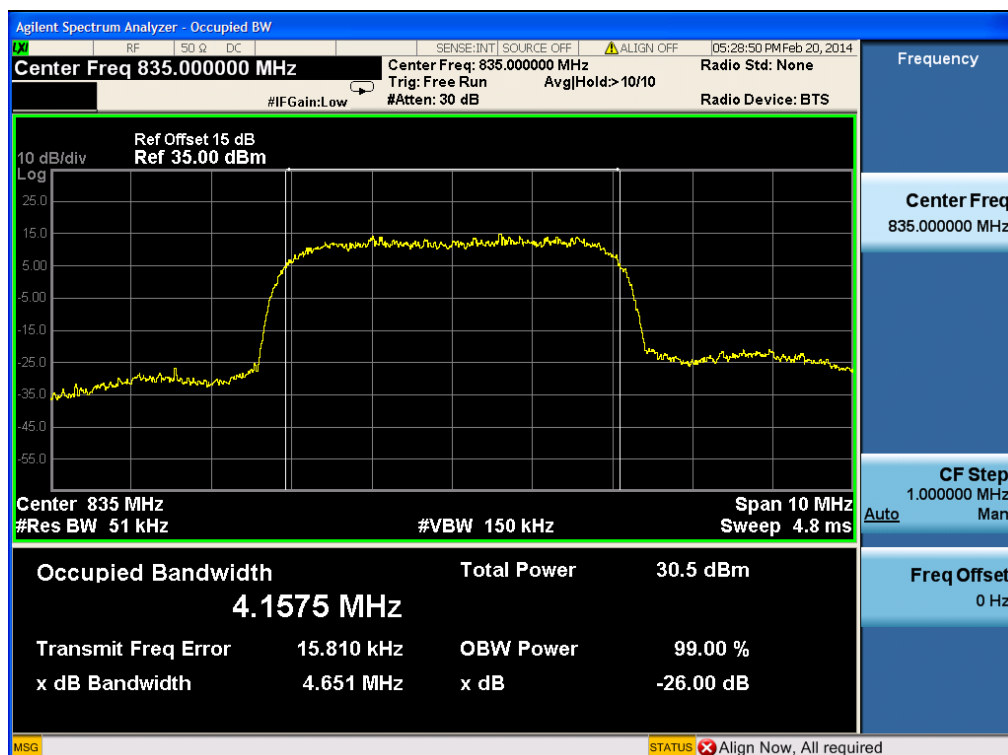


(Plot N: HSDPA 850 MHz Channel = 4175)

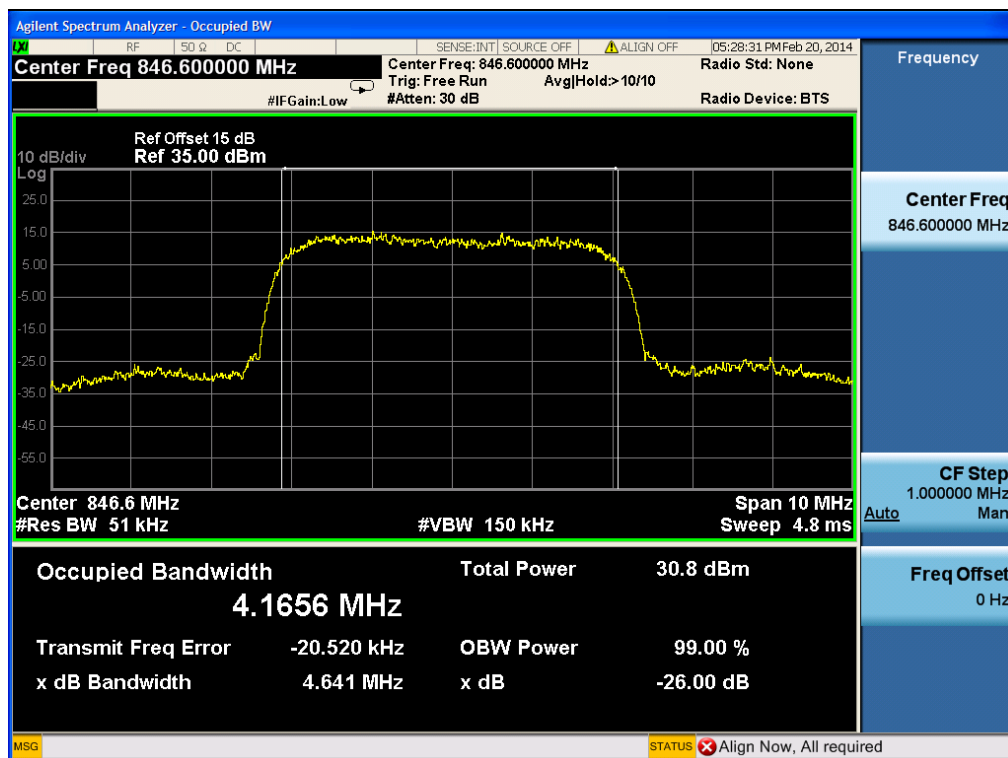


(Plot O: HSDPA 850 MHz Channel = 4233)

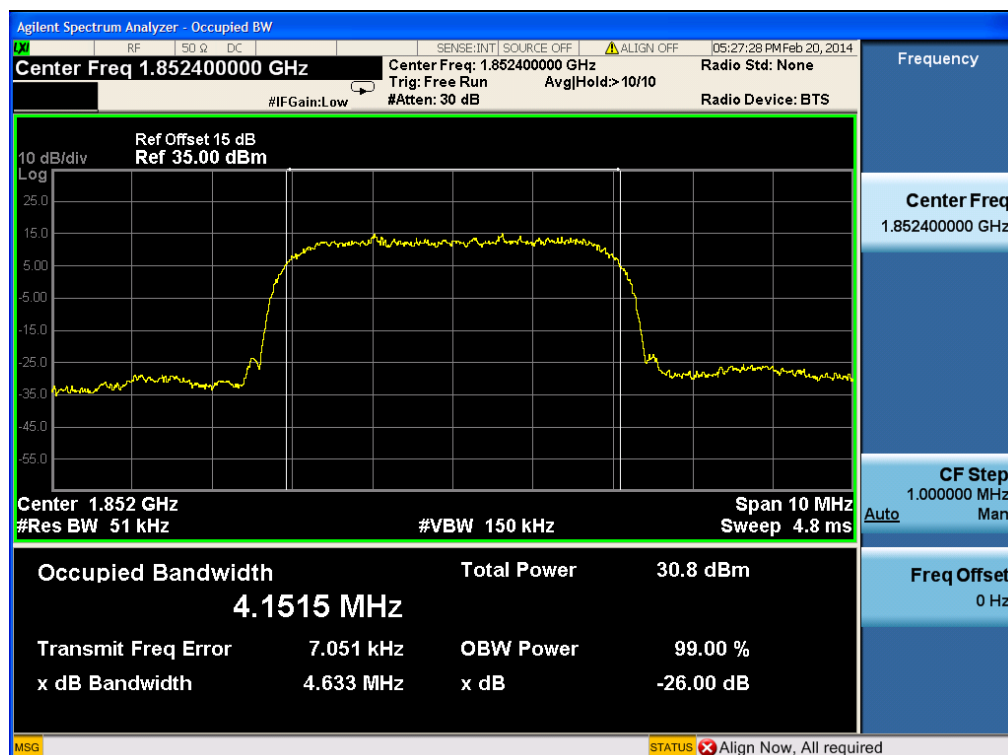


(Plot P: HSDPA 1900MHz Channel = 9262)

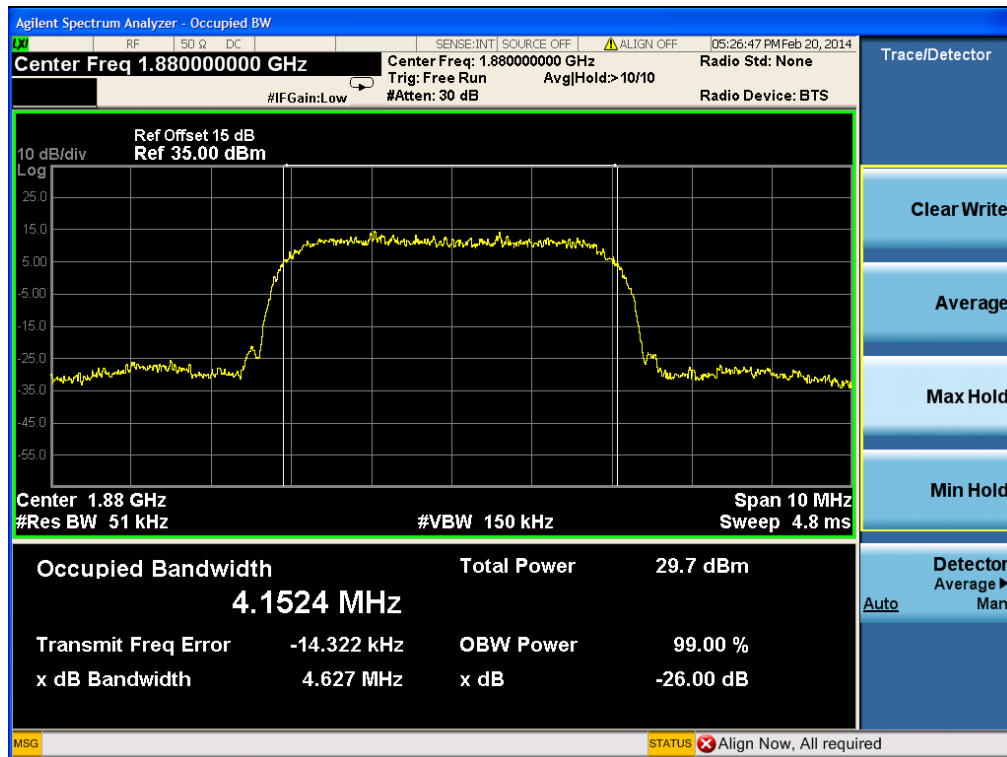


(Plot Q: HSDPA 1900 MHz Channel = 9400)

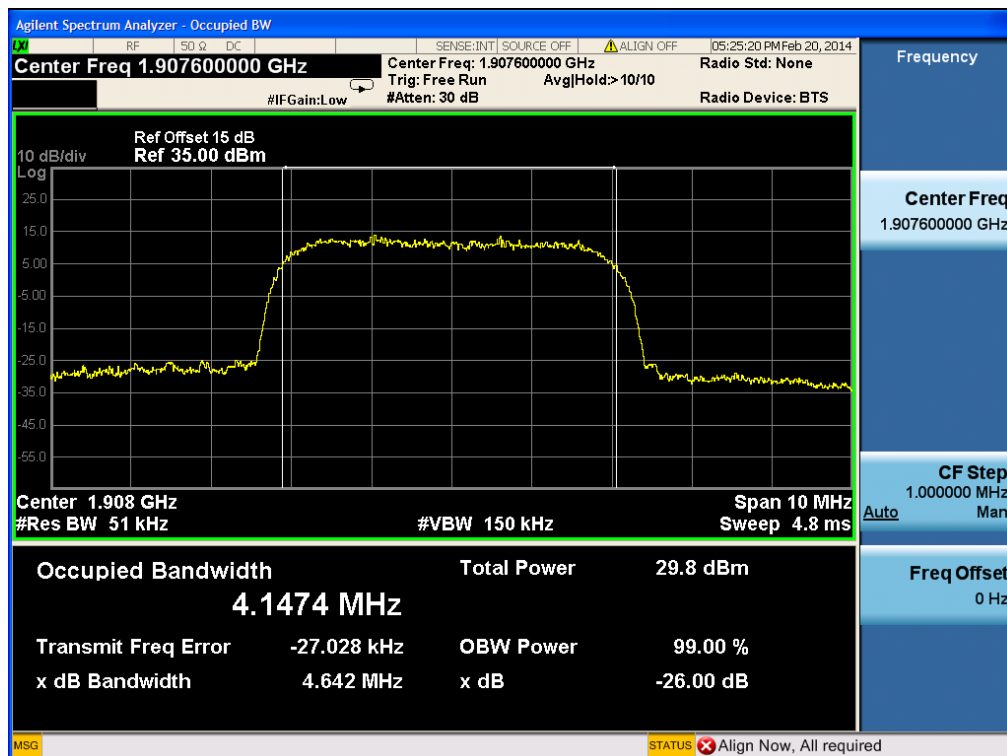


(Plot R: HSDPA 1900MHz Channel = 9538)

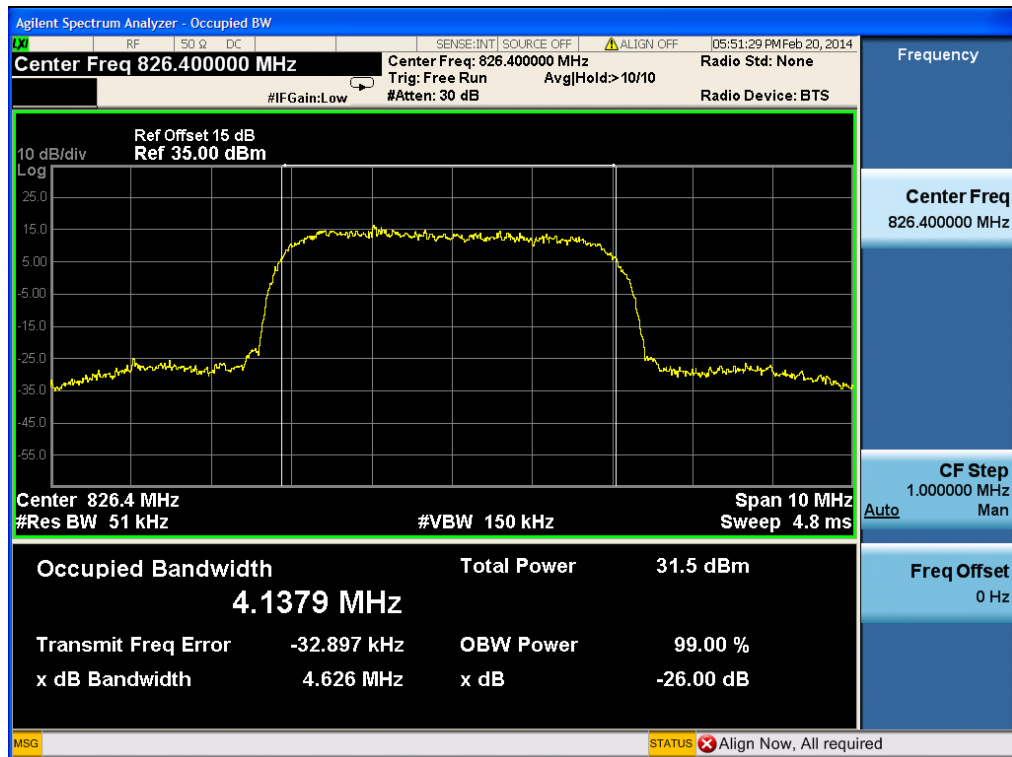


(Plot S: HSUPA850 MHz Channel = 4132)

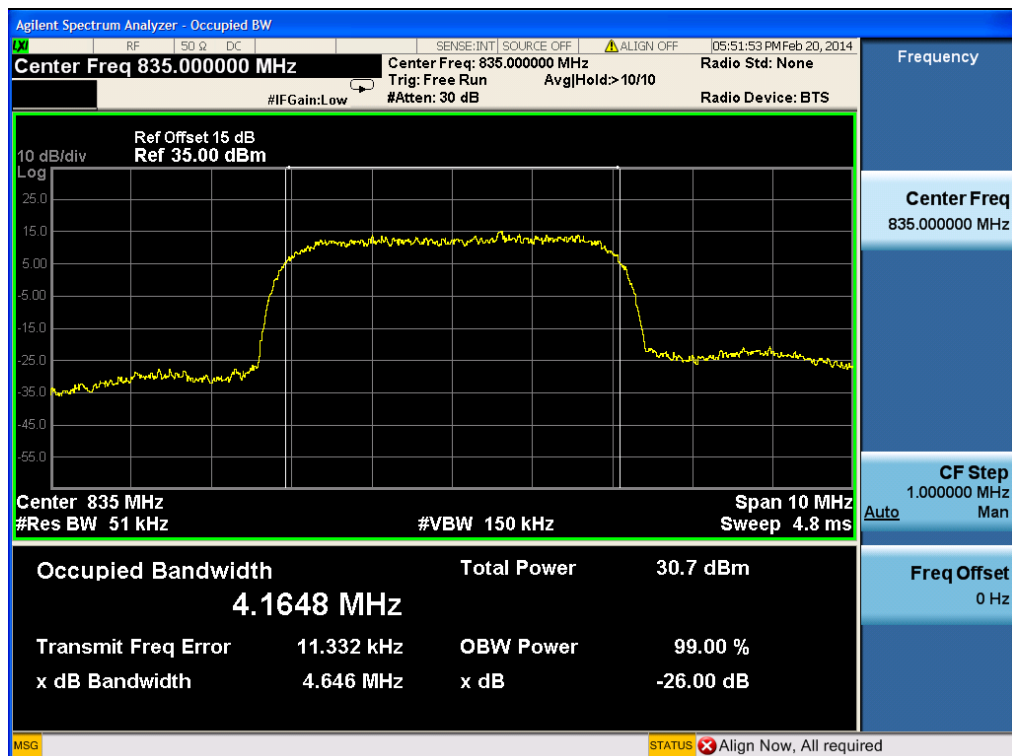


(Plot T: HSUPA850 MHz Channel = 4175)

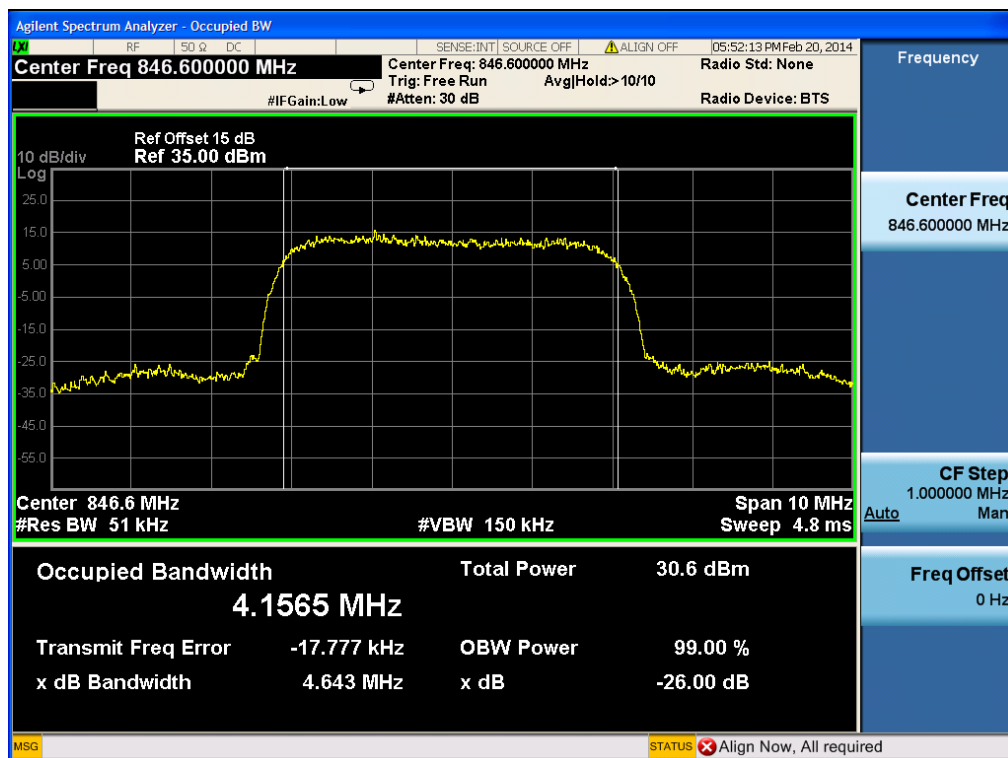


(Plot U: HSUPA850 MHz Channel = 4233)

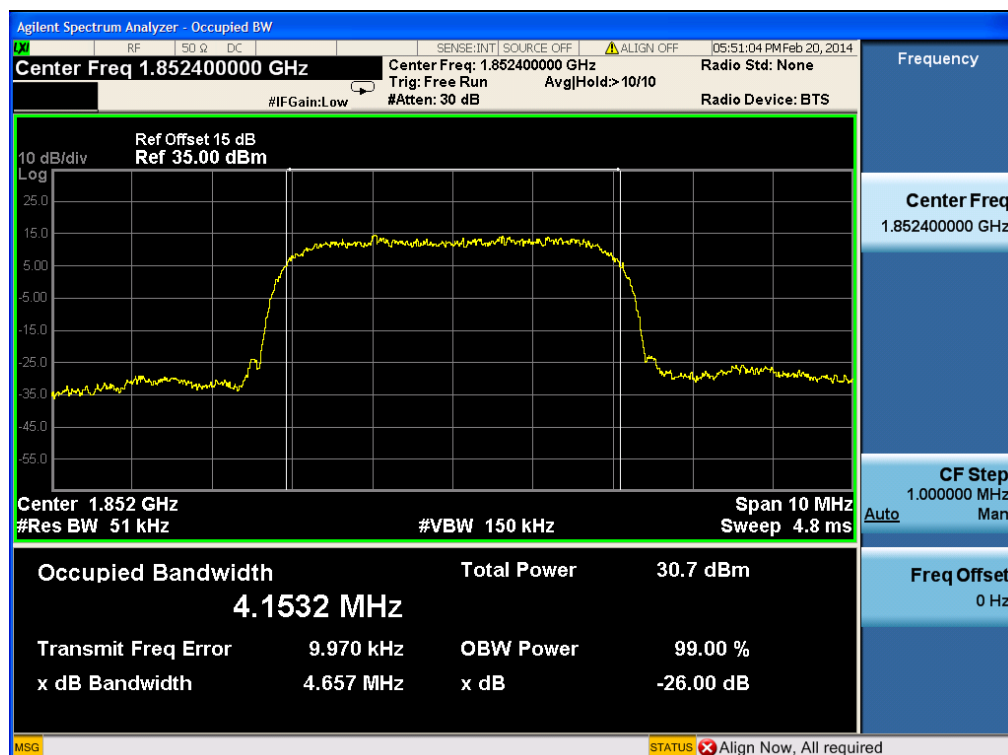


(Plot V: HSUPA 1900MHz Channel = 9262)

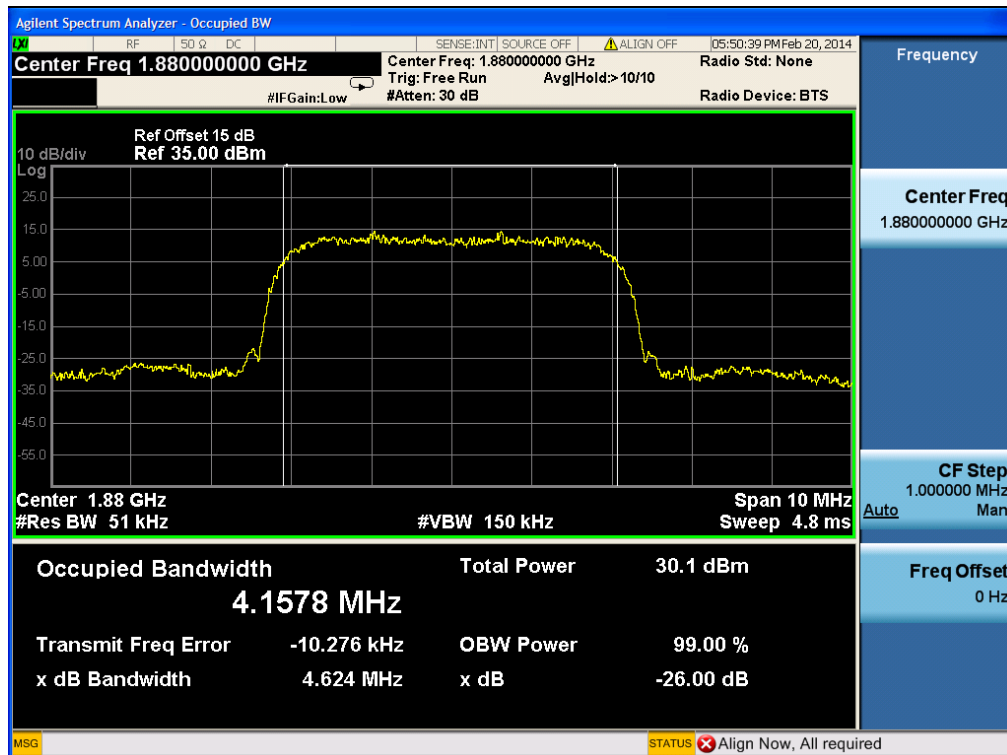


(Plot W: HSUPA1900 MHz Channel = 9400)

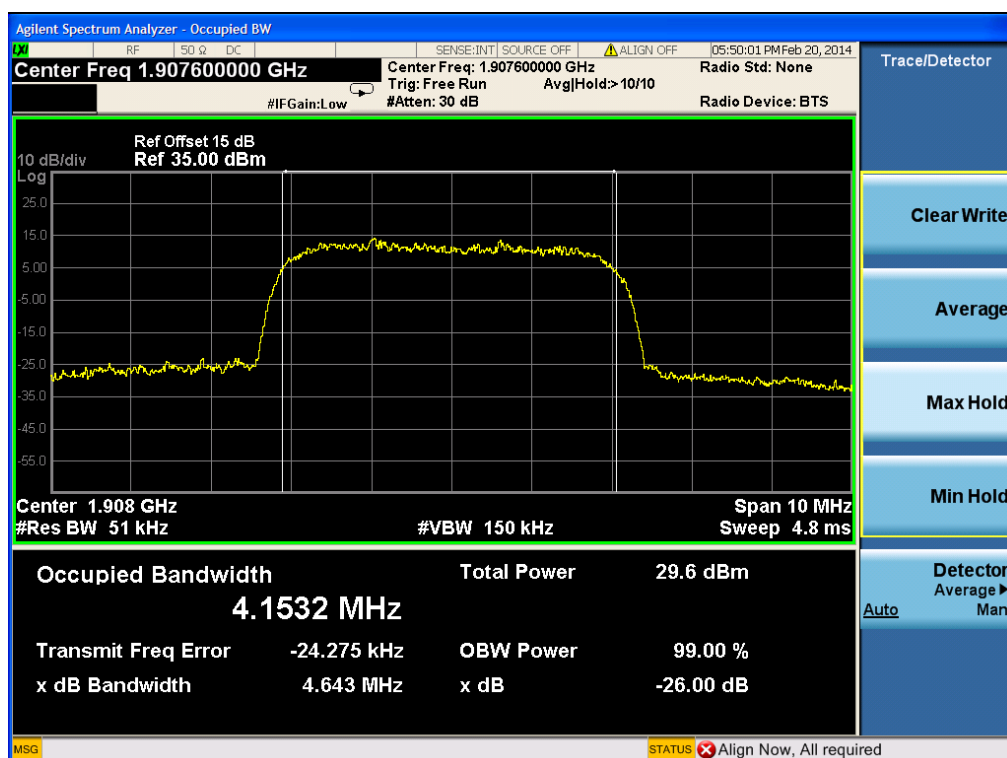


(Plot X: HSUPA 1900 MHz Channel = 9538)

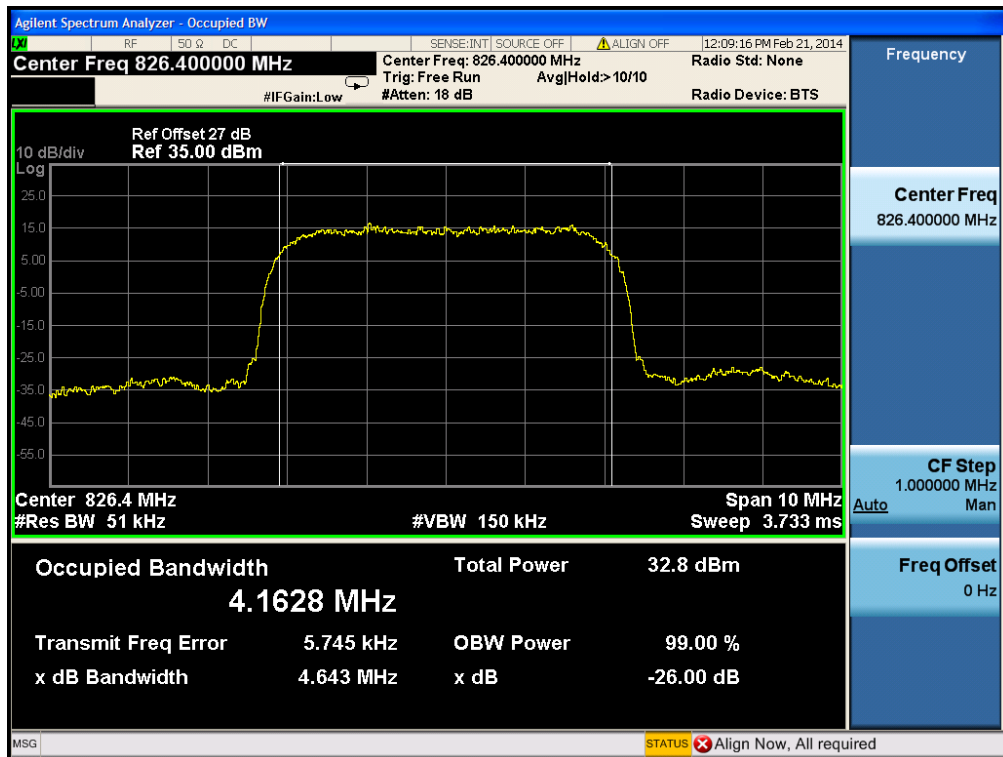


(Plot Y: HSPA+ 850MHz Channel = 4132)

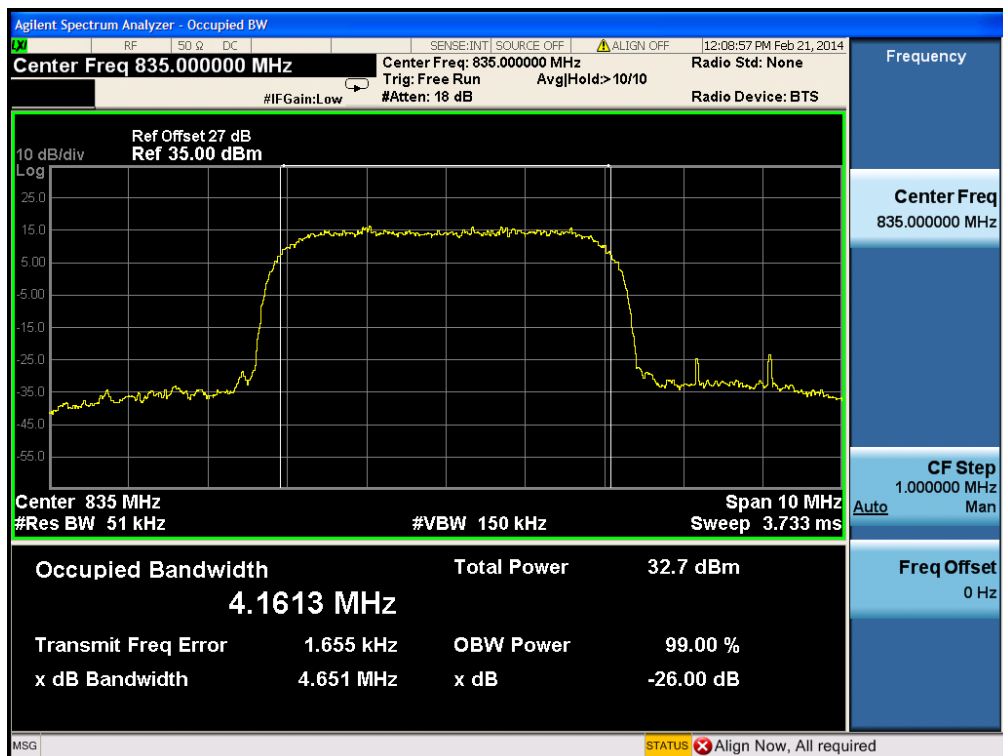


(Plot Z: HSPA+ 850MHz Channel = 4175)

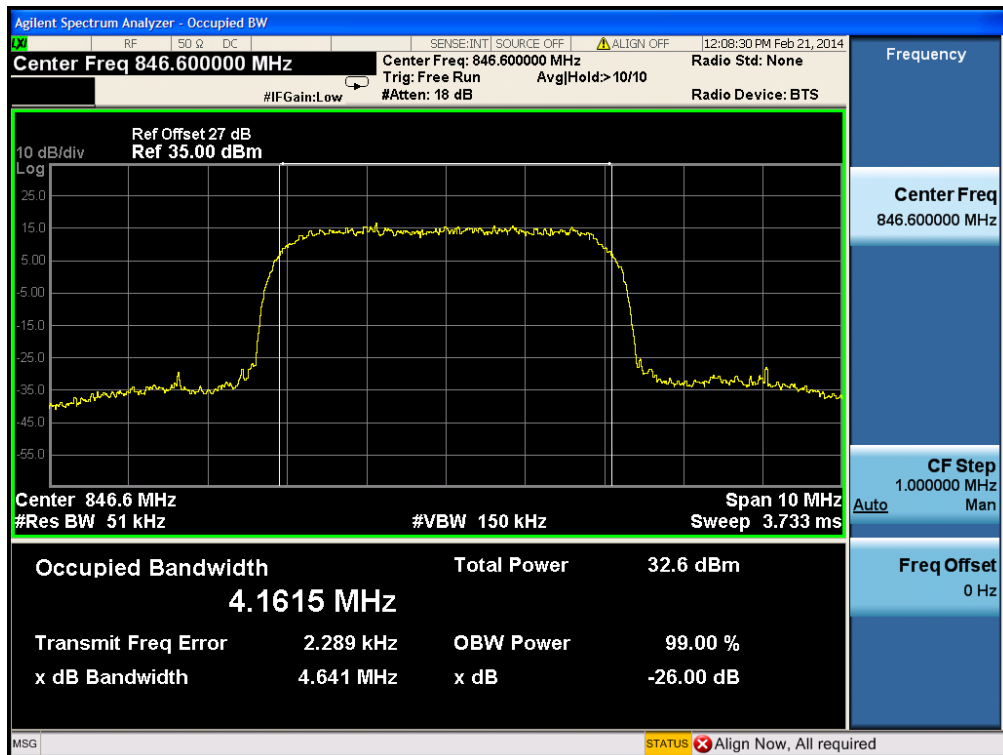


(Plot A1: HSPA+ 850MHz Channel = 4233)

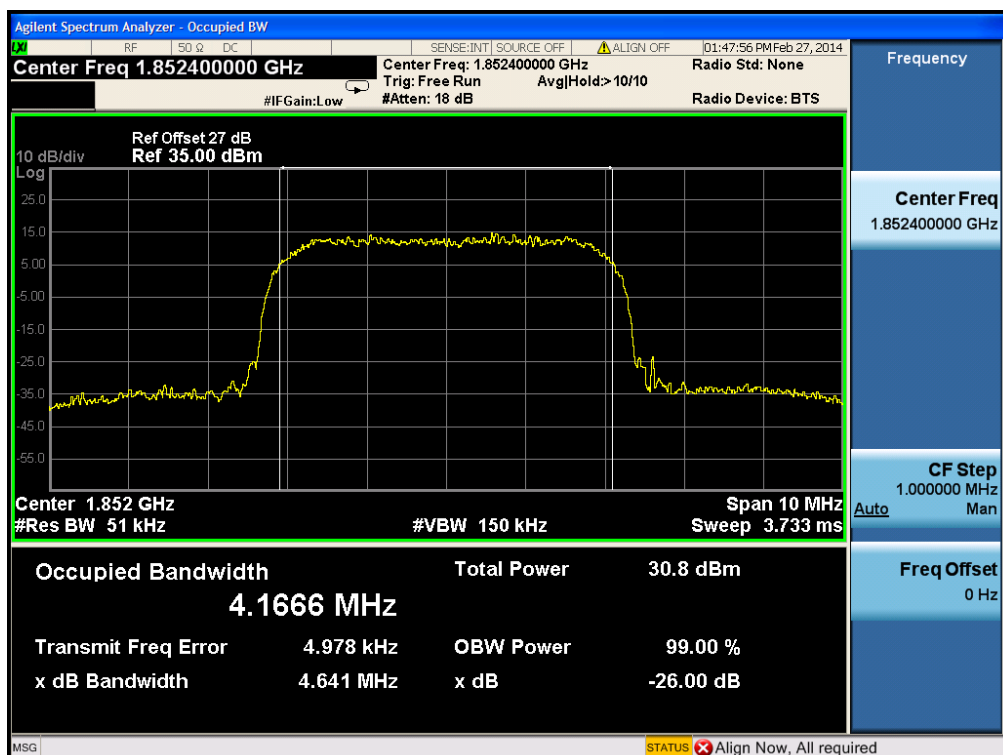


(Plot B1: HSPA+ 1900 MHz Channel = 9262)

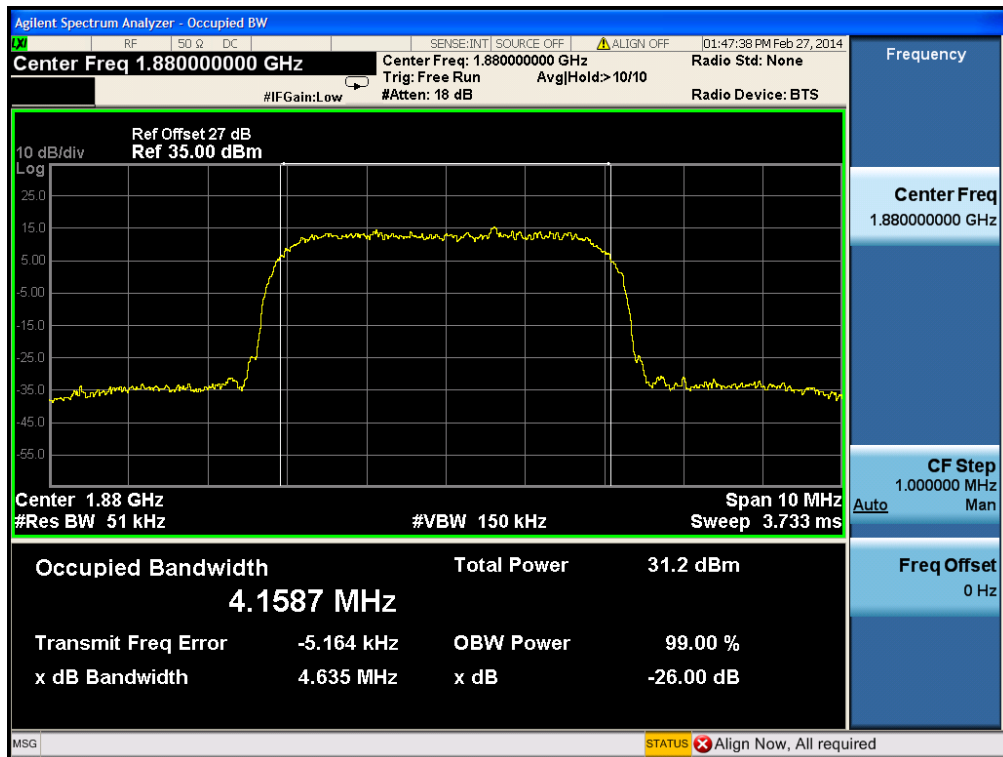


(Plot C1: HSPA+ 1900 MHz Channel = 9400)

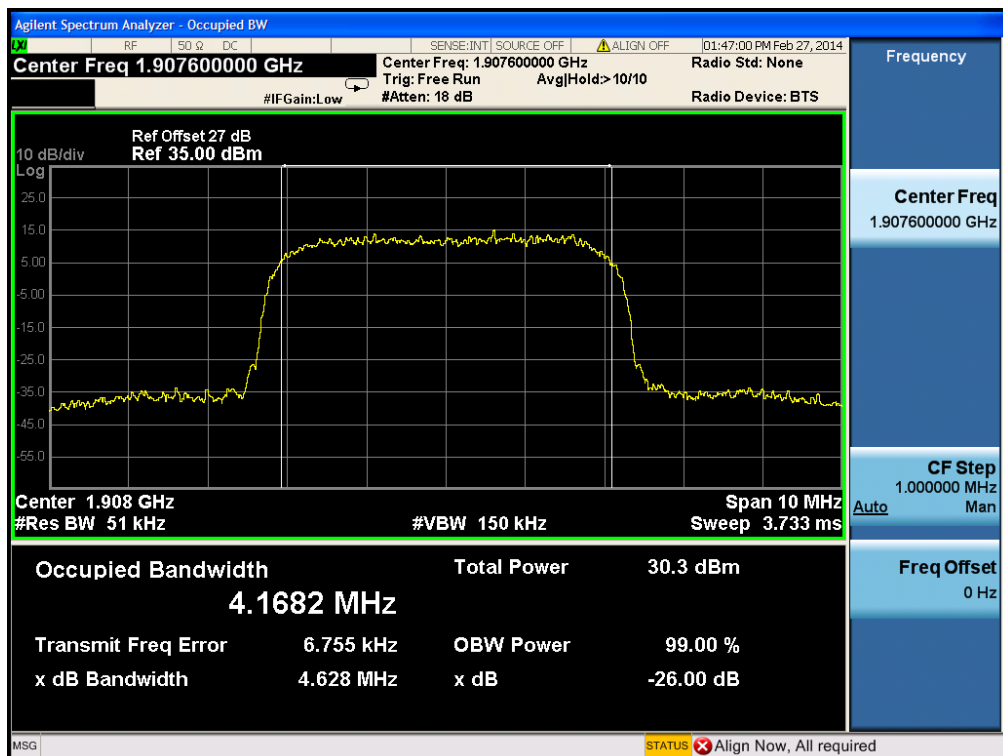


(Plot D1: HSPA+ 1900 MHz Channel = 9538)

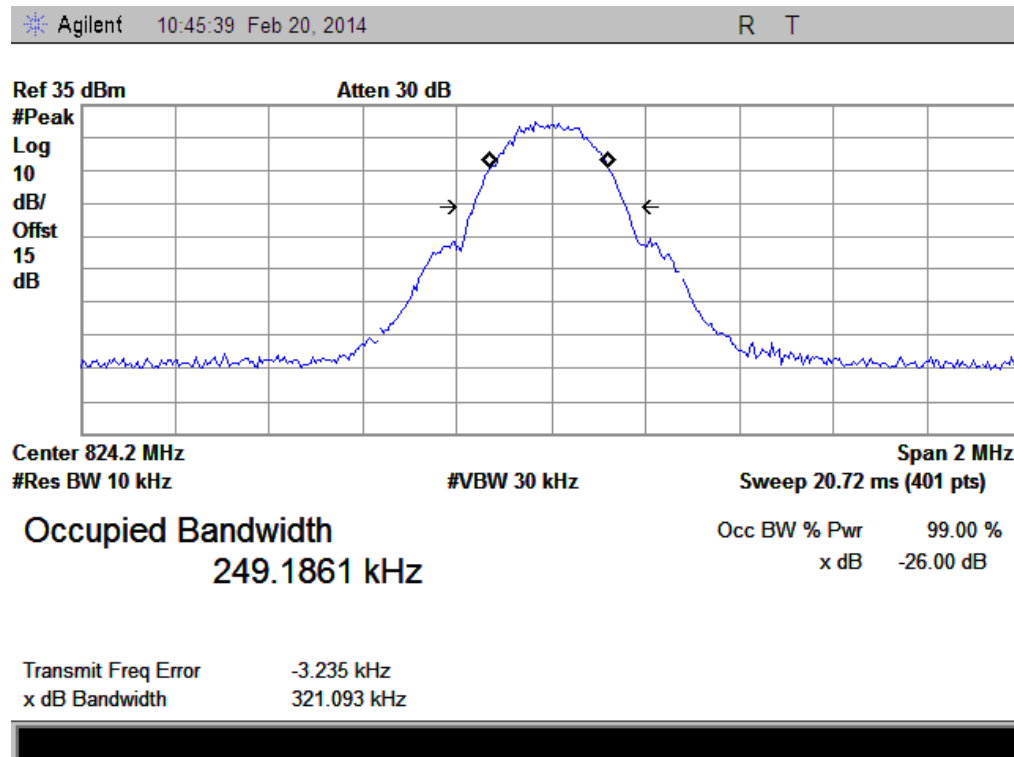


(Plot E1: GSM 850MHz Channel = 128)

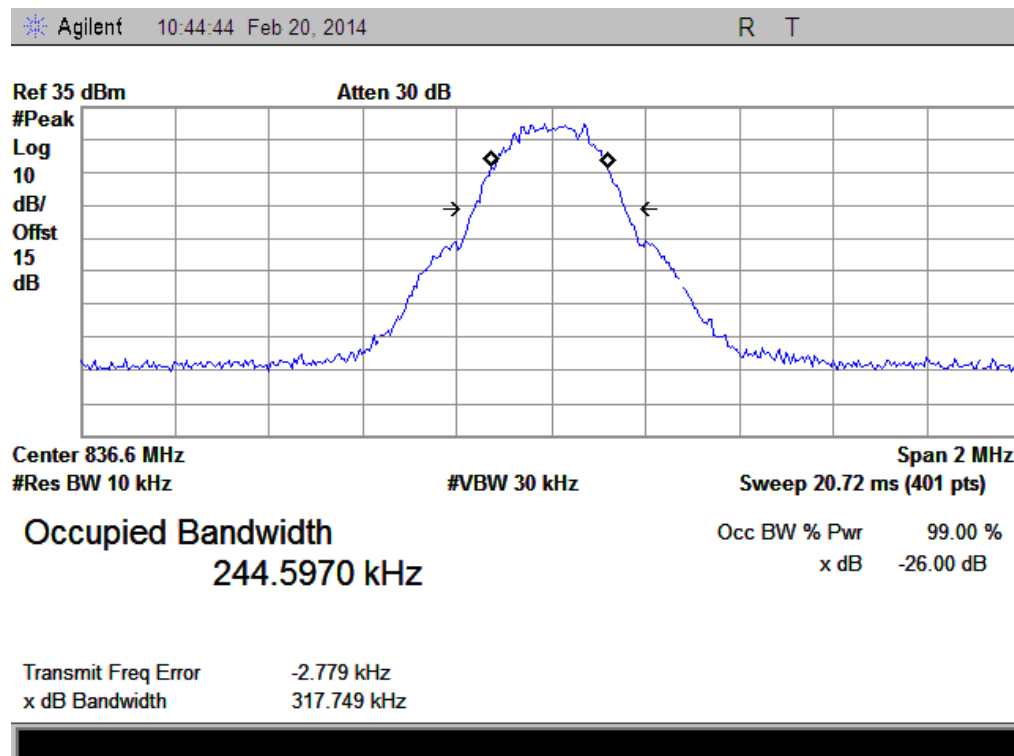


(Plot F1: GSM850 MHz Channel = 190)

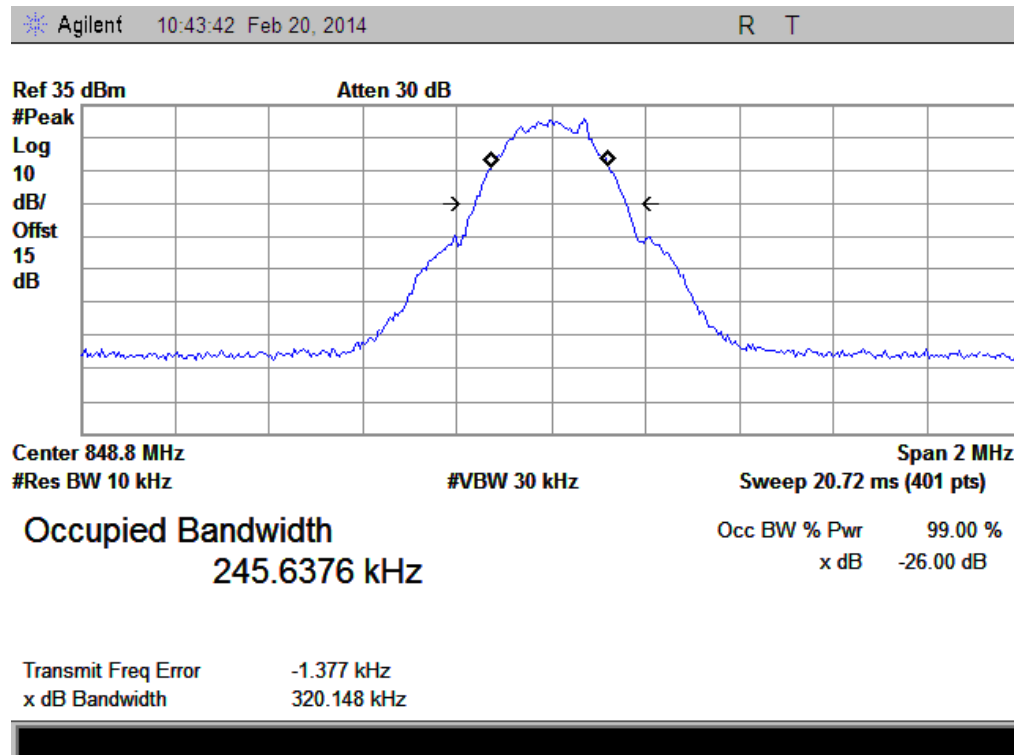


(Plot G1: GSM850 MHz Channel = 251)

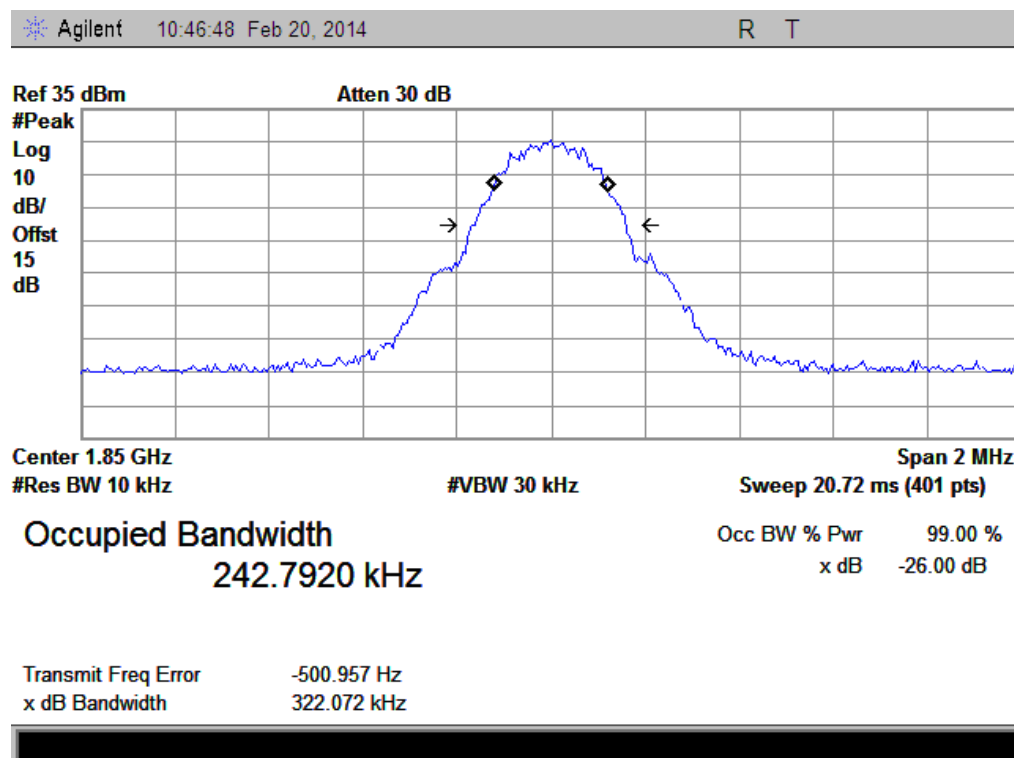


(Plot H1: GSM 1900 MHz Channel = 512)

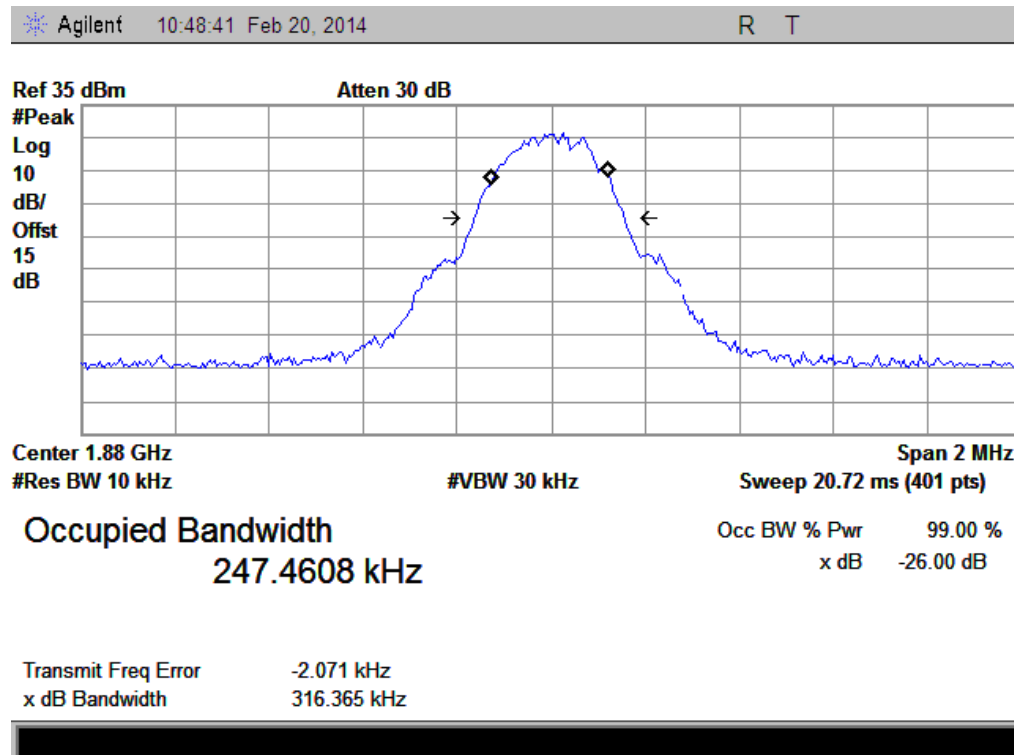


(Plot I1 : GSM 1900 MHz Channel = 661)

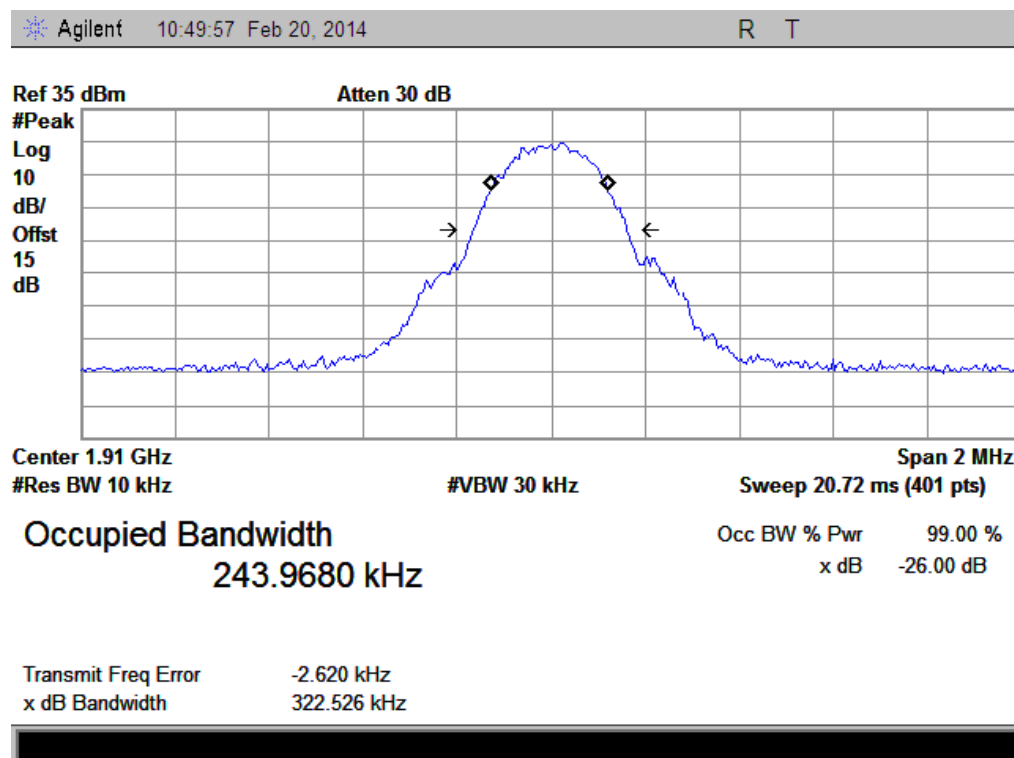


(Plot J1 : GSM1900 MHz Channel = 810)

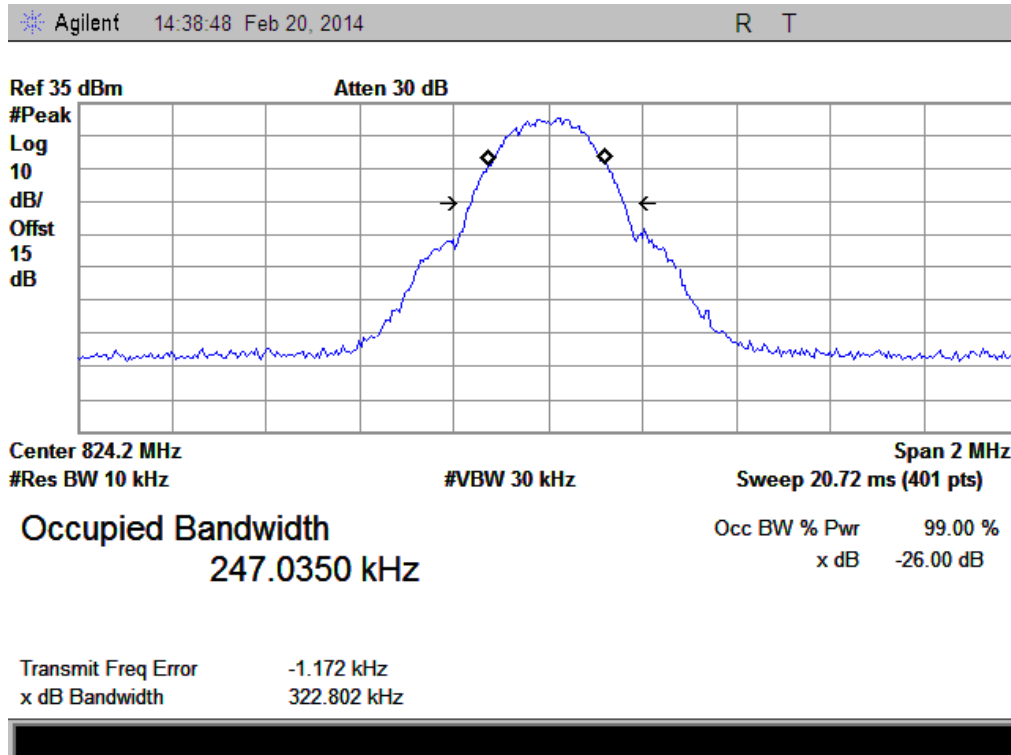


(Plot K1: GPRS 850 MHz Channel = 128)

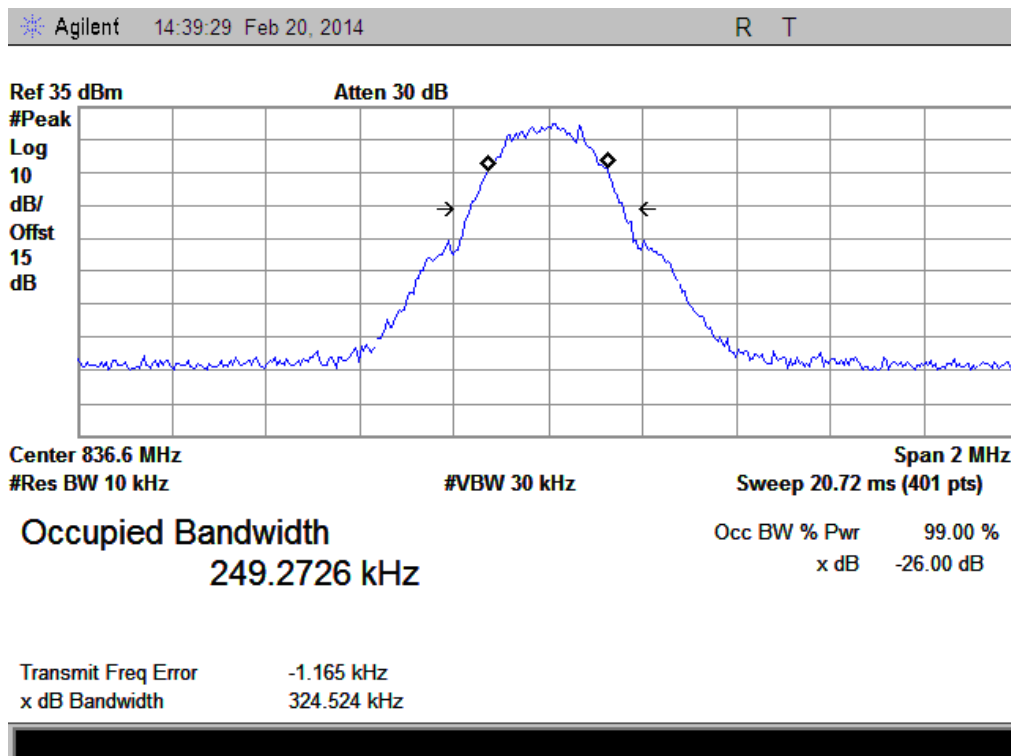


(Plot L1: GPRS850 MHz Channel = 190)

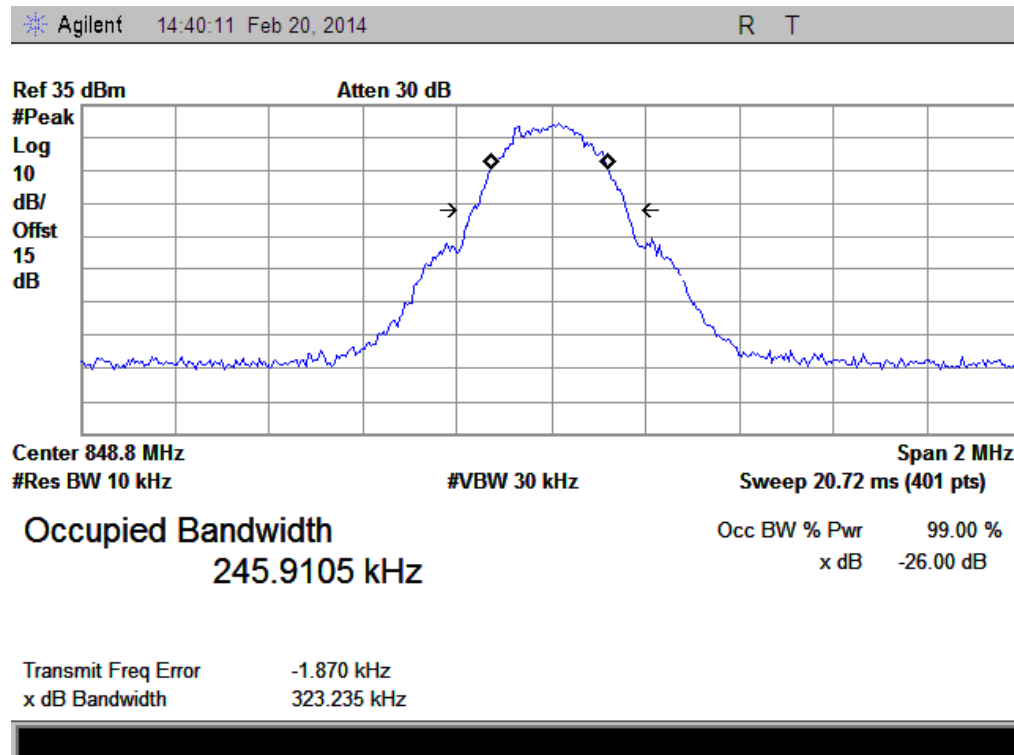


(Plot M1: GPRS 850 MHz Channel = 251)

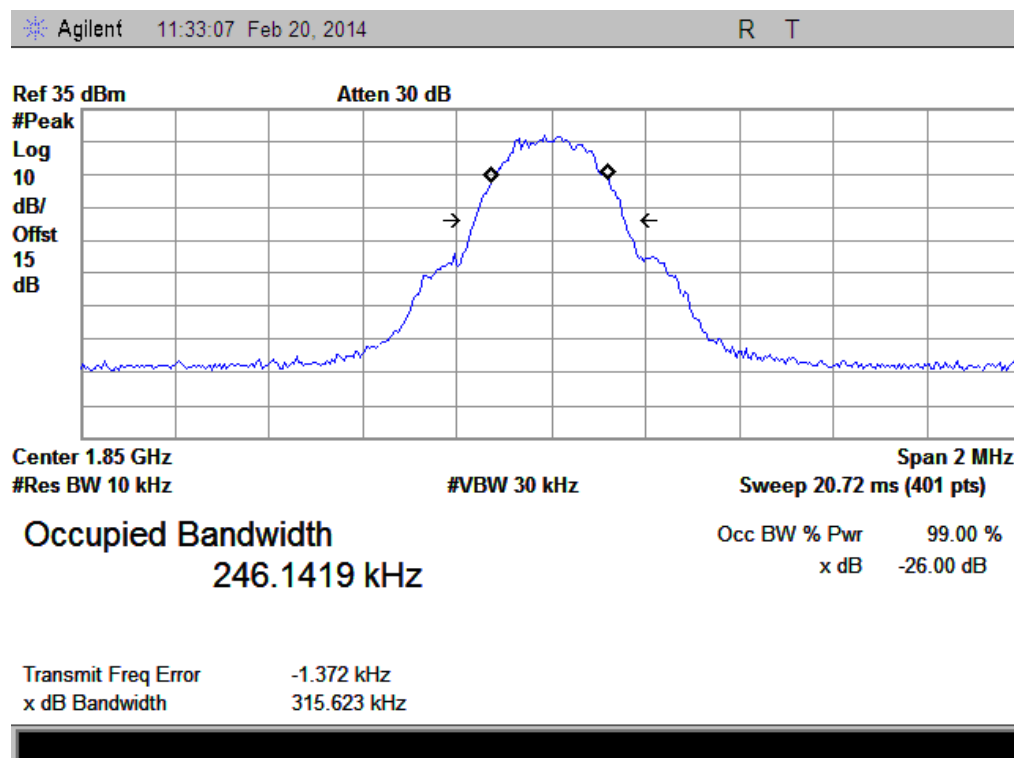

(Plot N1: GPRS1900 MHz Channel = 512)

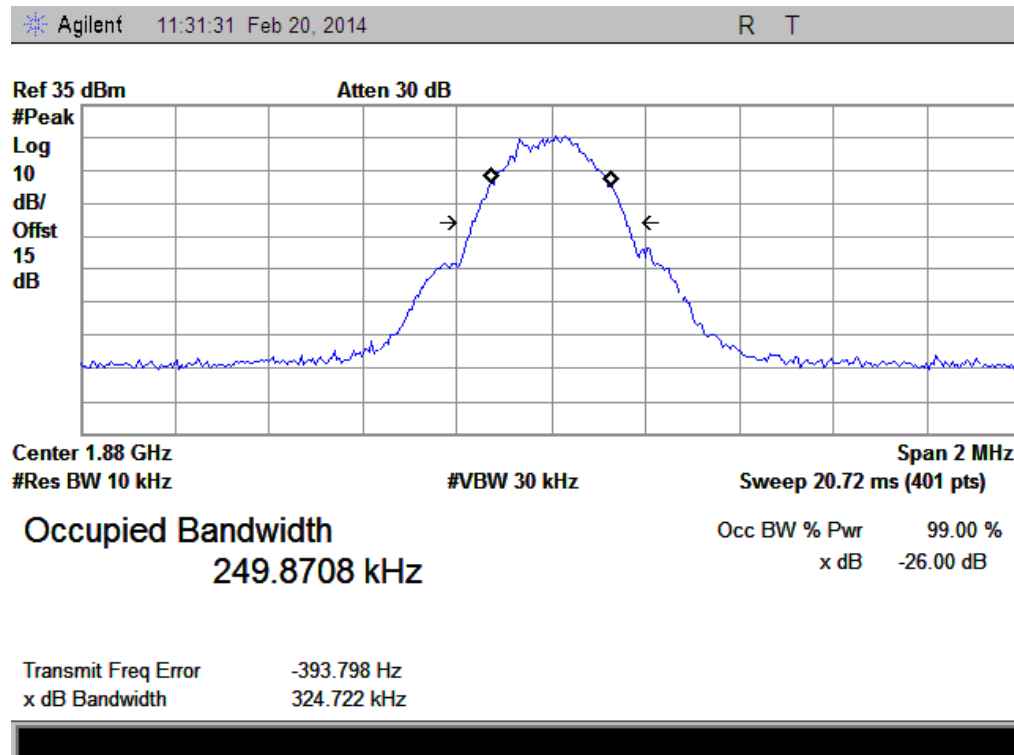

(Plot O1: GPRS1900 MHz Channel = 661)

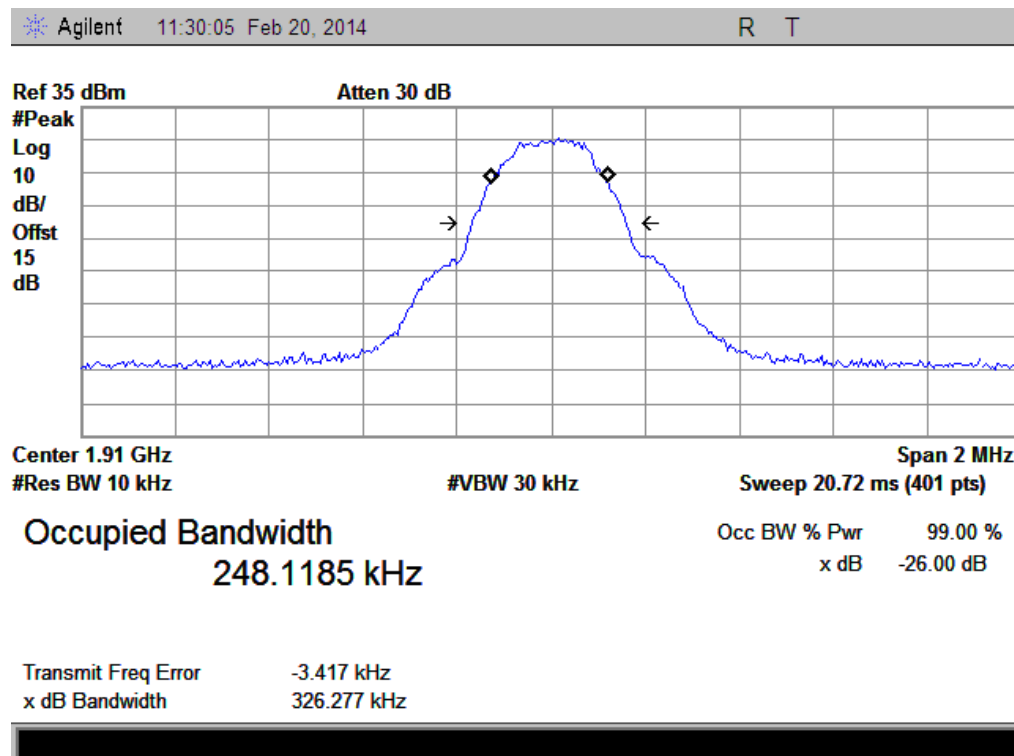

(Plot P1: GPRS1900 MHz Channel = 810)

2.4 Frequency Stability


2.4.1 Requirement

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

2.4.2 Test Description

1. Test Setup:

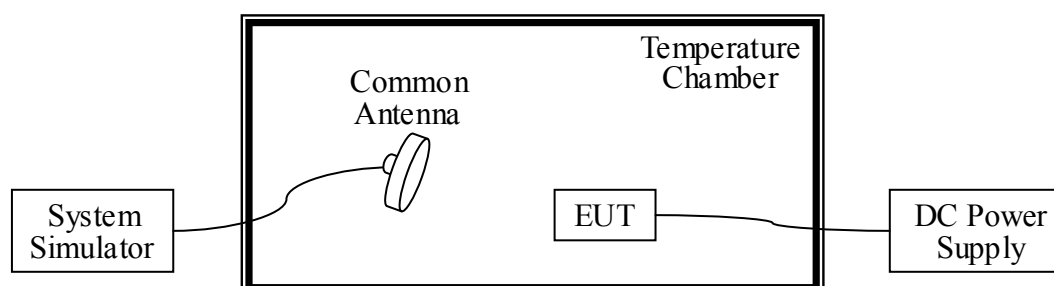

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.

2. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Due
System Simulator	Agilent	E5515C	GB43130131	2014.06.10
DC Power Supply	Good Will	GPS-3030DD	EF920938	2014.06.10
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2014.06.10

2.4.3 Test Verdict

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC, which are specified by the applicant; the normal temperature here used is 25°C . The frequency

deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm

1. GSM 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	12.18	±2060.5	20.17	±2091.5	17.22	±2122	PASS
	-20	-14.06		11.13		-11.92		
	-10	18.79		-12.56		13.11		
	0	22.39		31.11		12.09		
	+10	37.27		-25.03		3.02		
	+20	2.37		-17.19		19.71		
	+30	31.26		19.36		-10.21		
	+40	40.55		19.64		-12.10		
	+50	35.28		22.27		-12.99		
4.2	+25	-14.73		28.95		-7.53		
3.6	+25	-11.13		31.21		6.78		

2. GSM 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	5.05	±1850.2	22.63	±1880.0	22.15	±1909.8	<u>PASS</u>
	-20	3.02		-21.25		-10.27		
	-10	10.76		-11.11		-13.22		
	0	-16.51		-13.30		15.31		
	+10	-2.10		-25.67		21.39		
	+20	-12.99		13.51		16.22		
	+30	5.05		-10.61		-21.29		
	+40	3.02		33.27		15.35		
	+50	10.76		23.82		-14.28		
4.2	+25	31.28		23.82		21.29		
3.6	+25	-18.01		11.37		18.95		

3. EDGE 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 128 (824.2MHz)		Channel = 190 (836.6MHz)		Channel = 251 (848.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	11.33	±2060.5	7.23	±2091.5	-11.72	±2122	<u>PASS</u>
	-20	-17.55		-24.78		-12.21		
	-10	38.10		-1.26		13.33		
	0	-22.06		-18.68		5.33		
	+10	-16.11		-21.61		35.26		
	+20	17.76		14.58		-26.78		
	+30	15.64		-0.68		19.54		
	+40	17.33		36.87		-16.67		
	+50	-17.55		3.67		26.79		
4.2	+25	-15.71		13.95		-11.76		
3.6	+25	-16.70		36.23		6.78		

4. EDGE 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 512 (1850.2MHz)		Channel = 661 (1880.0MHz)		Channel = 810 (1909.8MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	-0.59	±1850.2	16.41	±1880.0	-19.15	±1909.8	<u>PASS</u>
	-20	21.45		30.18		27.02		
	-10	13.45		32.07		44.04		
	0	1.31		-7.98		-17.39		
	+10	-12.52		26.21		10.91		
	+20	30.62		11.10		6.63		
	+30	13.45		-6.17		28.93		
	+40	-12.52		-12.68		19.22		
	+50	-0.59		36.87		22.19		
4.2	+25	15.60		3.02		26.79		
3.6	+25	-38.01		13.19		19.93		

5. WCDMA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	17.29	±2066	11.87	±2087.5	-1.20	±2116.5	PASS
	-20	-7.32		-0.59		-19.38		
	-10	-3.40		21.45		7.57		
	0	16.47		13.45		4.22		
	+10	30.18		1.31		-17.39		
	+20	32.07		-12.52		11.90		
	+30	-7.98		30.62		6.63		
	+40	26.21		13.45		28.93		
	+50	11.10		-12.52		19.66		
4.2	+25	-6.18		30.62		22.19		
3.6	+25	18.66		-18.00		-18.70		

6. WCDMA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	-13.96	±1852.4	-13.43	±1880.0	-8.72	±1907.6	<u>PASS</u>
	-20	35.23		12.08		23.65		
	-10	-8.31		-14.03		14.81		
	0	-13.95		18.79		-3.07		
	+10	-24.37		22.39		17.46		
	+20	12.88		37.27		-10.39		
	+30	-14.75		2.57		17.47		
	+40	23.37		-13.49		27.84		
	+50	-13.96		-5.71		-2.57		
4.2	+25	23.51		14.58		20.95		
3.6	+25	22.00		26.37		-23.22		

7. HSDPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	27.46	±2066	-24.37	±2087.5	15.81	±2116.5	PASS
	-20	-8.56		-13.96		14.41		
	-10	20.65		35.23		21.57		
	0	12.88		-8.31		-24.37		
	+10	-14.75		-13.95		-13.96		
	+20	8.78		-24.37		35.23		
	+30	-1.49		12.88		-8.31		
	+40	17.14		-14.75		-13.95		
	+50	-23.61		23.37		26.37		
4.2	+25	32.03		7.93		7.90		
3.6	+25	17.51		-31.21		1.78		

8. HSDPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	11.87	±1852.4	-3.01	±1880	2.61	±1907.6	<u>PASS</u>
	-20	-16.65		21.71		-8.38		
	-10	20.12		14.37		-13.02		
	0	-3.01		-11.21		-8.51		
	+10	21.71		10.60		5.64		
	+20	20.12		-4.81		-3.85		
	+30	-15.01		34.31		9.57		
	+40	22.71		8.36		27.54		
	+50	16.32		-25.88		-12.52		
4.2	+25	-11.28		29.43		-2.83		
3.6	+25	10.33		-2.27		14.42		

9. HSUPA 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	25.52	±2066	13.5	±2087.5	13.55	±2116.5	PASS
	-20	-16.20		-19.33		27.42		
	-10	-12.61		-11.79		37.01		
	0	-13.09		-0.44		-7.32		
	+10	-0.38		0.01		-4.91		
	+20	-11.85		-6.64		21.35		
	+30	29.57		24.25		-5.94		
	+40	-11.79		9.63		13.78		
	+50	-0.44		23.76		28.45		
4.2	+25	1.71		-4.57		29.11		
3.6	+25	1.54		5.25		-7.70		

10. HSUPA 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	31.57	±1852.4	-11.79	±1880	8.69	±1907.6	<u>PASS</u>
	-20	27.13		-0.44		2.01		
	-10	7.62		0.01		-4.75		
	0	2.31		13.82		16.38		
	+10	-4.73		-15.25		-1.76		
	+20	16.22		-11.79		23.52		
	+30	-1.55		-0.44		-0.38		
	+40	23.16		1.15		-11.85		
	+50	13.79		-7.94		-5.91		
4.2	+25	-7.08		6.81		25.48		
3.6	+25	22.58		-1.83		-15.78		

11. HSPA+ 850MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 4123 (826.4MHz)		Channel = 4175 (835MHz)		Channel = 4233 (846.6MHz)		
		Hz	Limit	Hz	Limit	Hz	Limit	
3.7	-30	26.32	±2066	13.5	±2087.5	17.51	±2116.5	PASS
	-20	-17.20		-17.71		22.32		
	-10	-12.61		-2.44		31.05		
	0	-13.09		0.01		-17.22		
	+10	-0.38		-16.31		-14.51		
	+20	-11.85		-11.79		21.35		
	+30	29.57		-0.44		-5.94		
	+40	-11.79		0.01		13.78		
	+50	-0.44		23.76		28.45		
4.2	+25	8.71		-4.57		29.11		
3.6	+25	11.54		15.25		-6.75		

12. HSPA+ 1900MHz Band

Test Conditions		Frequency Deviation						Verdict
Power (VDC)	Temperature (°C)	Channel = 9262 (1852.4MHz)		Channel = 9400 (1880.0MHz)		Channel = 9538 (1907.6MHz)		
		Hz	Limits	Hz	Limits	Hz	Limits	
3.7	-30	12.11	±1852.4	-15.31	±1880	3.31	±1907.6	PASS
	-20	20.15		-11.79		-5.73		
	-10	11.61		-0.44		18.22		
	0	3.31		0.01		-33.55		
	+10	-5.73		-15.31		3.31		
	+20	18.22		-11.79		-5.73		
	+30	-33.55		-0.44		19.21		
	+40	27.16		0.01		-31.05		
	+50	23.79		-6.64		22.36		
4.2	+25	-37.01		24.25		3.31		
3.6	+25	22.58		9.63		-17.08		

2.5 Conducted Out of Band Emissions

2.5.1 Requirement

According to FCC section 22.917(a) and FCC section 24.238(a) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

3. Test Verdict:


Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
GSM 850MHz	128	824.2	-19.27	Plot A1toA1.1	-13	<u>PASS</u>
	190	836.6	-19.66	Plot A2toA2.1		<u>PASS</u>
	251	848.8	-19.17	Plot A3toA3.1		<u>PASS</u>
GSM 1900MHz	512	1850.2	-17.57	Plot B1toB1.1	-13	PASS
	661	1880.0	-18.70	Plot B2toB2.1		PASS
	810	1909.8	-19.63	Plot B3toB3.1		PASS
EDGE 850MHz	128	824.2	-19.22	Plot C1toC1.1	-13	PASS
	190	836.6	-20.48	Plot C2toC2.1		PASS
	251	848.8	-19.32	Plot C3toC3.1		PASS
EDGE 1900MHz	512	1850.2	-19.25	Plot D1toD1.1	-13	PASS
	661	1880.0	-19.35	Plot D2toD2.1		PASS
	810	1909.8	-19.74	Plot D3toD3.1		PASS
WCDMA 850MHz	4132	826.4	< -25	Plot E1toE1.1	-13	PASS
	4175	835	< -25	Plot E2toE2.1		PASS
	4233	846.6	< -25	Plot E3toE3.1		PASS
WCDMA 1900MHz	9262	1852.4	< -25	Plot F1toF1.1	-13	PASS
	9400	1880	< -25	Plot F2toF2.1		PASS
	9538	1907.6	< -25	Plot F3toF3.1		PASS
HSDPA	4132	826.4	< -25	Plot G1toG1.1	-13	PASS




Band	Channel	Frequency (MHz)	Measured Max. Spurious Emission (dBm)	Refer to Plot	Limit (dBm)	Verdict
850MHz	4175	835	< -25	Plot G2toG2.1		PASS
	4233	846.6	< -25	Plot G3toG3.1		PASS
HSDPA 1900MHz	9262	1852.4	< -25	Plot H1toH1.1	-13	PASS
	9400	1880	< -25	Plot H2toH2.1		PASS
	9538	1907.6	< -25	Plot H3toH3.1		PASS
HSUPA 850MHz	4132	826.4	< -25	Plot I1toI1.1	-13	PASS
	4175	835	< -25	Plot I2toI2.1		PASS
	4233	846.6	< -25	Plot I3toI3.1		PASS
HSUPA 1900MHz	9262	1852.4	< -25	Plot J1toJ1.1	-13	PASS
	9400	1880	< -25	Plot J2toJ2.1		PASS
	9538	1907.6	< -25	Plot J3toJ3.1		PASS
HSPA+ 850MHz	4132	826.4	< -25	Plot K1toK1.1	-13	PASS
	4175	835	< -25	Plot K2toK2.1		PASS
	4233	846.6	< -25	Plot K3toK3.1		PASS
HSPA+ 1900MHz	9262	1852.4	< -25	Plot L1toL1.1	-13	PASS
	9400	1880	< -25	Plot L2toL2.1		PASS
	9538	1907.6	< -25	Plot L3toL3.1		PASS

4. Test Plots for the Whole Measurement Frequency Range:


Note: the power of the EUT transmitting frequency should be ignored.

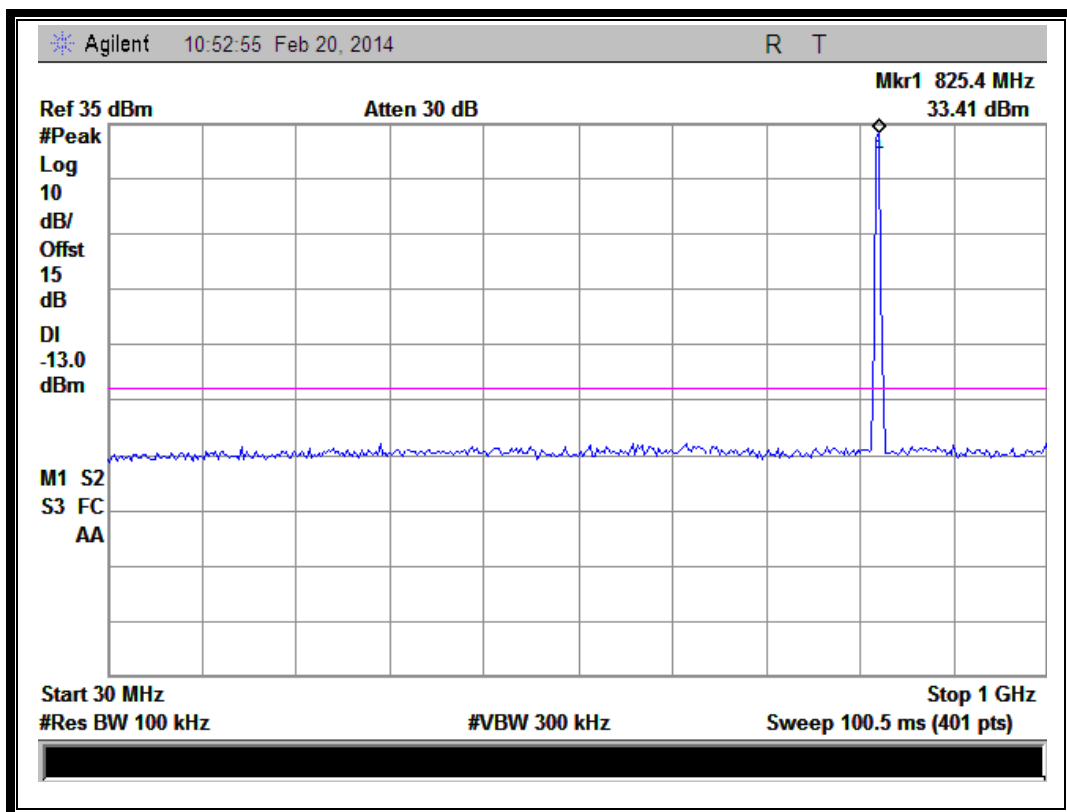


(Plot A1: GSM 850MHz Channel = 128, 30MHz to 1GHz)

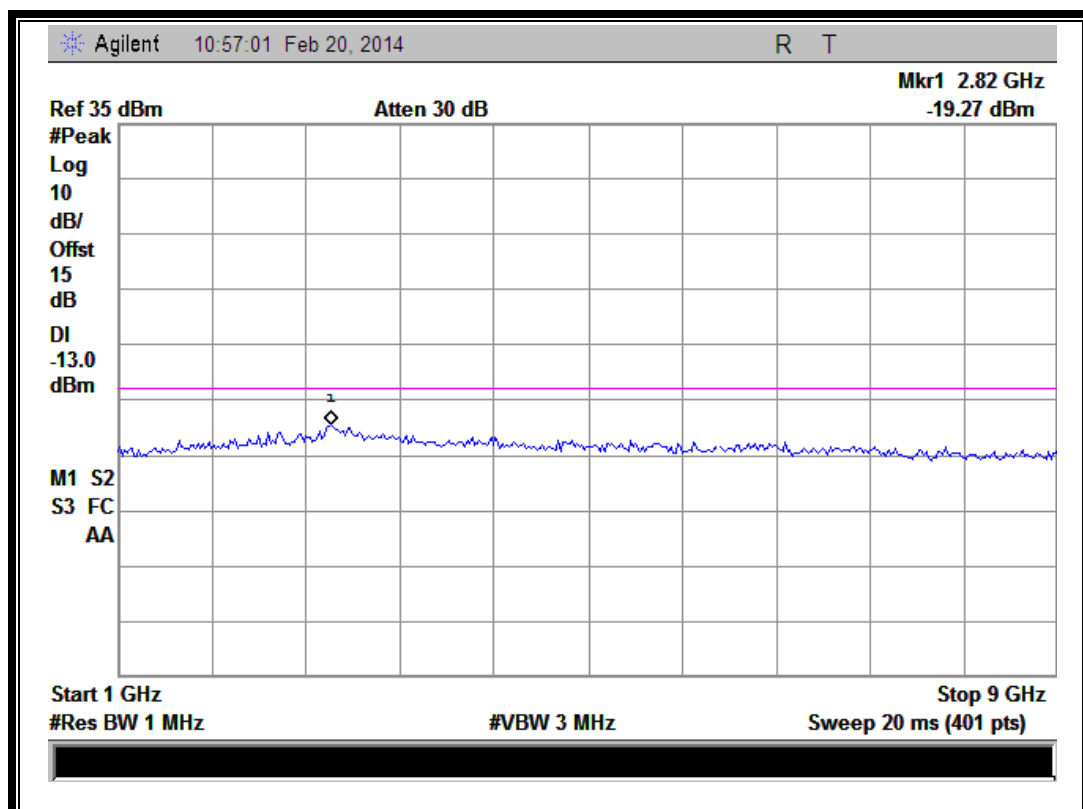


(Plot A1.1: GSM 850MHz Channel = 128, 1GHz to 9GHz)

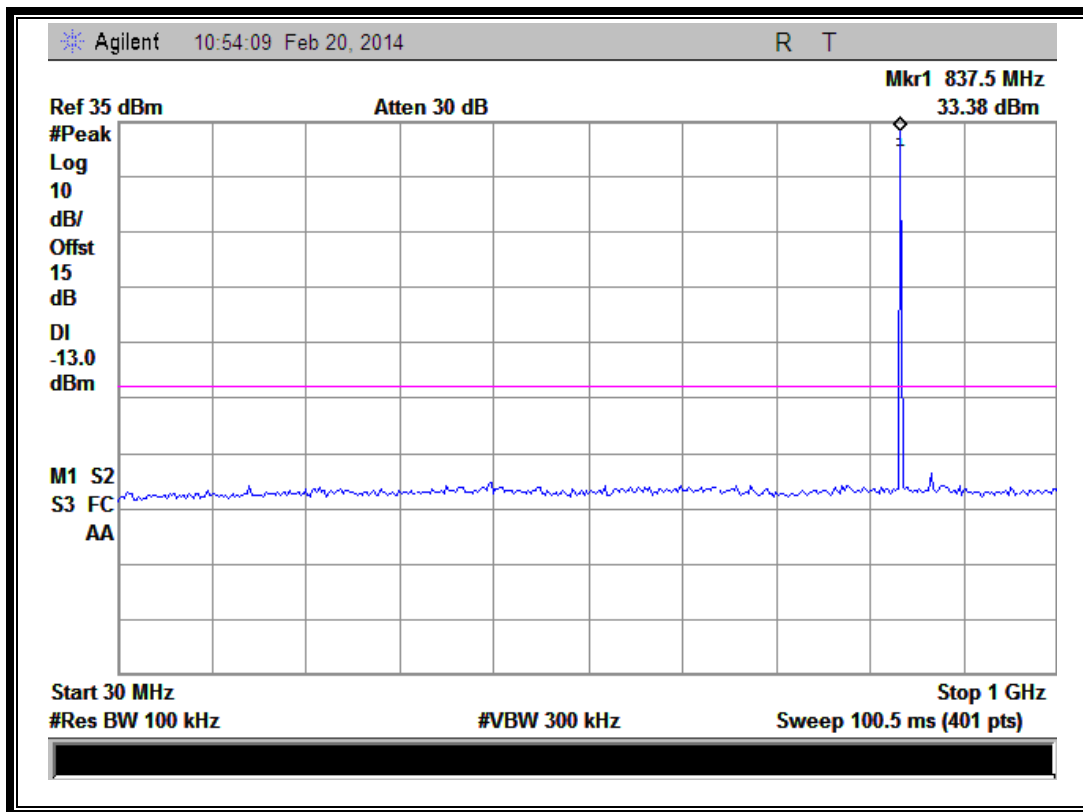


(Plot A2: GSM 850MHz Channel = 190, 30MHz to 1GHz)

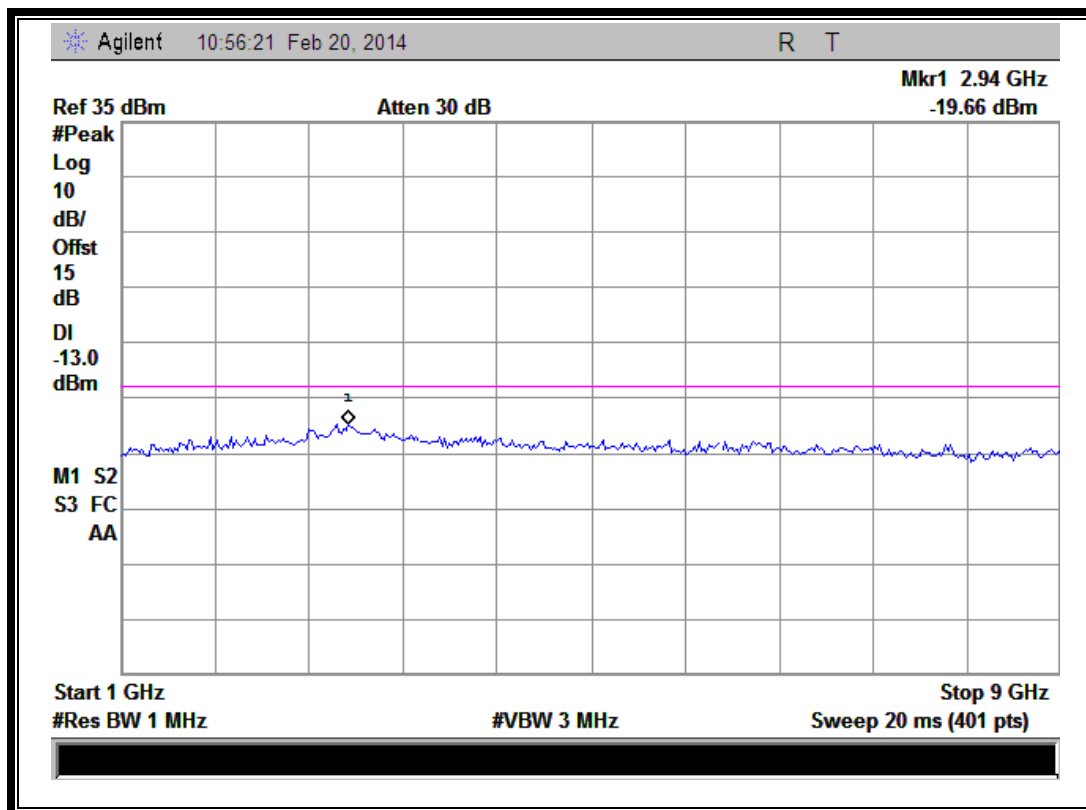


(Plot A2.1: GSM 850MHz Channel = 190, 1GHz to 9GHz)

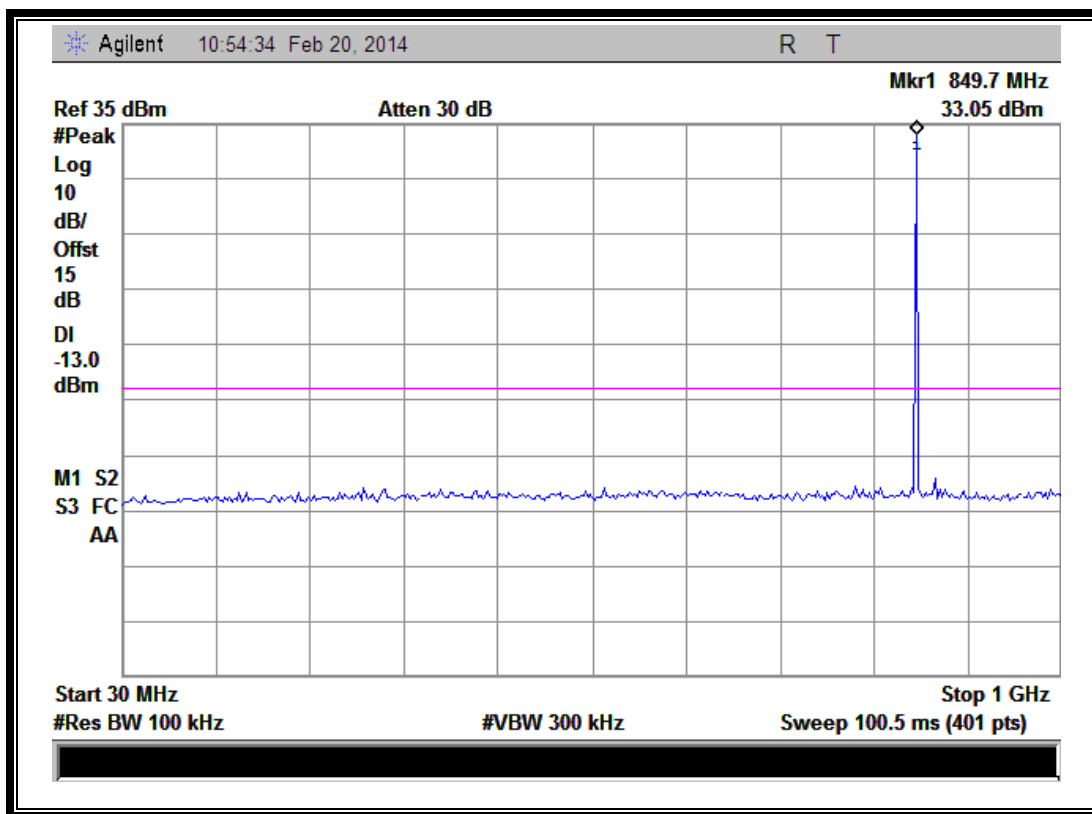


(Plot A3: GSM 850MHz Channel = 251, 30MHz to 1GHz)

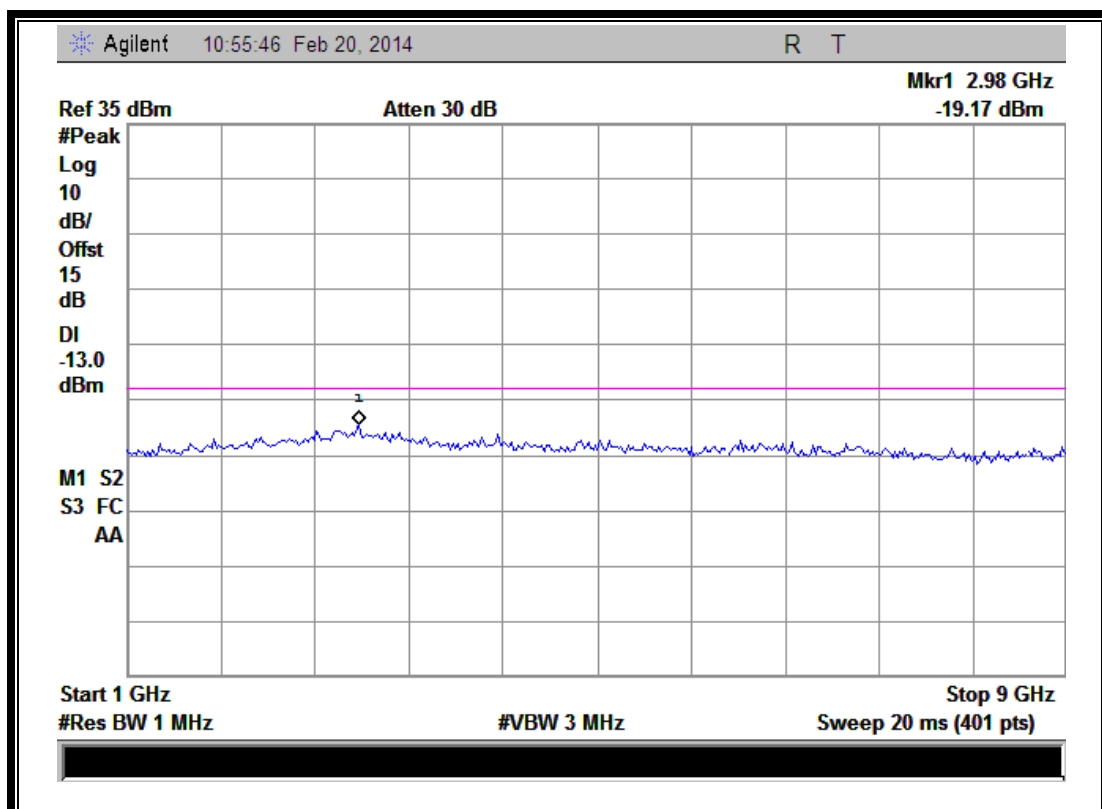


(Plot A3.1: GSM 850MHz Channel = 251, 1GHz to 9GHz)

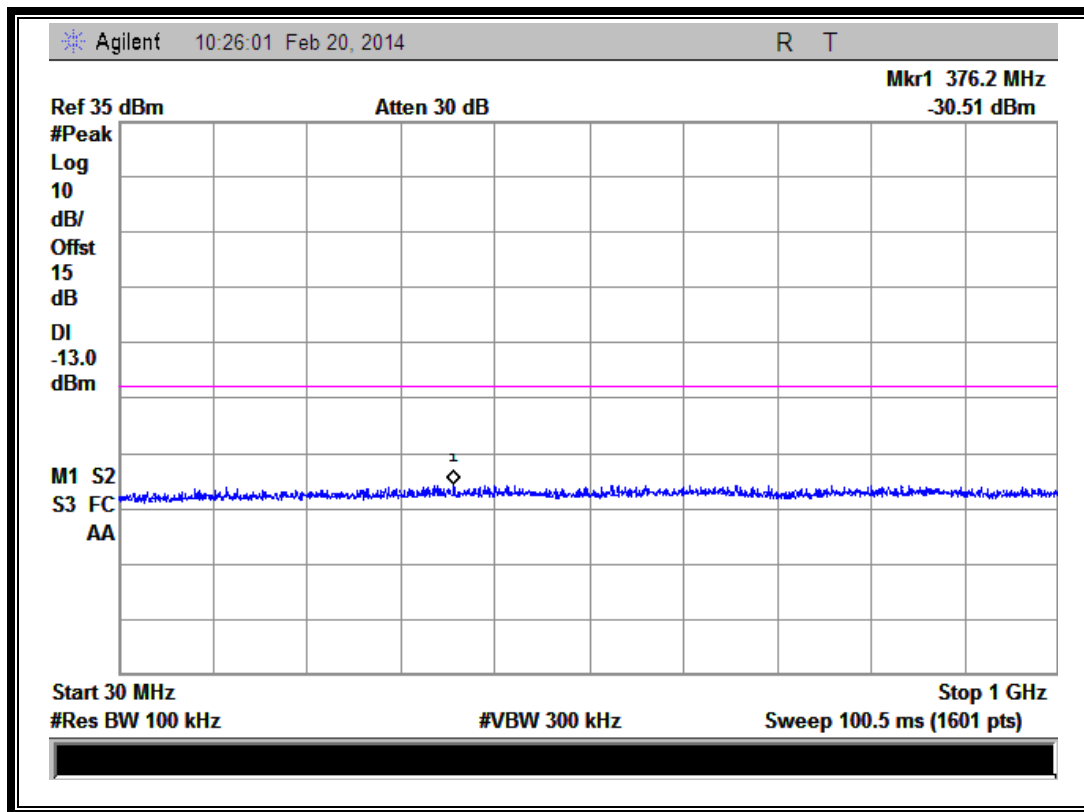


(Plot B1: GSM 1900MHz Channel = 512, 30MHz to 1GHz)

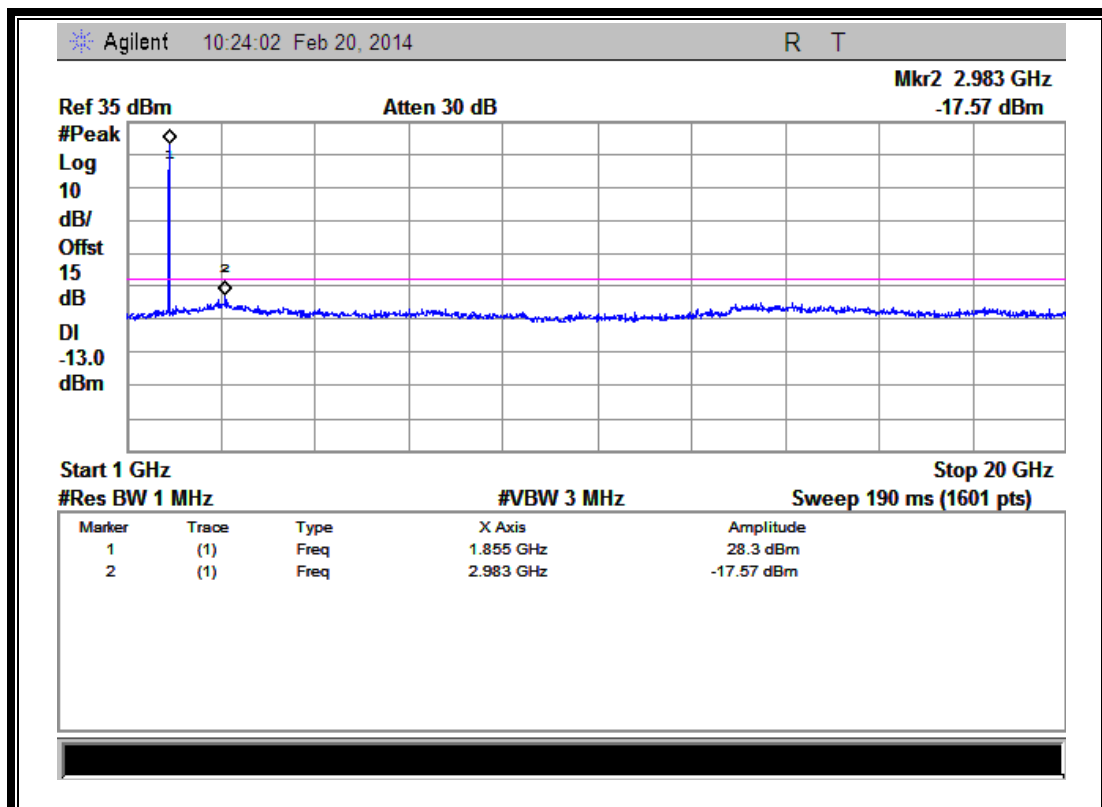


(Plot B1.1: GSM 1900MHz Channel = 512, 1GHz to 20GHz)

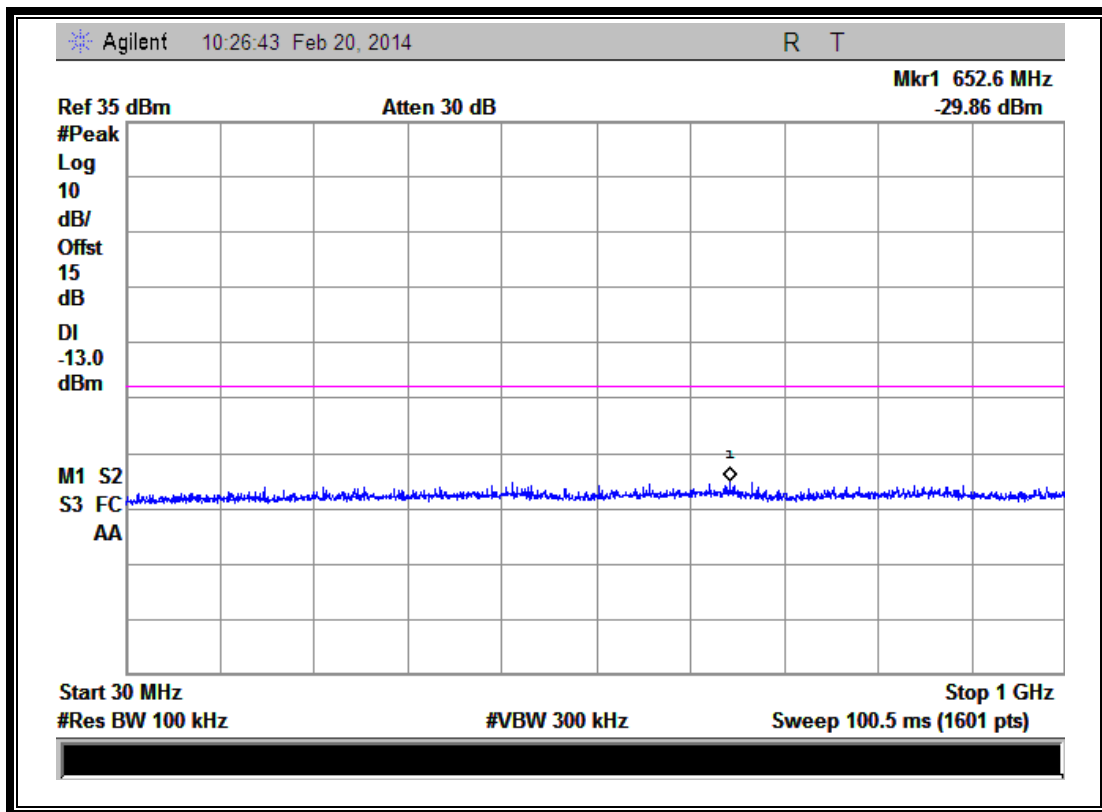


(Plot B2: GSM 1900MHz Channel = 661, 30MHz to 1GHz)

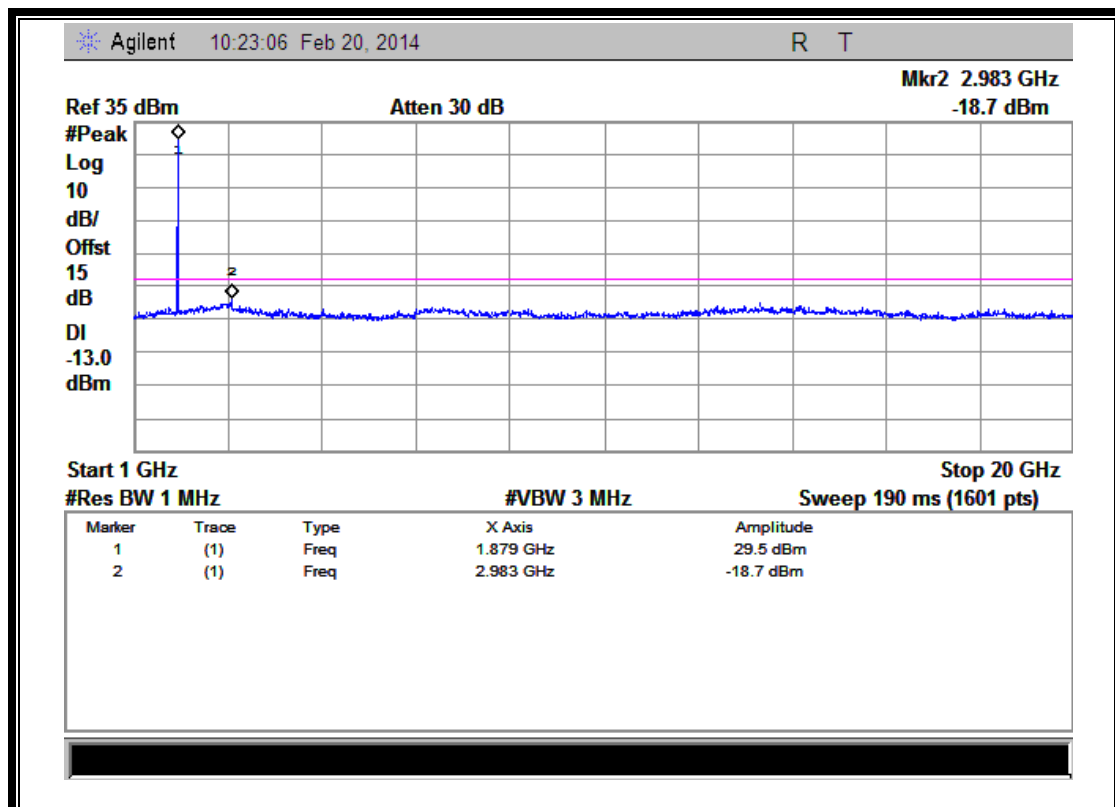


(Plot B2.1: GSM 1900MHz Channel = 661, 1GHz to 20GHz)

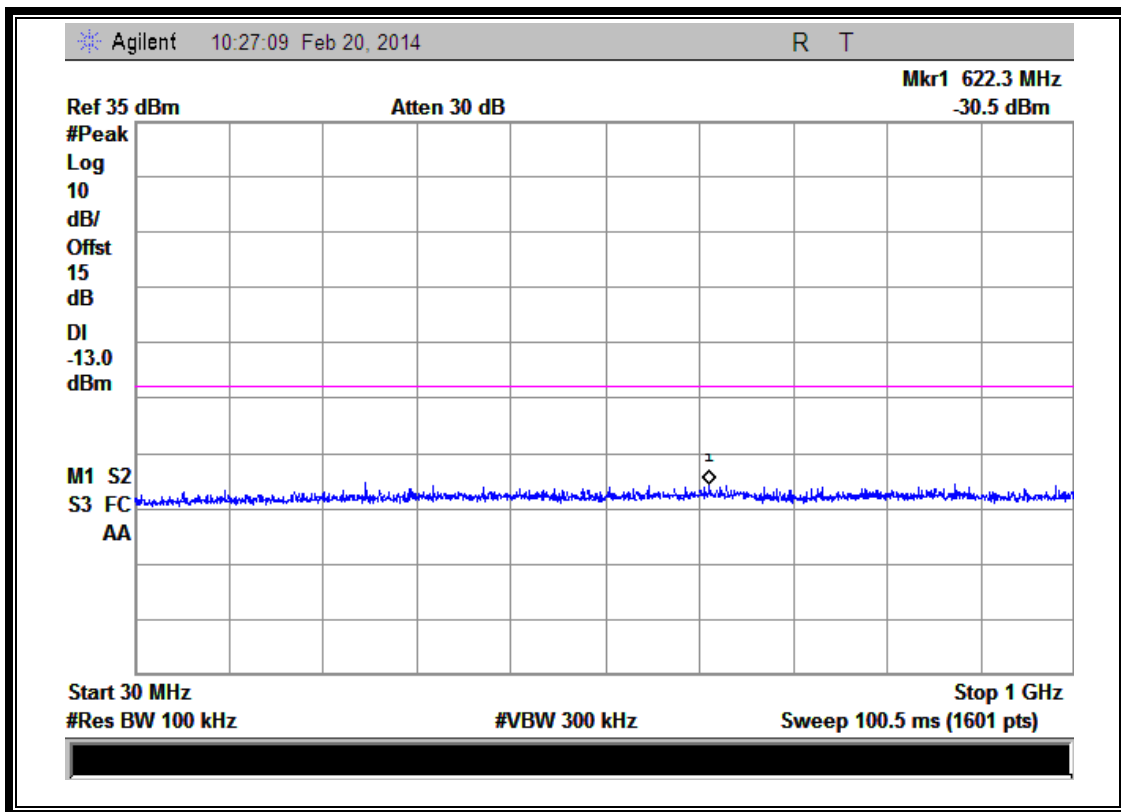


(Plot B3: GSM 1900MHz Channel = 810, 30MHz to 1GHz)

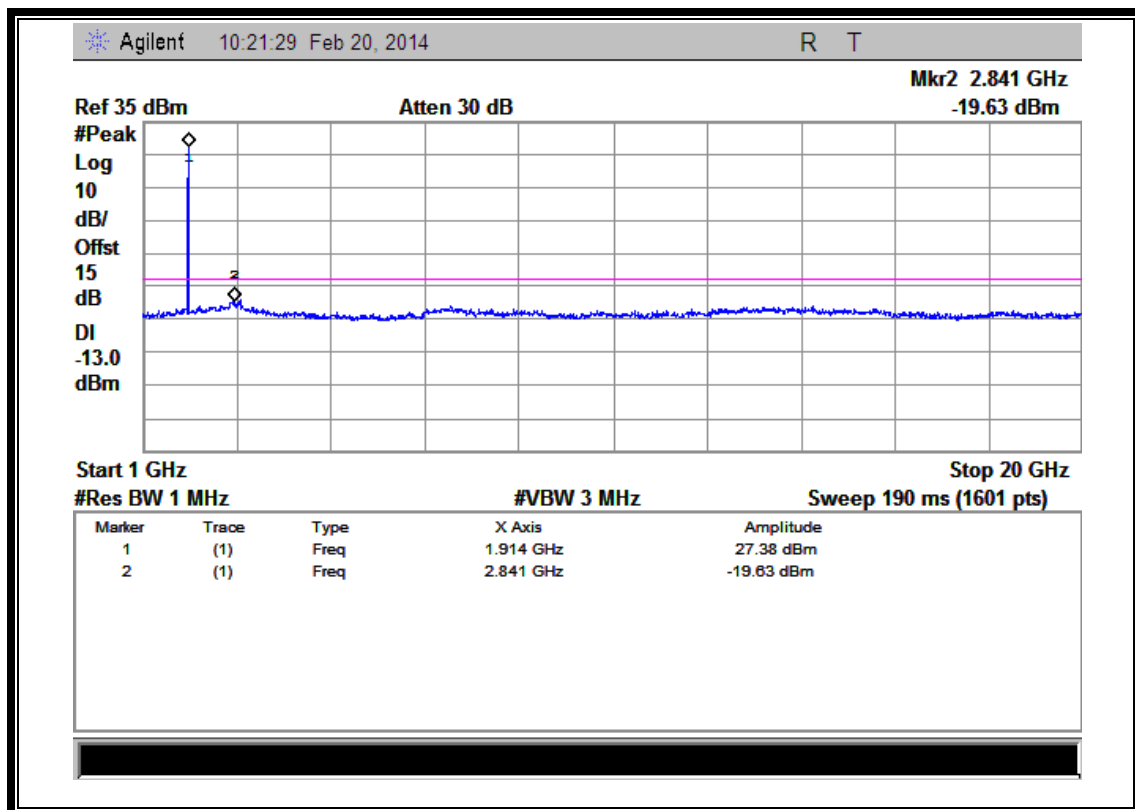



(Plot B3.1: GSM 1900MHz Channel = 810, 1GHz to 20GHz)

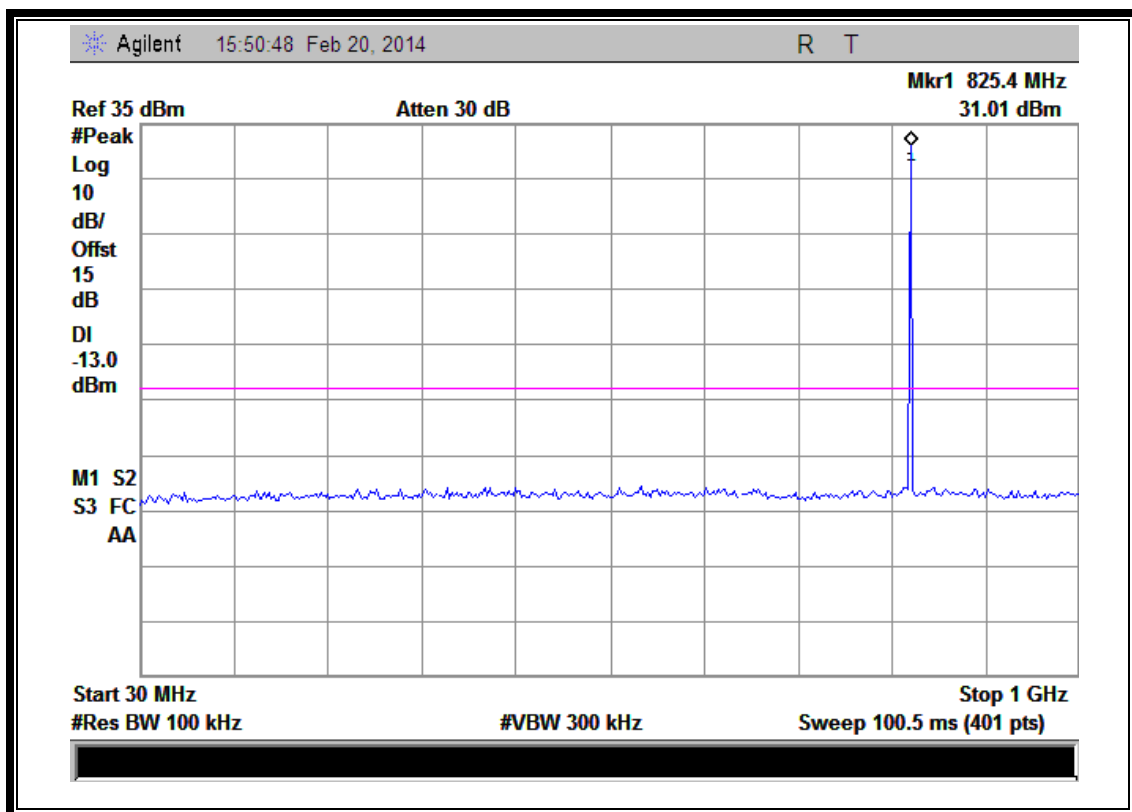


(Plot C1: EDGE 850MHz Channel = 128, 30MHz to 1GHz)

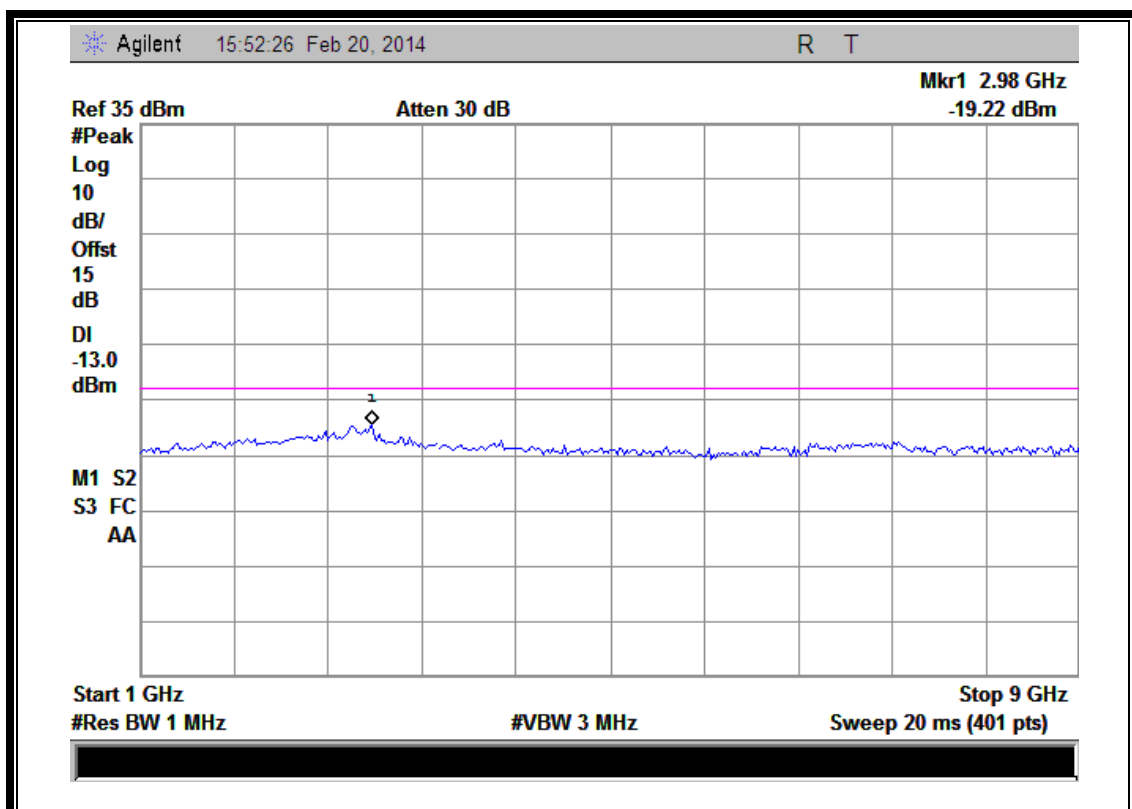


(Plot C1.1: EDGE 850MHz Channel = 128, 1GHz to 9GHz)

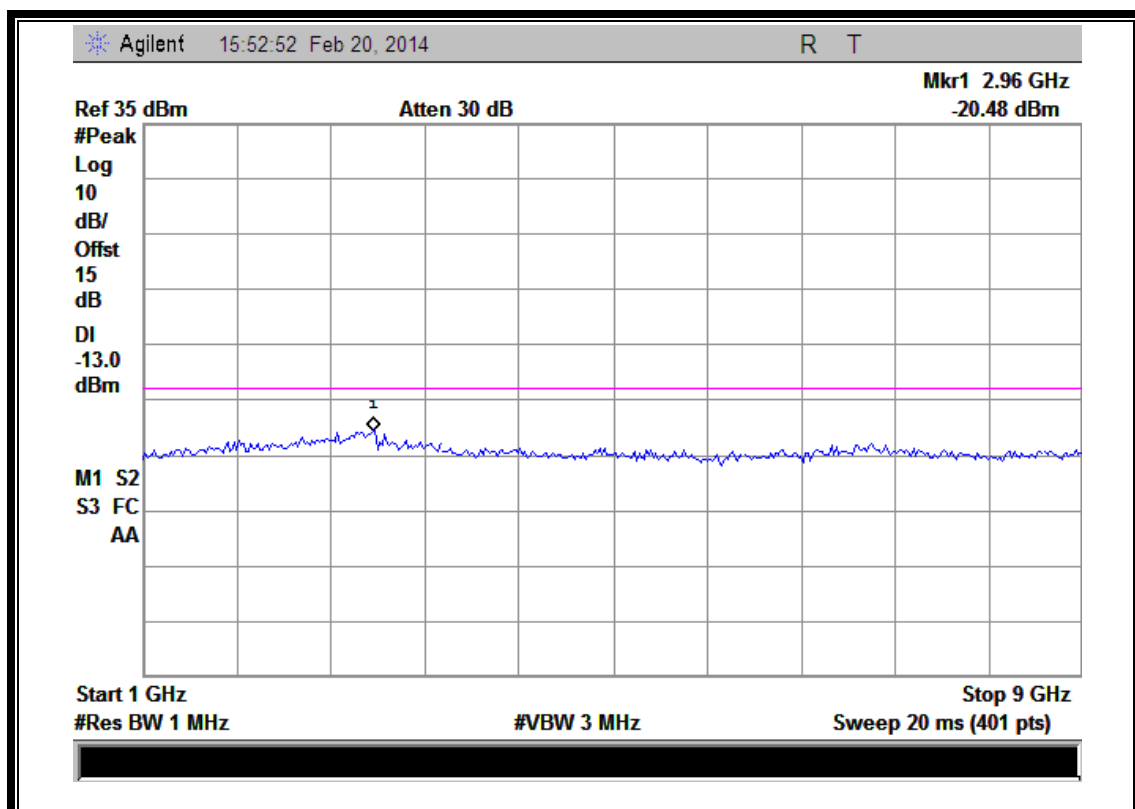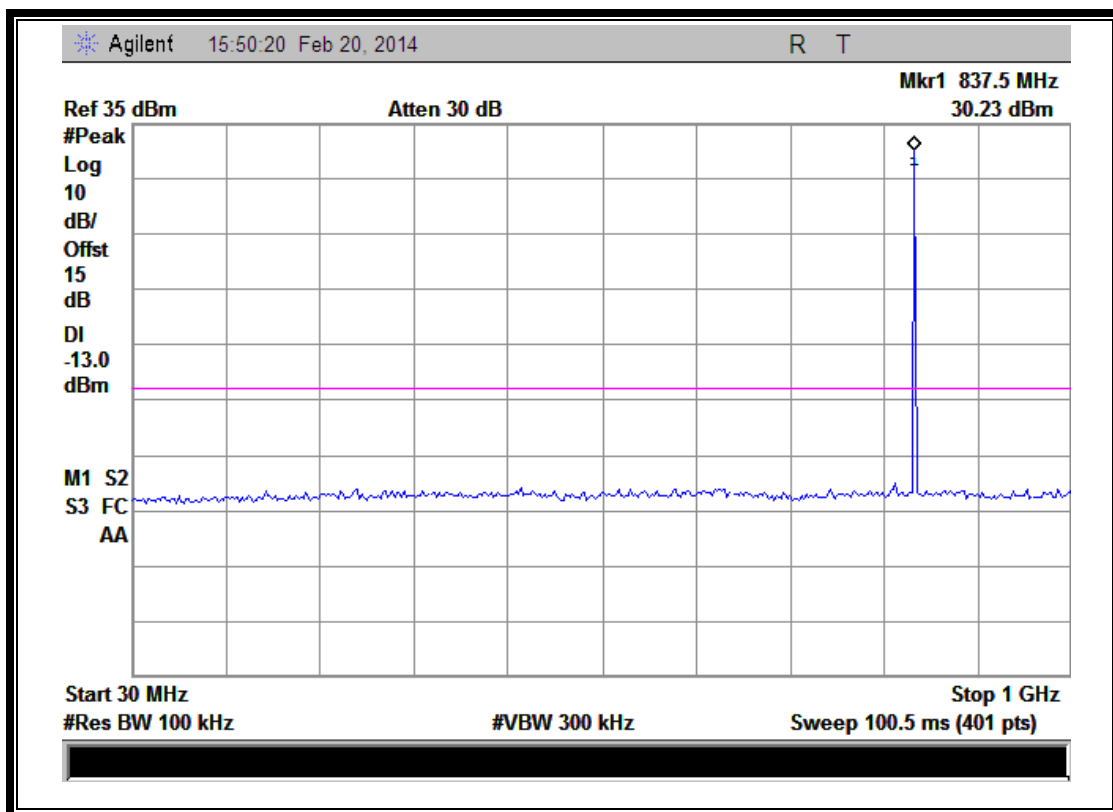


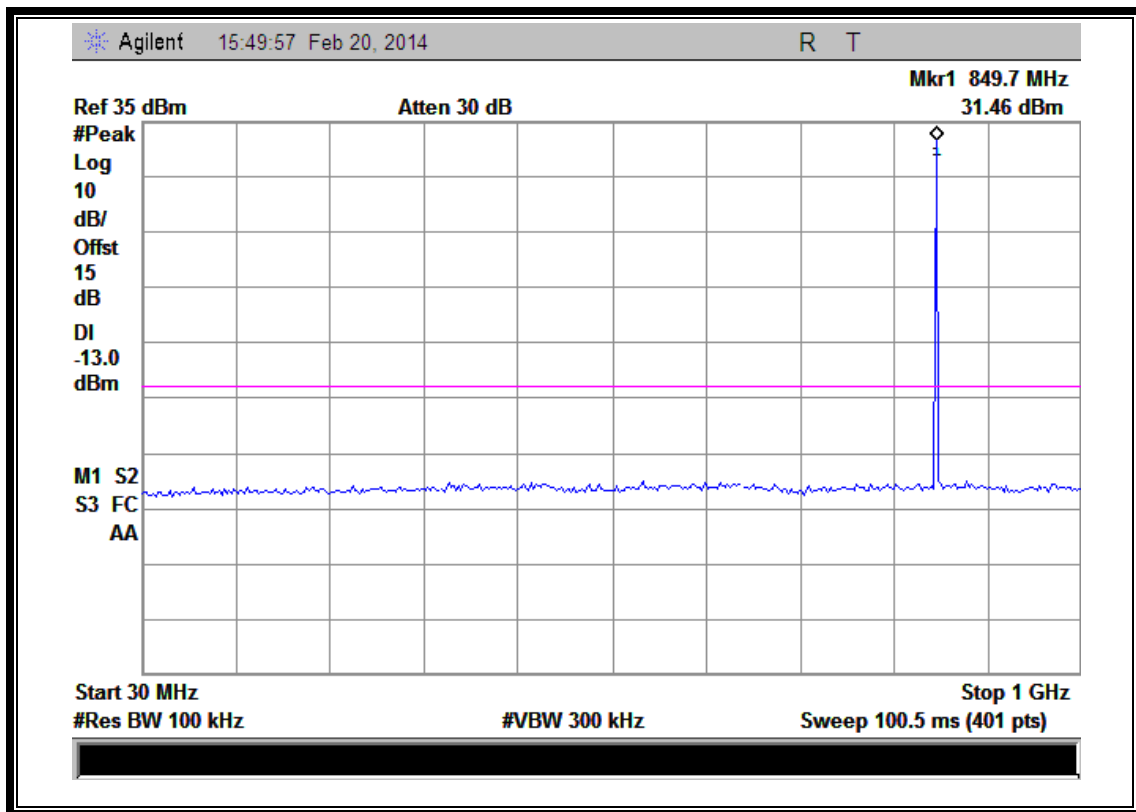


(Plot C3: EDGE 850MHz Channel = 251, 30MHz to 1GHz)

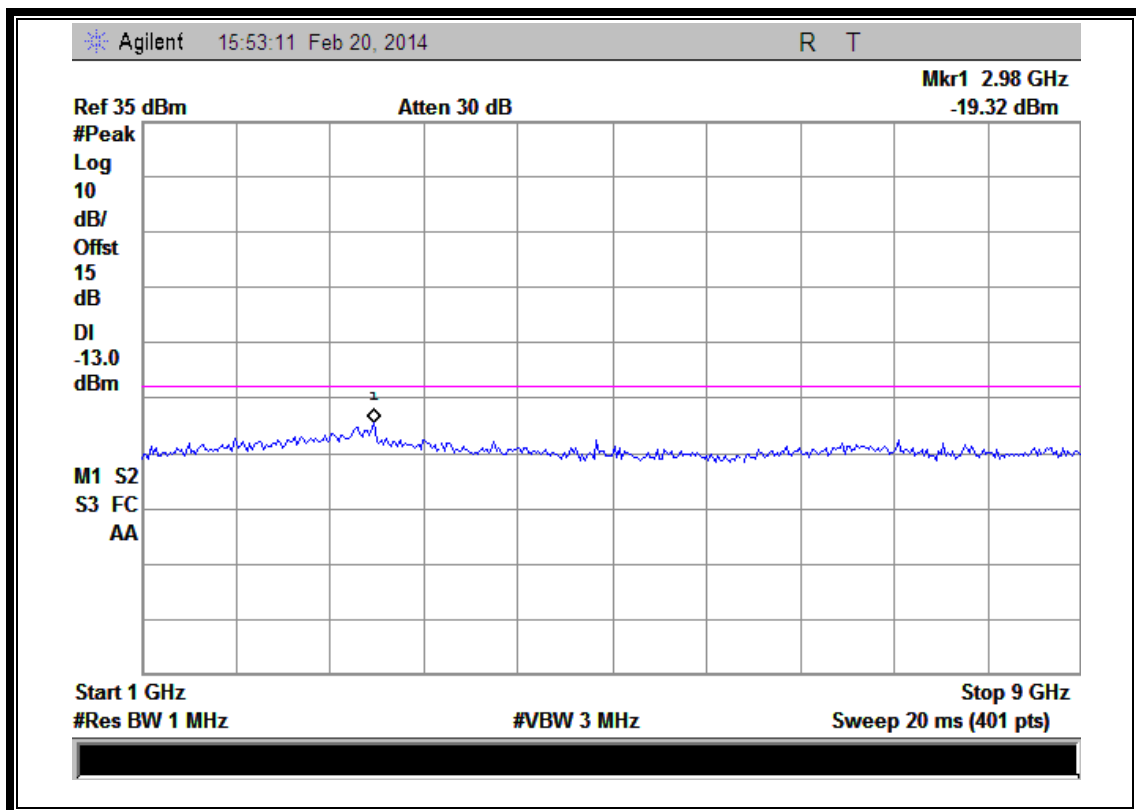


(Plot C3.1: EDGE 850MHz Channel = 251, 1GHz to 9GHz)

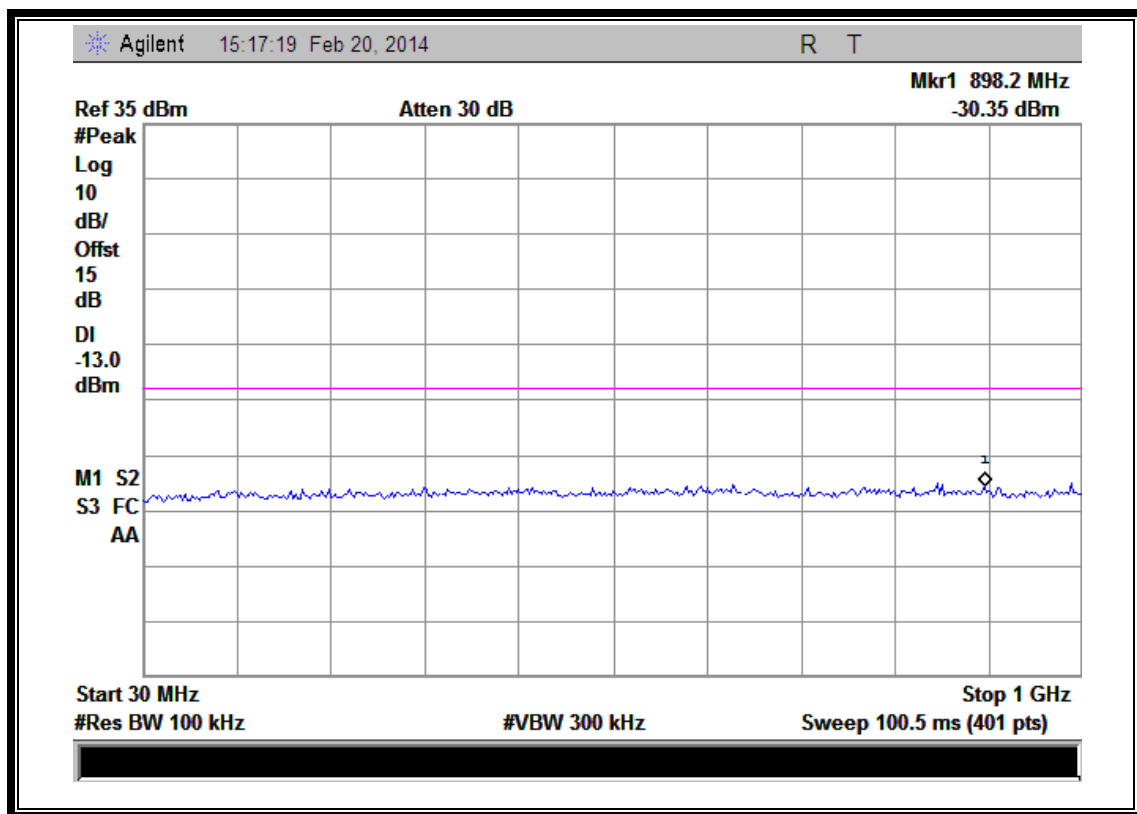


(Plot D1: EDGE 1900MHz Channel = 512, 30MHz to 1GHz)

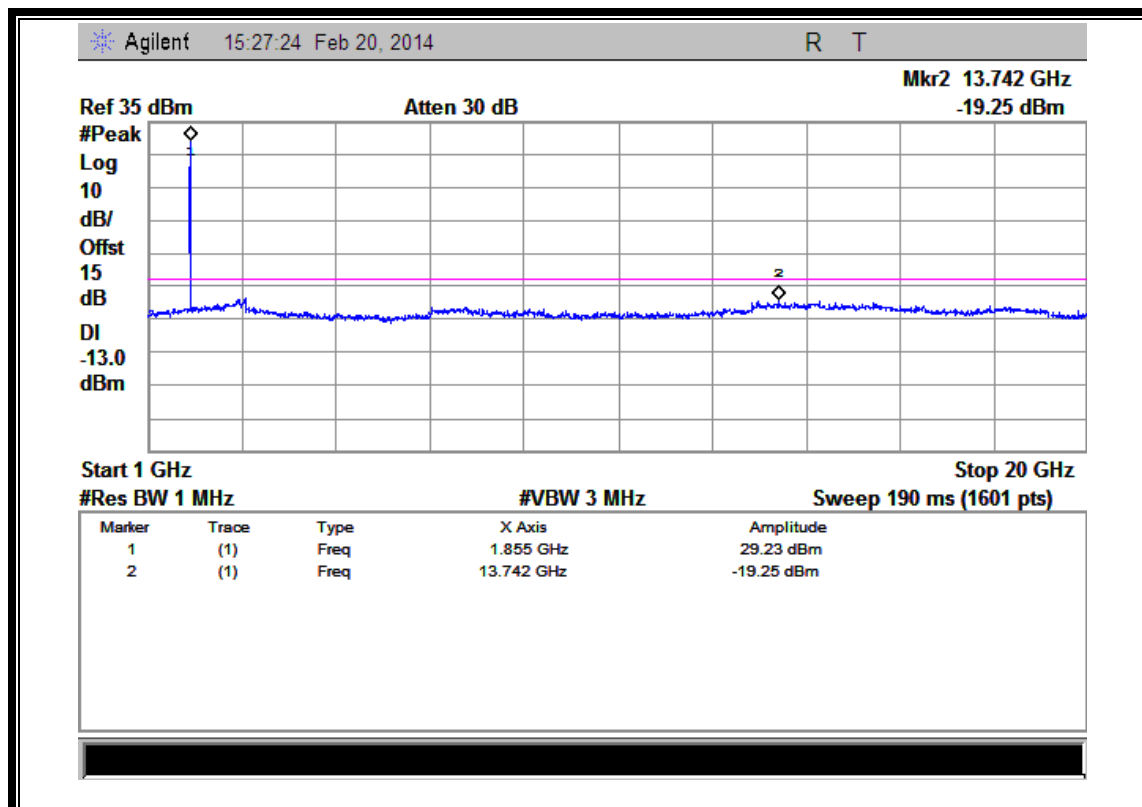


(Plot D1.1: EDGE 1900MHz Channel = 512, 1GHz to 20GHz)

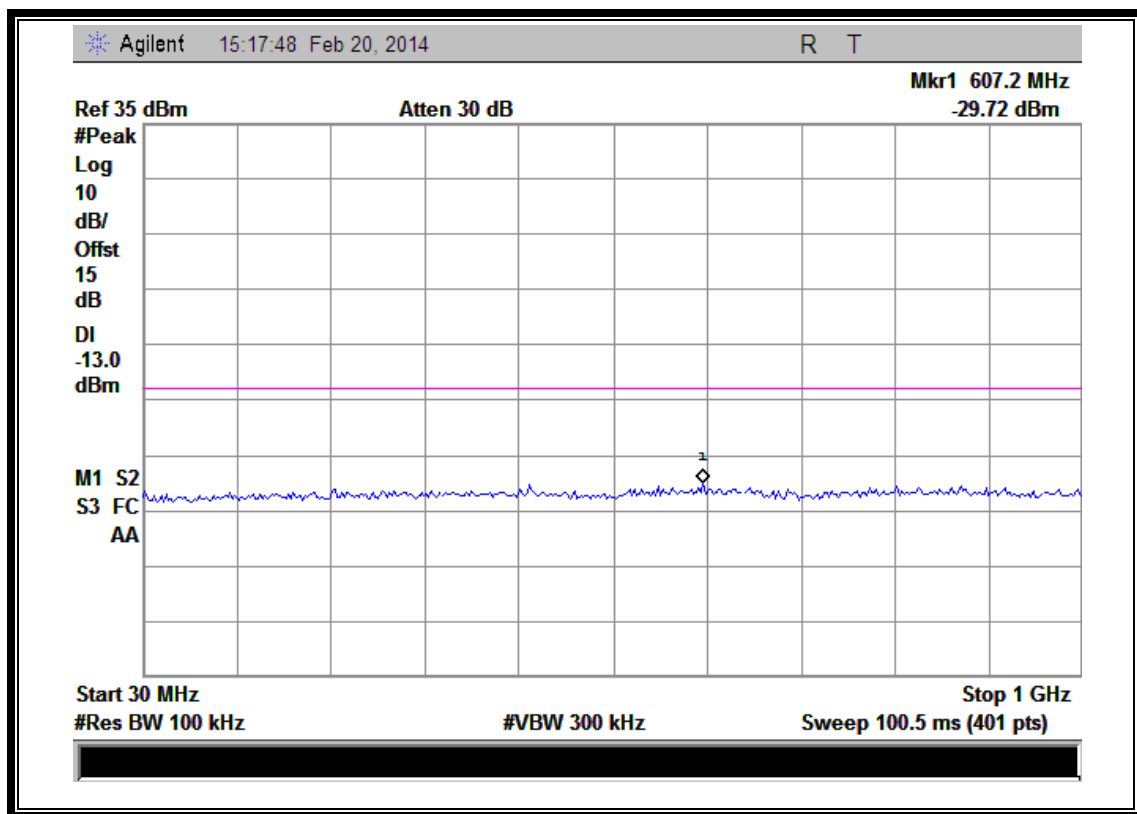


(Plot D2: EDGE 1900MHz Channel = 661, 30MHz to 1GHz)

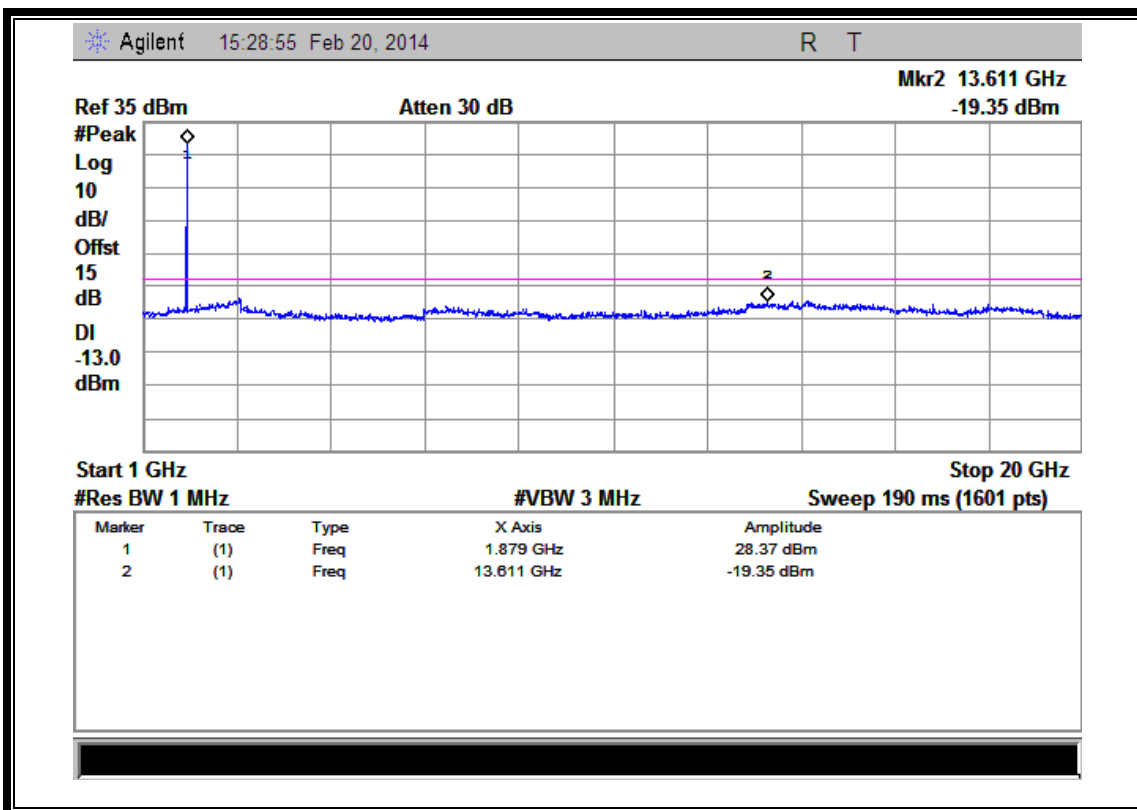


(Plot D2.1: EDGE 1900MHz Channel = 661, 1GHz to 20GHz)

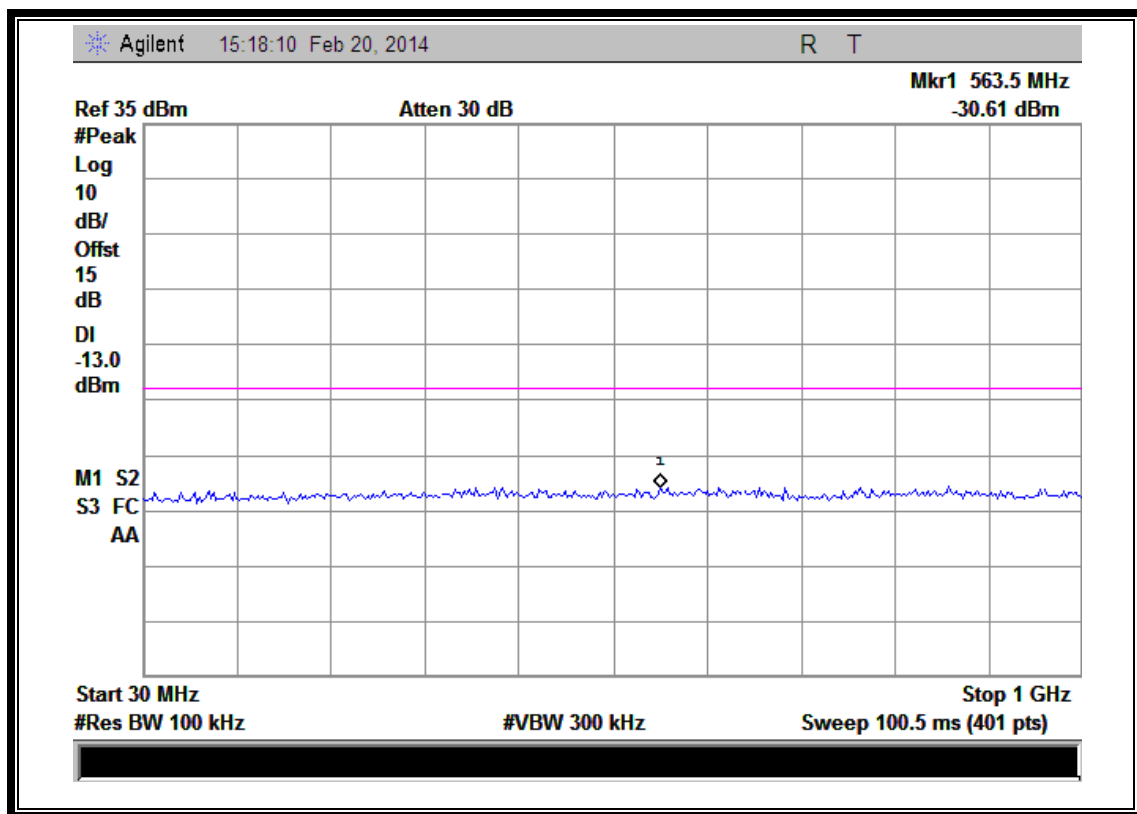


(Plot D3: EDGE 1900MHz Channel = 810, 30MHz to 1GHz)

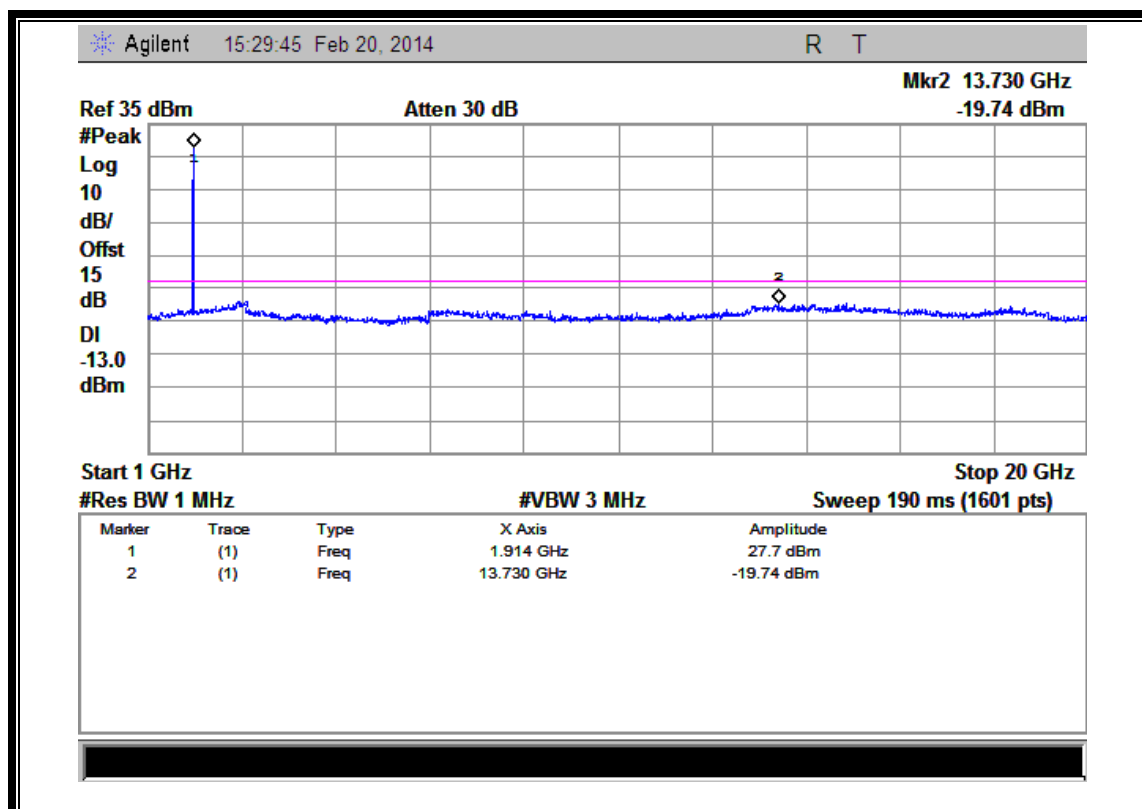


(Plot D3.1: EDGE 1900MHz Channel = 810, 1GHz to 20GHz)

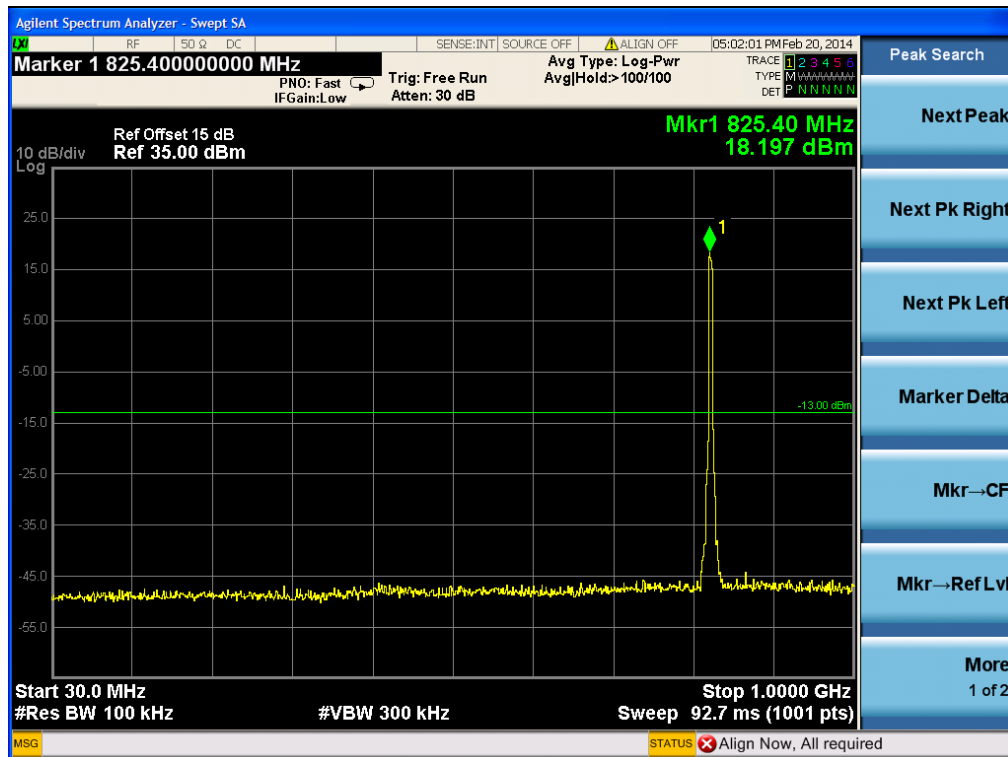


(Plot E1: WCDMA850MHz Channel = 4132, 30MHz to 1GHz)

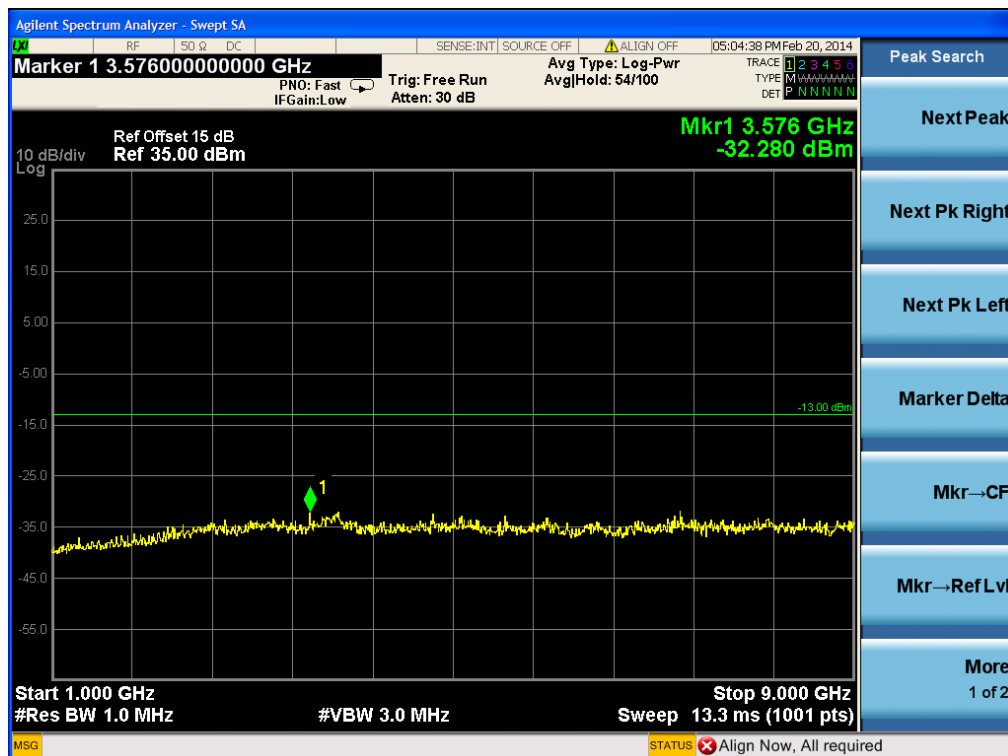


(Plot E1.1: WCDMA850MHz Channel = 4132, 1GHz to 9GHz)

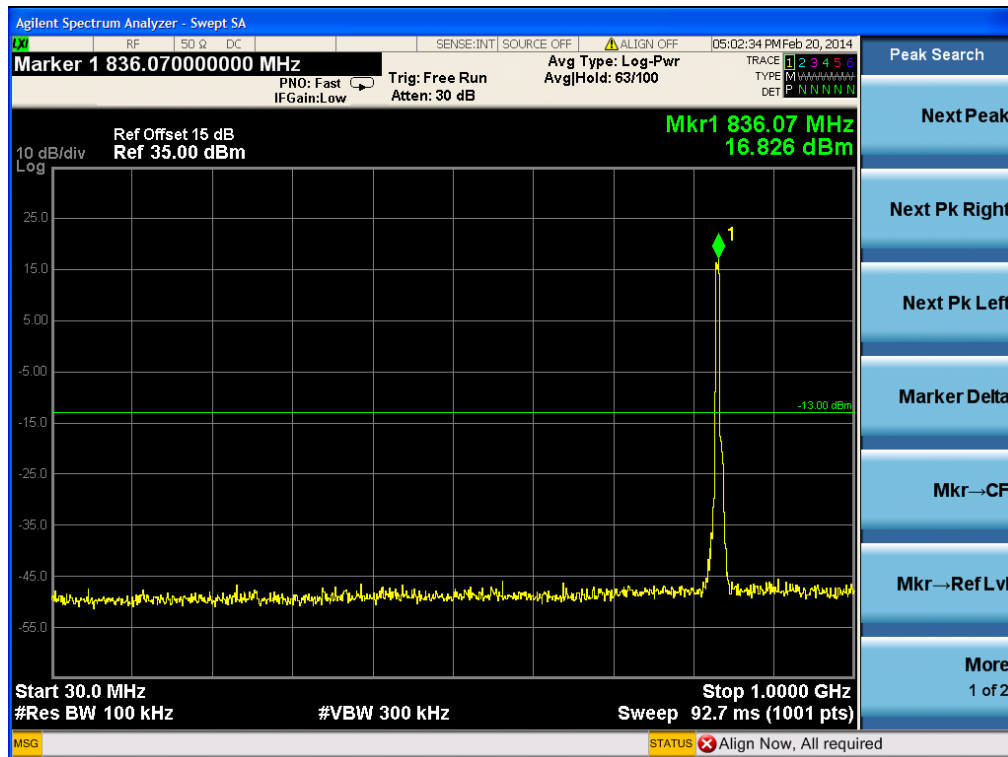


(Plot E2: WCDMA850MHz Channel = 4175, 30MHz to 1GHz)

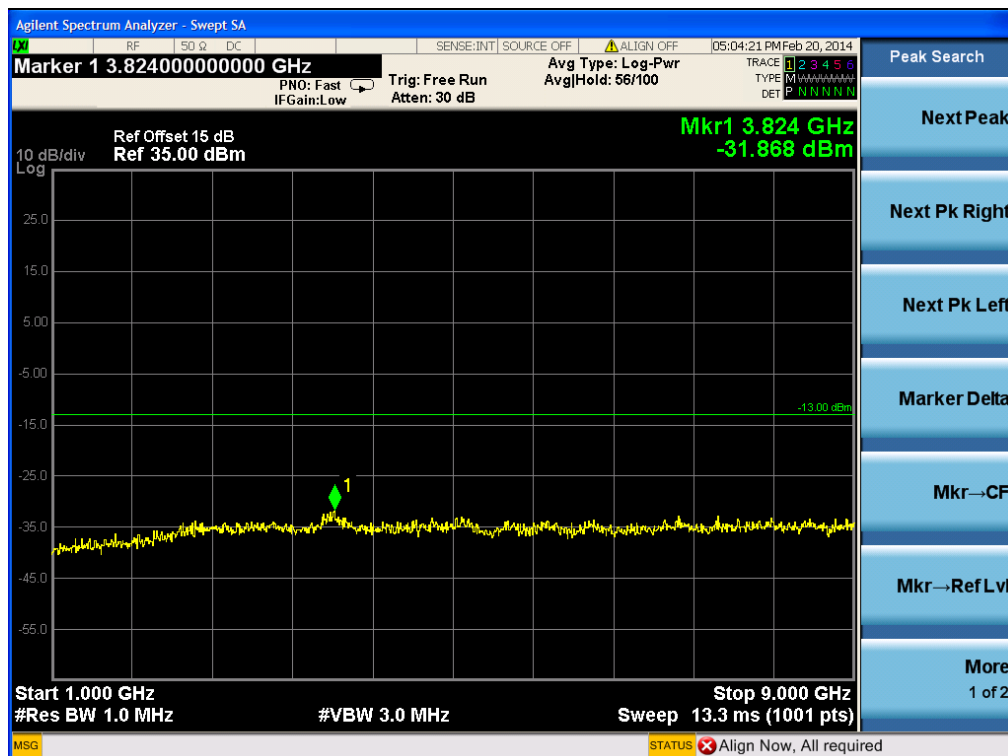


(Plot E2.1: WCDMA850MHz Channel = 4175, 1GHz to 9GHz)

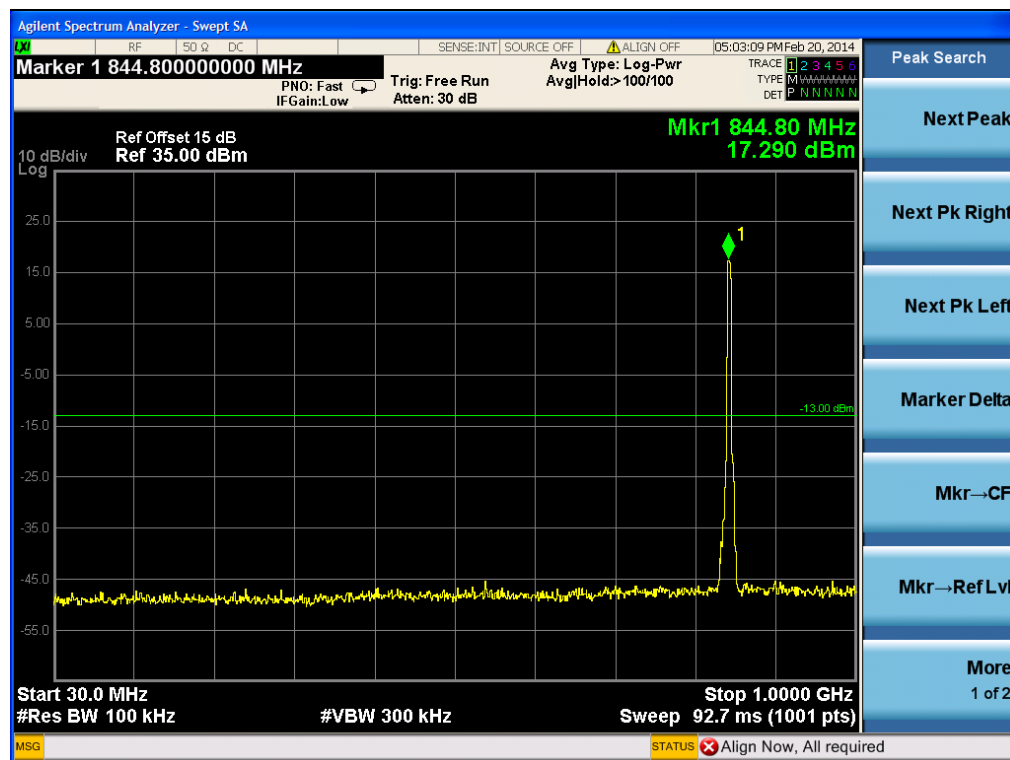


(Plot E3: WCDMA850MHz Channel = 4233, 30MHz to 1GHz)

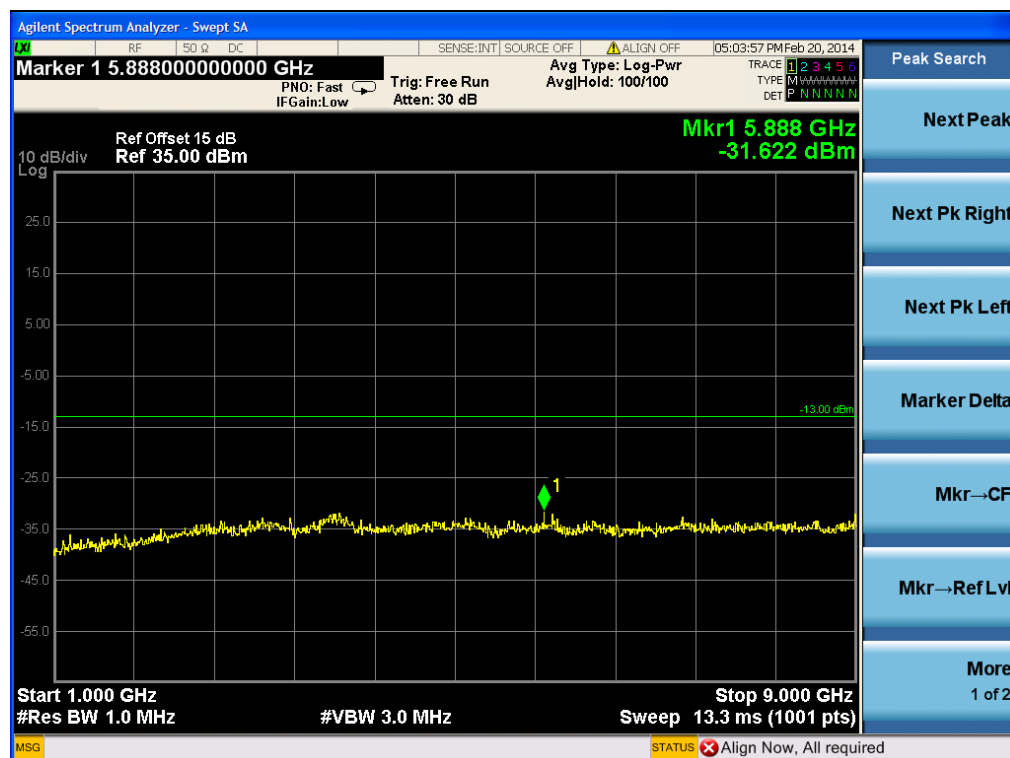


(Plot E3.1: WCDMA850MHz Channel = 4233, 1GHz to 9GHz)

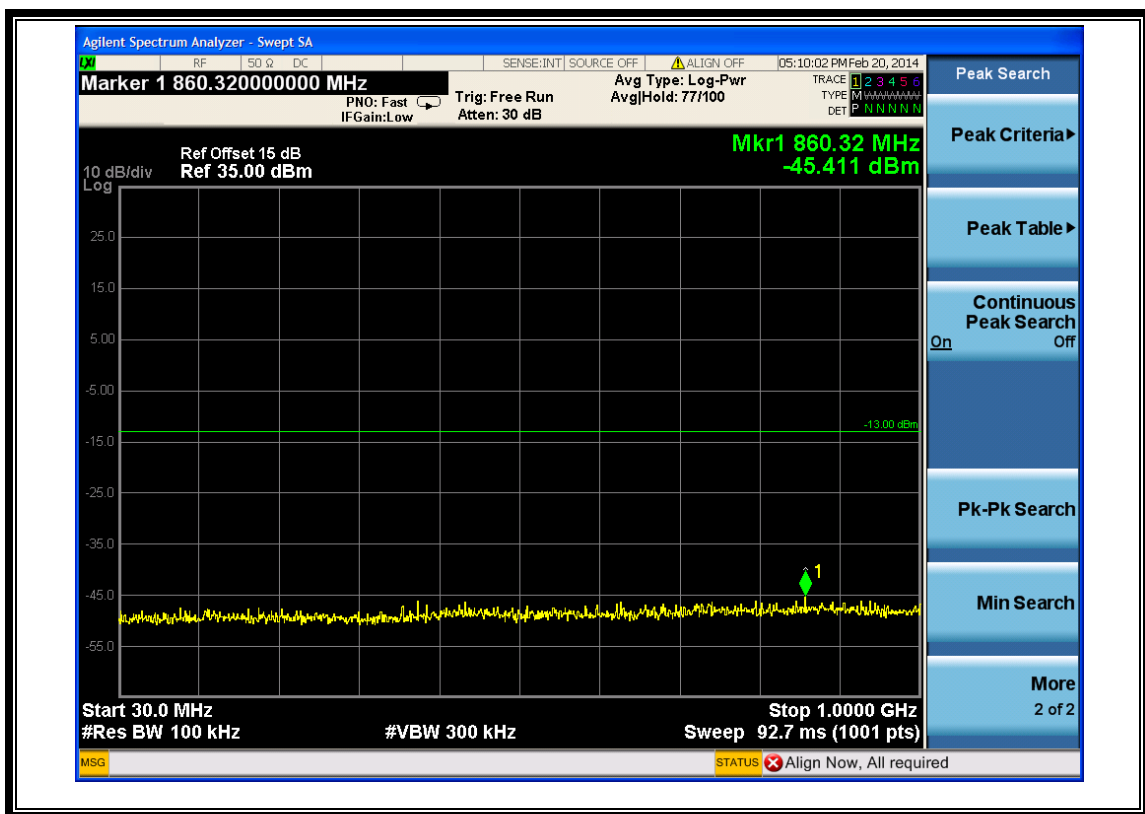


(Plot F1: WCDMA1900MHz Channel = 9262, 30MHz to 1GHz)

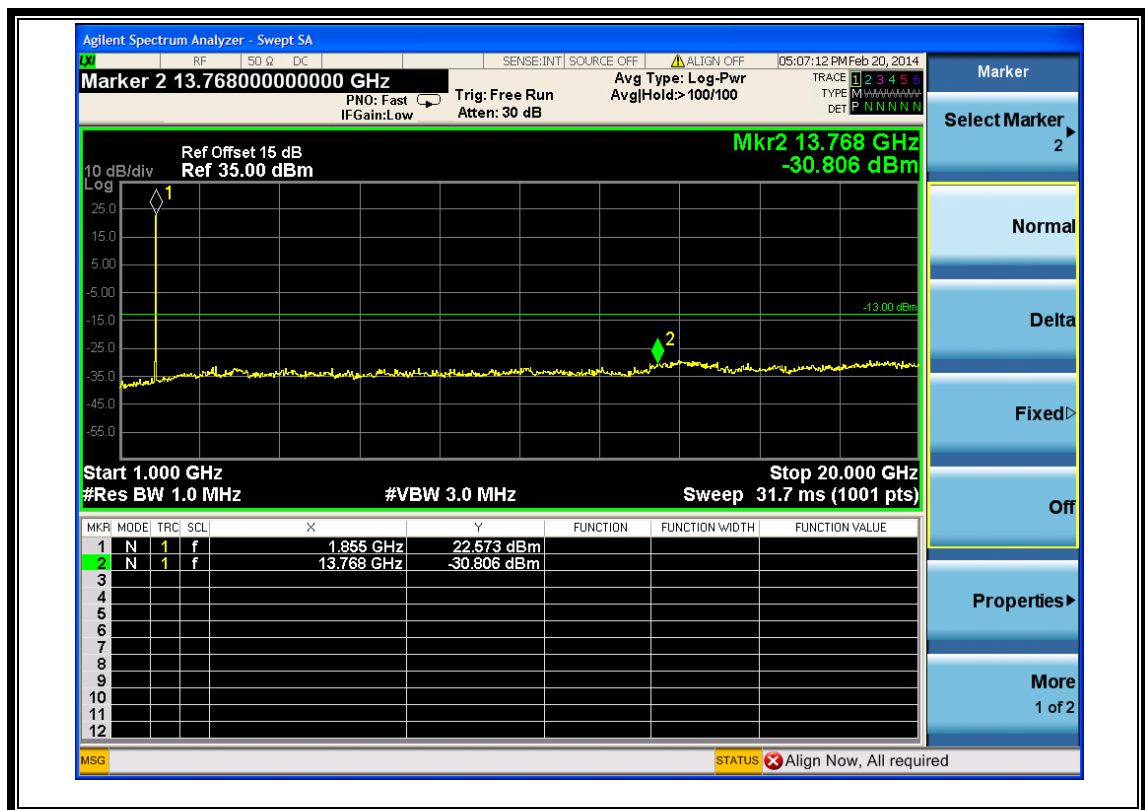


(Plot F1.1: WCDMA1900MHz Channel = 9262, 1GHz to 20GHz)

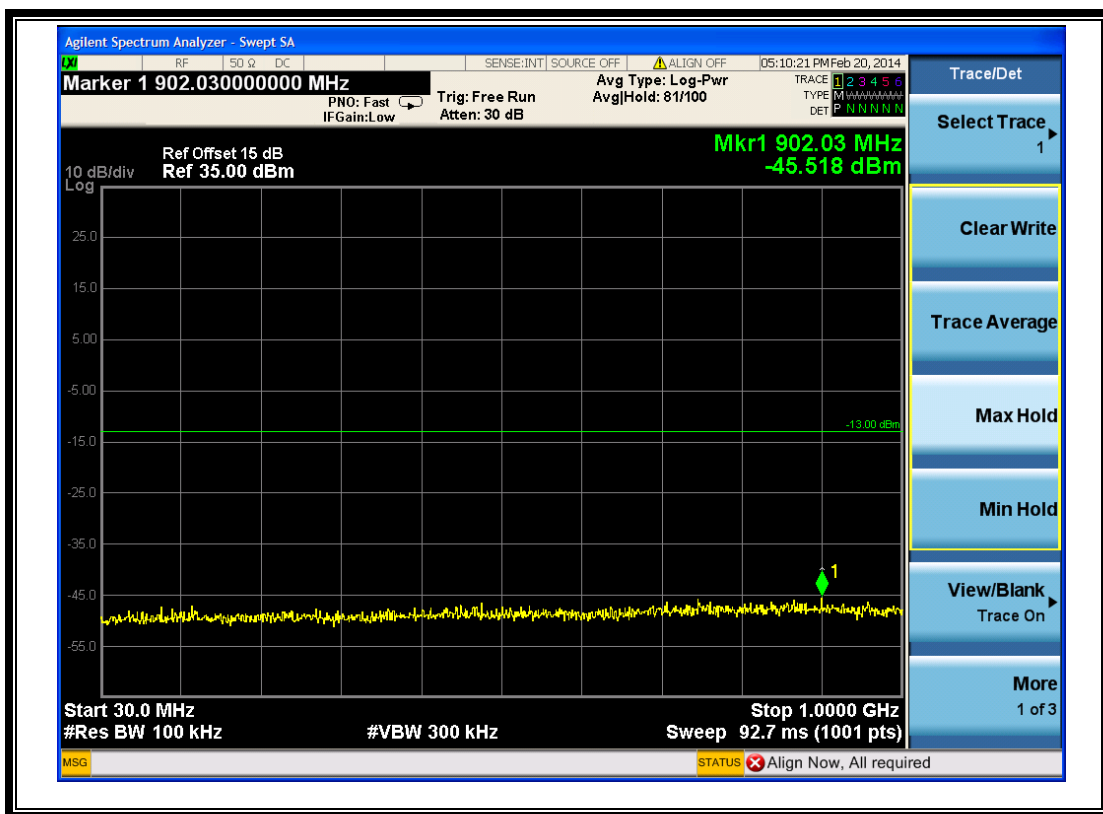


(Plot F2: WCDMA1900MHz Channel = 9400, 30MHz to 1GHz)

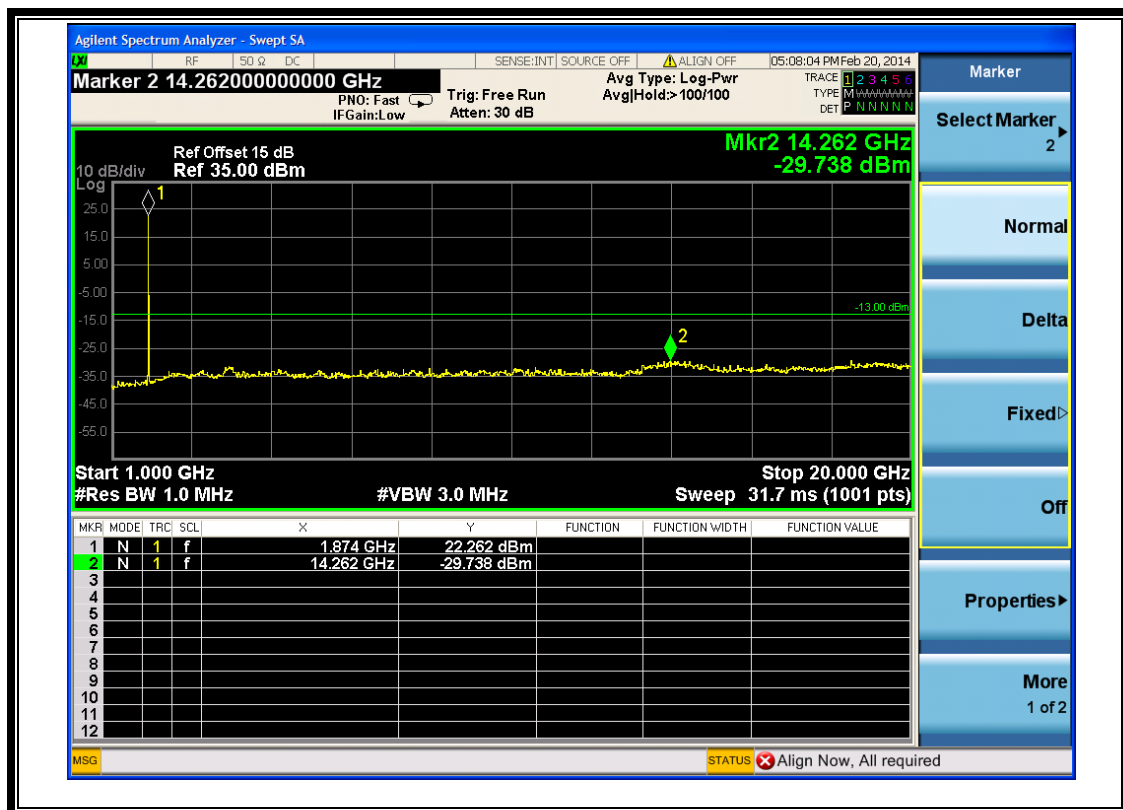


(Plot F2.1: WCDMA1900MHz Channel = 9400, 1GHz to 20GHz)

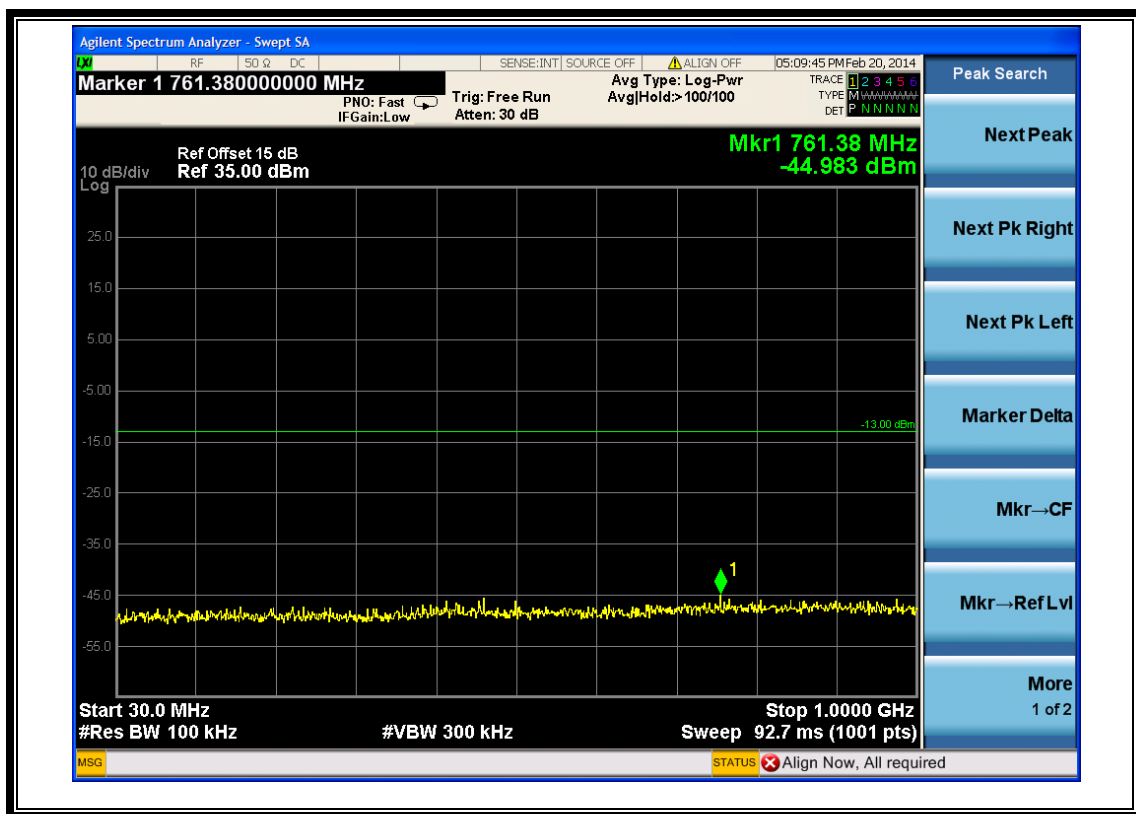


(Plot F3: WCDMA1900MHz Channel = 9538, 30MHz to 1GHz)

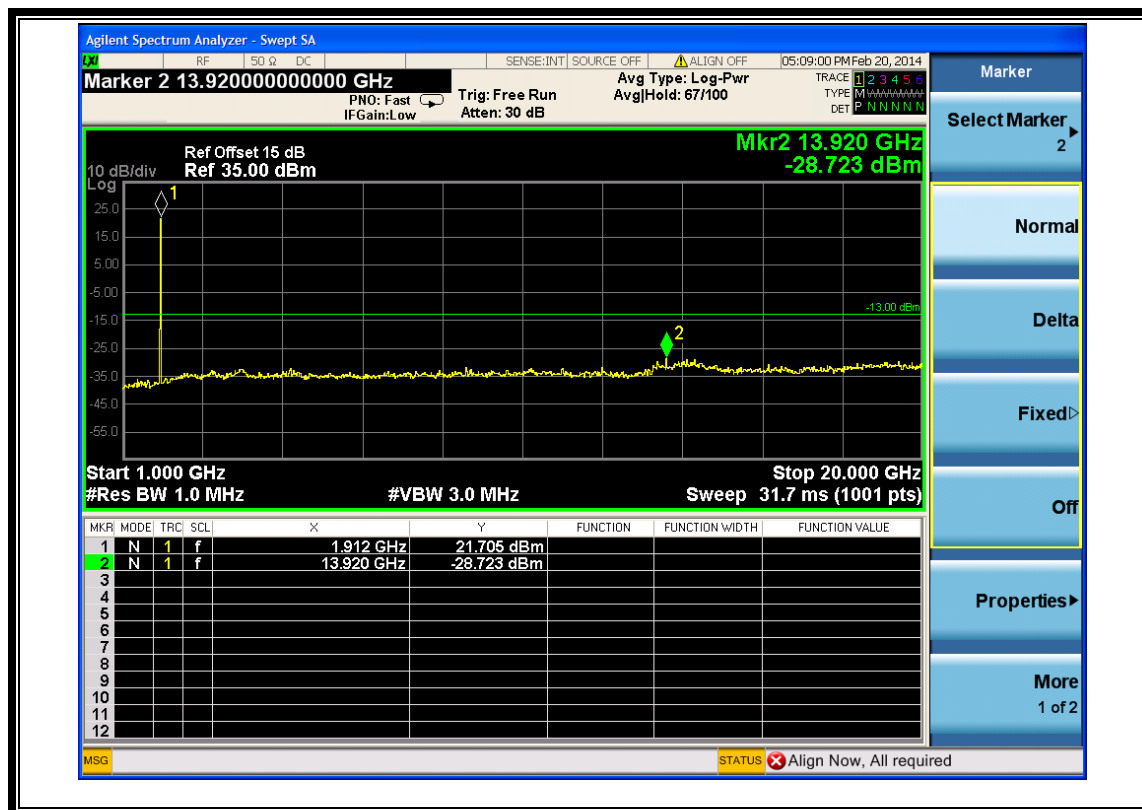


(Plot F3.1: WCDMA1900MHz Channel = 9538 1GHz to 20GHz)

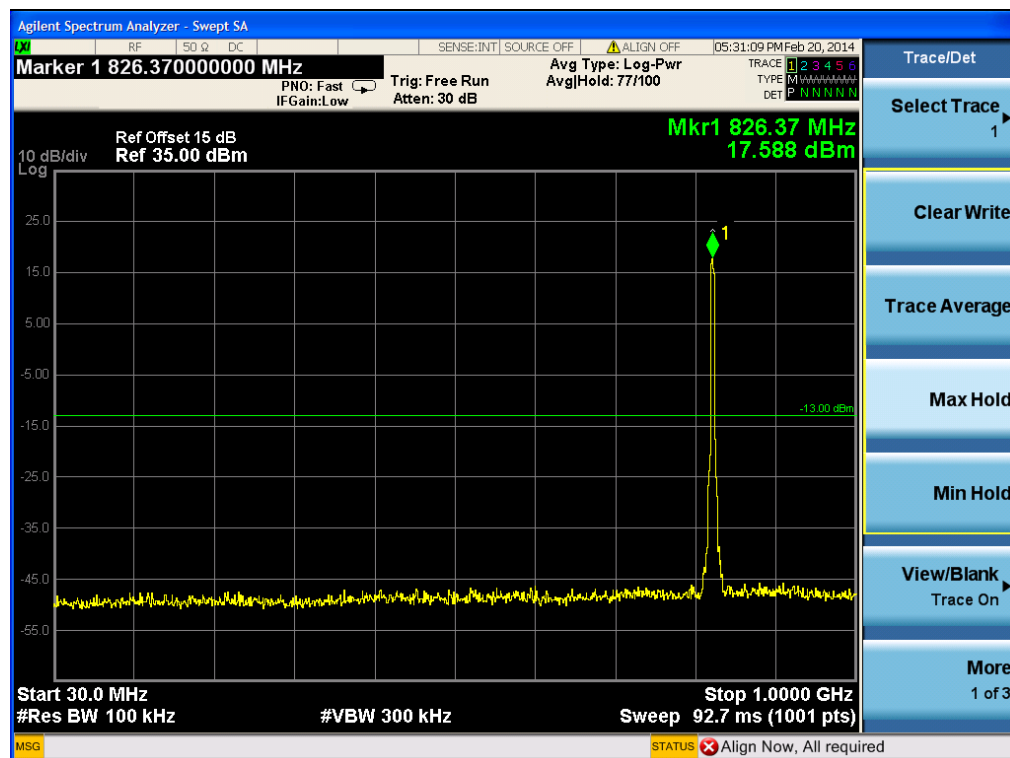


(Plot G1: HSDPA 850MHz Channel = 4132, 30MHz to 1GHz)

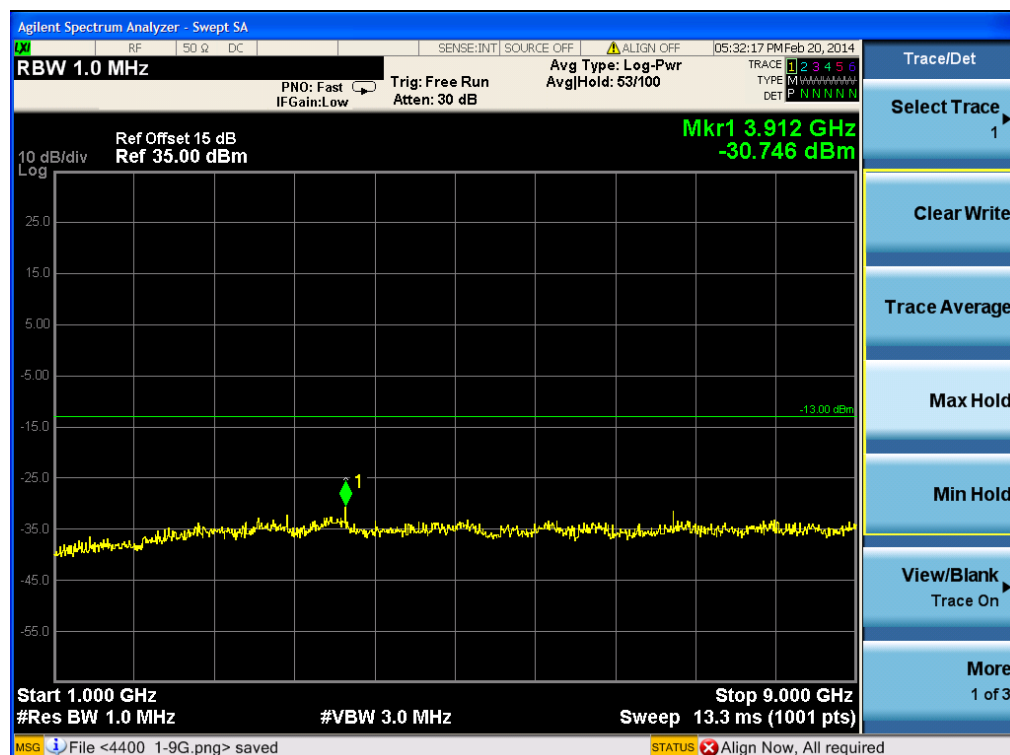


(Plot G1.1: HSDPA 850MHz Channel = 4132, 1GHz to 9GHz)

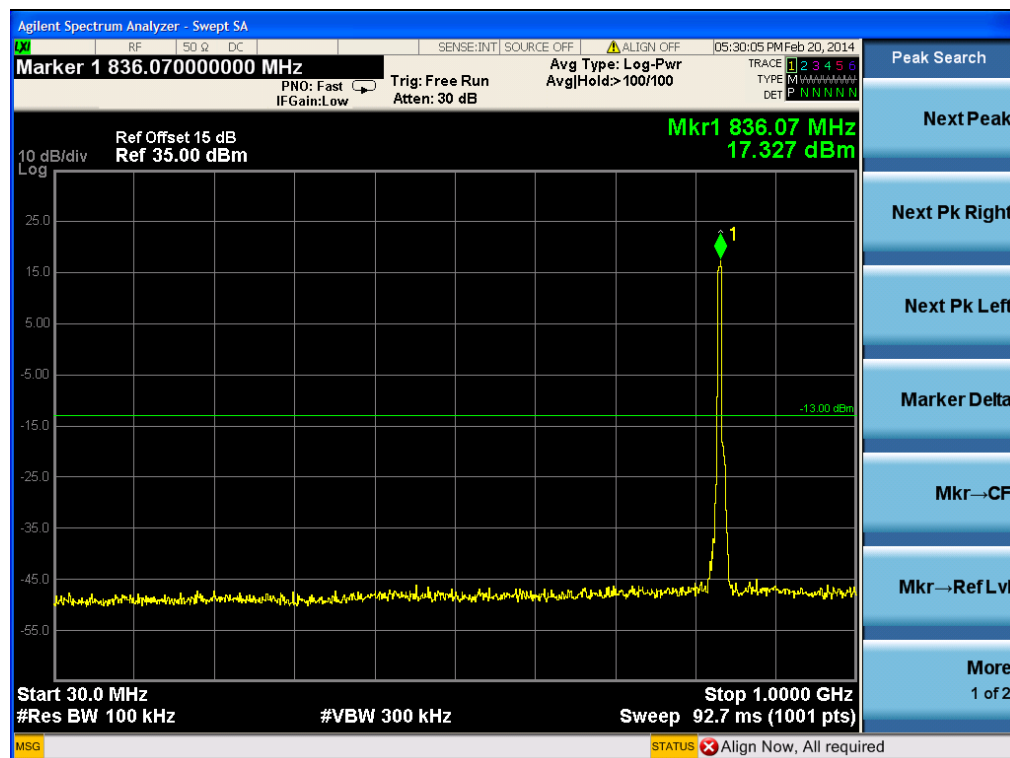


(Plot G2: HSDPA 850MHz Channel = 4175, 30MHz to 1GHz)

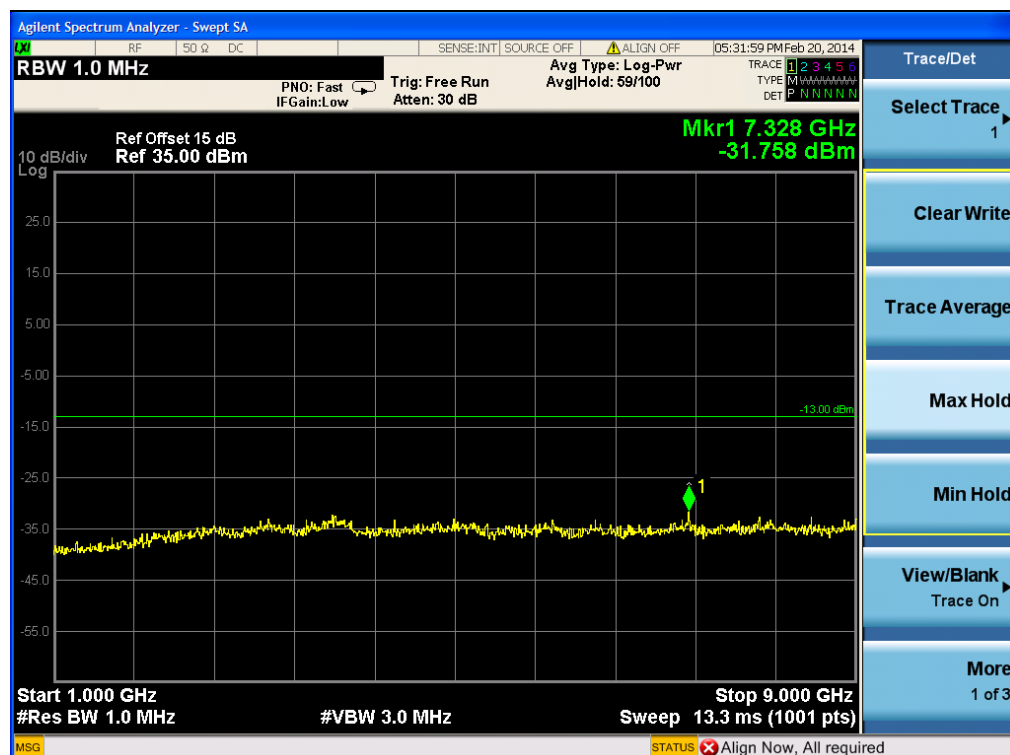


(Plot G2.1: HSDPA 850MHz Channel = 4175, 1GHz to 9GHz)

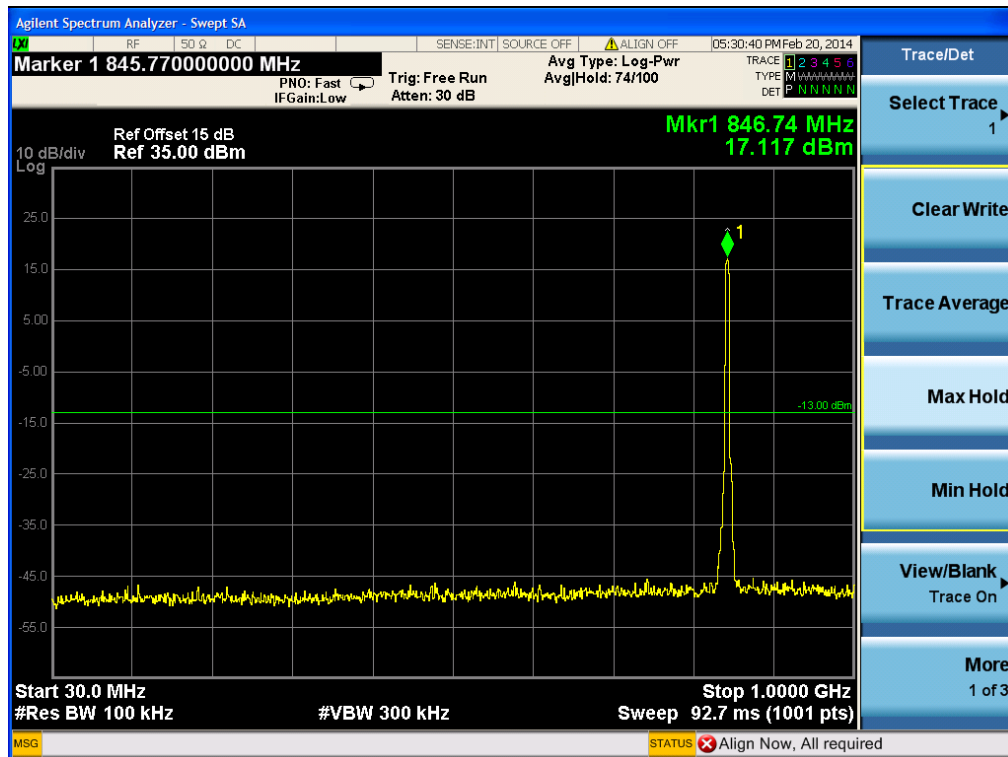


(Plot G3: HSDPA850MHz Channel = 4233, 30MHz to 1GHz)

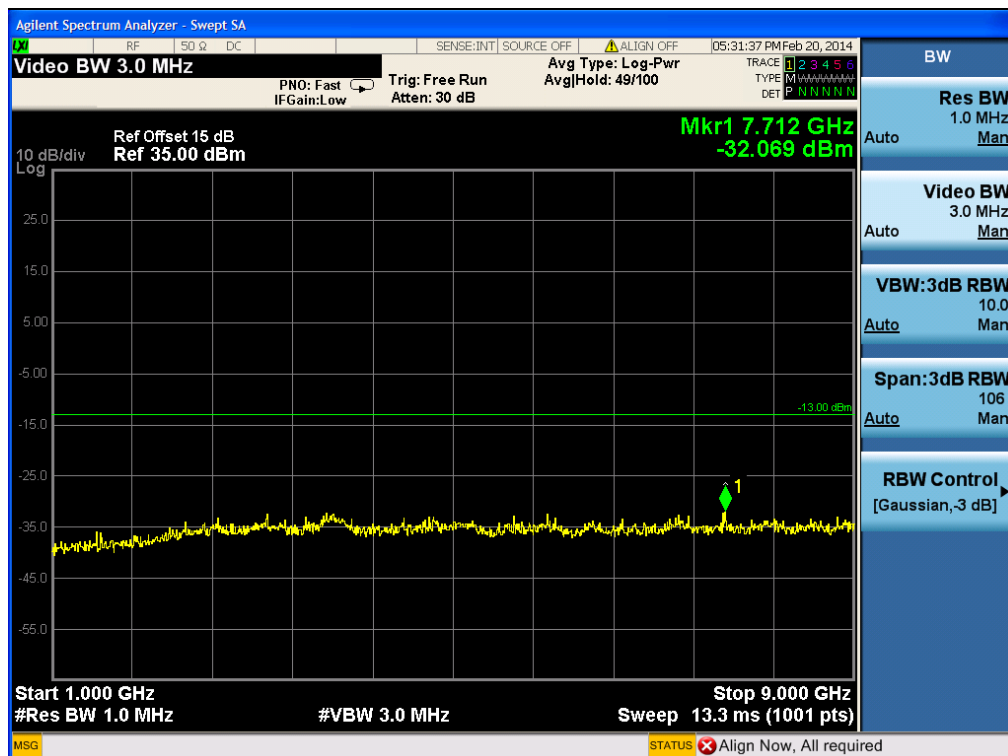


(Plot G3.1: HSDPA850MHz Channel = 4233, 1 GHz to 9GHz)

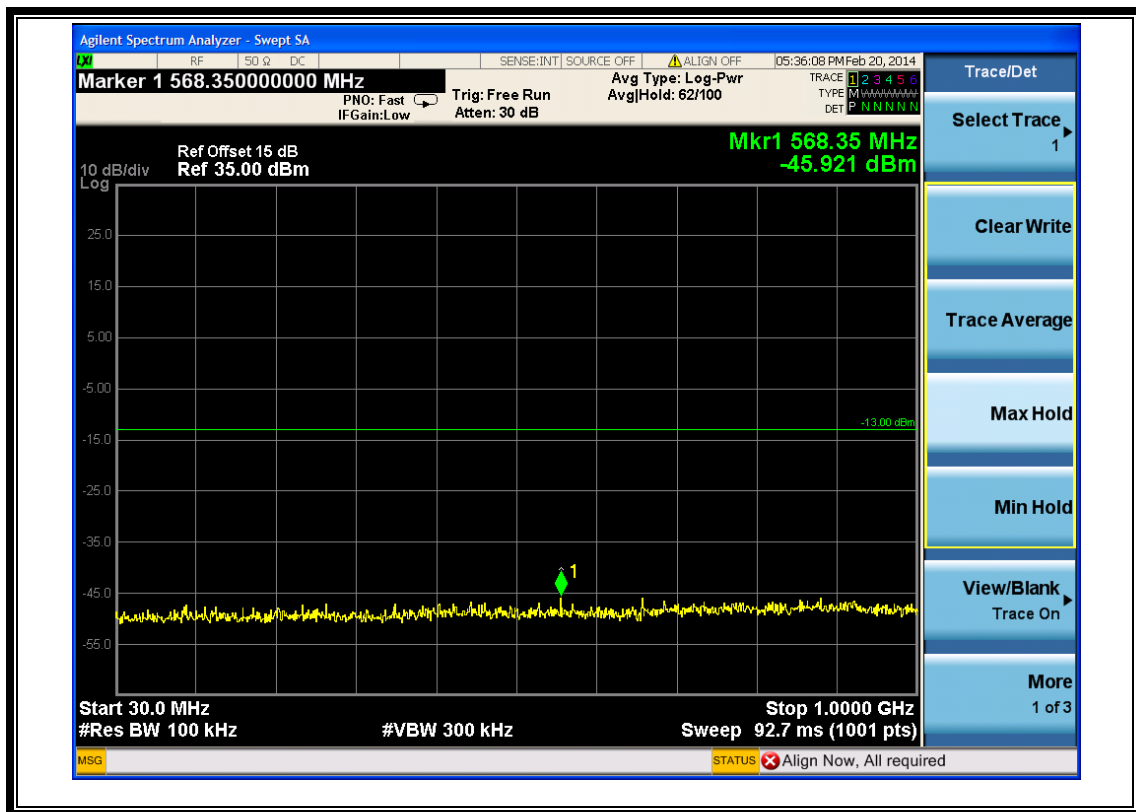


(Plot H1: HSDPA1900MHz Channel = 9262, 30MHz to 1GHz)

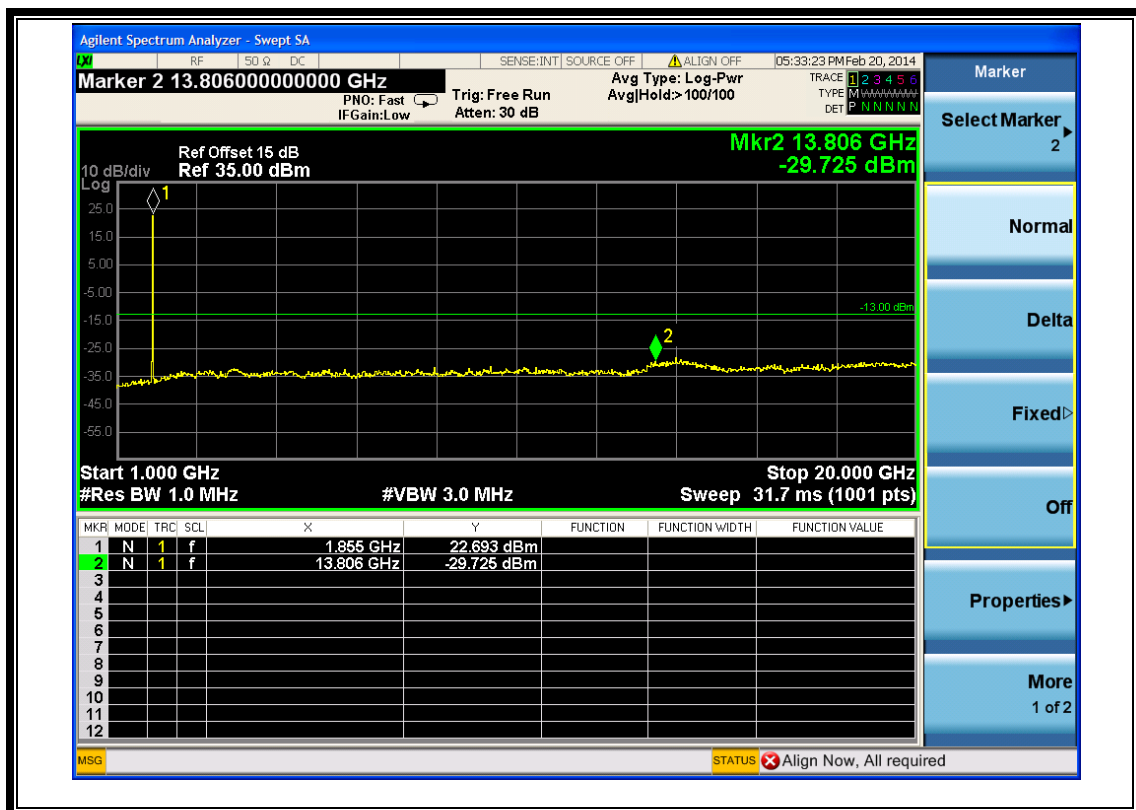

(Plot H1.1: HSDPA1900MHz Channel = 9262, 1GHz to 20GHz)

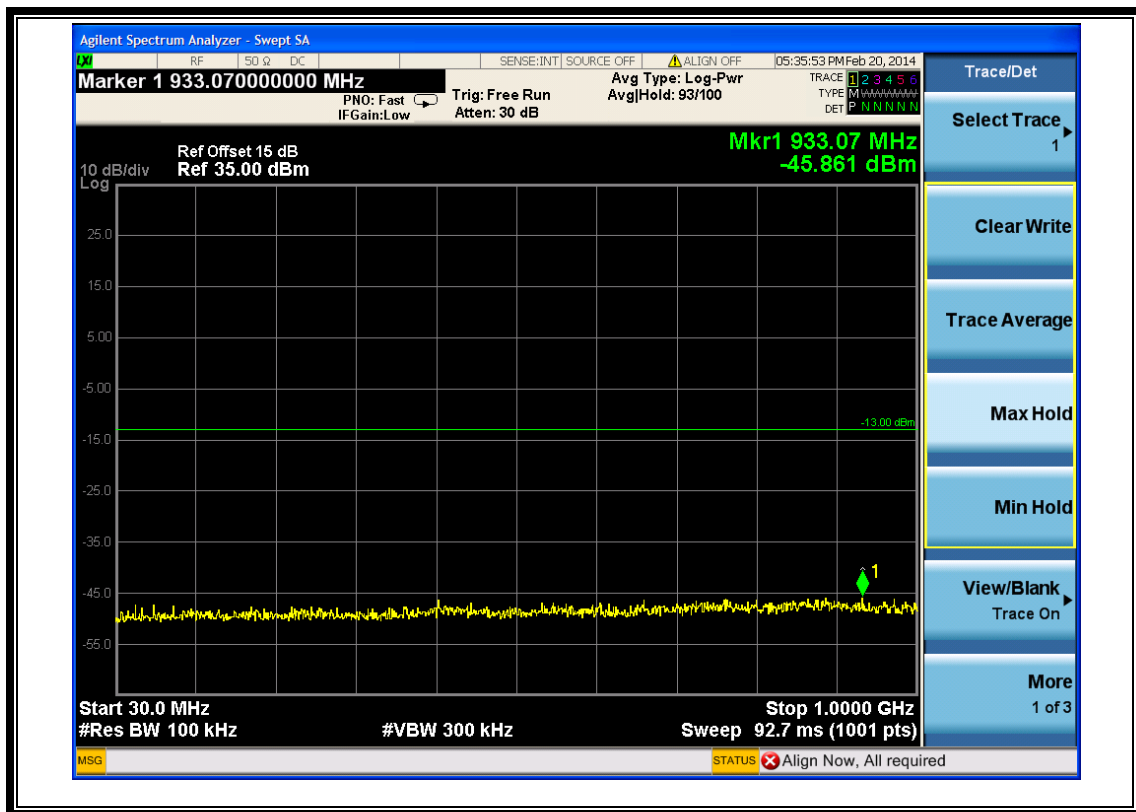

(Plot H2: HSDPA1900MHz Channel = 9400, 30MHz to 1GHz)

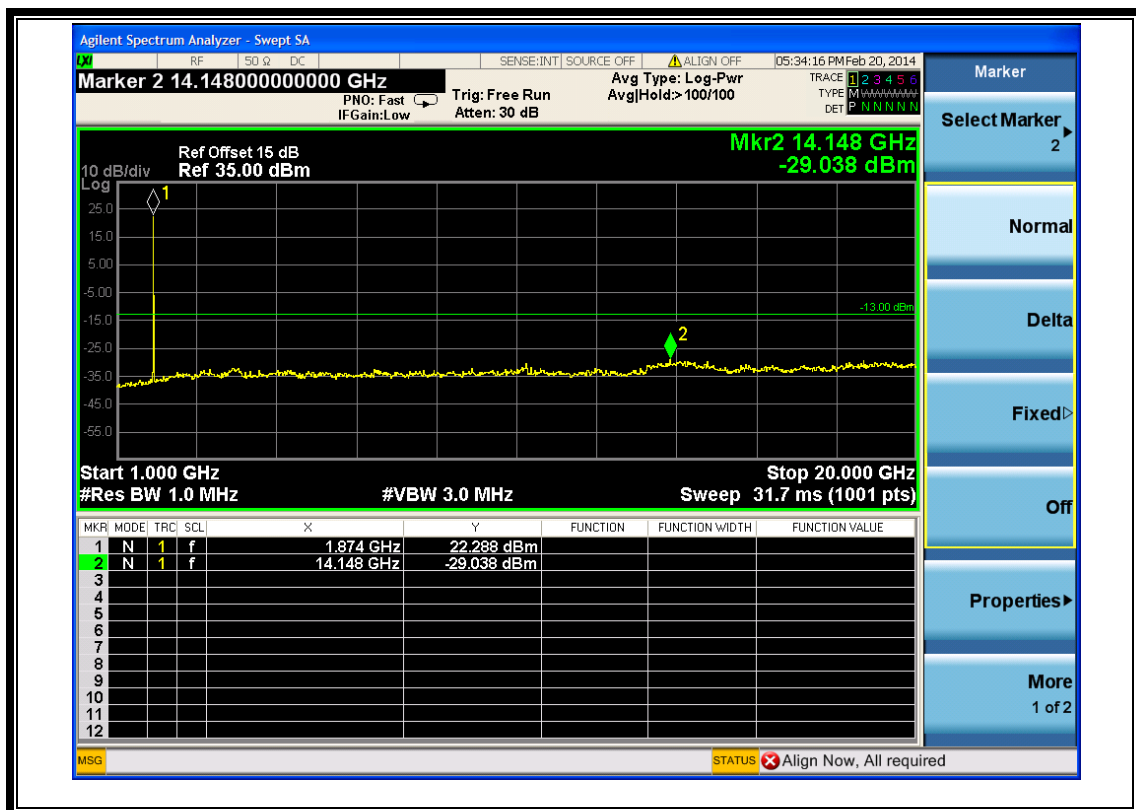

(Plot H2.1: HSDPA1900MHz Channel = 9400, 1GHz to 20GHz)