

Victory Concept Industries Ltd.

Application
For
Certification

Internet Radio
(WiFi Transceiver)

(FCC ID: OJ7AIR-102030)

HK08100781-2

NT/sa

December 08, 2008

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etisemko.com

INTERTEK TESTING SERVICE

LIST OF EXHIBITS

INTRODUCTION

<i>EXHIBIT 1:</i>	Summary of Tests
<i>EXHIBIT 2:</i>	General Description
<i>EXHIBIT 3:</i>	System Test Configuration
<i>EXHIBIT 4:</i>	Measurement Results
<i>EXHIBIT 5:</i>	Equipment Photographs
<i>EXHIBIT 6:</i>	Product Labelling
<i>EXHIBIT 7:</i>	Technical Specifications
<i>EXHIBIT 8:</i>	Instruction Manual
<i>EXHIBIT 9:</i>	Miscellaneous Information
<i>EXHIBIT 10:</i>	Confidentiality Request

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

Victory Concept Industries Ltd. - MODEL: Airstream 10

FCC ID: OJ7AIR-102030

This report concerns (check one) Original Grant Class II Change

Equipment Type: DTS - Part 15 Digital Transmission Systems (WiFi transmitter portion)

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until : _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator - the new 47 CFR [10-01-07 Edition] provision.

Report prepared by:

Ho Wai Kin, Ben
Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone: 852-2173-8505
Fax: 852-2371-0521

INTERTEK TESTING SERVICES

Table of Contents

1.0 <u>Summary of test results</u>	2
2.0 <u>General Description</u>	4
2.1 Product Description.....	4
2.2 Related Submittal(s) Grants	5
2.3 Test Methodology	5
2.4 Test Facility	5
3.0 <u>System Test Configuration</u>	7
3.1 Justification.....	7
3.2 EUT Exercising Software	7
3.3 Details of EUT and Description of Peripherals	8
3.4 Measurement Uncertainty	9
3.5 Equipment Modification.....	9
4.0 <u>Measurement Results</u>	11
4.1 Maximum Conducted Output Power at Antenna Terminals	11
4.2 Minimum 6dB RF Bandwidth.....	12
4.3 Maximum Power Density	13
4.4 Out of Band Conducted Emissions & Radiated Emission on the Bandedge ..	15
4.5 Out of Band Radiated Emissions.....	16
4.6 Transmitter Radiated Emissions in Restricted Bands	17
4.7 Field Strength Calculation	18
4.8 Radiated Emission Configuration Photograph.....	19
4.9 Radiated Emission Data.....	20
4.10 AC Line Conducted Emission.....	27
4.11 Line Conducted Configuration Photograph	28
4.12 Line Conducted Emission Configuration Data	29
4.13 Radiated Emission from Ethernet Section of Transceiver.....	30
4.14 Transmitter Duty Cycle Calculation and Measurements.....	31
5.0 <u>Equipment Photographs</u>	33
6.0 <u>Product Labelling</u>	35
7.0 <u>Technical Specifications</u>	37
8.0 <u>Instruction Manual</u>	39
9.0 <u>Miscellaneous Information</u>	41
10.0 <u>Confidentiality Request</u>	43

INTERTEK TESTING SERVICES

List of attached file

Exhibit Type	File Description	Filename
Cover Letter	Letter of Agency	letter.pdf
Test Report	Test Report	report.pdf
Test Report	6 dB Bandwidth Plot	6dB.pdf
Test Report	Maximum Power Density Plot	maxpd.pdf
Test Report	Out Band Antenna Conducted Emission Plot & Radiated Emission on the Bandedge	obantcon.pdf
Test Report	Conducted Emission Test Result	conduct.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Operation Description	Technical Description	descri.pdf
RF Exposure info	RF Safety	RF exposure info.pdf
Cover Letter	Confidentiality Request	request.pdf

INTERTEK TESTING SERVICES

EXHIBIT 1

SUMMARY OF TEST RESULTS

INTERTEK TESTING SERVICES

1.0 Summary of Test

Victory Concept Industries Ltd. - MODEL: AIRSTREAM 10

FCC ID: OJ7AIR-102030

WiFi Transmitter Portion

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses one permanently attached antenna for WiFi transceiver, which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

INTERTEK TESTING SERVICES

EXHIBIT 2

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a Internet Radio Operation at 2412-2462MHz 11 channels selection. The EUT is powered by 12Vdc adaptor (model: KSAD1200150W1UV-1; Input: 100~240Vac, 50/60 Hz; Output: 12Vdc, 1.5A). The EUT can access internet broadcasting station or multimedia sharing by WiFi (IEEE802.11b/g) or Ethernet function. The EUT also support FM radio, auxiliary input, audio output and headphone input functions.

For more detailed features description, please refer to the user's manual.

Antenna Type: Internal, Integral

The circuit descriptions are saved with filename: descri.pdf.

INTERTEK TESTING SERVICES

2.2 Related Submittal(s) Grants

This is an application for Certification of:
DTS - Part 15 Digital Transmission Systems (WiFi transmitter portion)

For the other portions,

1. FM radio & Ethernet function: 15 Verification (refer to report HK08100781-1)
2. Receiver portion of WiFi: exempt from technical requirement of this Part.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). All measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 3

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables were manipulated to produce worst case emissions. It was powered by 12Vdc adaptor (model: KSAD1200150W1UV-1; Input: 100~240Vac, 50/60 Hz; Output: 12Vdc, 1.5A).

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the applicant and is going to be fixed on the firmware of the end product.

Power Parameters of IEEE 802.11b/g

Test software setting of IEEE 802.11b/g			
Channel No.	Out power	Data rate	Data modulation
1, 5, 11	18	802.11b: 1-11 Mbps	802.11b: DSSS(BPSK, QPSK, CCK)
	18	802.11g: 6-54 Mbps	802.11g: OFDM(BPSK, QPSK, 16/64QAM)

The tests were performed in 1, 11 Mbps and 6, 54 Mbps data rate (worst case) in standalone mode and shown in this report.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Peripherals

Details of EUT:

- (1) A AC-DC adaptor: 100-240VAC 50-60Hz input, 12VDC 1.5A output, Model: KSAD1200150W1UV-1
- (2) A Ethernet cable with 1.5 meter long

There are no special accessories necessary for compliance of this product.

INTERTEK TESTING SERVICES

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.5 Equipment Modification

Any modifications installed previous to testing by Victory Concept Industries Ltd. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Intertek Testing Services Hong Kong Ltd.

All the items listed under section 3.0 of this report are confirmed by:

Confirmed by:

*Ho Wai Kin, Ben
Senior Supervisor
Intertek Testing Services Hong Kong Ltd.
Agent for Victory Concept Industries Ltd.*



Signature

December 08, 2008 Date

EXHIBIT 4

MEASUREMENT RESULTS

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW > 6dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using to OFFSET function of the analyzer.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm).

IEEE 802.11b (Antenna Gain = -2.0 dBi)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	15.05	31.99
Middle Channel: 2432	14.00	25.12
High Channel: 2462	15.05	31.99

IEEE 802.11g (Antenna Gain = -2.0 dBi)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	19.40	87.10
Middle Channel: 2432	18.76	75.16
High Channel: 2462	19.54	89.95

Cable loss : 0.5 dB External Attenuation : Nil dB

Cable loss, external attenuation: included in OFFSET function
 added to power meter raw reading

EUT dBm max. output level = 19.54 dBm (+30 dBm or less)

For RF Safety, the information is saved with filename: RF exposure info.pdf.

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 11Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	8.5

IEEE 802.11g (OFDM, 54Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
2412	16.5

Limit: at least 500kHz

Refer to the following plots for 6 dB bandwidth sharp:

IEEE 802.11b

Plot B2A1 - B2A2: Low Channel 6 dB RF Bandwidth
Plot B2B1 - B2B2: Middle Channel 6 dB RF Bandwidth
Plot B2C1 - B2C2: High Channel 6 dB RF Bandwidth

IEEE 802.11g

Plot G2A1 - G2A2: Low Channel 6 dB RF Bandwidth
Plot G2B1 - G2B2: Middle Channel 6 dB RF Bandwidth
Plot G2C1 - G2C2: High Channel 6 dB RF Bandwidth

For electronic filing, the above plots are saved with filename: 6dB.pdf

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.3 Maximum Power Density Reading, FCC Rule 15.247(e) :

The spectrum analyzer RES BW was set to 3kHz. In order to look for a peak, the START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are added to the analyzer raw readings.

IEEE 802.11b (DSSS, 11Mbps)	
Frequency (MHz)	Power Density (dBm/3kHz)
2413.363	4.55

Frequency Span = 1.5MHz

Sweep Time = Frequency Span/3kHz
= 500 seconds

Cable Loss: 0.5 dB

Peak Power Density (at 2413.363MHz) = $4.05 + 0.5 = 4.55$ dBm/3kHz

Limit: 8dBm/ 3kHz

Refer to the following plots for power density data :

Plot B3A1 - B3A2: Low Channel power density
Plot B3B1 - B3B2: Middle Channel power density
Plot B3C1 - B3C2: High Channel power density

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.3 Maximum Power Density Reading, FCC Rule 15.247(e) – Continued:

IEEE 802.11g (OFDM, 6Mbps)	
Frequency (MHz)	Power Density (dBm/3kHz)
2410.705	-12.0

Frequency Span = 1.5MHz

Sweep Time = Frequency Span/3kHz
= 500 seconds

Cable Loss: 0.5 dB

Peak Power Density (at 2410.705MHz) = $-12.50 + 0.5 = -12.0\text{dBm/3kHz}$

Limit: 8dBm/ 3kHz

Refer to the following plots for power density data :

Plot G3A1 - G3A2: Low Channel power density
Plot G3B1 - G3B2: Middle Channel power density
Plot G3C1 - G3C2: High Channel power density

For electronic filing, the above plots are saved with filename: maxpd.pdf

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20dB below that of the maximum in-band 100 kHz emission, or else shall meet the general limits for radiated emissions at frequencies outside the passband, whichever results in lower attenuation.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the passband.

Refer to the following plots for out of band conducted emissions data:

Plot B4A1 - B4A2: Low Channel Emissions
Plot B4B1 - B4B2: Middle Channel Emissions
Plot B4C1 - B4C2: High Channel Emissions
Plot G4A1 - G4A2: Low Channel Emissions
Plot G4B1 - G4B2: Middle Channel Emissions
Plot G4C1 - G4C2: High Channel Emissions
Plot B4D1 - B4D2: Low Channel Emissions
Plot G4D1 - G4D2: Low Channel Emissions

The plots showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

For the electronic filing, the above plots are saved with filename: obantcon.pdf

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required, since all emissions are more than 20dB below fundamental
- See attached data sheet

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where $FS = \text{Field Strength in } dB\mu V/m$
 $RA = \text{Receiver Amplitude (including preamplifier) in } dB\mu V$
 $CF = \text{Cable Attenuation Factor in } dB$
 $AF = \text{Antenna Factor in } dB$
 $AG = \text{Amplifier Gain in } dB$
 $PD = \text{Pulse Desensitization in } dB$
 $AV = \text{Average Factor in } -dB$

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 $dB\mu V$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB , and the resultant average factor was -10 dB . The net field strength for comparison to the appropriate emission limit is 32 $dB\mu V/m$. This value in $dB\mu V/m$ was converted to its corresponding level in $\mu V/m$.

$$RA = 62.0 \text{ } dB\mu V$$

$$AF = 7.4 \text{ } dB$$

$$CF = 1.6 \text{ } dB$$

$$AG = 29.0 \text{ } dB$$

$$PD = 0 \text{ } dB$$

$$AV = -10 \text{ } dB$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ } dB\mu V/m$$

$$\text{Level in } mV/m = \text{Common Antilogarithm } [(32 \text{ } dB\mu V/m)/20] = 39.8 \text{ } \mu V/m$$

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.8 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at
2483.05 MHz

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.doc.

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10


Date of Test: November 03, 2008

4.9 Radiated Emission Data

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Judgment : Passed by 0.8 dB margin

TEST PERSONNEL:

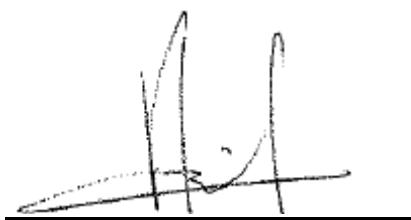

Tester Signature

Neil Tam, Engineer
Typed/Printed Name

December 08, 2008
Date

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11b (TX - Channel 01)

Table 1 - 2
Radiated Emissions

Channel 01

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4824.500	44.4	33	34.9	46.3	0	46.3	54.0	-7.7
V	7236.750	42.6	33	37.9	47.5	0	47.5	54.0	-6.5
V	9649.000	40.7	33	40.4	48.1	0	48.1	54.0	-5.9
V	12061.250	41.9	33	40.5	49.4	0	49.4	54.0	-4.6

Channel 01

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4824.500	44.4	33	34.9	46.3	0	46.3	74.0	-27.7
V	7236.750	42.6	33	37.9	47.5	0	47.5	74.0	-26.5
V	9649.000	40.7	33	40.4	48.1	0	48.1	74.0	-25.9
V	12061.250	41.9	33	40.5	49.4	0	49.4	74.0	-24.6

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11b (TX - Channel 05)

Table 3 - 4
Radiated Emissions

Channel 05

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4865.250	44.2	33	34.9	46.1	0	46.1	54.0	-7.9
V	7297.875	42.4	33	37.9	47.3	0	47.3	54.0	-6.7
V	9730.500	41.1	33	40.4	48.5	0	48.5	54.0	-5.5
V	12163.125	41.7	33	40.5	49.2	0	49.2	54.0	-4.8

Channel 05

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4865.250	44.2	33	34.9	46.1	0	46.1	74.0	-27.9
V	7297.875	42.4	33	37.9	47.3	0	47.3	74.0	-26.7
V	9730.500	41.1	33	40.4	48.5	0	48.5	74.0	-25.5
V	12163.125	41.7	33	40.5	49.2	0	49.2	74.0	-24.8

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11b (TX - Channel 11)

Table 5 - 6
Radiated Emissions

Channel 11

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	*2483.5	54.0	33	29.4	50.4	0	50.4	54.0	-3.6
V	4925.500	44.5	33	34.9	46.4	0	46.4	54.0	-7.6
V	7388.250	42.5	33	37.9	47.4	0	47.4	54.0	-6.6
V	9851.000	41.1	33	40.4	48.5	0	48.5	54.0	-5.5
V	12313.750	42.1	33	40.5	49.6	0	49.6	54.0	-4.4

Channel 11

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	*2483.5	54.0	33	29.4	50.4	0	50.4	74.0	-23.6
V	4925.500	44.5	33	34.9	46.4	0	46.4	74.0	-27.6
V	7388.250	42.5	33	37.9	47.4	0	47.4	74.0	-26.6
V	9851.000	41.1	33	40.4	48.5	0	48.5	74.0	-25.5
V	12313.750	42.1	33	40.5	49.6	0	49.6	74.0	-24.4

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- * Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11g (TX - Channel 01)

Table 7 - 8
Radiated Emissions

Channel 01

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4824.500	44.7	33	34.9	46.6	0	46.6	54.0	-7.4
V	7236.750	42.8	33	37.9	47.7	0	47.7	54.0	-6.3
V	9649.000	41.4	33	40.4	48.8	0	48.8	54.0	-5.2
V	12061.250	41.6	33	40.5	49.1	0	49.1	54.0	-4.9

Channel 01

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4824.500	44.7	33	34.9	46.6	0	46.6	74.0	-27.4
V	7236.750	42.8	33	37.9	47.7	0	47.7	74.0	-26.3
V	9649.000	41.4	33	40.4	48.8	0	48.8	74.0	-25.2
V	12061.250	41.6	33	40.5	49.1	0	49.1	74.0	-24.9

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11g (TX - Channel 05)

Table 9 -10
Radiated Emissions

Channel 05

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4865.250	44.9	33	34.9	46.8	0	46.8	54.0	-7.2
V	7297.875	42.8	33	37.9	47.7	0	47.7	54.0	-6.3
V	9730.500	40.9	33	40.4	48.3	0	48.3	54.0	-5.7
V	12163.125	41.7	33	40.5	49.2	0	49.2	54.0	-4.8

Channel 05

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4865.250	44.9	33	34.9	46.8	0	46.8	74.0	-27.2
V	7297.875	42.8	33	37.9	47.7	0	47.7	74.0	-26.3
V	9730.500	40.9	33	40.4	48.3	0	48.3	74.0	-25.7
V	12163.125	41.7	33	40.5	49.2	0	49.2	74.0	-24.8

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.

Date of Test: November 03, 2008

Model: AIRSTREAM 10

Worst-Case Operating Mode: 802.11g (TX - Channel 11)

Table 11 - 12
Radiated Emissions

Channel 11

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	*2483.5	56.8	33	29.4	53.2	0	53.2	54.0	-0.8
V	*2490	56.6	33	29.4	53.0	0	53.0	54.0	-1.0
V	4925.500	44.4	33	34.9	46.3	0	46.3	54.0	-7.7
V	7388.250	42.3	33	37.9	47.2	0	47.2	54.0	-6.8
V	9851.000	41.1	33	40.4	48.5	0	48.5	54.0	-5.5
V	12313.750	41.9	33	40.5	49.4	0	49.4	54.0	-4.6

Channel 11

Polarization	Frequency	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	*2483.5	56.8	33	29.4	53.2	0	53.2	74.0	-20.8
V	*2490	56.6	33	29.4	53.0	0	53.0	74.0	-21.0
V	4925.500	44.4	33	34.9	46.3	0	46.3	74.0	-27.7
V	7388.250	42.3	33	37.9	47.2	0	47.2	74.0	-26.8
V	9851.000	41.1	33	40.4	48.5	0	48.5	74.0	-25.5
V	12313.750	41.9	33	40.5	49.4	0	49.4	74.0	-24.6

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.

* Emission within the restricted band meets the requirement of section 15.205. The corresponding limit as per 15.209 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test Engineer: Neil Tam

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.10 AC Line Conducted Emission, FCC Rule 15.207:

Not required; battery operation only

Test data attached

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.11 Line Conducted Configuration Photograph

Worst Case Line-Conducted Configuration
at
0.15 MHz

For electronic filing, the worst case line conducted configuration photographs are saved with filename: conducted photos.doc.

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008


4.12 Line Conducted Emission Configuration Data

The data on the following pages list the significant emission frequencies, the limit, and the margin of compliance.

Judgment : Passed by 6.1 dB margin

For electronic filing, the conducted emission test result is saved with filename: conducted.pdf

TEST PERSONNEL:

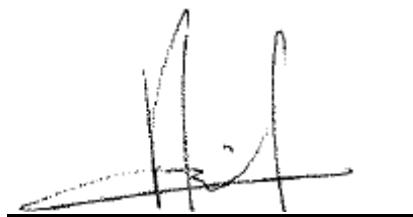

Tester Signature

Neil Tam, Engineer
Typed/Printed Name

December 08, 2008
Date

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.13 Radiated Emissions from Ethernet Section of EUT, FCC Ref: 15.109

- [] Not required - No digital part
- [] Test results are attached
- [x] Included in the separated 15V report.

INTERTEK TESTING SERVICES

Applicant: Victory Concept Industries Ltd.
Model: AIRSTREAM 10

Date of Test: November 03, 2008

4.14 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for transmitter timing
	See transmitter timing diagram provided by manufacturer
x	Not applicable, duty cycle was not used.

EXHIBIT 5

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

5.0 Equipment Photographs

For electronic filing, the photographs are saved with filename: external photos.doc & internal photos.doc.

EXHIBIT 6
PRODUCT LABELLING

INTERTEK TESTING SERVICES

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and location is saved with filename: label.pdf.

EXHIBIT 7

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

7.0 Technical Specifications

For electronic filing, the block diagram and circuit diagram are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 8
INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 9

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

9.0 Discussion of Pulse Desensitization

The determination of pulse desensitivity was made in accordance with Hewlett Packard Application Note 150-2, *Spectrum Analysis ... Pulsed RF*.

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

EXHIBIT 10

CONFIDENTIALITY REQUEST

INTERTEK TESTING SERVICES

10.0 Confidentiality Request

The applicant would like to have confidential protection of the following documents:

Permanent Confidentiality

- Block Diagram
- Circuit Diagram
- Operational Description

For electronic filing, the request letter is saved with filename: request.pdf.