

Test of Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Test Report Serial No.: AXXC06-A6 Rev A



TEST REPORT

FROM



Test of Axxcelera Tri-Band CPE

to

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: AXXC06-A6 Rev A

Note: this report only contains data with regard to the 5,470 to 5,725 MHz operational modes of the Axxcelera Tri-Band CPE. Report AXXC06-A2 contains data with respect to 5,725 – 5,850 MHz operation.

This report supersedes: None

Applicant: Axxcelera Broadband Wireless, Inc
1600 E. Parham Road
Richmond
Virginia 23228 USA

Product Function: 802.16 Wireless Access Point

Copy No: pdf **Issue Date:** 16th December 2008

This Test Report is Issued Under the Authority of;

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 3 of 126

This page has been left intentionally blank

TABLE OF CONTENTS

| | |
|---|-----------|
| ACCREDITATION & LISTINGS..... | 6 |
| 1. TEST RESULT CERTIFICATE | 9 |
| 2. REFERENCES AND MEASUREMENT UNCERTAINTY | 10 |
| 2.1. Normative References | 10 |
| 2.2. Test and Uncertainty Procedures | 11 |
| 3. PRODUCT DETAILS AND TEST CONFIGURATIONS | 12 |
| 3.1. Technical Details | 12 |
| 3.2. Scope of Test Program..... | 13 |
| 3.3. Equipment Model(s) and Serial Number(s) | 18 |
| 3.4. Antenna Details | 18 |
| 3.5. Cabling and I/O Ports | 18 |
| 3.6. Test Configurations..... | 19 |
| 3.7. Equipment Modifications..... | 19 |
| 3.8. Deviations from the Test Standard | 20 |
| 4. TEST SUMMARY | 21 |
| 5. TEST RESULTS | 24 |
| 5.1. Device Characteristics | 24 |
| 5.1.1. <i>26 dB and 99 % Bandwidth</i> | 24 |
| 5.1.2. <i>Transmit Output Power</i> | 35 |
| 5.1.3. <i>Peak Power Spectral Density</i> | 39 |
| 5.1.4. <i>Peak Excursion Ratio</i> | 50 |
| 5.1.5. <i>Frequency Stability</i> | 61 |
| 5.1.6. <i>Maximum Permissible Exposure</i> | 62 |
| 5.1.7. <i>Radiated Emissions</i> | 63 |
| 5.1.8. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i> | 80 |
| 6. Dynamic Frequency Selection (DFS)..... | 84 |
| 6.1. Test Procedure and Setup | 84 |
| 6.1.1. <i>Interference Threshold values, Master or Client incorporating In-Service Monitoring</i> | 84 |
| 6.1.2. <i>DFS Response requirement values</i> | 84 |
| 6.1.3. <i>Radar Test Waveforms</i> | 85 |
| 6.1.4. <i>Frequency Hopping Radar Test Waveform</i> | 88 |
| 6.1.5. <i>Radar Waveform Calibration</i> | 88 |
| 6.1.6. <i>Radar Waveform Calibration Plots</i> | 89 |
| 6.1.7. <i>Test Set Up</i> | 95 |
| 6.2. Dynamic Frequency Selection (DFS) Test Results | 97 |
| 6.2.1. <i>UNII Detection Bandwidth</i> : | 97 |
| 6.2.2. <i>Initial Channel Availability Check Time</i> | 101 |
| 6.2.3. <i>Radar Burst at the Beginning of the Channel Availability Check Time</i> : | 102 |
| 6.2.4. <i>Radar Burst at the End of the Channel Availability Check Time</i> : | 103 |
| 6.2.5. <i>In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period</i> | 104 |
| 6.2.6. <i>Statistical Performance Check</i> | 113 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 5 of 126

| | |
|---|------------|
| 7. PHOTOGRAPHS..... | 118 |
| 7.1. Radiated Spurious Emissions >1 GHz..... | 118 |
| 7.2. Radiated Spurious Emissions <1 GHz..... | 119 |
| 7.3. AC Wireline Emissions (150 kHz - 30 MHz) | 120 |
| 7.4. General Measurement Test Set-Up #1 | 121 |
| 7.5. General Measurement Test Set-Up #2 Environmental Chamber | 122 |
| 7.6. Dynamic Frequency Selection Test Set-Up | 123 |
| 8. TEST EQUIPMENT DETAILS..... | 125 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 6 of 126

ACCREDITATION & LISTINGS

MiCOM Labs, Inc. an accredited laboratory complies with the international standard BS EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 7 of 126

LISTINGS

MiCOM Labs test facilities are listed by the following organizations;

North America

United States of America

Federal Communications Commission (FCC) Listing #: 102167

Canada

Industry Canada: 4143A

RECOGNITION

APEC MRA (Asia-Pacific Economic Community Mutual Recognition Agreement)

Conformity Assessment Body (CAB) – MiCOM Labs

Test data generated by MiCOM Labs is accepted in the following countries under the APEC MRA.

| Country | Recognition Body | Phase | CAB Identification No. |
|-----------|---|-------|------------------------|
| Australia | Australian Communications and Media Authority (ACMA) | I | US0159 |
| Hong Kong | Office of the Telecommunication Authority (OFTA) | I | |
| Korea | Ministry of Information and Communication Radio Research Laboratory (RRL) | I | |
| Singapore | Infocomm Development Authority (IDA) | I | |
| Taiwan | Directorate General of Telecommunications (DGT) Bureau of Standards, Metrology and Inspection (BSMI) | I | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 8 of 126

DOCUMENT HISTORY

| Document History | | |
|------------------|-------------------------------|-----------------|
| Revision | Date | Comments |
| Draft | | |
| A | 16 th December '08 | Initial Release |
| | | |
| | | |
| | | |
| | | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 9 of 126

1. TEST RESULT CERTIFICATE

| | | | |
|---------------|--|------------|--|
| Manufacturer: | Axxcelera Broadband Wireless, Inc 1600 E. Parham Road Richmond Virginia 23228 USA | Tested By: | MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA |
| EUT: | Wireless Access Point | Telephone: | +1 925 462 0304 |
| Model: | Tri-Band CPE | Fax: | +1 925 462 0306 |
| S/N: | N/A | | |
| Test Date(s): | 31st to 5th December 2008 | Website: | www.micomlabs.com |


| STANDARD(S) | TEST RESULTS |
|-------------------------------------|--------------------|
| FCC 47 CFR Part 15.407 & IC RSS-210 | EQUIPMENT COMPLIES |


MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

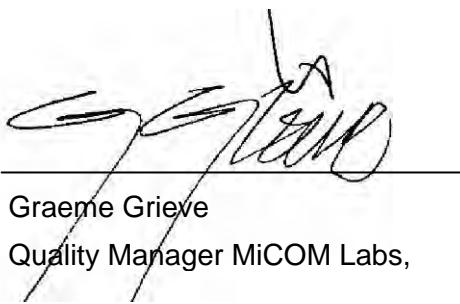
Graeme Grieve
Quality Manager MiCOM Labs,

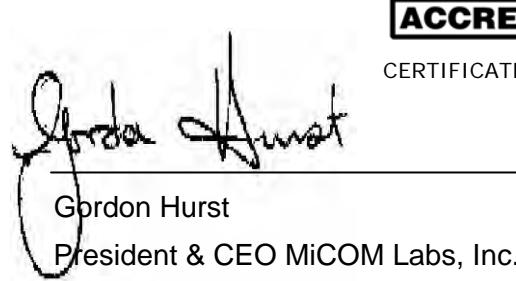
Gordon Hurst
President & CEO MiCOM Labs, Inc.



CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 10 of 126

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

| Ref. | Publication | Year | Title |
|--------|--------------------------------|---------------------------------------|--|
| (i) | FCC 47 CFR Part 15.407 | 2007 | Code of Federal Regulations |
| (ii) | FCC 06-96 | June 2006 | Memorandum Opinion and Order |
| (iii) | Industry Canada RSS-210 | Issue 7 June 2007 | Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment |
| (iv) | Industry Canada RSS-Gen | Issue 2 June 2007 | General Requirements and Information for the Certification of Radiocommunication Equipment |
| (v) | ANSI C63.4 | 2003 | American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz |
| (vi) | CISPR 22/ EN 55022 | 1997 1998 | Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment |
| (vii) | M 3003 | Edition 1 Dec. 1997 | Expression of Uncertainty and Confidence in Measurements |
| (viii) | LAB34 | Edition 1 Aug 2002 | The expression of uncertainty in EMC Testing |
| (ix) | ETSI TR 100 028 | 2001 | Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics |
| (x) | A2LA | 14 th September 2005 | Reference to A2LA Accreditation Status – A2LA Advertising Policy |
| (xi) | FCC Public Notice – DA 02-2138 | 2002 | Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 11 of 126

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 12 of 126

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

| Details | Description |
|---|---|
| Purpose: | Test of the Axxcelera Tri-Band CPE in the frequency range 5470 to 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations. |
| Applicant: | As Manufacturer |
| Manufacturer: | Axxcelera Broadband Wireless, Inc 1600 E. Parham Road Richmond Virginia 23228 USA |
| Laboratory performing the tests: | MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA |
| Test report reference number: | AXXC06-A6 Rev A |
| Date EUT received: | 31 st October 2008 |
| Standard(s) applied: | FCC 47 CFR Part 15.407 & IC RSS-210 |
| Dates of test (from - to): | 31st to 5th December 2008 |
| No of Units Tested: | 2 - Conducted and radiated testing were separate units |
| Firmware Revision: | 3.1.1.5 |
| DFS Category: | Client with radar detection capability |
| Type of Equipment: | 802.16 Wireless Customer Premise Equipment |
| Manufacturers Trade Name: | Customer Premise Equipment |
| Model: | Tri-Band CPE |
| Location for use: | Outdoor |
| Declared Frequency Range(s): | 5,470 to 5,725 MHz |
| Declared Nominal Output Power: (Average Power) | 5,470 - 5,725 MHz: +18 dBm |
| Type of Modulation: | BPSK, QPSK, 16QAM, 64QAM |
| EUT Modes of Operation: | Bandwidths: 5, 10 & 15 MHz |
| Transmit/Receive Operation: | Time Division Duplex |
| Rated Input Voltage and Current: | 48 Vdc, 250 mA |
| Operating Temperature Range: | Declared range -40 to +55°C |
| ITU Emission Designator: | 5 MHz BW – 4M6W7D 10 MHz BW – 9M2W7D 15 MHz BW – 13M7W7D |
| Clock/Oscillator(s): | 25 kHz, 40 MHz, 5725 MHz |
| Frequency Stability (long term): | ±20 ppm max |
| Equipment Dimensions: | 8" X 8" X 2.5" |
| Weight: | 3 lbs |
| Primary function of equipment: | Customer Premise Equipment for point to multipoint broadband |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 13 of 126

3.2. Scope of Test Program

RF Testing

The scope of the test program was to test the Axxcelera wireless Tri-Band CPE in the frequency range 5470 – 5725 MHz for compliance against FCC 47 CFR Part 15.407, Industry Canada RSS-210 specifications including Dynamic Frequency Selection (DFS) requirements.

The CPE covers channels 5,482.5 – 5712.5 MHz

Dynamic Frequency Selection

The scope of the test program was to test the Axxcelera CPE in the frequency range 5,470 to 5,725 MHz as a client device for compliance against DFS requirements of FCC 47 CFR Part 15.407 and the FCC specification Memorandum Opinion and Order FCC 06-96.

One frequency was chosen (5,500 MHz) from the operating channels of the UUT within the 5,470 – 5,725 MHz band for DFS testing per the requirements of FCC specification "Memorandum Opinion and Order FCC 06-96", Section 7.8 "DFS Conformance Test Procedures".

U-NII devices operating in the 5,470 - 5,725 MHz band shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.


The Axxcelera Tri-Band CPE product operates as a client device with full radar detection and Dynamic Frequency Selection (DFS) capability.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 14 of 126

Axxcelera Tri-Band CPE
Wireless Customer Premise Equipment

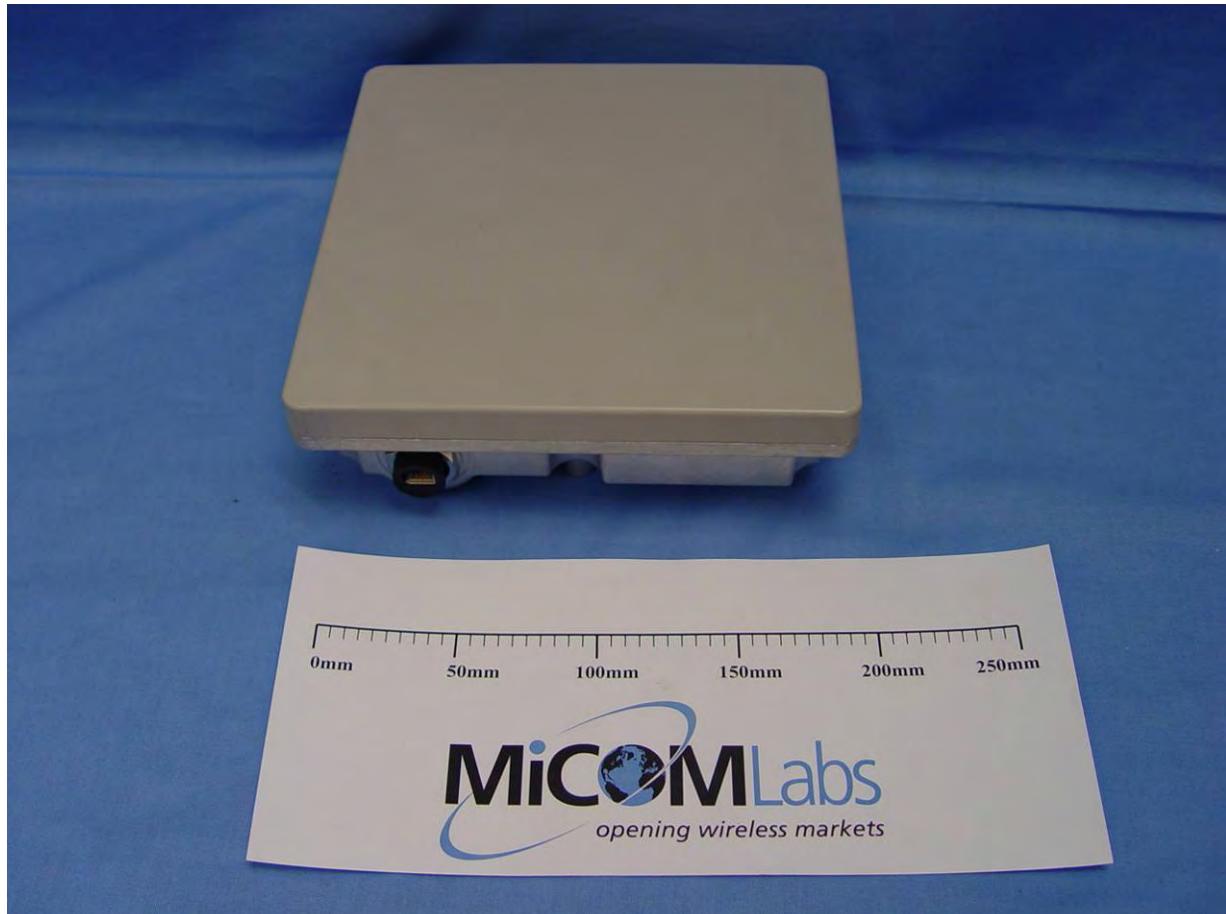


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 15 of 126

Axxcelera Tri-Band CPE
Wireless Customer Premise Equipment

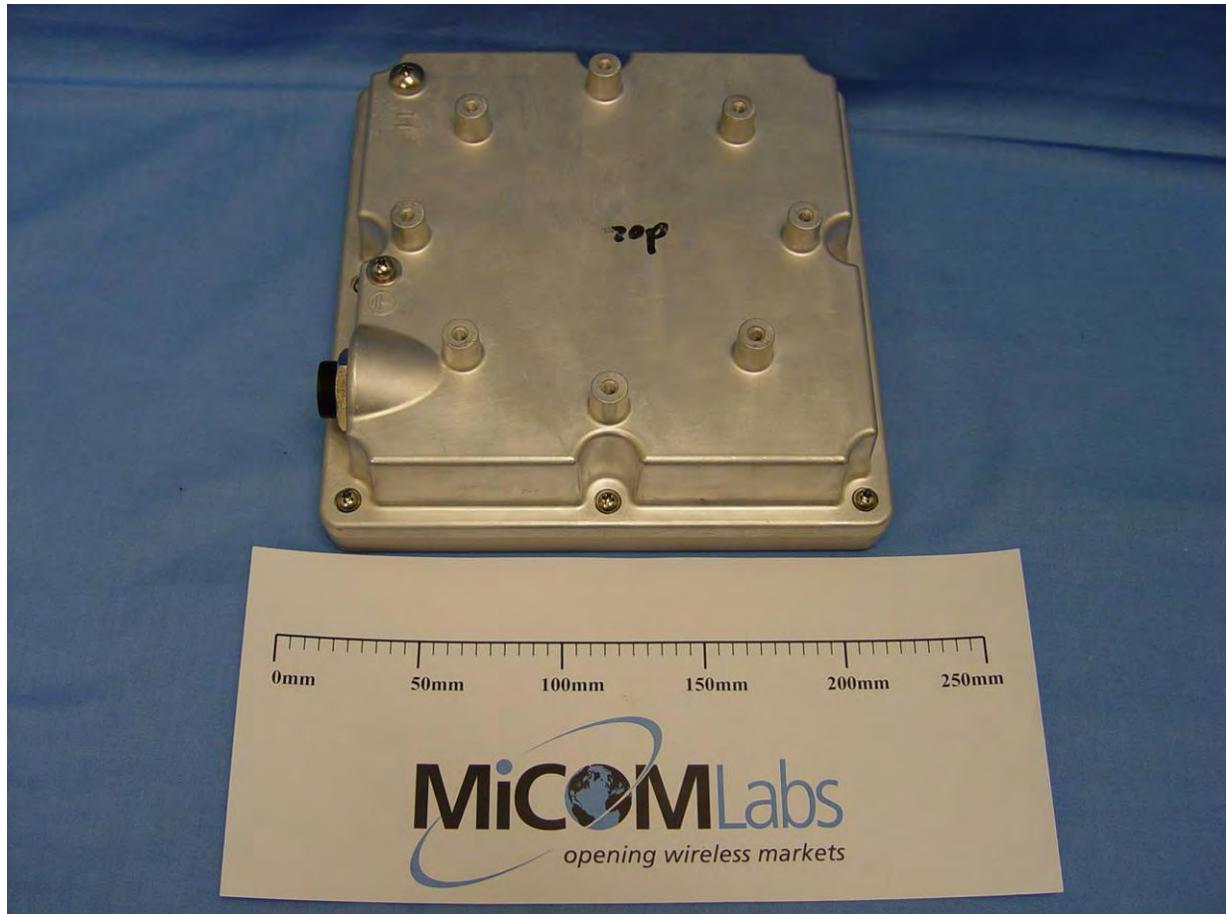

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 16 of 126

Axxcelera Tri-Band CPE PhiHong POE Adapter




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 17 of 126

**Axxcelera Tri-Band CPE
Power Dsine POE Adapter**

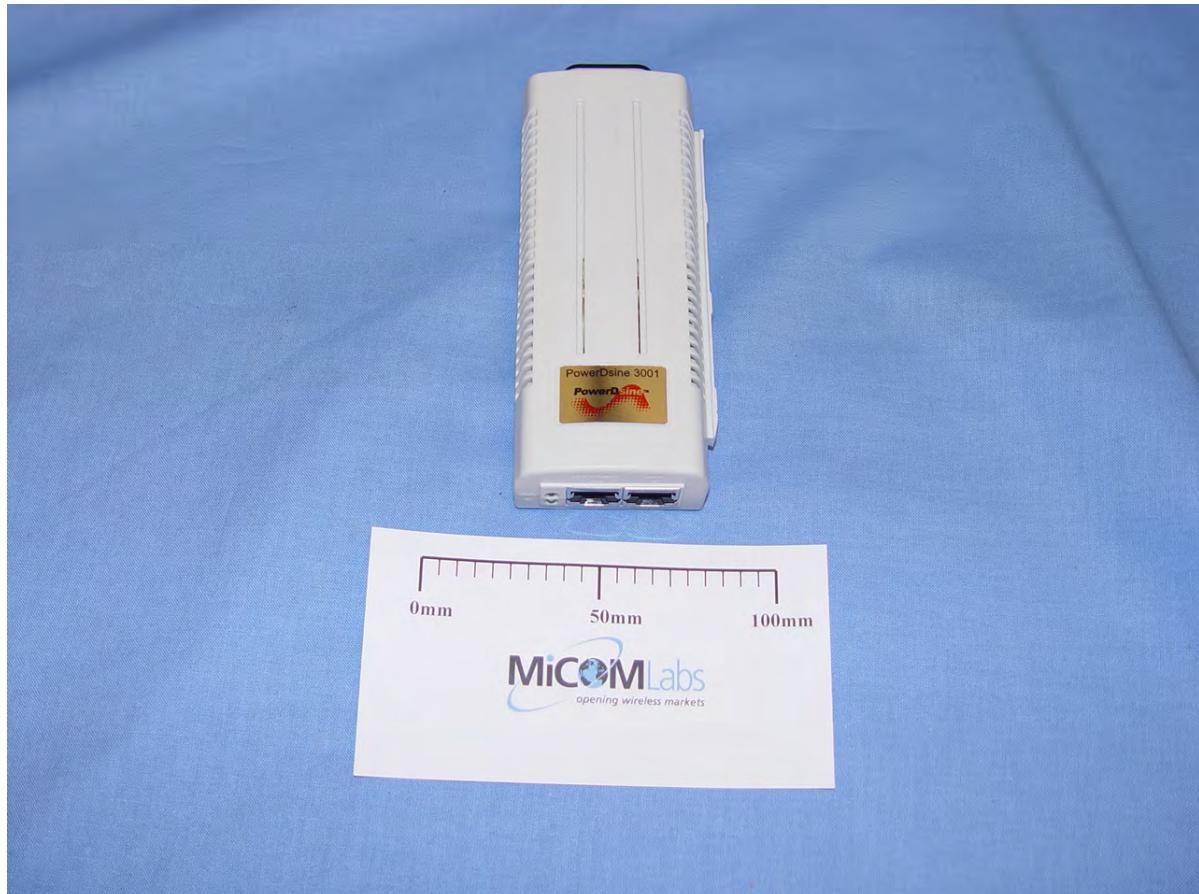

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 18 of 126

3.3. Equipment Model(s) and Serial Number(s)

| Type (EUT/Support) | Equipment Description (Including Brand Name) | Mfr | Model No. | Serial No. |
|--------------------|---|------------|---------------|------------|
| EUT | Wireless AP | Axxcelera | Tri-Band CPE | N/A |
| EUT | POE Power Supply 100-250Vac 50-60Hz, 0.5A 48Vdc, 0.35A | PowerDsine | PD-3001/AC | N/A |
| EUT | Single Port POE Power Supply Gigabit Compatible 100-240Vac 50-60Hz 56Vdc, 0.55A | PhiHong | POE30U-560(G) | N/A |
| Support | Laptop PC | Dell | Inspiron | None |

3.4. Antenna Details

1. Maximum Antenna Gain = +17.5 dBi (integral antenna)

3.5. Cabling and I/O Ports

Number and type of I/O ports-[5

1. POE 10/100 Ethernet (max length 30 meters)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

3.6. Test Configurations

Testing was performed to determine the worst case test scenario. It was found through exercising each modulation with each bandwidth that there was no difference. Test data is available and held on file by the laboratory identifying cross checks performed.

Matrix of test configurations

| Operational Mode | Frequencies (5 MHz Channel Spacing) | Frequencies (10 MHz Channel Spacing) | Frequencies (15 MHz Channel Spacing) |
|------------------|-------------------------------------|--------------------------------------|--------------------------------------|
| 802.16 | 5482.5 | 5485.0 | 5487.5 |
| | 5597.5 | 5597.5 | 5597.5 |
| | 5712.5 | 5710.0 | 5707.5 |


3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

The following modifications were required to bring the equipment into compliance:

1. AC Wireline Emissions

There was problem with an AC Wireline Emission at 23.129 MHz. The client added two chokes L2 and L7 to bring the EUT into compliance.

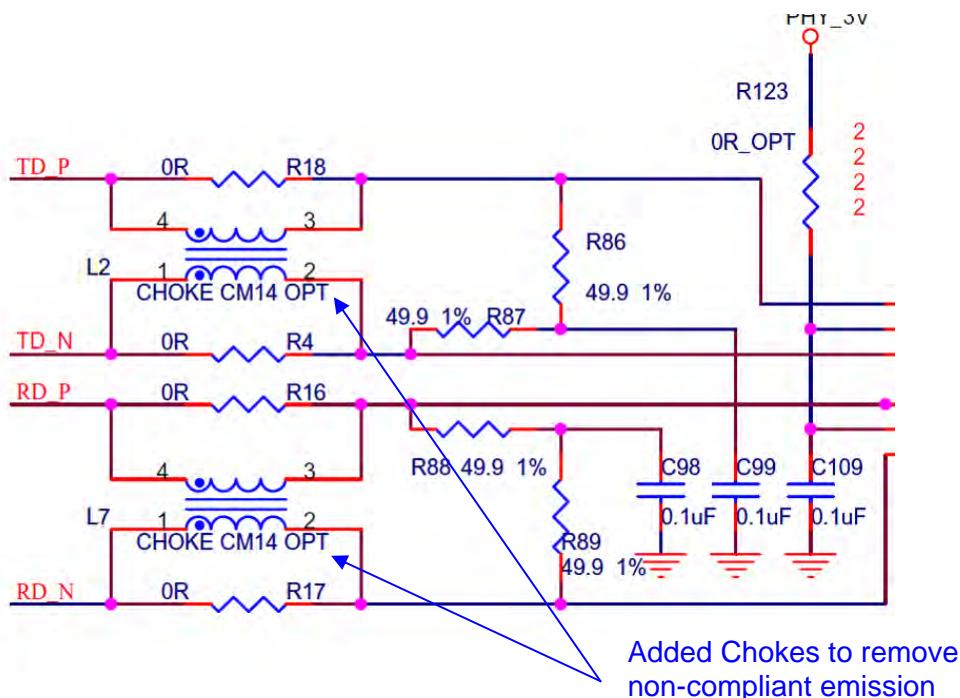

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 20 of 126

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 21 of 126

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210**.and **Industry Canada RSS-Gen**.

| Section(s) | Test Items | Description | Condition | Result | Test Report Section |
|--|------------------------------------|---|--------------------------|----------|---------------------|
| 15.407(a) A9.2(2) 4.4 | 26dB and 99% Emission BW | Emission bandwidth measurement | Conducted | Complies | 5.1.1 |
| 15.407(a) A9.2(2) 4.6 | Transmit Output Power | Power Measurement | Conducted | Complies | 5.1.2 |
| 15.407(a) A9.2(2) | Peak Power Spectral Density | PPSD | Conducted | Complies | 5.1.3 |
| 15.407(a)(6) | Peak Excursion Ratio | <13dB in any 1MHz bandwidth | Conducted | Complies | 5.1.4 |
| 15.407(g) 15.31 2.1 4.5 | Frequency Stability | Limits: contained within band of operation at all times. | Manufacturer declaration | Complies | 5.1.5 |
| 15.407(f) 5.5 | Radio Frequency Radiation Exposure | Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE) | Calculation | Complies | 5.1.6 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 22 of 126

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

| Section(s) | Test Items | Description | Condition | Result | Test Report Section |
|---|---|--|-----------|----------|---------------------|
| 15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7 | Radiated Emissions Transmitter Radiated Spurious Emissions Radiated Band Edge | Emissions above 1 GHz Band edge results | Radiated | | 5.1.7 |
| RSS-GEN 6 | Receiver Radiated Spurious Emissions | Emissions above 1 GHz | | Complies | 5.1.7.1 |
| 15.407(b)(6) 15.205(a) 15.209(a) 2.2 | Radiated Emissions | Emissions <1 GHz (30M-1 GHz) | | Complies | 5.1.7.2 |
| 15.407(b)(6) 15.207 7.2.2 | AC Wireline Conducted Emissions 150 kHz–30 MHz | Conducted Emissions | Conducted | Complies | 5.1.7.3 |
| | | | | | 5.1.7.4 |
| | | | | | 5.1.8 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 23 of 126

List of Measurements (cont'd)

Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for unlicensed national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

Tests performed on Client Device

| Section | Test Items | Description | Condition | Result | Test Report Section |
|---------|--------------------------------|---|-----------|-------------------|---------------------|
| 7.8.1 | Detection Bandwidth | UNII Detection Bandwidth | Conducted | Complies | 6.2.1 |
| 7.8.2.1 | Performance Requirements Check | Initial Channel Availability Check Time | Conducted | N/A Client Device | 6.2.2 |
| 7.8.2.2 | | Radar Burst at the Beginning of the Channel Availability Check Time | Conducted | N/A Client Device | 6.2.3 |
| 7.8.2.3 | | Radar Burst at the End of the Channel Availability Check Time | Conducted | N/A Client Device | 6.2.4 |
| 7.8.3 | In-Service Monitoring | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Conducted | Complies | 6.2.5 |
| 7.8.4 | Radar Detection | Statistical Performance Check | Conducted | Complies | 6.2.6 |

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics


5.1.1. 26 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)
Industry Canada RSS-Gen 4.4

Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

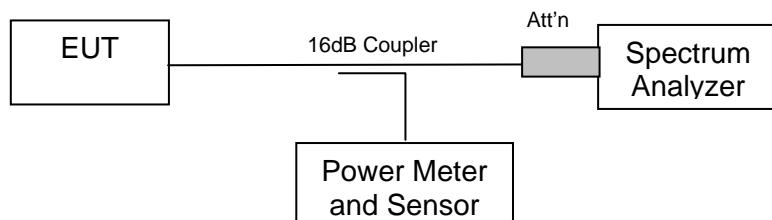

Measurement set up for 26 dB and 99 % bandwidth test

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 64 QAM 5 MHz BW


| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % Bandwidth (MHz) |
|------------------------|-----------------------|----------------------|
| 5,482.5 | 5.571 | 4.569 |
| 5,597.5 | 5.531 | 4.569 |
| 5,712.5 | 5.571 | 4.569 |

5,482.5 MHz 64 QAM 5 MHz 26 dB and 99 % Bandwidth

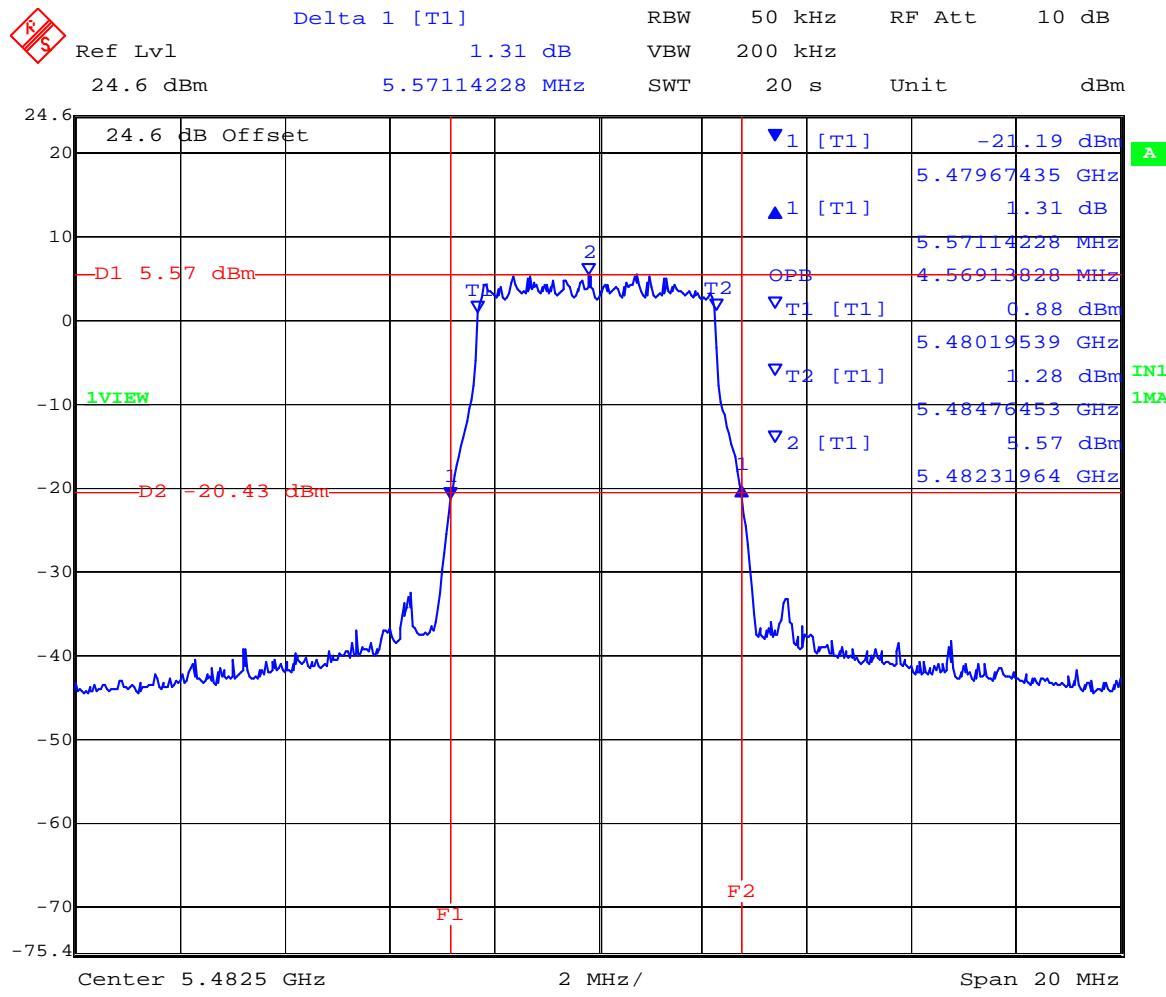

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz 64 QAM 5 MHz 26 dB and 99 % Bandwidth

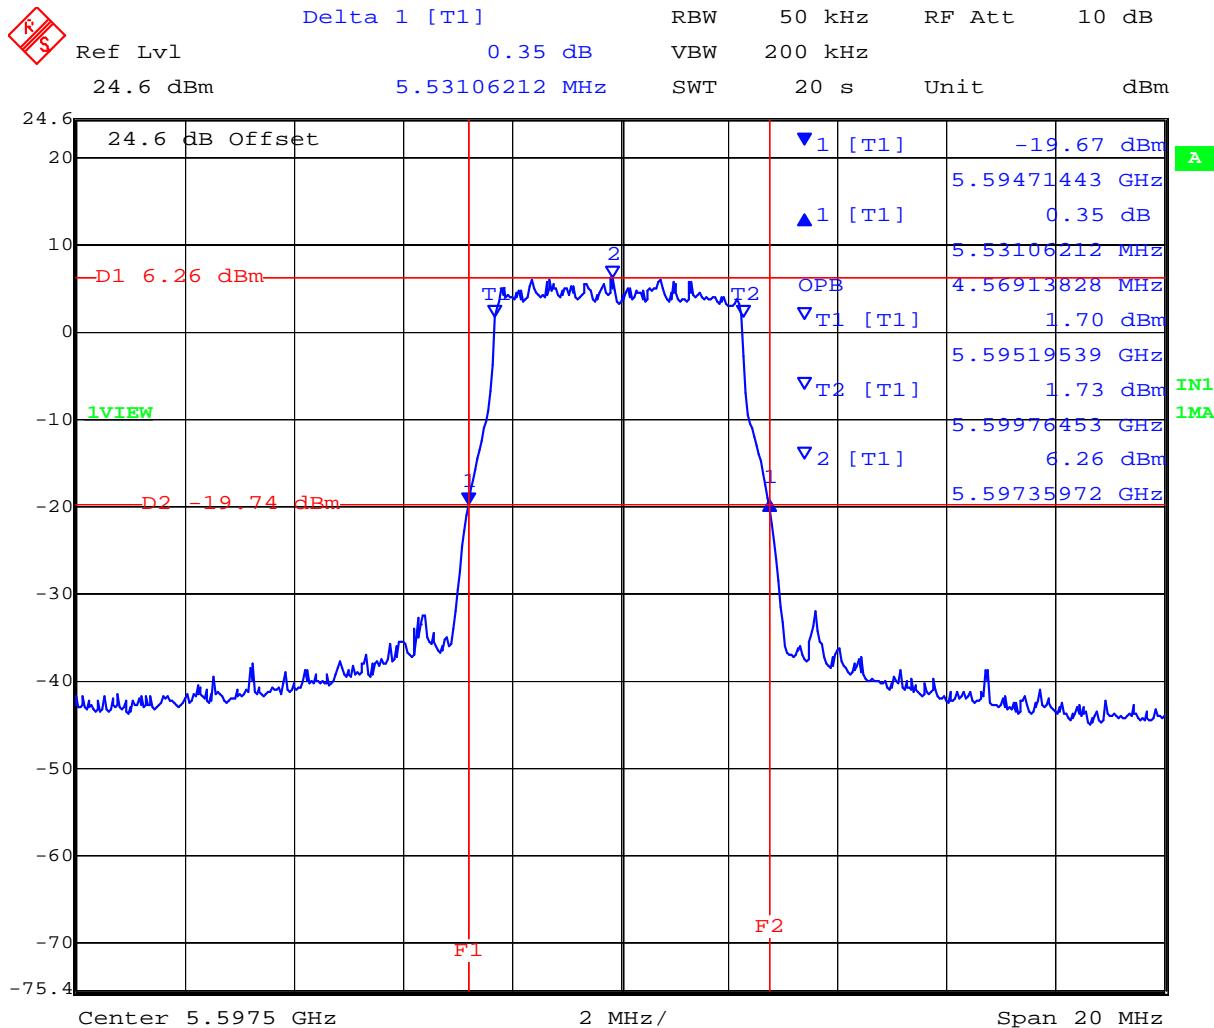

Date: 3.NOV.2008 14:47:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,712.5 MHz 64 QAM 5 MHz 26 dB and 99 % Bandwidth

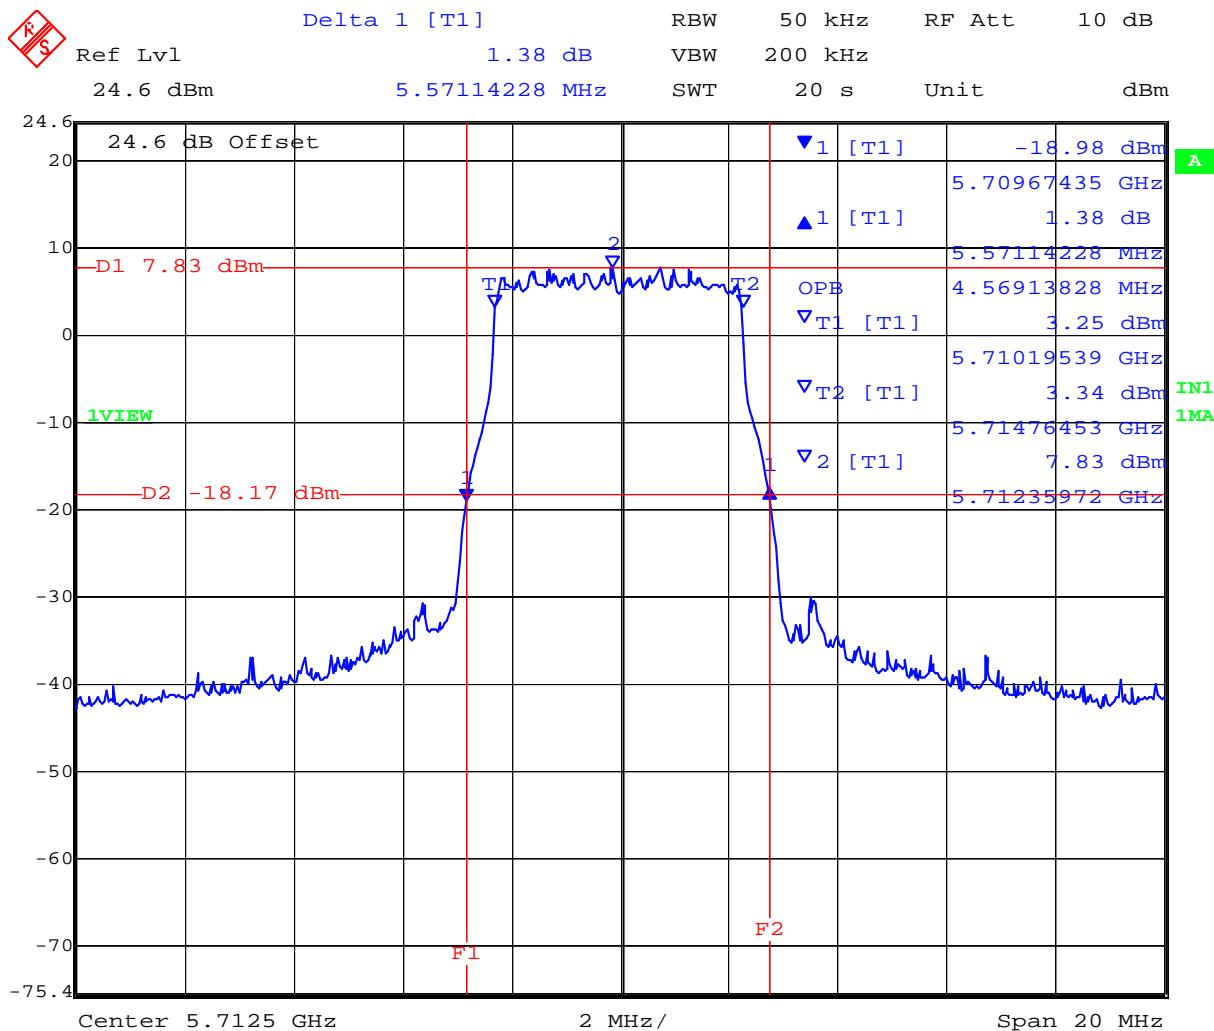


Date: 3.NOV.2008 14:51:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS –64 QAM 10 MHz BW

| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % BW (MHz) |
|------------------------|-----------------------|---------------|
| 5,485 | 11.142 | 9.210 |
| 5,597.5 | 11.062 | 9.138 |
| 5,710 | 11.142 | 9.138 |


5,485 MHz 64 QAM 10 MHz 26 dB & 99% Bandwidth

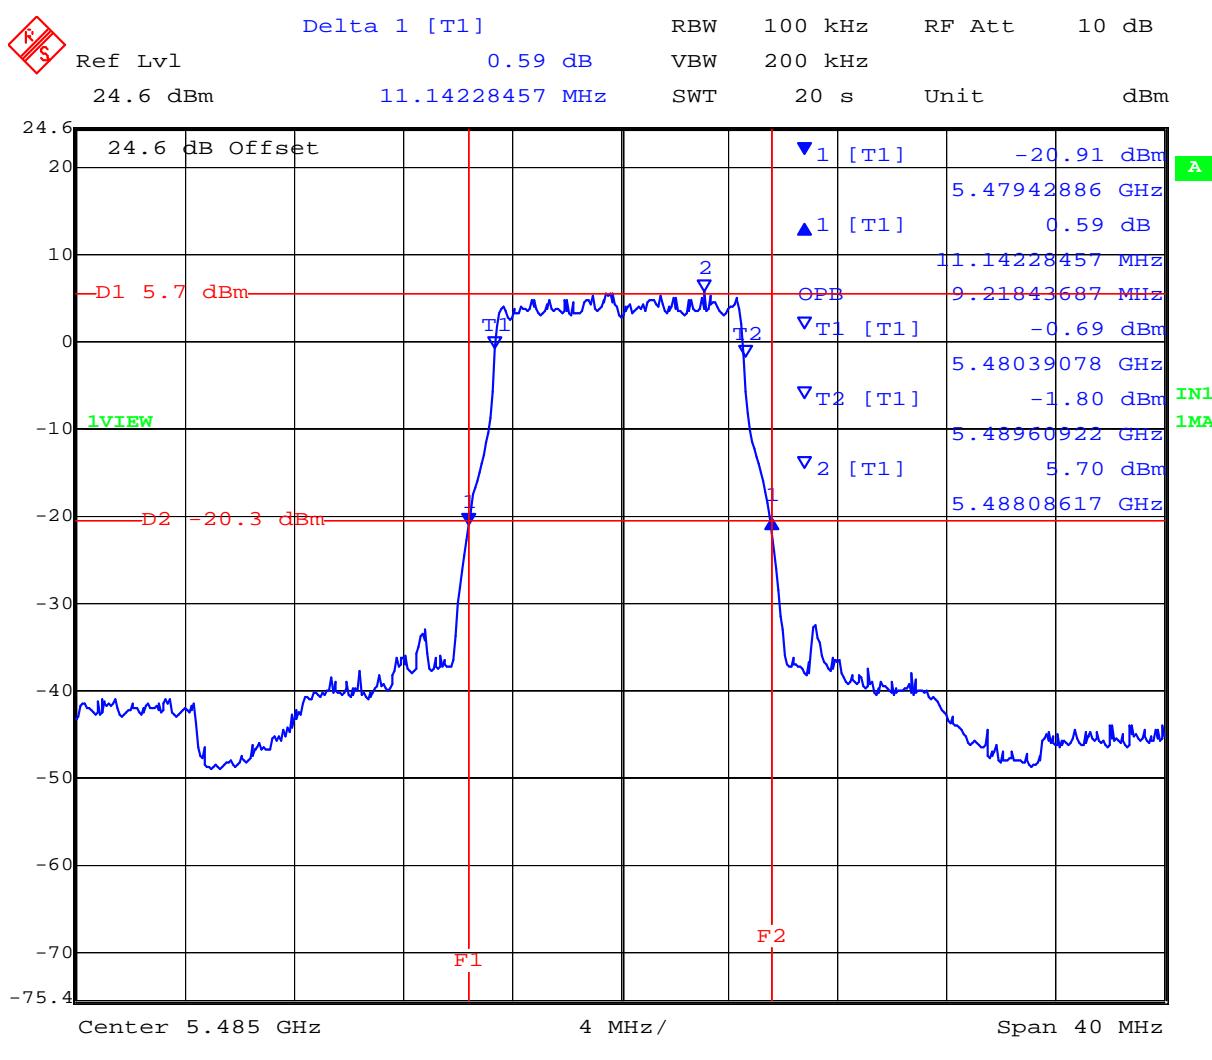

Date: 3.NOV.2008 14:54:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,597.5 MHz 64 QAM 10 MHz 26 dB & 99% Bandwidth

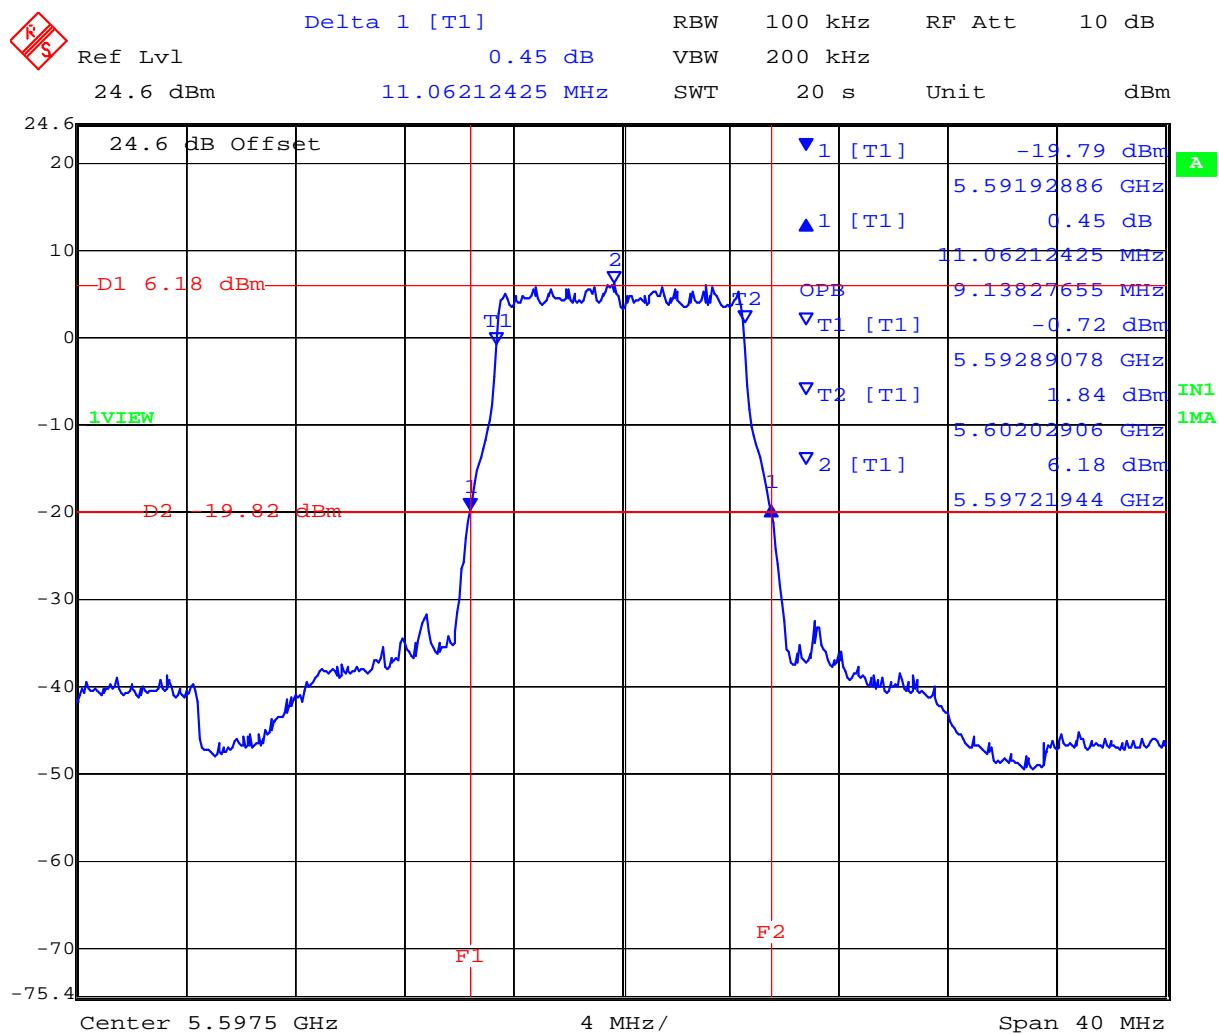

Date: 3.NOV.2008 14:57:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,710 MHz 64 QAM 10 MHz 26 dB & 99% Bandwidth


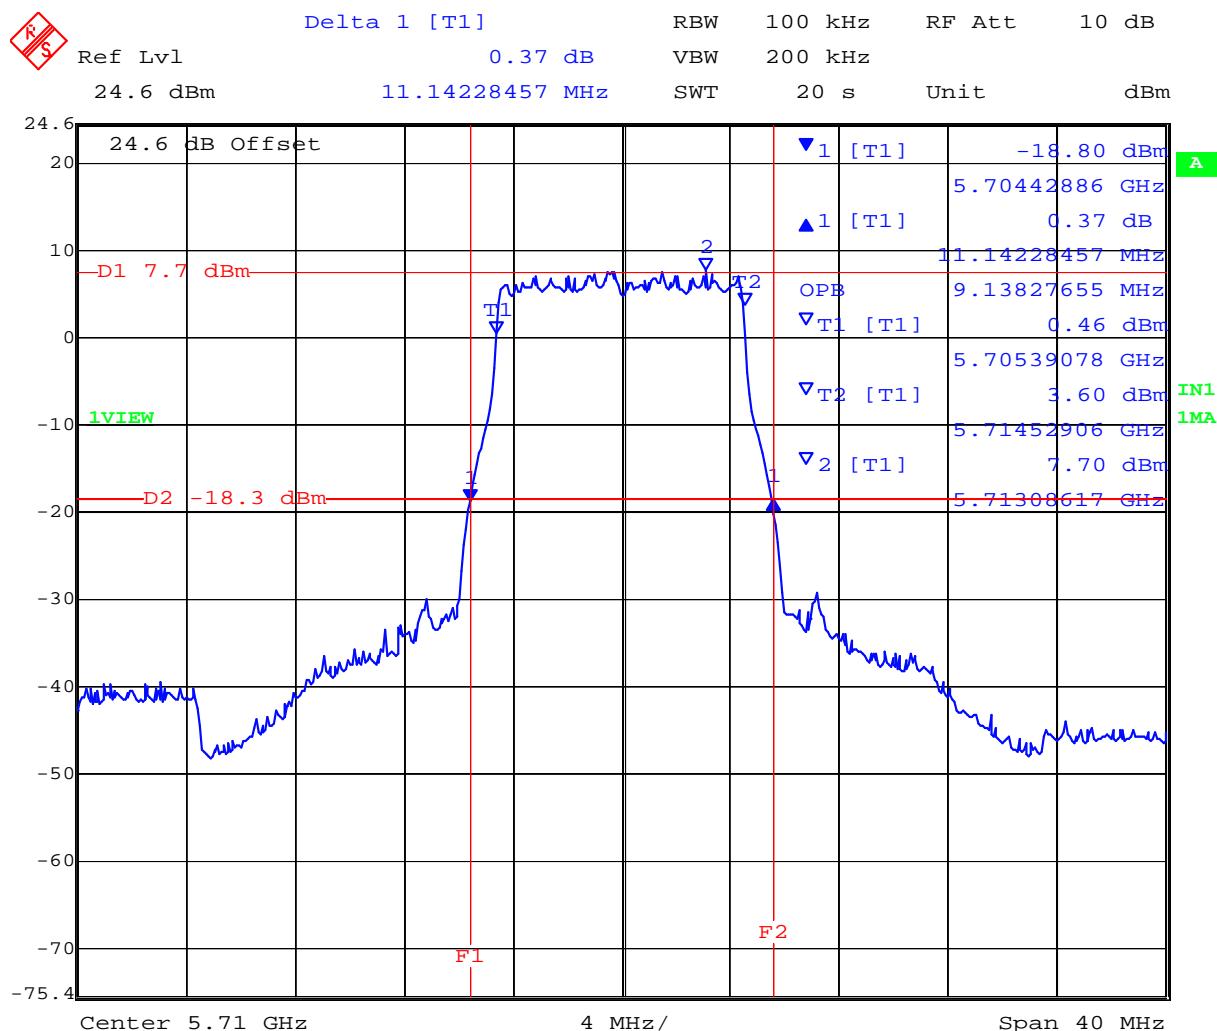


TABLE OF RESULTS – 64 QAM 15 MHz BW

| Center Frequency (MHz) | 26 dB Bandwidth (MHz) | 99 % BW (MHz) |
|------------------------|-----------------------|---------------|
| 5,487.5 | 16.834 | 13.727 |
| 5,597.5 | 16.834 | 13.727 |
| 5,707.5 | 16.834 | 13.727 |


5,487.5 MHz 64 QAM 15 MHz 26 dB & 99% Bandwidth

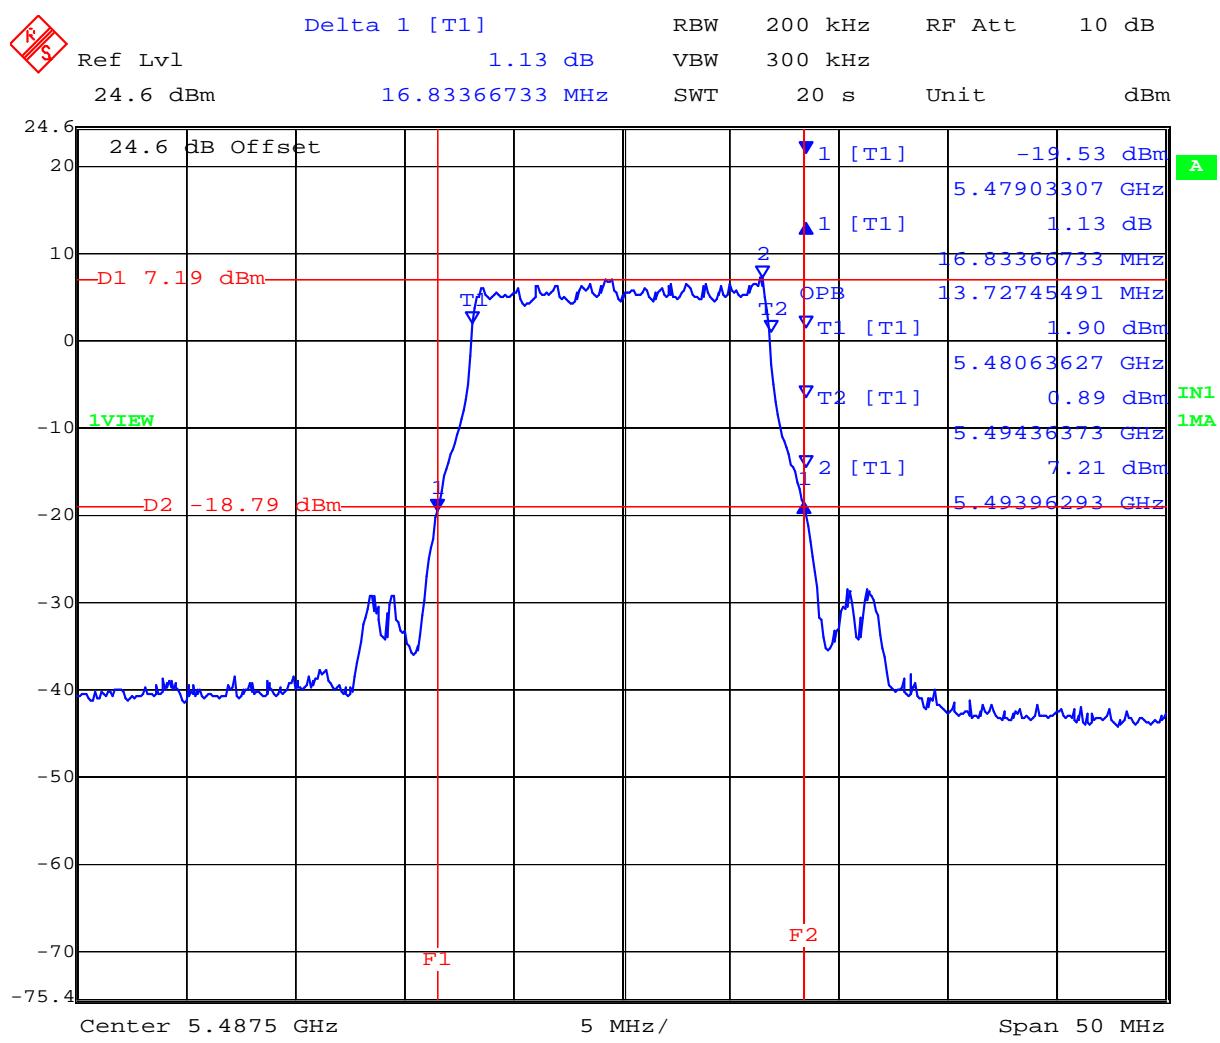

Date: 3.NOV.2008 15:09:42

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz 64 QAM 15 MHz 26 dB & 99% Bandwidth

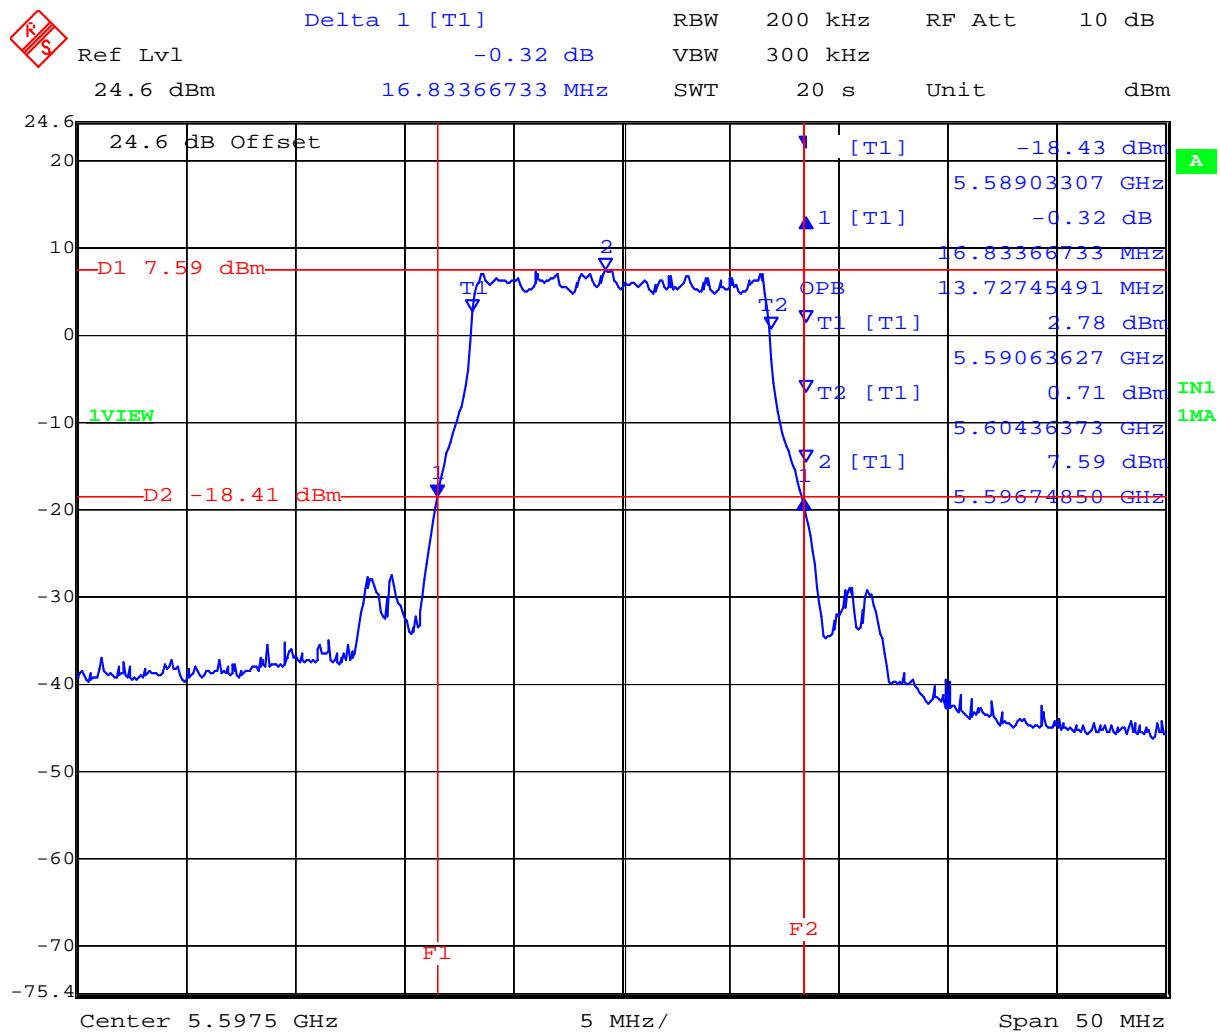

Date: 3.NOV.2008 15:12:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,707.5 MHz 64 QAM 15 MHz 26 dB & 99% Bandwidth

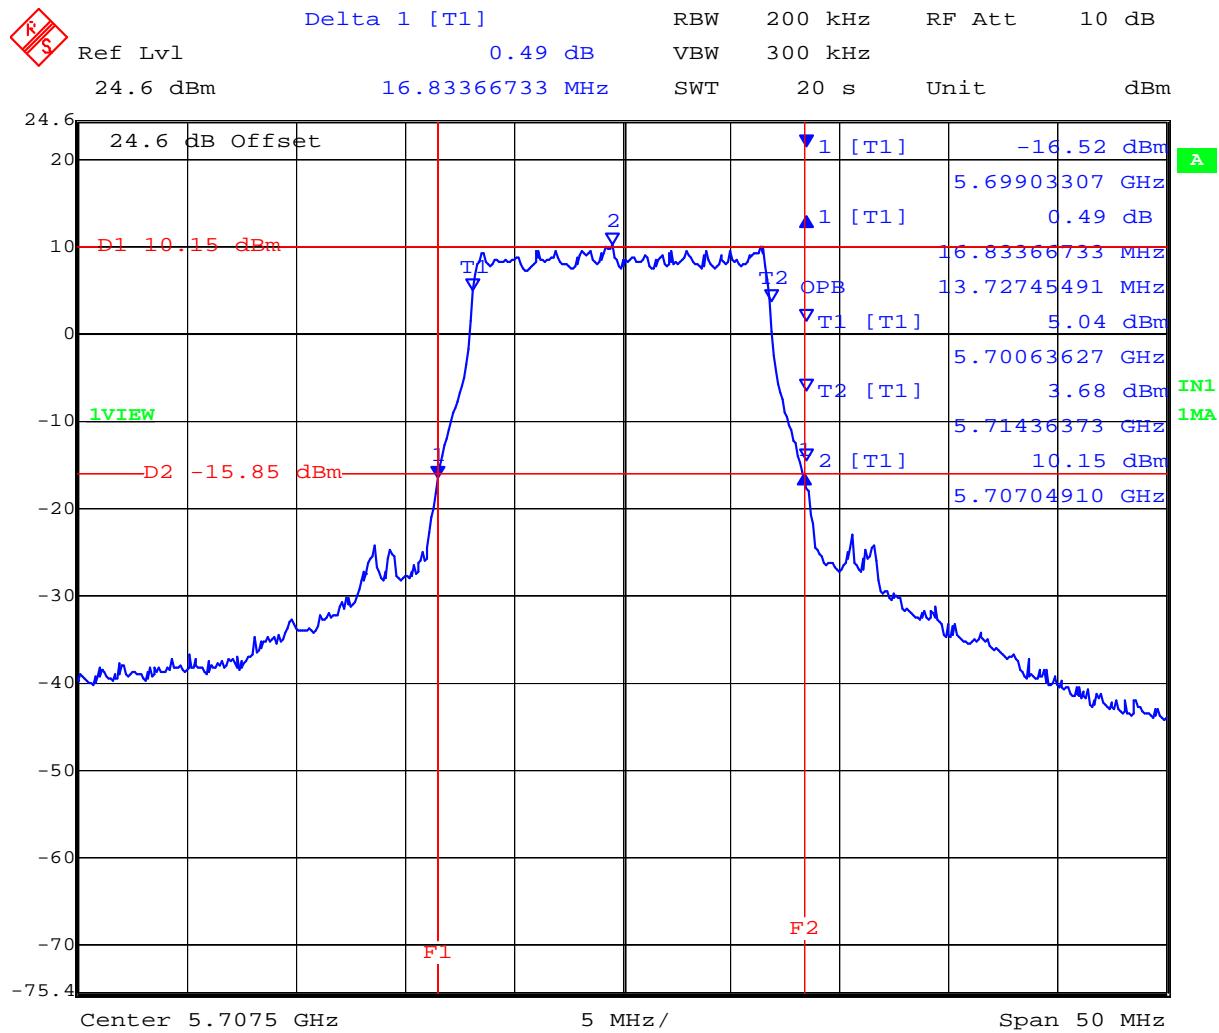

Date: 3.NOV.2008 15:20:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 34 of 126

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or +4 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or +11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Spectrum Measurement

| | |
|-------------------------|----------|
| Measurement uncertainty | ±2.81 dB |
|-------------------------|----------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 §9.9(2)
Industry Canada RSS-Gen 4.6

Test Procedure

The transmitter terminal of EUT was connected to the input of the average power meter and the spectrum analyzer. Method #2 as outlined in the FCC's Public Notice (DA 02-2138, August 30, 2002 was used to make all measurements. The results reported include all offsets due to attenuators, cable losses etc.

Test Measurement Set up

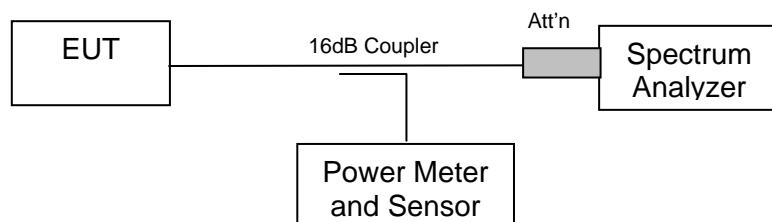

Measurement set up for Transmitter Output Power

Maximum Transmit Power, FCC Limits

Limit 5470 – 5725 MHz band; Lesser of 250 mW (+24dBm) or $11 + 10 \log (B)$ dBm

| BW (MHz) | Frequency Range (MHz) | Maximum 26 dB Bandwidth (MHz) | $11 + 10 \log (B)$ | Limit (dBm) |
|----------|-----------------------|-------------------------------|--------------------|-------------|
| 5 | 5470 - 5725 | 5.571 | +18.46 | +18.46 |
| 10 | 5470 – 5725 | 11.142 | +21.47 | +21.47 |
| 15 | 5470 - 5725 | 16.834 | +23.26 | +23.26 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 36 of 126

Industry Canada Limits

Maximum Transmit Power Industry Canada Limits

Limit 5470 – 5725; Lesser of 250 mW (+24dBm) or $11 + 10 \log (B)$ dBm

| BW (MHz) | Frequency Range (MHz) | Maximum 99% Bandwidth (MHz) | $11 + 10 \log (B)$ | Limit (dBm) |
|---------------------|----------------------------------|--|--------------------------------------|------------------------|
| 5 | 5470 - 5725 | 4.569 | +17.60 | +17.60 |
| 10 | 5470 – 5725 | 9.210 | +20.64 | +20.64 |
| 15 | 5470 - 5725 | 13.727 | +22.38 | +22.38 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 37 of 126

Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS - - 64 QAM 5 MHz BW

| Center Frequency (MHz) | Maximum Conducted Power (dBm) |
|------------------------|-------------------------------|
| 5,482.5 | +14.10 |
| 5,597.5 | +14.89 |
| 5,712.5 | +16.56 |

TABLE OF RESULTS - - 64 QAM 10 MHz BW

| Center Frequency (MHz) | Maximum Conducted Power (dBm) |
|------------------------|-------------------------------|
| 5,485 | +14.11 |
| 5,597.5 | +14.71 |
| 5,710 | +16.45 |

TABLE OF RESULTS - - 64 QAM 15 MHz BW

| Center Frequency (MHz) | Maximum Conducted Power (dBm) |
|------------------------|-------------------------------|
| 5,487.5 | +14.15 |
| 5,597.5 | +14.65 |
| 5,707.5 | +17.46 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 38 of 126

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Power Measurements

| | |
|-------------------------|----------|
| Measurement uncertainty | ±1.33 dB |
|-------------------------|----------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-01 'Measuring RF Output Power' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)


Test Procedure

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (x) in Section 2.1 'References and Measurement Uncertainty');

"Measurement Procedure Updated for Peak Transmit Power in the Unlicensed National Information Infrastructure (U-NII) Bands."

was used to determine the peak power spectral density of the emission. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

Test Measurement Set up

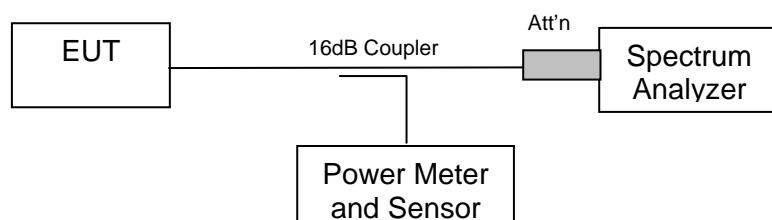

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.


Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 64 QAM 5 MHz BW

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) | Limit (dBm) |
|------------------------|----------------------|------------|-------------|
| 5,482.5 | 5481.31764 | +7.29 | +11 |
| 5,597.5 | 5596.75852 | +7.54 | +11 |
| 5,712.5 | 5711.55812 | +9.54 | +11 |


5,482.5 MHz 64 QAM 5 MHz BW Peak Power Spectral Density

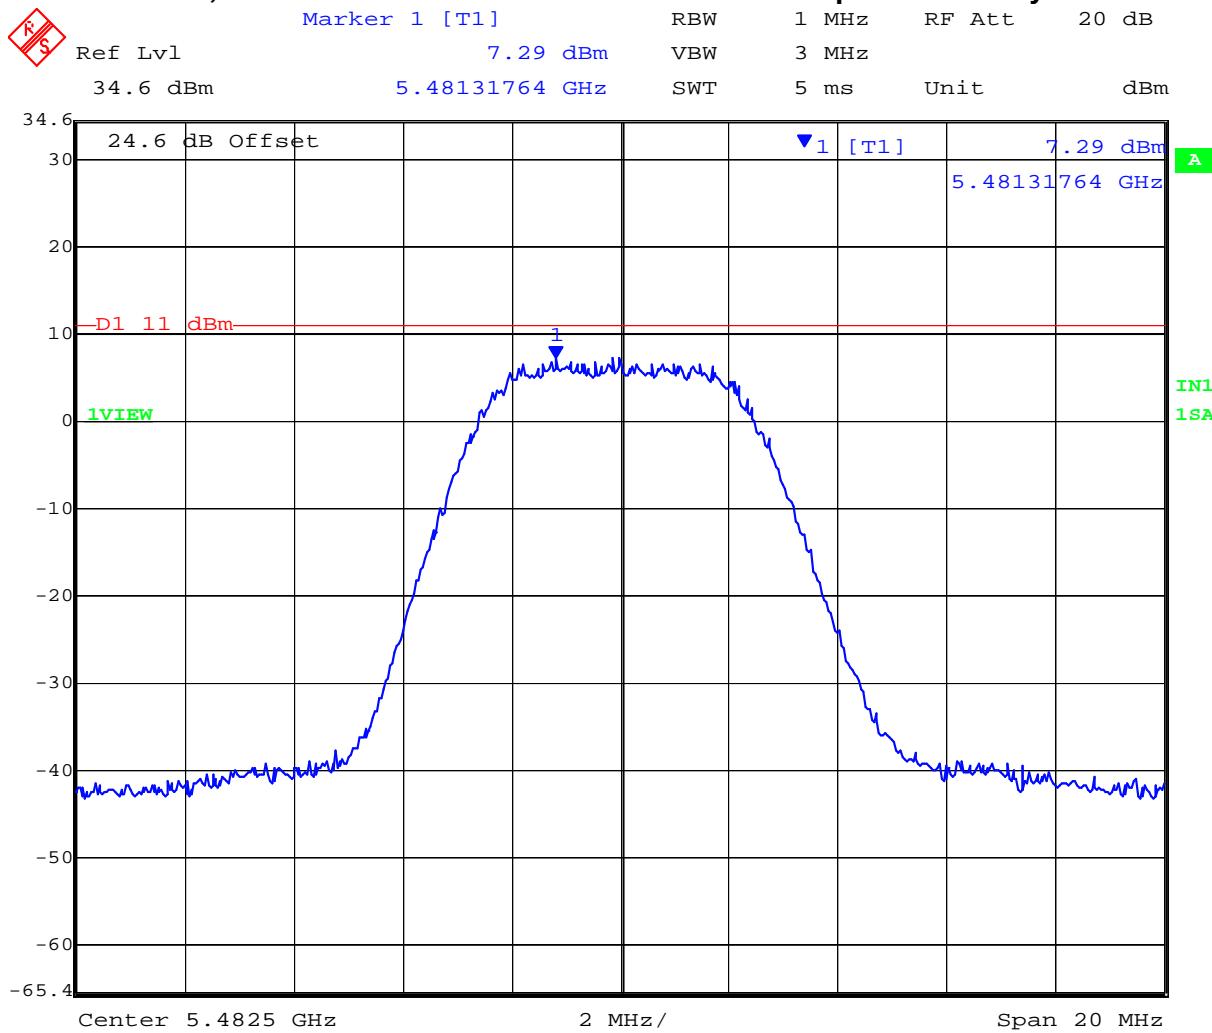

Date: 3.NOV.2008 15:26:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz - 64 QAM 5 MHz BW Peak Power Spectral Density

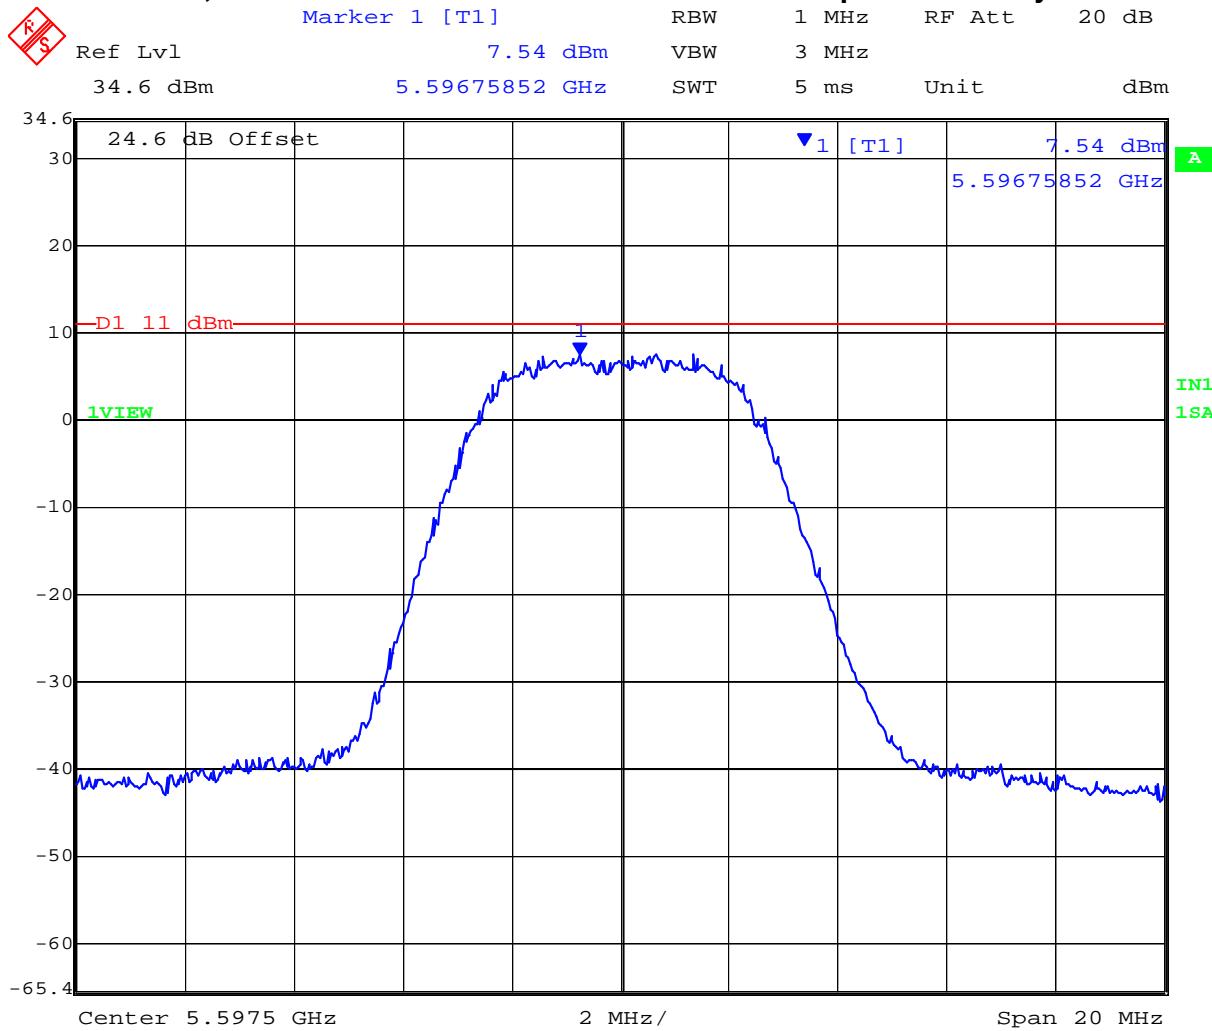

Date: 3.NOV.2008 15:28:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,712.5 MHz 64 QAM 5 MHz BW Peak Power Spectral Density

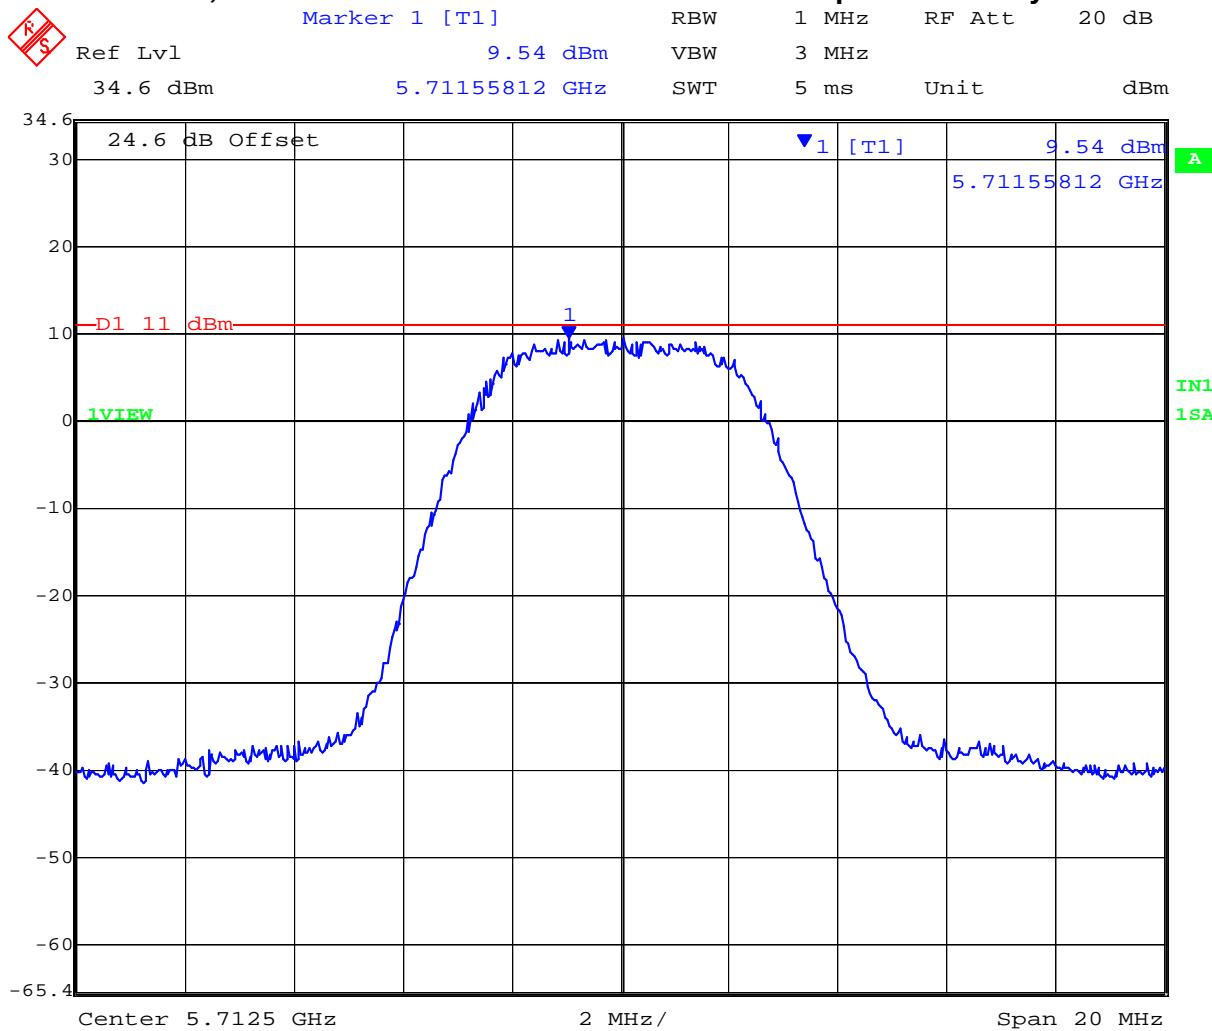


Date: 3.NOV.2008 15:30:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS - - 64 QAM 10 MHz BW


| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) | Limit (dBm) |
|------------------------|----------------------|------------|-------------|
| 5,485 | 5484.47896 | +4.32 | +11 |
| 5,597.5 | 5596.65832 | +5.00 | +11 |
| 5,710 | 5709.63928 | +6.38 | +11 |

5,485 MHz 64 QAM 10 MHz BW Peak Power Spectral Density

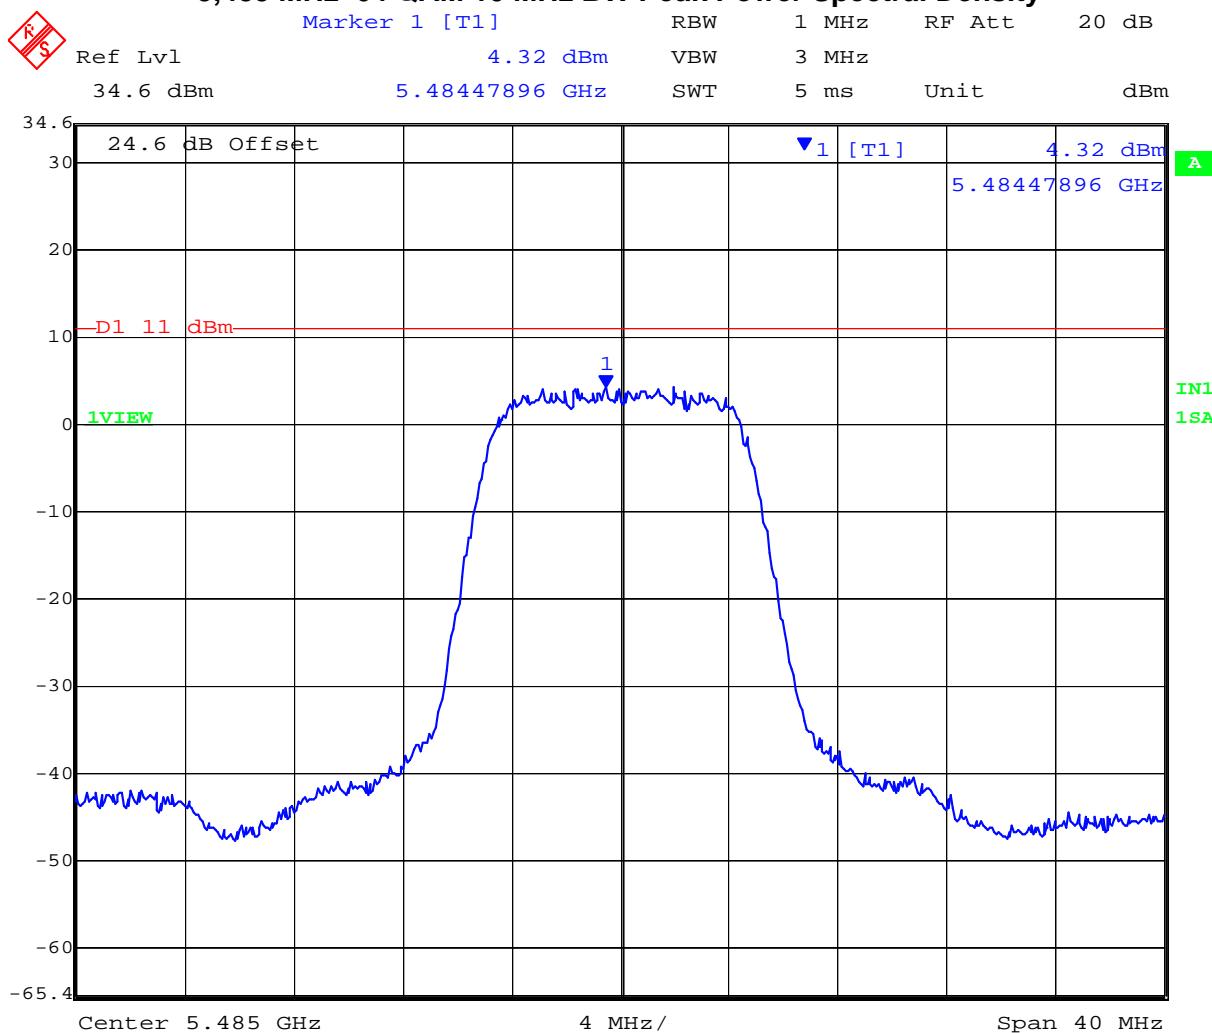

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz - 64 QAM 10 MHz BW Peak Power Spectral Density

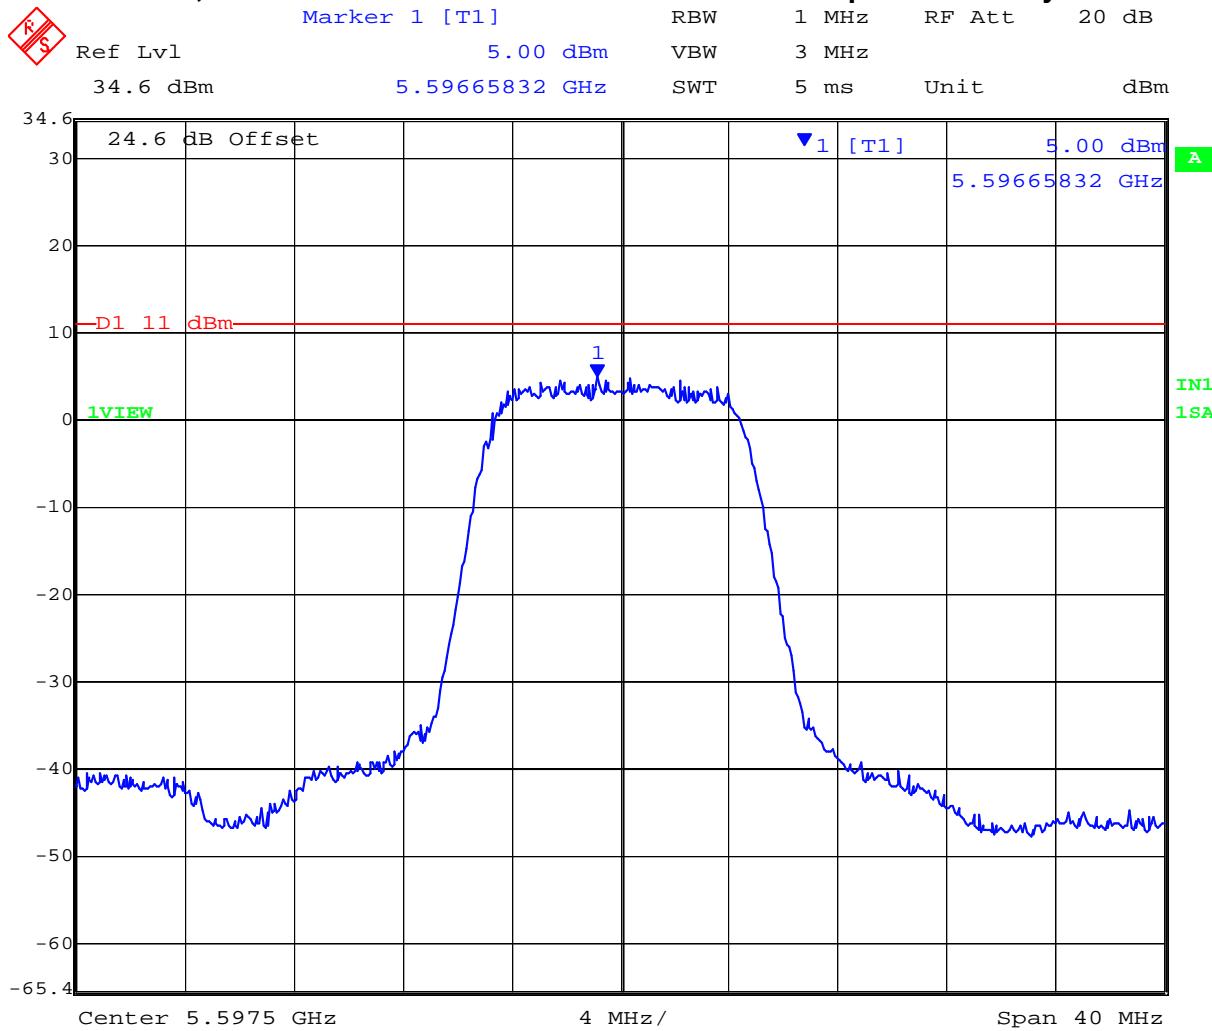

Date: 3.NOV.2008 15:35:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,710 MHz 64 QAM 10 MHz BW Peak Power Spectral Density

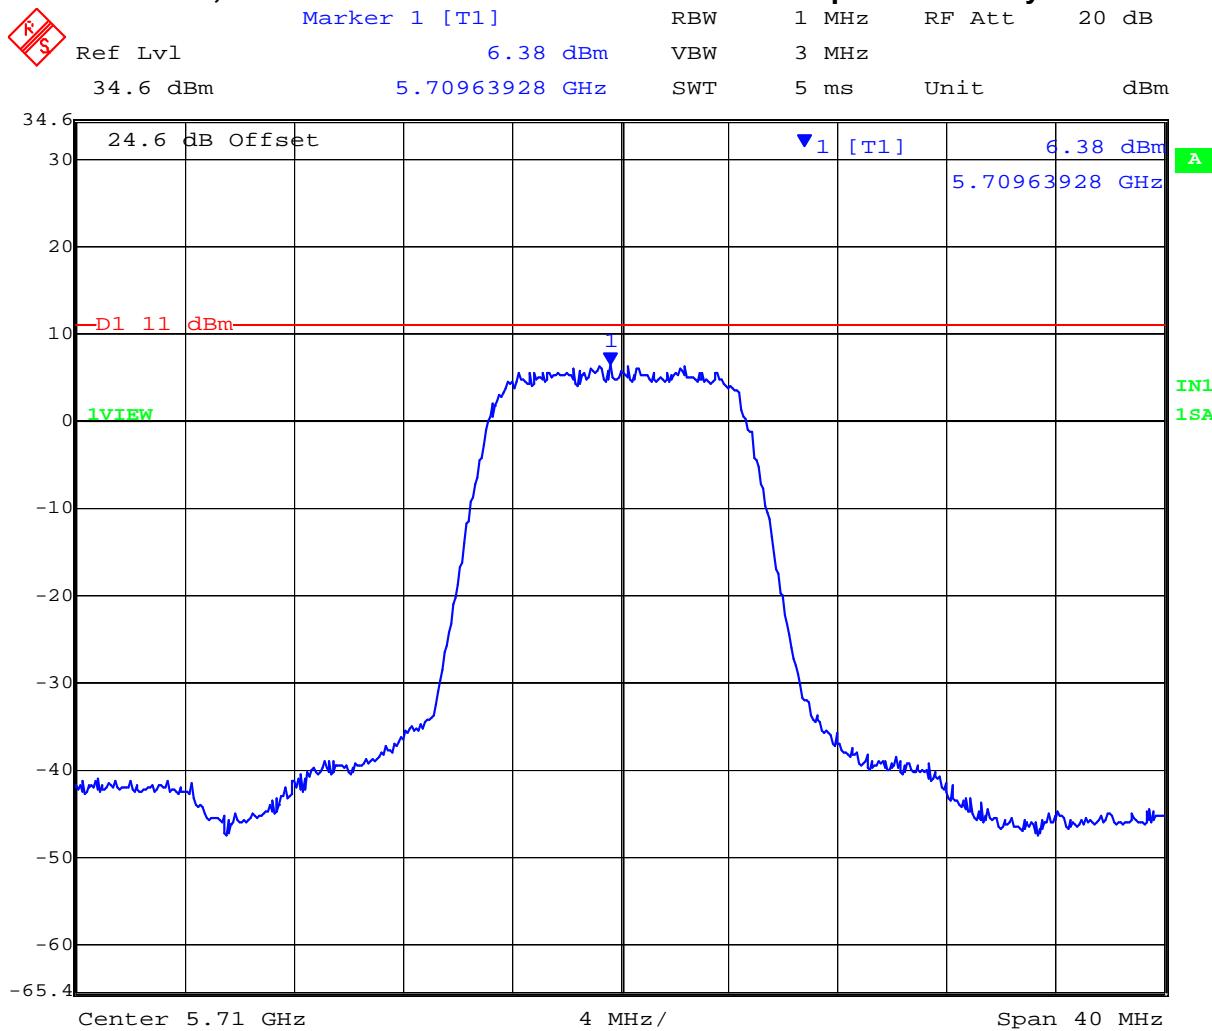


Date: 3.NOV.2008 15:37:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS -- 64 QAM 15 MHz BW

| Center Frequency (MHz) | Peak Frequency (MHz) | PPSD (dBm) | Limit (dBm) |
|------------------------|----------------------|------------|-------------|
| 5,487.5 | 5492.86072 | +2.75 | +11 |
| 5,597.5 | 5600.45591 | +2.80 | +11 |
| 5,707.5 | 5706.94890 | +5.45 | +11 |


5,487.5 MHz - 64 QAM 15 MHz BW Peak Power Spectral Density

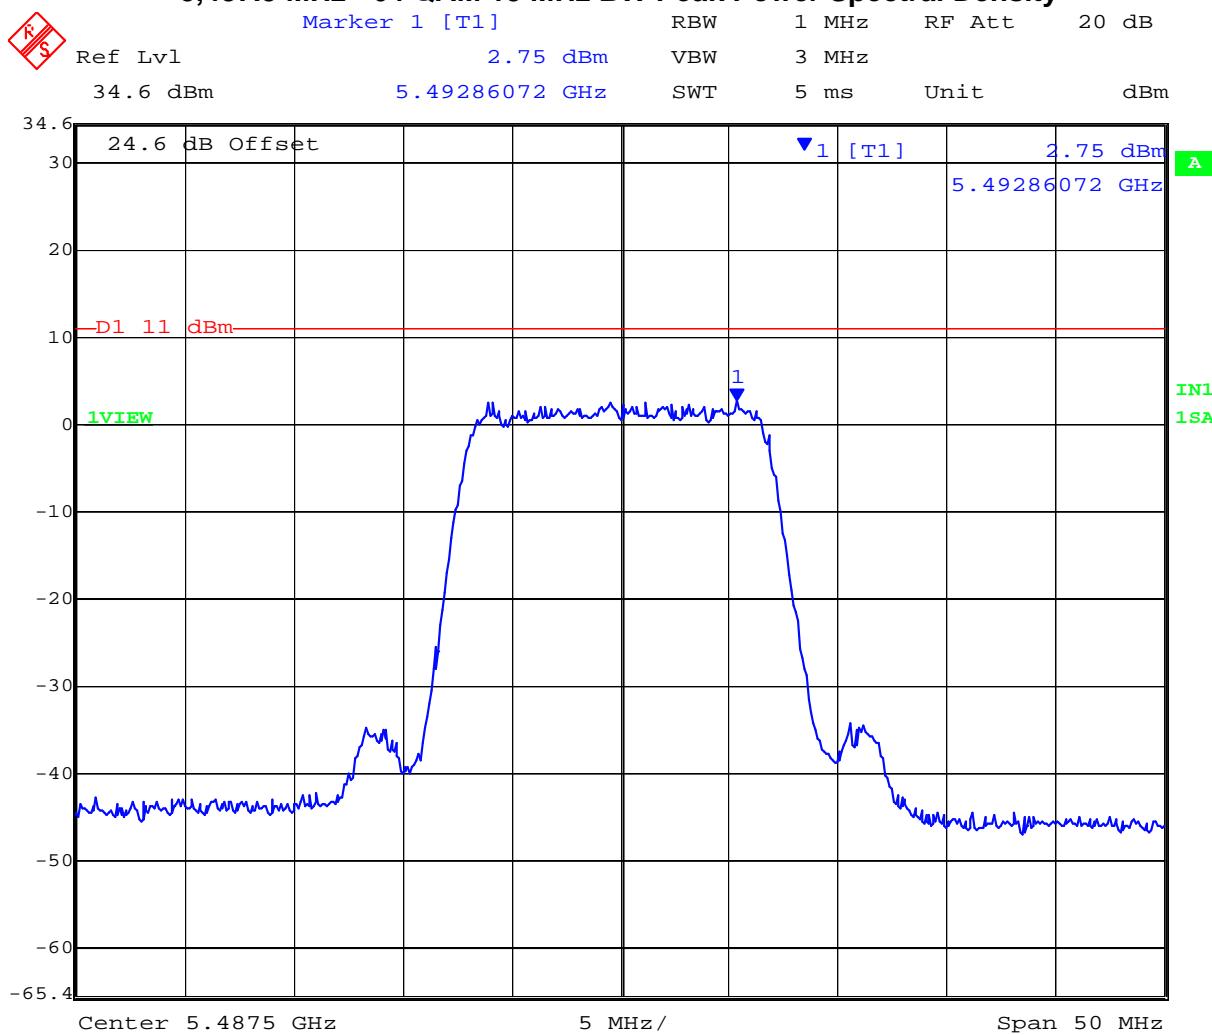

Date: 3.NOV.2008 15:56:09


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,597.5 MHz - 64 QAM 15 MHz BW Peak Power Spectral Density

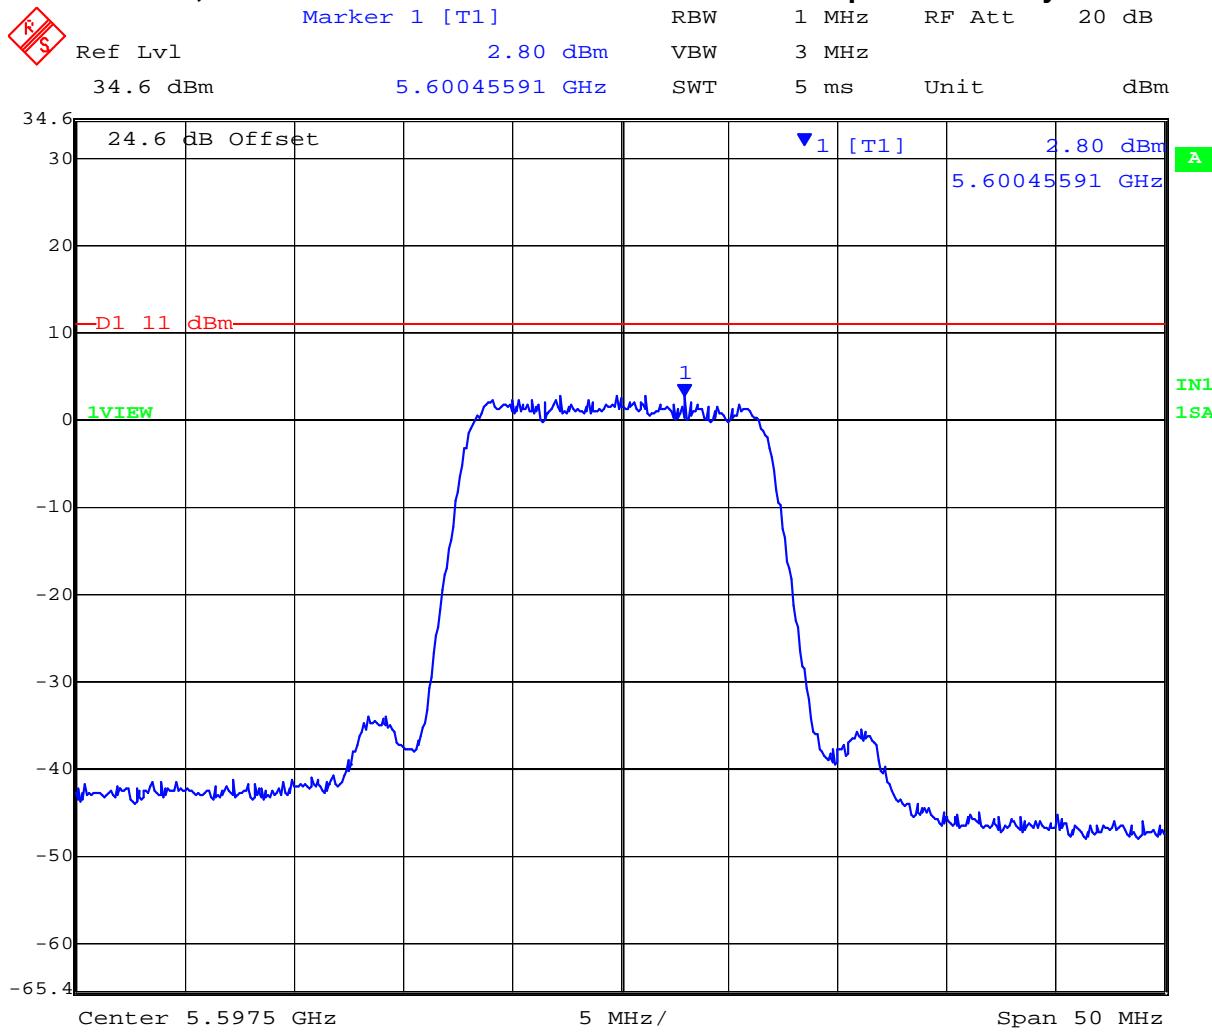

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,707.5 MHz 64 QAM 15 MHz BW Peak Power Spectral Density

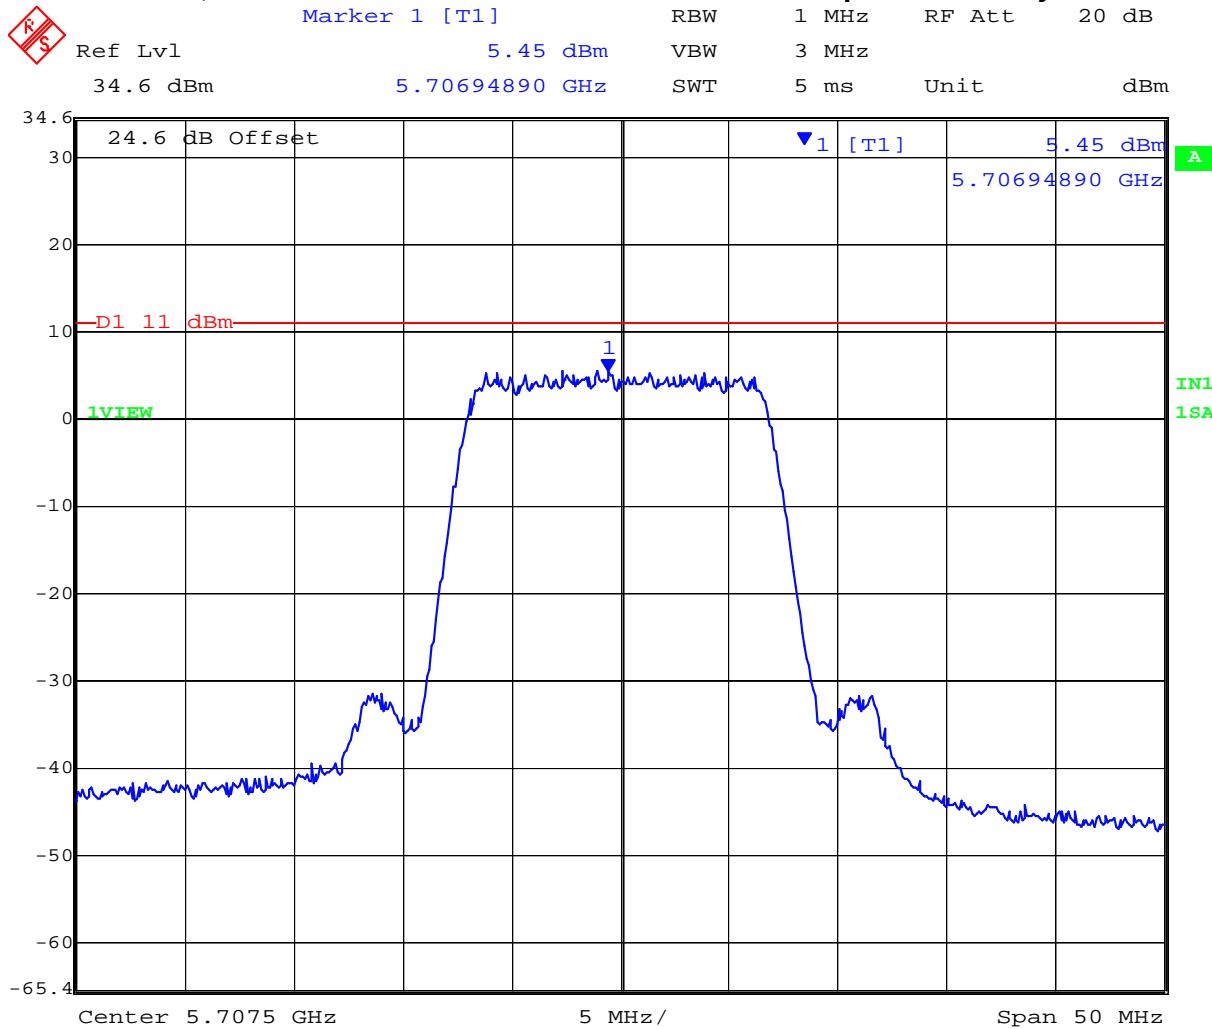

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 49 of 126

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

§ A9.2(1) The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

§ A9.2(2) The power spectral density shall not exceed +11 dBm in any 1 MHz band

Laboratory Measurement Uncertainty for Spectral Density

| | |
|-------------------------|----------|
| Measurement uncertainty | ±1.33 dB |
|-------------------------|----------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-01 'Measuring RF Output Power' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.4. Peak Excursion Ratio

FCC, Part 15 Subpart C §15.407(a)(6)

Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 "Measurement Procedure Updated for Peak Transmit Power in the UNII Bands" was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

Test Measurement Set up

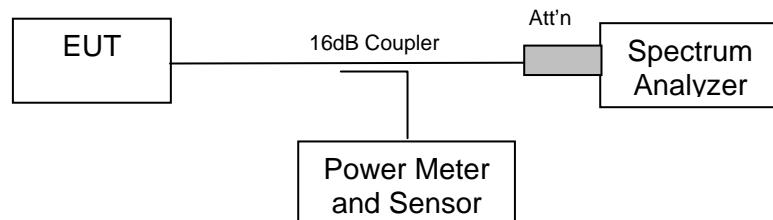

Measurement set up for Peak Excursion Ratio

Measurement Results for Peak Excursion Ratio


Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

TABLE OF RESULTS -- 64 QAM 5 MHz BW

| Centre Frequency (MHz) | Peak Excursion Ratio (dB) | Limit (dB) |
|------------------------|---------------------------|------------|
| 5,482.5 | 10.60 | 13.0 |
| 5,597.5 | 11.51 | 13.0 |
| 5,712.5 | 11.19 | 13.0 |


5,482.5 MHz - 64 QAM 5 MHz BW Peak Excursion Ratio

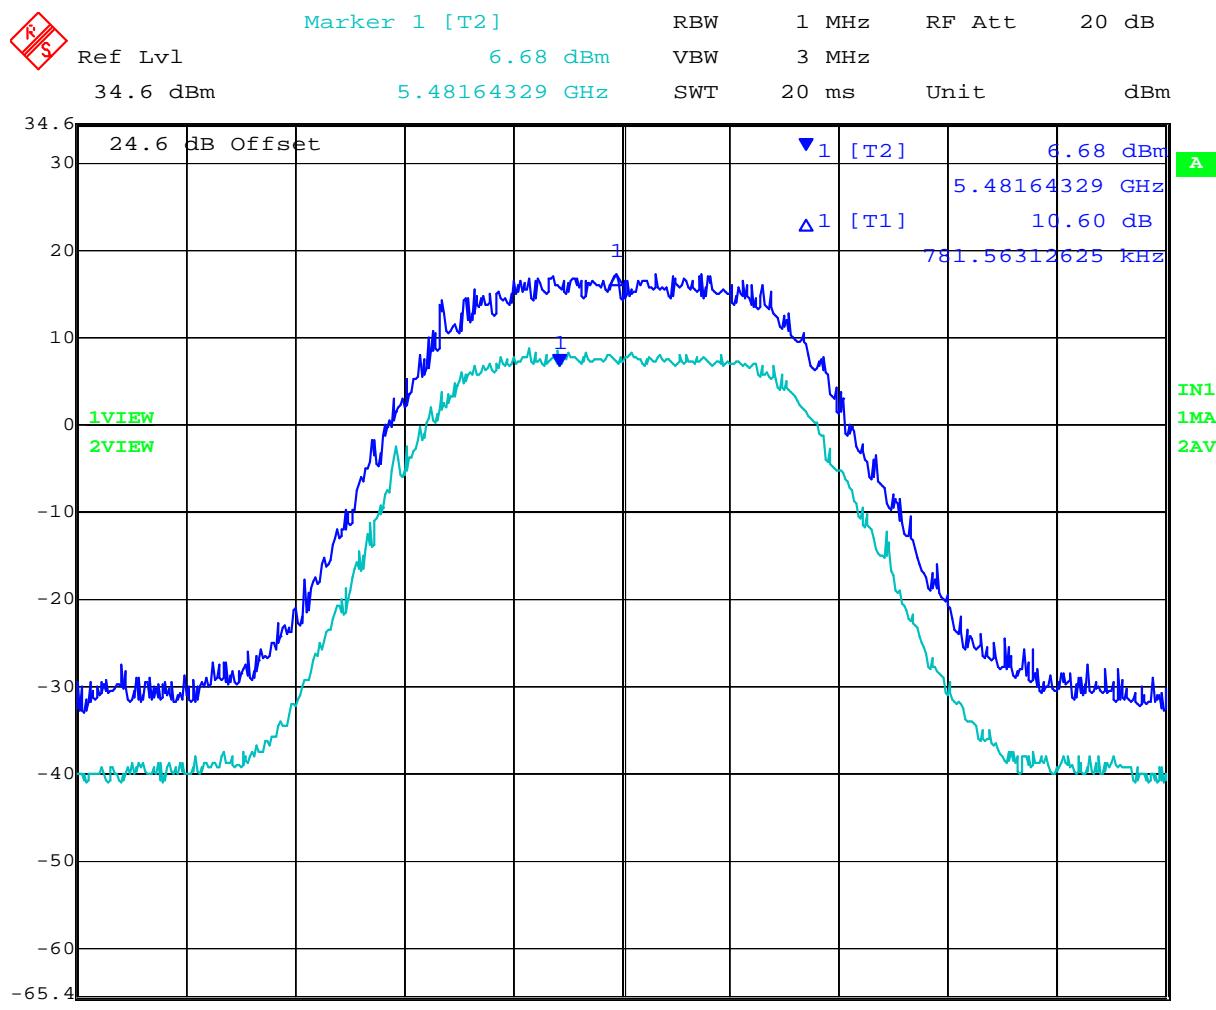

Date: 3.NOV.2008 16:20:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz - 64 QAM 5 MHz BW Peak Excursion Ratio

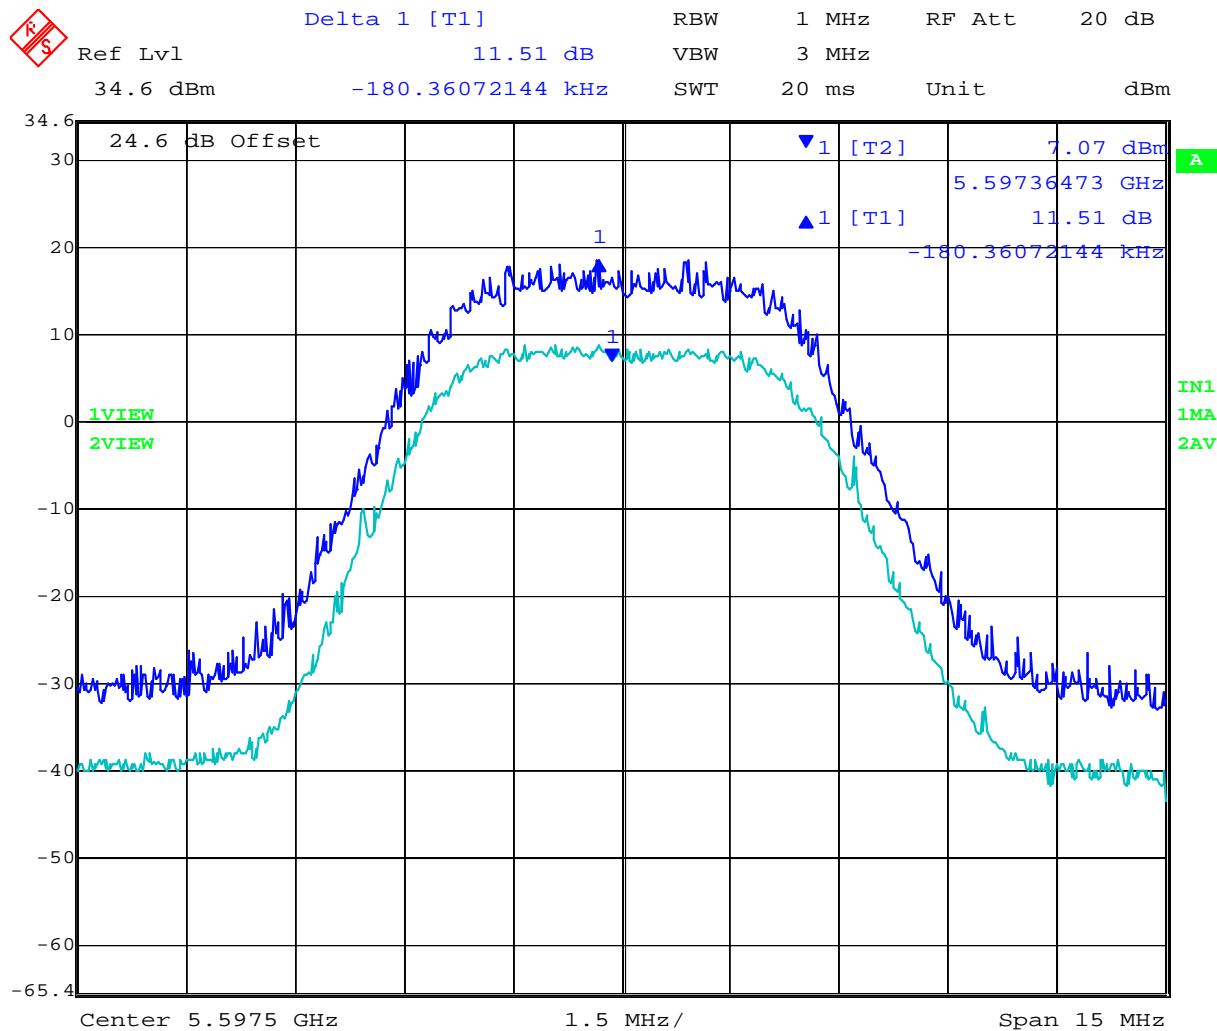

Date: 3.NOV.2008 16:22:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,712.5 MHz - 64 QAM 5 MHz BW Peak Excursion Ratio

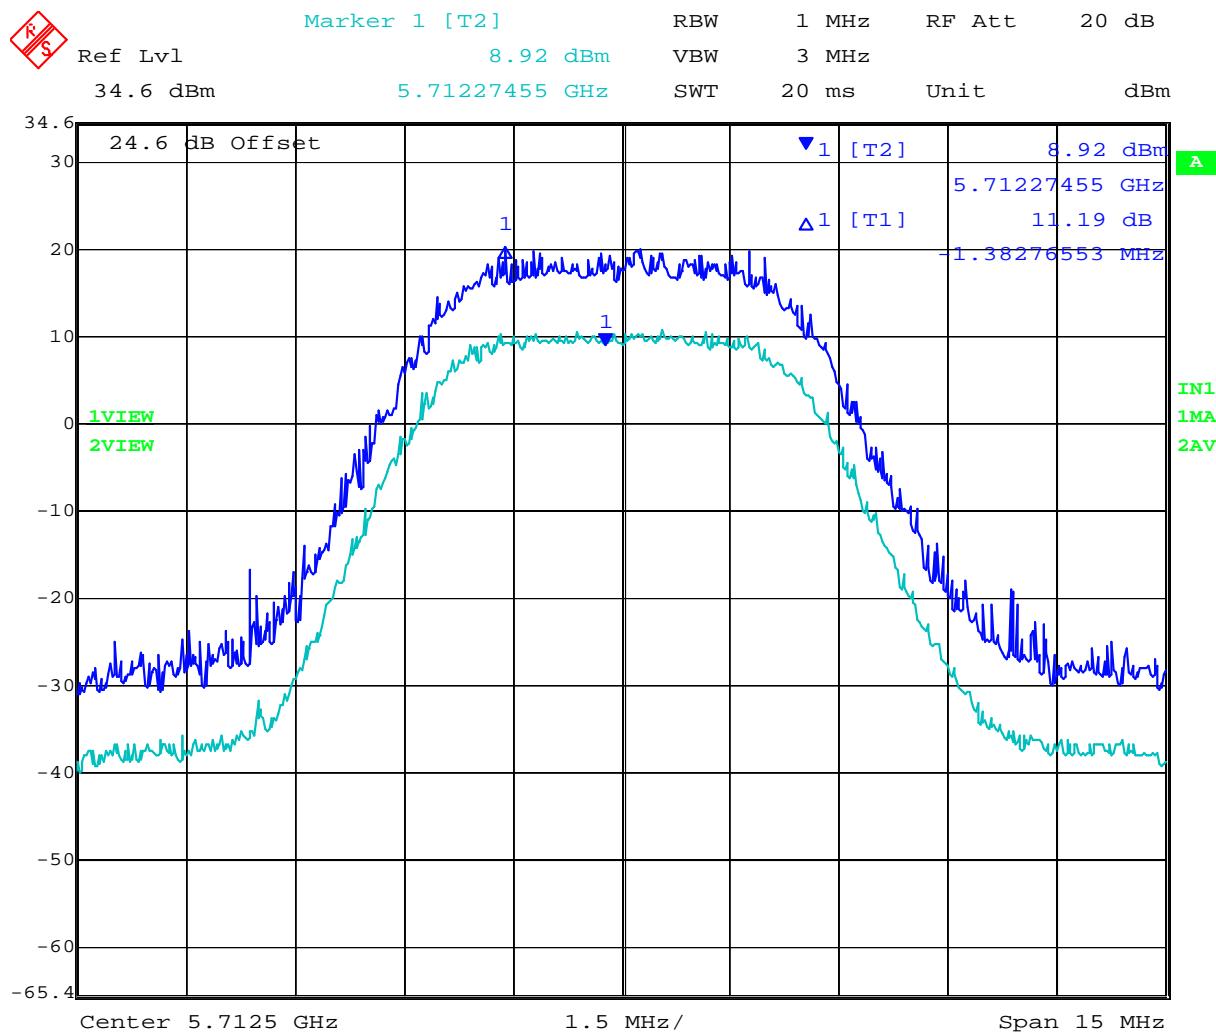


Date: 3.NOV.2008 16:23:31

This test report may be reproduced in full only. The document may only be updated by MiCOM
 Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 64 QAM 10 MHz BW


| Centre Frequency (MHz) | Peak Excursion Ratio (dB) | Limit (dB) |
|------------------------|---------------------------|------------|
| 5,485 | 11.64 | 13.0 |
| 5,597.5 | 12.42 | 13.0 |
| 5,710 | 11.42 | 13.0 |

5,485 MHz - 64 QAM 10 MHz BW Peak Excursion Ratio

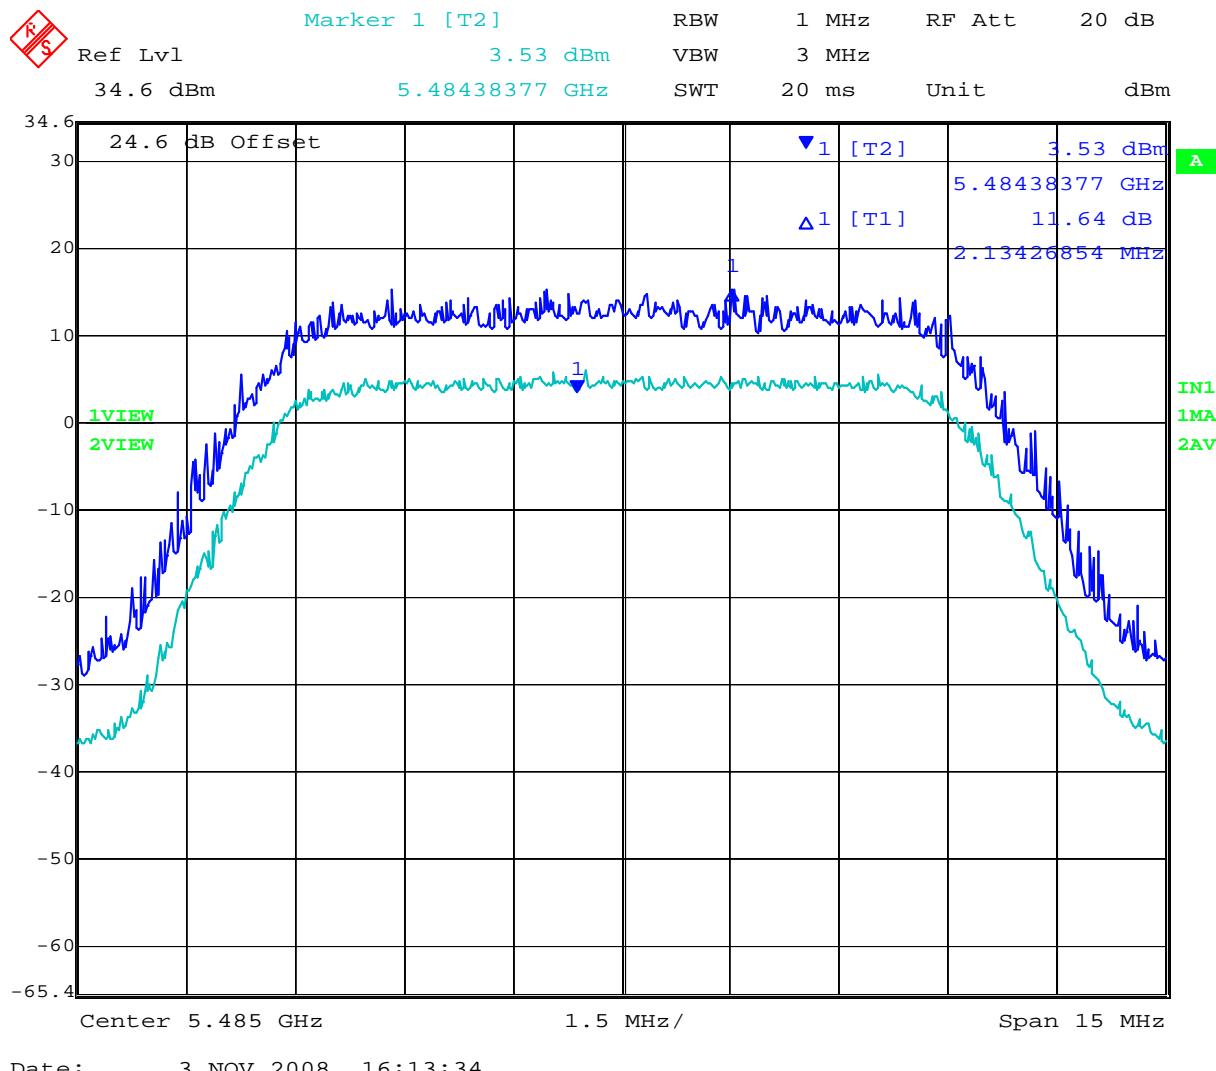

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz - 64 QAM 10 MHz BW Peak Excursion Ratio

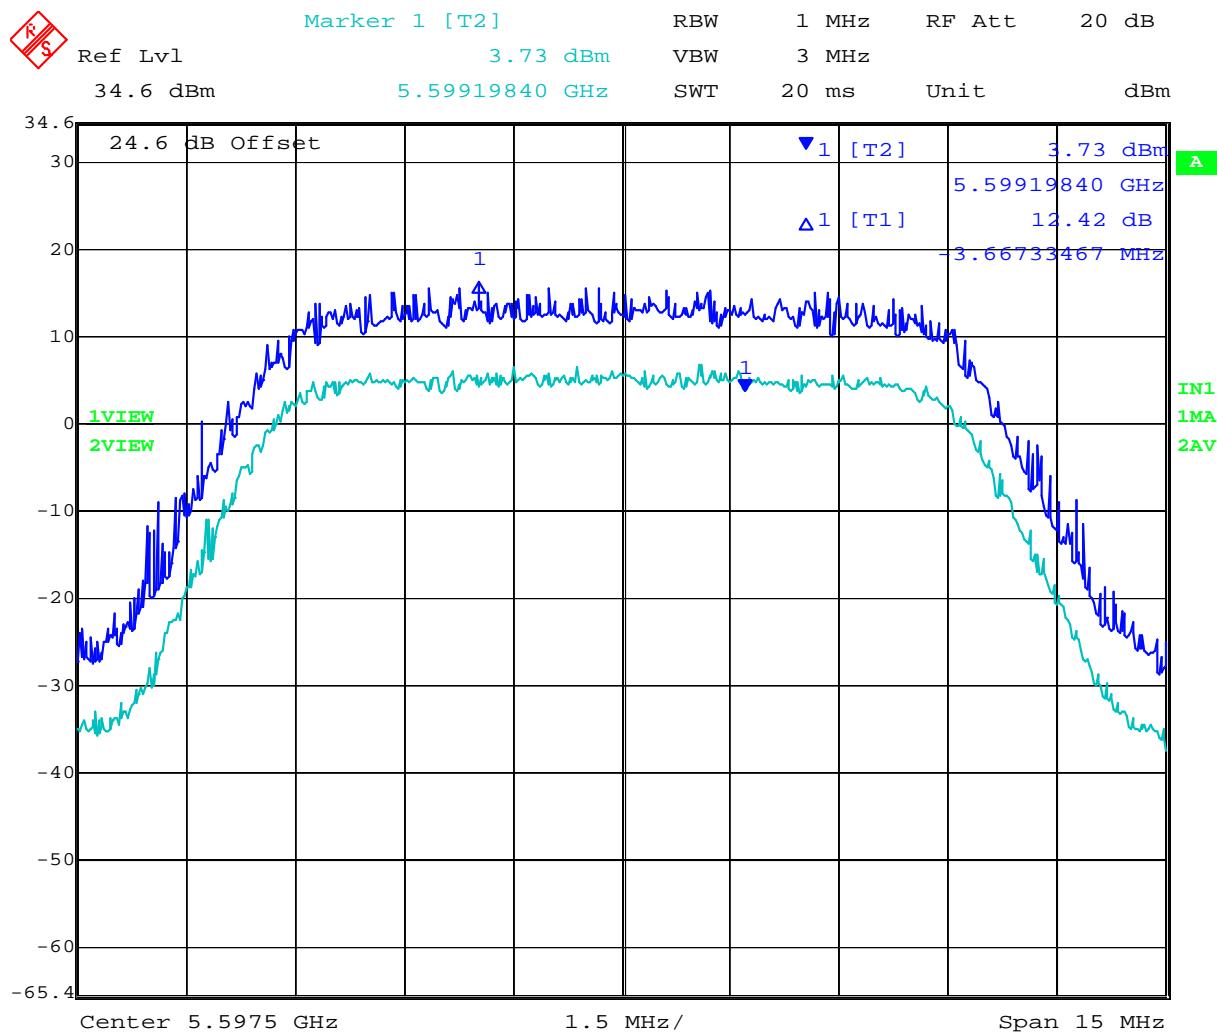

Date: 3.NOV.2008 16:16:24

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,710 MHz - 64 QAM 10 MHz BW Peak Excursion Ratio

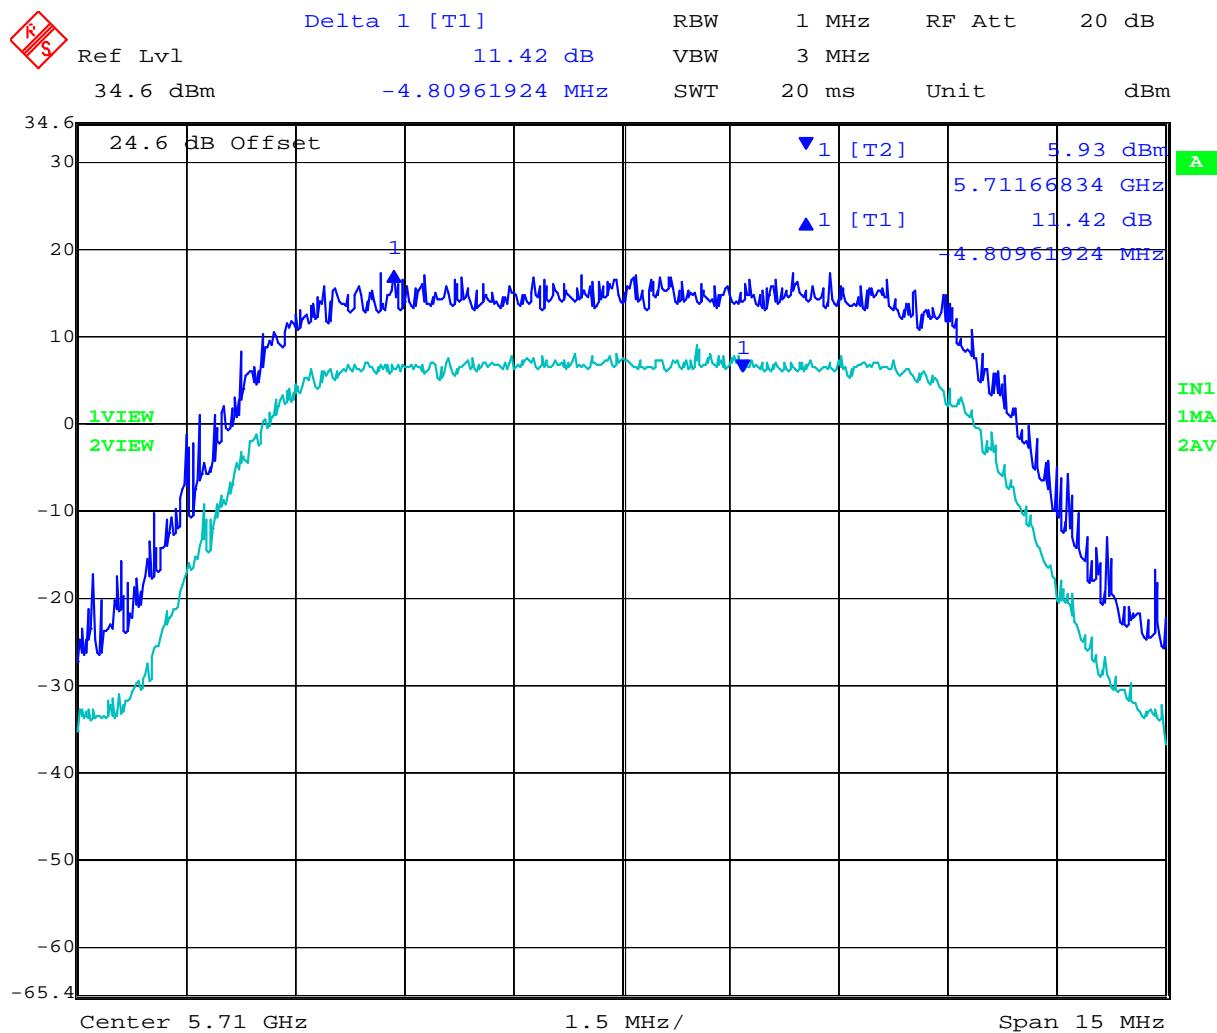


Date: 3.NOV.2008 16:18:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS - - 64 QAM 15 MHz BW

| Centre Frequency (MHz) | Peak Excursion Ratio (dB) | Limit (dB) |
|------------------------|---------------------------|------------|
| 5,487.5 | 12.43 | 13.0 |
| 5,597.5 | 11.67 | 13.0 |
| 5,707.5 | 11.99 | 13.0 |


5,487.5 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

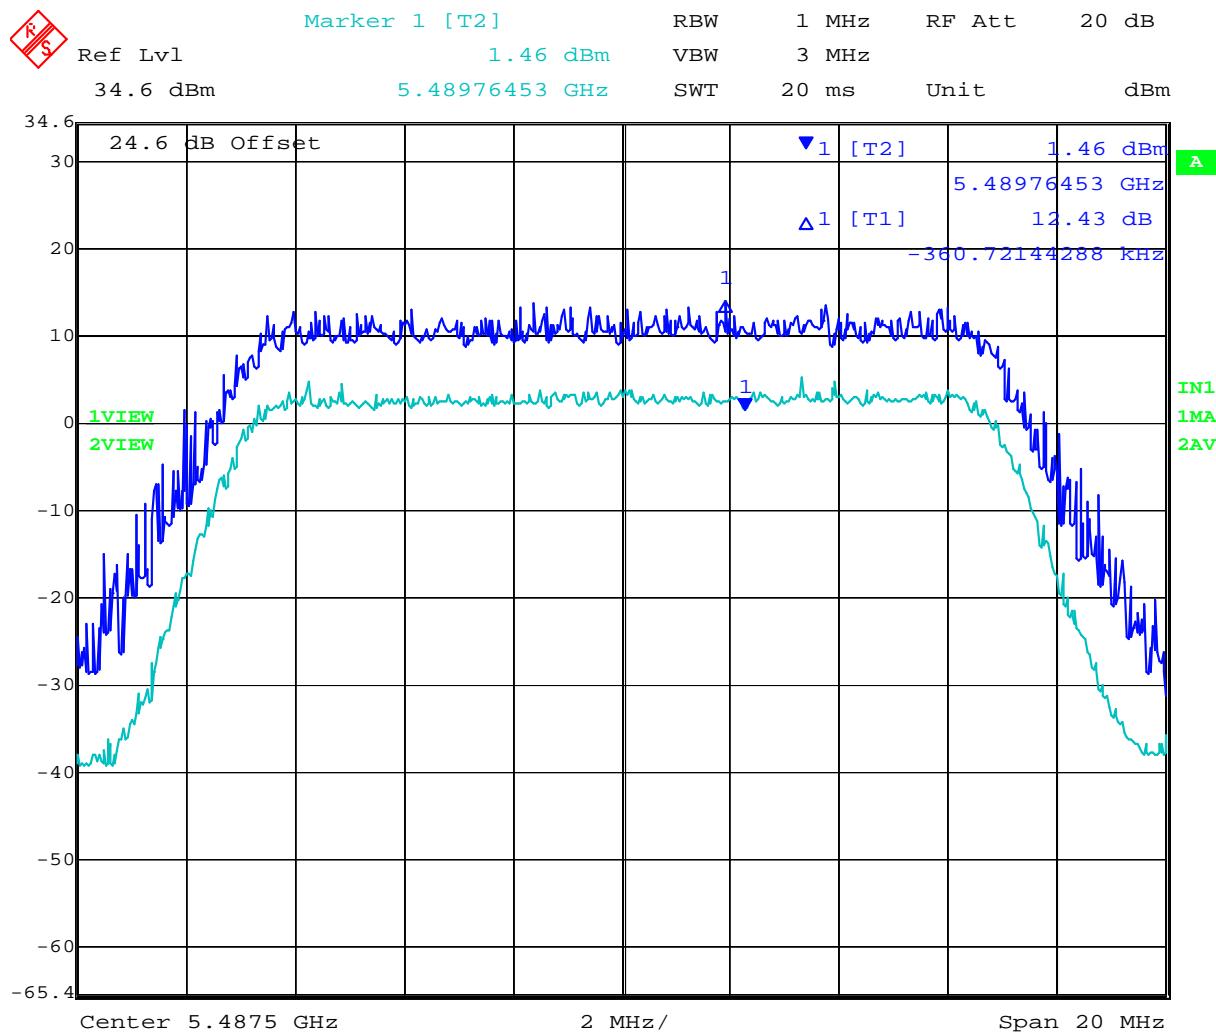

Date: 3.NOV.2008 16:10:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5,597.5 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

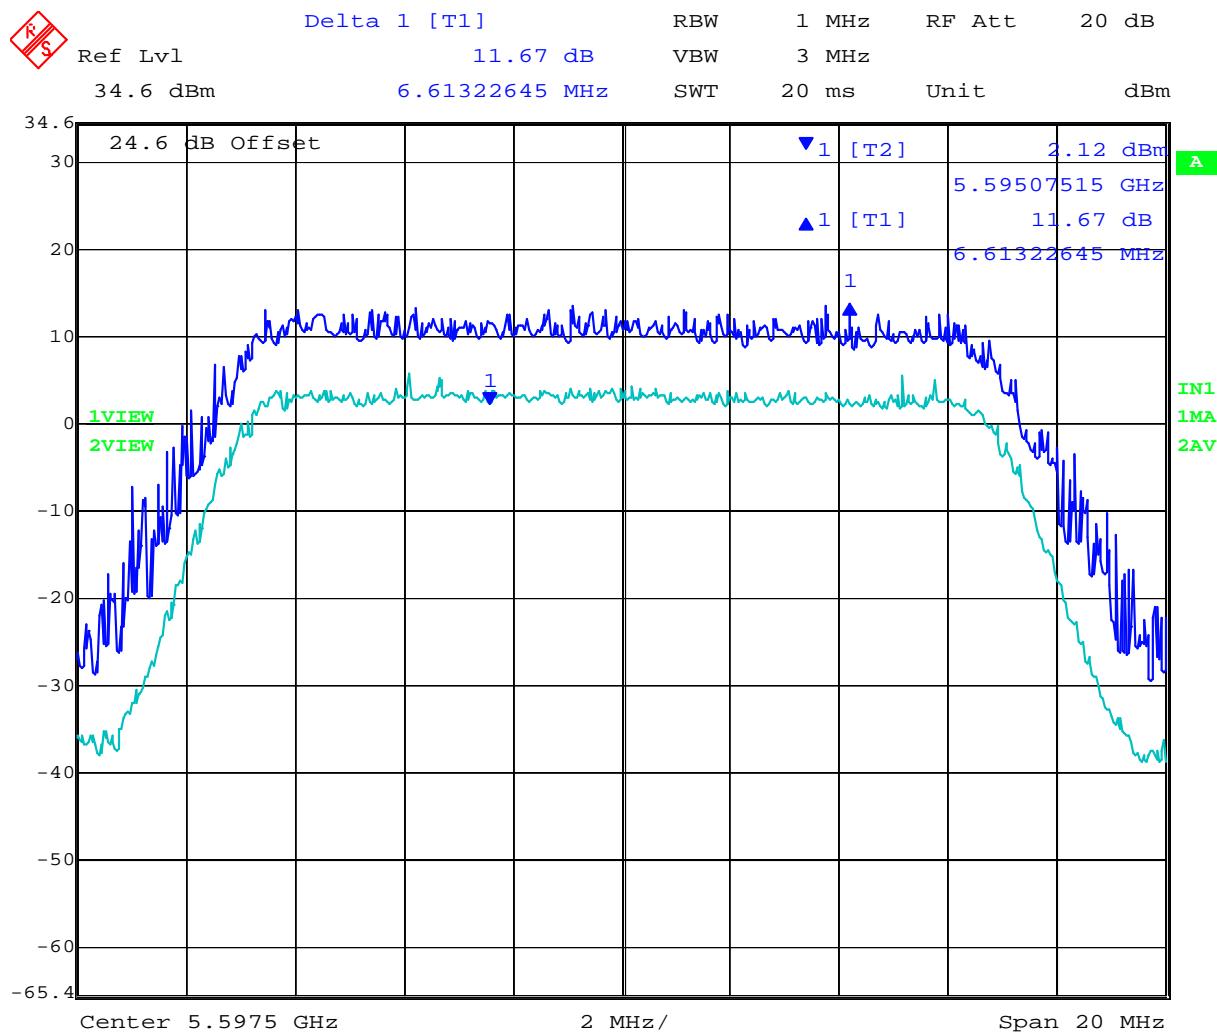

Date: 3.NOV.2008 16:08:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,707.5 MHz - 64 QAM 15 MHz BW Peak Excursion Ratio

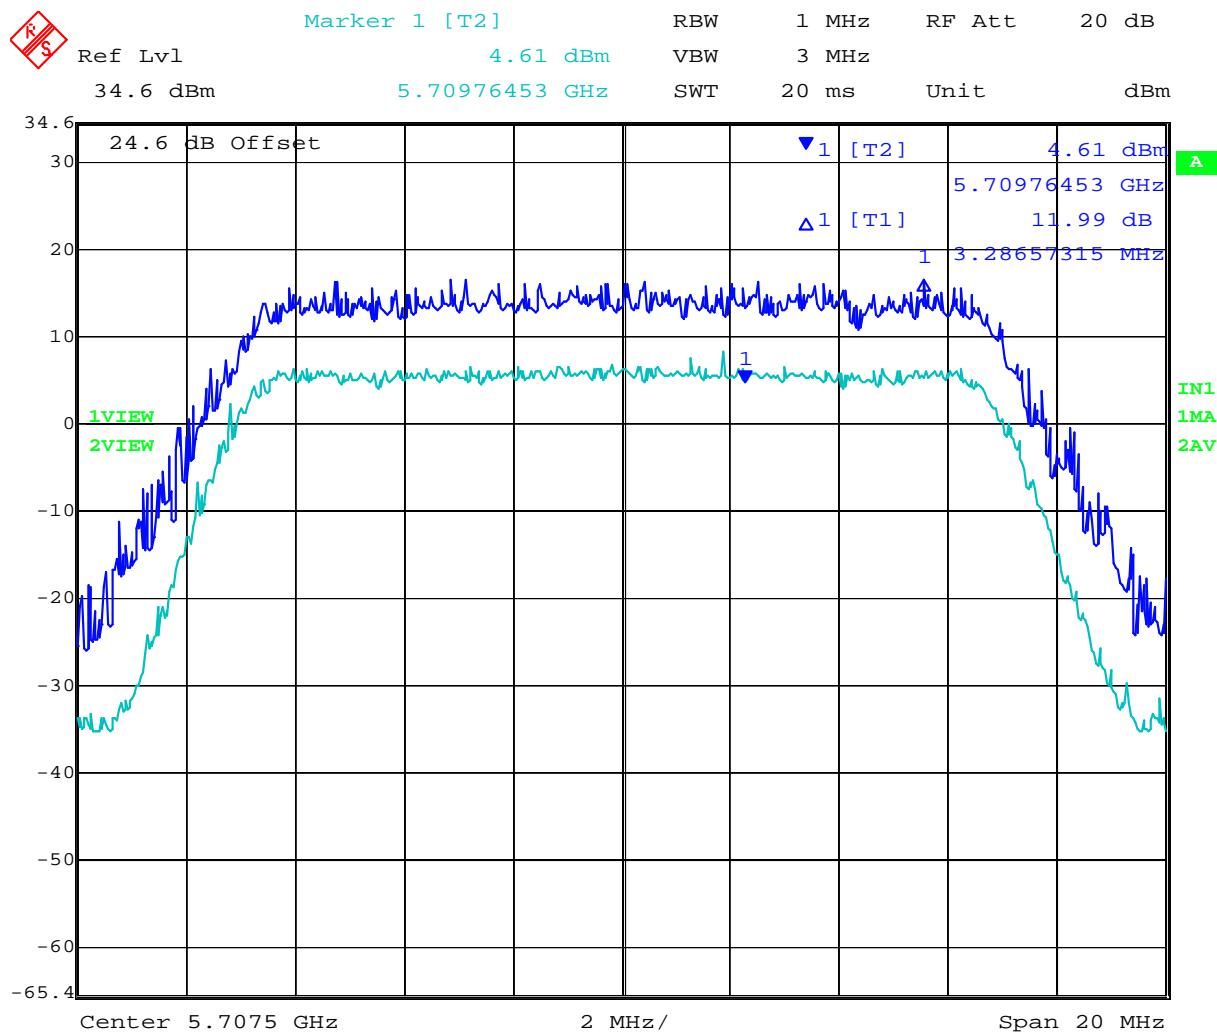

Date: 3.NOV.2008 16:05:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 60 of 126

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Laboratory Measurement Uncertainty for Spectrum Measurement

| | |
|-------------------------|----------|
| Measurement uncertainty | ± 2.81dB |
|-------------------------|----------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask' | 0158, 0193, 0252, 0313, 0314, 0070, 0116, 0117 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 61 of 126

5.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability. This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.5 GHz translates to a maximum frequency shift of ± 110 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 110 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 62 of 126

5.1.6. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.407(f)

Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ {(G \text{ (dBi)})/10}$$

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

| Freq. Band (GHz) | Antenna Gain (dBi) | Numeric Gain (numeric) | Peak Output Power (dBm) | Peak Output Power (mW) | Calculated Safe Distance @ 1mW/cm ² Limit(cm) | Minimum Separation Distance (cm) |
|------------------|--------------------|------------------------|-------------------------|------------------------|--|----------------------------------|
| 5.6 | 17.5 | 56.23 | +17.46 | 55.72 | 15.79 | 20 |

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the application requirements of RSS-102 shall be met.

Laboratory Measurement Uncertainty for Power Measurements

| | |
|-------------------------|----------|
| Measurement uncertainty | ±1.33 dB |
|-------------------------|----------|

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7. Radiated Emissions

5.1.7.1. Transmitter Radiated Spurious Emissions (above 1 GHz)


FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

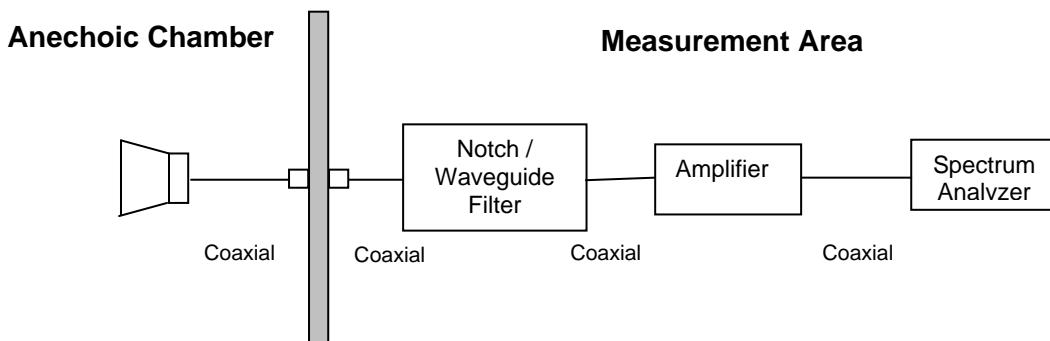

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 64 of 126

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength;

$$E = 1000000 \times \sqrt{30P} / 3 \mu\text{V/m, where P is the EIRP in Watts}$$

$$\text{Therefore: } -27 \text{ dBm/MHz} = 68.23 \text{ dB}\mu\text{V/m}$$

Note(s):

- 1).. The data in this Section along with the data in sections 5.1.7 (Conducted Spurious Emissions) and Section 5.1.8.2 (Radiated Band Edge - Restricted Bands) identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit for out of band emissions.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Measurement Results Transmitter Radiated Spurious Emissions above 1 GHz

Ambient conditions.

Temperature: 17 to 23°C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 5,482.5 MHz 64 QAM 5 MHz BW


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|---------------------|------------|-------|------------|------------------|-----|-----------|---------|------------|-----------|------------|-------------|
| 5481.754 | 52.41 | 34.62 | 34.89 | 121.91 | Peak [Scan] | V | | | N/A | N/A | N/A | Pk Emission |
| 5460 | Power Setting = Max | | | 55.70 | Peak Max | V | Maximized | 74 | -18.3 | Pass | Band-edge | |
| 5460 | | | | 43.13 | Average Max | V | | | | | | Band-edge |
| 4372.745 | 57.1 | 4.1 | -9.09 | 52.11 | Peak Max | V | 133 | 223 | 74 | -21.89 | Pass | RB |
| 4372.745 | 51.3 | 4.1 | -9.09 | 46.32 | Average Max | V | 133 | 223 | 54 | -7.68 | Pass | RB |

Pk Emission – Peak Emission

Band-edge – Restricted Bands



RB – Restricted Band

NRB – Non-Restricted Band

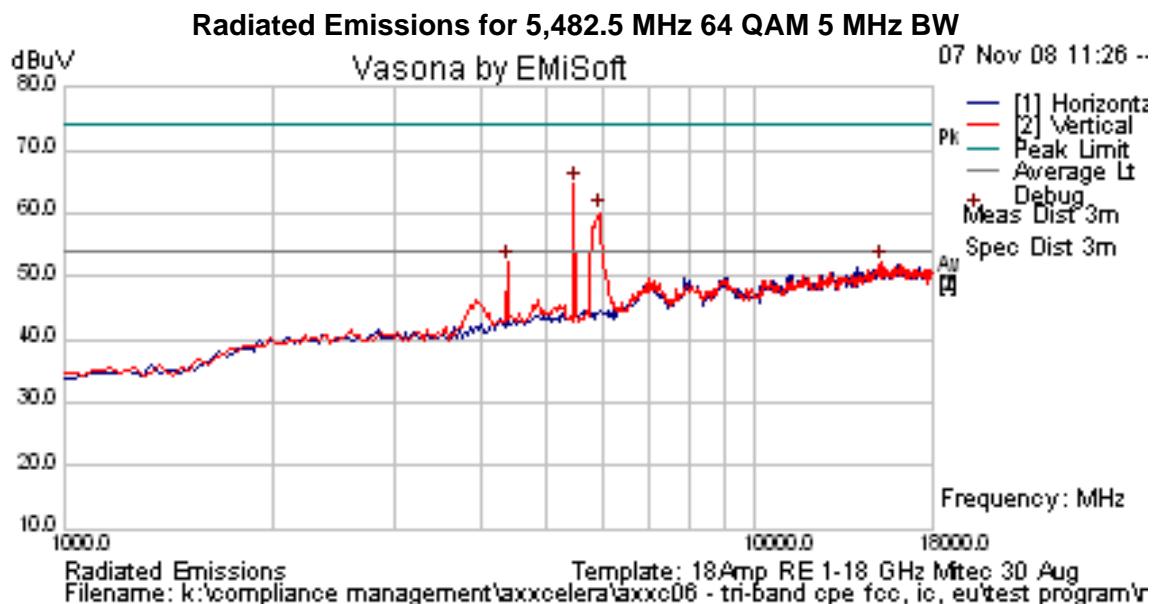

The above plot depicts peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

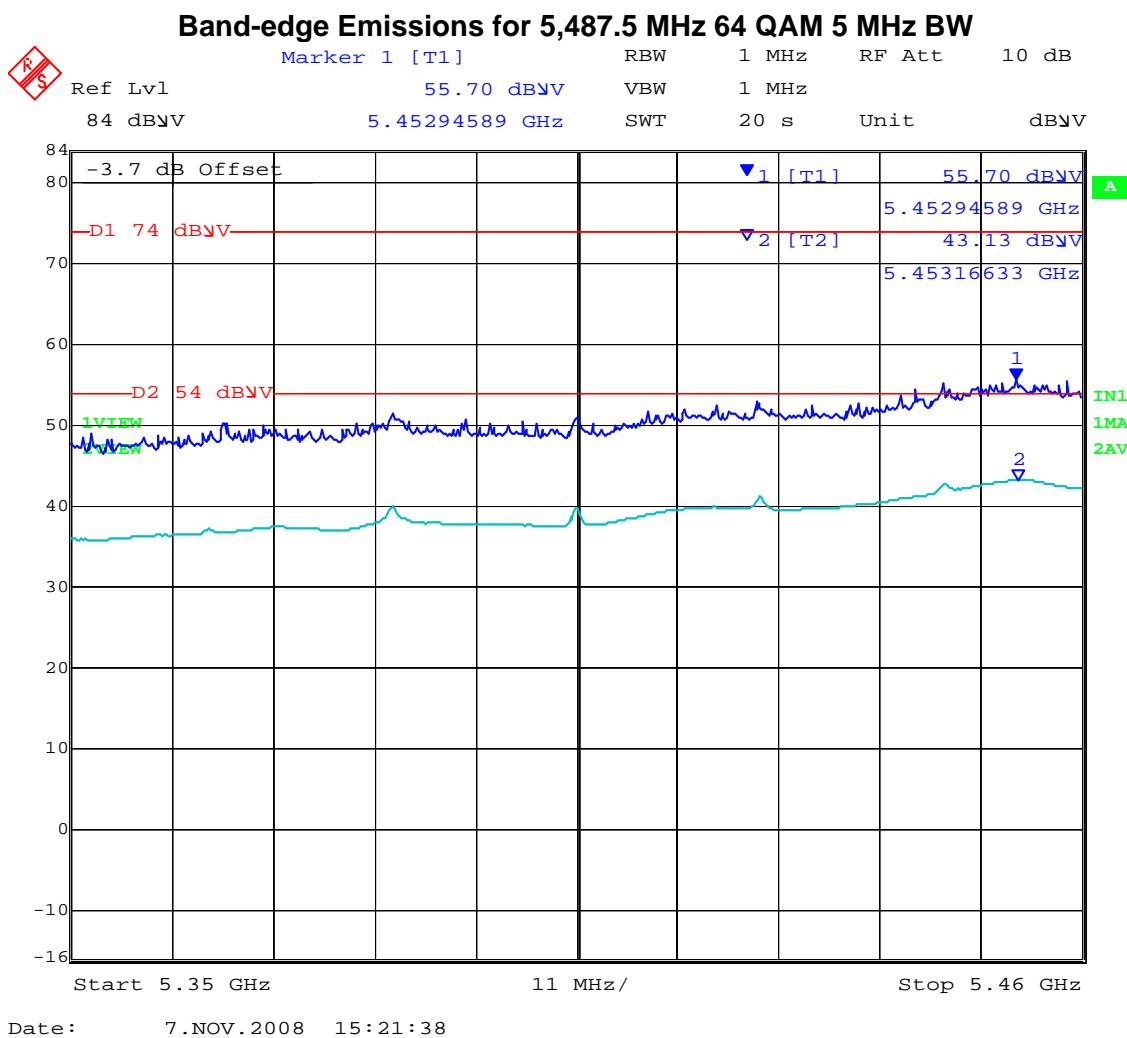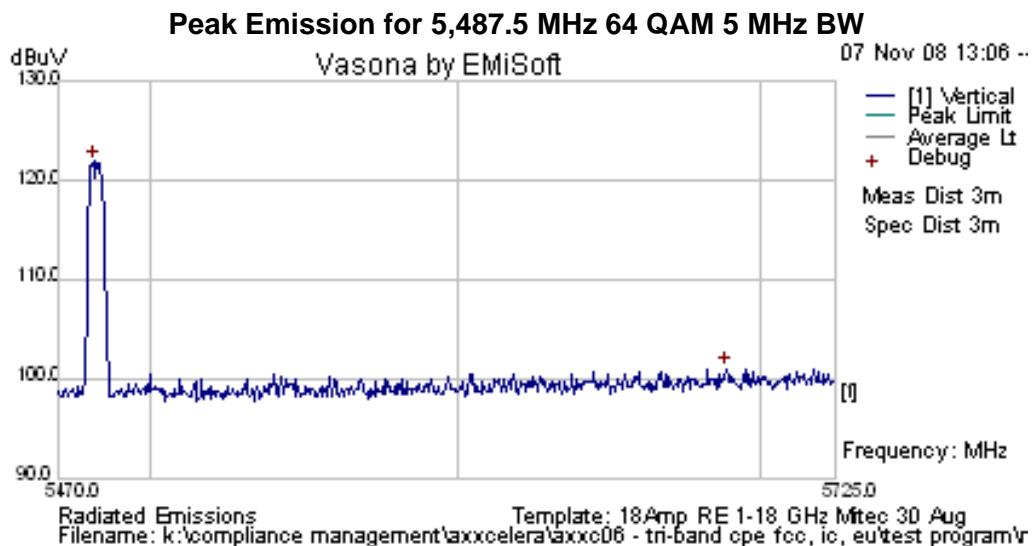

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 5,597.5 MHz 64 QAM 5 MHz BW


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|------------|------------------|-----|--------|---------|------------|-----------|------------|-------------|
| 5597.244 | 51.87 | 34.67 | 34.98 | 121.53 | Peak [Scan] | V | | | N/A | N/A | N/A | Pk Emission |
| 4474.95 | 58.07 | 4.16 | -8.84 | 53.39 | Peak Max | V | 124 | 254 | 101.53 | -48.14 | Pass | NRB |

Pk Emission – Peak Emission

Band-edge – Restricted Bands


RB – Restricted Band

NRB – Non-Restricted Band

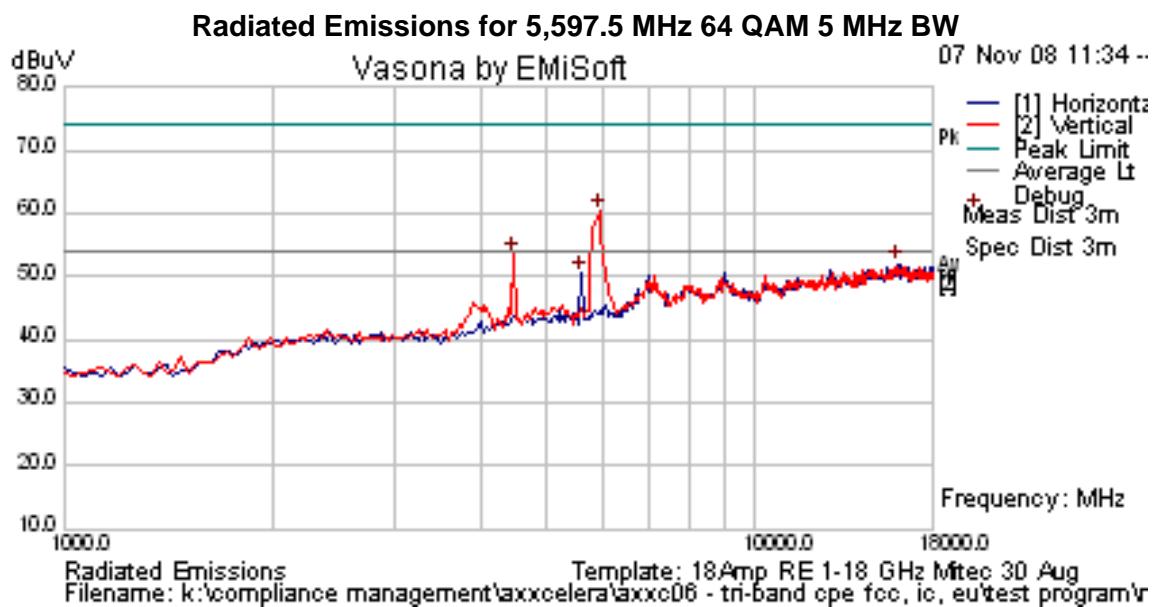

The above plot depicts peak emissions only

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

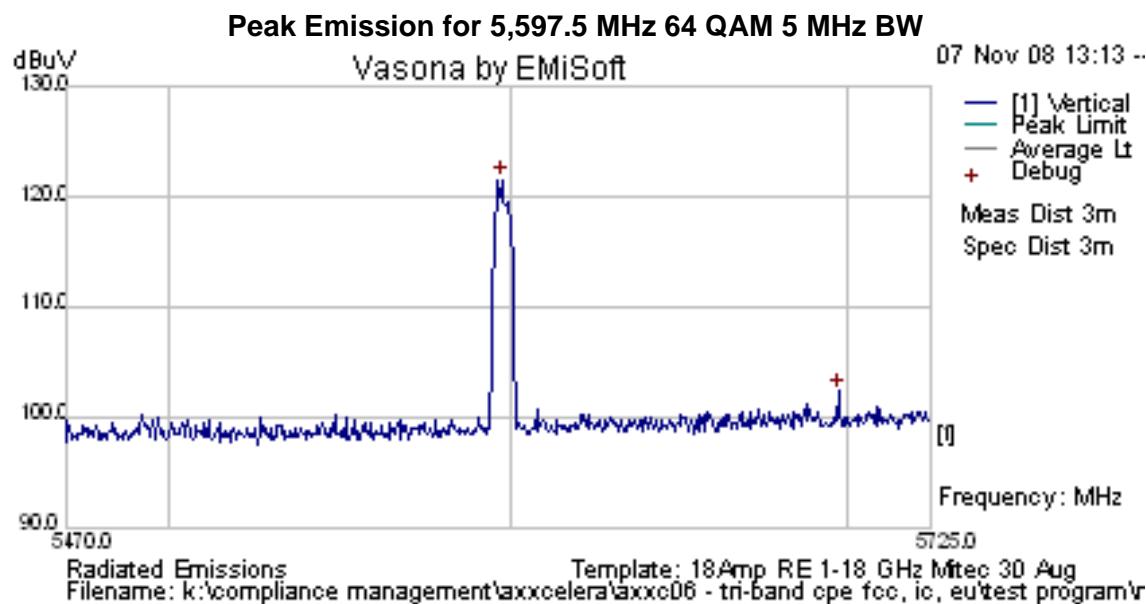

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF RESULTS – 5,712.5 MHz 64 QAM 5 MHz BW


| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV | Margin dB | Pass /Fail | Comments |
|---------------|----------|------------|-------|------------|------------------|-----|--------|---------|------------|-----------|------------|-------------|
| 5713.758 | 55.35 | 34.74 | 35.08 | 125.16 | Peak [Scan] | V | 100 | 0 | N/A | N/A | N/A | Pk Emission |
| 5939.88 | 63.64 | 4.86 | -7.59 | 60.92 | Peak Max | V | 100 | 0 | 105.16 | -44.24 | Pass | NRB |

Pk Emission – Peak Emission


RB – Restricted Band

NRB – Non-Restricted Band

Radiated Emissions for 5,712.5 MHz 64 QAM 5 MHz BW

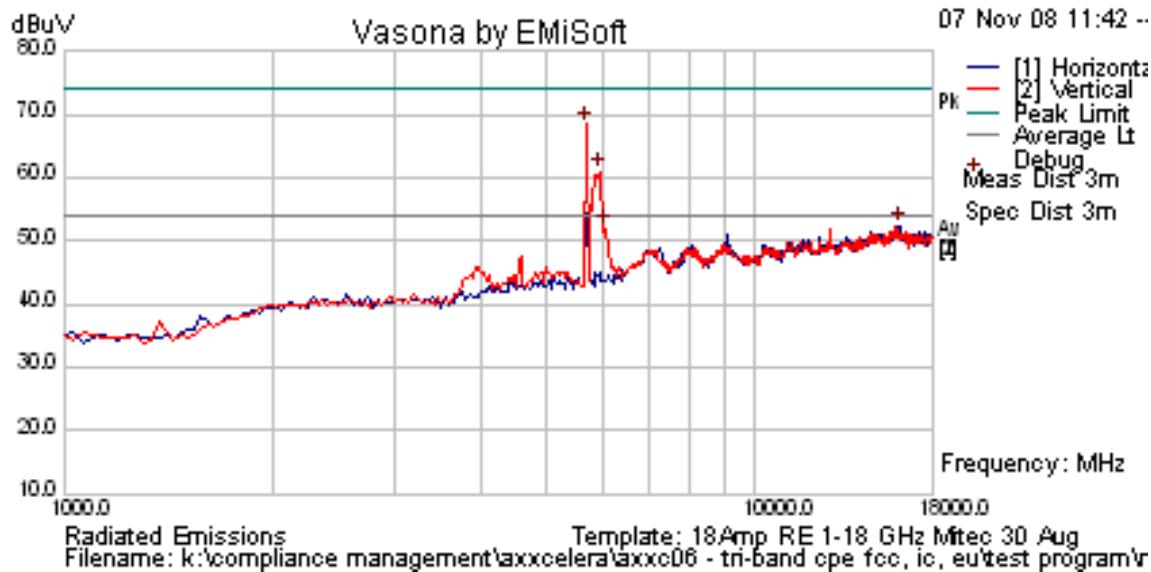

Peak Emission for 5,712.5 MHz 64 QAM 5 MHz BW

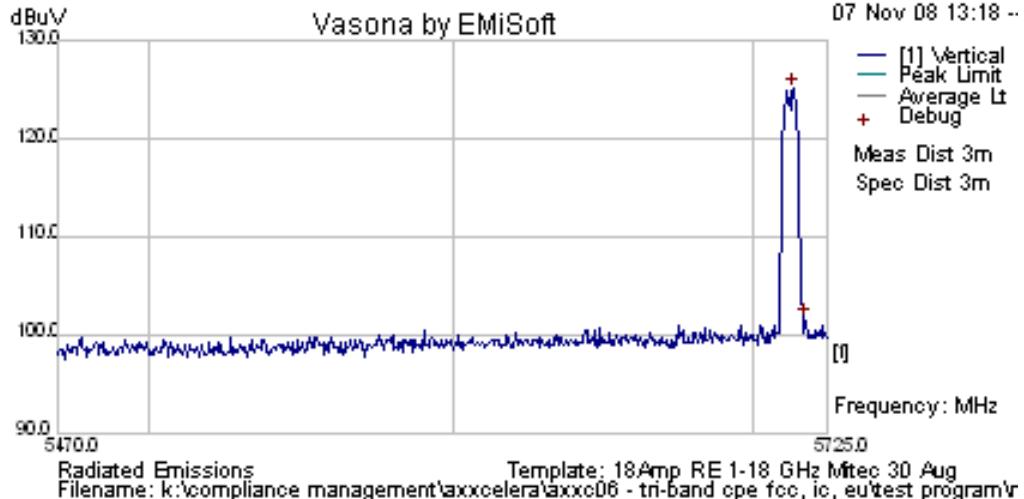

The above plot(s) depict peak emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.2. Receiver Spurious Emissions above 1 GHz


Industry Canada RSS-Gen §4.8, §6

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Test Measurement Set up

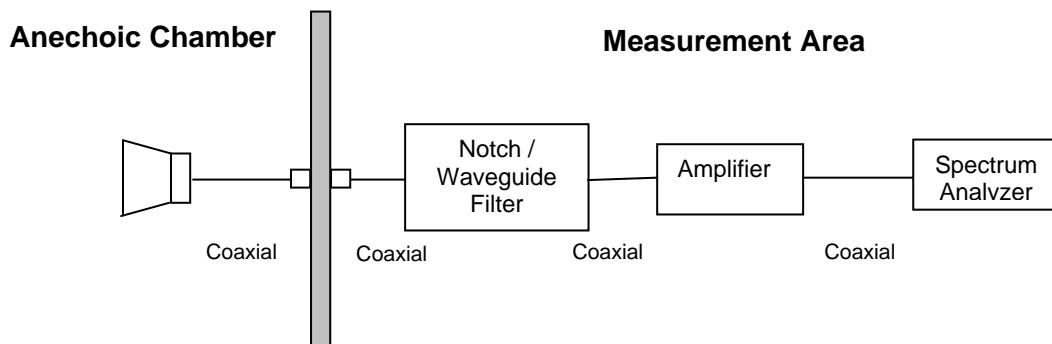

Measurement set up for Radiated Emission Test

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 71 of 126

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (\mu V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 72 of 126

Receiver Radiated Spurious Emissions above 1 GHz

TABLE OF RESULTS – 64 QAM 5,597.5 MHz

No emissions within 6dB of the limit line were found

5,597.5 MHz 64 QAM – Receiver Radiated Emissions

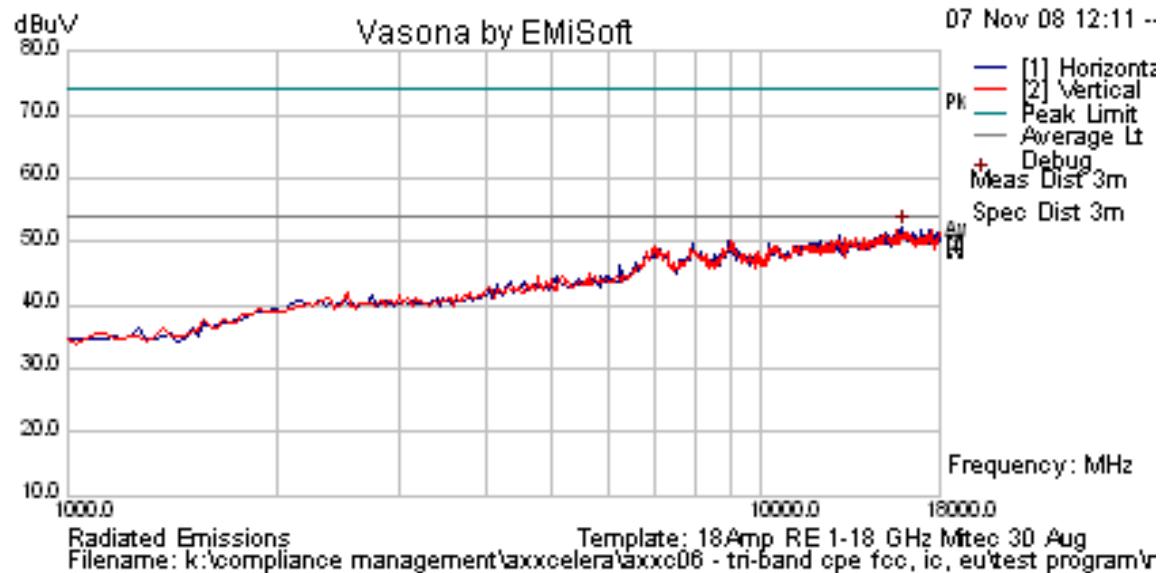

The above plot depicts peak receiver spurious emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Specification

Limits

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz , whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

| Frequency (MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance (meters) |
|-----------------|-----------------------|-------------------------|-------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 74 of 126

Laboratory Measurement Uncertainty for Radiated Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.3. Radiated Spurious Emissions (30M-1 GHz)


FCC, Part 15 Subpart C §15.407(b)(6); §15.205(a); §15.209(a)
Industry Canada RSS-210 §2.2

Test Procedure

Preliminary radiated emissions are measured in the anechoic chamber at a 10-meter distance on every azimuth in both horizontal and vertical polarity. The emissions are recorded with a spectrum analyzer in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

Test Measurement Set up

Field Strength Calculation

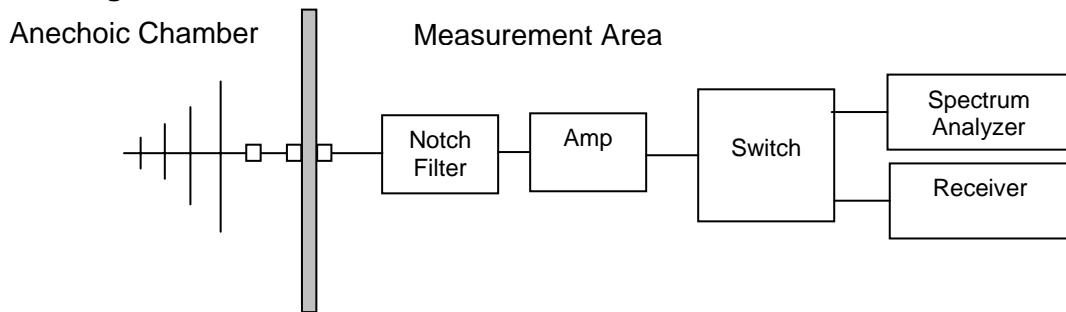

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL - AG + NFL

CL = Cable Loss

AG = Amplifier Gain



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 76 of 126

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level (}\mu\text{V/m)})$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

Measurement Results for Spurious Emissions (30 MHz – 1 GHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

EUT Setup


PhiHong POE 48VDC

Orientation: Unit vertical on the table top

TABLE OF RESULTS

| Freq. (MHz) | Peak (dBuV/m) | QP (dBuV/m) | QP Lmt (dBuV/m) | QP Margin (dB) | Height (cm) | Angle (deg) | Polarity |
|----------------|------------------|----------------|--------------------|----------------------|----------------|----------------|----------|
| 30.00 | 43.69 | 33.49 | 40 | -6.51 | 160 | 122 | V |
| 90.261 | 41.53 | 37.31 | 43.5 | -6.19 | 383 | 206 | H |
| 30.654 | 37.04 | 35.48 | 40 | -4.52 | 166 | 235 | V |
| 800.006 | 40.94 | 41.97 | 46 | -4.03 | 104 | 83 | H |
| 840.003 | 38.51 | 37.75 | 46 | -8.25 | 101 | 42 | H |
| 600.00 | 34.20 | 39.29 | 46 | -6.71 | 107 | 33 | V |

PhiHong POE - Radiated Spurious Emissions 30 MHz to 1 GHz

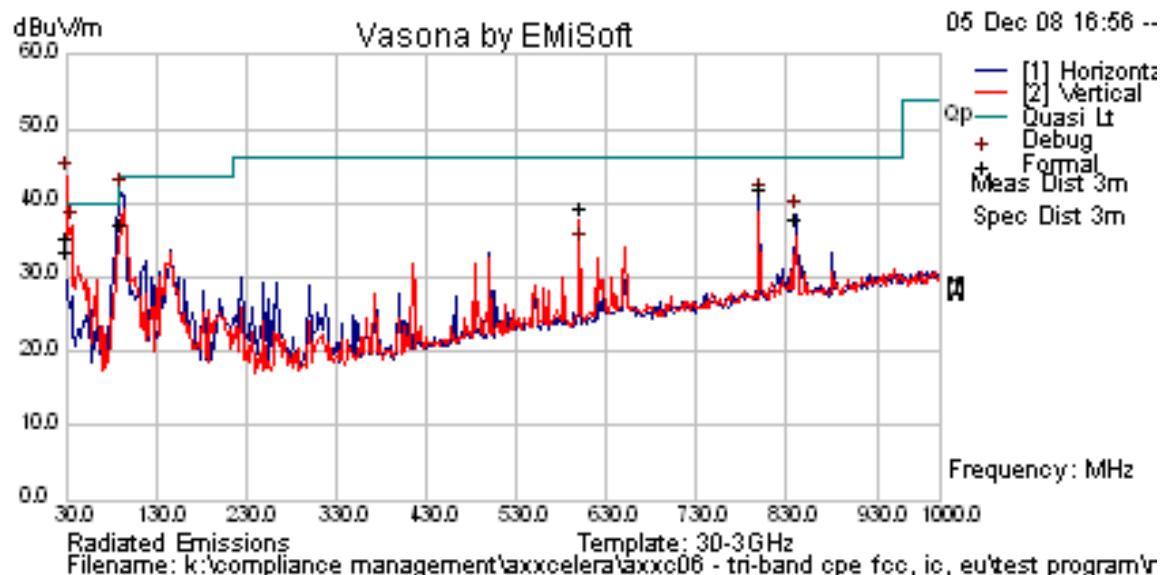

The above plot depicts peak radiated emissions below 1 GHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

EUT Setup


PowerDsine POE 48VDC

Orientation: Unit vertical on the table top

TABLE OF RESULTS

| Freq. (MHz) | Peak (dBuV/m) | QP (dBuV/m) | QP Lmt (dBuV/m) | QP Margin (dB) | Height (cm) | Angle (deg) | Polarity |
|----------------|------------------|----------------|--------------------|----------------------|----------------|----------------|----------|
| 43.493 | 46.06 | 43.76 | 40 | -0.11 | 98 | 346 | V |
| 66.281 | 41.55 | 39.46 | 40 | -0.54 | 108 | 229 | V |
| 30.621 | 41.47 | 39.38 | 40 | -0.62 | 105 | 343 | V |
| 81.191 | 40.95 | 39.69 | 40 | -0.31 | 104 | 135 | V |
| 47.808 | 38.63 | 38.15 | 40 | -1.85 | 132 | 357 | V |
| 650.005 | 39.06 | 43.81 | 46 | -2.19 | 121 | 216 | H |

PowerDsine - Radiated Spurious Emissions 30 MHz to 1 GHz

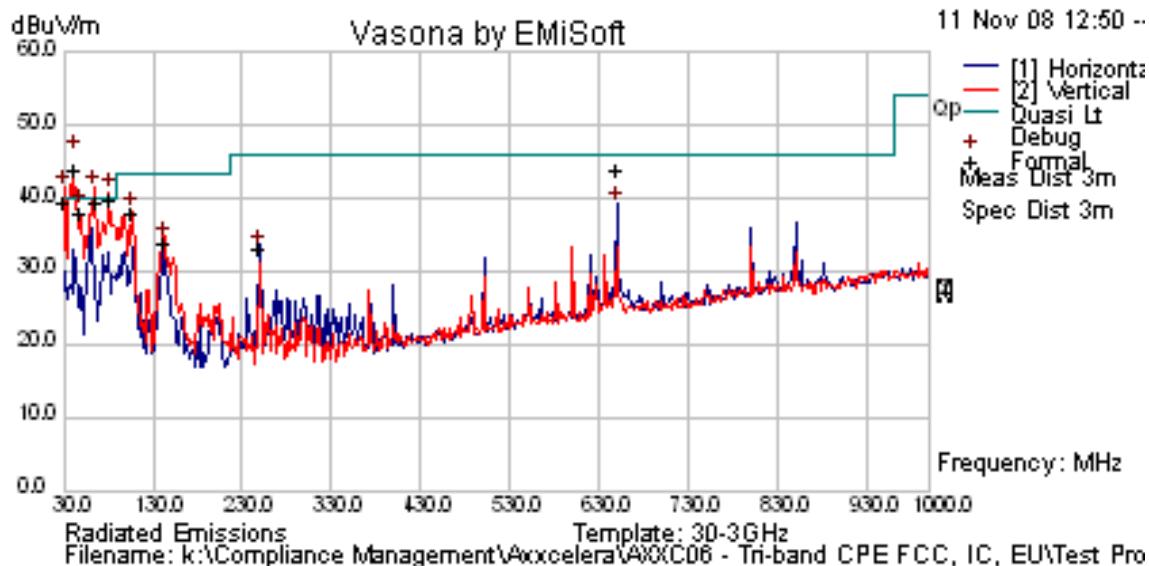

The above plot depicts peak radiated emissions below 1 GHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 79 of 126

Specification

Limits

§15.407(b)(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §2.2 refers to Section 2.7 Table 2 below;-

| Frequency(MHz) | Field Strength (μ V/m) | Field Strength (dB μ V/m) | Measurement Distance (meters) |
|----------------|--------------------------------|----------------------------------|----------------------------------|
| 30-88 | 100 | 40.0 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46.0 | 3 |
| Above 960 | 500 | 54.0 | 3 |

Laboratory Measurement Uncertainty for Radiated Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | +5.6/ -4.5 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|---|--|
| Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions' | 0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)


FCC, Part 15 Subpart C §15.407(b)(6)/15.207

Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

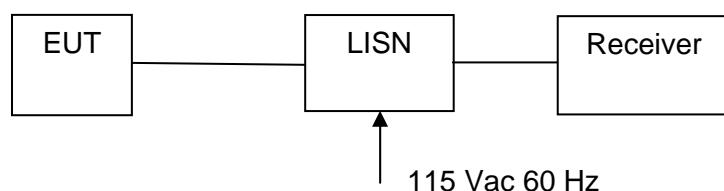

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

POE 48VDC
 PhiHong POE Adapter POE30U-560(G)

TABLE OF RESULTS

| Freq (MHz) | Line | Peak (dB μ V) | QP (dB μ V) | QP Limit (dB μ V) | QP Margin (dB) | Ave. (dB μ V) | Ave. Limit (dB μ V) | Ave. Margin (dB) |
|------------|---------|-------------------|-----------------|-----------------------|----------------|-------------------|-------------------------|------------------|
| 4.977 | Neutral | 50.76 | 50.03 | 56 | -5.97 | 45.65 | 46 | -0.35 |
| 1.009 | Live | 47.84 | 47.12 | 56 | -8.90 | 45.44 | 46 | -0.56 |
| 5.237 | Neutral | 51.66 | 49.43 | 60 | -10.57 | 41.97 | 50 | -8.03 |
| 0.150 | Live | 56.70 | 53.31 | 66 | -12.70 | 40.26 | 56 | -15.70 |
| 1.267 | Live | 43.82 | 44.25 | 56 | -11.75 | 40.40 | 46 | -5.60 |
| 26.609 | Live | 46.08 | 45.84 | 50 | -14.16 | 37.93 | 50 | -12.07 |

PhiHong AC Wireline Conducted Emissions – Live & Neutral (150 kHz – 30 MHz)

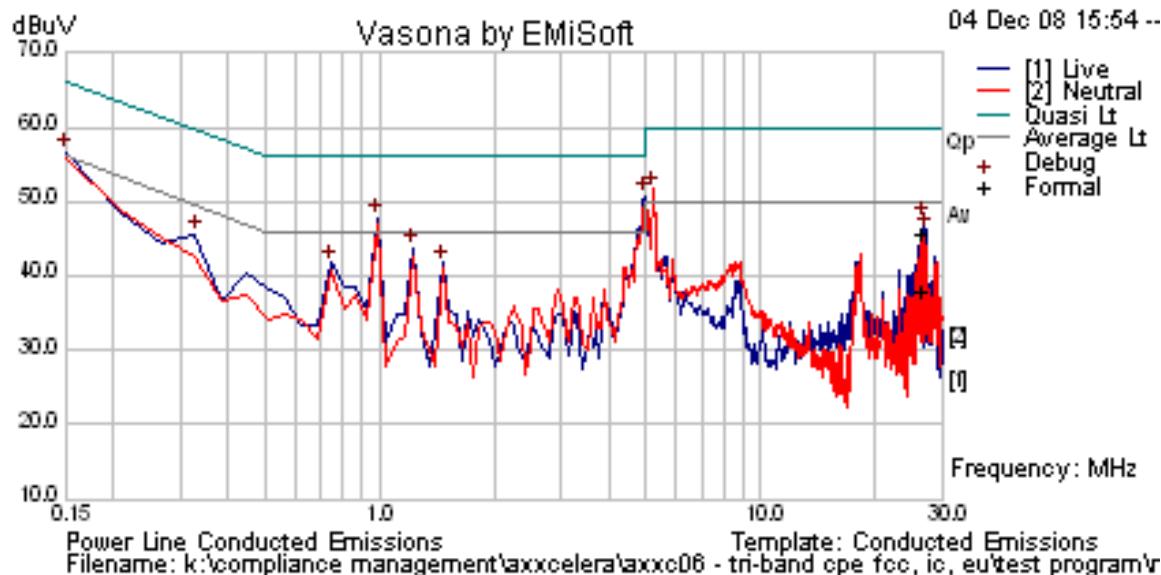


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

POE 48VDC
 PowerDsine POE Adapter

TABLE OF RESULTS

| Freq (MHz) | Line | Peak (dB μ V) | QP (dB μ V) | QP Limit (dB μ V) | QP Margin (dB) | Ave. (dB μ V) | Ave. Limit (dB μ V) | Ave. Margin (dB) |
|------------|---------|-------------------|-----------------|-----------------------|----------------|-------------------|-------------------------|------------------|
| 5.175 | Neutral | 35.85 | 29.25 | 60 | -30.75 | 27.01 | 50 | -22.99 |
| 6.631 | Neutral | 35.5 | 13.58 | 60 | -46.42 | 9.56 | 50 | -40.44 |
| 17.694 | Neutral | 42.53 | 43.16 | 60 | -16.84 | 41.46 | 50 | -8.54 |
| 18.305 | Neutral | 43.37 | 41.21 | 60 | -18.79 | 39.03 | 50 | -10.97 |
| 26.609 | Neutral | 40.45 | 41.34 | 60 | -18.66 | 39.28 | 50 | -10.72 |
| 27.159 | Neutral | 41.22 | 42.41 | 60 | -17.59 | 40.44 | 50 | -9.56 |

PowerDsine AC Wireline Conducted Emissions – Live & Neutral (150 kHz – 30 MHz)

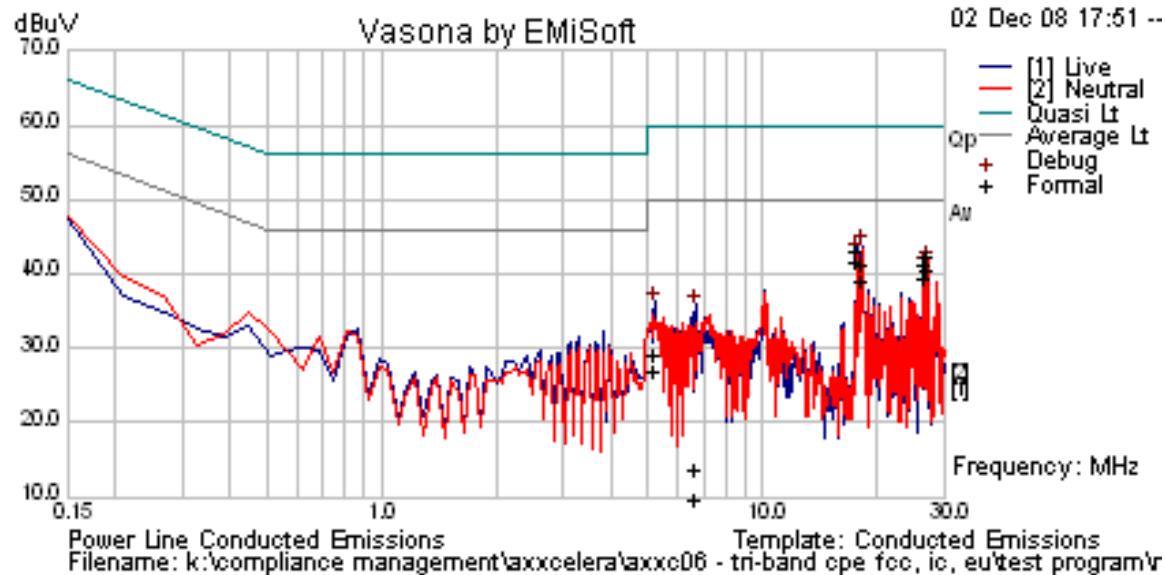

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 83 of 126

Specification

Limit

§15.407 (b)(6); Any U-NII devices using an AC power line are required to comply also with the limits set forth in Section 15.207.

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

| | |
|-------------------------|---------------|
| Measurement uncertainty | ± 2.64 dB |
|-------------------------|---------------|

Traceability

| Method | Test Equipment Used |
|--|------------------------------------|
| Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions' | 0158, 0184, 0193, 0190, 0293, 0307 |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 84 of 126

6. Dynamic Frequency Selection (DFS)

6.1. Test Procedure and Setup

FCC, Part 15 Subpart C §15.407(h)

FCC 06-96 Memorandum Opinion and Order

Industry Canada RSS-210 A9.4

6.1.1. Interference Threshold values, Master or Client incorporating In-Service Monitoring

| Maximum Transmit Power | Value (see note) |
|------------------------|---------------------|
| ≥ 200 milliwatt | -64 dBm |
| < 200 milliwatt | -62 dBm |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

6.1.2. DFS Response requirement values

| Parameter | Value |
|--|---|
| <i>Non-occupancy period</i> | Minimum 30 minutes |
| <i>Channel Availability Check Time</i> | 60 seconds |
| <i>Channel Move Time</i> | 10 seconds See Note 1. |
| <i>Channel Closing Transmission Time</i> | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i> | Minimum 80% of the 99% power bandwidth See Note 3. |

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.1.3. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

| Radar Type | Pulse Width (usec) | PRI (usec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Trials |
|-----------------------------|--------------------|------------|------------------|--|----------------|
| 1 | 1 | 1428 | 18 | 60% | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60% | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 |
| Aggregate (Radar Types 1-4) | | | | 80% | 120 |

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (usec) | Chirp Width (MHz) | PRI (usec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--|----------------|
| 5 | 50-100 | 5-20 | 1000-2000 | 1-3 | 8-20 | 80% | 30 |

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5,620 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst_Count*. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through *8* are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through *8* randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical representation of the Long Pulse radar Test Waveform.

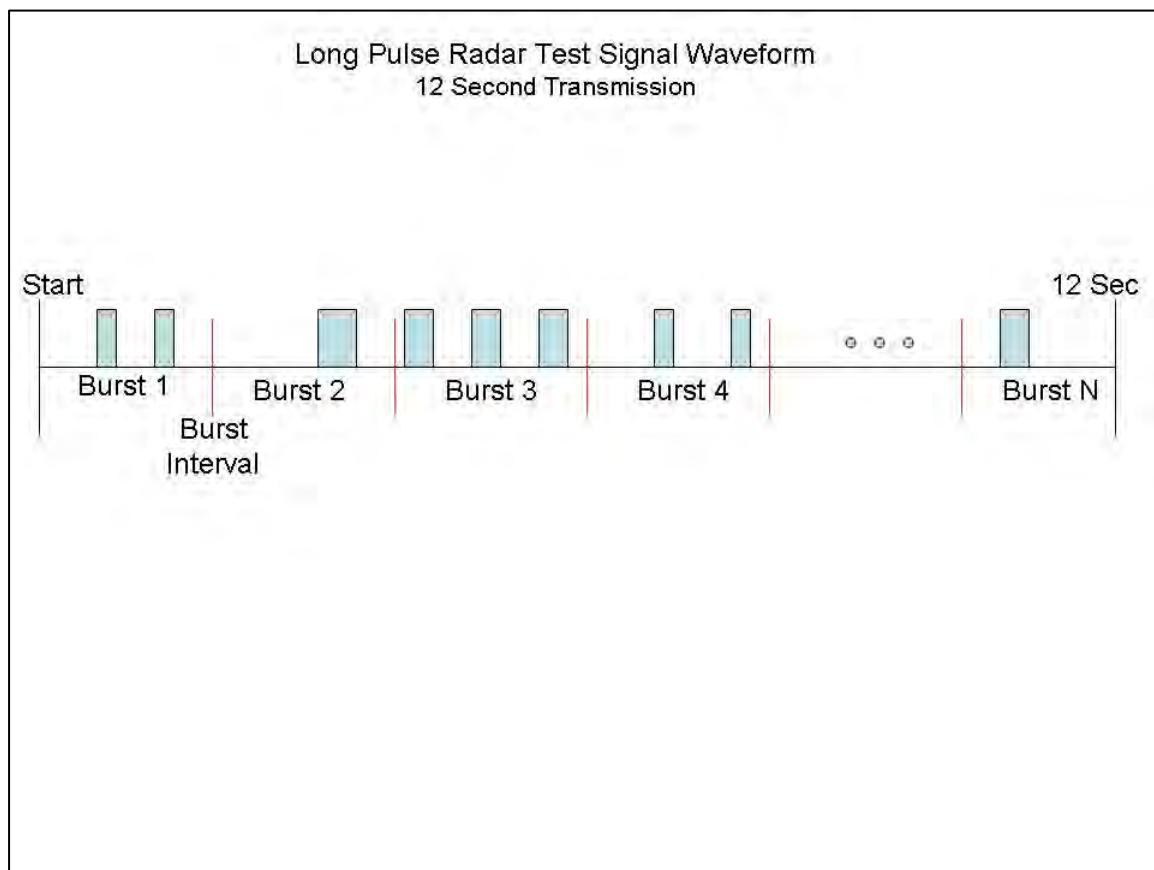

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.1.4. Frequency Hopping Radar Test Waveform

Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--|----------------|
| 6 | 1 | 333 | 9 | .333 | 300 | 70% | 30 |


For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

6.1.5. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

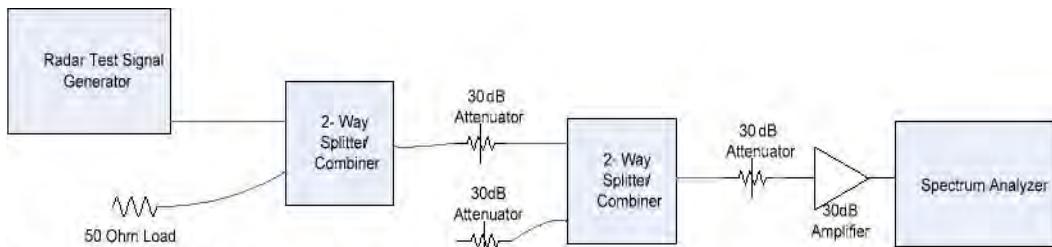

Conducted Calibration Setup


6.1.6. Radar Waveform Calibration Plots

The following are the calibration plots for required radar waveforms

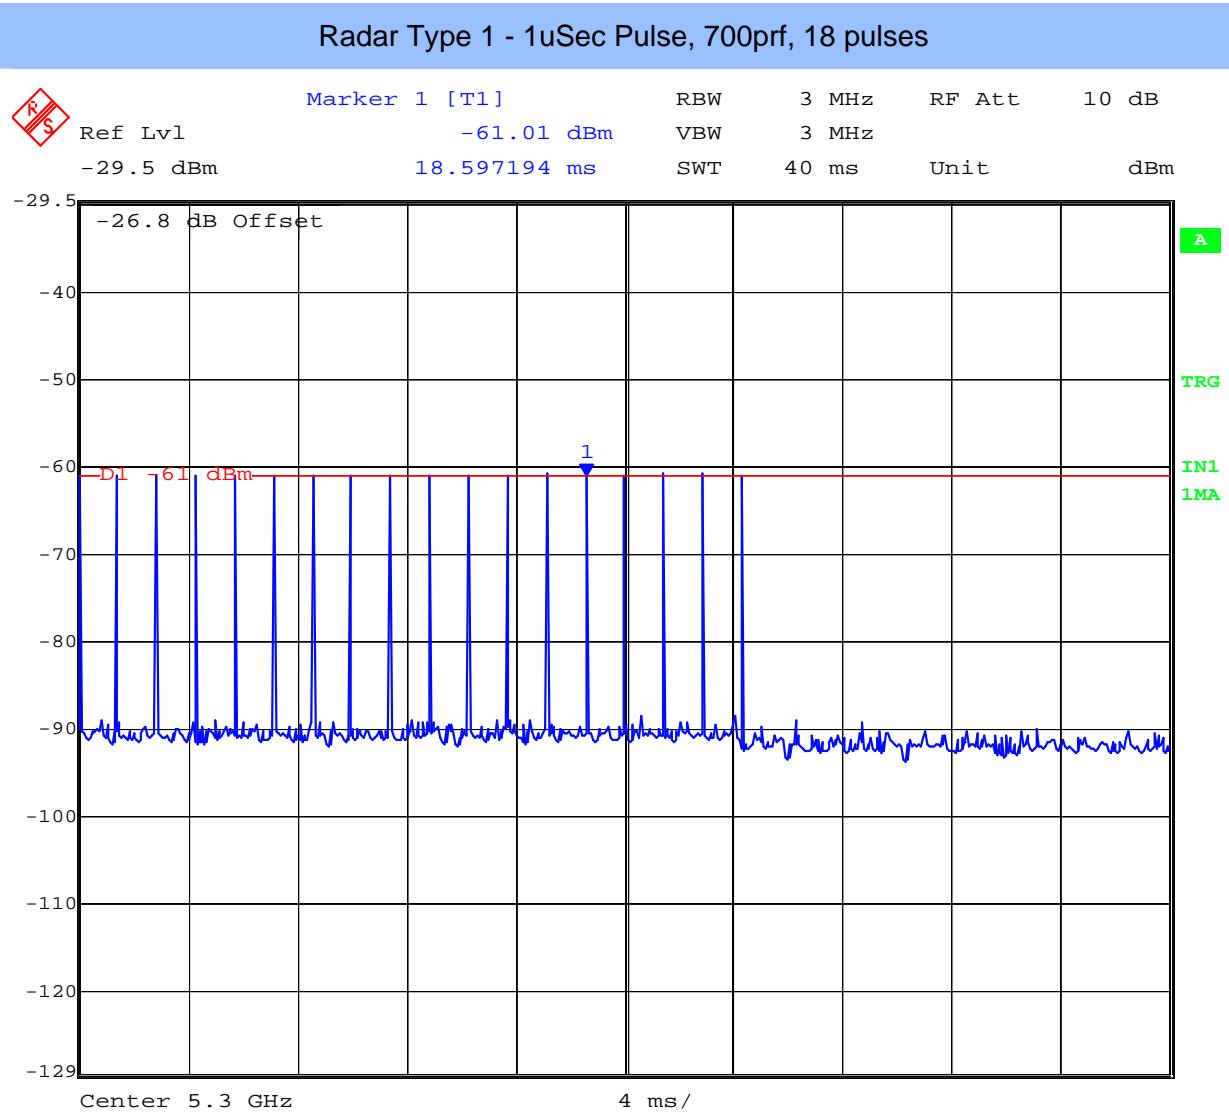


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radar Type 2 - 2.1uSec Pulse Width, 170prf, 25 pulses

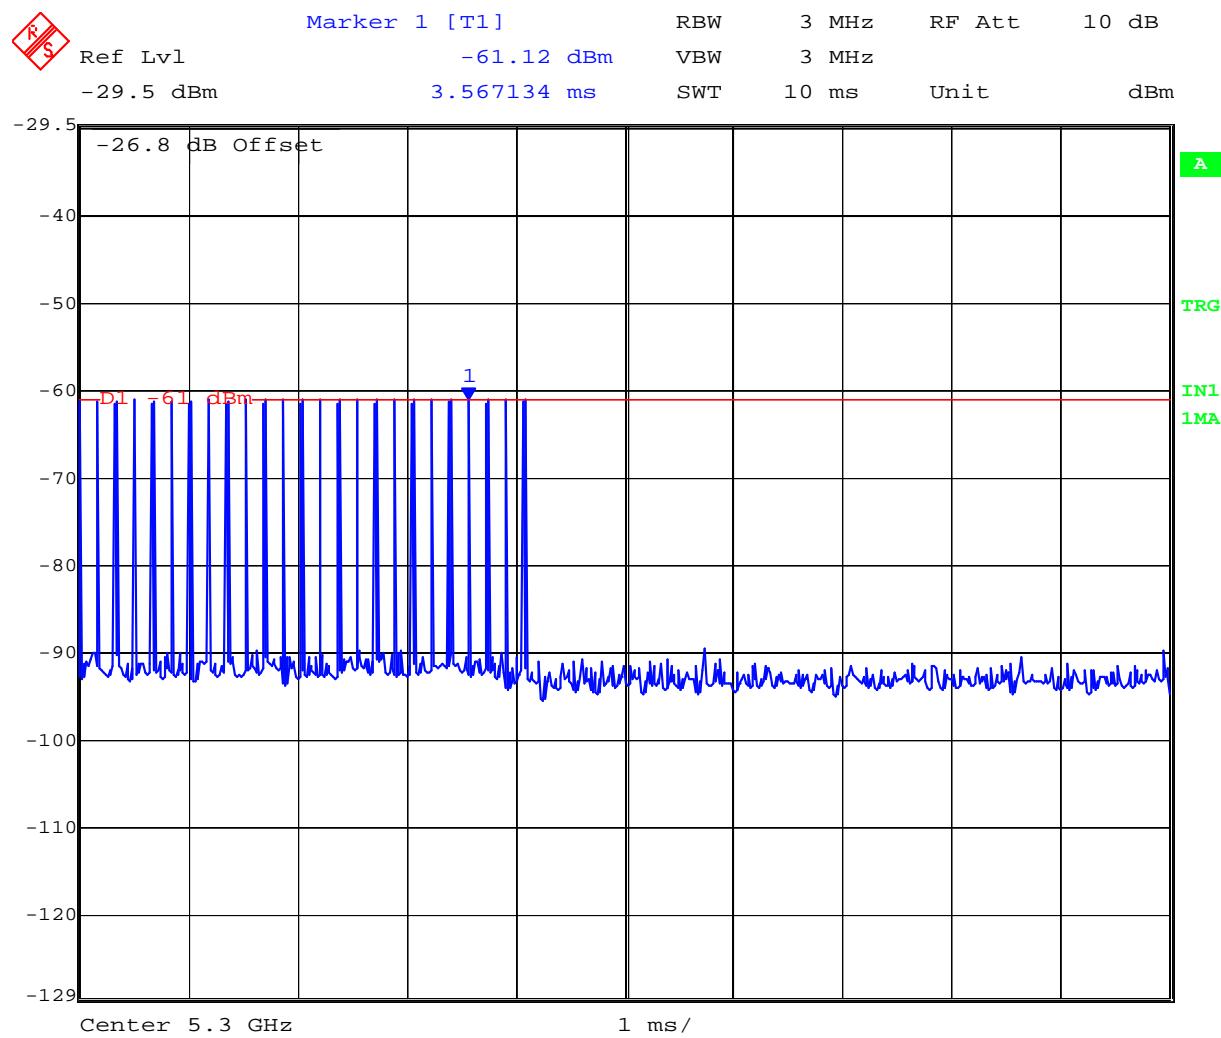


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radar Type 3 - 7.5uSec Pulse Width, 309prf, 17 pulses

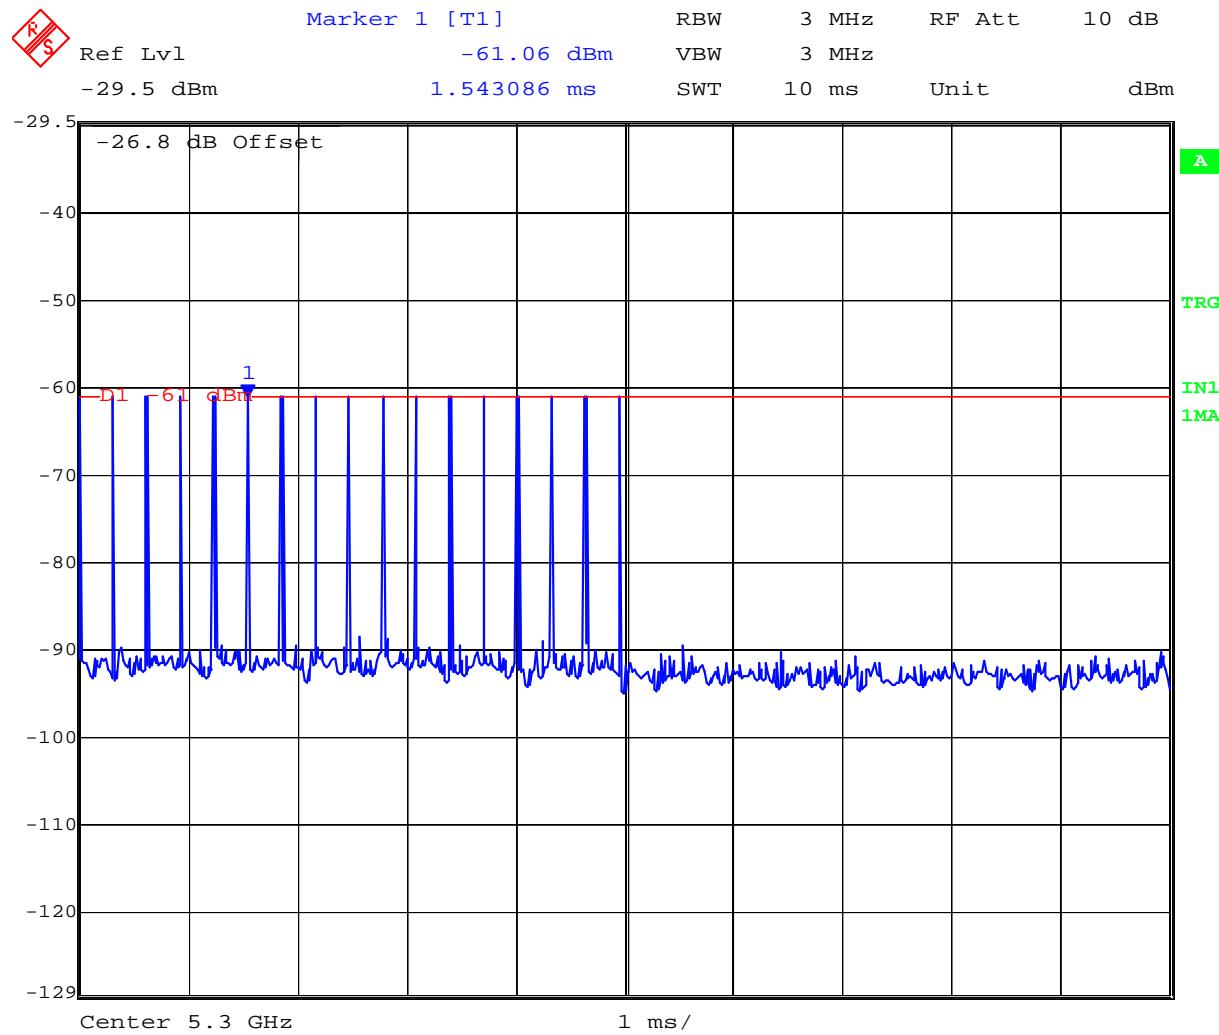


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radar Type 4 - 17.9uSec Pulse Width, 383prf, 16 pulses

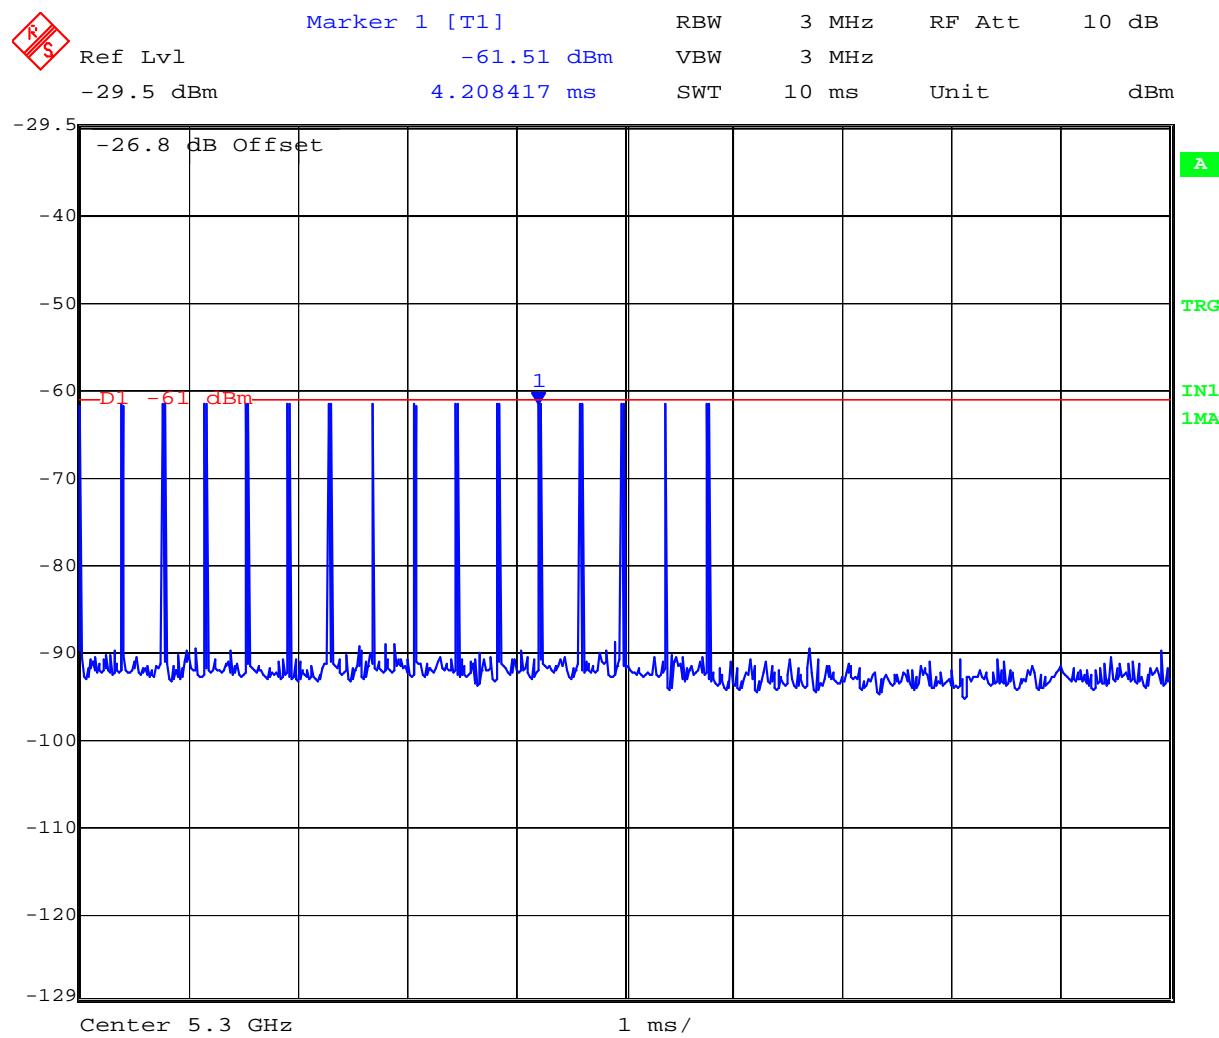


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radar Type 5

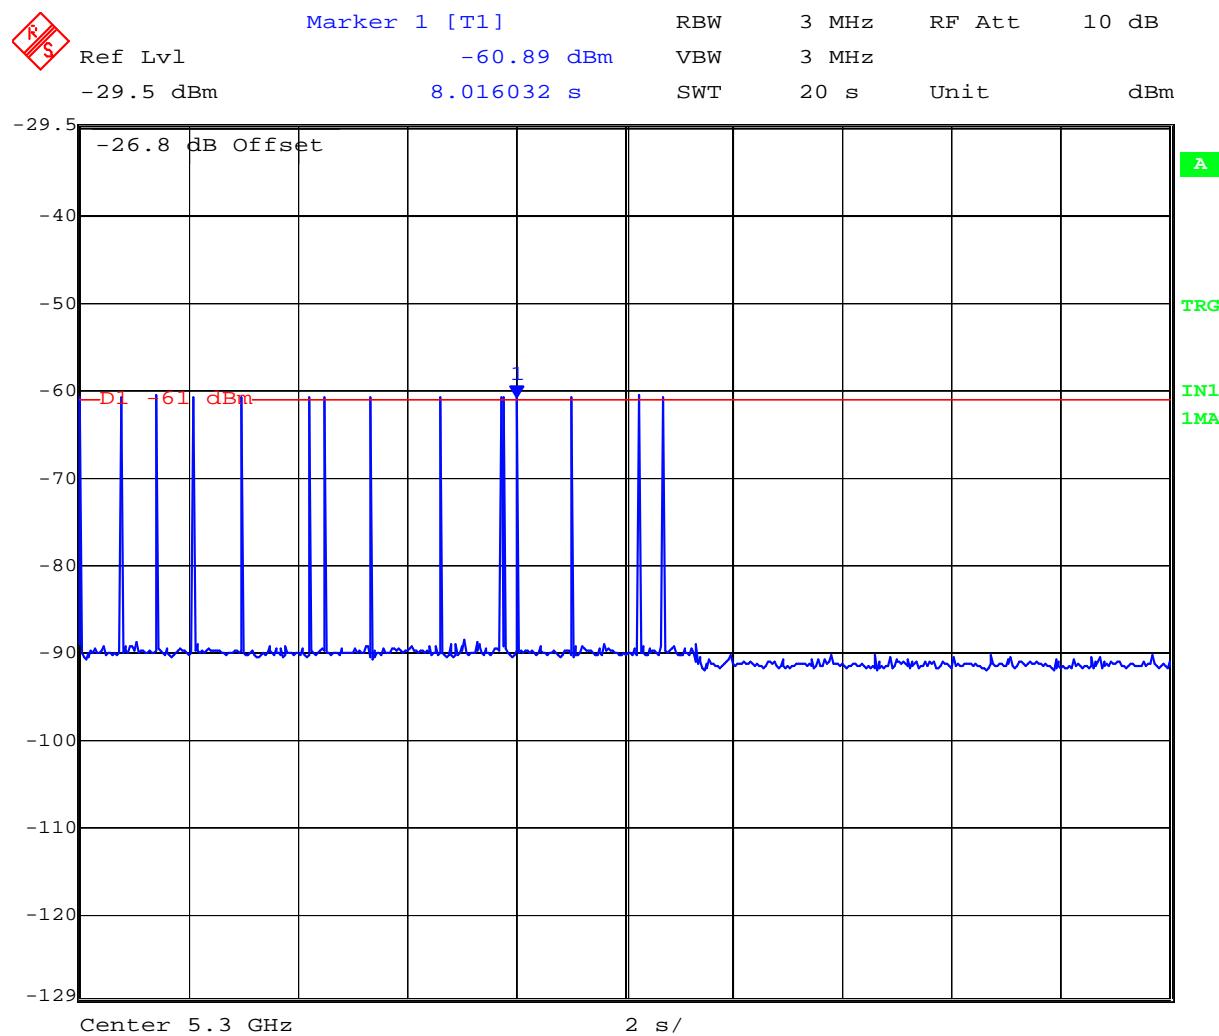

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radar Type 6

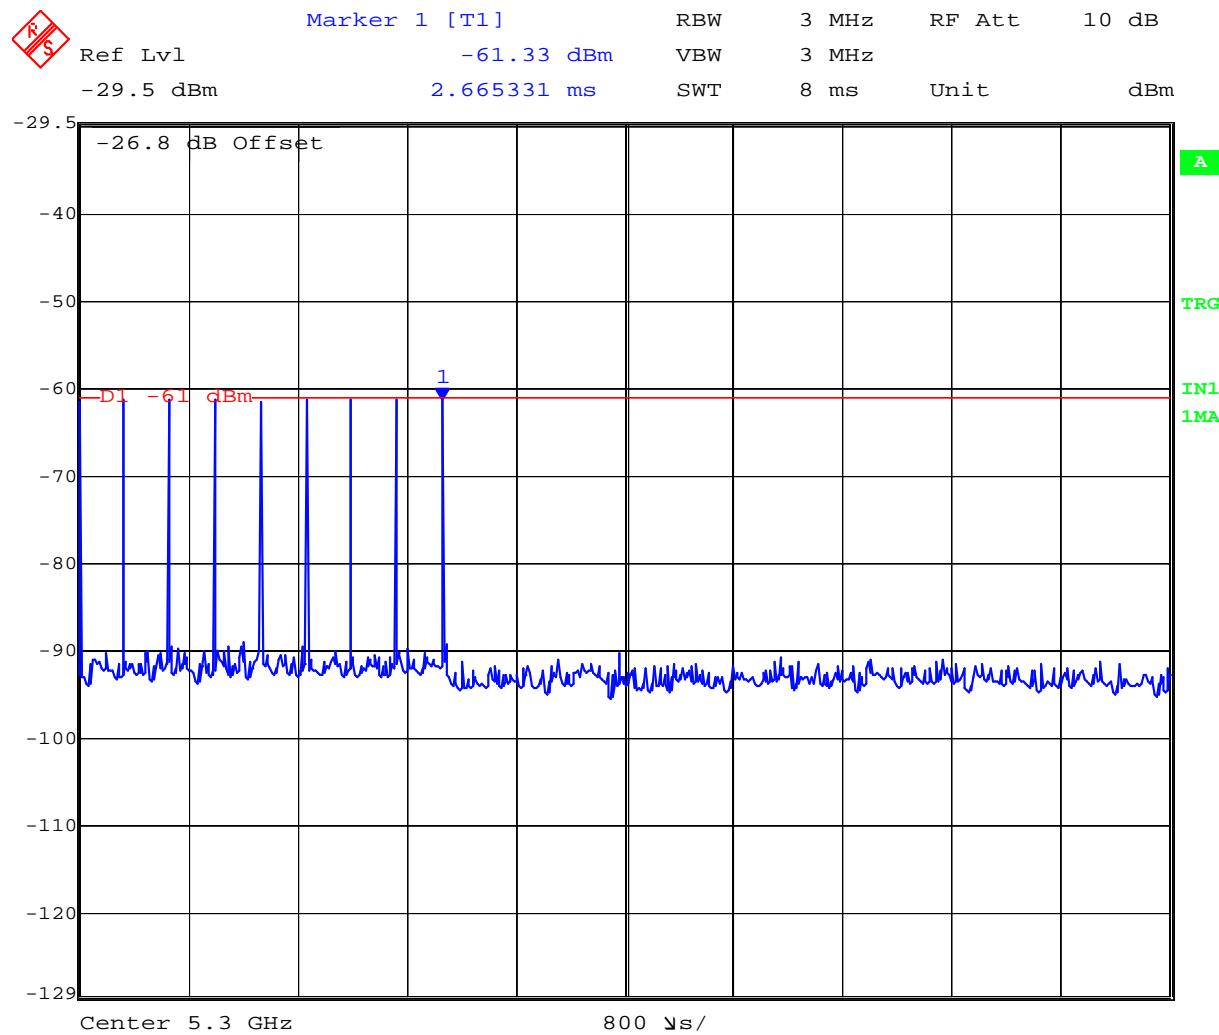


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6.1.7. Test Set Up:

Block Diagram(s) of Test Setup

Setup for Conducted Measurements where the EUT is the Client with injection of Radar Test Waveforms at the Client.

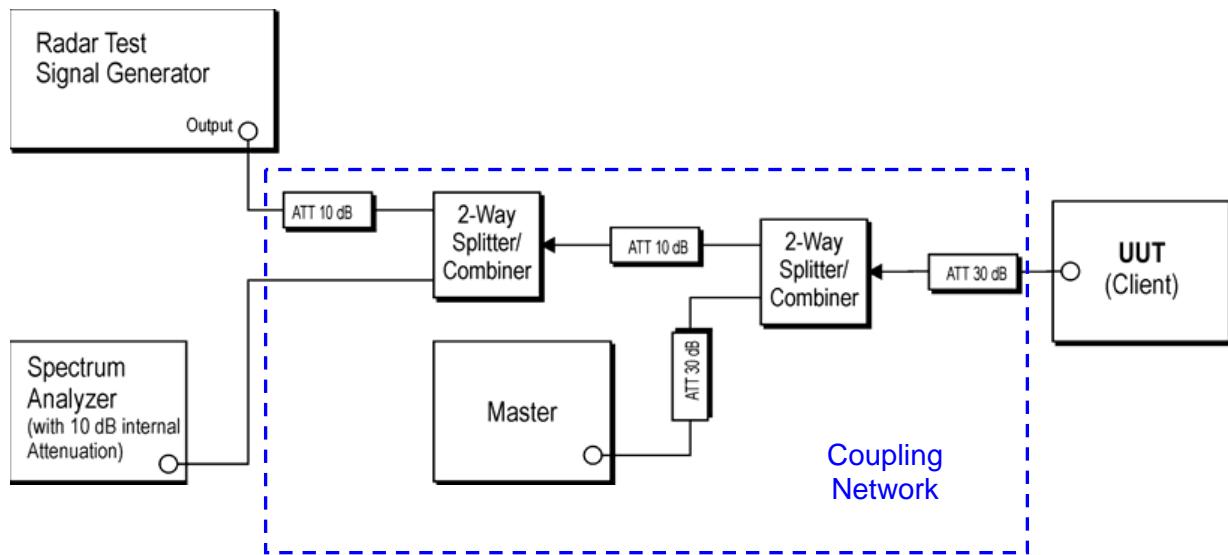

Support Equipment Configuration

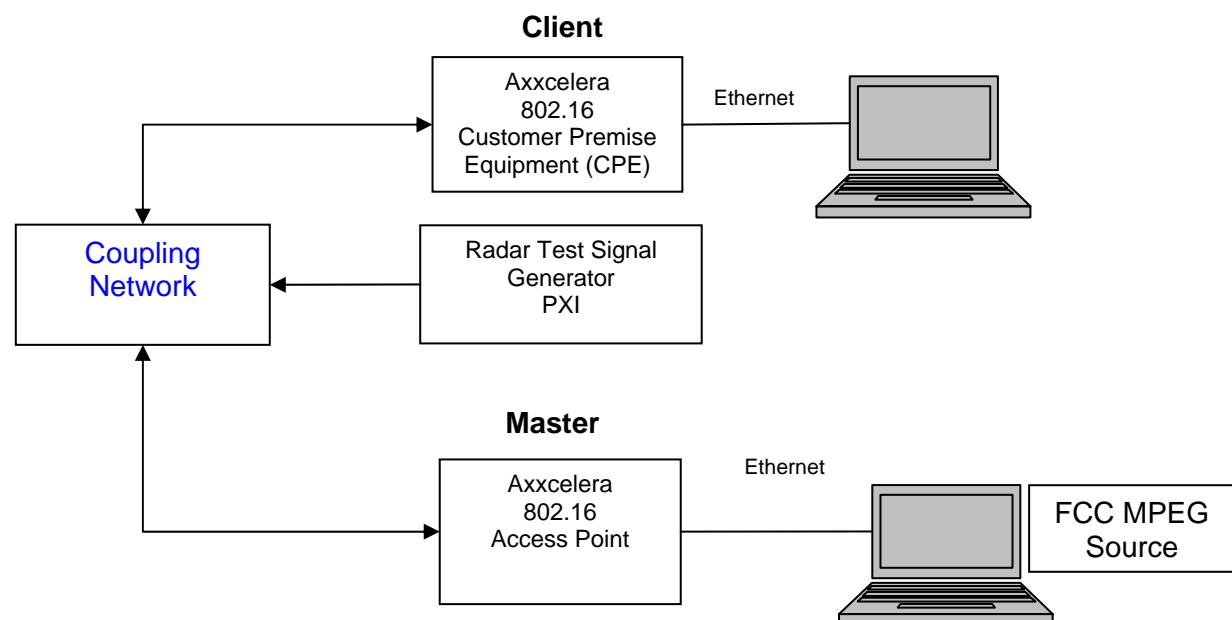

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 96 of 126

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels.

Declared minimum antenna gain 16 dBi. ;

Radar receive signal level = -62 dBm + minimum antenna gain + 1 dB

$$= -62 + 16 + 1$$

Radar receive signal level = -45 dBm

Applicability of DFS requirements during normal operation

| Requirement | Operational Mode | | |
|--|------------------|--------------------------------|-----------------------------|
| | Master | Client Without Radar Detection | Client With Radar Detection |
| <i>DFS Detection Threshold</i> | Yes | Not required | Yes |
| <i>Channel Closing Transmission Time</i> | Yes | Yes | Yes |
| <i>Channel Move Time</i> | Yes | Yes | Yes |
| <i>U-NII Detection Bandwidth</i> | Yes | Not required | Yes |
| <i>Channel Availability Check</i> | Yes | Not required | Not required |
| <i>Non-Occupancy Period</i> | Yes | Not required | Yes |

The Axxcelera Tri-Band CPE is a Client with radar detection capability.

Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Client with radar detection capability

Transmit Power: Maximum

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 97 of 126

6.2. Dynamic Frequency Selection (DFS) Test Results

6.2.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz.

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz at a level of -45 dBm. The EUT is set up as a standalone device (not associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 98 of 126

15 MHz Operation

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, Blank= No Detection) | | | | | | | | | | Detection Rate (%) |
|--------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| | | | | | | | | | | | |
| 5489 | 0 | 0 | | | | | | | | | <90% |
| 5490 (F _l) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5491 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 90% |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5495 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 90% |
| 5496 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 90% |
| 5497 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 90% |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5502 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 90% |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 100% |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5508 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 90% |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5510 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5511 (F _h) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5512 | 0 | 1 | 0 | | | | | | | | <90% |

Detection Bandwidth = F_H-F_L = 5511-5490 = 21 MHz

EUT 99% Bandwidth @ 15 MHz Bandwidth = 13.727 MHz

13.727 MHz *80% = 10.982 MHz

Equipment complies with the receiver detection bandwidth requirements

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 99 of 126

10 MHz Operation

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, Blank= No Detection) | | | | | | | | | | Detection Rate (%) |
|--------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| | | | | | | | | | | | |
| 5489 | 0 | 0 | | | | | | | | | <90% |
| 5490 (F _l) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5491 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5495 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5496 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5497 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 90% |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5502 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5508 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5510 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5511 (F _h) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5512 | 1 | 0 | 0 | | | | | | | | <90% |

Detection Bandwidth = F_H-F_L = 5511-5490 = 21 MHz

EUT 99% Bandwidth @ 10 MHz Bandwidth = 9.21 MHz

9.21 MHz *80% = 7.368 MHz

Equipment complies with the receiver detection bandwidth requirements

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 100 of 126

5 MHz Operation

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, Blank= No Detection) | | | | | | | | | | Detection Rate (%) |
|------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | |
| 5489 | 0 | 0 | | | | | | | | | <90% |
| 5490 (F _l) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5491 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5492 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5493 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5494 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5495 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 90% |
| 5496 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5497 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5498 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5499 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5500 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5501 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5502 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5503 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5504 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5505 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5506 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5507 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5508 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5509 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5510 (F _h) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5511 | 1 | 1 | 1 | 0 | 0 | | | | | | <90% |

Detection Bandwidth = F_H-F_L = 5510-5490 = 20 MHz

EUT 99% Bandwidth @ 5 MHz Bandwidth = 4.569 MHz

4.569 MHz *80% = 3.6552 MHz

Equipment complies with the receiver detection bandwidth requirements

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 101 of 126

6.2.2. Initial Channel Availability Check Time

This test is not applicable for a radar detecting CLIENT device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 102 of 126

6.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:

This test is not applicable for a radar detecting CLIENT device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 103 of 126

6.2.4. Radar Burst at the End of the Channel Availability Check Time:

This test is not applicable for a radar detecting CLIENT device

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 104 of 126

**6.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period
FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the Master (Access Point). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

Channel Closing Transmission Time - Measurement

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured, collecting nearly 250M samples of data, which included in excess of 600 ms of pre-trigger data. This Type 1 waveform had an integral marker built into its construction, marking the start of the radar waveform play, which directly triggered the PXI digitizer's data capture via the PXI backplane trigger bus.

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events with respect to T_0 (zero time indicating the start of the measurements sequence) starting the 612.1 ms pre-trigger period followed by the radar type 1 burst period.

Radar (Type 1) Pre-trigger period 612.1 ms


Type 1 burst period 25.705 ms

(The period of the 18 pulse burst includes [18 pulses *1.428mS PRI] = 25.704 ms. Then add 1 μ s pulse width for the final pulse.)

Channel Closing Transmission Time starts immediately after the last radar pulse is transmitted i.e. 637.8 ms after the start of the trace capture period.


Therefore, pulses seen after this 637.8 ms boundary are identified and totaled to provide an aggregate total of transmissions in order to determine whether the EUT is compliant with the Channel Closing Transmission Time requirements as described in MO&O FCC 06-96. In this case, it was found that an aggregate total of 0.62 ms of transmission time accrued. This value is found at the right hand side at the foot of the following plot (10s Total).

Channel Closing Transmission Time = 0.62 mSecs (limit 260 mSecs)

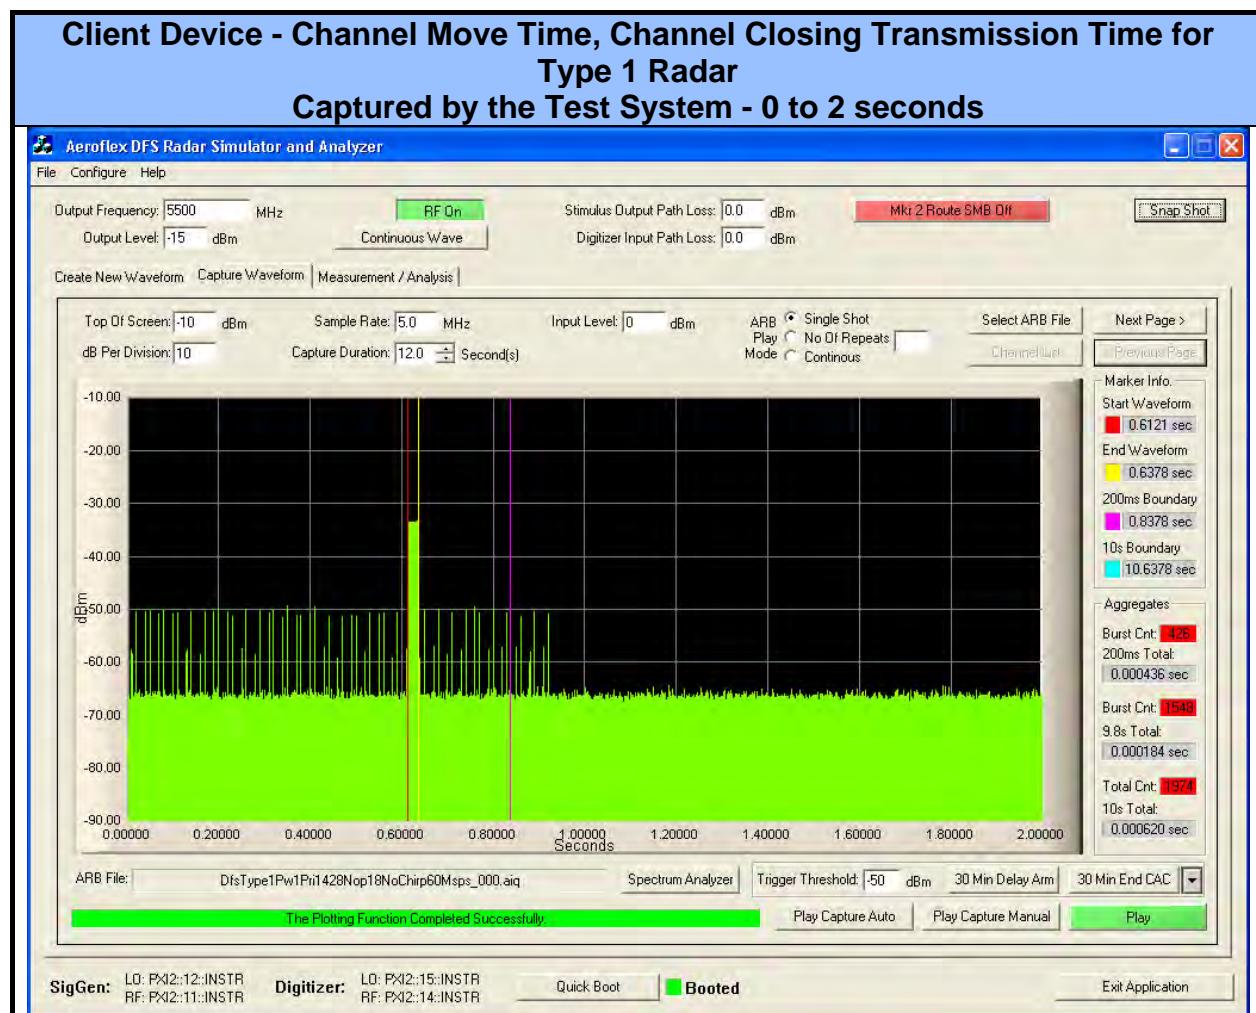

From the plot above it can be seen that the transmission activity within the 200 mS window is 0.436 mS (see 200 mS Total). From the following plots which shows all additional activity within the remainder of the 10 sec measurement window it can be determined that the aggregate transmission is 0.184 mS which is less than the 60 mS limit.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

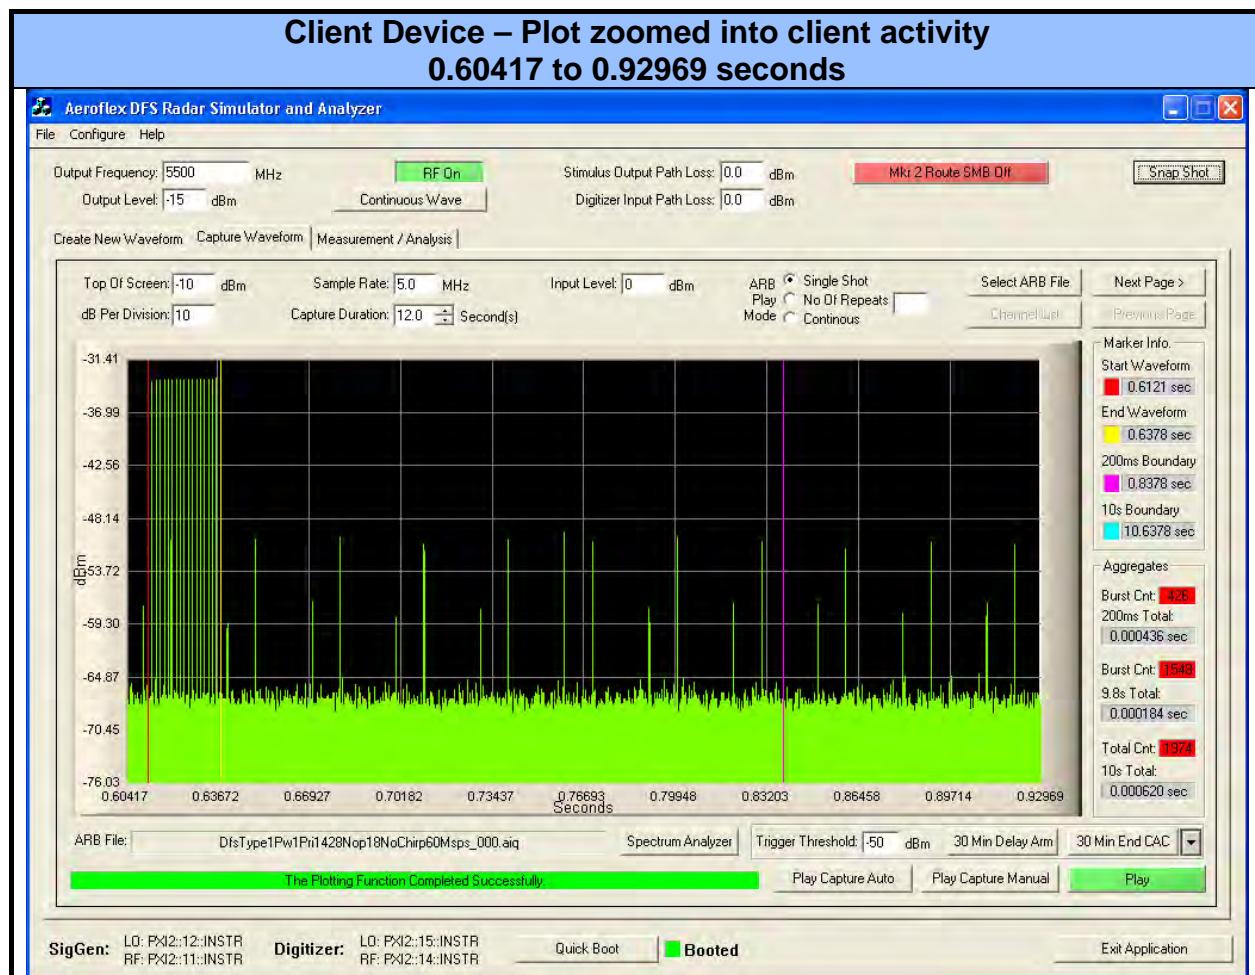


Last Transmitter Activity = 0.92969 Seconds

Last Radar Activity = 0.6378 Seconds


Channel Move Time = Last Transmitter Activity – Last Radar Activity = 0.92969 – 0.6378

Channel Move Time = 0.292 msecs (Limit 10 secs)


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

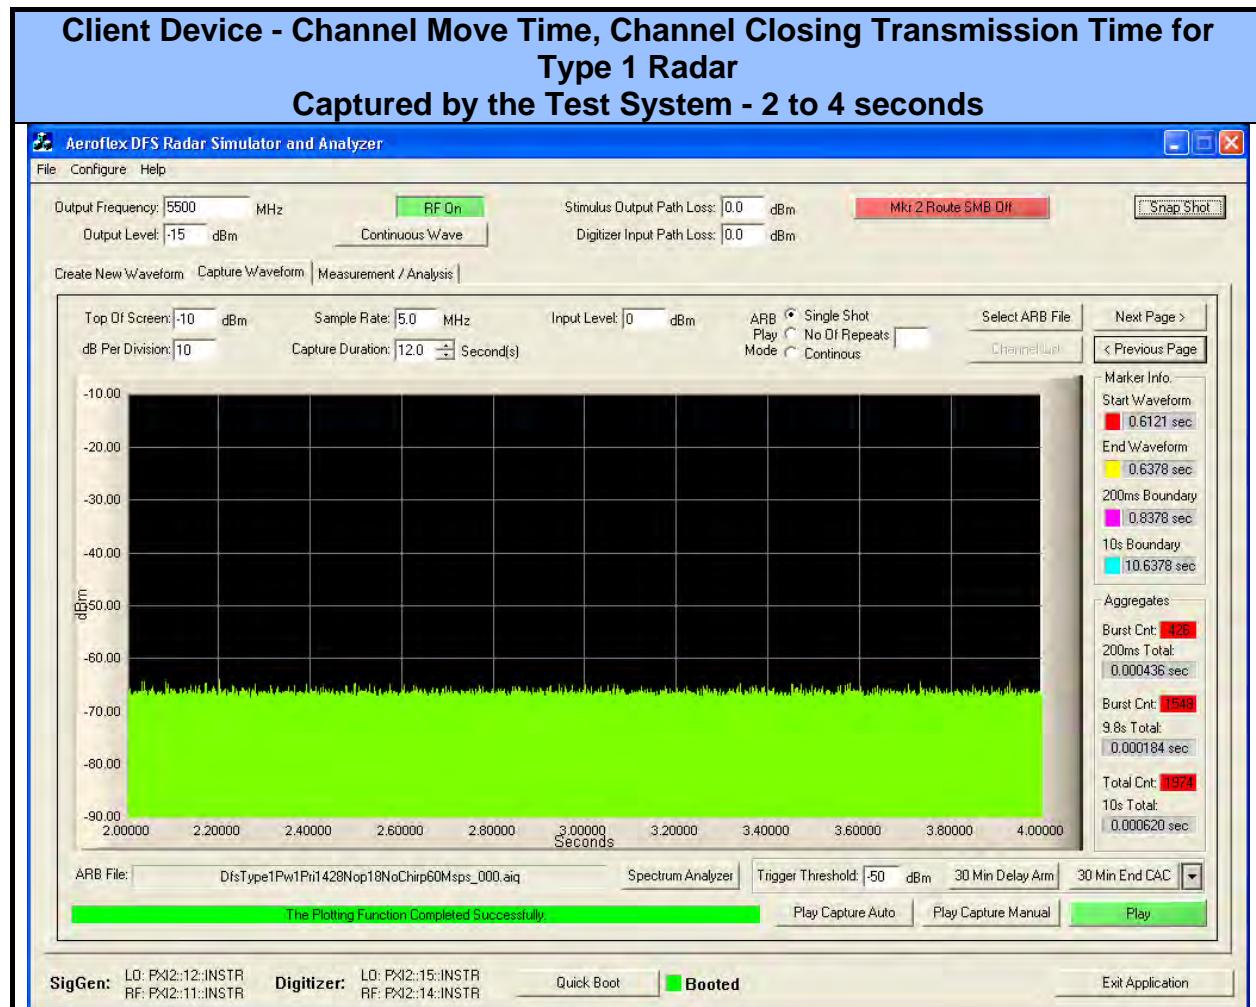


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

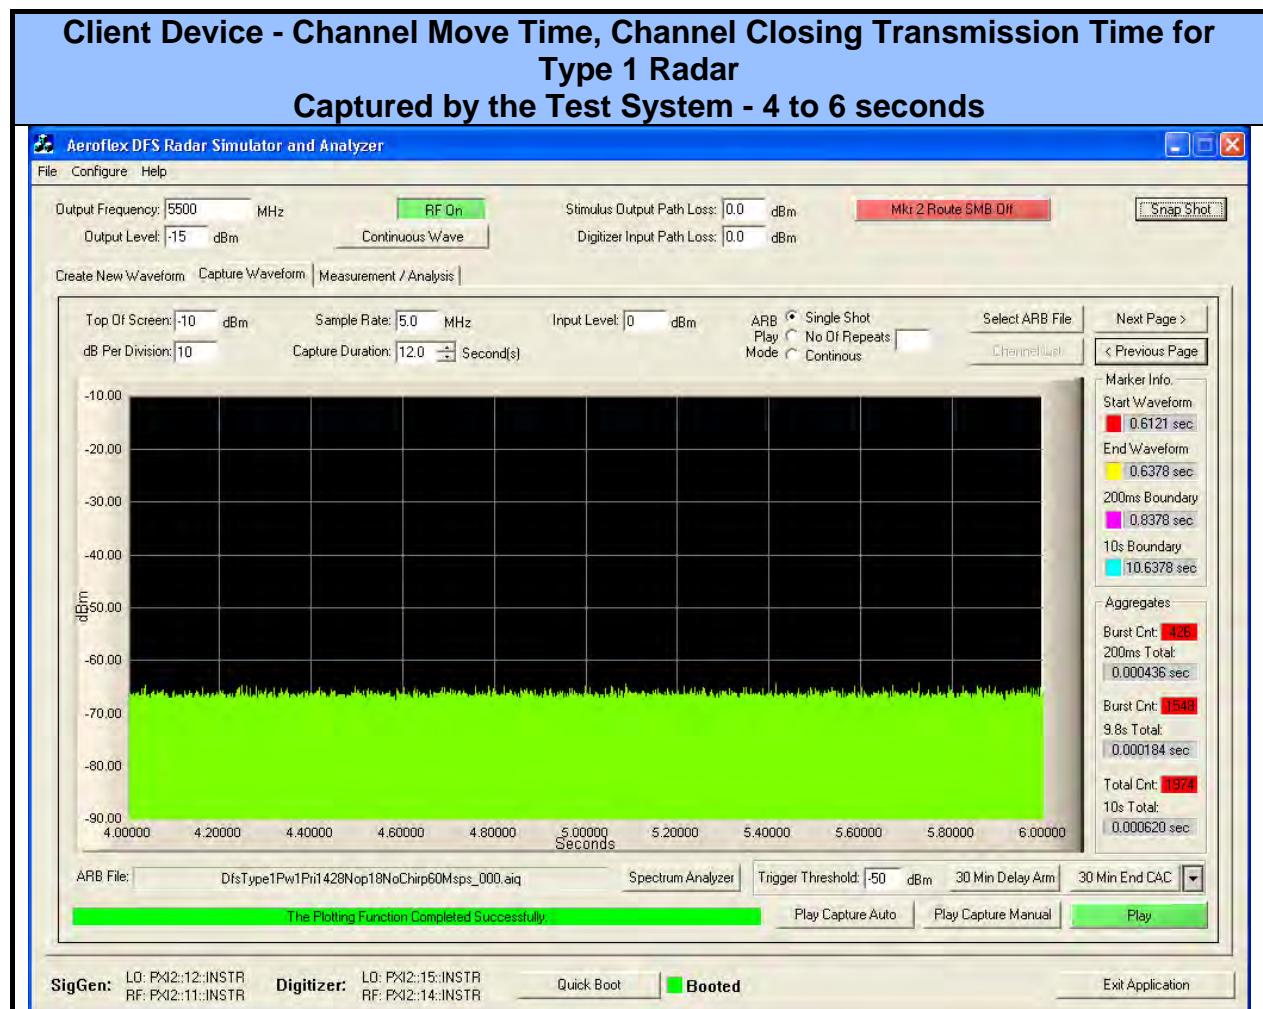


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

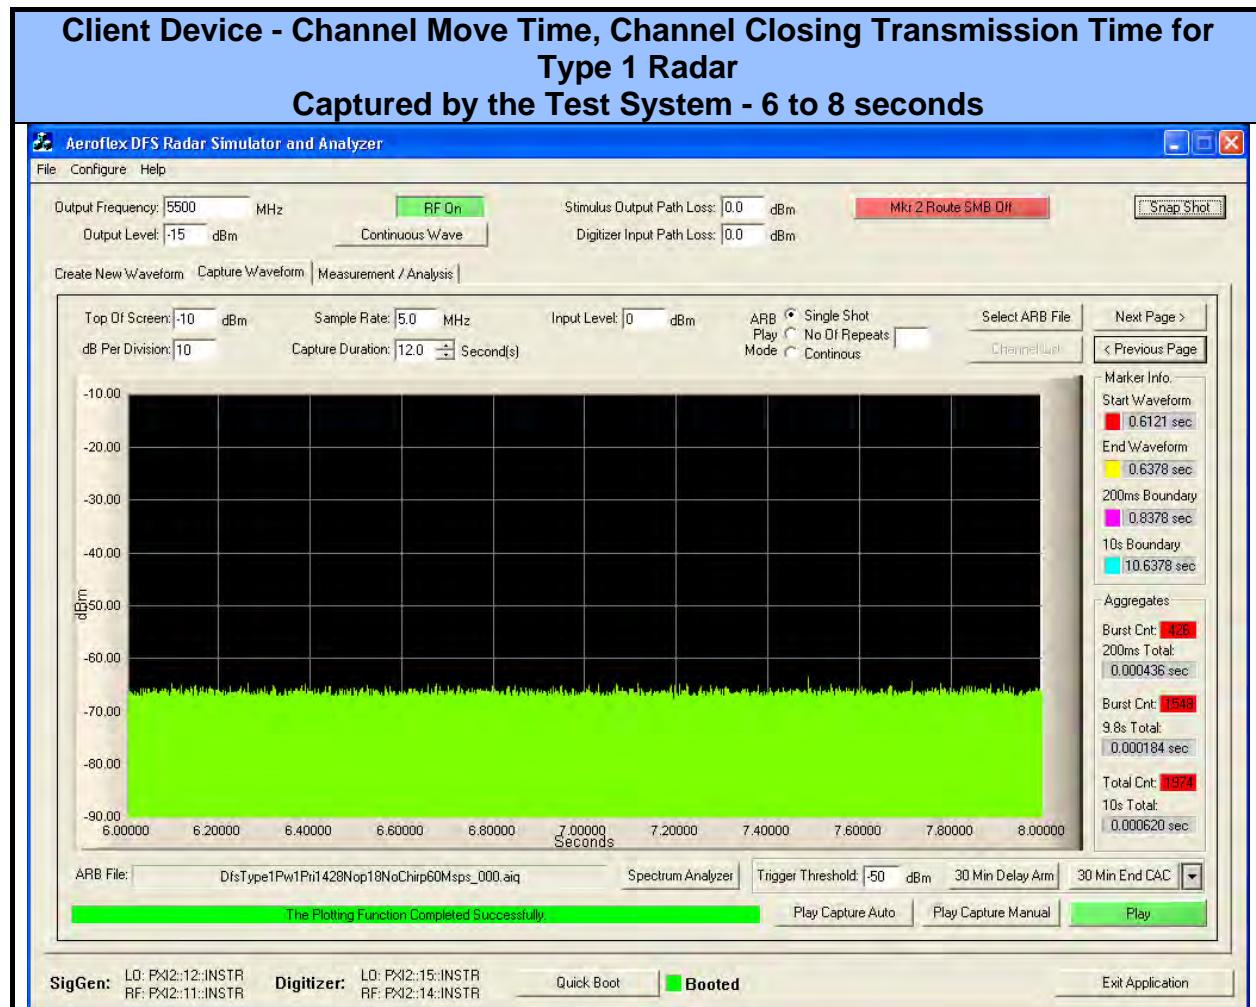

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

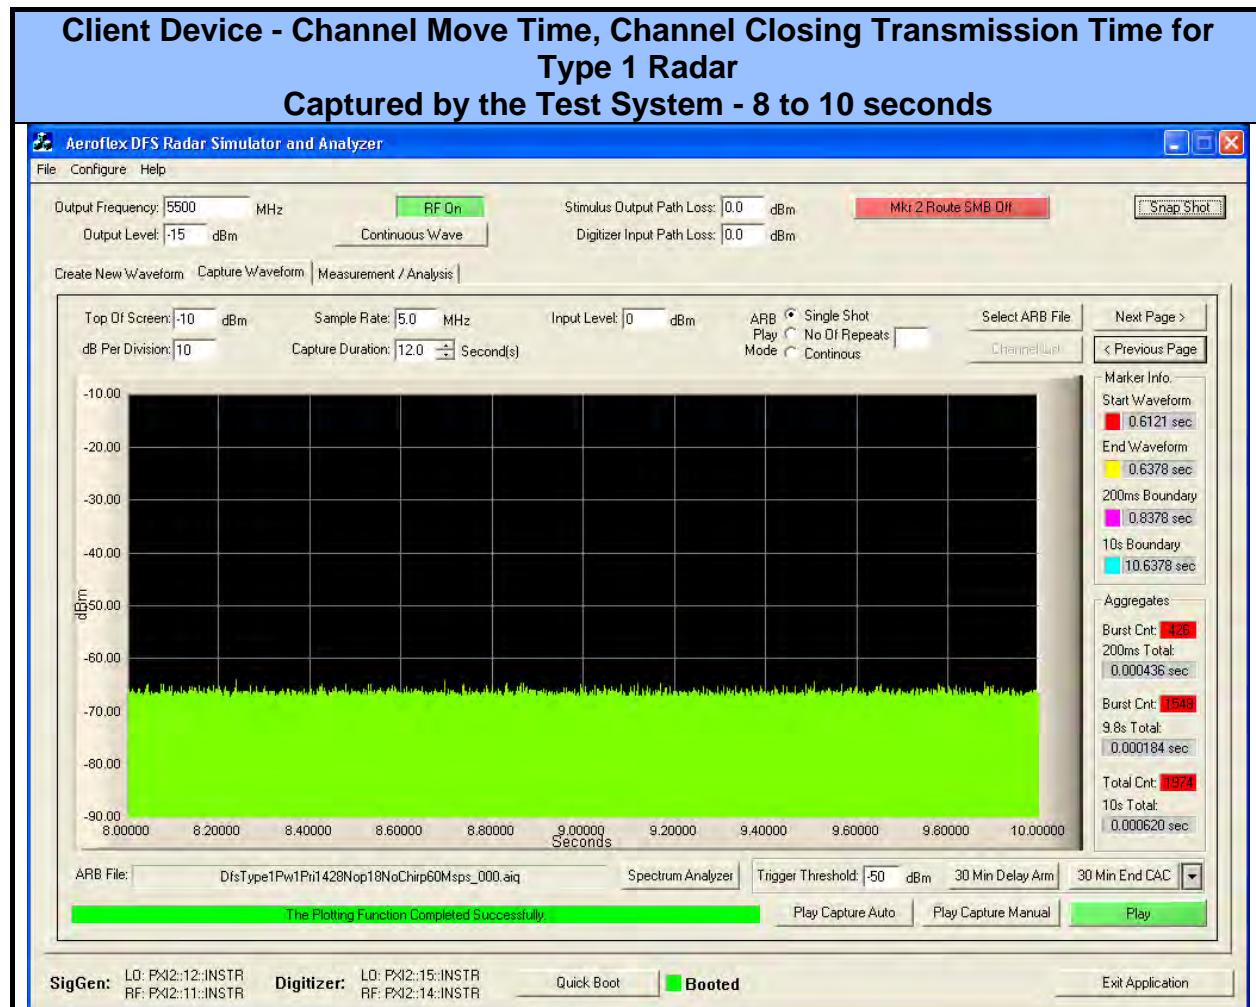


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

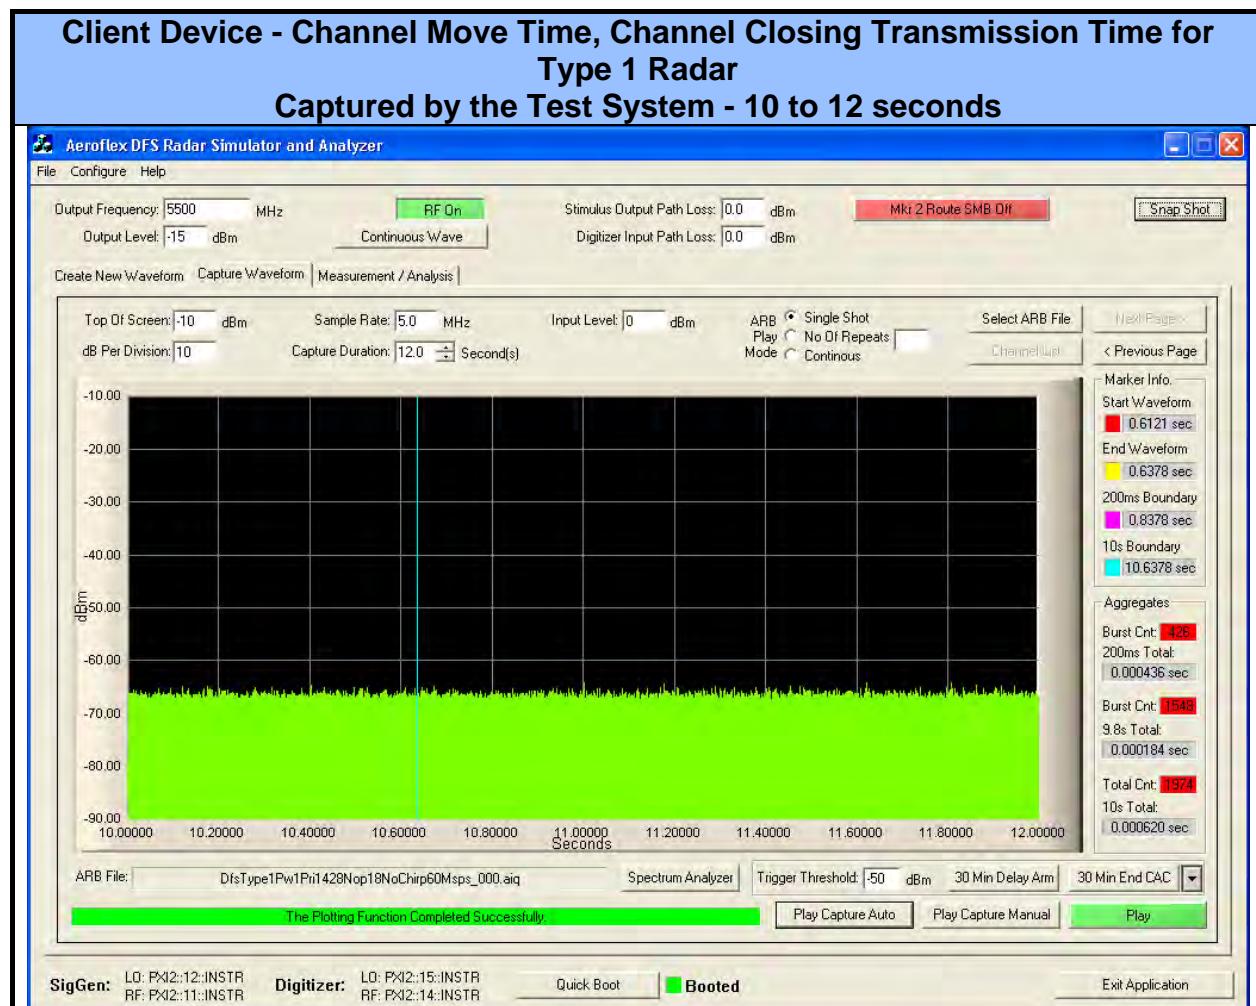

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

30 Minute Non-Occupancy Period

The EUT is monitored for more than 30 minutes following the channel close/move time to verify no transmissions resume on this Channel.

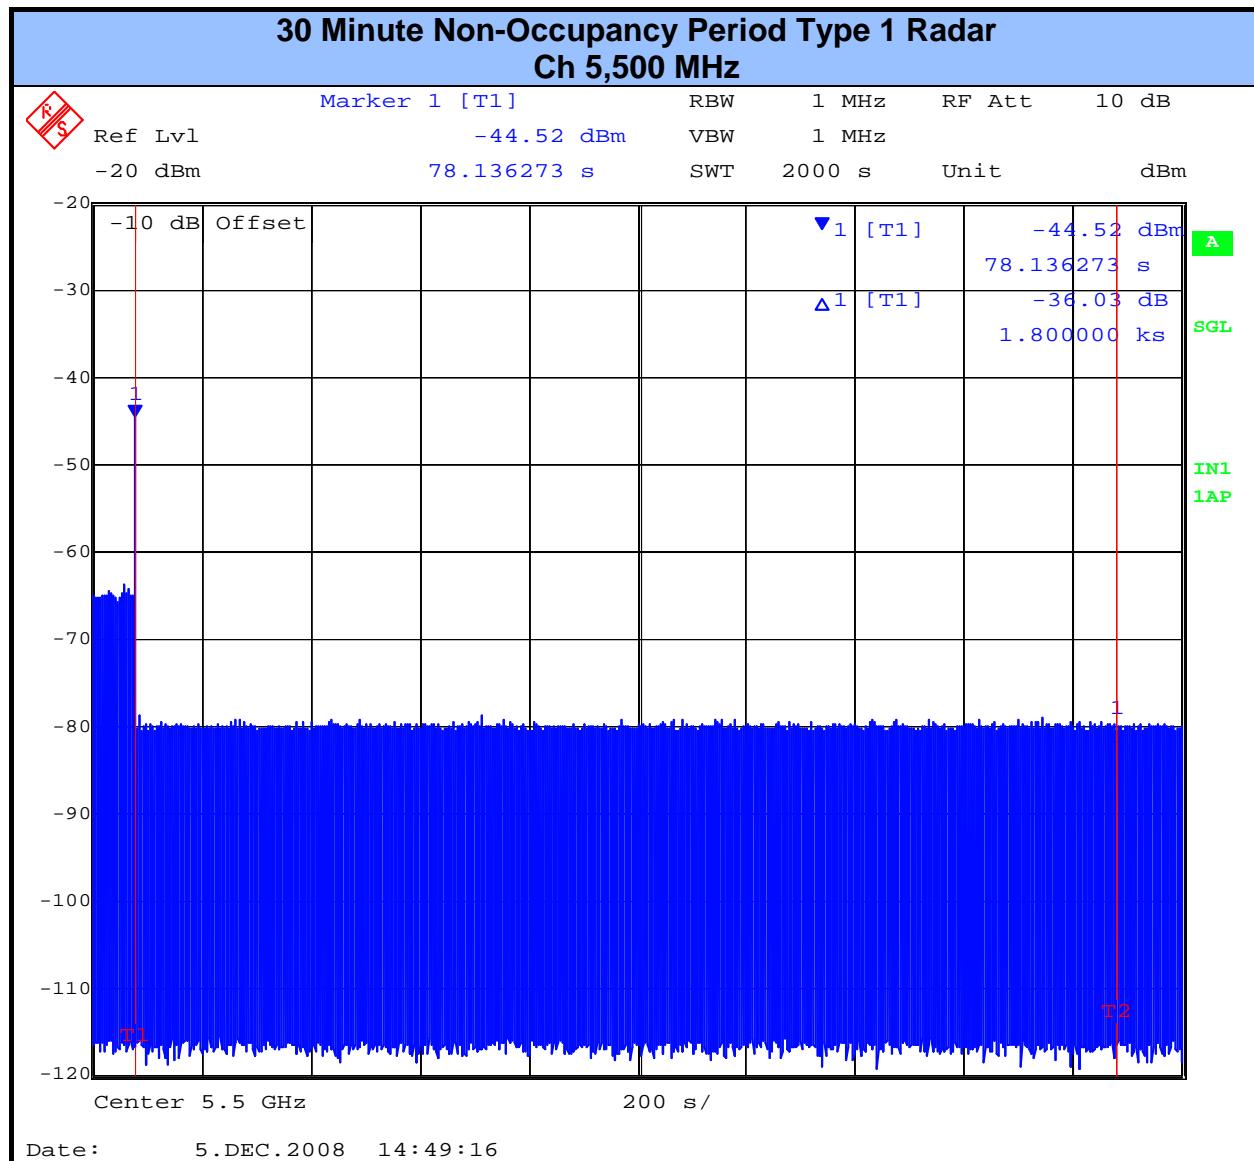

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 113 of 126

6.2.6. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the a Master device at 5,500 MHz. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

Total # of detections ÷ Total # of Trials × 100 = Probability of Detection

The Minimum number of trials, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 114 of 126

Verification of Detection 15 MHz Channel Spacing (Injection @ -5 MHz offset i.e. 5495 MHz)

| Trial # | Detection = ✓, No Detection = 0 | | | | | |
|-----------------------------|--|---------------|---------------|---------------|----------------------|----------------------|
| | Type 1 | Type 2 | Type 3 | Type 4 | Type 5 | Type 6 |
| 1 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 3 | ✓ | ✓ | ✓ | 0 | 0 | ✓ |
| 4 | ✓ | 0 | ✓ | ✓ | ✓ | ✓ |
| 5 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 6 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 7 | ✓ | ✓ | 0 | ✓ | ✓ | ✓ |
| 8 | ✓ | 0 | ✓ | ✓ | ✓ | ✓ |
| 9 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 11 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 12 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 13 | ✓ | 0 | ✓ | ✓ | ✓ | 0 |
| 14 | ✓ | ✓ | 0 | 0 | ✓ | 0 |
| 15 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 16 | ✓ | ✓ | 0 | 0 | ✓ | ✓ |
| 17 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 18 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 19 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 20 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 21 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 22 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 23 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 24 | ✓ | 0 | ✓ | ✓ | ✓ | ✓ |
| 25 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 26 | ✓ | ✓ | 0 | ✓ | ✓ | ✓ |
| 27 | ✓ | ✓ | ✓ | ✓ | 0 | ✓ |
| 28 | ✓ | 0 | ✓ | 0 | ✓ | ✓ |
| 29 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 30 | ✓ | ✓ | 0 | ✓ | 0 | ✓ |
| Detection Percentage | 100% (>60%) | 83% (>60%) | 86% (>60%) | 80% (>60%) | 90% (>80%) | 93% (>80%) |

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_d1 + P_d2 + P_d3 + P_d4) / 4 = (100\% + 83\% + 86\% + 80\%) / 4 = 87.25\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 115 of 126

Verification of Detection 10 MHz Channel Spacing (Injection @ -5 MHz offset i.e. 5495 MHz)

| Trial # | Detection = 1, No Detection = 0 | | | | | |
|-----------------------------|---------------------------------|---------------|---------------|-----------------|----------------|---------------|
| | Type 1 | Type 2 | Type 3 | Type 4 | Type 5 | Type 6 |
| 1 | √ | √ | √ | √ | √ | √ |
| 2 | √ | √ | √ | 0 | √ | √ |
| 3 | √ | √ | √ | √ | √ | √ |
| 4 | √ | 0 | √ | √ | √ | √ |
| 5 | √ | √ | √ | √ | √ | √ |
| 6 | √ | √ | √ | √ | √ | √ |
| 7 | √ | √ | 0 | √ | √ | √ |
| 8 | √ | √ | √ | √ | √ | √ |
| 9 | √ | √ | √ | 0 | √ | √ |
| 10 | √ | √ | √ | √ | √ | √ |
| 11 | √ | √ | √ | √ | √ | √ |
| 12 | √ | √ | √ | √ | √ | √ |
| 13 | √ | √ | √ | √ | √ | √ |
| 14 | √ | √ | √ | √ | √ | √ |
| 15 | √ | √ | √ | 0 | √ | √ |
| 16 | √ | 0 | 0 | √ | √ | √ |
| 17 | √ | √ | √ | √ | √ | √ |
| 18 | √ | √ | √ | √ | √ | √ |
| 19 | √ | 0 | √ | √ | √ | √ |
| 20 | √ | √ | √ | √ | √ | √ |
| 21 | √ | 0 | √ | √ | √ | √ |
| 22 | √ | √ | √ | 0 | √ | √ |
| 23 | √ | √ | √ | √ | √ | √ |
| 24 | √ | √ | √ | √ | √ | √ |
| 25 | √ | 0 | √ | √ | √ | √ |
| 26 | √ | √ | √ | √ | √ | √ |
| 27 | √ | √ | √ | √ | √ | √ |
| 28 | √ | √ | √ | √ | √ | 0 |
| 29 | √ | √ | √ | √ | √ | √ |
| 30 | √ | √ | √ | √ | √ | √ |
| Detection Percentage | 100% (>60%) | 83% (>60%) | 93% (>60%) | 86.7% (>60%) | 100% (>80%) | 83% (>80%) |

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_d1 + P_d2 + P_d3 + P_d4) / 4 = (100\% + 83\% + 93\% + 86.7\%) / 4 = 90.675 \% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 116 of 126

Verification of Detection 5 MHz Channel Spacing (Injection @ -5 MHz offset i.e. 5495 MHz)

| Trial # | Detection = ✓, No Detection = 0 | | | | | |
|-----------------------------|---------------------------------|-----------------|---------------|-----------------|-----------------|----------------|
| | Type 1 | Type 2 | Type 3 | Type 4 | Type 5 | Type 6 |
| 1 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 3 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 4 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 6 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 7 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 8 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 9 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 11 | ✓ | ✓ | 0 | ✓ | ✓ | ✓ |
| 12 | ✓ | 0 | 0 | ✓ | 0 | ✓ |
| 13 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 14 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 15 | ✓ | 0 | ✓ | ✓ | ✓ | ✓ |
| 16 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 17 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 18 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 19 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 20 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 21 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 22 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 23 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 24 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 25 | ✓ | ✓ | ✓ | 0 | ✓ | ✓ |
| 26 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 27 | ✓ | ✓ | 0 | ✓ | ✓ | ✓ |
| 28 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 29 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 30 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Detection Percentage | 100% (>60%) | 93.3% (>60%) | 90% (>60%) | 86.7% (>60%) | 96.7% (>80%) | 100% (>80%) |

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_d1 + P_d2 + P_d3 + P_d4) / 4 = (100\% + 93.3\% + 90\% + 86.7\%) / 4 = 92.5\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 117 of 126

Measurement Uncertainty Time/Power

| | | |
|-------------------------|---------|--------|
| Measurement uncertainty | - Time | 4% |
| | - Power | 1.33dB |

Traceability

Test Equipment Used

0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7. PHOTOGRAPHS

7.1. Radiated Spurious Emissions >1 GHz



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.2. Radiated Spurious Emissions <1 GHz




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.3. AC Wireline Emissions (150 kHz - 30 MHz)



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.4. General Measurement Test Set-Up #1

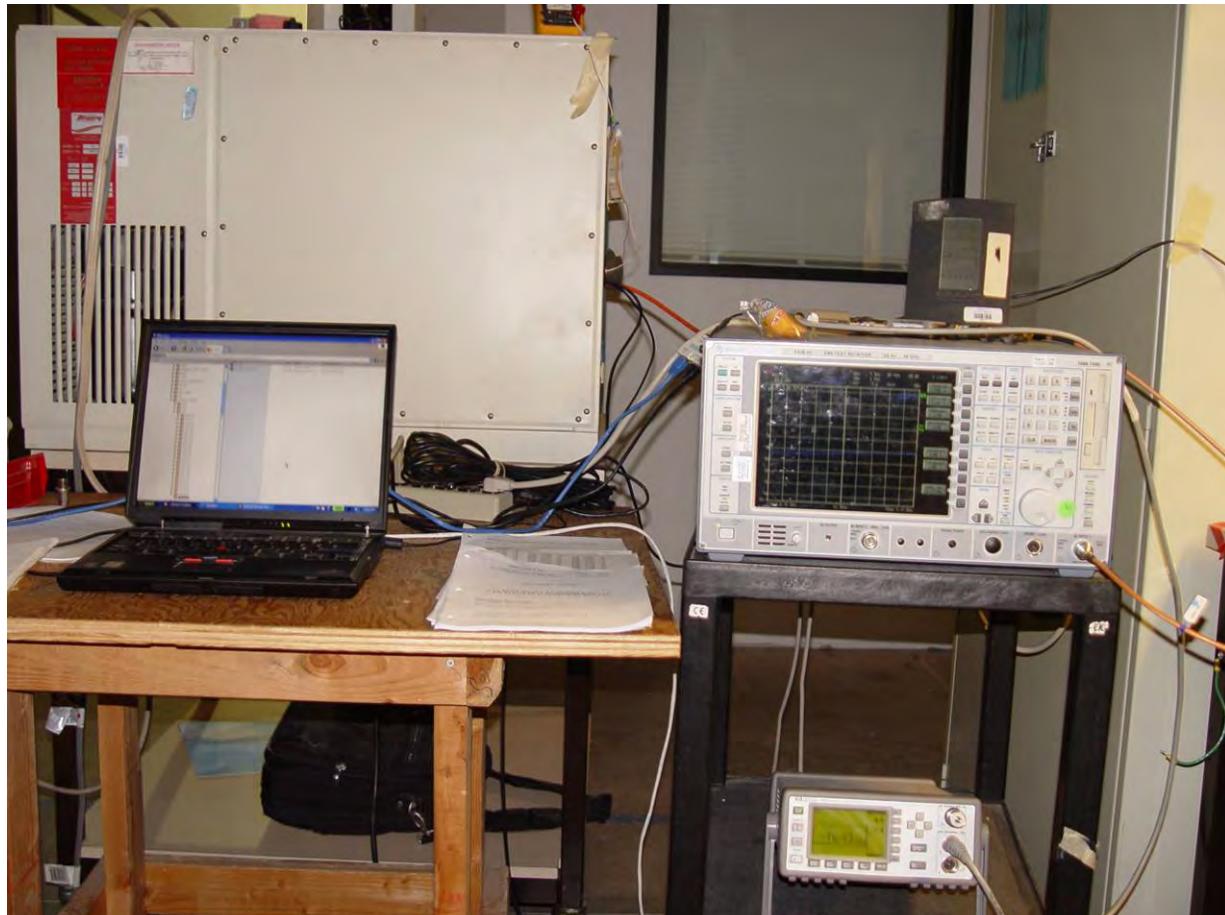

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


7.5. General Measurement Test Set-Up #2 Environmental Chamber



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

7.6. Dynamic Frequency Selection Test Set-Up

General DFS Test Setup

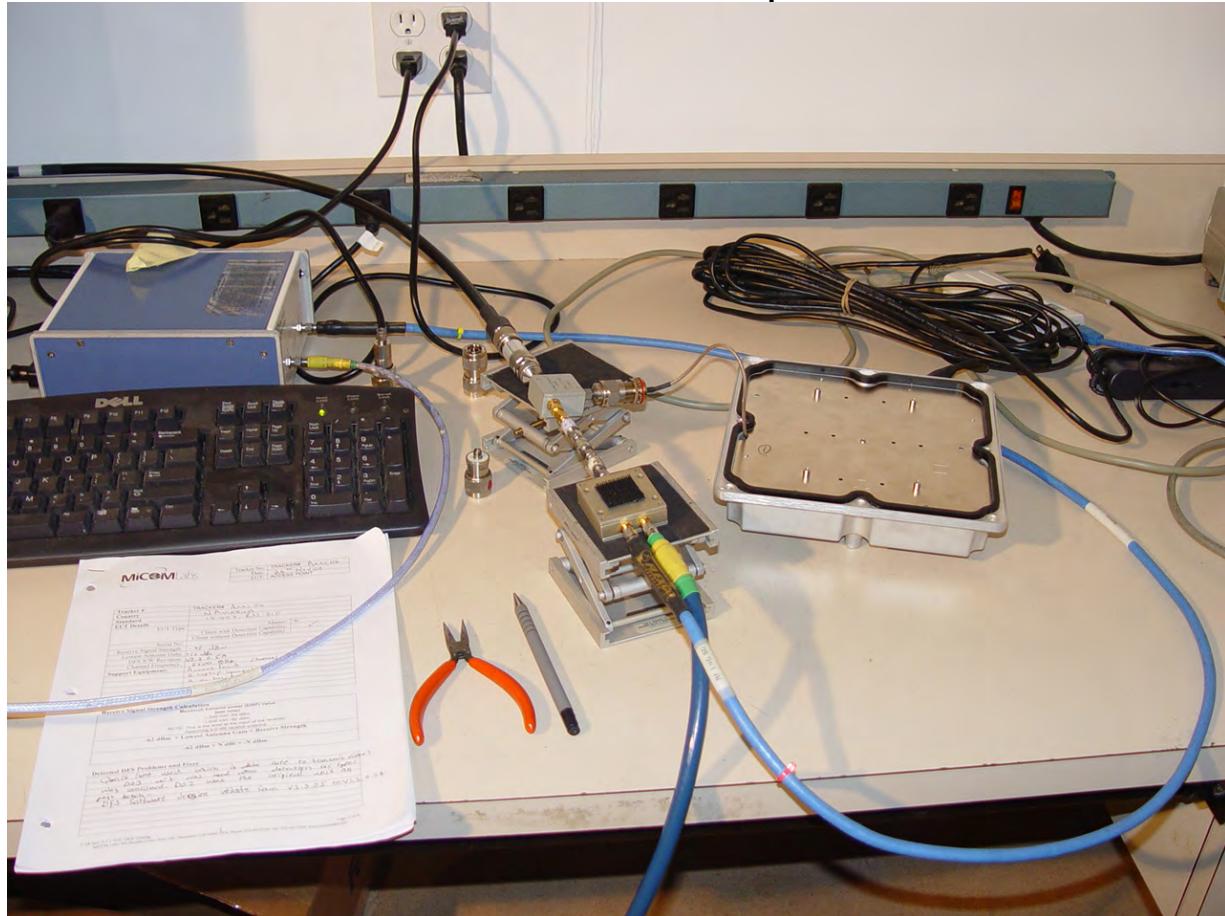


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

DFS Test Equipment



DFS Test Equipment

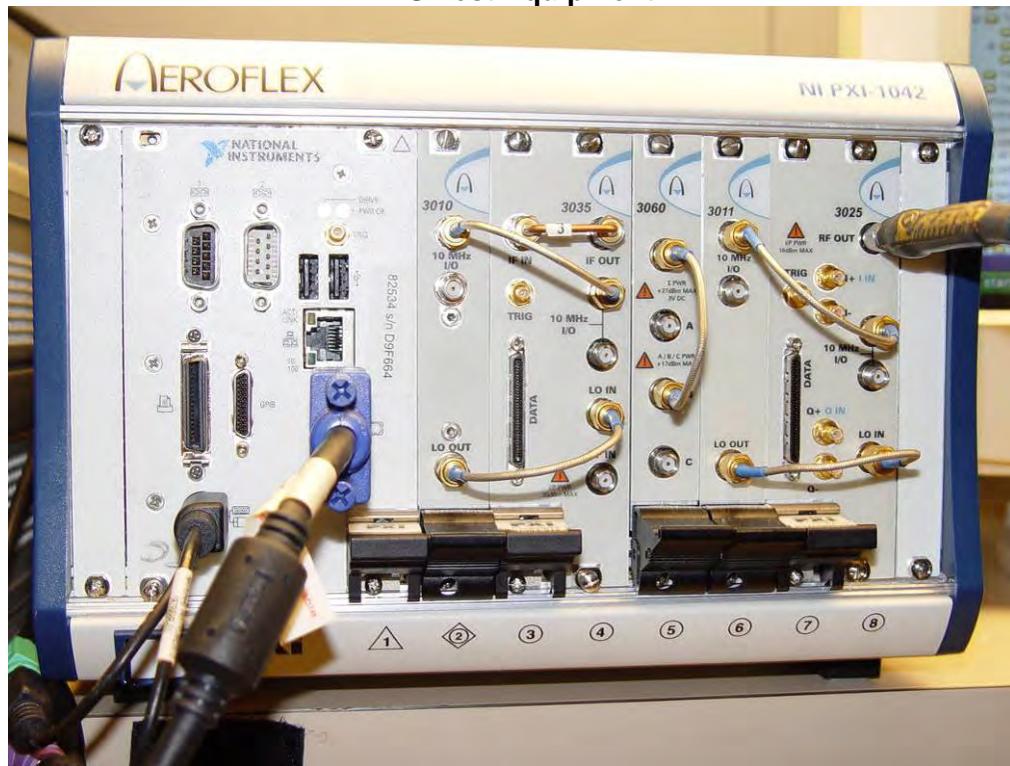

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Axxcelera Tri-Band CPE
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: AXXC06-A6 Rev A
Issue Date: 16th December 2008
Page: 125 of 126

8. TEST EQUIPMENT DETAILS

| Asset # | Instrument | Manufacturer | Part # | Serial # |
|---------|------------------------|------------------|---------------------------|-------------|
| 0088 | Spectrum Analyzer | Hewlett Packard | 8564E | 3410A00141 |
| 0134 | Amplifier | Com Power | PA 122 | 181910 |
| 0158 | Barometer /Thermometer | Control Co. | 4196 | E2846 |
| 0193 | EMI Receiver | Rhode & Schwartz | ESI 7 | 838496/007 |
| 0252 | SMA Cable | Megaphase | Sucoflex 104 | None |
| 0310 | 2m SMA Cable | Micro-Coax | UFA210A-0-0787-3G03G0 | 209089-001 |
| 0312 | 3m SMA Cable | Micro-Coax | UFA210A-1-1181-3G0300 | 209092-001 |
| 0313 | Coupler | Hewlett Packard | 86205A | 3140A01285 |
| 0314 | 30dB N-Type Attenuator | ARRA | N9444-30 | 1623 |
| 0070 | Power Meter | Hewlett Packard | 437B | 3125U11552 |
| 0116 | Power Sensor | Hewlett Packard | 8485A | 3318A19694 |
| 0117 | Power Sensor | Hewlett Packard | 8487D | 3318A00371 |
| 0184 | Pulse Limiter | Rhode & Schwartz | ESH3Z2 | 357.8810.52 |
| 0190 | LISN | Rhode & Schwartz | ESH3Z5 | 836679/006 |
| 0293 | BNC Cable | Megaphase | 1689 1GVT4 | 15F50B001 |
| 0301 | 5.6 GHz Notch Filter | Micro-Tronics | RBC50704 | 001 |
| 0302 | 5.25 GHz Notch Filter | Micro-Tronics | BRC50703 | 002 |
| 0303 | 5.8 GHz Notch Filter | Micro-Tronics | BRC50705 | 003 |
| 0304 | 2.4GHzHz Notch Filter | Micro-Tronics | -- | 001 |
| 0307 | BNC Cable | Megaphase | 1689 1GVT4 | 15F50B002 |
| 0335 | 1-18GHz Horn Antenna | ETS- Lindgren | 3117 | 00066580 |
| 0337 | Amplifier | MiCOM Labs | -- | -- |
| 0338 | Antenna | Sunol Sciences | JB-3 | A052907 |
| 0359 | Radar Signal Generator | Aeroflex | 3025, 3010, 3010/11 Opt 1 | |
| 0359 | Analyzer | Aeroflex | 3035, 3011, 3010/11 Opt 1 | |
| 0359 | PXI Chassis | Aeroflex | 82536 | |

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com