

Radio Transmitter FCC Part 90z Test Report

Product Name: ExcelMAX IDU CPE

Product Model Number: EID-CPE3410-C9

FCC ID: OJB-IDU-365

IC ID: 4570A-IDU-365

Test Report Number: AXX-IDU20090501

Test Report Revision: 2

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 1 of 119

L.L. 21, 2000	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Manufacturer: Axxcelera Broadband Wireless

1600 East Parham Road Richmond, VA 23228

POC: Chris Moritz

Equipment Identification: ExcelMAX IDU CPE

EID-CPE3410-C9

Test Engineer: Al Servais

Director: Chris Moritz

Report Number: AXX-IDU20090501

Type of Equipment: Information Technology Equipment (ITE)

Classification Achieved: Class B

Application of Regulations: FCC 47 CFR Part 90

Operating Voltage: +12 VDC

Frequency: DC

Power: 1210mW

Test Dates: 25 May 2009 to 21 July 2009

Core Standard	Guidance Standard	Guidance Standard	Guidance Standard
FCC 47 CFR Part 90	FCC 47 CFR Part 2	CISPR 16-4-2:2003	CISPR 16-1

The Electromagnetic Compatibility test and documented data described in this report has been performed and recorded by Axxcelera Broadband Wireless Product Compliance Engineering, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC team, I hereby declare that a sample of one, of the equipment described above, has been shown to be compliant with the Radio Transmitter requirements of the stated regulations and standards based on these results.

This report must not be used to claim product endorsement by any agency of the U.S. Government, the European Union, The International Standards Organization or any Foreign Government or representative of a Foreign Government. This report contains data that are not covered by accreditation. This report shall not be reproduced except in full, without the written authorization of Axxcelera Broadband Wireless.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 2 of 119

July 21, 2009

Radio Test Report for EID-CPE3410-C9

Revision: 2

TABLE OF CONTENTS

I Ł	AECUTIVE SUMMARY	
1.1 1.2 1.3 1.4	SCOPE OBJECTIVE SUMMARY OF TEST RESULTS MEASUREMENT UNCERTAINTIES	
2 T	EST FACILITY INFORMATION	10
2.1 2.2 2.3	Transmitter Test Facility Measurement System Test Personnel	10
3 P	RODUCT INFORMATION	12
3.2 3.3	EQUIPMENT CONFIGURATION	
4 R	F TESTING	15
4.1 4.2 4.3 4.4 4.5 4.6	RADIATED EMISSIONS SPECIFICATION LIMITS AND SAMPLE CALCULATIONS FINAL TEST DATA EUT TEST CONFIGURATION PHOTOS EUT EXTERNAL PHOTOS EUT LABEL AND LABEL LOCATION	
5 T	EST EQUIPMENT USE LIST	118
5.1	TEST EQUIPMENT LIST	118
DECL	ARATION OF CONFORMITY	119
47 (CFR 8 90	119

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 3 of 119



Table of Figures

Figure 1 – Photo of ExcelMAX IDU CPE	
Figure 2 – EUT Front Photo	
Figure 3 – EUT Front Photo	
Figure 4 – EUT Side Photo	
Figure 5 – EUT Bottom Photo	
Figure 6 – EUT Bottom Photo	
Figure 7 – FCC Label and Location	

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 4 of 119

July 21, 2009

Radio Test Report for EID-CPE3410-C9

Revision: 2

List of Tables

Table 1 – FCC Part 90 Test Results.			8
Table 2 – Table of Measurement Un	certainty		9
Table 3 – Table of Test Personnel			11
Table 4 – Table of Radio Specificati	ons		
Table 5 – Table of EUT Assembly a	nd Subassemblies		
Table 6 – Table of Support Equipme	ent		
Table 7 – EUT Interfaces			
Table 8 – EUT Test Configurations.			14
Table 9 – RF Test Data Table of Con	mpliance		20
Table 10 – 99% Bandwidth BPSK D			
Table 11 – 99% Bandwidth QPSK D	Oata Table		31
Table 12 – 99% Bandwidth 16QAM			
Table 13 – 99% Bandwidth BPSK D			
Table 14 – RF Test Data EIRP			
Table 15 – 3653.50MHz PSD, BPSk			
Table 16 – 3654.50MHz PSD, BPSK			
Table 17 – 3655.50MHz PSD, BPSK			
Table $18 - 3662.5 MHz$ PSD, BPSK			
Table $19 - 3662.5$ MHz PSD, BPSK			
Table $20 - 3662.5 MHz$ PSD, BPSK			
Table 21 – 3675MHz PSD, BPSK at			
Table 22 – 3675MHz PSD, BPSK at			
Table 23 – 3675MHz PSD, BPSK at			
Table 24 – 3653.50MHz PSD, QPSF			
Table 25 – 3654.50MHz PSD, QPSF			
Table 26 – 3655.50MHz PSD, QPSF			
Table 27 – 3662.5MHz PSD, QPSK			
Table 28 – 3662.5MHz PSD, QPSK			
Table 29 – 3662.5MHz PSD, QPSK			
Table 30 – 3675MHz PSD, QPSK at			
Table 31 – 3675MHz PSD, QPSK at			
Table 32 – 3675MHz PSD, QPSK at			
Table 33 – 3653.50MHz PSD, 16QA			
Table 34 – 3654.50MHz PSD, 16QA			
Table 35 – 3655.50MHz PSD, 16QA			
Table 36 – 3662.5MHz PSD, 16QA			
Table 37 – 3662.5MHz PSD, 16QAI			
Table 38 – 3662.5MHz PSD, 16QAl			
Table 39 – 3675MHz PSD, 16QAM			
Table 40 – 3675MHz PSD, 16QAM			
Table 41 – 3675MHz PSD, 16QAM			
Author: Al Servais Issued: Tuesday, July 21, 2009	Approval: Chris Moritz Office: Richmond	Laboratory: RIC	AXX-IDU20090501 Sheet 5 of 119



July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
Table $42 - 3653.50$ MHz PSD, 6	4QAM at 3.5MHZ BW	90
Table $43 - 3654.50$ MHz PSD, 6	4QAM at 5MHZ BW	91
Table $44 - 3655.50$ MHz PSD, 6	4QAM at 7MHZ BW	92
Table 45 – 3662.5MHz PSD, 64	QAM at 3.5MHZ BW	93
Table 46 – 3662.5MHz PSD, 64	QAM at.5MHZ BW	94
Table 47 – 3662.5MHz PSD, 64	QAM at 7MHZ BW	95
Table 48 – 3675MHz PSD, 64Q	AM at 3.5MHZ BW	96
Table 49 – 3675MHz PSD, 64Q	AM at 5MHZ BW	97
Table 50 – 3675MHz PSD, 64Q	AM at 7MHZ BW	98
Table 51 – 3653.50MHz Band B	Edge Spurious 64QAM	99
Table 52 – 3654.50MHz Band B	Edge Spurious 64QAM	100
Table 53 – 3655.5MHz Band Ed	lge Spurious 64QAM	
Table 54 – Conducted Spurious	9KHz to 150KHz BPSK	
Table 55 – Conducted Spurious	150KHz to 30MHz BPSK	
Table 56 – Conducted Spurious	30MHz to 1GHz BPSK	
	1GHz to 26GHz BPSK	
Table 58 – Radiated Spurious 10	GHz to 18GHz CF 3653.5 BPSK.	
	GHz to 18GHz CF 3662.5 BPSK.	
	GHz to 18GHz CF 3675 BPSK	
Table 61 – Radiated Spurious 30	OMHz to 1GHz CF 3653.5 BPSK	
Table 62 – AC Power line Cond	lucted Emissions CF 3653.5 BPSI	X110
Table 63 – Frequency Stability.		111
Table 64 – MPE		
Table 65 – Axxcelera T&M List	t	

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 6 of 119



July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision. 2

1 Executive Summary

1.1 Scope

Testing was performed to FCC 47 CFR Part 90 on the ExcelMAX IDU CPE and the results are documented in this report. The equipment was tested in accordance with the procedures specified in Sections 2.1046 to 2.1057 of the FCC 47 CFR Part 90. TIA-603 was also used as a test procedure guideline to perform some of the required tests.

The intentional radiator above was tested in a simulated typical installation to demonstrate compliance with the relevant FCC & RSS performance and procedural standards.

Final system data was gathered in a mode that tended to maximize emissions by varying orientation of EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

1.2 Objective

The primary objective of the manufacturer is compliance with the FCC 47 CFR Part 90. Certification of these devices is required as a prerequisite to marketing as defined in Section 2.1033.

Certification is a procedure where the manufacturer or a contracted laboratory makes measurements and submits the test data and technical information to FCC. The FCC issues a grant of equipment authorization and a certification number upon successful completion of their review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product that may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 7 of 119



July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision. 2

1.3 Summary of Test Results

Table 1 – FCC Part 90 Test Results

Measurement Requirement	Test Method(s)	Test Parameters	Result
99% Occupied Bandwidth	2.1049	99% Bandwidth Measurement	Complies
Radiated RF power output (ERP/EIRP)	2.1046 / 90.1321	Modulated Output Power Test	Complies
Peak Power	2.1046 / 90.1321	Conducted Peak Power Spectral Density	Complies
Spurious emissions at antenna Port	2.1051/90.1323	Emission Limits and/or Unwanted Emission 30MHz – 40GHz (Antenna Conducted)	Complies
Field strength of spurious radiation	2.1053 / 90.1323	Radiated Spurious Emissions 30MHz – 40GHz	Complies
Frequency stability	2.1055 / 90	Frequency Vs. Temperature	Complies
Frequency stability	2.1055 / 90	Frequency Vs. Voltage	Complies
Exposure to Mobile devices	1.1307, 1.1310, 2.1091 & 2.1093	Exposure of Humans to RF Fields	Complies

1.3.1 Abstract of Deviation (non-compliant)

There were no deviations to the standard and test procedure.

1.3.2 Modifications to ExcelMAX IDU CPE

There were no modifications made to the *ExcelMAX IDU CPE* during the course of RF emissions testing conducted on 25 May 2009.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 8 of 119



L.L. 21, 2000	Radio Test Report for	Raniziana 2
July 21, 2009	EID-CPE3410-C9	Revision: 2


1.4 Measurement Uncertainties

ISO Guide 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of k=2, which gives a level of confidence of approximately 95%. The levels were found to be below levels of *U*cispr and therefore no adjustment of the data for measurement uncertainty is required.

Table 2 – Table of Measurement Uncertainty

Measurement Type	Frequency Range (MHz)	Calculated Uncertainty (dB)
Conducted Emissions	0.15 to 30	± 2.4
Radiated Emissions	30 to 1000	±3.6

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 9 of 119



2 Test Facility Information

2.1 Transmitter Test Facility

The *ExcelMAX IDU CPE* was evaluated for verification between 25 May 2009 and 21 July 2009 at Axxcelera Broadband Laboratories located in Richmond, VA.

Conducted RF testing at the antenna port is performed in conformance with Section 2 of FCC Rules. Measurements are made with the EUT connected to a spectrum analyzer through an attenuator to prevent overloading the analyzer.

Radiated and Conducted Emissions testing was performed by a third party lab and the test results can be found in another report.

Radiated measurements are performed in an open field environment or Anechoic Chamber. The test site is maintained free of conductive objects within the CISPR 16-1 defined elliptical area. Radiated Emissions testing was performed by a third party lab and the test results can be found in another report.

2.2 Measurement System

2.2.1 RECEIVER SYSTEM

An EMI receiver as specified in CISPR 16-1 is used for emissions measurements. The receivers are capable of measuring over the frequency range of 9 kHz up to 2000MHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasipeak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the particular detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. If average measurements above 1000MHz are performed, the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz is used.

2.2.2 INSTRUMENT CONTROL COMPUTER

A personal computer is utilized to record the receiver measurements of the field strength at the antenna, which is then compared directly with the appropriate specification limit. The receiver is programmed with appropriate factors to convert the received voltage into filed strength at the antenna. Results are printed in a graphic and/or tabular format, as appropriate.

The test receiver also provides a visual display of the signal being measured.

2.2.3 PEAK POWER METER

A peak power meter and thermister mount may be used for output power measurements from transmitters as they provide a broadband indication of the power output.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 10 of 119



L.L. 21, 2000	Radio Test Report for	Raniziana 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

2.2.4 FILTERS/ATTENUATORS

External filters and precision attenuators are often connected between the receiving antenna or EUT and the receiver. This eliminates saturation effects and non-linear operation due to high amplitude transmitters and transient events.

2.2.5 INSTRUMENT CALIBRATION

All test equipment is regularly checked to ensure that performance is maintained in accordance with the manufacturer's specifications. All antennas are calibrated at regular intervals with respect to tuned half-wave dipoles. Refer to the test equipment use section of this report for instrumentation used and calibration dates for the equipment.

2.3 Test Personnel

During the testing performed on 25 May 2009 on the ExcelMAX IDU CPE the following personnel were present for the evaluation.

Table 3 – Table of Test Personnel

Name	Company	Purpose
Al Servais	Axxcelera Broadband Wireless	Test Operator

July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

3 Product Information



Figure 1 – Photo of ExcelMAX IDU CPE

The Axxcelera Broadband Wireless *ExcelMAX IDU CPE* IDU (Indoor Unit) is designed to provide high speed data for point to multipoint applications. The EUT would normally be placed in a fixed indoor location as customer premise equipment. The EUT was treated as table-top equipment during testing. The electrical rating of the EUT is rated +12 VDC at 1210mW MAX.

The radio can be configured to operate using multiple modulation schemes at various bandwidths. The radio is a TDD platform designed to operate in the 3.65GHz band for WiMAX systems. An overview of the technical specifications follows.

Table 4 – Table of Radio Specifications

TRANSMITTER		
Equipment Type:	Subscriber Station	
Intended Operating Environment:	Residential, Commercial and Light Industry	
Power Supply Requirement:	120 Vac, 60 Hz using external power supply (Manufacturer: UNIFIVE, Model UIB324-12, Input: 120-240Vac, Output: 12 Vdc@2A)	
RF Output Power Rating:	-22.7 to 21.4 dBm (total Peak EIRP power in 3.5 MHz BW) -22.7 to 23 dBm (total Peak EIRP power in 5 MHz BW) -23.4 to 24.5 dBm (total Peak EIRP power in 7 MHz BW)	
Operating Frequency Range:	3653.50-3675 MHz (3.5 MHz BW) 3654.50-3675 MHz (5.0 MHz BW) 3655.50-3675 MHz (7.0 MHz BW)	
RF Output Impedance:	50 Ohms	
Channel Spacing:	3.5, 5 and 7MHz	
Occupied Bandwidth (99%):	3.07 MHz (3.5 MHz Ch) 4.46 MHz (5.0 MHz Ch) 6.23 MHz (7.0 MHz Ch)	
Modulation:	Auto-select BPSK, QPSK, 16QAM, 64QAM	

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 12 of 119



July 21, 2009	Radio Test Report for	Revision: 2
* '	EID-CPE3410-C9	

TRANSMITTER				
Equipment Type:	Subscriber Station			
Emission Designation*:	3M07DXW (for 3.5 MHz BW) 4M46W7D (for 5.0 MHz BW) 6M23DXW (for 7.0 MHz BW)			
Antenna Connector Type:	Integral			
Antenna Description:	Manufacturer: Axxcelera Type: OMNI Model: 360deg Frequency Range: 3.3-3.8 GHz Gain: 10.0 dBi			
Operating Temperature:	-5 °C to +40 °C			

The sample was received on 25 May 2009 and was tested between 25 May 2009 and 21 July 2009. The EUT consisted of the following component(s):

Table 5 – Table of EUT Assembly and Subassemblies

Manufacturer	Model	Description	Serial Number	FCC ID
Axxcelera Broadband Wireless	EID-CPE3410-C9	ExcelMAX IDU CPE	FCC1	OJB-SSIDU-365
UNIFIVE	UIB324-12	Power Supply	703-0350433	N/A

3.1.1 EUT ANTENNA DETAILS

The EUT is designed to be installed at a workstation or other fixed point within the home, office, etc. The antenna is a printed Omni antenna with a nominal 10dBi gain.

3.1.2 ENCLOSURE Details

The EUT enclosure is primarily constructed of plastic. It measures approximately 37 cm wide by 7 cm deep by 40 cm high.

3.1.3 SUPPORT EQUIPMENT

The following equipment was used as local support equipment for emissions testing: Table 6 – Table of Support Equipment

Manufacturer	Model	Description	Serial Number
Dell	E5500	PC	29589

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 13 of 119



L.L. 21, 2000	Radio Test Report for	Raniziana 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

3.1.4 EUT INTERFACE PORTS

The I/O cabling configuration during emissions testing was as follows:

Table 7 – EUT Interfaces

Port	Connected to	Description	Shielding	Length (m)
RJ-45	Test PC	Ethernet 10/100	YES	1m
RF	T&M	RF Port connected to Test Equipment	YES	.5m

3.2 Equipment Configuration

Table 8 – EUT Test Configurations

Modulation	Lower Frequency	Middle Frequency	Upper Frequency	Nominal Bandwidth (MHz)	Maximum Power
BPSK	3653.50MHz	3662.5MHz	3675MHz	3.5	21.4dBm
QPSK	3653.50MHz	3662.5MHz	3675MHz	3.5	21.4dBm
16QAM	3653.50MHz	3662.5MHz	3675MHz	3.5	21.4dBm
64QAM	3653.50MHz	3662.5MHz	3675MHz	3.5	21.4dBm
BPSK	3654.50MHz	3662.5MHz	3675MHz	5	23dBm
QPSK	3654.50MHz	3662.5MHz	3675MHz	5	23dBm
16QAM	3654.50MHz	3662.5MHz	3675MHz	5	23dBm
64QAM	3654.50MHz	3662.5MHz	3675MHz	5	23dBm
BPSK	3655.50MHz	3662.5MHz	3675MHz	7	24.5dBm
QPSK	3655.50MHz	3662.5MHz	3675MHz	7	24.5dBm
16QAM	3655.50MHz	3662.5MHz	3675MHz	7	24.5dBm
64QAM	3655.50MHz	3662.5MHz	3675MHz	7	24.5dBm

3.3 Operating Mode

During testing the *ExcelMAX IDU CPE* was set to continuously transmit at the specified data rate and on the specified channel at maximum output power with 100% duty cycle in burst mode.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 14 of 119

July 21, 2009	Radio Test Report for	Revision: 2
•	EID-CPE3410-C9	

4 RF Testing

4.1 Radiated Emissions

Testing was performed in accordance with FCC 47 CFR Part 90. This test measures the levels emanating from the *ExcelMAX IDU CPE*, thus evaluating the potential for the *ExcelMAX IDU CPE* to cause radio frequency interference to the infrastructure.

4.1.1 Test Methodology

For Transmitters with detachable antenna, direct measurements for output power, modulation characterization, occupied bandwidth, and frequency stability are performed with the antenna port of the EUT connected to either of the power meter, modulation analyzer, or spectrum analyzer via a suitable attenuator and/or filter. The attenuators and/or filters are used to ensure that the transmitter fundamental will not overload the front end of the measurement instrument.

4.1.1.1 Power Measurement (Conducted Method)

The following procedure was used for transmitters that do use external antennas.

- 1) Set the EUT to maximum power and to the lowest channel.
- 2) Either a power meter or a spectrum analyzer was used to measure the power output.
- 3) If a spectrum analyzer was used a resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz was used to measure the power output. Corrected for any external attenuation used for the protection of the input of analyzer. Use video averaging with a 100-sample rate.
- 4) If a power meter was used, corrected for any external attenuation used for the protection of the input of the sensor head. Also set the power sensor correction by setting up the frequency range that will be measured.
- 5) Repeat this for the middle and high channel and all modulations that will be used and all output ports used for transmission

4.1.1.2 Occupied Bandwidth (Conducted Method)


Either for analog, digital, or data modulations, occupied bandwidth was performed. The EUT was set to transmit the appropriate modulation at maximum power. The bandwidth was measured using following methods:

- 1) The built-in 99% function of the spectrum analyzer was used.
- 2) If the built-in 99% is not available then the following method is used: 26-dB or 20-dB was subtracted to the maximum peak of the emission. Then the display line function was used, in conjunction with the marker delta function, to measure the emissions bandwidth.
- 3) For the above two methods a resolution and video bandwidth of 100 or 300 Hz was used to measure the emission's bandwidth.

4.1.1.3 Occupied Bandwidth (Conducted Emission Mask)

Either for analog, digital, or data modulations, emission mask was performed. The EUT was set to transmit the appropriate modulation at maximum power. The following method was used:

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 15 of 119



- 1) The EUT was connected directly to the spectrum analyzer and used an attenuator to protect the input of the analyzer. The EUT antenna was removable, so conducted measurements were performed. The EUT was set to transmit continuous packets of data and the Fundamental Frequency set to the appropriate channel of the EUT frequency range.
- 2) A mask was created to show that the fundamental signal energy is within.

4.1.1.4 Other Types of Equipment

Either digital or data modulated signals were simulated, by software or external sources, to performed the required tests. The EUT was set to transmit the appropriate digital modulation.

4.1.1.5 Antenna Conducted Emissions

For spurious emission measurements at the antenna terminal the following procedure was performed:

- 1) Set the transmitting signal at the middle of the operating range of the transmitter, as specified in the standard. Power is set to maximum and then to minimum.
- 2) Set the spectrum analyzer display line function to -13-dBm.
- 3) Set the spectrum analyzer bandwidth to 10 kHz <1GHz and 1 MHz >1GHz.
- 4) For the spectrum analyzer, the start frequency was set to 30 MHz and the stop frequency set to the 10 harmonic of the fundamental. All spurious or intermodulation emission must not exceed the -13dBm limit.
- 5) Steps 1 to 4 were repeated for all modulations and output ports that will be used for transmission.

4.1.1.6 Frequency Stability over Temperature

The EUT is placed inside a temperature chamber with all support and test equipment located outside of the chamber. The spectrum analyzer is configured to give a 6-digit display for the marker-frequency function. The spectrum analyzer's built-in frequency counter is used to measure the maximum deviation of the fundamental frequency at each temperature. The Temperature chamber was varied from -30° C to $+50^{\circ}$ C (or $+60^{\circ}$ C for some IC RSS standards, if applicable) in 10 degrees increment. The EUT was allowed enough time to stabilize for each temperature variation.

4.1.1.7 Frequency Stability over Voltage

For AC or DC operated devices the nominal voltage is varied to 85% and to 115% at either room temperature or at a controlled +20°C temperature.

4.1.1.8 Frequency Stability

For battery-powered devices the voltage battery endpoint is determined by reducing the dc voltage until the unit ceases to function. This is performed at either room temperature or at a controlled +20°C temperature.

4.1.1.9 Field Strength Measurement

The EUT was set on the turntable and the search antenna position 3 meters away. The output antenna terminal was terminated with a 50ohm terminator. The EUT was set at the middle of the frequency band and set at maximum output power.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 16 of 119

July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

4.1.1.10 Preliminary Test

For the first scan, a preliminary measurement is performed. A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. One or more of these is with the antenna polarized vertically while the one or more of these are with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit.

4.1.1.11 Final Test

For the final measurement, Substitution method is performed on spurious emissions not being 20-dB below the calculated radiated limit. Substitution method is performed by replacing the EUT with a horn antenna and signal generator. The horn antenna factors can be reference to a half-wave dipole in dBi. The signal generator power level was adjusted until a similar level, which was measured on the first scan, is achieved on the spectrum analyzer. The level on the signal generator is than added to the antenna factor, in dBi, which will give the corrected value.

4.2 SPECIFICATION LIMITS AND SAMPLE CALCULATIONS

4.2.1 FCC Part 90 Specifications

- § 90.1305 Permissible operations:-Use of the 3650–3700 MHz band must be consistent with the allocations for this band as set forth in Part 2 of the Commission's Rules. All stations operating in this band must employ a contention- based protocol (as defined in § 90.7).
- § 90.1307 Licensing: The 3650–3700 MHz band is licensed on the basis of non-exclusive nationwide licenses. Nonexclusive nationwide licenses will serve as a prerequisite for registering individual fixed and base stations. A licensee cannot operate a fixed or base station before registering it under its license and licensees must delete registrations for unused fixed and base stations.
- § 90.1309 Regulatory status: Licensees are permitted to provide services on a non-common carrier and/or on a common carrier basis. A licensee may render any kind of communications service consistent with the regulatory status in its license and with the Commission's rules applicable to that service.
- § 90.1311 License term:-The license term is ten years, beginning on the date of the initial authorization (non-exclusive nationwide license) grant. Registering fixed and base stations will not change the overall renewal period of the license.
- § 90.1312 Assignment and transfer: Licensees may assign or transfer their non-exclusive nationwide licenses, and any fixed or base stations registered under those licenses will remain associated with those licenses.

§ 90.1319 Policies governing the use of the 3650–3700 MHz band:

- a) Channels in this band are available on a shared basis only and will not be assigned for the exclusive use of any licensee
- b) Any base, fixed, or mobile station operating in the band must employ a contention-based protocol.
- c) All applicants and licensees shall cooperate in the selection and use of frequencies in the 3650–3700 MHz band in order to minimize the potential for interference and make the most effective use of the authorized facilities. A database identifying the locations of registered stations will be available at http://wireless.fcc.gov/uls. Licensees should examine this database before seeking

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 17 of 119

July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
	EID-CI E3410-C3	

station authorization, and make every effort to ensure that their fixed and base stations operate at a location, and with technical parameters, that will minimize the potential to cause and receive interference. Licensees of stations suffering or causing harmful interference are expected to cooperate and resolve this problem by mutually satisfactory arrangements.

4.2.2 Peak Output Power FCC 90.1321

§ 90.1321 Power and antenna limits:

- a) Base and fixed stations are limited to 25 watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one megahertz slice of spectrum.
- b) In addition to the provisions in paragraph (a) of this section, transmitters operating in the 3650–3700 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
 - 1. Different information must be transmitted to each receiver.
 - 2. If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, *i.e.*, the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (a) of this section, as applicable. The directional antenna gain shall be computed as follows:
 - i. The directional gain, in dBi, shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain, in dBi, of the individual element or stave having the highest gain.
 - ii. A lower value for the directional gain than that calculated in paragraph (b)(2)(i) of this section will be accepted if sufficient evidence is presented, *e.g.*, due to shading of the array or coherence loss in the beam-forming.
 - 3. If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels and if transmitted beams overlap, the power shall be reduced to ensure that the aggregate power from the overlapping beams does not exceed the limit specified in paragraph (b)(2) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (b)(2) of this section by more than 8 dB.
 - 4. Transmitters that emit a single directional beam shall operate under the provisions of paragraph (b)(2) of this section.
- c) Mobile and portable stations are limited to 1 watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliwatts in any one-megahertz slice of spectrum.

4.2.3 Method of Measurements

- The total conducted power was measured using the Peak Power meter
- The peak conducted power density in 1 MHz was measured using an EMI receiver (spectrum analyzer) with RBW = 1 MHz, VBW >= RBW.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 18 of 119

CALCULATIONS - EFFECTIVE RADIATED POWER

$$E(V/m) = \frac{\sqrt{30*P*G}}{d}$$

E= Field Strength in V/m

P= Power in Watts (for this example we use 3 watts)

G= Gain of antenna in numeric gain (Assume 1.64 for ERP)

d= distance in meters

$$E(V/m) = \frac{\sqrt{30 * 3 \text{ watts } * 1.64 \text{ dB}}}{3 \text{ meters}}$$

$$20 * log (4.049 \text{ V/m} * 1,000,000) = 132.14 \text{ dBuV/m} @ 3 \text{ meters}$$

FCC Rules request an attenuation of $43 + 10 \log (3)$ or 47.8 dB for all emissions outside the assigned block, the limit for spurious and harmonic emissions is:

$$132.1 \text{ dBuV/m} - 47.8 \text{ dB} = 84.3 \text{ dBuV/m} @ 3 \text{ meter.}$$

Note: Substitution Method is performed for spurious emission not being 20-dB below the calculated field strength.

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 19 of 119



July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision. 2

4.3 Final Test Data

Table 9 – RF Test Data Table of Compliance

Axxcelera RF Test Data							
Client	Ax	xcelera Broadband Wire	eless		Projec	ct Number	AXX-IDU20090501
Model		EID-CPE3410-C9			Projec	t Revision	2
POC		Chris Moritz			Tes	t Engineer	Al Servais
Test Standard		FCC 47 CFR Part 90			System	s Director	Chris Moritz
Operating Voltage		+12 VDC	AC/DC		Frequency	DC	Hz
Temperature		25	°C	Rel	ative Humidity	47	%
	•		EUT	•			
Manufacturer		Model	I	Descr	iption	Serial Number	FCC ID
Axxcelera Broadband Wireless	EID-CF	PE3410-C9	Wireless	Broad	dband	FCC1	OJB-SSIDU-365
	•	Test Sp	ecifications	S		•	•
The objective of this test sess	sion is to p	•			EUT with respec	t to the spec	cification listed above.
		Test Co	onfiguration	n			
The EUT was connected to the spectrum analyzer or power meter via a suitable attenuator. All measurements have been corrected to allow for the external attenuators used.							
Summary of Test Results							
Test Performed Standard Result Report							
99% Bandwidth		2.1049			Complies	AXX-IDU2	20090501
EIRP		2.1046/90.1321			Complies	AXX-IDU2	20090501
PPSD 2.1046 / 90.1321 Complies AXX-IDU20090501					20090501		
Emission Mask 2.1051/90.1323 Complies AXX-IDU20090501				20090501			
Spurious Emissions 2.1053 / 90 Complies AXX-IDU20090501							
Frequency Stability 2.1055				Complies	AXX-IDU2	20090501	
MPE 90.1217 Complies AXX-IDU20090501							
		Summary of					
No modifications were made to the EUT during the execution of the test procedure							
Summary of Deviations							
No deviations were made to the test standard during the execution of the test procedure							

Issued: Tuesday, July 21, 2009 Office: Richmond Laboratory: RIC Sheet 20 of 119	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 20 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 10 – 99% Bandwidth BPSK Data Table


Modulation	Bandwidth (MHz)	Center Frequency	99% Bandwidth
Modulation	Dandwiddi (M112)	(MHz)	(MHz)
	3.5	3653.50	3.1071
BPSK	3.5	3662.50	3.1037
	3.5	3675.00	3.1056
	5	3654.50	4.4623
BPSK	5	3662.50	4.4670
	5	3675.00	4.4726
	7	3655.50	6.2341
BPSK	7	3662.50	6.2174
	7	3675.00	6.2241

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 21 of 119

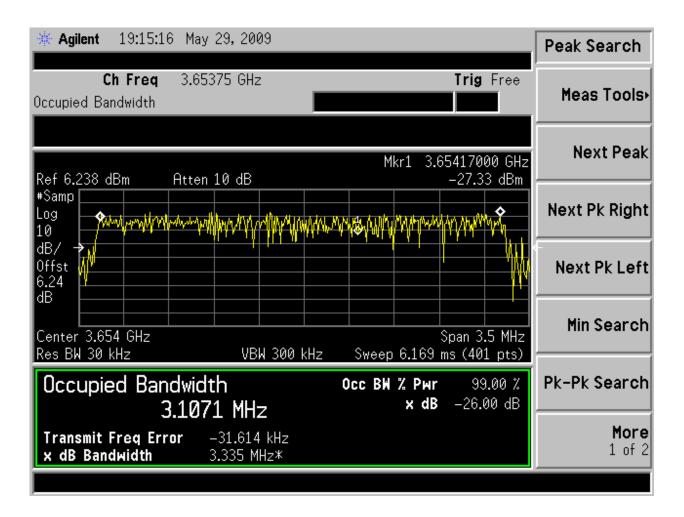


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 22 of 119



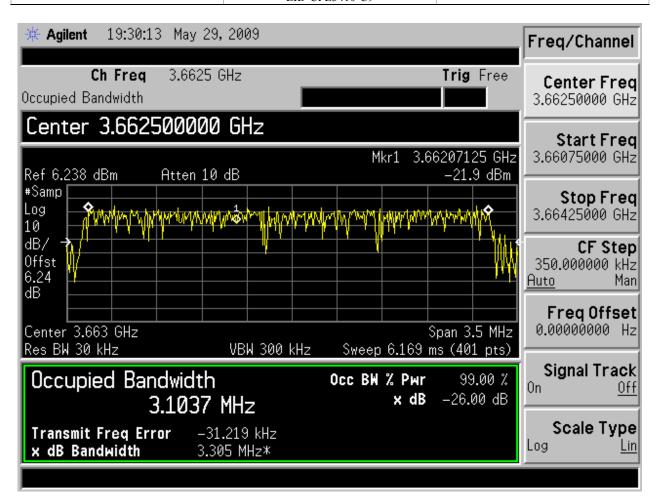


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 23 of 119



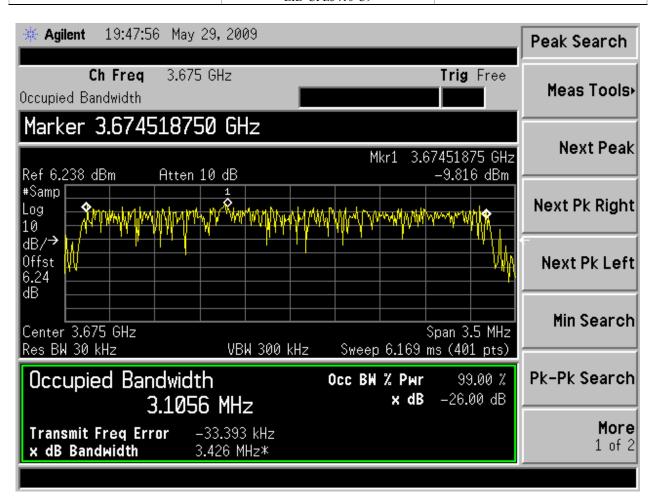


	Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 24 of 119



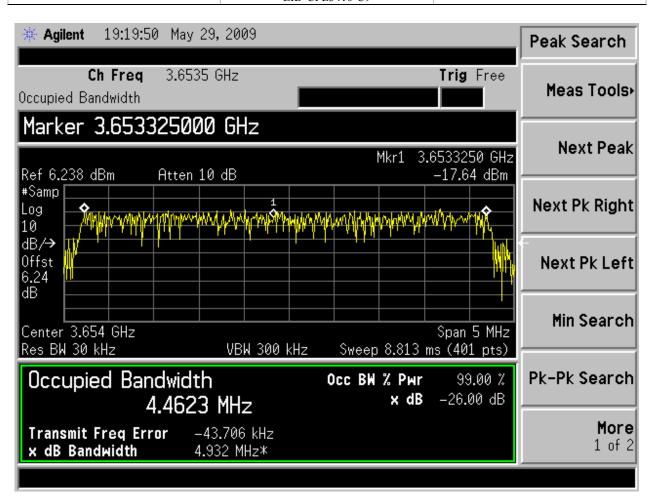


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 25 of 119



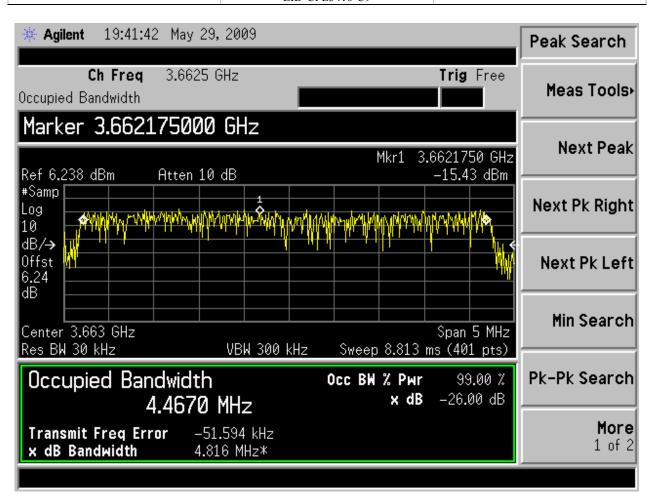


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 26 of 119



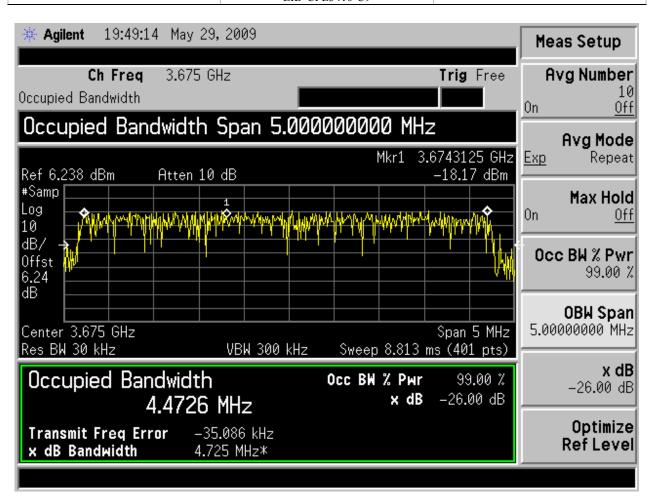


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 27 of 119



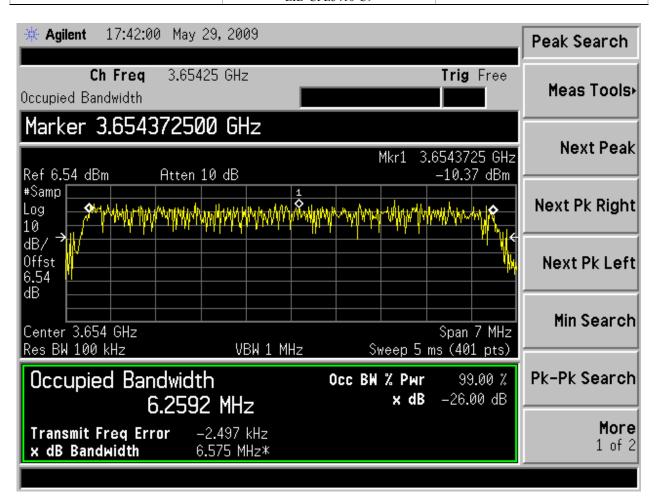


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 28 of 119



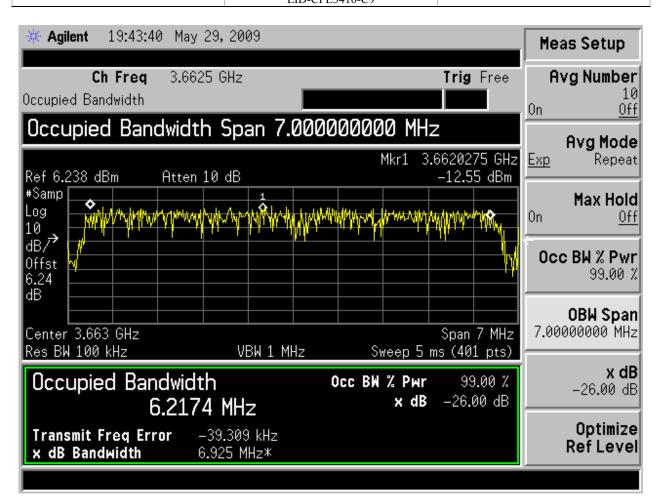

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 29 of 119

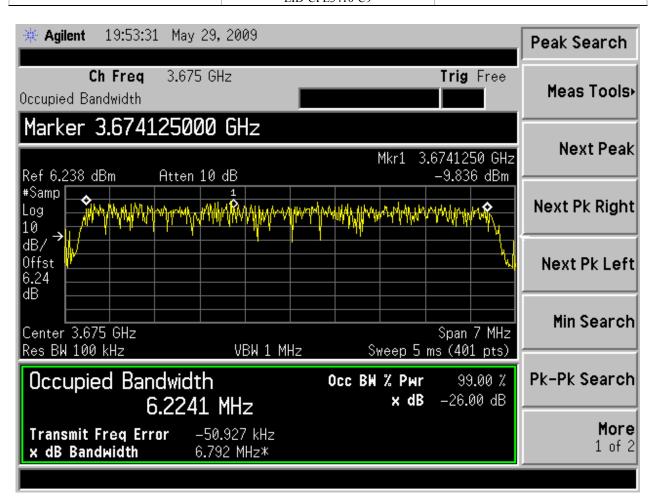

Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 30 of 119




L.L. 21, 2000	Radio Test Report for	Davisian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	


Table 11 – 99% Bandwidth QPSK Data Table

Modulation	Bandwidth (MHz)	Center Frequency (MHz)	99% Bandwidth (MHz)
	3.5	3653.50	3.1228
QPSK	3.5	3662.50	3.1088
	3.5	3675.00	3.0738
	5	3654.50	4.4807
QPSK	5	3662.50	4.4876
	5	3675.00	4.4567
	7	3655.50	6.2227
QPSK	7	3662.50	6.2265
	7	3675.00	6.2304

Author: Al Servais	Approval: Chris Moritz	_	AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 31 of 119






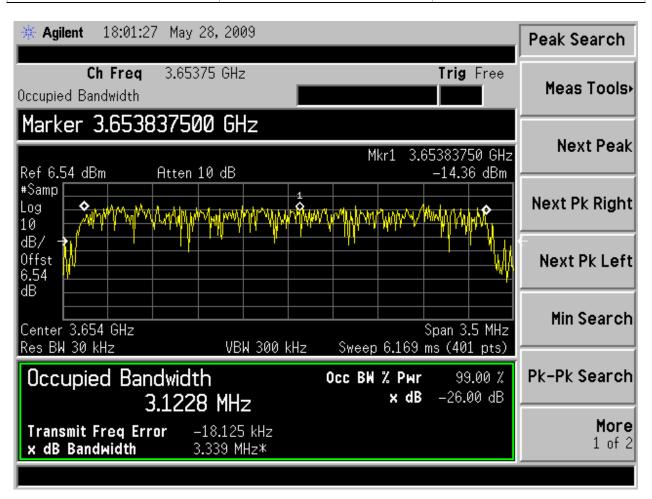


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 32 of 119




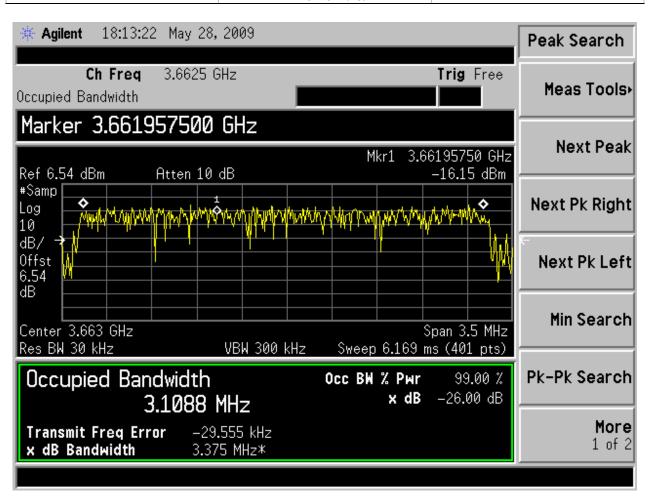

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 33 of 119






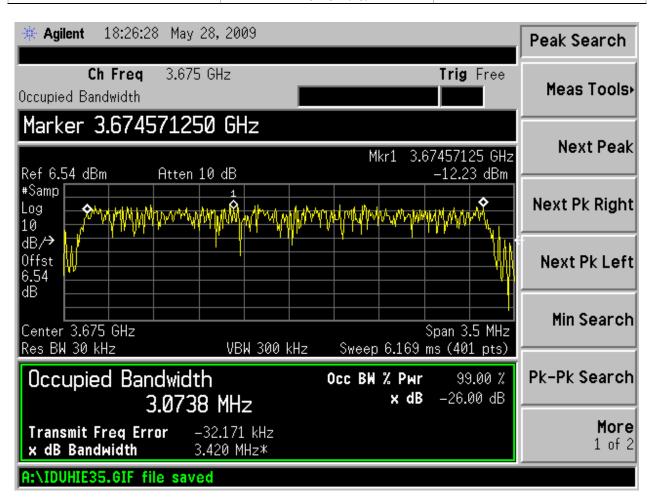


I	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 34 of 119



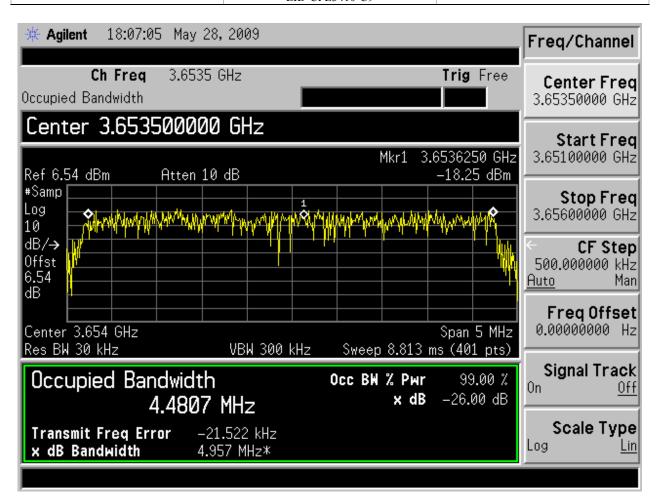


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 35 of 119




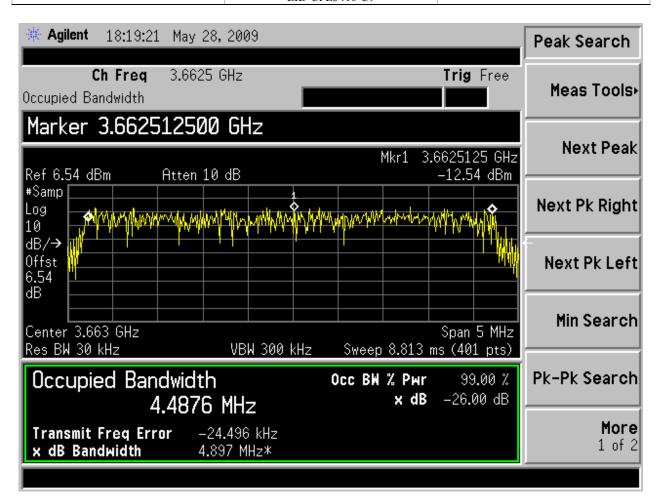

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 36 of 119






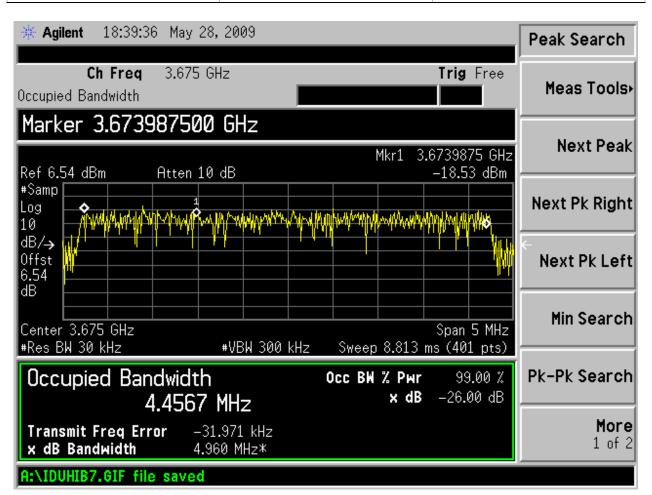


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 37 of 119



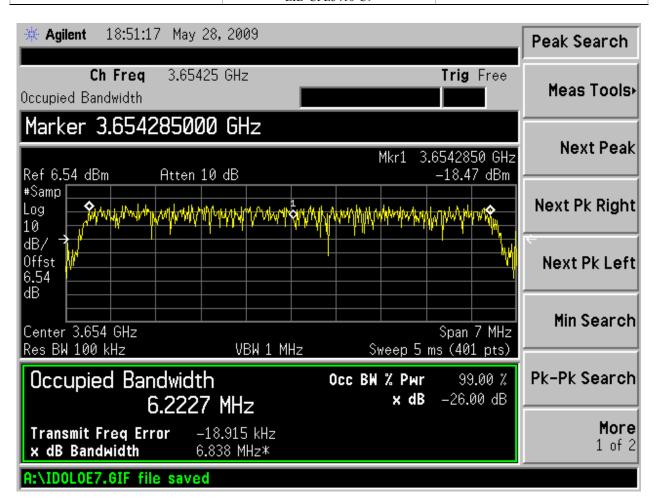


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 38 of 119




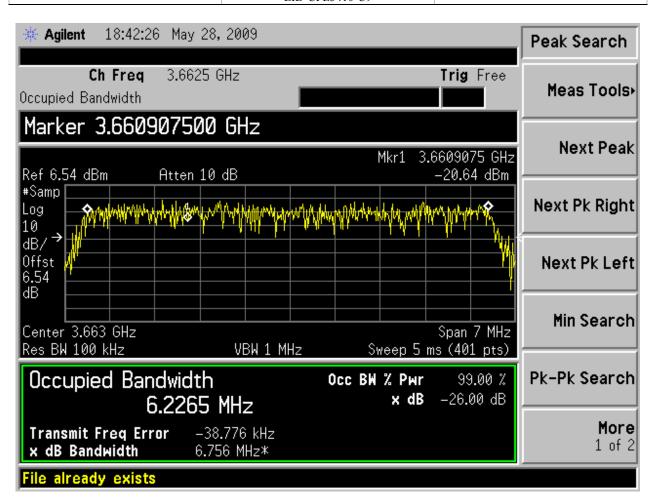

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 39 of 119





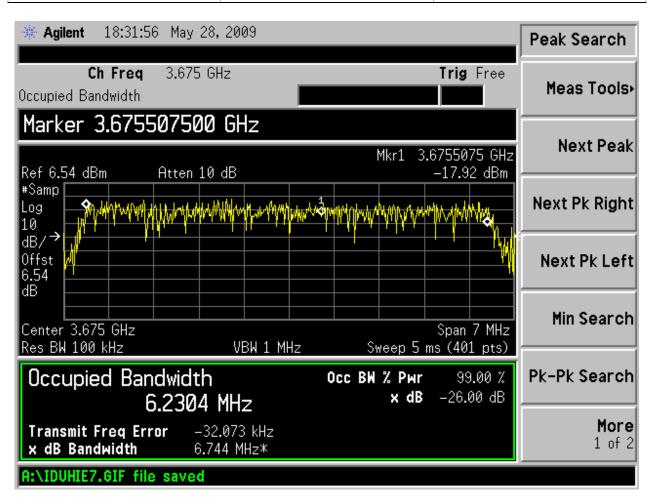

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 40 of 119




L.L. 21, 2000	Radio Test Report for	Paulaian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 12 – 99% Bandwidth 16QAM Data Table

Modulation	Bandwidth (MHz)	Center Frequency	99% Bandwidth
	(::==)	(MHz)	(MHz)
	3.5	3653.50	3.0936
16QAM	3.5	3662.50	3.0835
	3.5	3675.00	3.1028
	5	3654.50	4.4531
16QAM	5	3662.50	4.4698
	5	3675.00	4.4682
	7	3655.50	6.2592
16QAM	7	3662.50	6.2384
	7	3675.00	6.2341


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 41 of 119



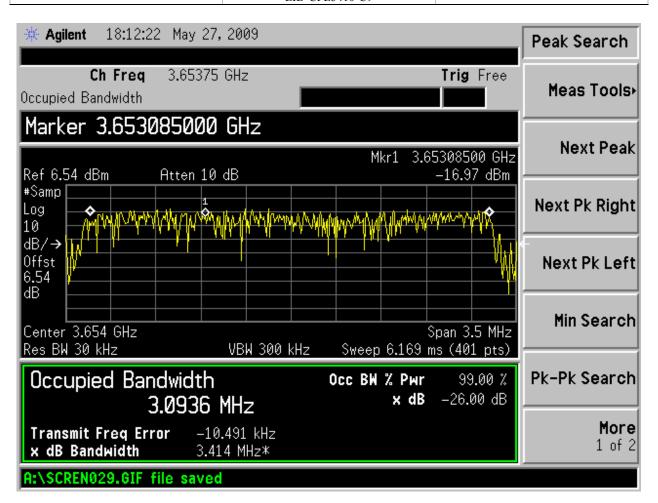


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 42 of 119



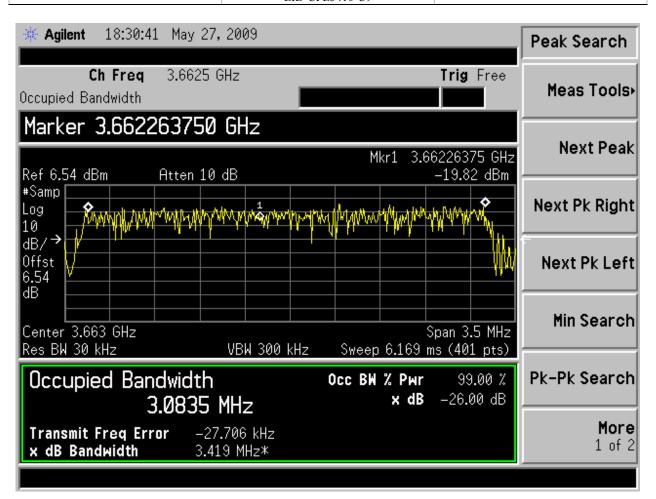


	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 43 of 119



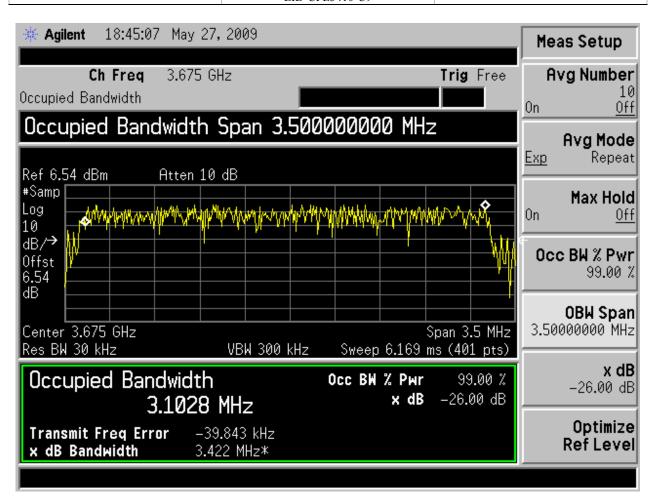


	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 44 of 119



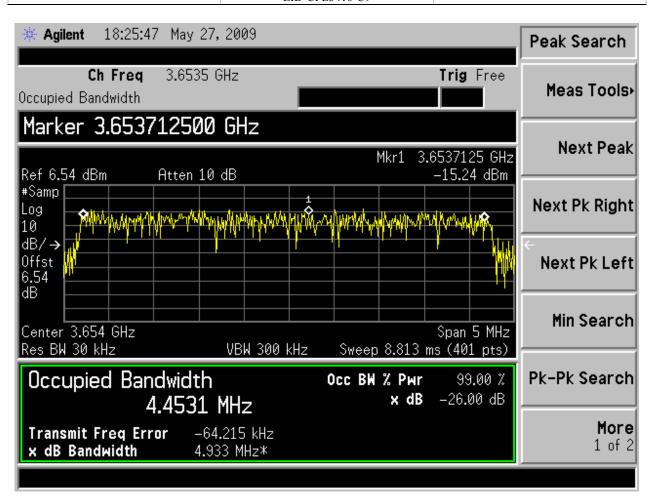


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 45 of 119



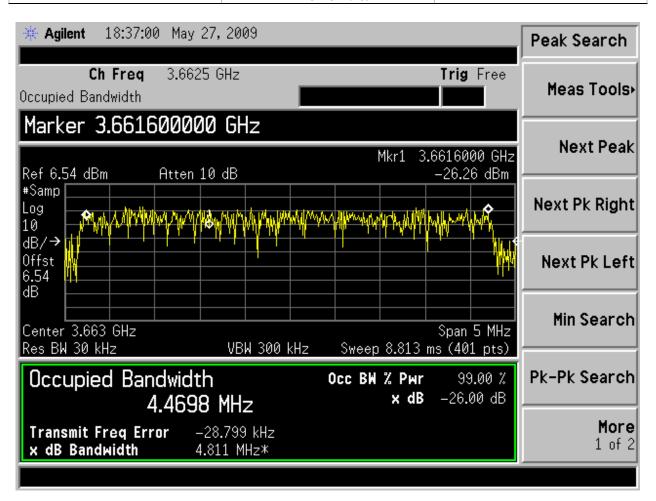


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 46 of 119



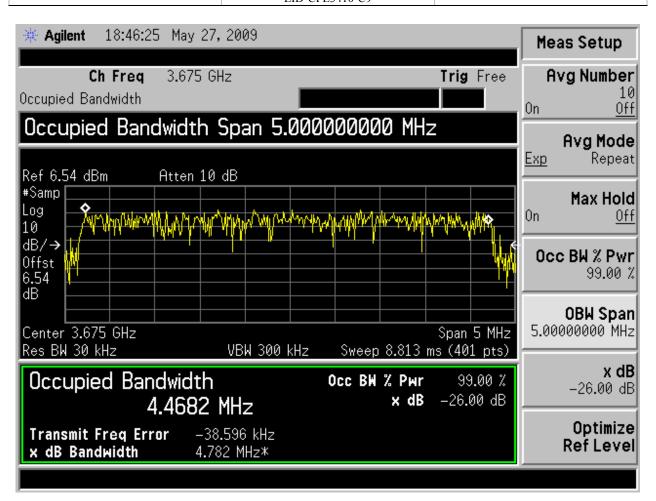


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 47 of 119



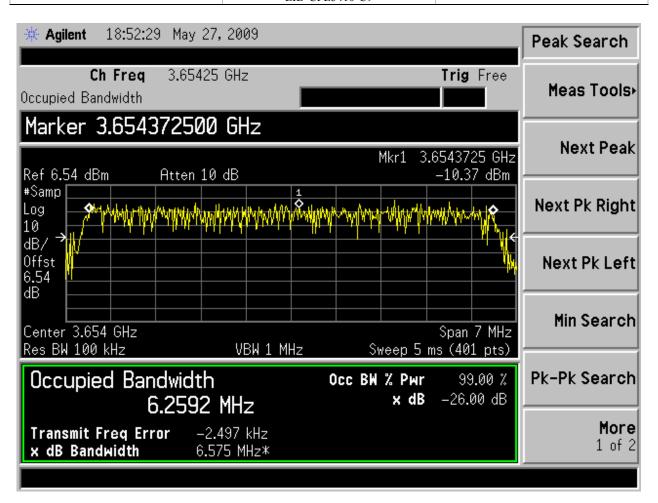


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 48 of 119



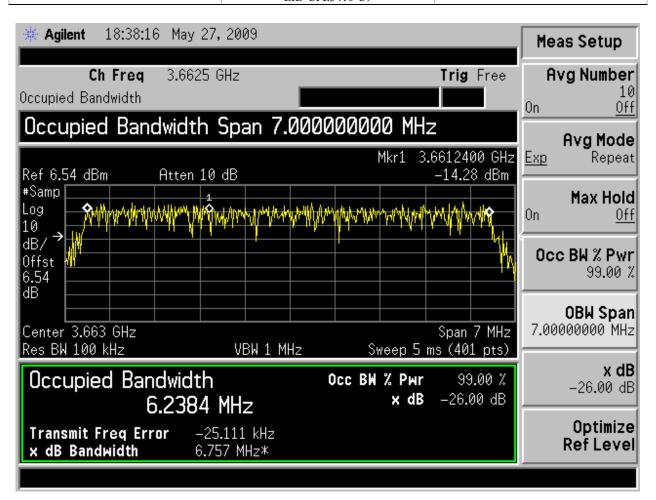

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 49 of 119



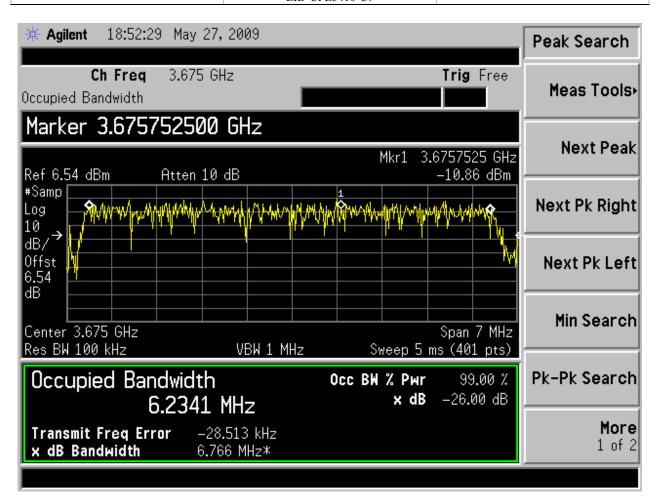

	Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 50 of 119




L.L. 21, 2000	Radio Test Report for	Davisian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 13 – 99% Bandwidth BPSK Data Table

Modulation	Bandwidth (MHz)	Center Frequency	99% Bandwidth
	,	(MHz)	(MHz)
	3.5	3653.50	3.0919
64QAM	3.5	3662.50	3.0942
	3.5	3675.00	3.0991
	5	3654.50	4.4738
64QAM	5	3662.50	4.4876
	5	3675.00	4.4567
	7	3655.50	6.2592
64QAM	7	3662.50	6.2265
	7	3675.00	6.2085


Author: Al Servais	Approval: Chris Moritz	-	AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 51 of 119



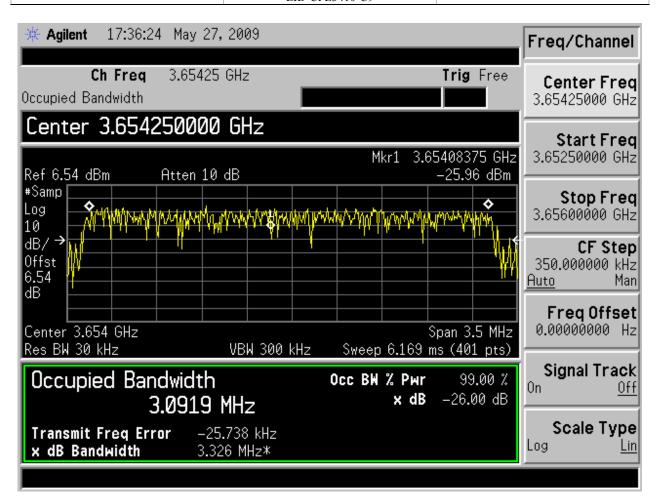


	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 52 of 119



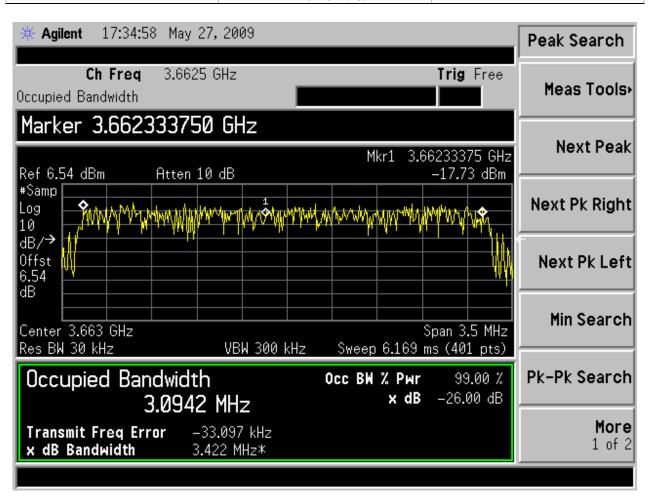


	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 53 of 119



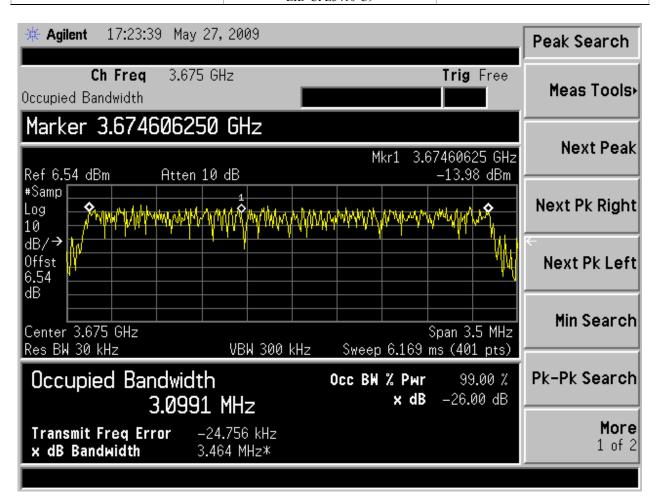


	Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 54 of 119



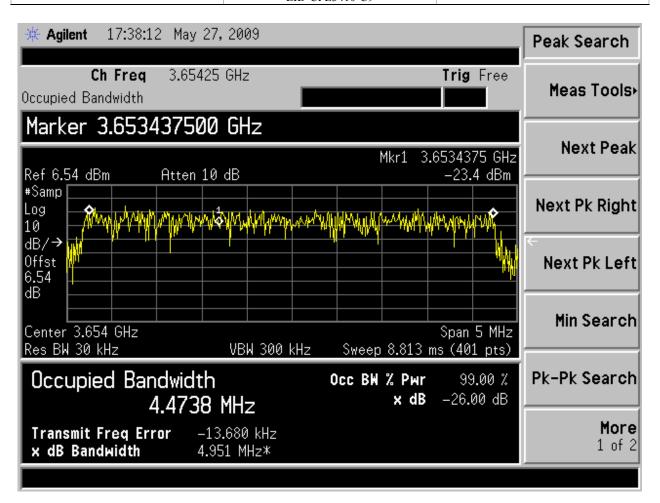


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 55 of 119



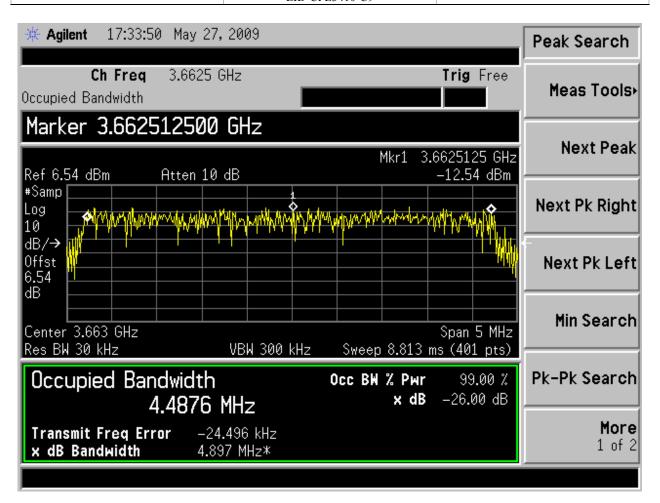


	Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 56 of 119



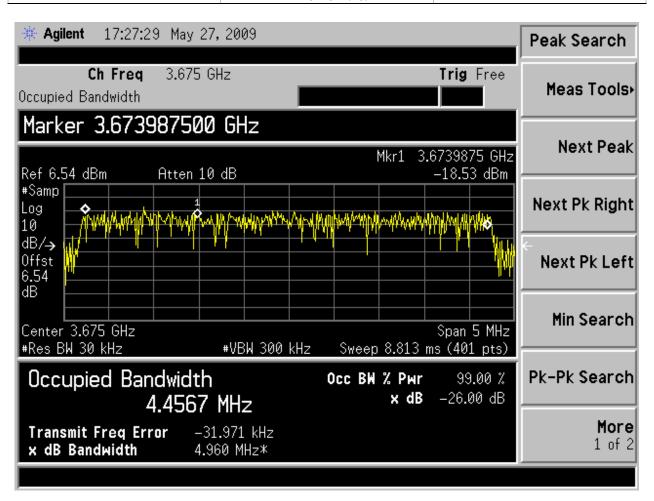


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 57 of 119



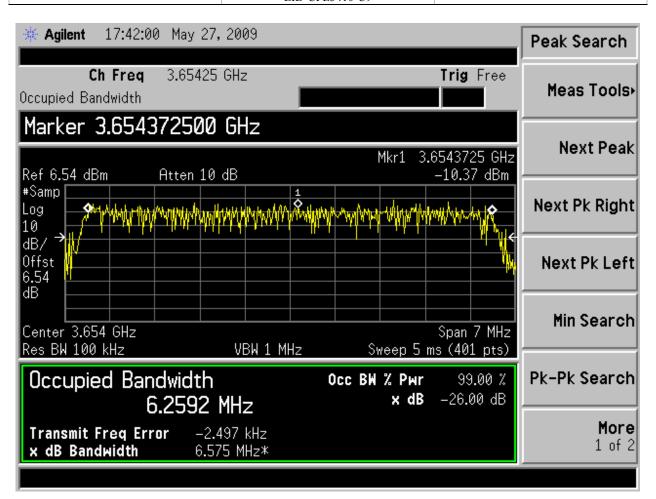


I	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
I	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 58 of 119



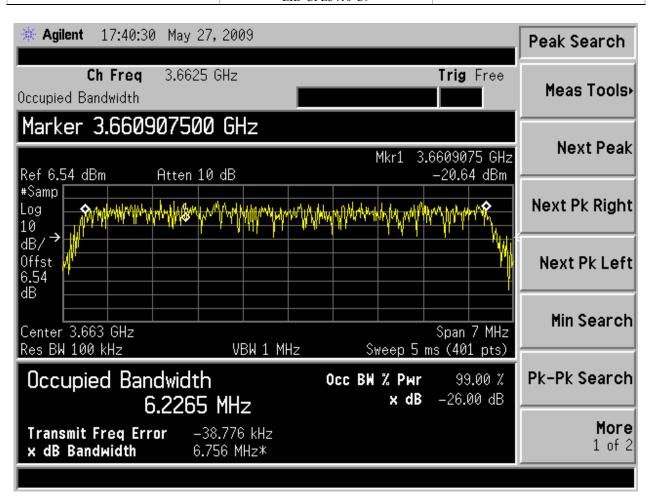

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 59 of 119



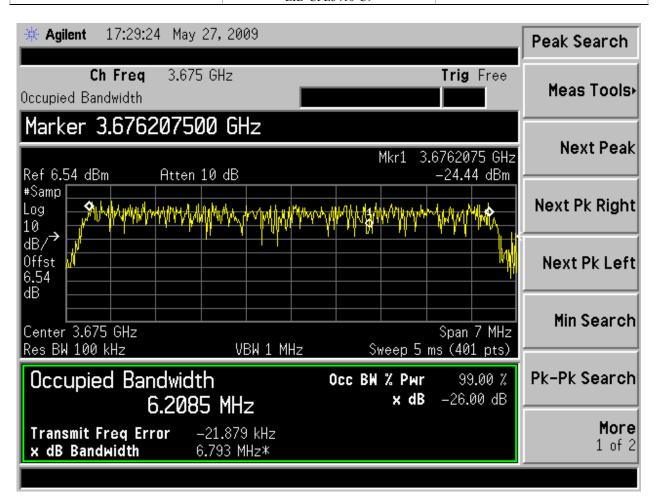

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 60 of 119

Axxcelera Broadband Wireless

L.L. 21, 2000	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 14 – RF Test Data EIRP

Axxcelera					1	RF Te	st Data
Client	Axxcelera Broa	dband Wireless		Project Nun	nber	AXX-IDI	U20090501
Model	EID-CPE3410-C9		Project Revision 2				
POC	Chris	Moritz		Test Engi	neer	Al Servai	S
Test Standard	FCC 47 C	FR Part 90		Systems Dire	ector	Chris Mo	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency		DC	Hz
Temperature	23	°C	Rela	tive Humidity		56	%

Freq (MHz)	Antenna MAX dBi	Power (dBm)	BW (MHz)	EIRP Limit (dBm)	MOD	Margin	Result
3652.50	10	11.37	3.5	21.4	BPSK	0.03	Complies
3653.00	10	12.22	5	23	BPSK	0.78	Complies
3654.00	10	14.23	7	24.5	BPSK	0.27	Complies
3662.5	10	11.27	3.5	21.4	BPSK	0.13	Complies
3662.5	10	13.00	5	23	BPSK	0	Complies
3662.5	10	14.36	7	24.5	BPSK	0.14	Complies
3675	10	11.35	3.5	21.4	BPSK	0.05	Complies
3675	10	12.90	5	23	BPSK	0.1	Complies
3675	10	14.23	7	24.5	BPSK	0.27	Complies
3652.50	10	11.27	3.5	21.4	QPSK	0.13	Complies
3653.00	10	12.98	5	23	QPSK	0.02	Complies
3654.00	10	14.31	7	24.5	QPSK	0.19	Complies
3662.5	10	11.40	3.5	21.4	QPSK	0	Complies
3662.5	10	12.63	5	23	QPSK	0.37	Complies
3662.5	10	14.00	7	24.5	QPSK	0.5	Complies
3675	10	11.37	3.5	21.4	QPSK	0.03	Complies
3675	10	12.54	5	23	QPSK	0.46	Complies
3675	10	13.47	7	24.5	QPSK	1.03	Complies

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 61 of 119	

Axxcelera Broadband Wireless

July 21, 2009	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 14 – RF Test Data EIRP

Axxcelera				RF T	est Data
Client	Axxcelera l	Broadband Wireless	Project Number	AXX-ID	U20090501
Model	EID-CPE3410-C9		Project Revision	2	
POC	Chris Moritz		Test Engineer	Al Serva	is
Test Standard	FCC 4	7 CFR Part 90	Systems Director	Chris M	oritz.
Operating Voltage	+12 VDC	AC/DC	Frequency	DC	Hz
Temperature	23	°C	Relative Humidity	56	%
	_				
		EIRP			

Freq (MHz)	Antenna MAX dBi	Power (dBm)	BW (MHz)	EIRP Limit (dBm)	MOD	Margin (dBm)	Result
3652.50	10	11.39	3.5	21.4	16QAM	0.01	Complies
3653.00	10	12.57	5	23	16QAM	0.43	Complies
3654.00	10	14.49	7	24.5	16QAM	0.01	Complies
3662.5	10	11.38	3.5	21.4	16QAM	0.02	Complies
3662.5	10	12.30	5	23	16QAM	0.7	Complies
3662.5	10	13.47	7	24.5	16QAM	1.03	Complies
3675	10	10.84	3.5	21.4	16QAM	0.56	Complies
3675	10	12.87	5	23	16QAM	0.13	Complies
3675	10	14.01	7	24.5	16QAM	0.49	Complies
3652.50	10	11.38	3.5	21.4	64QAM	0.02	Complies
3653.00	10	12.96	5	23	64QAM	0.04	Complies
3654.00	10	14.32	7	24.5	64QAM	0.18	Complies
3662.5	10	11.31	3.5	21.4	64QAM	0.09	Complies
3662.5	10	12.98	5	23	64QAM	0.02	Complies
3662.5	10	13.78	7	24.5	64QAM	0.72	Complies
3675	10	11.35	3.5	21.4	64QAM	0.05	Complies
3675	10	12.57	5	23	64QAM	0.43	Complies
3675	10	13.98	7	24.5	64QAM	0.52	Complies

	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
ſ	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 62 of 119




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 15 – 3653.50MHz PSD, BPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	E3410-C9		Projec	oject Revision 2		
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		System	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3653.5MHz PSD, BPSK at 3.5MHZ BW

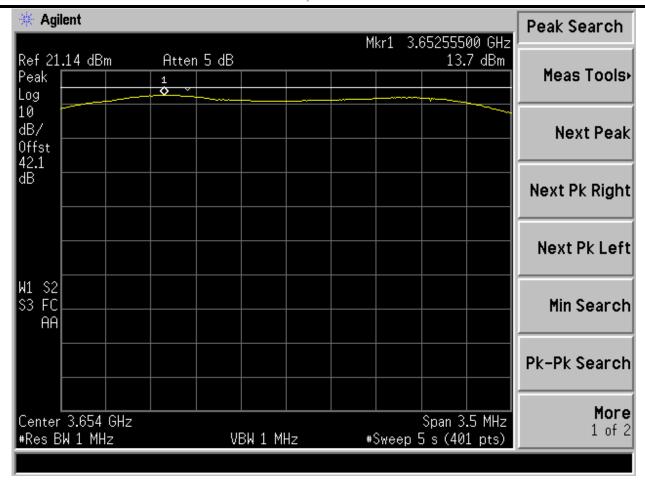

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 63 of 119




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 16 – 3654.50MHz PSD, BPSK at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Project Revision 2			
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3654.50 \mathrm{MHz}$ PSD, BPSK at 5MHZ BW

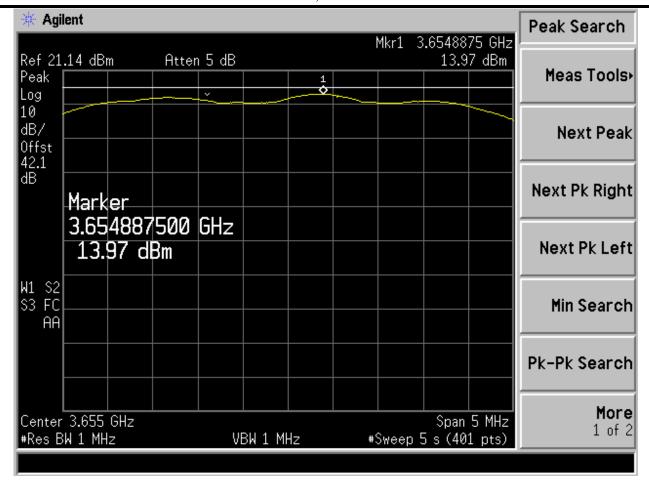

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 64 of 119




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 17 – 3655.50MHz PSD, BPSK at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (FCC 47 CFR Part 90		Systen	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3655.50MHz PSD, BPSK at 7MHZ BW

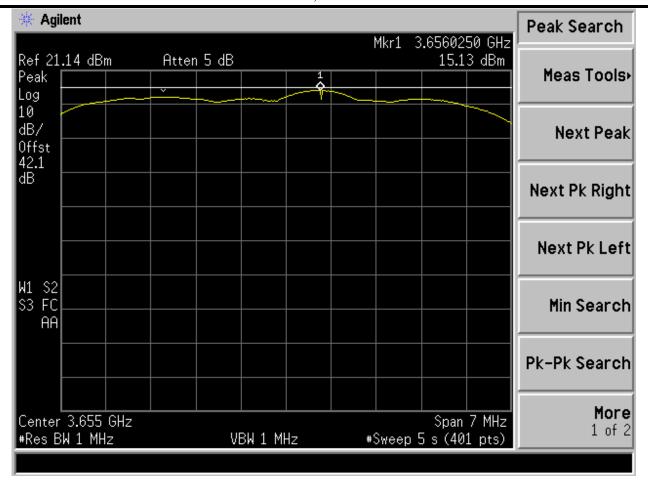

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 65 of 119




L.L. 21, 2000	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision: 2

Table 18 – 3662.5MHz PSD, BPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ct Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Syster	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5MHz PSD, BPSK at 3.5MHZ BW

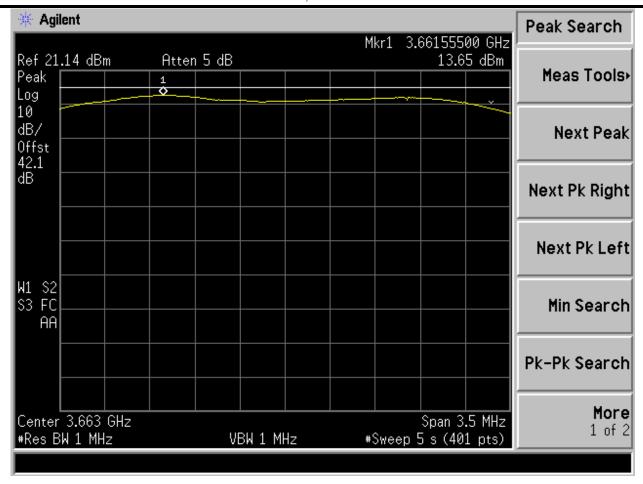

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 66 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 19 – 3662.5MHz PSD, BPSK at.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	Project Number		20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5MHz PSD, BPSK at 5MHZ BW

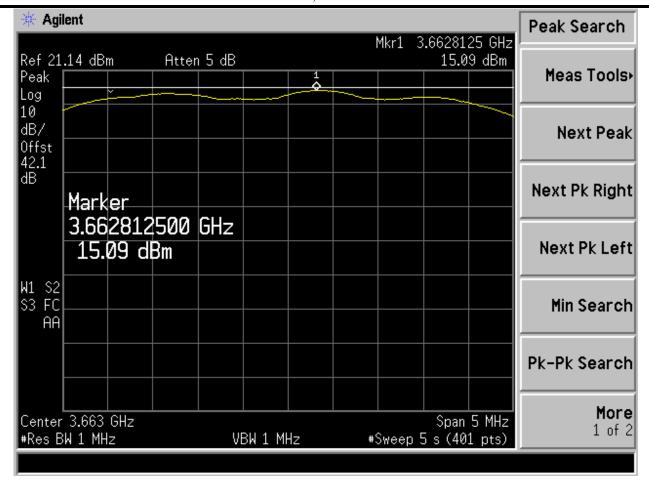

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 67 of 119	




July 21, 2009	Radio Test Report for	Paulaian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 20 – 3662.5MHz PSD, BPSK at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Project Number		AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Syster	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5MHz PSD, BPSK at 7MHZ BW

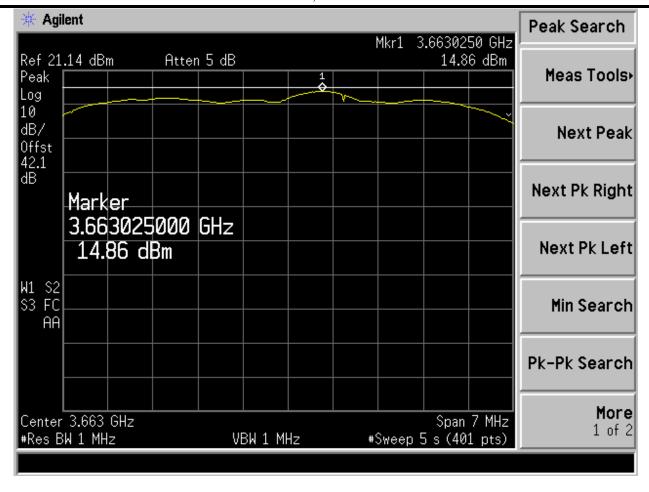

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 68 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
---------------	---	-------------

Table 21 – 3675MHz PSD, BPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	Project Number		20090501
Model	EID-CP	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		System	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3675MHz PSD, BPSK at 3.5MHZ BW

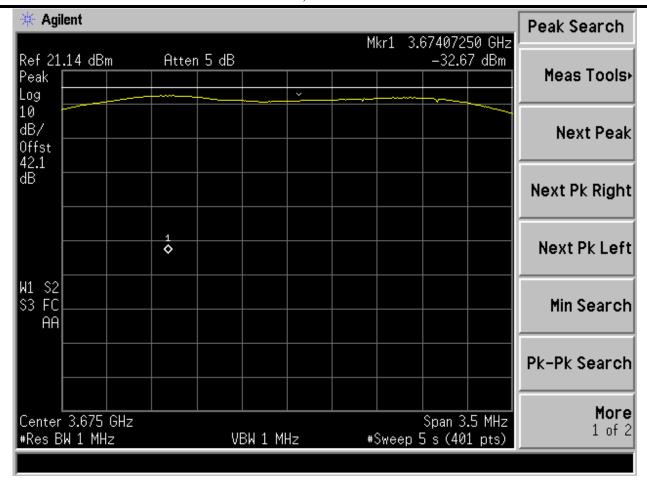

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 69 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
---------------	---	-------------

Table 22 – 3675MHz PSD, BPSK at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	Project Number		20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, BPSK at 5MHZ BW

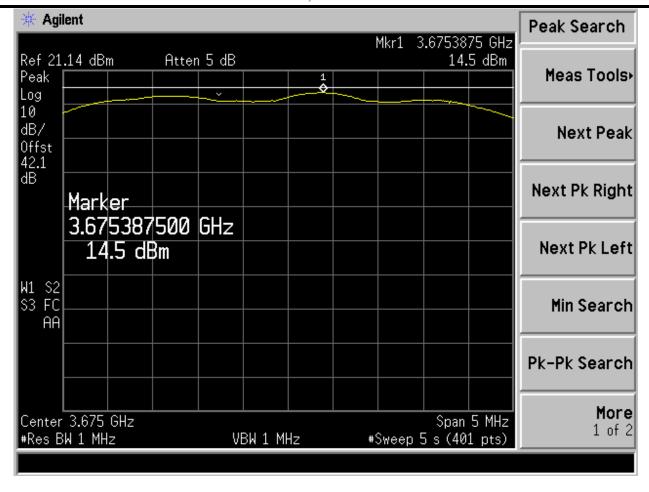

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 70 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 23 – 3675MHz PSD, BPSK at 7MHZ BW

Axxcelera RF Test Data							
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9		Proje	oject Revision 2			
POC	Chris Moritz		Tes	Test Engineer Al.			
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Ε	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, BPSK at 7MHZ BW

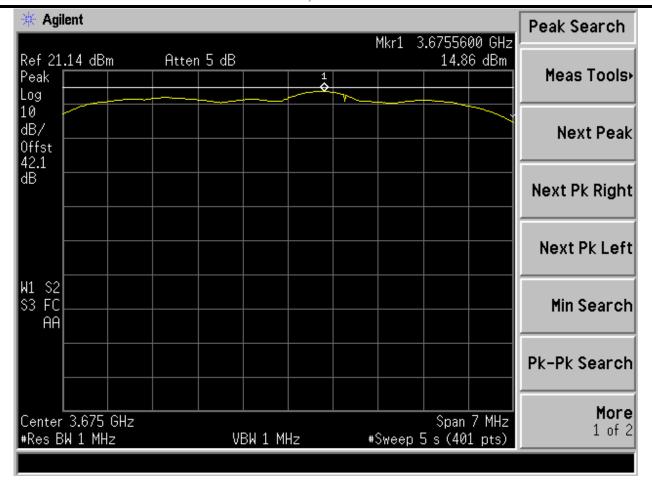

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 71 of 119




July 21, 2009	Radio Test Report for	Revision: 2	
v, 21, 200,	EID-CPE3410-C9	Revision. 2	

Table 24 – 3653.50MHz PSD, QPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless		Proje	ct Number	AXX-IDU20090501	
Model	EID-CP	EID-CPE3410-C9		Proje	ect Revision 2		
POC	Chris Moritz		Tes	Test Engineer Al Se			
Test Standard	FCC 47 C	CFR Part 90		Syster	ns Director	Chris Moritz	
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3653.50MHz PSD, QPSK at 3.5MHZ BW

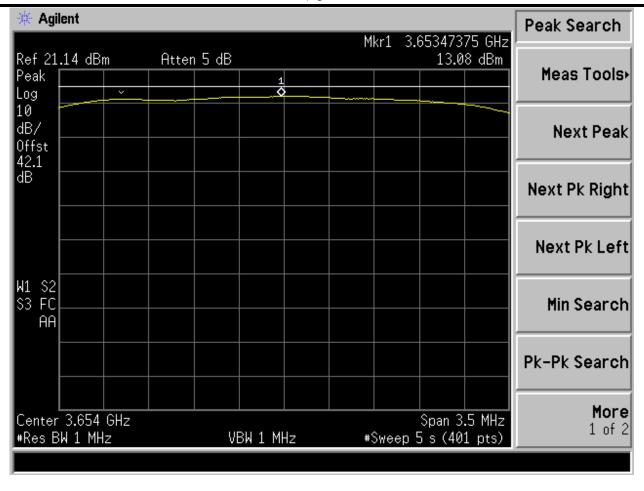

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 72 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
---------------	---	-------------

Table 25 – 3654.50MHz PSD, QPSK at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless		Proje	ject Number AXX-IDU2		20090501
Model	EID-CF	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (CFR Part 90	Systems Director		ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	C	Hz
Temperature	23	°C	Relative	e Humidity	5	6	%

$3654.50 \mathrm{MHz}$ PSD, QPSK at 5MHZ BW

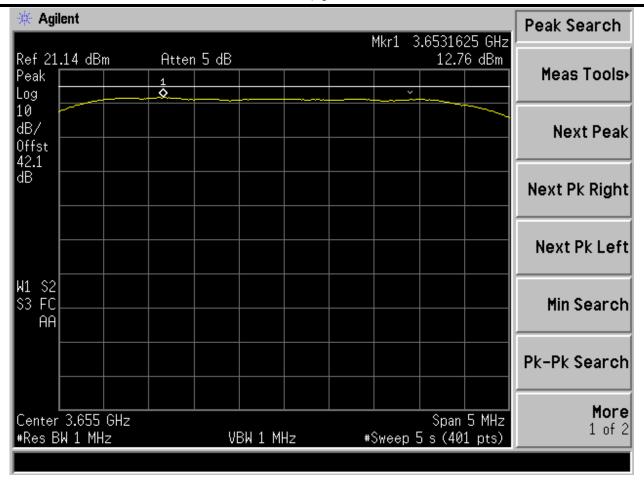

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 73 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 26 – 3655.50MHz PSD, QPSK at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless			ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (FCC 47 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3655.50 \mathrm{MHz}$ PSD, QPSK at 7MHZ BW

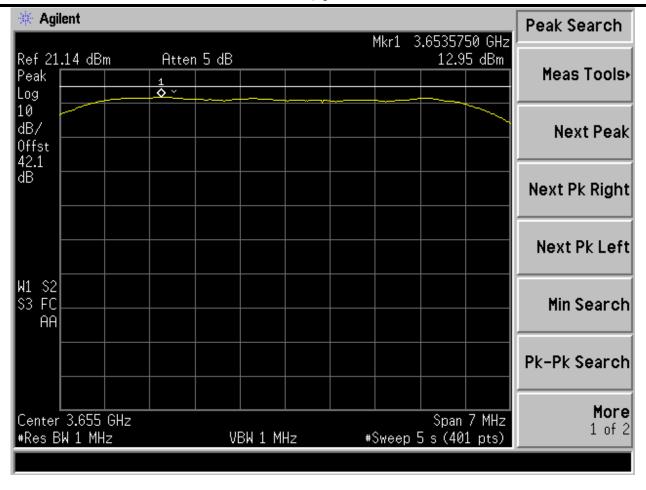

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 74 of 119	




July 21, 2009	Radio Test Report for	Paulaian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 27 – 3662.5MHz PSD, QPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless			ct Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5MHz PSD, QPSK at 3.5MHZ BW

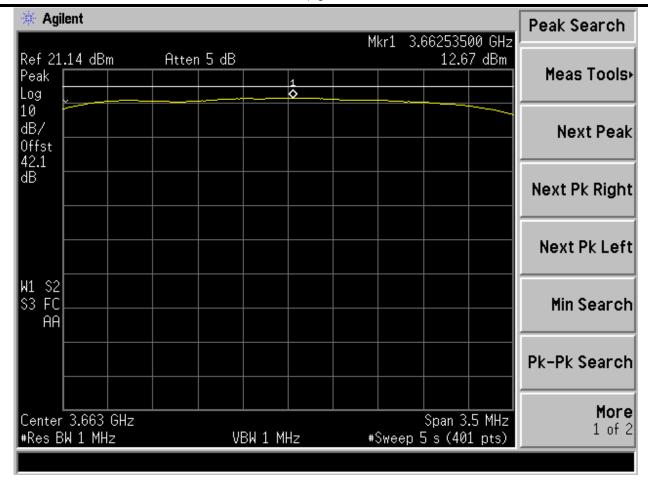

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 75 of 119	




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 28 – 3662.5MHz PSD, QPSK at.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless			ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3662.5MHz PSD, QPSK at 5MHZ BW

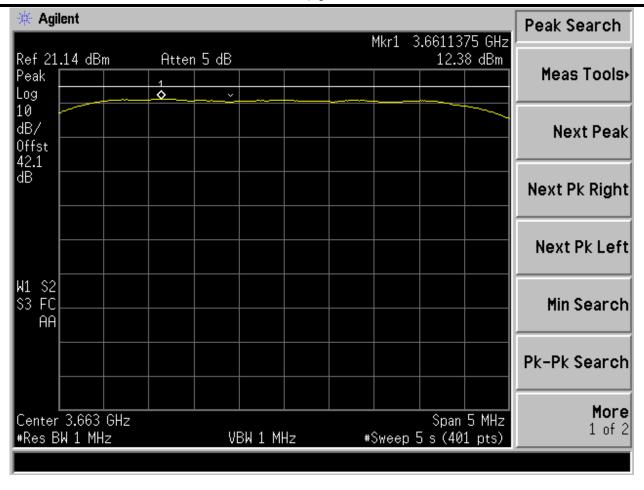

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 76 of 119	




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 200)	EID-CPE3410-C9	Revision. 2

Table 29 – 3662.5MHz PSD, QPSK at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	Axxcelera Broadband Wireless		Project Number		AXX-IDU20090501	
Model	EID-CP	EID-CPE3410-C9		Projec	Project Revision 2		
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3662.5MHz PSD, QPSK at 7MHZ BW

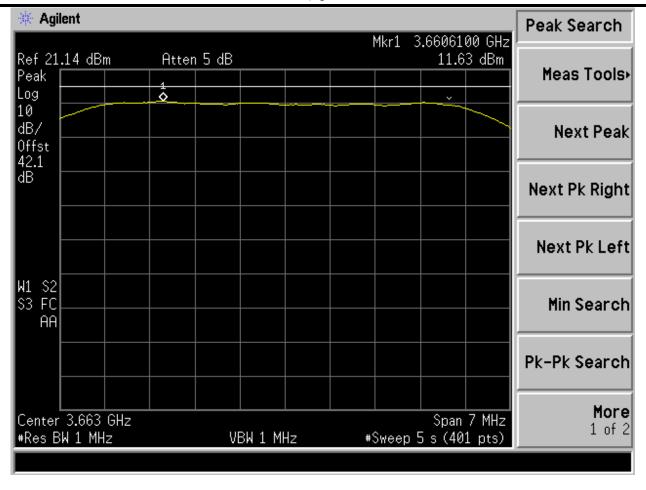

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 77 of 119	




July 21, 2009	Radio Test Report for	Paulaian, 2	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 30 – 3675MHz PSD, QPSK at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Project Number		AXX-IDU20090501	
Model	EID-CP	EID-CPE3410-C9		Project Revision 2			
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	7 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, QPSK at 3.5MHZ BW

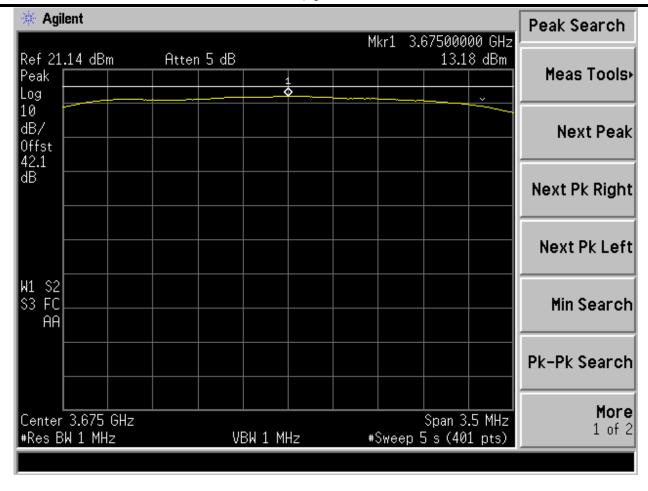

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 78 of 119	




July 21, 2009	Radio Test Report for	Revision: 2	
v, 21, 200,	EID-CPE3410-C9	Revision. 2	

Table 31 – 3675MHz PSD, QPSK at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Project Number		AXX-IDU20090501	
Model	EID-CPE3410-C9		Project Revision		2		
POC	Chris Moritz		Tes	st Engineer	Al Servais		
Test Standard	FCC 47 C	CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, QPSK at 5MHZ BW

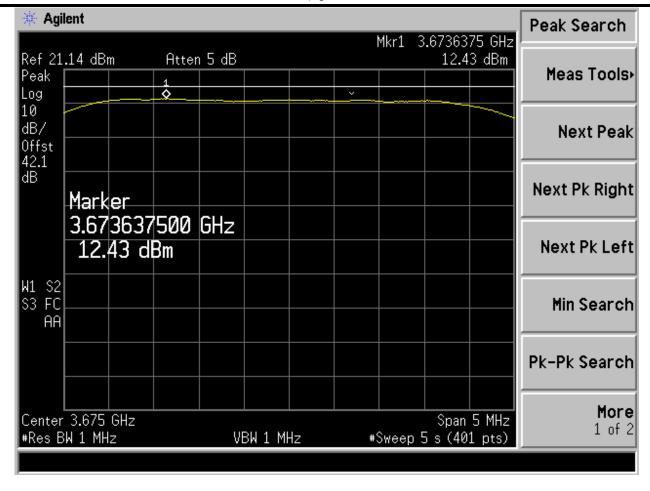

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 79 of 119	




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

Table 32 – 3675MHz PSD, QPSK at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Project Number		AXX-IDU20090501	
Model	EID-CP	EID-CPE3410-C9		Project Revision		2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, QPSK at 7MHZ BW

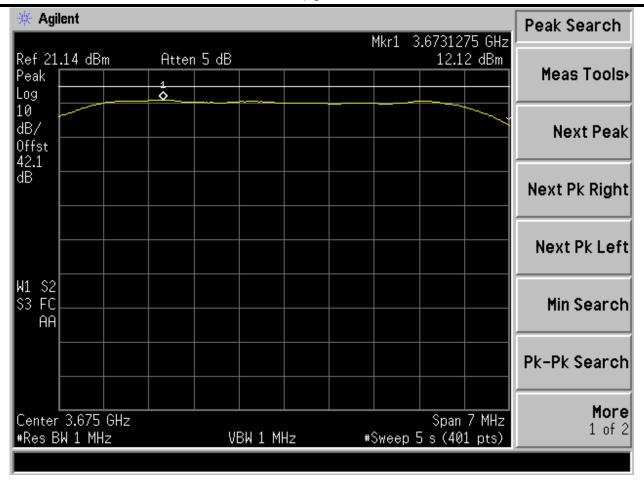

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 80 of 119	




L.L. 21, 2000	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision: 2

Table 33 – 3653.50MHz PSD, 16QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3653.50 \mathrm{MHz}$ PSD, $16 \mathrm{QAM}$ at $3.5 \mathrm{MHZ}$ BW

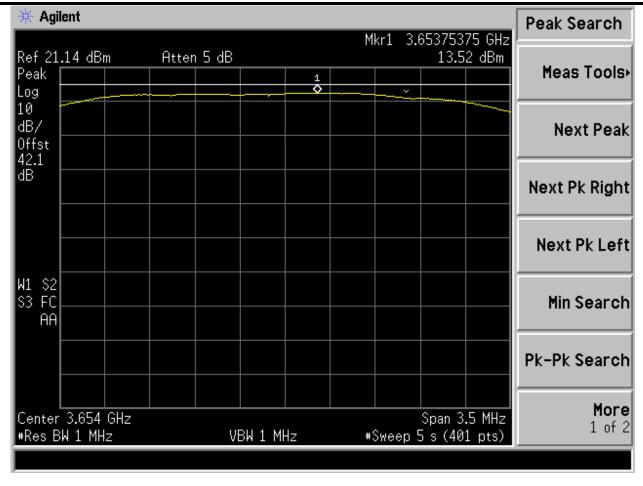

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 81 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 34 – 3654.50MHz PSD, 16QAM at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Syster	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3654.50 MHz PSD, 16QAM at 5MHZ BW

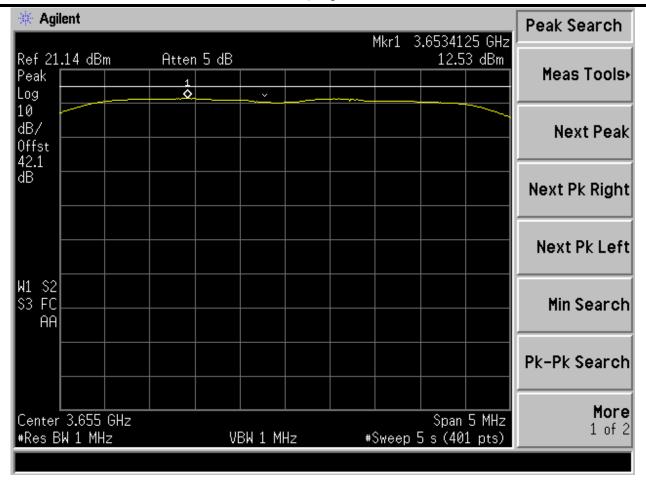

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 82 of 119	




1.1.21.2000	Radio Test Report for	D	
July 21, 2009	EID-CPE3410-C9	Revision: 2	

Table 35 – 3655.50MHz PSD, 16QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3655.500 \mathrm{MHz}$ PSD, $16\mathrm{QAM}$ at $7\mathrm{MHZ}$ BW

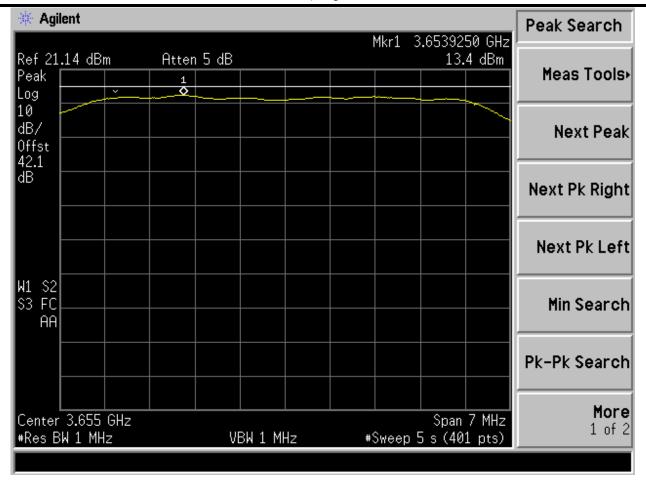

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 83 of 119	




July 21, 2009	Radio Test Report for	Revision: 2	
v, 21, 200,	EID-CPE3410-C9	Revision. 2	

Table 36 – 3662.5MHz PSD, 16QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chris Moritz		Tes	st Engineer	Al Servais		
Test Standard	FCC 47 (CFR Part 90		Systen	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3662.5 \mathrm{MHz}$ PSD, $16 \mathrm{QAM}$ at $3.5 \mathrm{MHZ}$ BW

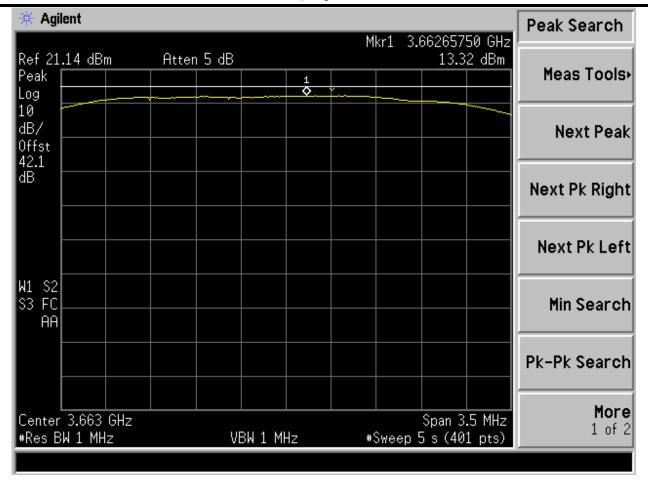

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 84 of 119	




July 21, 2009	Radio Test Report for	Davision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 37 – 3662.5MHz PSD, 16QAM at.5MHZ BW

Axxcelera						RF Te	est Data
Client	Axxcelera Broadband Wireless		Project Number		r AXX-IDU20090501		
Model	EID-C	EID-CPE3410-C9		Projec	et Revision	2	
POC	Ch	Chris Moritz		Tes	st Engineer	Al Servais	•
Test Standard	FCC 47	FCC 47 CFR Part 90		Systems Director		Chris Mor	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	6	%

$3662.5 \mathrm{MHz}$ PSD, $16 \mathrm{QAM}$ at $5 \mathrm{MHZ}$ BW

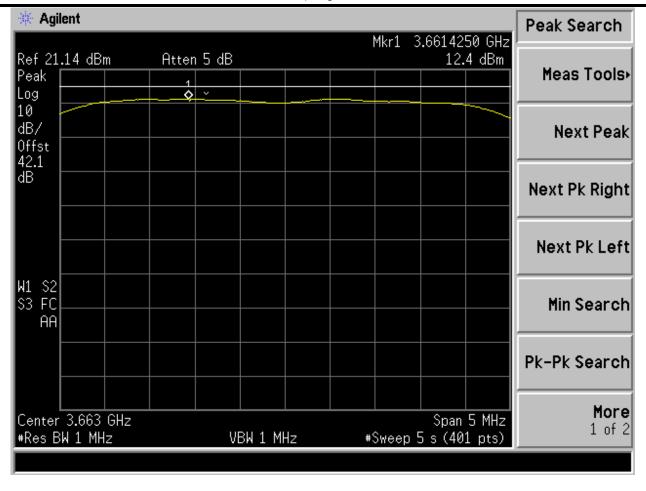

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 85 of 119	




L.L. 21, 2000	Radio Test Report for	Davision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 38 – 3662.5MHz PSD, 16QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Broadband Wireless			Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	Chris Moritz			st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3662.5 MHz PSD, 16QAM at 7MHZ BW

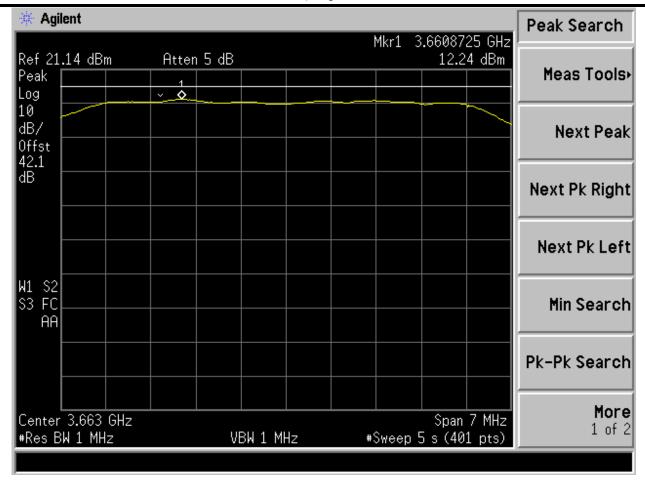

Author: Al Servais	Approval: Chris Moritz		Approval: Chris Moritz AXX-IDU200905		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 86 of 119		




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
• • •	EID-CPE3410-C9	

Table 39 – 3675MHz PSD, 16QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Broadband Wireless			Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	Chris Moritz			st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3675MHz PSD, 16QAM at 3.5MHZ BW

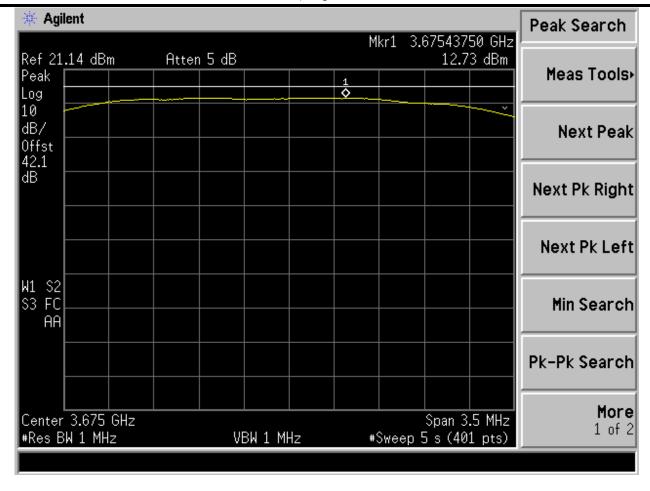

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 87 of 119	




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 40 – 3675MHz PSD, 16QAM at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Broadband Wireless			Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9			ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (FCC 47 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, 16QAM at 5MHZ BW

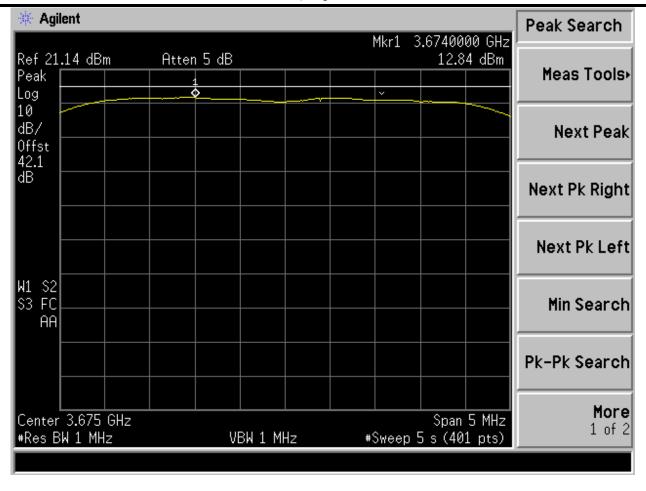

Author: Al Servais	Approval: Chris Moritz		Approval: Chris Moritz AXX-IDU20		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 88 of 119		




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

Table 41 – 3675MHz PSD, 16QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 (FCC 47 CFR Part 90		Systen	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3675MHz PSD, 16QAM at 7MHZ BW

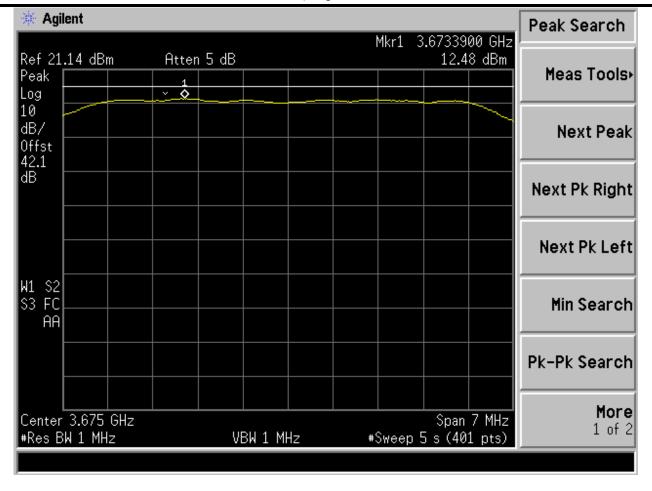

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 89 of 119




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

Table 42 – 3653.50MHz PSD, 64QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ct Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	Project Revision 2		
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3653.50MHz PSD, 64QAM at 3.5MHZ BW

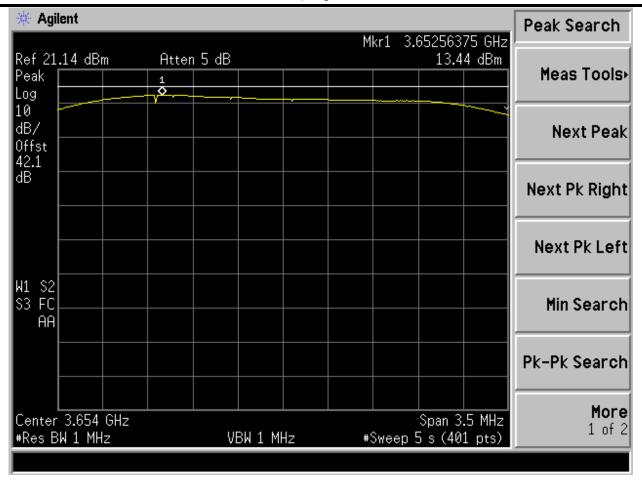

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 90 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 43 – 3654.50MHz PSD, 64QAM at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9		Project Revision		2		
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3654.50 \mathrm{MHz}$ PSD, $64 \mathrm{QAM}$ at $5 \mathrm{MHZ}$ BW

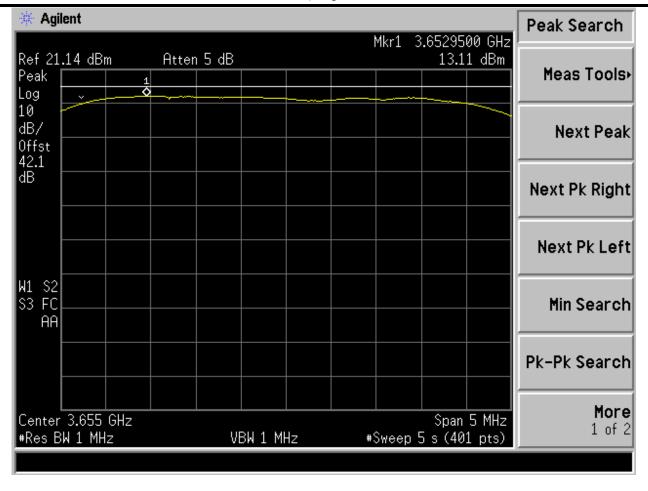

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 91 of 119




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 44 – 3655.50MHz PSD, 64QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9		Project Revision 2		2		
POC	Chri	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

$3655.50 \mathrm{MHz}$ PSD, $64 \mathrm{QAM}$ at $7 \mathrm{MHZ}$ BW

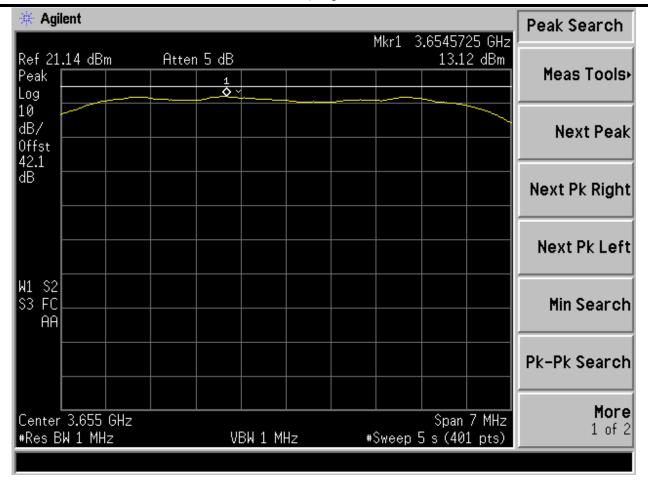

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 92 of 119	




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 200)	EID-CPE3410-C9	Revision. 2

Table 45 - 3662.5MHz PSD, 64QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Project Number		AXX-IDU20090501	
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Test Engineer		Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5 MHz PSD, 64QAM at 3.5 MHZ BW

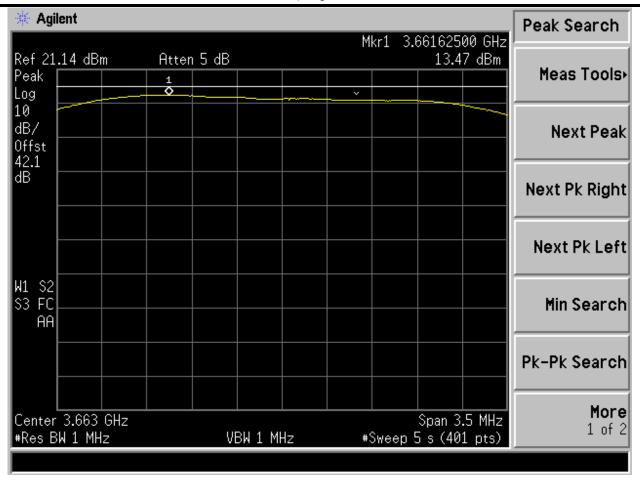

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 93 of 119




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 46 – 3662.5MHz PSD, 64QAM at.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	Chris Moritz		Test Engineer		Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3662.5 MHz PSD, 64QAM at 5MHZ BW

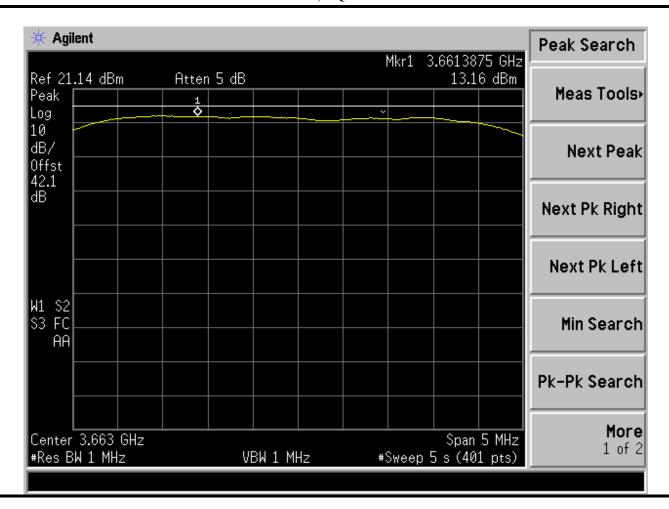

I	Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
I	Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 94 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 47 - 3662.5MHz PSD, 64QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Test Engineer		Al Servais	
Test Standard	FCC 47 (FCC 47 CFR Part 90		Systems Director		Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	23	°C	Relative	Humidity	5	56	%

3662.5 MHz PSD, 64QAM at 7MHZ BW

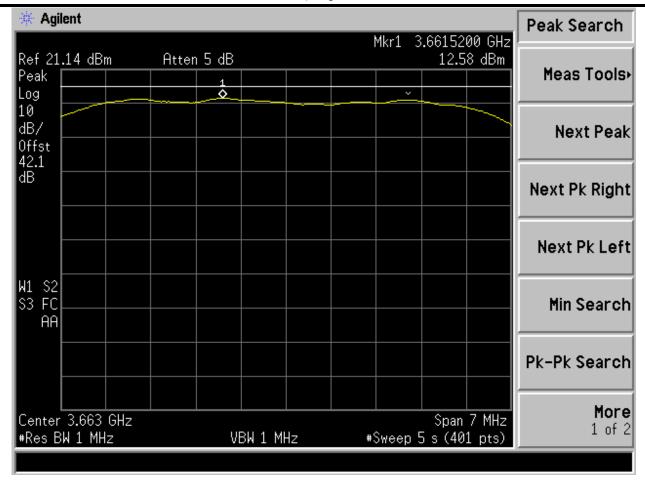

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 95 of 119	




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 48 – 3675MHz PSD, 64QAM at 3.5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	Chris Moritz		Test Engineer		Al Servais	
Test Standard	FCC 47 C	FCC 47 CFR Part 90		Systems Director		Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3675MHz PSD, 64QAM at 3.5MHZ BW

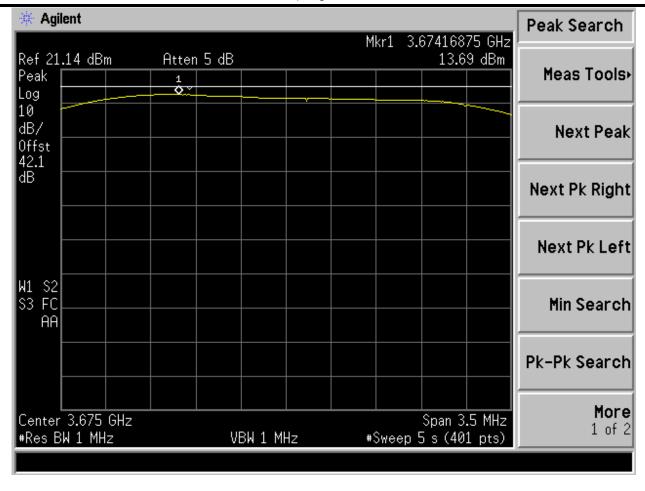

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 96 of 119	




1.1.21 2000	Radio Test Report for	Pavision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 49 – 3675MHz PSD, 64QAM at 5MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		System	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	23	°C	Relative	e Humidity	5	66	%

3675MHz PSD, 64QAM at 5MHZ BW

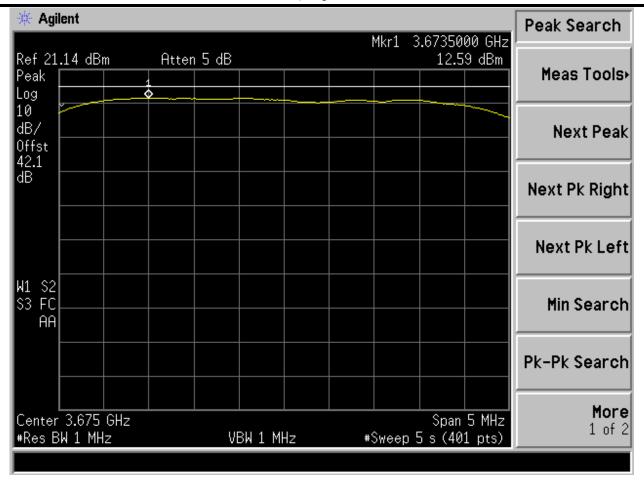

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 97 of 119	




July 21, 2009	Radio Test Report for	Revision: 2	
v, 21, 200,	EID-CPE3410-C9	Revision. 2	

Table 50 – 3675MHz PSD, 64QAM at 7MHZ BW

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	Project Number AXX		20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC .	Hz
Temperature	23	ç	Relative	Humidity	5	56	%
	·	·					

3675MHz PSD, 64QAM at 7MHZ BW

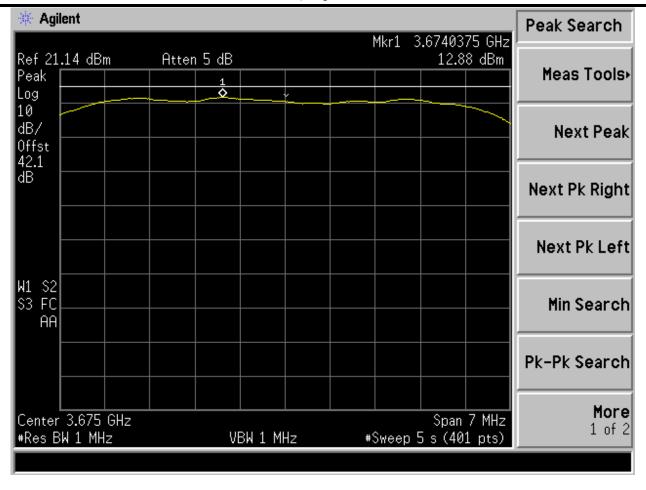

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 98 of 119	




L.L. 21, 2000	Radio Test Report for	Davision, 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 51 – 3653.50MHz Band Edge Spurious 64QAM

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP	EID-CPE3410-C9		Proje	ct Revision	2	
POC	Chris Moritz		Tes	st Engineer	Al Servais		
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

3653.50 Band Edge Spurious 64QAM

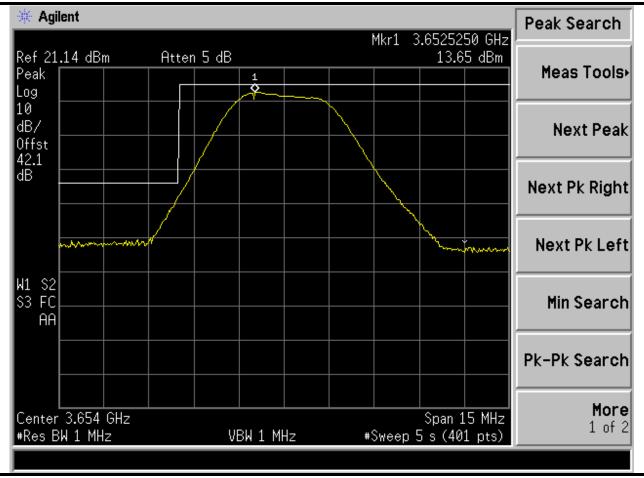

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 99 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
---------------	---	-------------

Table 52 – 3654.50MHz Band Edge Spurious 64QAM

Axxcelera						RF Te	est Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	J20090501
Model	EID-CP	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mor	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Γ	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

3654.50 Band Edge Spurious 64QAM

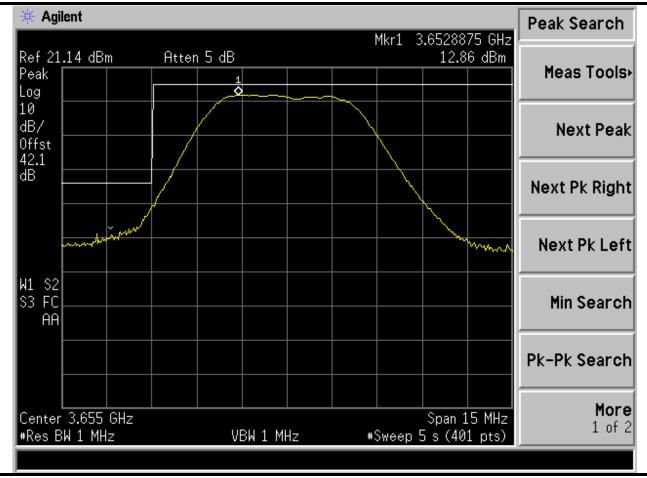

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 100 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 53 – 3655.5MHz Band Edge Spurious 64QAM

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CP.	EID-CPE3410-C9		Project Revision 2		2	
POC	Chris	s Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

3655.50 Band Edge Spurious 64QAM

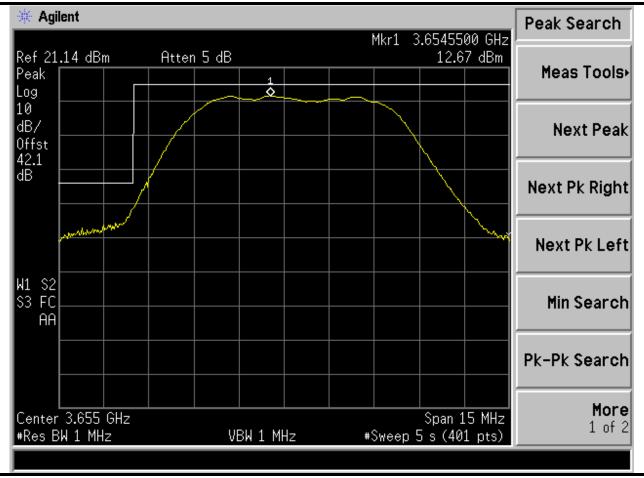

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 101 of 119	




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

Table 54 – Conducted Spurious 9KHz to 150KHz BPSK

Axxcelera						RF Te	est Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ct Number	AXX-IDU	J20090501
Model	EID-CF	EID-CPE3410-C9		Projec	ct Revision	2	
POC	Chri	is Moritz		Tes	st Engineer	Al Servais	,
Test Standard	FCC 47 (CFR Part 90		Systen	ns Director	Chris Moi	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

Conducted Spurious Emissions 9KHz to 150KHz

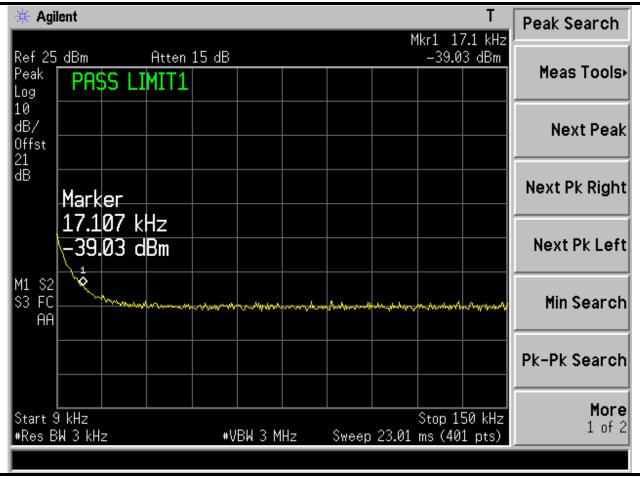

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 102 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 55 - Conducted Spurious 150KHz to 30MHz BPSK

Axxcelera						RF Te	est Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	J20090501
Model	EID-CPE3410-C9		Project Revision 2				
POC	Chri	Chris Moritz		Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mor	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Γ	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

Conducted Spurious Emissions 150KHz to 30MHz

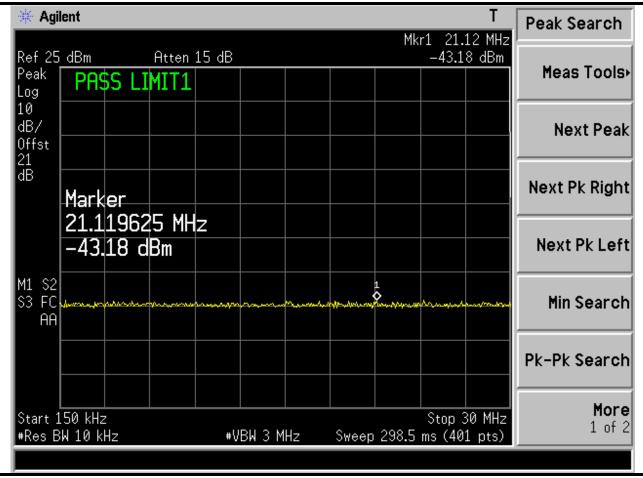

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 103 of 119	




July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

Table 56 - Conducted Spurious 30MHz to 1GHz BPSK

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wirel	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9		Proje	ct Revision	2		
POC	Chris Moritz		Tes	st Engineer	Al Servais		
Test Standard	FCC 47 C	CFR Part 90		Systen	ns Director	Chris Mor	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

Conducted Spurious Emissions 30MHz to 1GHz

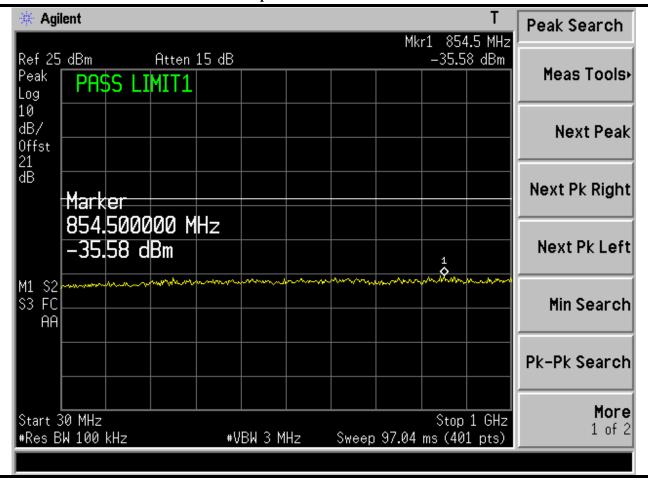

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 104 of 119	




July 21, 2009	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Revision. 2

Table 57 - Conducted Spurious 1GHz to 26GHz BPSK

Axxcelera						RF Te	est Data
Client	Axxcelera E	Broadband Wirel	less	Proje	ect Number	AXX-IDI	U20090501
Model	EID-CPE3410-C9			Projec	ct Revision	2	
POC	Chris Moritz			Tes	st Engineer	Al Servai	S
Test Standard	FCC 4	7 CFR Part 90	CFR Part 90		ns Director	Chris Mo	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%

Conducted Spurious Emissions 1GHz to 26GHz

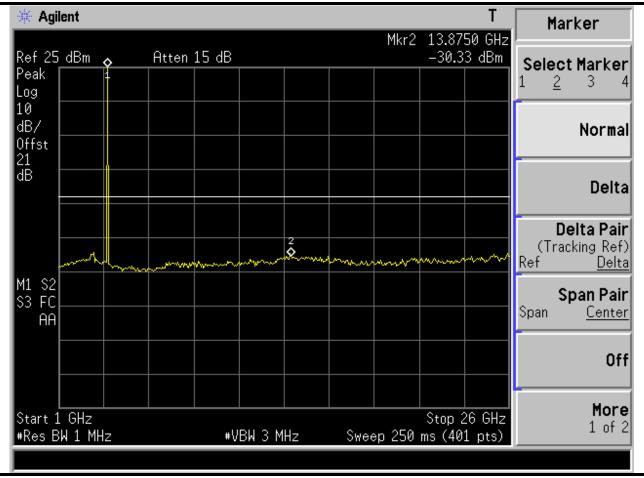

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 105 of 119



L.L. 21, 2000	Radio Test Report for	Revision: 2
July 21, 2009	EID-CPE3410-C9	Kevision: 2

Table 58 - Radiated Spurious 1GHz to 18GHz CF 3653.5 BPSK

Axxcelera							RF Test Da
C	lient	Axxcelera Br	roadband Wirel	less	Projec	t Number	AXX-IDU2009050
M	odel	EID-C	CPE3410-C9		Project	Revision	2
	POC		ris Moritz			Engineer	Al Servais
Test Stand			CFR Part 90			s Director	Chris Moritz
Operating Vol Tempera		+12 VDC	AC/DC		Frequency Humidity		OC Hz
	•						•
		Radiated	Spurious Emi	ssions 1GHz	z to 18GHz		
dBm 0.0 -10.0 -20.0		Vaso	na by EMiS	Soft		D-	+ Debog
-30.0 -40.0						-	Meas Dist 3m Spec Dist 3m
		s I 37 I . 1		all the same		[4	li.
-50.0	who	bearmand	and Livering and the				
-50.0 -60.0	whole	Maschanoudh	ad language of the				

-90.0 1000.0 Radiated Emissions Template: 18Amp ETSI Pwr 1-18 GHz Mitec Filename: k:\compliance management\axxcelera\axxcelera\axxcelera\footnote{1.00} fcc part 90 ap + cpe\text{test program}

100000,0

Frequency: MHz

180000.0

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 106 of 119



July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2
• • •	EID-CPE3410-C9	

Table 59 - Radiated Spurious 1GHz to 18GHz CF 3662.5 BPSK

Axxcelera					RF	Test Da
Client	Axxcelera	Broadband Wire	less	Project N	Number AXX	X-IDU2009050
Model	EID-	CPE3410-C9		Project R	evision 2	
POC		Chris Moritz			8	ervais
Test Standard		17 CFR Part 90		Systems I		is Moritz
Operating Voltage	+12 VDC	AC/DC		Frequency	DC	Hz
Temperature	22	°C	Relative	Humidity	54	%
	Conduct	ed Spurious Em	nissions 1GH	Iz to 18GHz		
-10.0 -20.0 -30.0 -40.0			lal -	ha di mania sonini	Meas	1] Horizontz 2] Vertical Peak Limit Debug : Dist 3m Dist 3m
-50.0 -50.0 -70.0	Man Comme	La Langue Barrer			Freque	

Radiated Emissions Template: 18 Amp ETSI Pwr 1-18 GHz Mitec Filename: k:\compliance management\axxcelera\axxcelera\axxcelera\footnote{1.00} fcc part 90 ap + cpe\text{test program}

Author: Al Servais	Approval: Chris Moritz	:	AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 107 of 119



July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2	
---------------	---	-------------	--

Table 60 – Radiated Spurious 1GHz to 18GHz CF 3675 BPSK

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9			Proje	ct Revision 2		
POC	Chris Moritz			Tes	st Engineer	Al Servais	
Test Standard	FCC 47 C	CFR Part 90		Syster	ns Director	Chris Mort	itz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	C	Hz
Temperature	22	°C	Relative	e Humidity	5	4	%
			•	•	•		•

Conducted Spurious Emissions 1GHz to 18GHz

BPSK 3.5 MHz Bandwidth Channel Frequency 36750 MHz Results 04 Nov 08 11:57 -dBm Vasona by EMiSoft 0.0 Horizonta Vertical -10.0Peak Limit Debug -20,0 Meas Dist 3m -30,0 Spec Dist 3m -40.0 -50.0 AN MARCHANISME -60.0 -70.0-80.0 Frequency: MHz -90.0 10000.0 100000.0 180000.0 Radiated Emissions Template: 18Amp ETSI Pwr 1-18 GHz Mitec Filename: k:\compliance management\axxcelera\axxcelera\axxcelera\footnote{18Amp ETSI Pwr 1-18 GHz Mitec

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 108 of 119



July 21, 2009	Radio Test Report for EID-CPE3410-C9	Revision: 2


Table 61 - Radiated Spurious 30MHz to 1GHz CF 3653.5 BPSK

Axxcelera						RF Te	st Data
Client	Axxcelera Broadband Wireless		Proje	ect Number AXX-ID		20090501	
Model	EID-CP	E3410-C9		Proje	ct Revision 2		
POC	Chri	s Moritz		Tes	Test Engineer Al Ser		
Test Standard	FCC 47 CFR Part 90		Systems Director		Chris Mor	itz	
Operating Voltage	+12 VDC	AC/DC		Frequency	D	OC	Hz
Temperature	22	°C	Relative	e Humidity	5	4	%

Conducted Spurious Emissions 30MHz to 1GHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV	Margin dB
50.584	67.18	3.73	-30.46	40.45	Quasi Max	٧	98	321	40.5	-0.05
42.857	60.25	3.61	-25.49	38.36	Quasi Max	٧	100	185	40.5	-2.14
93.154	64.87	4.1	-32.84	36.12	Quasi Max	V	107	218	40.5	-4.38
129.495	56.1	4.37	-27.94	32.52	Quasi Max	Н	231	152	40.5	-7.98
799.985	55.63	7.18	-21.24	41.57	Quasi Max	V	147	198	47.5	-5.93
332.95	47.57	5.35	-28.44	24.48	Quasi Max	Τ	108	263	47.5	-23.02

Radiated Spurious Emissions 30 MHz to 1 GHz

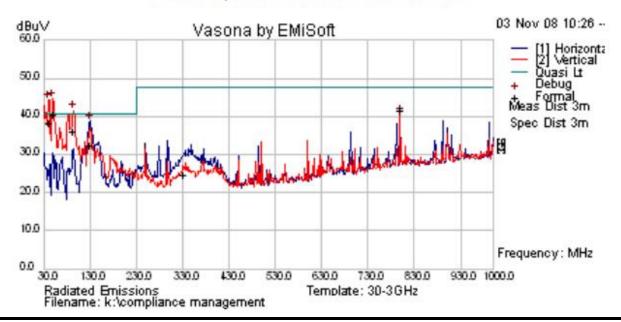

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 109 of 119



July 21, 2009	Radio Test Report for	Paulaian, 2	
	EID-CPE3410-C9	Revision: 2	


Table 62 – AC Power line Conducted Emissions CF 3653.5 BPSK

Axxcelera						RF Te	st Data
Client	Axxcelera Bro	adband Wire	less	Proje	ect Number	AXX-IDU	20090501
Model	EID-CPE3410-C9		Projec	ct Revision	2		
POC	Chris Moritz		Tes	Test Engineer Al Servais			
Test Standard	FCC 47 CFR Part 90			Syster	ns Director	Chris Mor	ritz
Operating Voltage	+12 VDC	AC/DC		Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	e Humidity	5	4	%

AC Power Line Conducted Emissions

Freq (MHz)	Line	Peak (dBμV)	QP (dBμV)	QP Limit (dBµV)	QP Margin (dB)	Ave. (dΒμV)	Ave. Limit (dBµV)	Ave. Margin (dB)
24.533	Live	46.3	45.39	60	-14.61	42.25	50	-7.75
0.15	Live	54.61	45.4	65.99	-20.59	17.49	55.99	-38.5
24.35	Live	45.56	45.63	60	-14.37	42.34	50	-7.66
4.135	Live	42.1	41.19	56	-14.81	36.85	46	-9.15
23.129	Live	45.88	44.75	60	-15.25	41.8	50	-8.2
0.527	Neut	41.85	39.59	56	-16.41	38.1	46	-7.9

AC Wireline Conducted Emissions (150 kHz - 30 MHz)

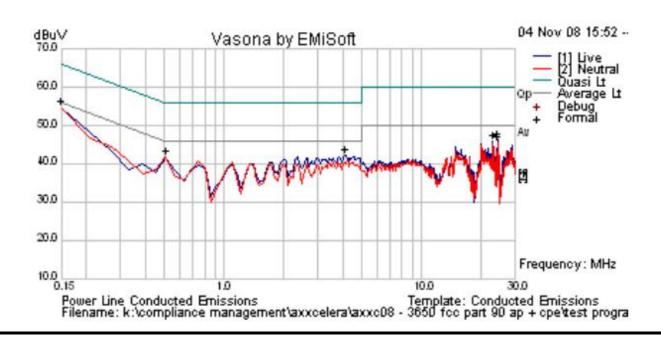

Author: Al Servais	Approval: Chris Moritz	AXX-IDU20090501	
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 110 of 119



July 21, 2009	Radio Test Report for	Revision: 2
	EID-CPE3410-C9	Kevision. 2

Table 63 – Frequency Stability

Axxcelera						RF Te	est Data
Client	Axxcelera Bro	adband Wire	less	Projec	et Number	AXX-IDU	J20090501
Model	EID-CP	PE3410-C9			t Revision	2	
POC	Chri	is Moritz			t Engineer	Al Servais	
Test Standard	FCC 47 (CFR Part 90		System	s Director	Chris Mor	ritz
Operating Voltage	+12 VDC	AC/DC	-	Frequency	Г	OC .	Hz
Temperature	22	°C	Relative	Humidity	5	4	%
		Frequency	Stability				
Voltage	Temperature(C)	Center Fi	requency	Del	lta	P	PM
10.8	-33	3662.5	50157	1.57		0	.04
13.2	-33	3662.5	50159	1.59		0	.04
	-20	3662.	5016	1.6	50	0	.04
	-10	3662.5	51695	16.	95	4	.63
12	0	3662.5	51964	19.	64	5	.36
	10	3662.	5154	15.4	40	4	.20
	20	3662.5	50935	9.3	5	2	.55
10.8	20	3662.4	19598	-4.0)2	1	.09
13.2	20	3662.4	19595	-4.0)5	1	.10
	30	3662.4	19593	-4.0)7	1	.11
12	40	3662.4	18735	-12.	65	3	.45
12	50	3662.4	48107	-18.	93	5	.17
	55	3662.47966		-20.34		5	.55
10.8	55	3662.4	18224	-17.	76	4	.85
13.2	55	3662.4	18203	-17.	97	4	.91

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 111 of 119



July 21, 2009	Radio Test Report for	Revision: 2	
	EID-CPE3410-C9	Kevision. 2	

Table 64 – MPE

	Client		Axxcelera Broa	dband Wirel	ess	Proie	ct Number	AXX-ID	U20090501
	Model		EID-CPE	3410-C9		-	t Revision	2	
	POC		Chris	Moritz		Tes	t Engineer	Al Serva	is
Tes	st Standard		FCC 47 CI	FR Part 90		System	s Director	Chris Me	oritz
Operati	ng Voltage	+	12 VDC	AC/DC		Frequency	Г	OC .	Hz
To	emperature		22	°C	Relat	ive Humidity	5	4	%
				MI	E				
Frequency Band	Antenna (dBi		Numeric Gain	MAX Out	put	Peak Output Power (mW)	Caic	ulated Distance	Minimum Separation
	10		10	14.	10	24.48	1/10	96cm	20cm

Author: Al Servais	Approval: Chris Moritz	_	AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 112 of 119
		H. J. J. J. J. H. J. J. J.	

4.4 EUT Test Configuration Photos



Figure 2 – EUT Front Photo

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 113 of 119

4.5 EUT External Photos



Figure 3 – EUT Front Photo

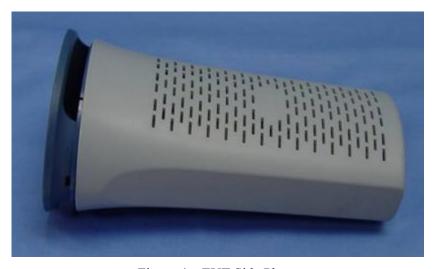


Figure 4 – EUT Side Photo

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 114 of 119



Figure 5 – EUT Bottom Photo

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 115 of 119



Figure 6 – EUT Bottom Photo


Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 116 of 119

This Drawing is the Property of Axxcelera Broadband Wireless. This drawing is loaned upon the express condition that it shall not be reproduced in any manner, and shall be returned upon demand. It is submitted for evaluation purposes and it, and the information contained therein, shall not be otherwise used nor disclosed to third parties without written permission of Axxcelera Broadband Wireless.

4.6 EUT Label and Label Location

Axxcelera EID-CPE3410-C9 Product Label

76x25xR1,5mm

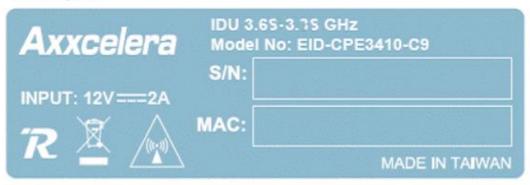

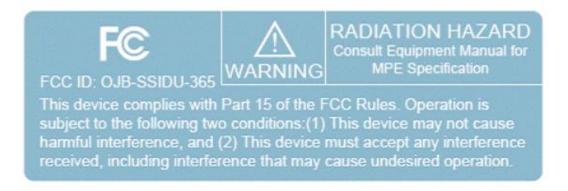


Figure 7 – FCC Label and Location

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 117 of 119



L.L. 21, 2000	Radio Test Report for	Ravisiana 2
July 21, 2009	EID-CPE3410-C9	Revision: 2

5 Test Equipment Use List

5.1 Test Equipment List

Table 65 – Axxcelera T&M List

Axxcelera T&M List				
Cal Due	Manufacturer	Model Number	Nomenclature	Serial Number
24-Nov-09	Agilent	E4416A	EPM-P Series Power Meter	GB41292813
24-Nov-09	Agilent	E9323A	Peak and Ave Power Sensor	US40411900
14-Apr-10	Agilent	E4407B	Spectrum Analyzer	MY44211509

Radio Test Report for July 21, 2009 Revision: 2 EID-CPE3410-C9

Declaration of Conformity

Declaration of Conformity

Axxcelera Broadband Wireless, Inc. 111 Castilian Drive Santa Barbara CA, 93117

declares that under our sole responsibility, the product

ExcelMAX WiMAX wireless Broadband, IDU

is in conformity with the provisions of the following radio standards specification, including all amendments and with national legislation:

47 CFR § 90

NAME AND TITLE Al Servais

Senior Compliance Engineer

PLACE Richmond VA

DATE 07/12/2009

SIGNATURE OF APPLICANT

Author: Al Servais	Approval: Chris Moritz		AXX-IDU20090501
Issued: Tuesday, July 21, 2009	Office: Richmond	Laboratory: RIC	Sheet 119 of 119