



ISRAEL TESTING LABORATORIES  
Global Certifications You Can Trust



**DATE: 27 December 2016**

**I.T.L. (PRODUCT TESTING) LTD.**  
**FCC Radio Test Report**  
for  
**Corning Optical Communication**  
**Wireless**

**Equipment under test:**

**ONE - Optical Network Evolution DAS**

**RAU-5 Remote Antenna Unit**

**AWS, CELL/ESMR, LTE, PCS**  
**(PCS Section)**

Tested:

  
M. Zohar

Approved by:

  
D. Shidlow

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.  
This report relates only to items tested.



ISRAEL TESTING LABORATORIES  
Global Certifications You Can Trust



**Measurement/Technical Report for**  
**Corning Optical Communication Wireless**  
**ONE - Optical Network Evolution DAS**  
**(PCS SECTION)**  
**FCC ID: OJF1RAU5**

This report concerns:

Original Grant:

Class II change: X

Class I change:

Equipment type:

Part 20 Industrial Booster (CMRS)

Limits used:

47CFR Parts 2, 24

Measurement procedure used is KDB 971168 D03 v01 and  
KDB 935210 D05 v01r01.

Substitution Method used as in ANSI/TIA-603-D: 2010

Application for Certification  
prepared by:

R. Pinchuck

ITL (Product Testing) Ltd.

1 Bat Sheva St.

Lod 7120101

Israel

e-mail [rpinchuck@itl.co.il](mailto:rpinchuck@itl.co.il)

Applicant for this device:  
(different from "prepared by")

Habib Riazi

Corning Optical Communication Wireless

13221 Woodland Park Rd., Suite #400

Herndon, VA. 20171

U.S.A.

Tel: +1-541-758-2880

Fax: +1-703-848-0260

e-mail: [RiaziH@corning.com](mailto:RiaziH@corning.com)



# TABLE OF CONTENTS

|           |                                                                    |           |
|-----------|--------------------------------------------------------------------|-----------|
| <b>1.</b> | <b>GENERAL INFORMATION</b>                                         | <b>5</b>  |
| 1.1       | Administrative Information                                         | 5         |
| 1.2       | List of Accreditations                                             | 6         |
| 1.3       | Product Description                                                | 7         |
| 1.4       | Test Methodology                                                   | 7         |
| 1.5       | Test Facility                                                      | 7         |
| 1.6       | Measurement Uncertainty                                            | 7         |
| <b>2.</b> | <b>SYSTEM TEST CONFIGURATION</b>                                   | <b>8</b>  |
| 2.1       | Justification                                                      | 8         |
| 2.2       | EUT Exercise Software                                              | 8         |
| 2.3       | Special Accessories                                                | 8         |
| 2.4       | Equipment Modifications                                            | 8         |
| 2.5       | Configuration of Tested System                                     | 9         |
| <b>3.</b> | <b>TEST SET-UP PHOTOS</b>                                          | <b>11</b> |
| <b>4.</b> | <b>PEAK OUTPUT POWER PCS</b>                                       | <b>15</b> |
| 4.1       | Test Specification                                                 | 15        |
| 4.2       | Test Procedure                                                     | 15        |
| 4.3       | Test Limit                                                         | 15        |
| 4.4       | Test Results                                                       | 15        |
| 4.5       | Test Equipment Used; Peak Output Power PCS                         | 21        |
| <b>5.</b> | <b>OCCUPIED BANDWIDTH PCS</b>                                      | <b>22</b> |
| 5.1       | Test Specification                                                 | 22        |
| 5.2       | Test Procedure                                                     | 22        |
| 5.3       | Test Limit                                                         | 22        |
| 5.4       | Test Results                                                       | 22        |
| 5.5       | Test Equipment Used; Occupied Bandwidth PCS                        | 32        |
| <b>6.</b> | <b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS PCS</b>                 | <b>33</b> |
| 6.1       | Test Specification                                                 | 33        |
| 6.2       | Test Procedure                                                     | 33        |
| 6.3       | Test Limit                                                         | 33        |
| 6.4       | Test Results                                                       | 33        |
| 6.5       | Test Equipment Used; Out of Band Emission at Antenna Terminals PCS | 37        |
| <b>7.</b> | <b>BAND EDGE SPECTRUM PCS</b>                                      | <b>38</b> |
| 7.1       | Test Specification                                                 | 38        |
| 7.2       | Test Procedure                                                     | 38        |
| 7.3       | Test Limit                                                         | 38        |
| 7.4       | Test Results                                                       | 38        |
| 7.5       | Test Equipment Used; Band Edge Spectrum PCS                        | 42        |
| <b>8.</b> | <b>SPURIOUS EMISSIONS (RADIATED) PCS</b>                           | <b>43</b> |
| 8.1       | Test Specification                                                 | 43        |
| 8.2       | Test Procedure                                                     | 43        |
| 8.3       | Test Limit                                                         | 44        |
| 8.4       | Results Table                                                      | 44        |
| 8.5       | Test Instrumentation Used, Radiated Measurements                   | 45        |
| <b>9.</b> | <b>INTERMODULATION CONDUCTED</b>                                   | <b>46</b> |
| 9.1       | Test Procedure                                                     | 46        |
| 9.2       | Test Limit                                                         | 46        |
| 9.3       | Test Results                                                       | 46        |
| 9.4       | Test Equipment Used; Intermodulation Conducted                     | 47        |



|            |                                                                  |           |
|------------|------------------------------------------------------------------|-----------|
| <b>10.</b> | <b>INTERMODULATION RADIATED</b>                                  | <b>48</b> |
| 10.1       | Test Procedure                                                   | 48        |
| 10.2       | Test Limit                                                       | 49        |
| 10.3       | Test Results                                                     | 49        |
| 10.4       | Test Instrumentation Used; Radiated Measurements Intermodulation | 51        |
| <b>11.</b> | <b>OUT-OF-BAND REJECTION (PCS)</b>                               | <b>52</b> |
| 11.1       | Test Specification                                               | 52        |
| 11.2       | Test Procedure                                                   | 52        |
| 11.3       | Test Limit                                                       | 52        |
| 11.4       | Test Results                                                     | 52        |
| 11.5       | Test Equipment Used; Out-of-Band Rejection                       | 53        |
| <b>12.</b> | <b>APPENDIX A - CORRECTION FACTORS</b>                           | <b>54</b> |
| 12.1       | Correction factors for RF OATS Cable 35m                         | 54        |
| 12.2       | Correction factors for RF OATS Cable 10m                         | 55        |
| 12.3       | Correction factors for Horn Antenna                              | 56        |
| 12.4       | Correction factors for Horn ANTENNA                              | 57        |
| 12.5       | Correction factors for Log Periodic Antenna                      | 58        |
| 12.6       | Correction factors for Biconical Antenna                         | 59        |
| 12.7       | Correction factors for ACTIVE LOOP ANTENNA                       | 60        |



## 1. General Information

### 1.1 Administrative Information

|                                |                                                                                                                        |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Manufacturer:                  | Corning Optical Communication<br>Wireless                                                                              |
| Manufacturer's Address:        | 13221 Woodland Park Rd., Suite<br>#400<br>Herndon, VA. 20171<br>U.S.A.<br>Tel: +1-541-758-2880<br>Fax: +1-703-848-0260 |
| Manufacturer's Representative: | Habib Riazi                                                                                                            |
| Equipment Under Test (E.U.T):  | ONE - Optical Network Evolution<br>DAS                                                                                 |
| Equipment Model No.:           | RAU-5 Remote Antenna Unit                                                                                              |
| Equipment Serial No.:          | 05144900098                                                                                                            |
| Date of Receipt of E.U.T:      | July 13, 2016                                                                                                          |
| Start of Test:                 | July 17, 2016                                                                                                          |
| End of Test:                   | September 15, 2016                                                                                                     |
| Test Laboratory Location:      | I.T.L (Product Testing) Ltd.<br>1 Batsheva St,<br>Lod,<br>Israel 7116002                                               |
| Test Specifications:           | FCC Parts 2, 24                                                                                                        |



## **1.2 List of Accreditations**

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



### **1.3 Product Description**

The Optical Network Platform (ONE™) by Corning provides a flexible in-building RF and network digital coverage solution based on a fiber optic transport backbone.

The fiber-optics infrastructure is easily deployable via a wide range of pre-terminated composite cables and advanced end-to-end equipment. Easy to design, Plug and Play™ connectors, significantly reduce installation cost and deployment time.

The ONE™ solution is an ideal fit for large, high-rise or campus-style deployments. It generates significant CAPEX savings and OPEX savings through the use of user configurable sectorization and an infrastructure that is simple to deploy and efficient in usage.

Dynamic sectorization management allows precise service distribution control to meet changing density needs, and provides further savings by enabling sharing of equipment at various levels for service providers.

Radio source agnostic, remote units can be used as network extenders. Ethernet capability with dedicated fiber link for Wi-Fi offload brings a higher level of granularity and support for devices and applications with very high speed requirements.

### **1.4 Test Methodology**

Both conducted and radiated testing were performed according to the procedures in KDB 971168 D03 v01, KDB 935210 D05 v01r01 and ANSI/TIA-603-D: 2010. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### **1.5 Test Facility**

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

### **1.6 Measurement Uncertainty**

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):  
± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)  
for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):  
± 4.98 dB



## 2. System Test Configuration

### 2.1 Justification

The E.U.T. was originally FCC certified on 12/26/2014 under FCC ID: OJF1RAU5.

The E.U.T. is part of a booster system operated with the RXU certified under FCC ID: OJF1RXU.

No changes have been made to the E.U.T.

The C2PC change is to allow the E.U.T. to operate as part of a booster system with the new RXU2325 certified under FCC ID: OJF1RXUN.

The E.U.T. has been fully tested with the RXU2325 and results presented in the four reports (for bands AWS, CELL/ESMR, PCS & LTE) submitted with this application.

The test setup was configured to closely resemble the standard installation.

The EUT consists of the HEU, the OIU and the RAU-5.

All source signals are represented in the setup by appropriate signal generators.

An "Exercise" SW on the computer was used to enable / disable transmission of the RAU-5, while the EUT output was connected to the spectrum analyzer.

All channels transmitted during the testing.

There is neither an intermediate amplified nor donor antenna in the uplink.

All components included in the UL path are connected by cables.

### 2.2 EUT Exercise Software

HCM\_2.2 Build23

ACM\_2a00\_22\_11.bin

RMM\_5a00\_22\_02. bin

OIM\_7a03\_22\_05. bin

RAU5\_9a64\_22\_12.bin

### 2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

### 2.4 Equipment Modifications

No modifications were needed in order to achieve compliance.

## 2.5 Configuration of Tested System

|                          |                                      |
|--------------------------|--------------------------------------|
| Product Name             | ONE Wireless Platform                |
| Model Name               | RAU5                                 |
| Working voltage          | 48.0VDC                              |
| Mode of operation        | Industrial Booster for PCS band      |
| Modulations              | WCDMA, LTE(64QAM), GSM               |
| Assigned Frequency Range | 1930.0MHz-1995.0MHz                  |
| Transmit power           | ~20.0 dBm                            |
| Antenna Gain             | 12.5dBi                              |
| DATA rate                | N/A                                  |
| Modulation BW            | 0.5MHz(GSM), 10MHz(LTE), 5MHz(WCDMA) |

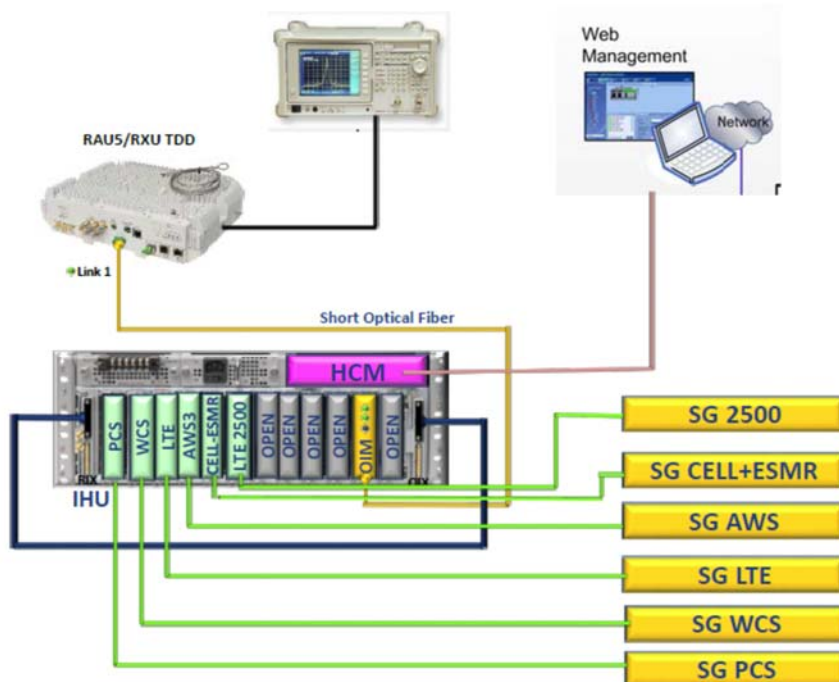


Figure 1. Test Set-Up – Conducted

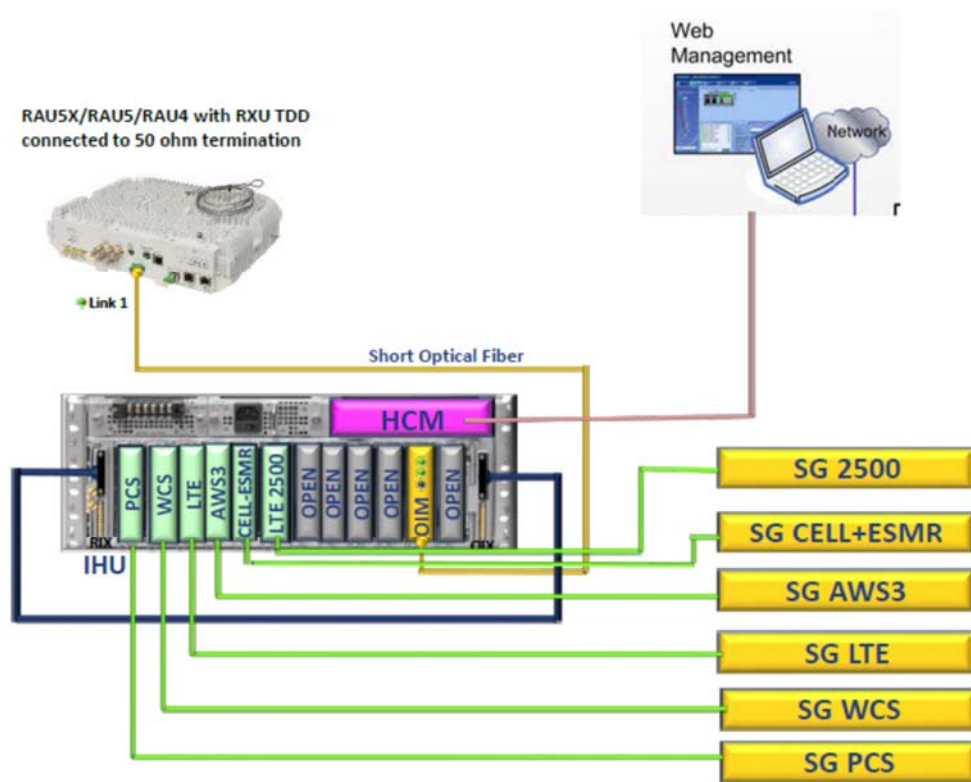


Figure 2. Test Set-Up - Radiated

### 3. Test Set-Up Photos



Figure 3. Conducted Emission From Antenna Port Tests


t



Figure 4. Radiated Emission Test




**Figure 5. Radiated Emission Test**

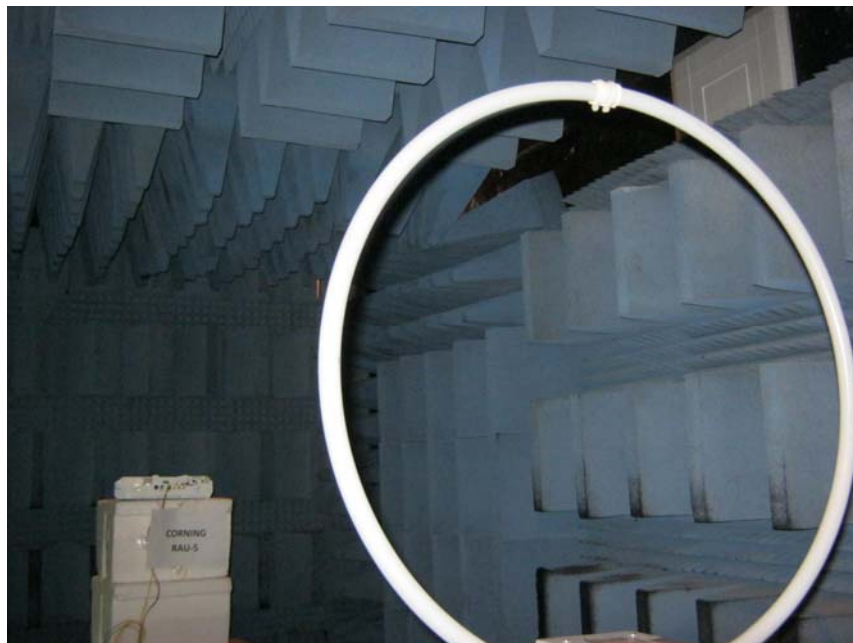


**Figure 6. Radiated Emission Test**



**Figure 7. Radiated Emission Test**

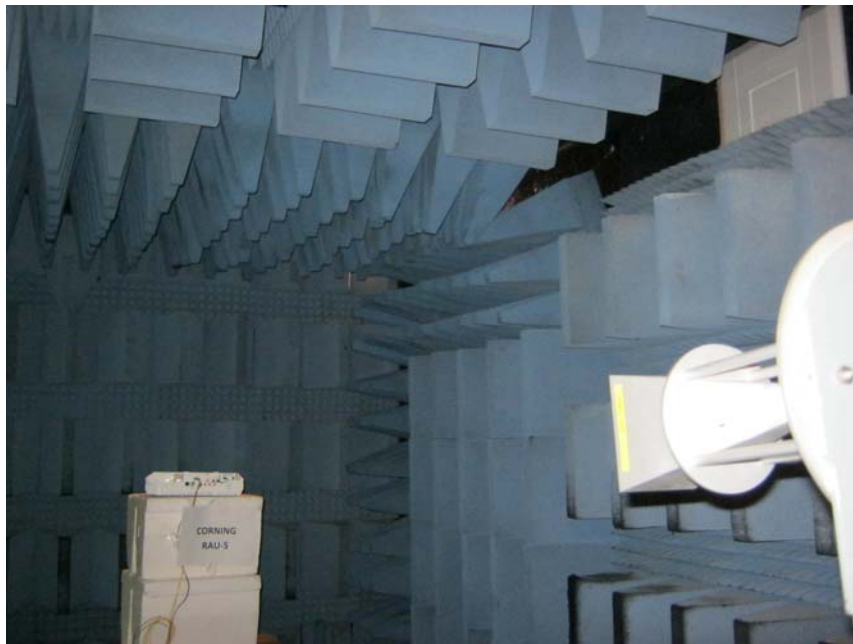

**Figure 8. Radiated Emission Test**

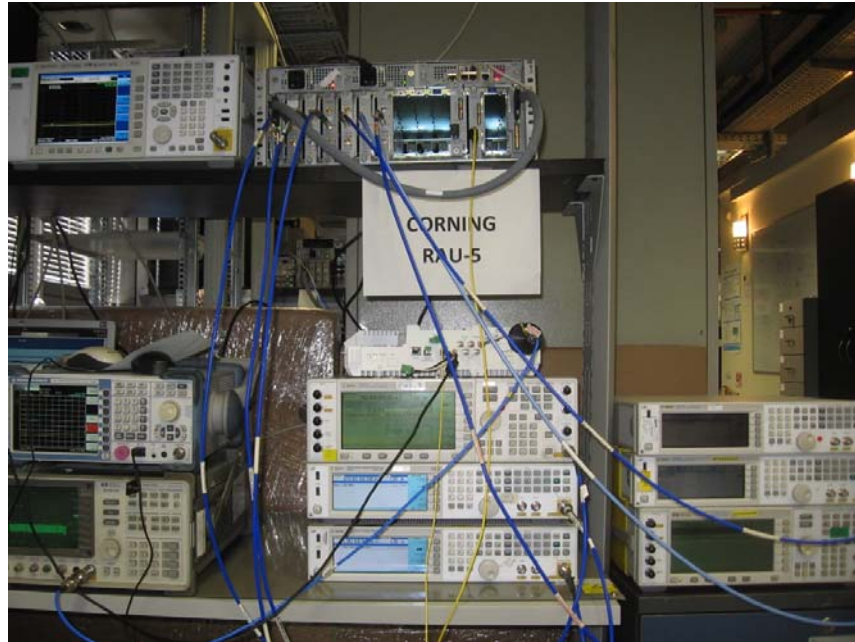

**Figure 9. Intermodulated Conducted Emission Test**

## 4. Peak Output Power PCS

### 4.1 Test Specification

FCC Part 24, Subpart E

### 4.2 Test Procedure

(Temperature (22°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (loss = 31.0 dB). The E.U.T. RF output was modulated with W-CDMA, GSM and LTE 64QAM. Special attention was taken to prevent Spectrum Analyzer RF input overload.

### 4.3 Test Limit

Peak Power Output must not exceed 100 Watts (50dBm).

### 4.4 Test Results

| Modulation | Operation Frequency | Reading | Antenna Gain | EIRP  | Limit | Margin |
|------------|---------------------|---------|--------------|-------|-------|--------|
|            | (MHz)               | (dBm)   | (dBi)        | (dBm) | (dBm) | (dB)   |
| LTE 64QAM  | 1935.0              | 20.1    | 12.5         | 32.6  | 50.0  | -17.4  |
|            | 1962.5              | 21.8    | 12.5         | 34.3  | 50.0  | -15.7  |
|            | 1990.0              | 20.4    | 12.5         | 32.9  | 50.0  | -17.1  |
| GSM        | 1931.2              | 20.4    | 12.5         | 32.9  | 50.0  | -17.1  |
|            | 1962.5              | 21.4    | 12.5         | 33.9  | 50.0  | -16.1  |
|            | 1993.8              | 21.3    | 12.5         | 33.8  | 50.0  | -16.2  |
| W-CDMA     | 1932.5              | 20.4    | 12.5         | 32.9  | 50.0  | -17.1  |
|            | 1962.5              | 20.3    | 12.5         | 32.8  | 50.0  | -17.2  |
|            | 1992.5              | 21.5    | 12.5         | 34.0  | 50.0  | -16.0  |

Figure 10 Peak Output Power PCS

JUDGEMENT: Passed by 15.7dB

See additional information in Figure 11 to Figure 19.

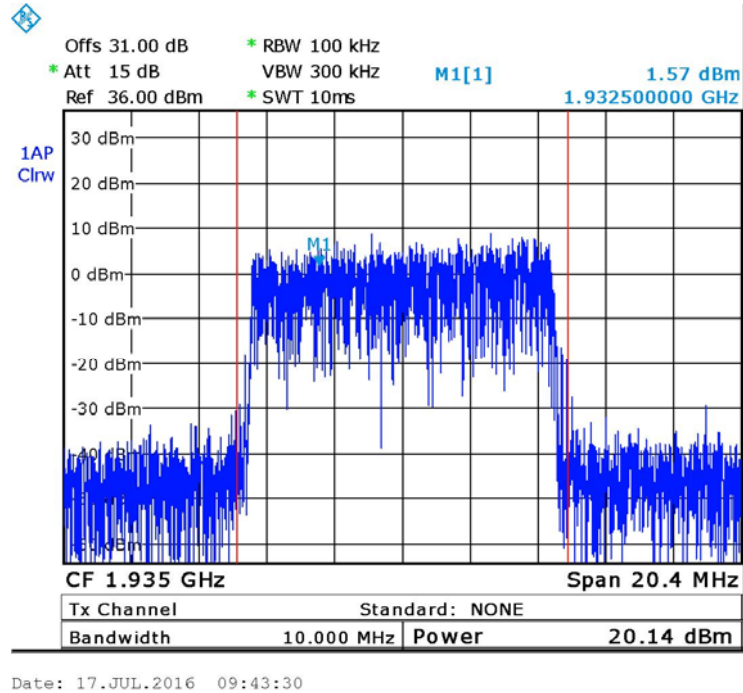


Figure 11. — LTE 64QAM 1935.0 MHz

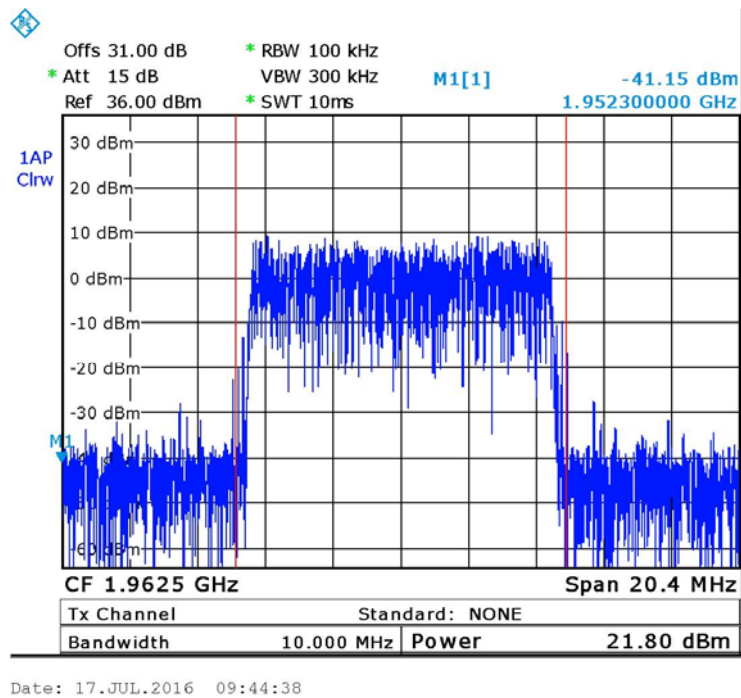


Figure 12. — LTE 64QAM 1962.5 MHz

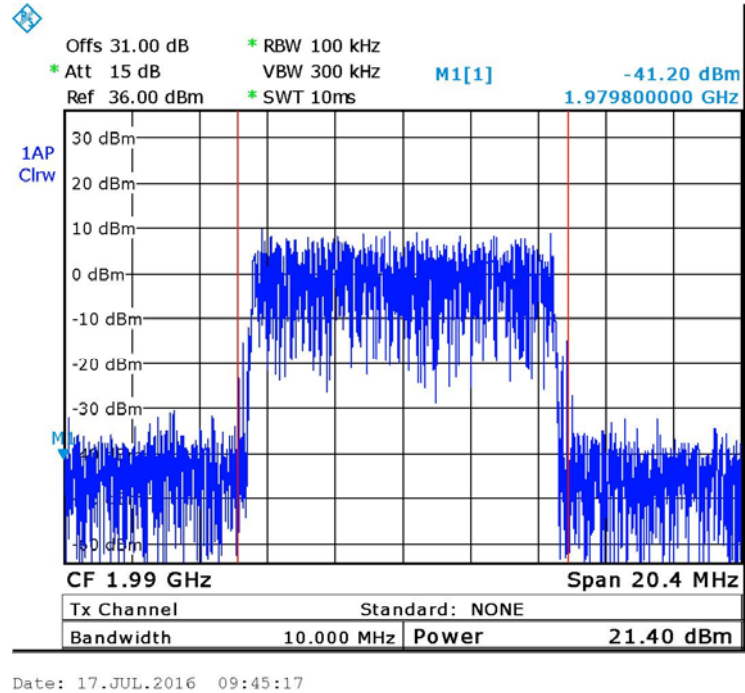


Figure 13. — LTE 64QAM 1990.0 MHz

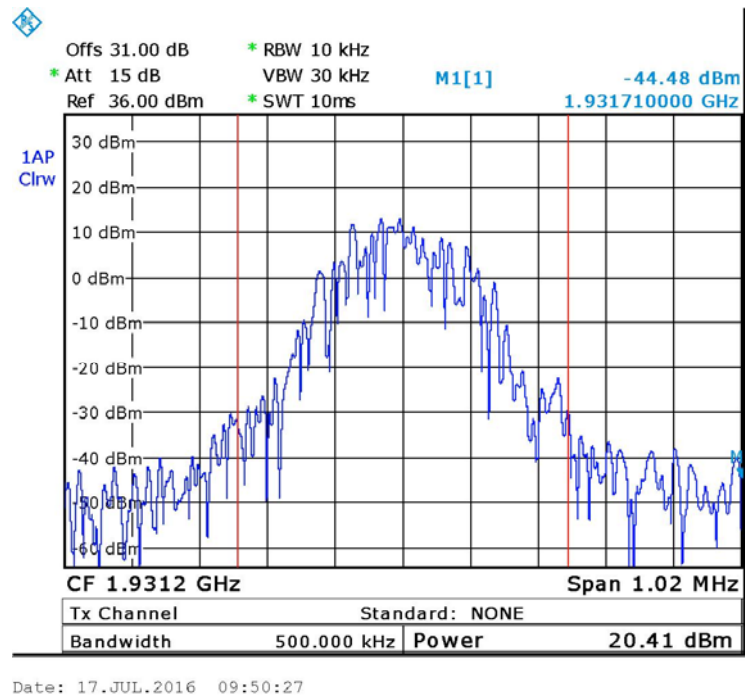


Figure 14. — GSM - 1931.2 MHz

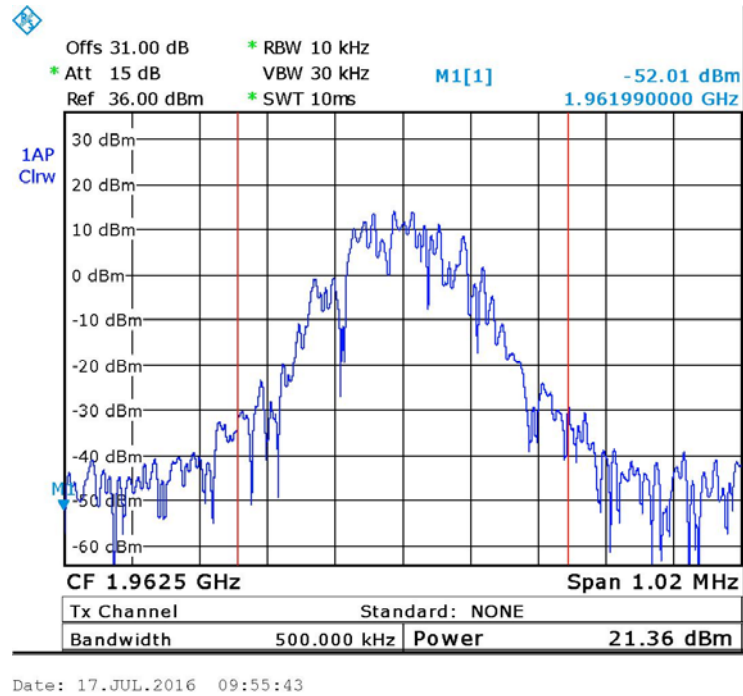


Figure 15. — GSM -1962.5 MHz

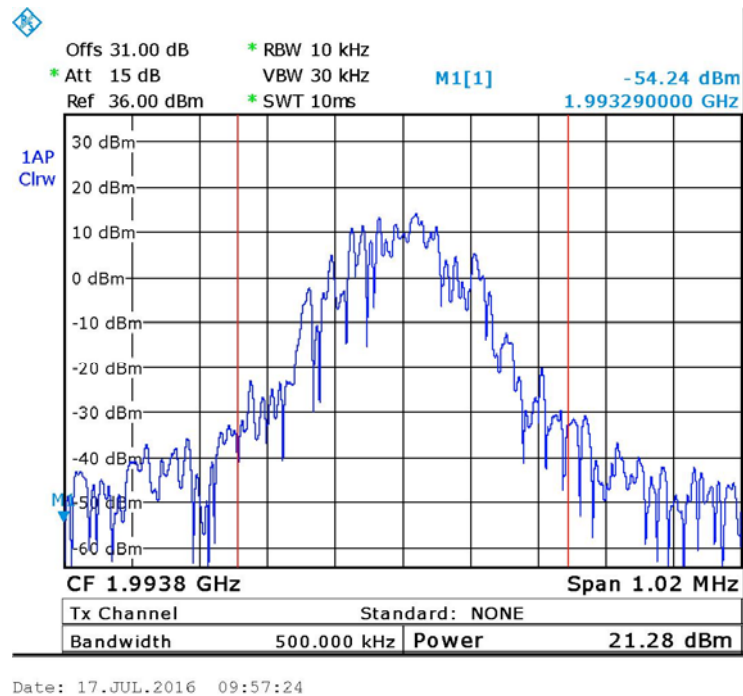


Figure 16. — GSM -1993.8 MHz

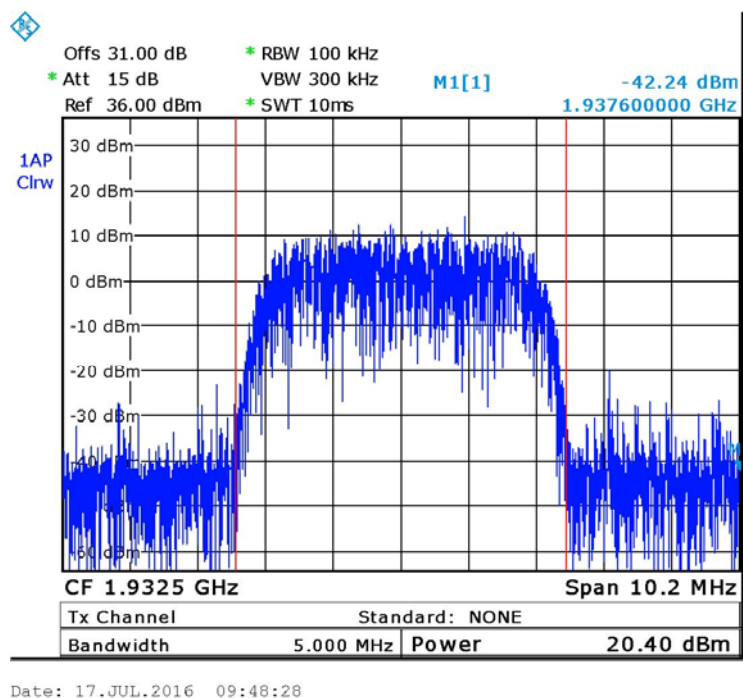


Figure 17. — W-CDMA - 1932.5 MHz


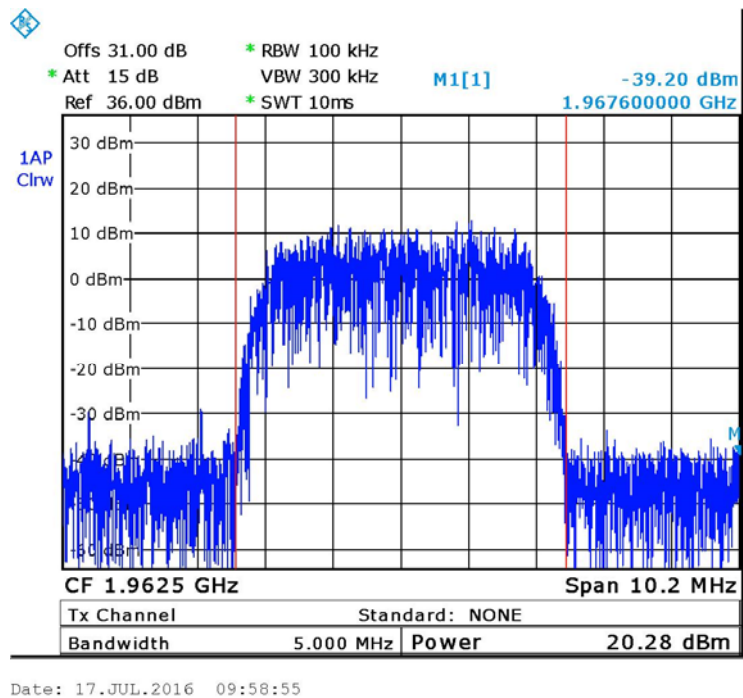


Figure 18. — W-CDMA - 1962.5 MHz



Date: 17.JUL.2016 09:47:16

Figure 19. — W-CDMA - 1992.5 MHz

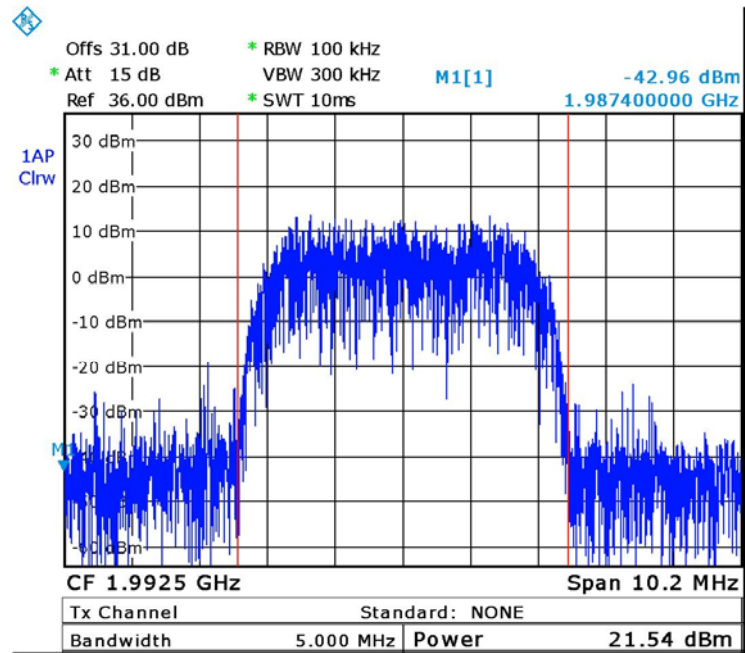

**4.5 Test Equipment Used; Peak Output Power PCS**

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 20 Test Equipment Used**

## 5. Occupied Bandwidth PCS

### 5.1 Test Specification

FCC Part 2, Section 1049

### 5.2 Test Procedure

(Temperature (22°C)/ Humidity (38%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (loss=31.0 dB). The spectrum analyzer was set to proper resolution B.W.

OBW function (99%) was employed for this evaluation.

Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

### 5.3 Test Limit

N/A

### 5.4 Test Results

| Modulation | Port            | Operating Frequency | Reading |
|------------|-----------------|---------------------|---------|
|            | (Input/ Output) | (MHz)               | (MHz)   |
| LTE 64QAM  | Input           | 1935.0              | 8.9     |
|            | Output          | 1935.0              | 8.9     |
|            | Input           | 1962.5              | 8.9     |
|            | Output          | 1962.5              | 8.9     |
|            | Input           | 1990.0              | 8.9     |
|            | Output          | 1990.0              | 8.9     |
| GSM        | Input           | 1931.2              | 0.2     |
|            | Output          | 1931.2              | 0.2     |
|            | Input           | 1962.5              | 0.2     |
|            | Output          | 1962.5              | 0.2     |
|            | Input           | 1993.8              | 0.2     |
|            | Output          | 1993.8              | 0.2     |
| W-CDMA     | Input           | 1932.5              | 4.1     |
|            | Output          | 1932.5              | 4.1     |
|            | Input           | 1962.5              | 4.1     |
|            | Output          | 1962.5              | 4.1     |
|            | Input           | 1992.5              | 4.1     |
|            | Output          | 1992.5              | 4.1     |

Figure 21 Occupied Bandwidth PCS

JUDGEMENT: Passed

See additional information in Figure 22 to Figure 39.

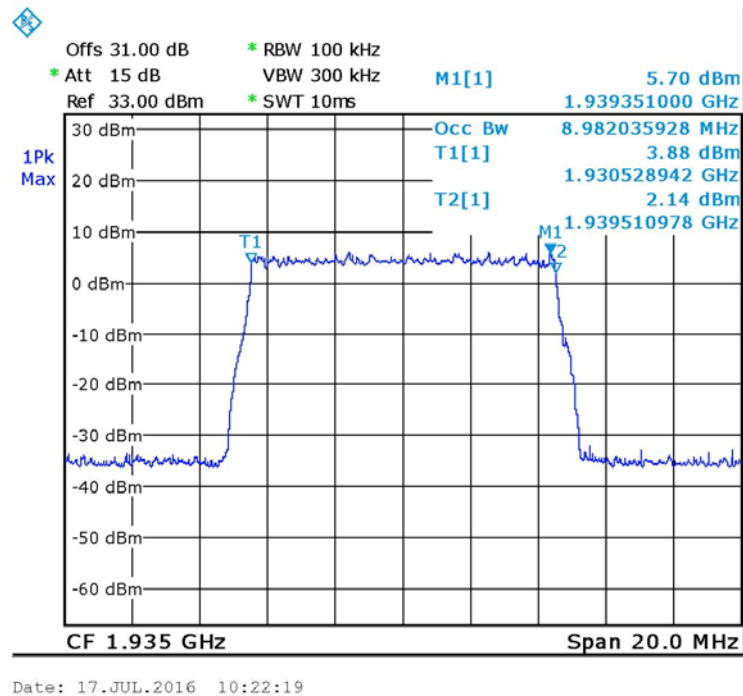


Figure 22. — LTE 64QAM Input 1935.0 MHz

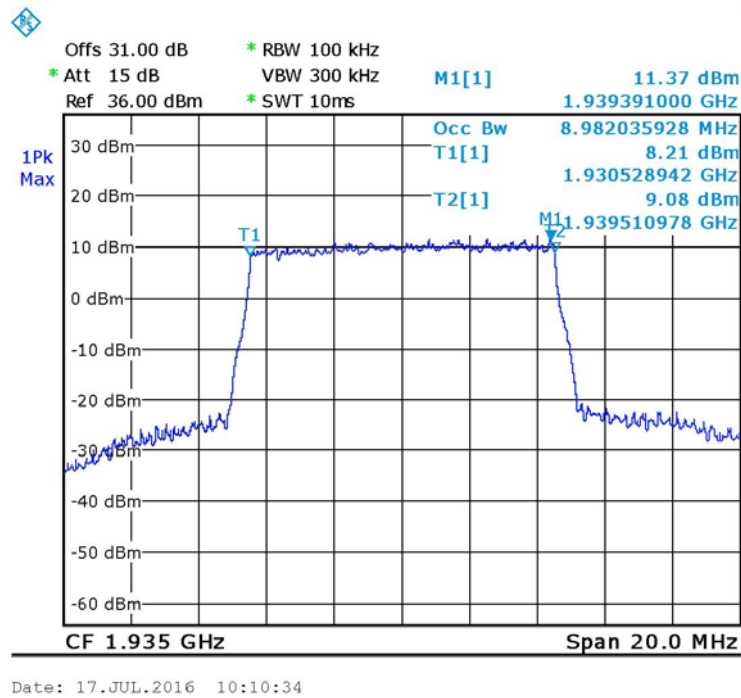


Figure 23. — LTE 64QAM Output 1935.0 MHz

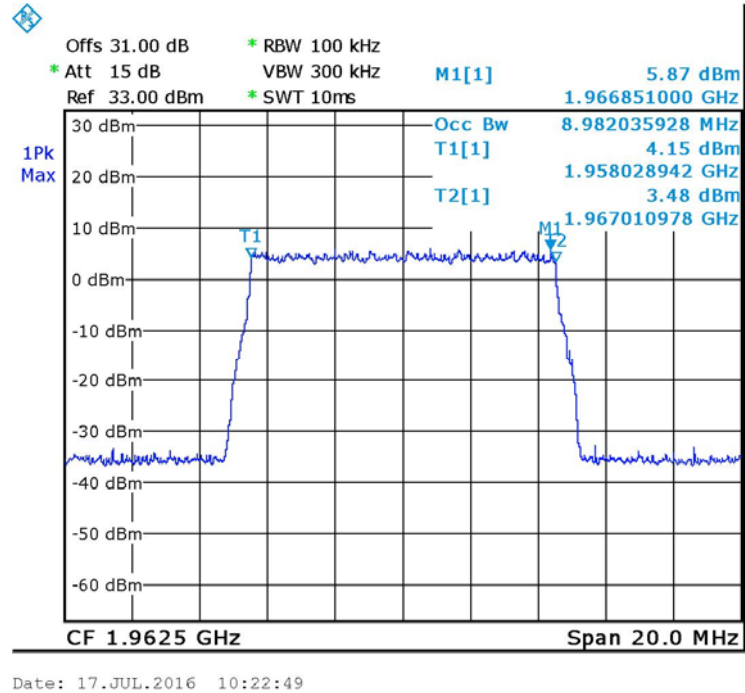


Figure 24. — LTE 64QAM Input 1962.5 MHz



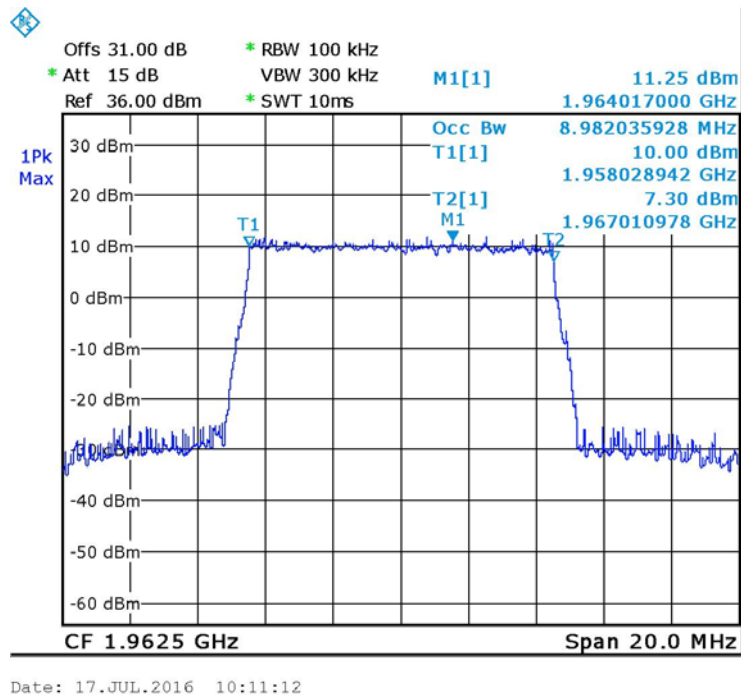


Figure 25. — LTE 64QAM Output 1962.5 MHz

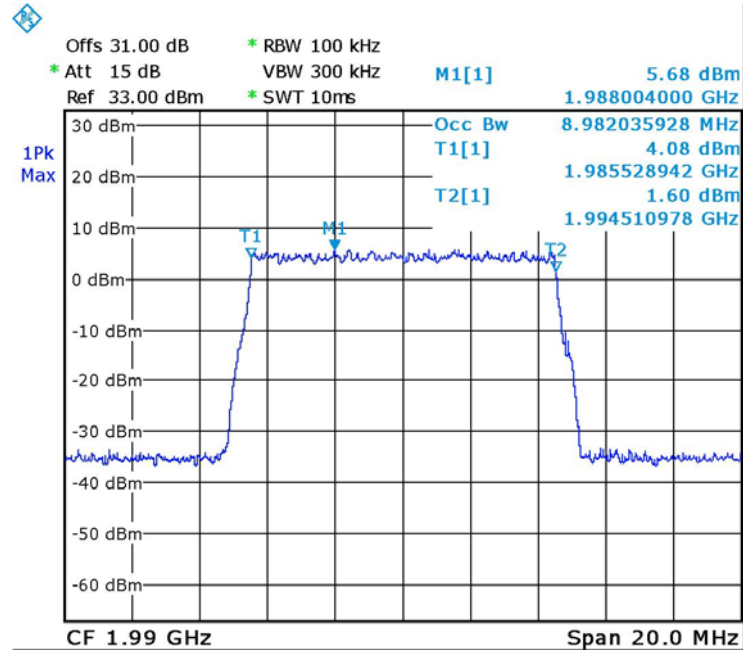

Date: 17.JUL.2016 10:23:25

Figure 26. — LTE 64QAM Input 1990.0 MHz

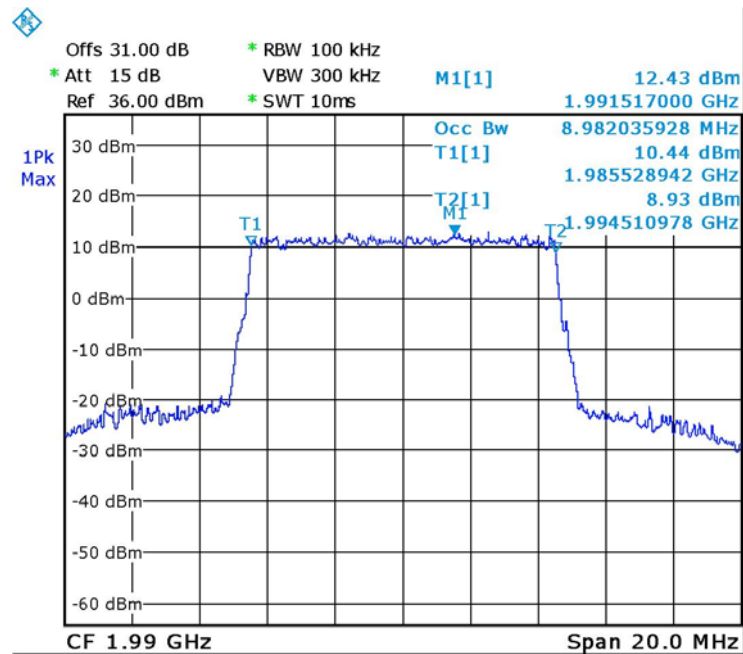

Date: 17.JUL.2016 10:11:53

Figure 27. — LTE 64QAM Output 1990.0 MHz

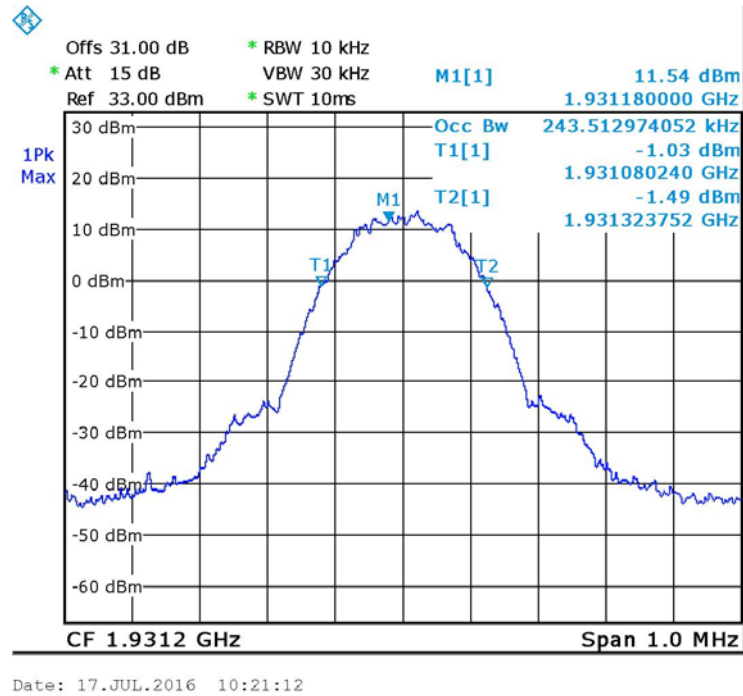


Figure 28. — GSM - Input 1931.2 MHz

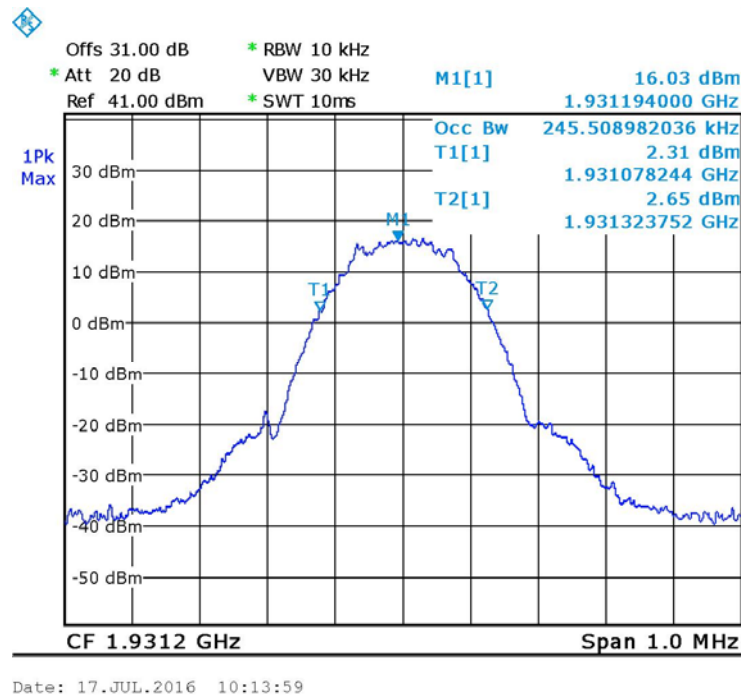


Figure 29. — GSM - Output 1931.2 MHz

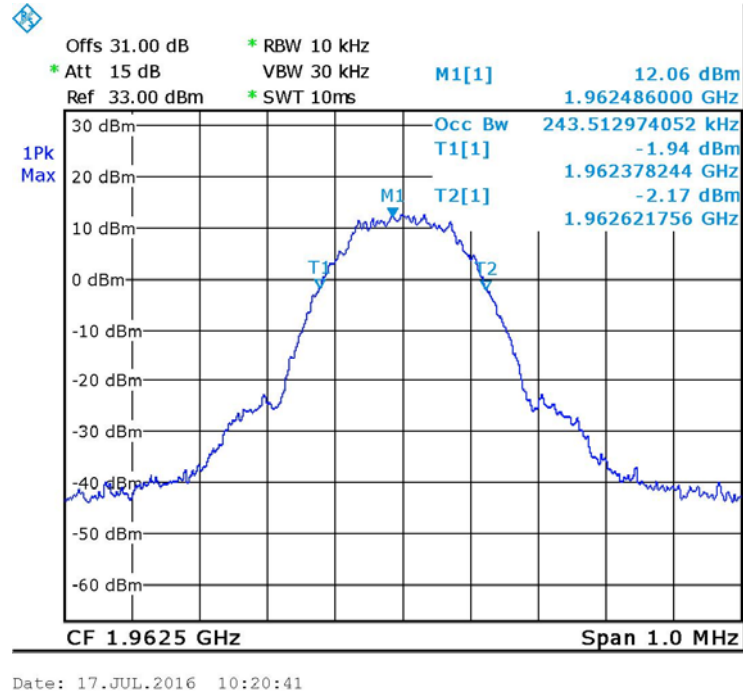


Figure 30. — GSM - Input 1962.5 MHz

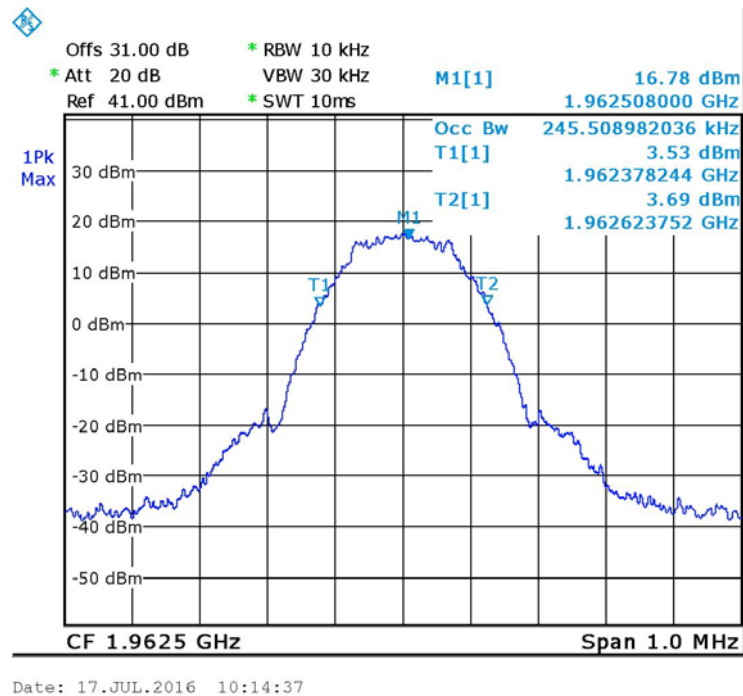


Figure 31. — GSM - Output 1962.5 MHz

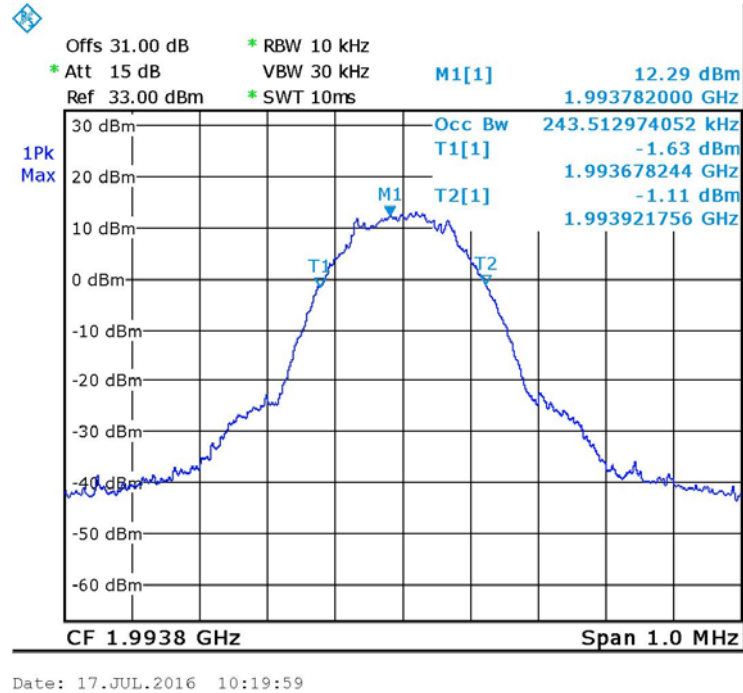


Figure 32. — GSM - Input 1993.8 MHz

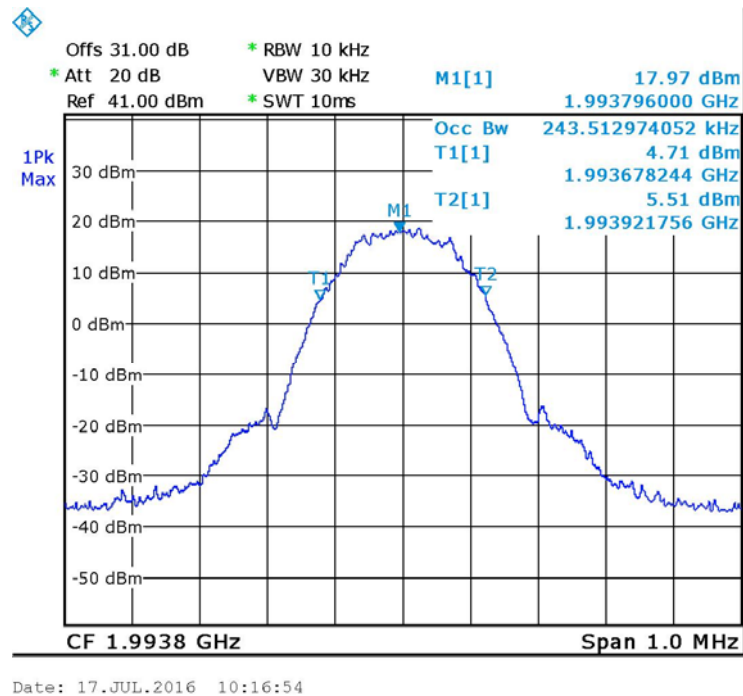


Figure 33. — GSM - Output 1993.8 MHz

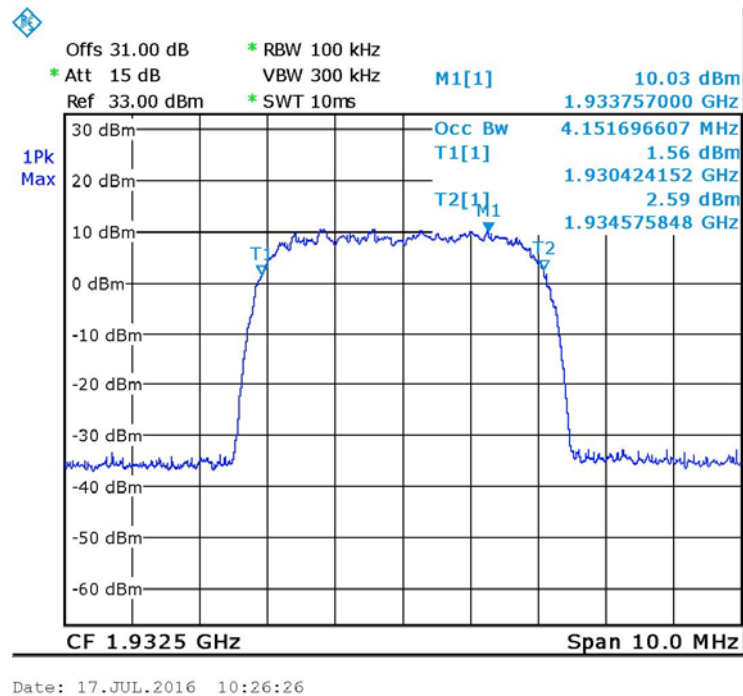


Figure 34. — W-CDMA - Input 1932.5 MHz

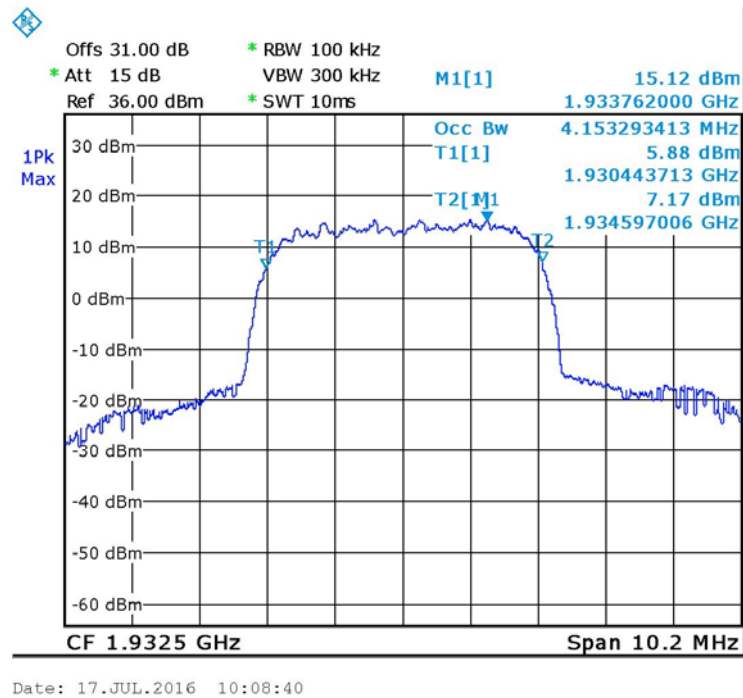


Figure 35. — W-CDMA - Output 1932.5 MHz

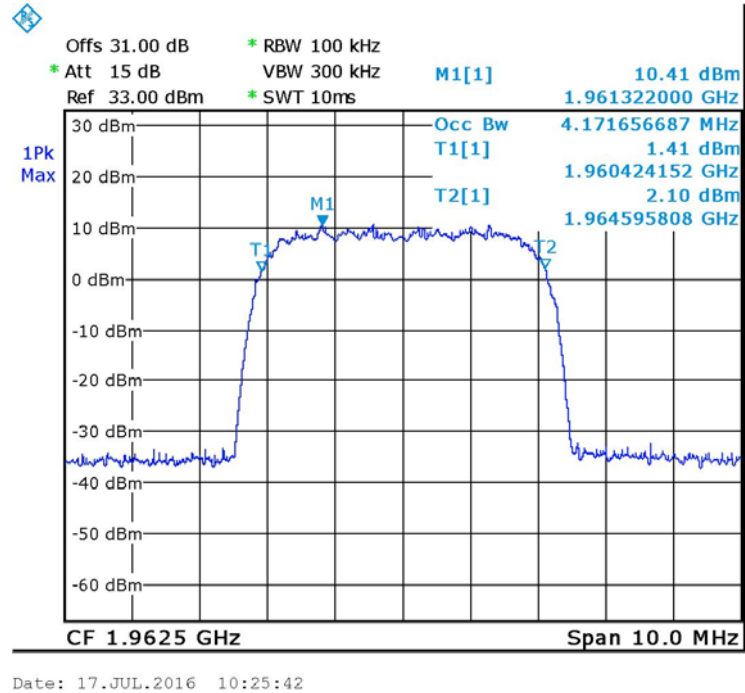


Figure 36. — W-CDMA - Input 1962.5 MHz

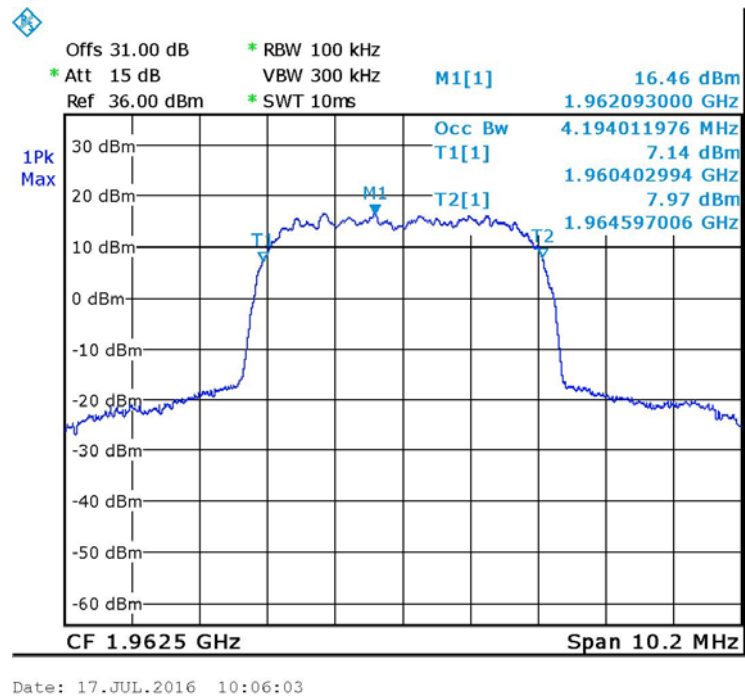


Figure 37. — W-CDMA - Output 1962.5 MHz

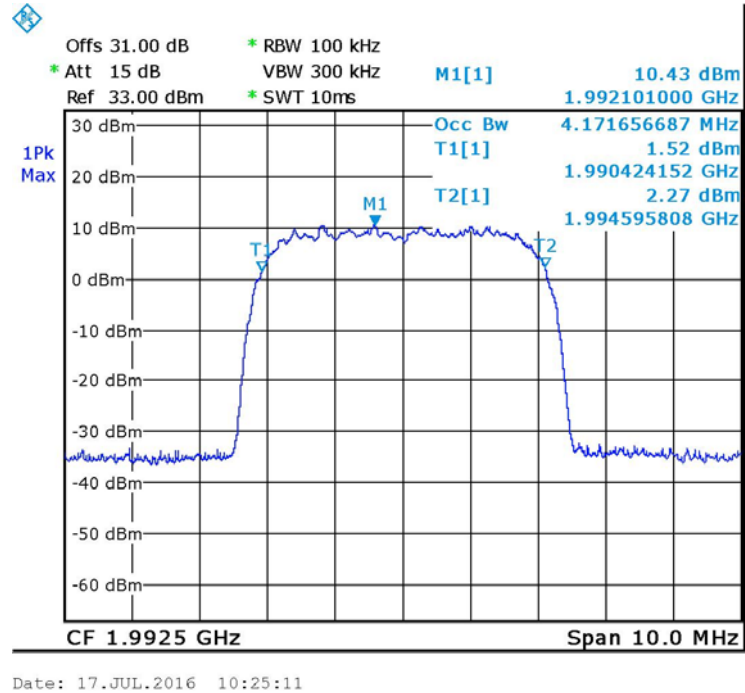


Figure 38. — W-CDMA - Input 1992.5 MHz

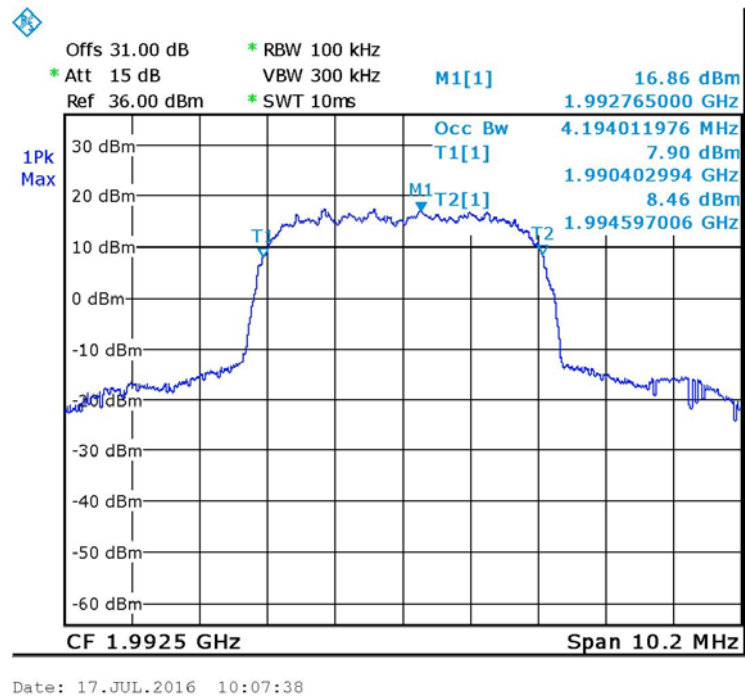


Figure 39. — W-CDMA - Output 1992.5 MHz



### 5.5 Test Equipment Used; Occupied Bandwidth PCS

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 40 Test Equipment Used**



## 6. Spurious Emissions at Antenna Terminals PCS

### 6.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

### 6.2 Test Procedure

(Temperature (22°C)/ Humidity (36%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss=33.0 dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10 kHz for the frequency range 150 kHz–1.0 MHz, 100 kHz for the frequency range 1.0 MHz – 30 MHz, and 1MHz for the frequency range 1.0 GHz - 20.0 GHz.

### 6.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges(1930-1990 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding -13dBm.

### 6.4 Test Results

JUDGEMENT: Passed

See additional information in *Figure 41* to *Figure 49*.

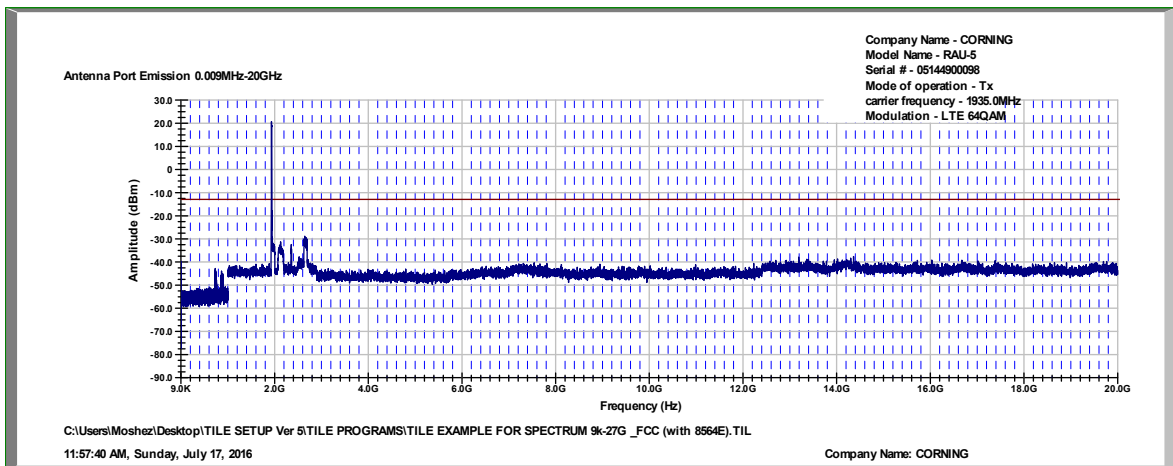


Figure 41. — LTE 64QAM - 1935.0 MHz

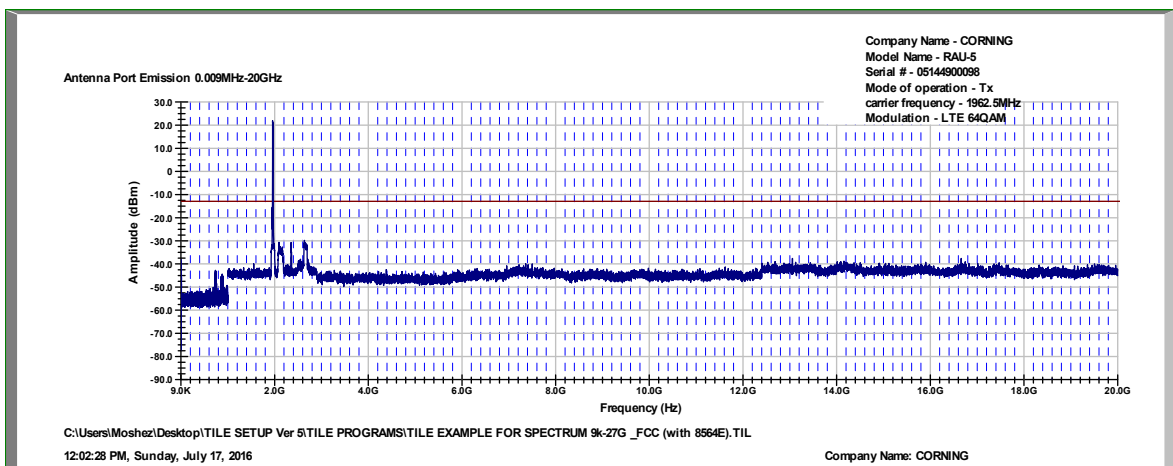


Figure 42. — LTE 64QAM - 1962.5 MHz

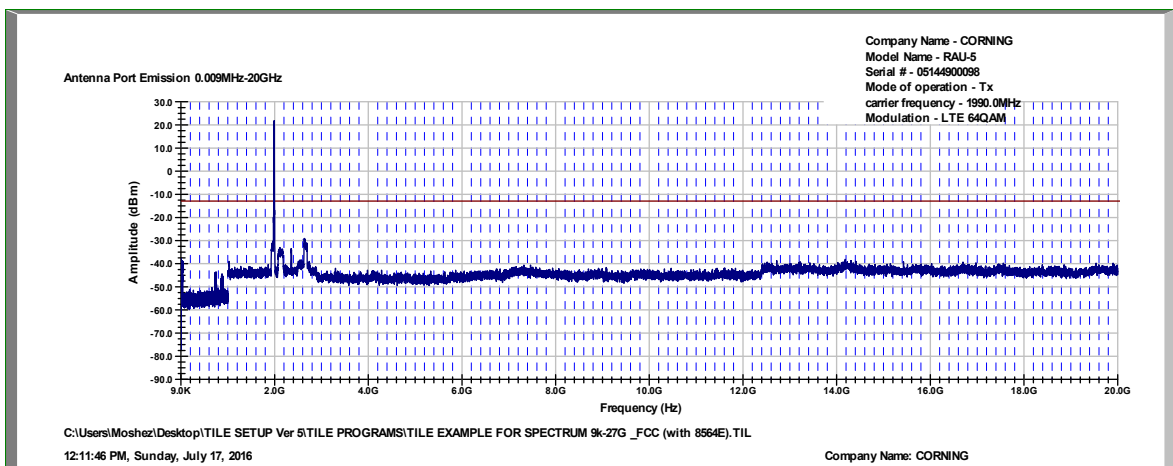


Figure 43. — LTE 64QAM - 1990.0 MHz

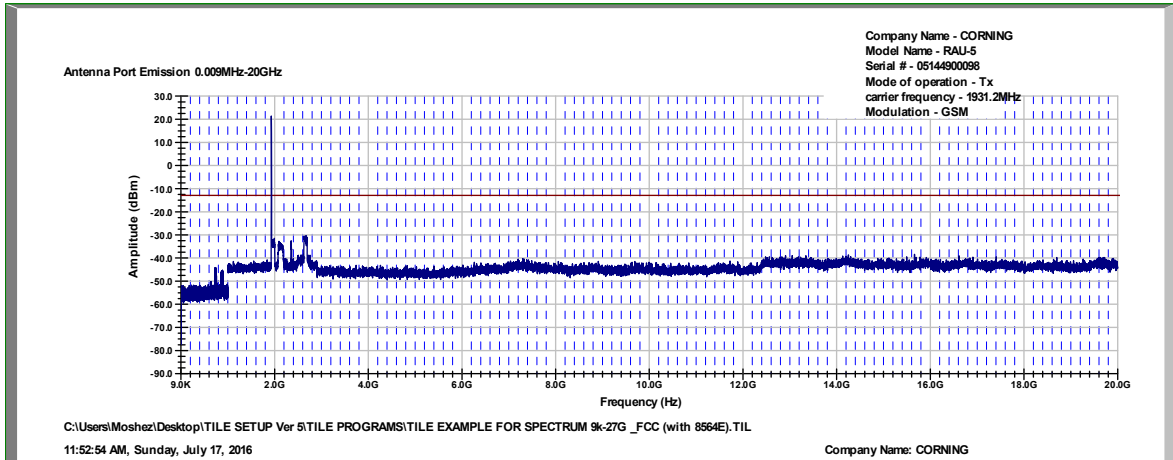


Figure 44. — GSM - 1931.2 MHz

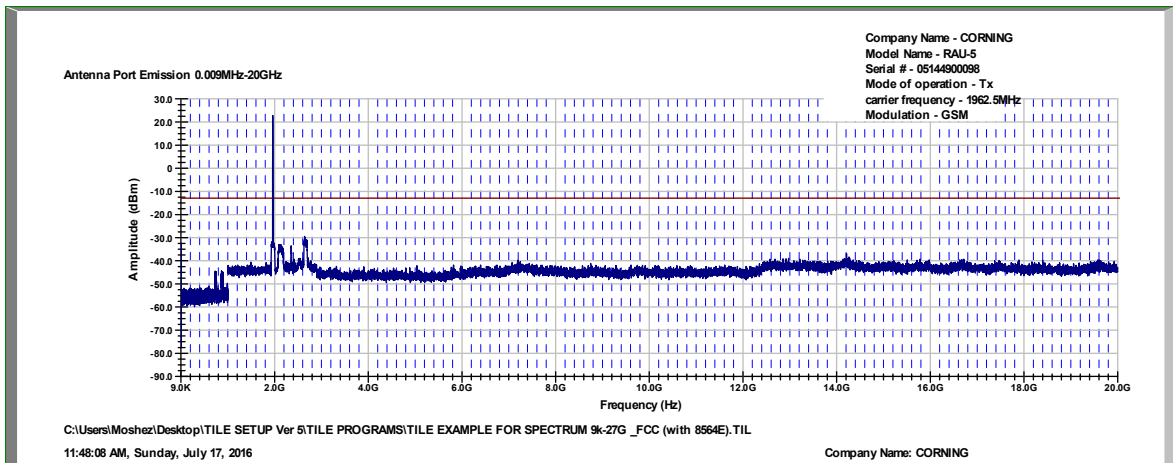


Figure 45. — GSM - 1962.5 MHz

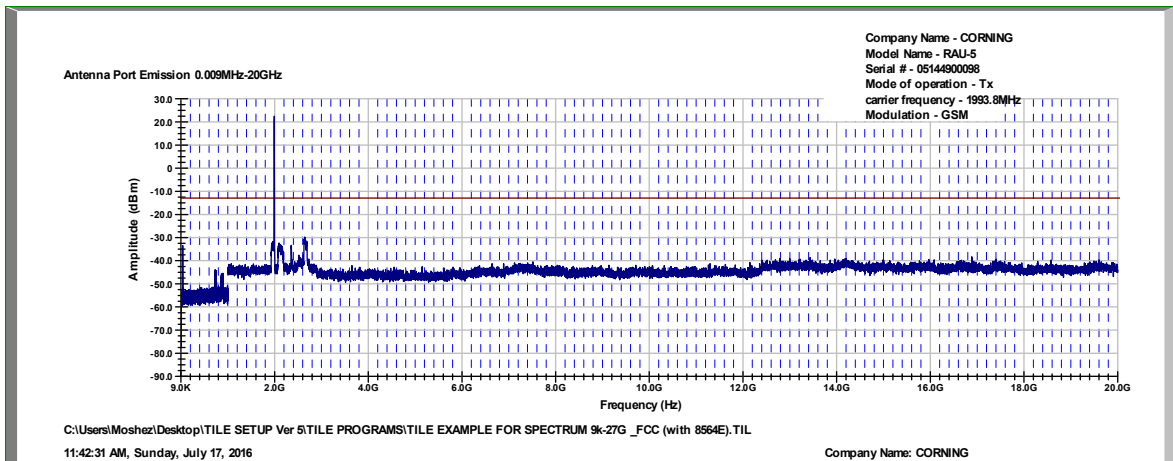


Figure 46. — GSM - 1993.8 MHz

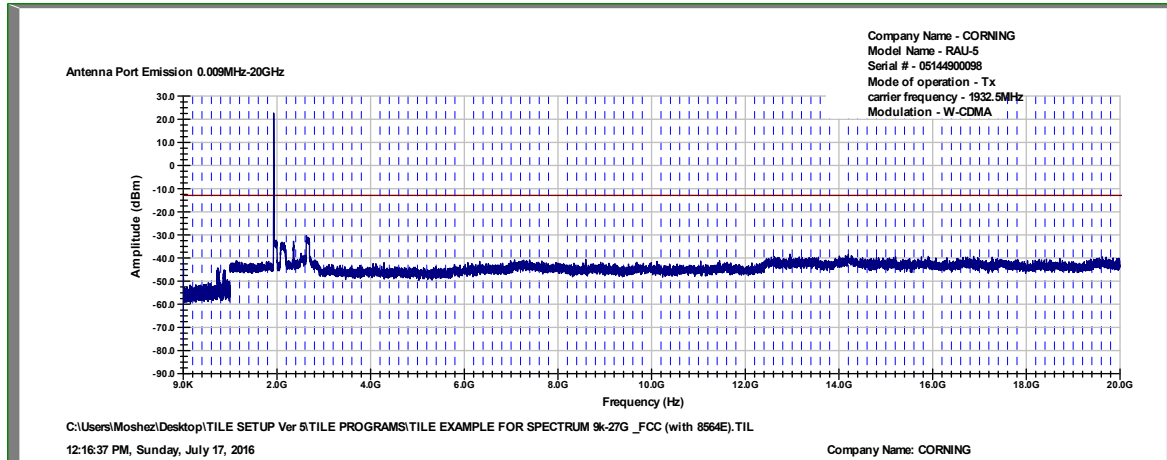


Figure 47. — W-CDMA - 1932.5 MHz

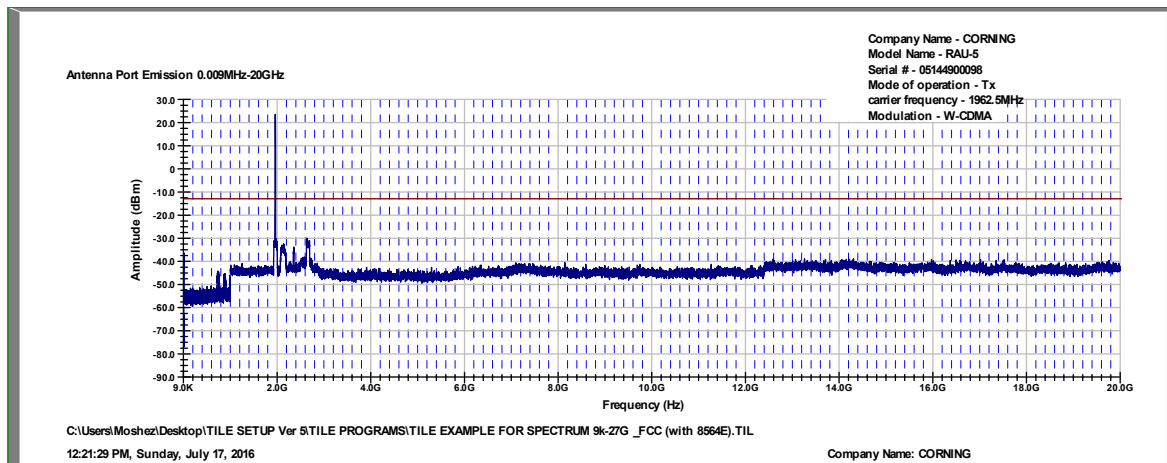


Figure 48. — W-CDMA - 1962.5 MHz

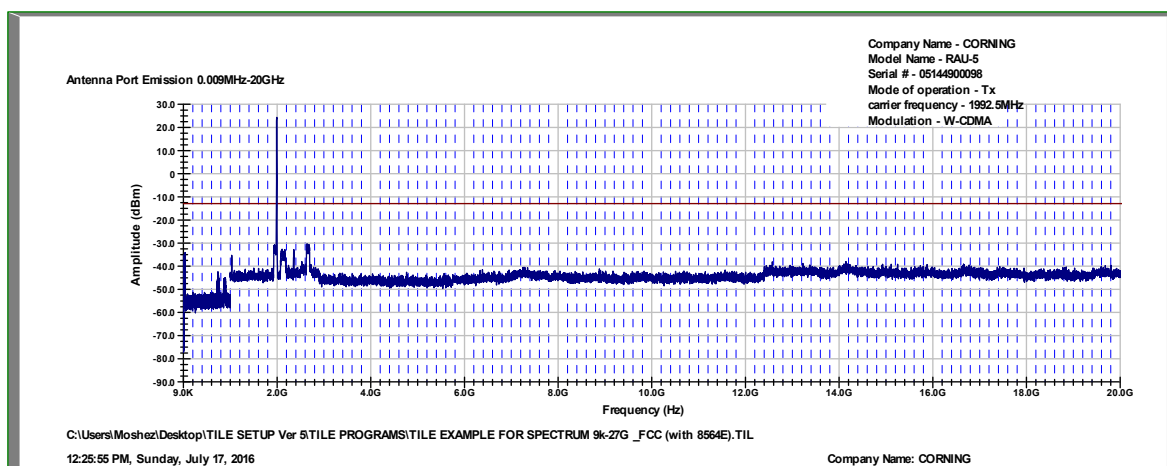


Figure 49. — W-CDMA - 1992.5 MHz



**6.5 Test Equipment Used; Out of Band Emission at Antenna Terminals PCS**

| Instrument                  | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-----------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                             |              |          |               | Last Calibration Date | Next Calibration Due |
| EXG Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| Spectrum Analyzer           | HP           | 8592L    | 3826A01204    | March 13, 2016        | March 13, 2017       |
| 30 dB Attenuator            | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 50 Test Equipment Used**

## 7. Band Edge Spectrum PCS

### 7.1 Test Specification

FCC Part 24, Subpart E, Section 238; FCC Part 2.1051

### 7.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

### 7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (1930.0-1995.0 MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + \log(P)$  dB, yielding -13dBm.

### 7.4 Test Results

| Modulation | Operation Frequency | Band Edge Frequency | Reading | Limit | Margin |
|------------|---------------------|---------------------|---------|-------|--------|
|            | (MHz)               | (MHz)               | (dBm)   | (dBm) | (dB)   |
| LTE 64QAM  | 1935.0              | 1930.0              | -27.4   | -13.0 | -14.4  |
|            | 1990.0              | 1995.0              | -24.4   | -13.0 | -11.4  |
| GSM        | 1931.2              | 1930.0              | -35.1   | -13.0 | -22.1  |
|            | 1993.8              | 1995.0              | -33.1   | -13.0 | -20.1  |
| W-CDMA     | 1932.5              | 1930.0              | -18.4   | -13.0 | -5.4   |
|            | 1992.5              | 1995.0              | -18.2   | -13.0 | -5.2   |

**Figure 51 Band Edge Spectrum Results PCS**

JUDGEMENT: Passed by 5.2 dB

See additional information in *Figure 52 to Figure 57*.

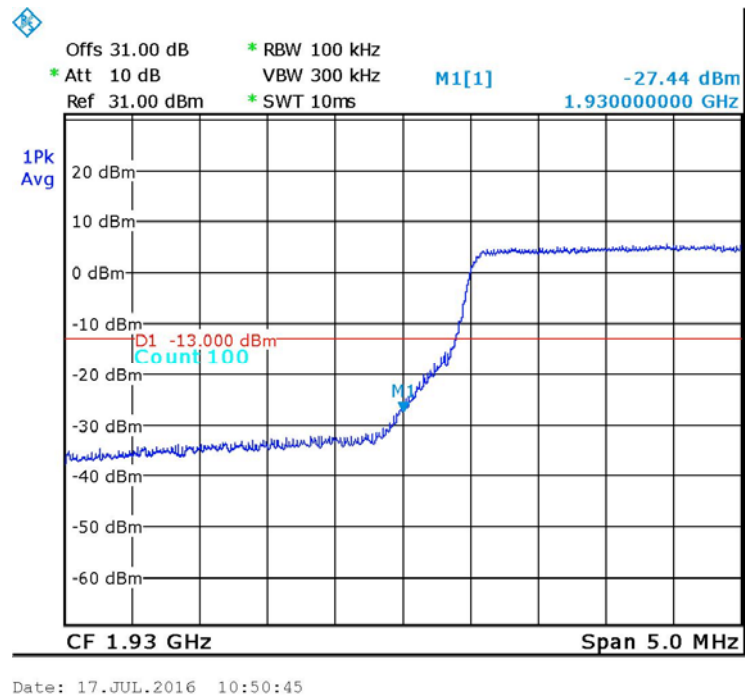


Figure 52. — LTE 64QAM 1935.0 MHz

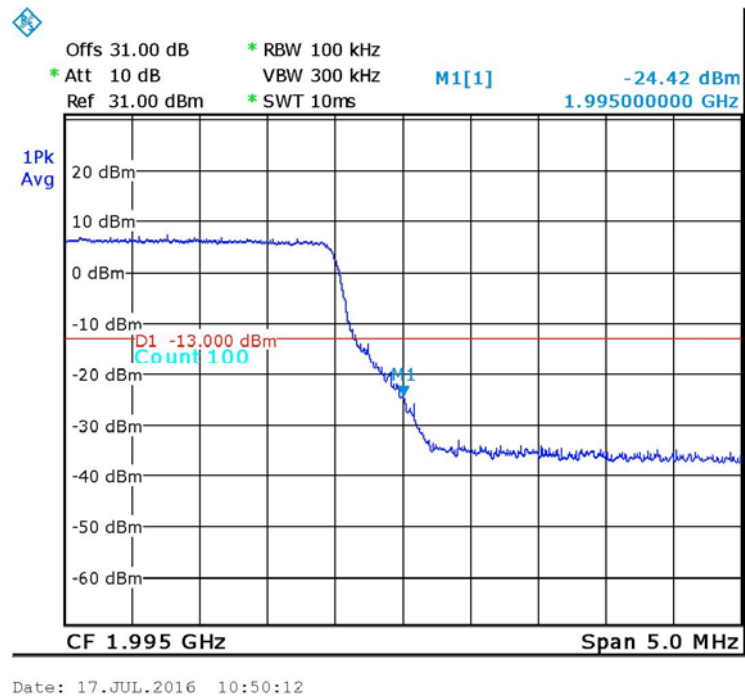


Figure 53. — LTE 64QAM 1990.0 MHz

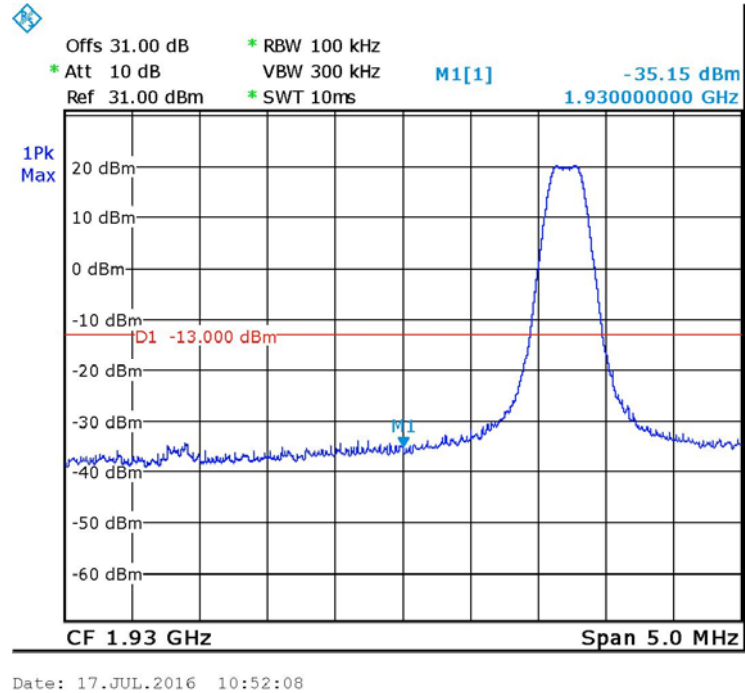


Figure 54. — GSM - 1931.2 MHz

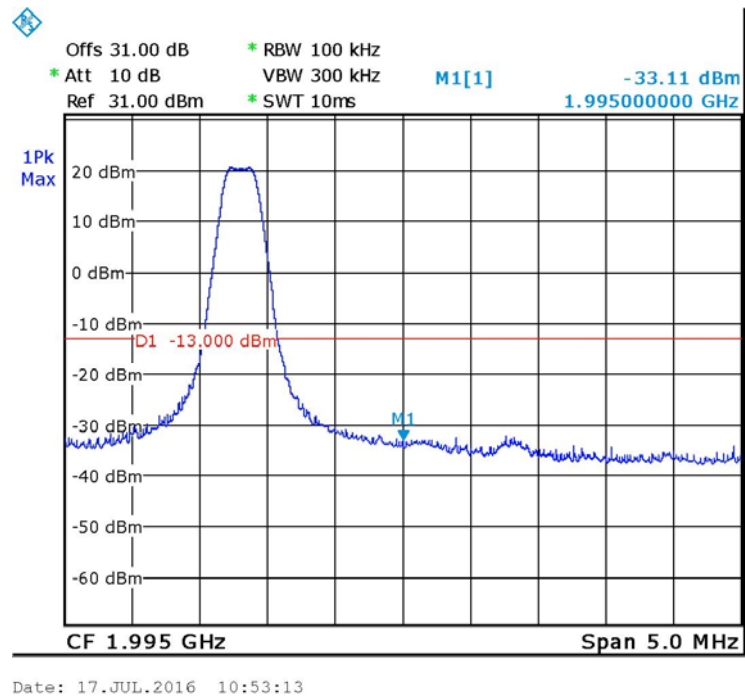


Figure 55. — GSM - 1993.8 MHz

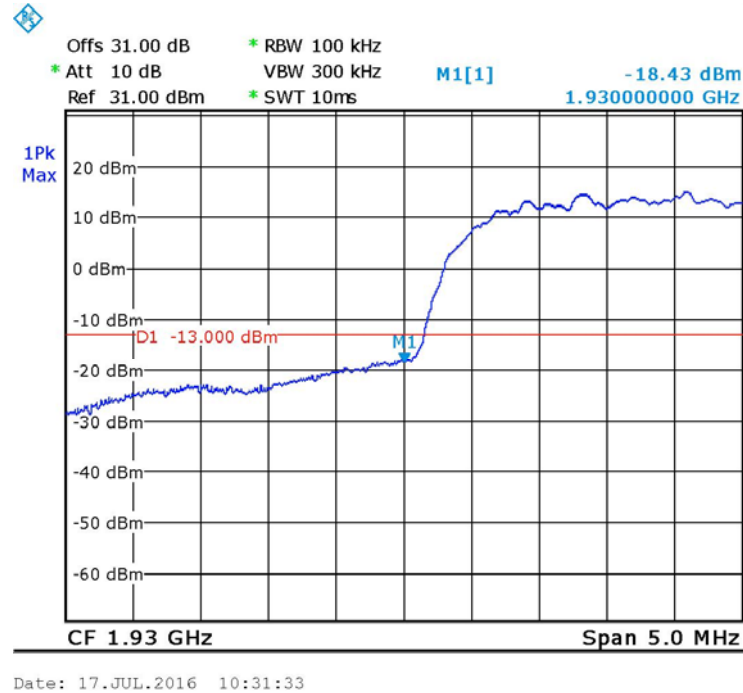


Figure 56. — W-CDMA - 1932.5 MHz

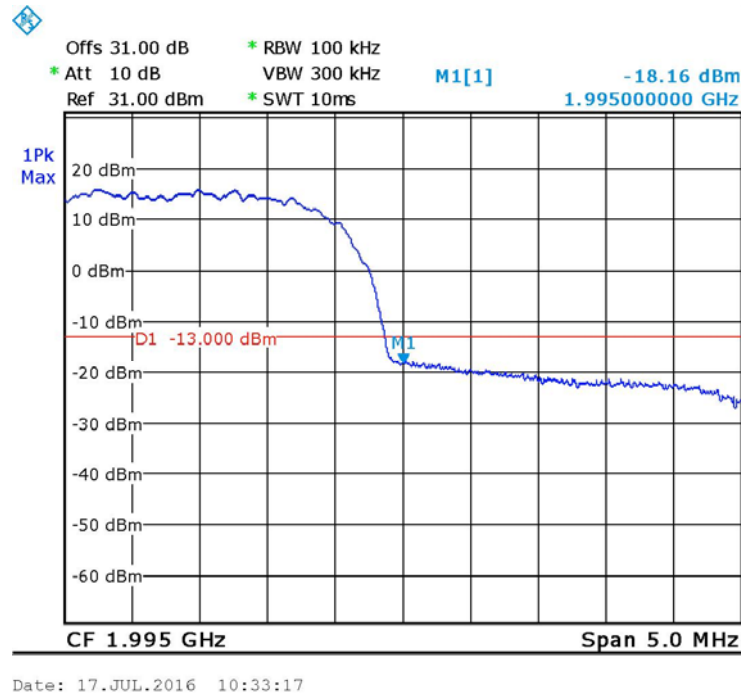


Figure 57. — W-CDMA - 1992.5 MHz



### 7.5 Test Equipment Used; Band Edge Spectrum PCS

| Instrument              | Manufacturer | Model    | Serial Number | Calibration           |                      |
|-------------------------|--------------|----------|---------------|-----------------------|----------------------|
|                         |              |          |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer       | R&S          | FSL6     | 100194        | February 29, 2016     | March 1, 2017        |
| Vector Signal Generator | Agilent      | N5172B   | MY51350584    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator        | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 5, 2017         |

**Figure 58 Test Equipment Used**



## 8. Spurious Emissions (Radiated) PCS

### 8.1 Test Specification

FCC, Part 24, Subpart E Section 238, FCC Part 2.1053

### 8.2 Test Procedure

(Temperature (23°C)/ Humidity (52%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

#### **For measurements between 0.009MHz-30MHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### **For measurements between 30.0MHz-1.0GHz:**

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### **For measurements between 1.0GHz-20.0GHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -20.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low, mid and high.

Testing was performed when the RF port was connected to 50  $\Omega$  termination.

The table below describe only results with the highest radiation.



### 8.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (1930-1995.0MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding -13dBm.

### 8.4 Results Table

| Carrier Channel | Freq.  | Antenna Pol. | Maximum Peak Level | Signal Generator RF Output | Cable Loss | Antenna Gain | Effective Radiated Power Level | Limit | Margin |
|-----------------|--------|--------------|--------------------|----------------------------|------------|--------------|--------------------------------|-------|--------|
| (MHz)           | (MHz)  | (V/H)        | (dBμV/m)           | (dBm)                      | (dB)       | (dBd)        | (dBm)                          | (dBm) | (dB)   |
| 1931.2          | 3862.4 | V            | 56.1               | -43.0                      | 0.5        | 9.5          | -34.0                          | -13.0 | -21.0  |
|                 | 3862.4 | H            | 56.0               | -42.6                      | 0.5        | 9.5          | -33.6                          | -13.0 | -20.6  |
| 1960.0          | 3920.0 | V            | 56.1               | -43.0                      | 0.5        | 9.5          | -34.0                          | -13.0 | -21.0  |
|                 | 3920.0 | H            | 56.1               | -42.6                      | 0.5        | 9.5          | -33.6                          | -13.0 | -20.6  |
| 1993.8          | 3987.6 | V            | 56.3               | -43.0                      | 0.5        | 9.5          | -34.0                          | -13.0 | -21.0  |
|                 | 3987.6 | H            | 56.0               | -42.6                      | 0.5        | 9.5          | -33.6                          | -13.0 | -20.6  |

**Figure 59 Spurious Emission (Radiated) PCS**

JUDGEMENT: Passed by 20.6 dB

The E.U.T met the requirements of the FCC, Part 24, Subpart E, Section 238; FCC Part 2.1053 specifications.



### 8.5 Test Instrumentation Used, Radiated Measurements

| Instrument                  | Manufacturer    | Model            | Serial Number | Calibration           |                      |
|-----------------------------|-----------------|------------------|---------------|-----------------------|----------------------|
|                             |                 |                  |               | Last Calibration Date | Next Calibration Due |
| EMI Receiver                | HP              | 85422E           | 3906A00276    | March 3, 2016         | March 3, 2017        |
| RF Filter Section           | HP              | 85420E           | 3705A00248    | March 3, 2016         | March 3, 2017        |
| EMI Receiver                | R&S             | ESCI7            | 100724        | February 29, 2016     | March 1, 2017        |
| Spectrum Analyzer           | HP              | 8593EM           | 3536A00120ADI | March 10, 2016        | March 10, 2017       |
| Active Loop Antenna         | EMCO            | 6502             | 9506-2950     | November 5, 2015      | November 30, 2016    |
| Antenna Biconical           | EMCO            | 3110B            | 9912-3337     | March 24, 2016        | March 24, 2018       |
| Antenna Log Periodic        | EMCO            | 3146             | 9505-4081     | April 23, 2016        | April 23, 2017       |
| Horn Antenna 1G-18G         | ETS             | 3115             | 29845         | May 19, 2015          | May 19, 2018         |
| Horn Antenna 18G-26G        | ARA             | SWH-28           | 1007          | March 30, 2014        | September 30, 2016   |
| Low Noise Amplifier         | Narda           | LNA-DBS-0411N313 | 013           | March 1, 2015         | September 30, 2016   |
| Low Noise Amplifier         | Sophia Wireless | LNA 28-B         | 232           | March 1, 2015         | September 30, 2016   |
| MXG Vector Signal Generator | Agilent         | N5182A           | MY49060440    | July 1, 2016          | July 1, 2017         |
| Semi Anechoic Civil Chamber | ETS             | S81              | SL 11643      | N/A                   | N/A                  |
| Antenna Mast                | ETS             | 2070-2           | -             | N/A                   | N/A                  |
| Turntable                   | ETS             | 2087             | -             | N/A                   | N/A                  |
| Mast & Table Controller     | ETS/EMCO        | 2090             | 9608-1456     | N/A                   | N/A                  |

Figure 60 Test Equipment Used



## 9. Intermodulation Conducted

### 9.1 Test Procedure

(Temperature (22°C)/ Humidity (37%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss = 40.0dB). The spectrum analyzer was set to 1 kHz resolution BW for the frequency range 9.0-150.0 kHz, 10 kHz for the frequency range 150 kHz–1.0 MHz, 100 kHz for the frequency range 1.0 MHz – 30 MHz, and 1MHz for the frequency range 30 MHz - 24GHz.

6 input signals were sent simultaneously to the E.U.T. as follows:

LTE band: 742.0 MHz, 0 dBm

CELL&ESMR band: 878.0 MHz, 0 dBm

PCS band: 1962.5 MHz, 0 dBm

AWS band: 2132.5 MHz, 0 dBm

WCS band: 2355.0MHz, 0 dBm

TDD 2.5G band: 2593.0MHz, 0 dBm

The frequency range of 9 kHz – 24.0 GHz was scanned for unwanted signals.

### 9.2 Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding -13dBm.

### 9.3 Test Results

JUDGEMENT: Passed

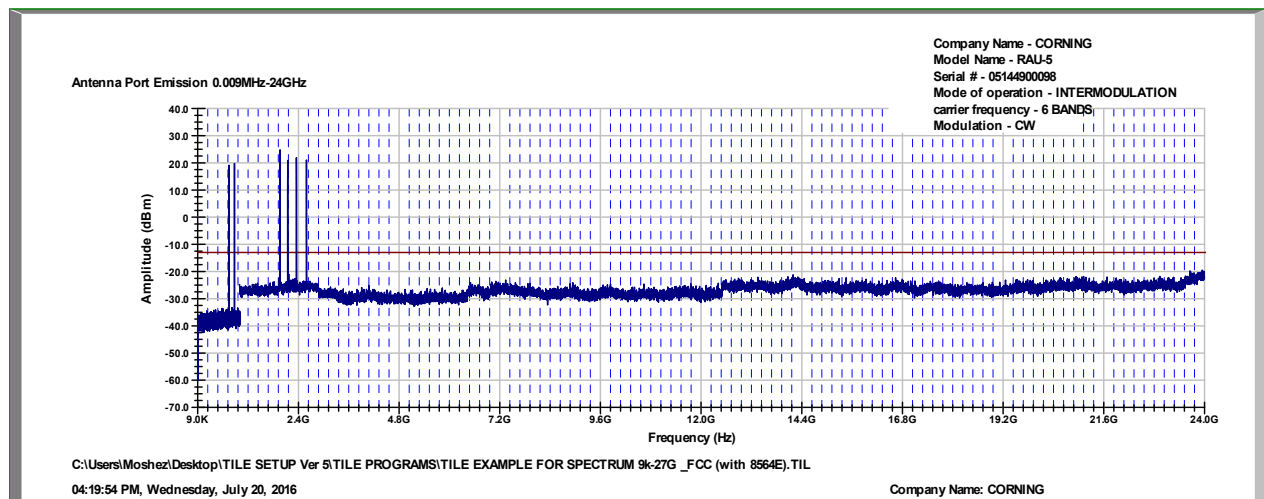


Figure 61 Intermodulation Conducted



#### 9.4 Test Equipment Used; Intermodulation Conducted

| Instrument                  | Manufacturer         | Model      | Serial Number | Calibration           |                      |
|-----------------------------|----------------------|------------|---------------|-----------------------|----------------------|
|                             |                      |            |               | Last Calibration Date | Next Calibration Due |
| Spectrum Analyzer           | HP                   | 8564E      | 3442A00275    | March 10, 2016        | March 10, 2017       |
| EXG Vector Signal Generator | Agilent              | N5172B     | TE4384        | July 1, 2016          | July 1, 2017         |
| EXG Vector Signal Generator | Agilent              | N5172B     | MY513500584   | July 1, 2016          | July 1, 2017         |
| MXG Vector Signal Generator | Agilent              | N5182A     | MY48180244    | July 1, 2016          | July 1, 2017         |
| MXG Vector Signal Generator | Agilent              | N5182A     | MY49060440    | July 1, 2016          | July 1, 2017         |
| Signal Generator            | HP                   | E4432B     | GB40050998    | July 1, 2016          | July 1, 2017         |
| ESG Vector Signal Generator | Agilent              | E4438C     | MY45094064    | July 1, 2016          | July 1, 2017         |
| 30 dB Attenuator            | MCL                  | BW-S30W5   | 533           | July 5, 2016          | July 5, 2017         |
| 6 dB Attenuator             | Weinschel Associates | WA 40-6-34 | 568           | July 6, 2016          | July 6, 2017         |

Figure 62 Test Equipment Used



## 10. Intermodulation Radiated

### 10.1 Test Procedure

(Temperature (23°C)/ Humidity (47%RH))

The test method was based on ANSI/TIA-603-C: 2004, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

#### **For measurements between 0.009MHz-30MHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### **For measurements between 30.0MHz-1.0GHz:**

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

#### **For measurements between 1.0GHz-24.0GHz:**

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -24.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

$P_d$  = Dipole equivalent power (result).

$P_g$  = Signal generator output level.

6 input signals were sent simultaneously to the E.U.T. as follows:

LTE band: 742.0 MHz, 0 dBm

CELL band: 878.0 MHz, 0 dBm

PCS band: 1962.5 MHz, 0 dBm

AWS band: 2132.5 MHz, 0 dBm

WCS band: 2355.0MHz, 0 dBm

TDD 2.5G band: 2593.0MHz, 0 dBm



A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low, mid and high.

Testing was performed when the RF port was connected to 50  $\Omega$  termination.

The table below describe only results with the highest radiation.

### **10.2 Test Limit**

The power of any emission outside of the authorized operating frequency ranges (728-758; 869-894; 1930-1990; 2110-2155 MHz; 2350-2360MHz) must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB, yielding -13dBm.

### **10.3 Test Results**

JUDGEMENT: Passed

For additional information see *Figure 63*.

| Freq.  | Antenna Pol. | Maximum Peak Level | Signal Generator RF Output | Cable Loss | Antenna Gain | Effective Radiated Power Level | Limit | Margin |
|--------|--------------|--------------------|----------------------------|------------|--------------|--------------------------------|-------|--------|
| (MHz)  | (V/H)        | (dBμV/m)           | (dBm)                      | (dB)       | (dBd)        | (dBm)                          | (dBm) | (dB)   |
| 1792.5 | V            | 51.9               | -48.7                      | 0.5        | 7.0          | -42.2                          | -13.0 | -29.2  |
| 1792.5 | H            | 52.5               | -47.5                      | 0.5        | 7.0          | -41.0                          | -13.0 | -28.0  |
| 2219.0 | V            | 54.6               | -46.1                      | 0.5        | 7.0          | -39.6                          | -13.0 | -26.6  |
| 2219.0 | H            | 54.5               | -45.5                      | 0.5        | 7.0          | -39.0                          | -13.0 | -26.0  |
| 3223.5 | V            | 56.1               | -48.8                      | 0.5        | 10.0         | -39.3                          | -13.0 | -26.3  |
| 3223.5 | H            | 56.1               | -48.4                      | 0.5        | 10.0         | -38.9                          | -13.0 | -25.9  |
| 3854.0 | V            | 56.3               | -42.8                      | 0.5        | 9.5          | -33.8                          | -13.0 | -20.8  |
| 3854.0 | H            | 56.4               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 3978.5 | V            | 56.3               | -42.8                      | 0.5        | 9.5          | -33.8                          | -13.0 | -20.8  |
| 3978.5 | H            | 56.3               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 4104.0 | V            | 56.3               | -42.8                      | 0.5        | 9.5          | -33.8                          | -13.0 | -20.8  |
| 4104.0 | H            | 56.2               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 4201.0 | V            | 56.4               | -42.6                      | 0.5        | 9.5          | -33.6                          | -13.0 | -20.6  |
| 4201.0 | H            | 56.5               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 4308.0 | V            | 56.2               | -42.6                      | 0.5        | 9.5          | -33.6                          | -13.0 | -20.6  |
| 4308.0 | H            | 56.4               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 4439.0 | V            | 56.3               | -42.8                      | 0.5        | 9.5          | -33.8                          | -13.0 | -20.8  |
| 4439.0 | H            | 56.4               | -42.3                      | 0.5        | 9.5          | -33.3                          | -13.0 | -20.3  |
| 5445.0 | V            | 57.1               | -46.2                      | 0.5        | 10.8         | -35.9                          | -13.0 | -22.9  |
| 5445.0 | H            | 57.0               | -45.0                      | 0.5        | 10.8         | -34.7                          | -13.0 | -21.7  |

**Figure 63 Intermodulation Radiated Results**



#### 10.4 Test Instrumentation Used; Radiated Measurements Intermodulation

| Instrument                  | Manufacturer    | Model            | Serial Number | Calibration           |                      |
|-----------------------------|-----------------|------------------|---------------|-----------------------|----------------------|
|                             |                 |                  |               | Last Calibration Date | Next Calibration Due |
| EMI Receiver                | HP              | 85422E           | 3906A00276    | March 3, 2016         | March 3, 2017        |
| RF Filter Section           | HP              | 85420E           | 3705A00248    | March 3, 2016         | March 3, 2017        |
| EMI Receiver                | R&S             | ESCI7            | 100724        | February 29, 2016     | March 1, 2017        |
| Spectrum Analyzer           | HP              | 8593EM           | 3536A00120ADI | March 10, 2016        | March 10, 2017       |
| Active Loop Antenna         | EMCO            | 6502             | 9506-2950     | November 5, 2015      | November 30, 2016    |
| Antenna Biconical           | EMCO            | 3110B            | 9912-3337     | March 24, 2016        | March 24, 2018       |
| Antenna Log Periodic        | EMCO            | 3146             | 9505-4081     | April 23, 2016        | April 23, 2017       |
| Horn Antenna 1G-18G         | ETS             | 3115             | 29845         | May 19, 2015          | May 19, 2018         |
| Horn Antenna 18G-26G        | ARA             | SWH-28           | 1007          | March 30, 2014        | September 30, 2016   |
| Low Noise Amplifier         | Narda           | LNA-DBS-0411N313 | 013           | March 1, 2015         | September 30, 2016   |
| Low Noise Amplifier         | Sophia Wireless | LNA 28-B         | 232           | March 1, 2015         | September 30, 2016   |
| Signal Generator            | Marconi         | 2022D            | 119196015     | March 1, 2016         | March 1, 2017        |
| Signal Generator            | HP              | 8648C            | 3623A04126    | February 29, 2016     | March 1, 2017        |
| Signal Generator            | HP              | ESG-4000A/E4422A | US36220118    | February 29, 2016     | March 1, 2017        |
| MXG Vector Signal Generator | Agilent         | N5182A           | MY49060440    | July 1, 2016          | July 1, 2017         |
| ESG Vector Signal Generator | Agilent         | E4438C           | MY45094064    | July 1, 2016          | July 1, 2017         |
| Signal Generator            | Agilent         | E4432B           | GB40050998    | July 1, 2016          | July 1, 2017         |
| Semi Anechoic Civil Chamber | ETS             | S81              | SL 11643      | N/A                   | N/A                  |
| Antenna Mast                | ETS             | 2070-2           | -             | N/A                   | N/A                  |
| Turntable                   | ETS             | 2087             | -             | N/A                   | N/A                  |
| Mast & Table Controller     | ETS/EMCO        | 2090             | 9608-1456     | N/A                   | N/A                  |

Figure 64 Test Equipment Used

## 11. Out-of-Band Rejection (PCS)

### 11.1 Test Specification

KDB 935210 D05 v01r01, Section 3.3

### 11.2 Test Procedure

(Temperature (21°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max Loss= 31.0 dB).

The signal and spectrum analyzer frequency range was set to  $\pm 250\%$  of the passband, Dwell time set to approximately 10msec.

RBW was set between 1% to 5% of the E.U.T passband and VBW set to  $\geq 3 \times \text{RBW}$ .

### 11.3 Test Limit

N/A

### 11.4 Test Results

JUDGEMENT: Passed

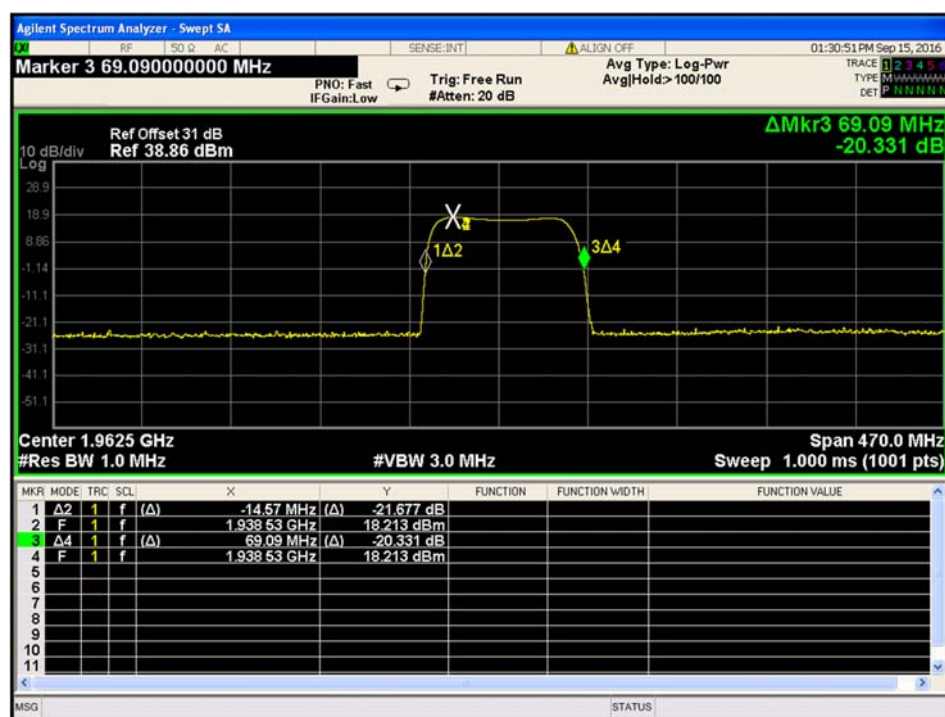


Figure 65. — Out-of-Band Rejection Plot



### 11.5 Test Equipment Used; Out-of-Band Rejection

| Instrument                  | Manufacturer | Model    | Serial Number | Calibration           |                       |
|-----------------------------|--------------|----------|---------------|-----------------------|-----------------------|
|                             |              |          |               | Last Calibration Date | Next Calibration Date |
| EXA Spectrum Analyzer       | Agilent      | N9010A   | MY48030391    | March 16, 2016        | March 16, 2018        |
| EXG Vector Signal Generator | Agilent      | N5172B   | MY49060440    | November 11, 2014     | November 19, 2017     |
| 30 dB Attenuator            | MCL          | BW-S30W5 | 533           | July 5, 2016          | July 15, 2017         |

**Figure 66 Test Equipment Used**



## 12. APPENDIX A - CORRECTION FACTORS

### 12.1 Correction factors for *RF OATS Cable 35m* *ITL #1784*

| Frequency ( MHz) | Cable loss (dB) |
|------------------|-----------------|
| 10.0             | 0.3             |
| 20.0             | 0.2             |
| 50.0             | -0.1            |
| 100.0            | -0.6            |
| 200.0            | -1.2            |
| 500.0            | -2.3            |
| 1000.0           | -3.6            |



**12.2 Correction factors for RF OATS Cable 10m**  
**ITL #1794**

| Frequency(MHz) | Cable loss(dB) |
|----------------|----------------|
| 10.0           | -0.3           |
| 20.0           | -0.3           |
| 50.0           | -0.5           |
| 100.0          | -0.7           |
| 200.0          | -1.1           |
| 500.0          | -1.8           |
| 1000.0         | -2.7           |



**12.3 Correction factors for**

**Horn Antenna**

**Model: SWH-28  
at 1 meter range.**

| <b>FREQUENCY</b><br><b>(GHz)</b> | <b>AFE</b><br><b>(dB /m)</b> | <b>Gain</b><br><b>(dB1)</b> |
|----------------------------------|------------------------------|-----------------------------|
| 18.0                             | 40.3                         | 16.1                        |
| 19.0                             | 40.3                         | 16.3                        |
| 20.0                             | 40.3                         | 16.1                        |
| 21.0                             | 40.3                         | 16.3                        |
| 22.0                             | 40.4                         | 16.8                        |
| 23.0                             | 40.5                         | 16.4                        |
| 24.0                             | 40.5                         | 16.6                        |
| 25.0                             | 40.5                         | 16.7                        |
| 26.0                             | 40.6                         | 16.4                        |

**12.4 Correction factors for Horn ANTENNA**  
**Model: 3115**  
**Antenna serial number: 29845**  
**3 meter range**

| f(GHz) | AF(dB/m) | GA(dB) |
|--------|----------|--------|
| 0.75   | 25       | 3      |
| 1G     | 23.5     | 7      |
| 1.5G   | 26       | 8      |
| 2G     | 29       | 7      |
| 2.5G   | 27.5     | 10     |
| 3G     | 30       | 10     |
| 3.5G   | 31.5     | 10     |
| 4G     | 32.5     | 9.5    |
| 4.5G   | 32.5     | 10.5   |
| 5G     | 33       | 10.5   |
| 5.5G   | 35       | 10.5   |
| 6G     | 36.5     | 9.5    |
| 6.5G   | 36.5     | 10     |
| 7G     | 37.5     | 10     |
| 7.5G   | 37.5     | 10     |
| 8G     | 37.5     | 11     |
| 8.5G   | 38       | 11     |
| 9G     | 37.5     | 11.5   |
| 9.5G   | 38       | 11.5   |
| 10G    | 38.5     | 11.5   |
| 10.5G  | 38.5     | 12     |
| 11G    | 38.5     | 12.5   |
| 11.5G  | 38.5     | 13     |
| 12G    | 38       | 13.5   |
| 12.5G  | 38.5     | 13     |
| 13G    | 40       | 12     |
| 13.5G  | 41       | 12     |
| 14G    | 40       | 13     |
| 14.5G  | 39       | 14     |
| 15G    | 38       | 15.5   |
| 15.5G  | 37.5     | 16     |
| 16G    | 37.5     | 16     |
| 16.5G  | 39       | 15     |
| 17G    | 40       | 15     |
| 17.5G  | 42       | 13.5   |
| 18G    | 42.5     | 13     |



**12.5 Correction factors for Log Periodic Antenna  
EMCO, Model 3146,  
Serial #9505-4081**

| Frequency [MHz] | AF<br>[dB/m] |
|-----------------|--------------|
| 200.0           | 11.47        |
| 250.0           | 12.06        |
| 300.0           | 14.77        |
| 400.0           | 15.77        |
| 500.0           | 18.01        |
| 600.0           | 18.84        |
| 700.0           | 20.93        |
| 800.0           | 21.27        |
| 900.0           | 22.44        |
| 1000.0          | 24.10        |



**12.6 Correction factors for Biconical Antenna  
EMCO, Model 3110B,  
Serial #9912-3337**

| Frequency [MHz] | AF [dB/m] |
|-----------------|-----------|
| 30.0            | 14.18     |
| 35.0            | 13.95     |
| 40.0            | 12.84     |
| 45.0            | 11.23     |
| 50.0            | 11.10     |
| 60.0            | 10.39     |
| 70.0            | 9.34      |
| 80.0            | 9.02      |
| 90.0            | 9.31      |
| 100.0           | 8.95      |
| 120.0           | 11.53     |
| 140.0           | 12.20     |
| 160.0           | 12.56     |
| 180.0           | 13.49     |
| 200.0           | 15.27     |



**12.7 Correction factors for ACTIVE LOOP ANTENNA**

**Model 6502**

**S/N 9506-2950**

| f(MHz) | MAF(dBs/m) | AF(dB/m) |
|--------|------------|----------|
| 0.01   | -33.1      | 18.4     |
| 0.02   | -37.2      | 14.3     |
| 0.03   | -38.2      | 13.3     |
| 0.05   | -39.8      | 11.7     |
| 0.1    | -40.1      | 11.4     |
| 0.2    | -40.3      | 11.2     |
| 0.3    | -40.3      | 11.2     |
| 0.5    | -40.3      | 11.2     |
| 0.7    | -40.3      | 11.2     |
| 1      | -40.1      | 11.4     |
| 2      | -40        | 11.5     |
| 3      | -40        | 11.5     |
| 4      | -40.1      | 11.4     |
| 5      | -40.2      | 11.3     |
| 6      | -40.4      | 11.1     |
| 7      | -40.4      | 11.1     |
| 8      | -40.4      | 11.1     |
| 9      | -40.5      | 11       |
| 10     | -40.5      | 11       |
| 20     | -41.5      | 10       |
| 30     | -43.5      | 8        |