




# PlusCom Xpress EUT 2

EUT:  
 Manufacturer: I-Data.  
 Operating Condition: Line no.: Line 1. 115 Vac. S-UTP cable.  
 Test Site: EMC-5  
 Operator: HEN-K220871  
 Test Specification: EN 55022 B, FCC B .  
 Comment: Sheet 8  
 Start of Test: 1999-06-29

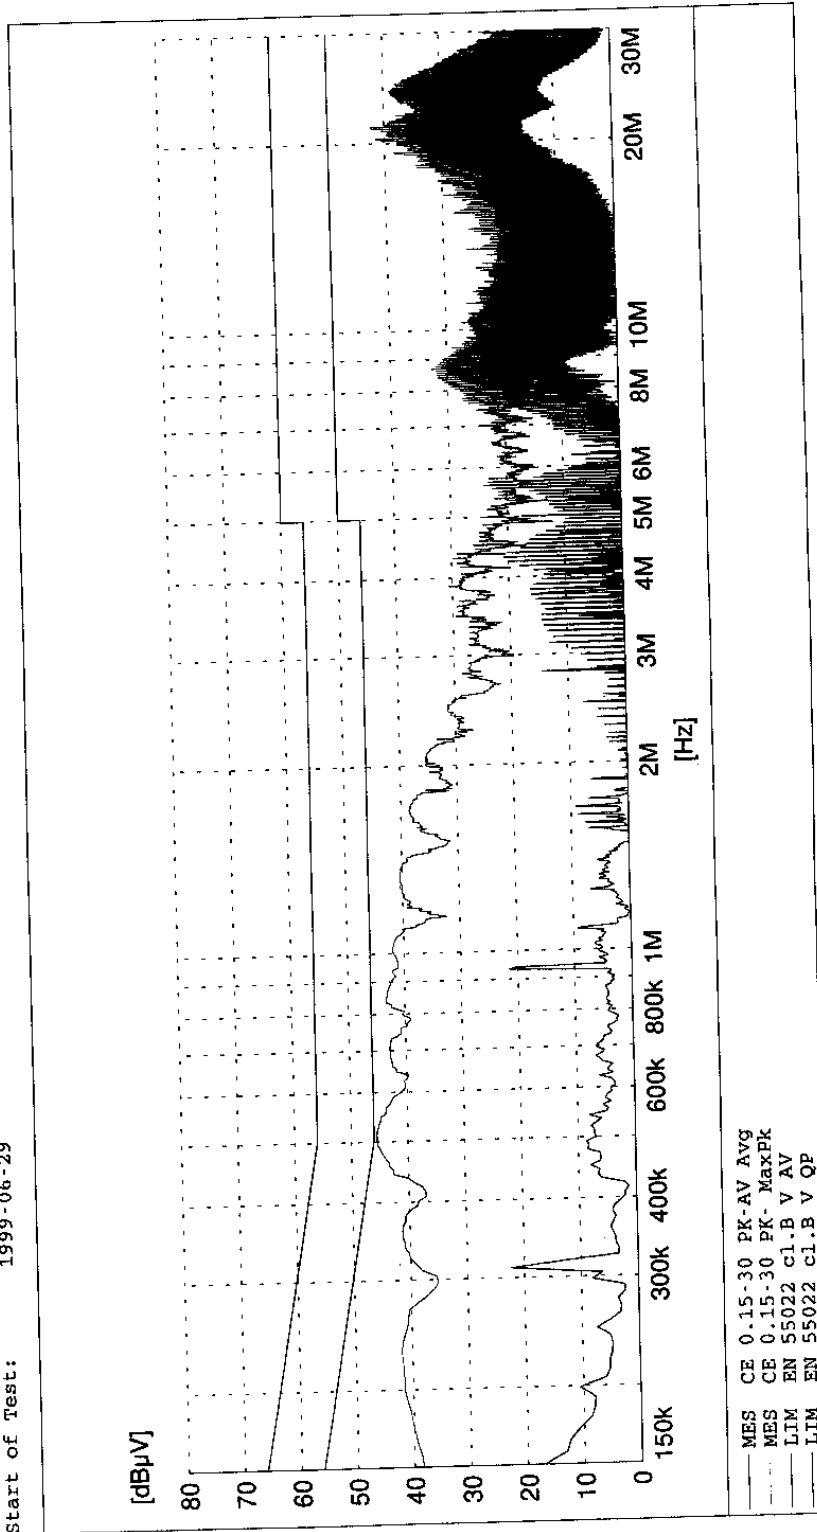

DANAK-194611  
DELTA-K220871-1

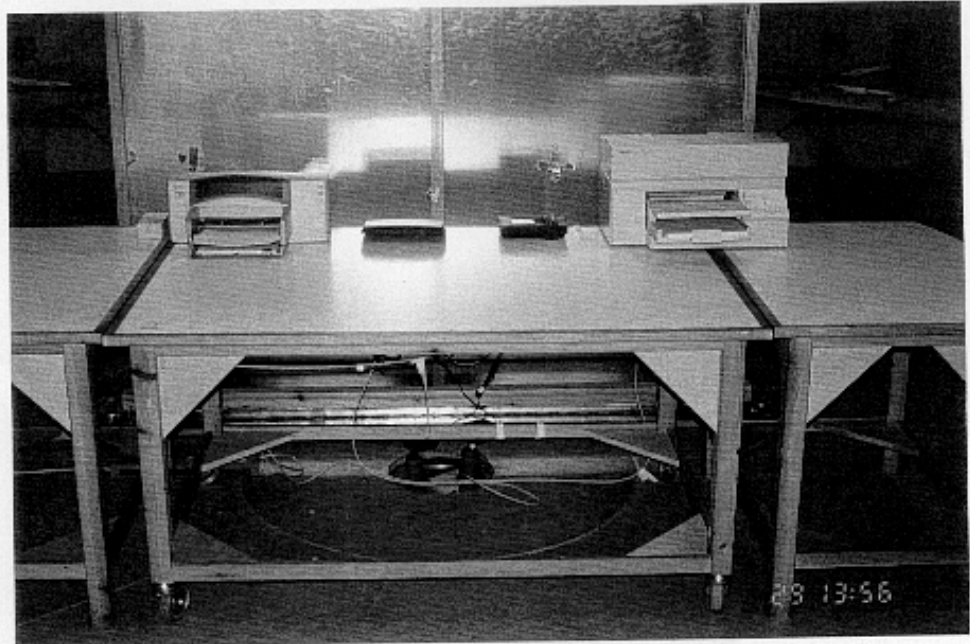


PHOTO A4.3

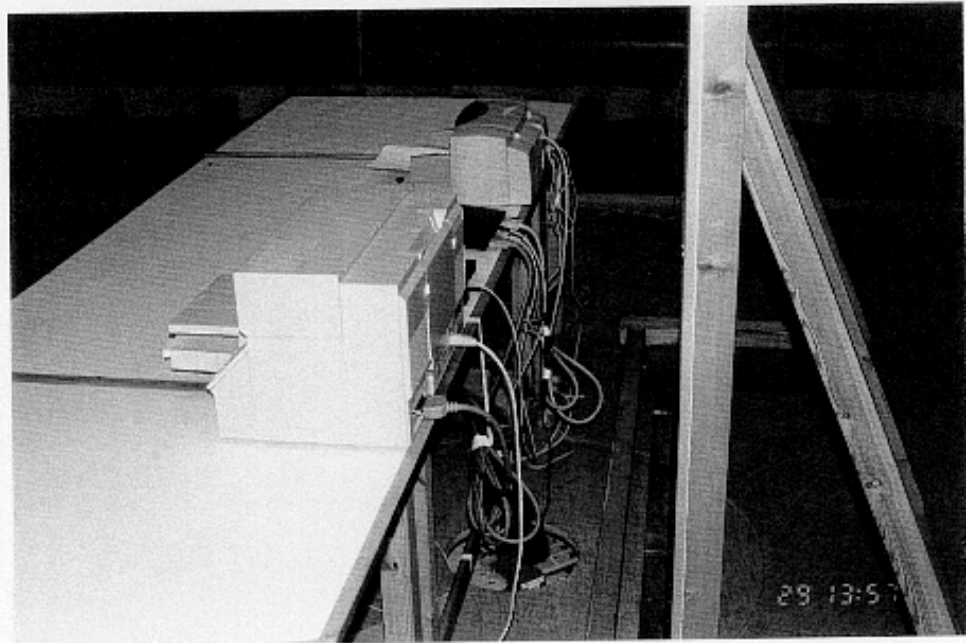


PHOTO A4.4


DANAK-194611  
DELTA-K220871-1

**ANNEX 5**

Test record sheets and photos regarding  
radiated electromagnetic field (FCC, class B / EN 55022, class B)

(4 pages)

EUT: PlusCom Xpress & SafeCom.  
Manufacturer: I-Data.  
Operating Condition: ant 1 m vertical. 115 Vac. S-UTP cable.  
Test Site: EMC-5  
Operator: HEN-K220871  
Test Specification: EN 55022 B, FCC B .  
Comment: Sheet 3  
Start of Test: 1999-06-29

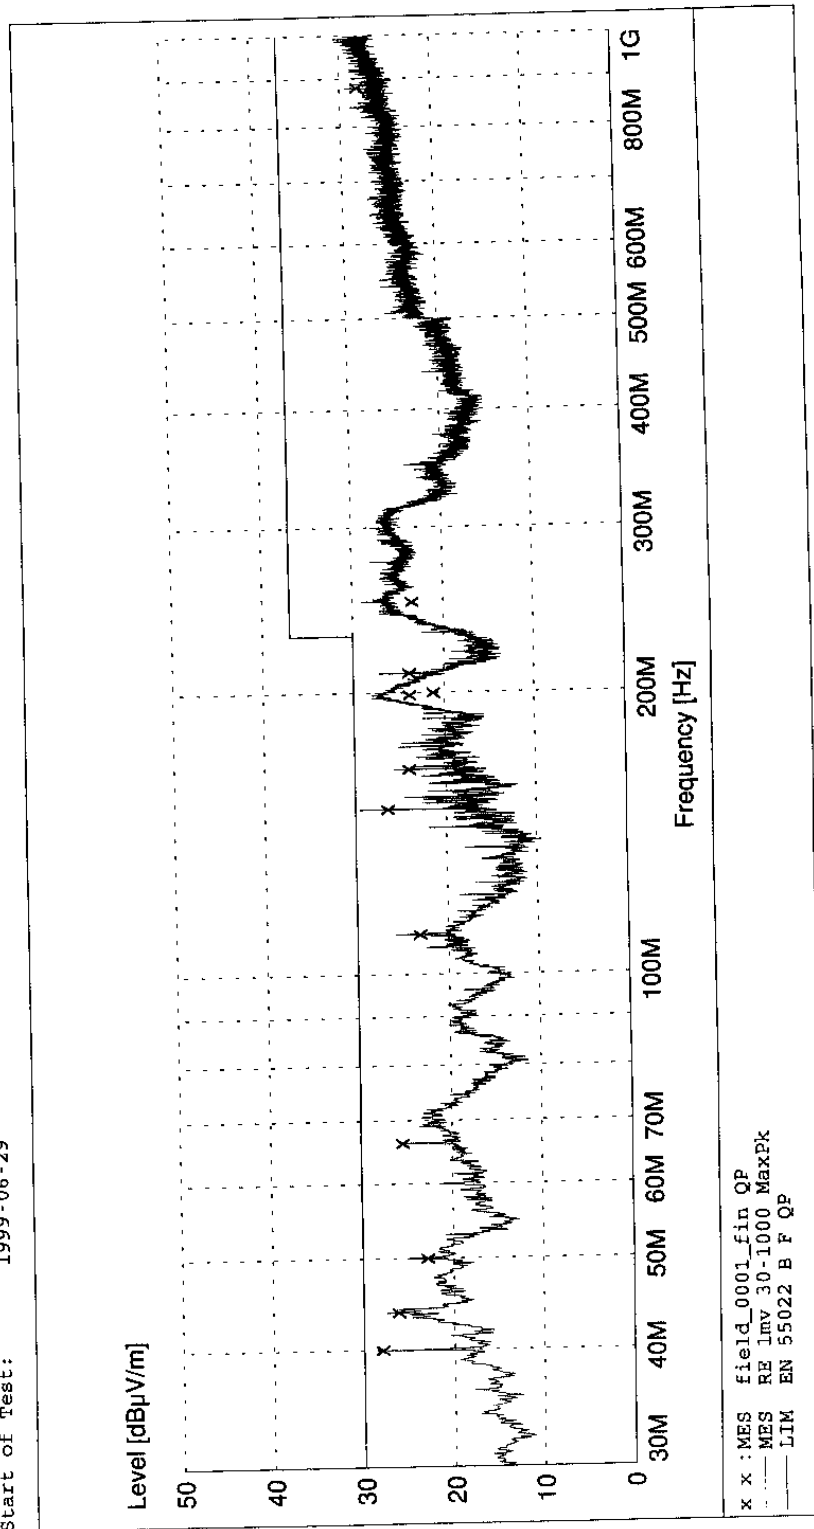

| Frequency<br>MHz | Level<br>dBuV/m | Transd<br>dB | Limit<br>dBuV/m | Margin<br>dB | Height<br>cm | Azimuth<br>deg | Polarisation |
|------------------|-----------------|--------------|-----------------|--------------|--------------|----------------|--------------|
| 29-06-99 11:39   |                 |              |                 |              |              |                |              |
| 40.000000        | 28.20           | 9.0          | 30.0            | 1.7          | 102.0        | 118.00         | VERTICAL     |
| 43.820000        | 26.40           | 9.5          | 30.0            | 3.5          | 129.0        | 135.00         | VERTICAL     |
| 50.000000        | 23.10           | 9.8          | 30.0            | 6.8          | 222.0        | 8.00           | VERTICAL     |
| 66.240000        | 25.70           | 9.8          | 30.0            | 4.2          | 300.0        | 28.00          | VERTICAL     |
| 110.400000       | 23.40           | 6.8          | 30.0            | 6.5          | 131.0        | 14.00          | VERTICAL     |
| 150.000000       | 26.70           | 8.2          | 30.0            | 3.2          | 102.0        | 2.00           | VERTICAL     |
| 165.600000       | 24.30           | 8.5          | 30.0            | 5.6          | 102.0        | 23.00          | VERTICAL     |
| 198.720000       | 24.10           | 10.1         | 30.0            | 5.8          | 113.0        | 351.00         | VERTICAL     |
| 200.000000       | 21.50           | 10.2         | 30.0            | 8.4          | 149.0        | 344.00         | VERTICAL     |
| 209.760000       | 24.10           | 10.6         | 30.0            | 5.8          | 113.0        | 380.00         | VERTICAL     |
| 250.000000       | 23.70           | 13.7         | 37.0            | 13.2         | 113.0        | 66.00          | VERTICAL     |
| 879.970000       | 28.40           | 24.1         | 37.0            | 8.5          | 151.0        | 210.00         | VERTICAL     |

DANAK-194611  
DELTA-K220871-1

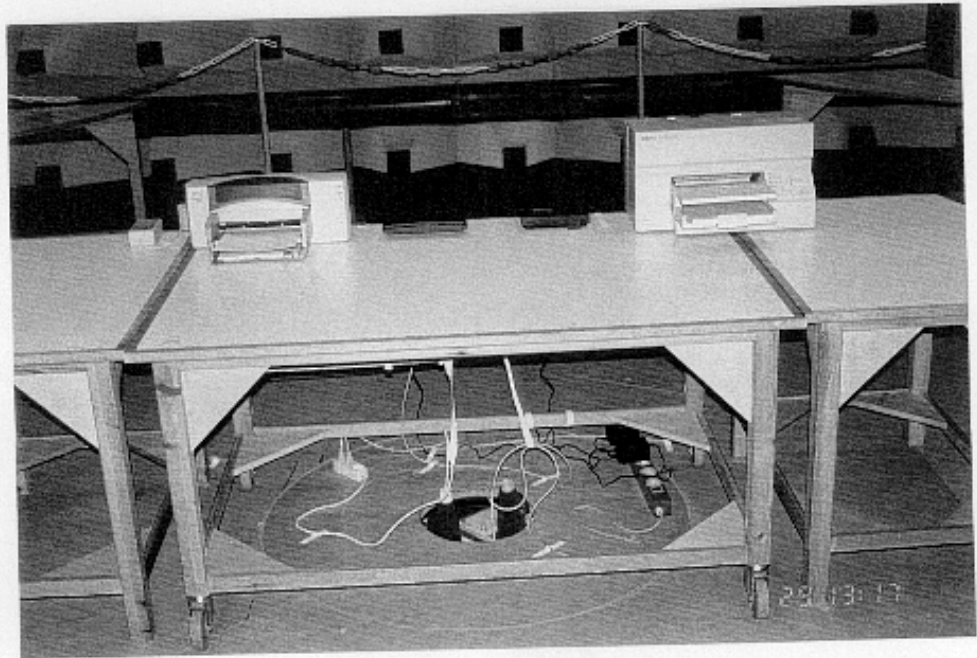


PHOTO A5.1

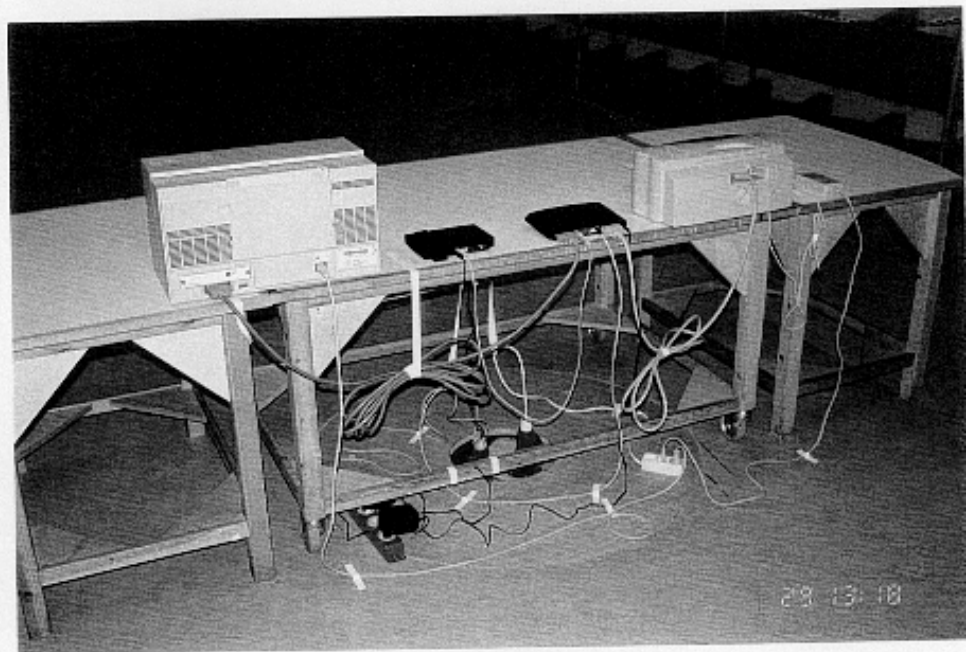


PHOTO A5.2

DANAK-194611  
DELTA-K220871-1

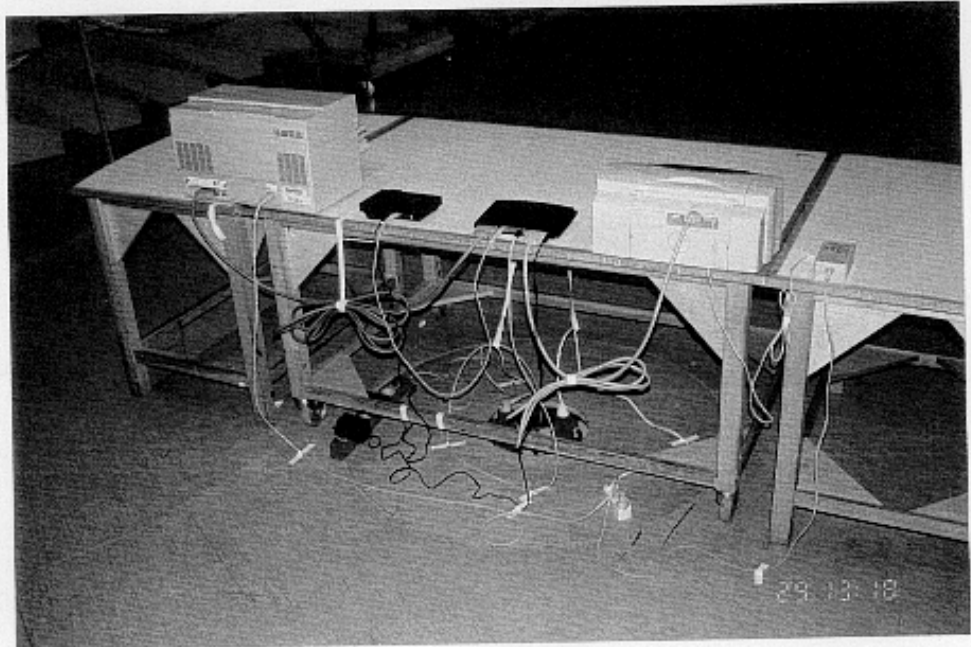


PHOTO A5.3