

Advanced
Compliance Laboratory

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

of

PET FOUNTAIN
MODEL: PF02
FCC ID: OK7PF02

September 16, 2005

This report concerns (check one): Original grant Class II change
Equipment type: Low Power TRANSMITTER

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes no
If yes, defer until: _____ (date)

Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes no
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for:
Report prepared by:
Report number:

Daka DEVELOPMENT LTD.
Advanced Compliance Lab
0048-050829-01



The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page	1
Table of Contents	2
Figures	3
1. GENERAL INFORMATION	4
1.1 Verification of Compliance	4
1.2 Equipment Modifications.....	5
1.3 Product Information.....	6
1.4 Test Methodology.....	6
1.5 Test Facility	6
1.6 Test Equipment	6
1.7 Statement of the Document Use.....	7
2. PRODUCT LABELING	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	9
3.2 Special Accessories.....	9
3.3 Configuration of Tested System	9
4. SYSTEM SCHEMATICS	12
5. CONDUCTED EMISSION DATA	13
5.1 Test Methods and Conditions	13
5.2 Test Data	13
6. RADIATED EMISSION DATA	16
6.1 Field Strength Calculation	16
6.2 Test Methods and Conditions	16
6.3 Test Data	16
6.4 Occupied Bandwidth	17
7. PHOTOS OF TESTED EUT	19

Figures

Figure 2.1 FCC ID Label.....	8
Figure 2.2 Location of Label on Back of the EUT	8
Figure 3.1 Radiated Front.....	10
Figure 3.2 Radiated Rear	10
Figure 3.3 Conducted Front.....	11
Figure 3.4 Conducted Rear/Side.....	11
Figure 4.1 System Schematics	12
Figure 5.1 Line Conducted Emission	14
Figure 5.2 Neutral Conducted Emission	15
Figure 6.1 Occupied Bandwidth	18
Figure 7.1 Front View.....	20
Figure 7.2 Rear View	21
Figure 7.3 Inside View, Cover Opened	22
Figure 7.4 PCB1 Component Side.....	23
Figure 7.5 PCB1 Foil Side	24
Figure 7.6 PCB2 Component Side.....	25
Figure 7.7 PCB2 Foil Side	26

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: PET FOUNTAIN
 Model: PF02
 Applicant: DAKA DEVELOPMENT LTD.
 Test Type: FCC Part 15C CERTIFICATION
 Result: PASS
 Tested by: ADVANCED COMPLIANCE LAB
 Test Date: September 16, 2005
 Report Number: 0048-050829-01

The above equipment was tested by Advanced Technologies Lab. Compliance Laboratory for compliance with the requirement set forth in the FCC rules and regulations Part 15, subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	±2.36	±2.99	±1.83


 Wei Li
 Lab Manager
 Advanced Compliance Lab

Date: September 16, 2005

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	FCC ID	CABLE
Product	PET FOUNTAIN	OK7PF02(1)	
Housing	PLASTICS		
Power Supply	6V DC (Battery or AC/DC adaptor)		
Clock/OSC Freq.	915MHz		
Device Type	Continue Operation		

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Last Cal dd/mm/y	Cal Due dd/mm/y
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	12/01/05	12/01/06
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	12/02/05	12/02/06
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	09/02/05	09/02/06
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	28/08/05	28/08/06
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	28/08/05	28/08/06
EMCO	6502	2665	10KHz-30MHz Active Loop Antenna	27/02/05	27/02/06
EMCO	3115	4945	Double Ridge Guide Horn Antenna	18/08/05	18/08/06

All Test Equipment Used are Calibrated Traceable to NIST Standards.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

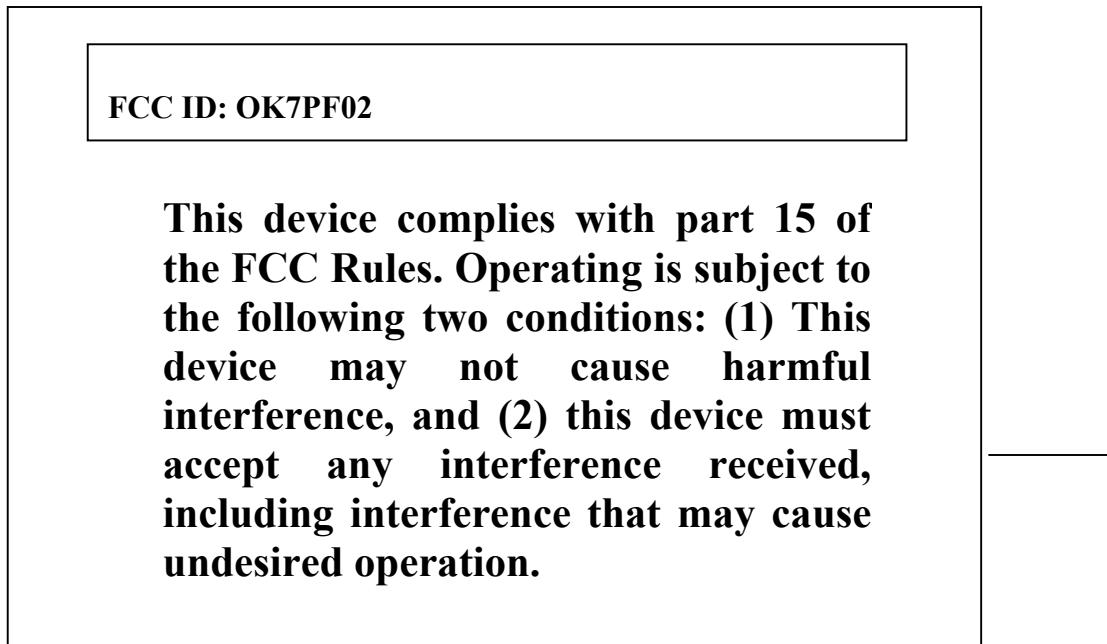


Figure 2.1 FCC ID Label

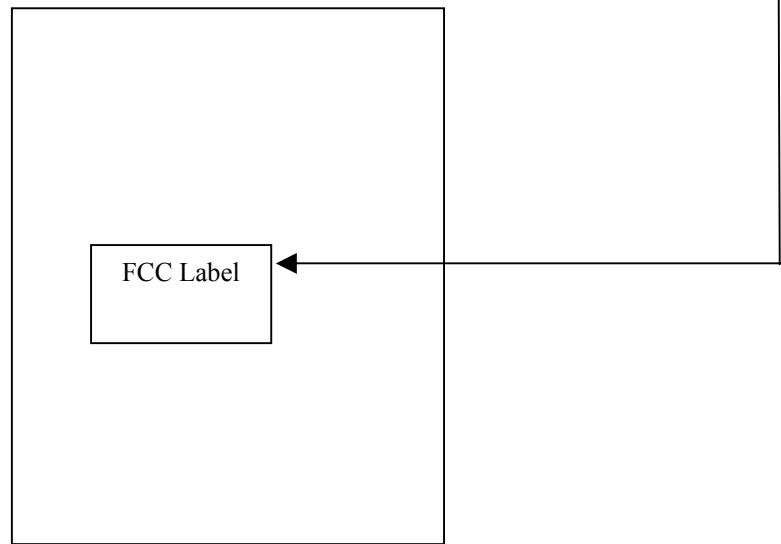


Figure 2.2 Location of the Label on Bottom of EUT

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). It's placed vertically and its antenna was permanently attached to the EUT. This transmitter will continuously send out the signal. The worse case is using AC/DC adaptor comparing to using batteries as power source.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1to Figure 3.4 illustrate this system, which is tested standing along.



Figure 3.1 Radiated Front

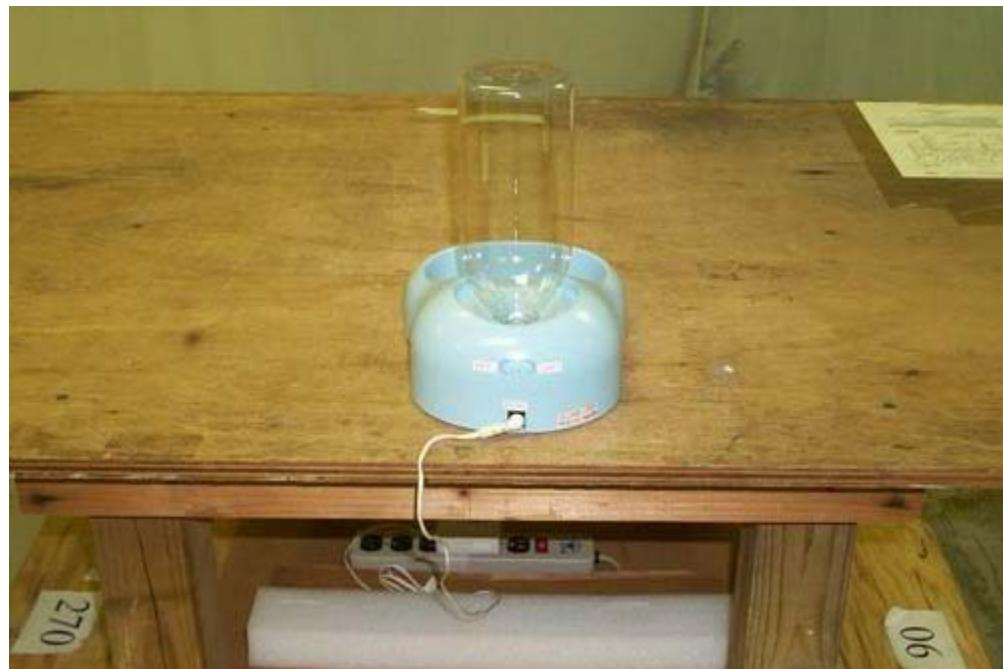


Figure 3.2 Radiated Rear



Figure 3.3 Conducted Front



Figure 3.4 Conducted Rear/Side

4. SYSTEM SCHEMATICS

See attachment.

Figure 4.1 System Schematics

5. CONDUCTED EMISSION DATA

5.1 Test Methods and Conditions

The EUT was under normal operational mode during the conducted emission test. EMI Receiver was scanned from 150KHz to 30MHz with maximum hold mode for maximum emission. Recorded data was sent to the plotter to generate output in linear format. At the input of the spectrum analyzer, a HP transient limiter is inserted for protective purpose. This limiter has a 10 dB attenuation in the range of 150KHZ to 30MHZ. That factor was automatically compensated by the receiver, so the readings are the corrected readings. The reference of the plot is the CISPR 22 Class B limit in Figure 5.1 through Figure 5.2.

Conducted Emission Technical Requirements				
	Class A		Class B	
Frequency Range	Quasi-Peak dBuV	Average dBuV	Quasi-Peak dBuV	Average dBuV
150kHz -0.5MHz	79 (8912uV)	66 (1995uV)	66-56	56-46
0.5MHz-30MHz	73 (4467uV)	60 (1000uV)	---	---
0.5MHz- 5MHz	---	---	56	46 (250uV)
5MHz-30MHz	---	---	60	50

Emissions that have peak values close to the specification limit (if any) are also measured in the quasi-peak mode to determine compliance.

5.2 Test Data

Figure 5.1-5.2 show the neutral and line conducted emissions for the standard operation.

Six Highest Data for AC Line Conducted Emissions						
Frequency (MHz)	0.151	0.188	0.570	0.650	-	-
Line(L)/Neutral(N)	N	L	L	N	-	-
Peak Reading (dBuV)	37.9	31.5	19.2	20.7	-	-
Class B Limit (average)	56	53	50	50	-	-
Margin (dB)	-18.1	-21.5	-30.8	-29.3	-	-


Test Personnel:



Tester Signature: _____

Date: Sept. 16, 2005

Typed/Printed Name: Edward Lee

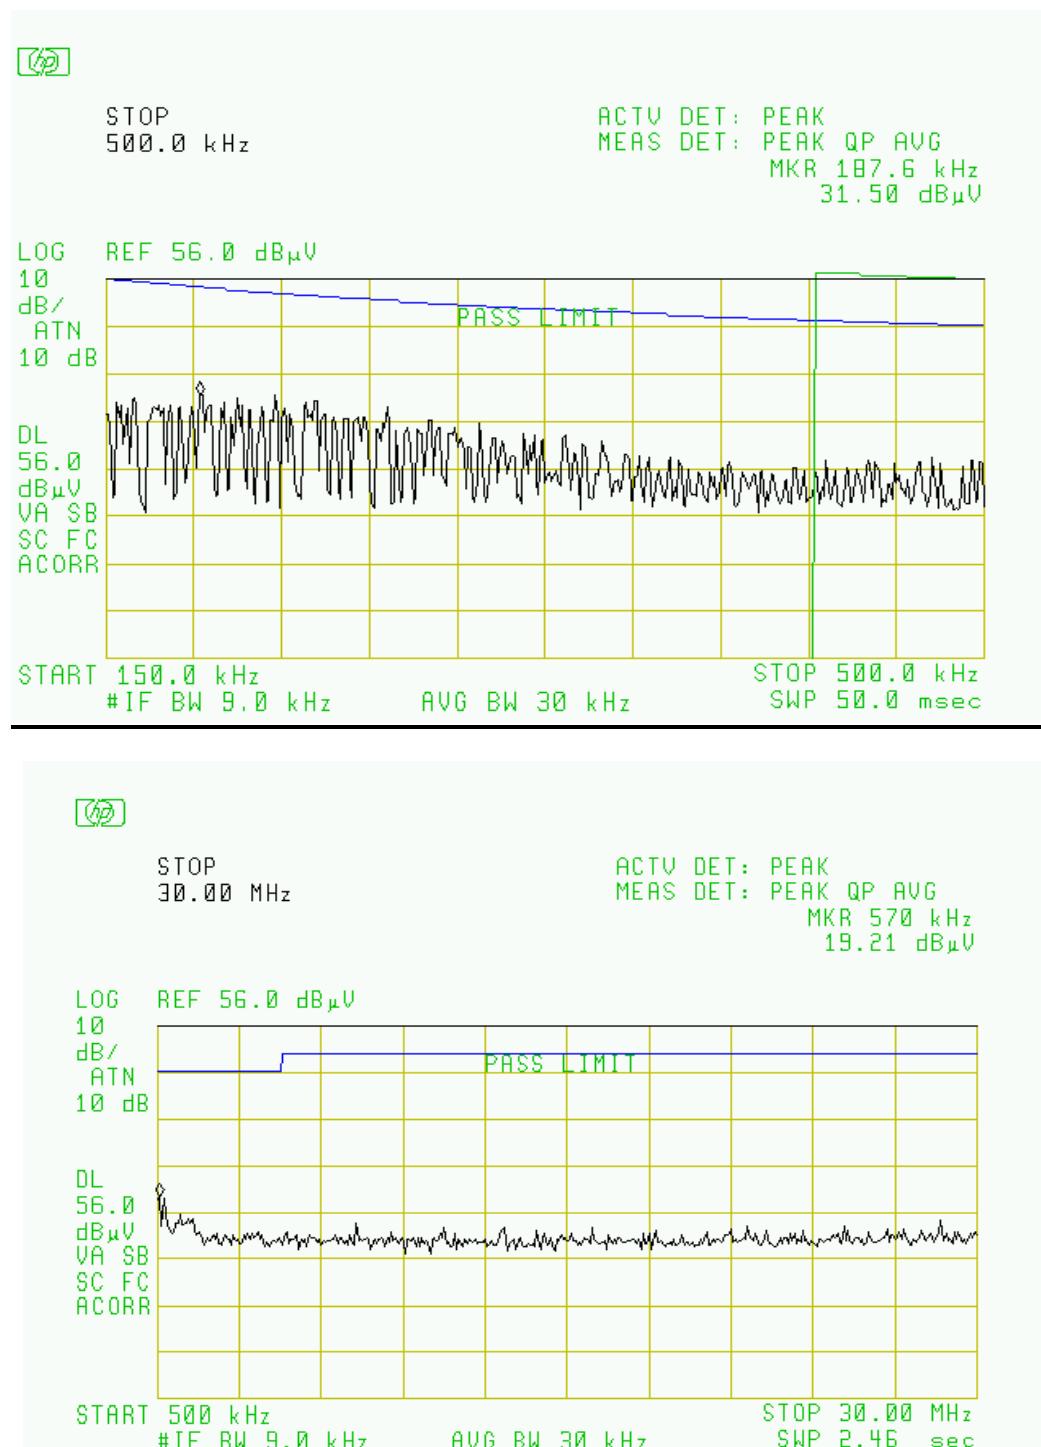

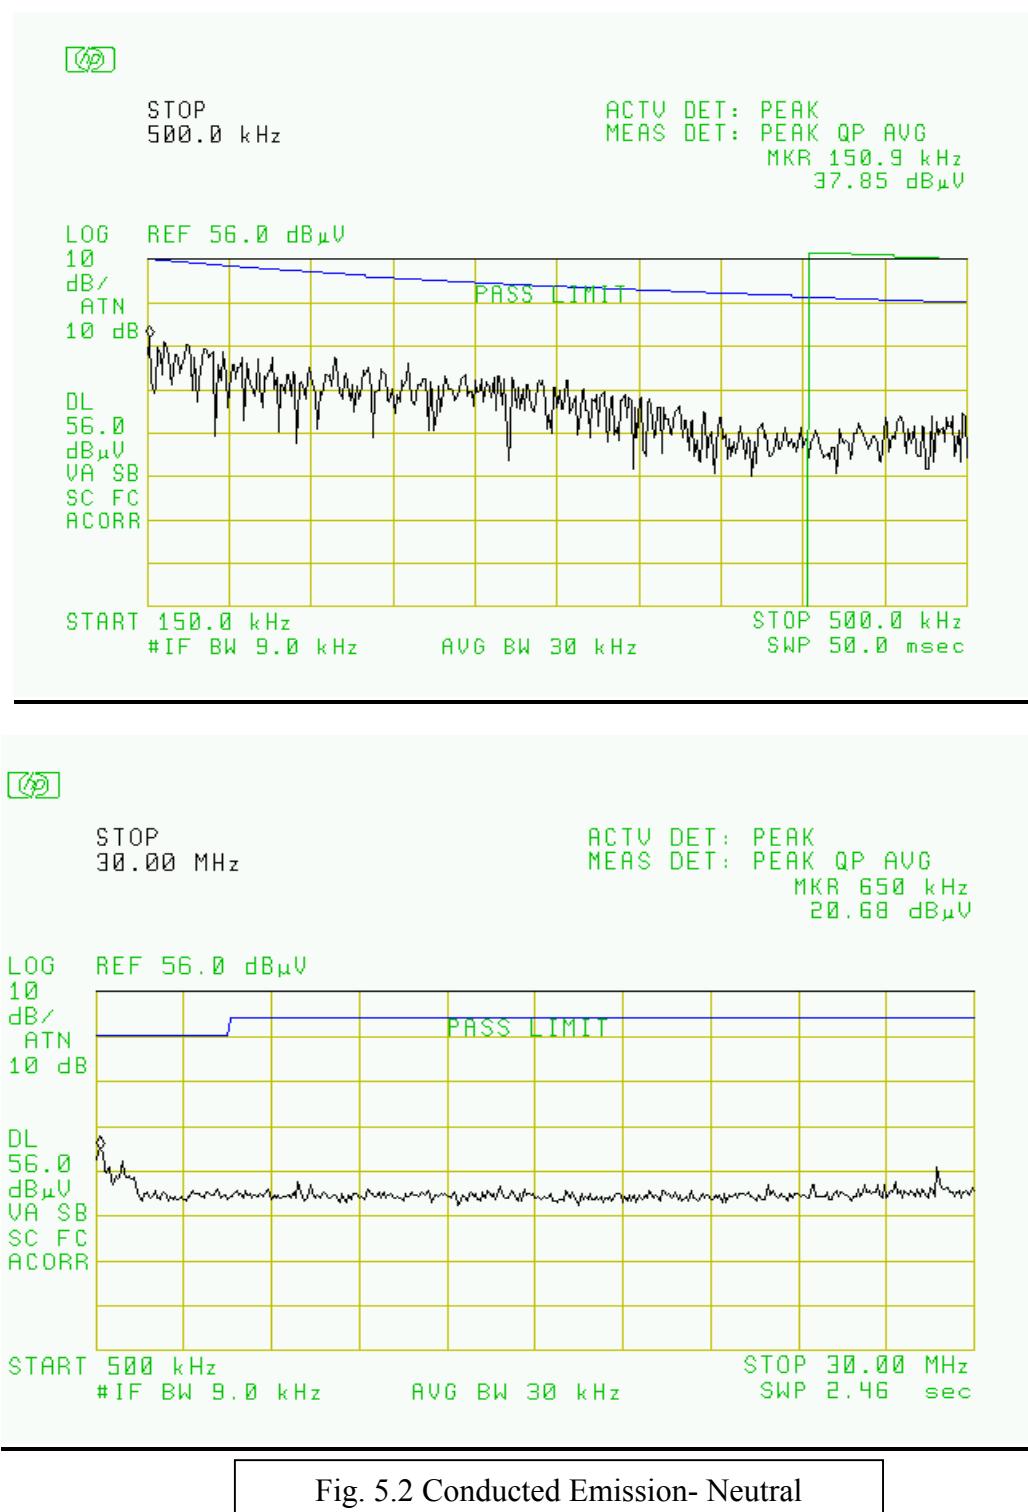


Fig. 5.2 Conducted Emission- Neutral

6. RADIATED EMISSION DATA

6.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

6.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10th harmonics were investigated.

6.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 6.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: Sept. 16, 2005

Radiated Test Data

Frequency (MHz)	Polarity [H or V], Position (X,Y,Z)	Height (m)	Azimuth (Degree)	Peak Reading (dB μ V/m)	Calculated Average Reading (dB μ V/m)	FCC 3m Limit (dB μ V/m)	Difference from limit (dB)
915	H	1.4	30	76.4		94.0(2)	-17.6
1830	H	1.3	20	50.1		54.0	-3.9
2745	H	1.2	20	45.0		54.0(1)	-9.0
915	V	1.2	10	80.2		94.0	-13.8
1830	V	1.2	350	52.0		54.0	-2.0
2745	V	1.2	340	46.1		54.0	-7.9

(1) Restricted band.
 (2) 15.249 General limit for 902-928MHz operation.

6.4 Occupied Bandwidth

Bandwidth is determined at the points 20dB down from the modulated carrier. Figure 6.1 shows the occupied bandwidth plot.

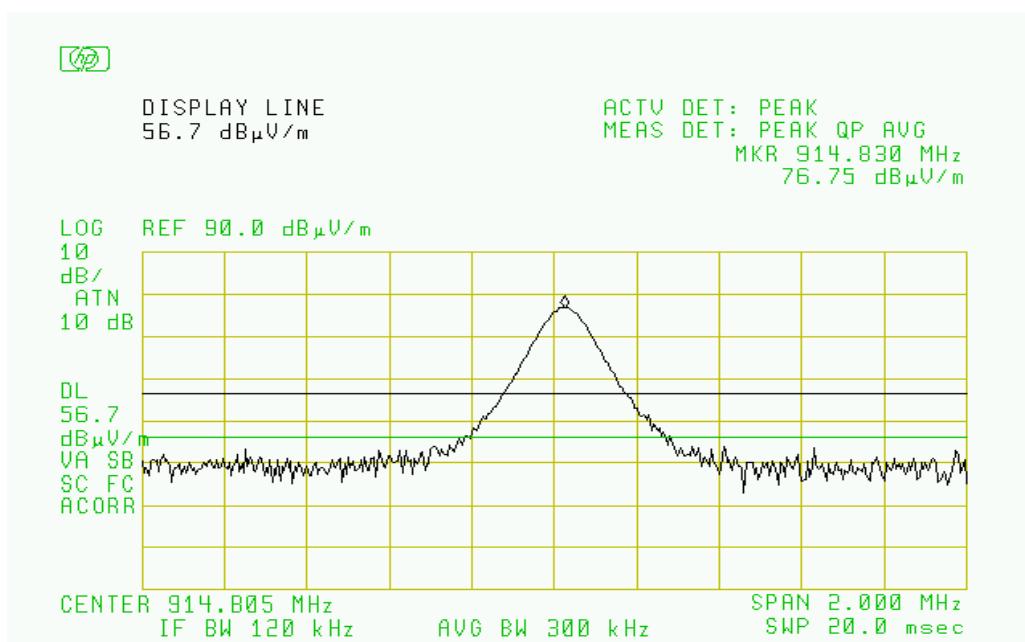
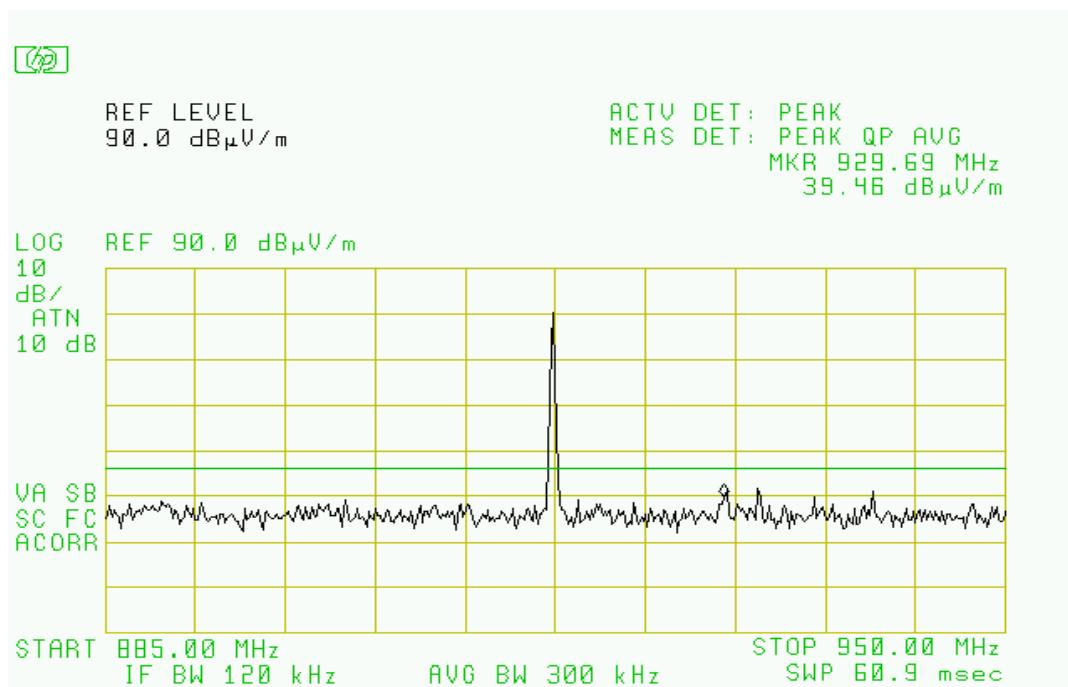


Figure 6.1 Occupied Bandwidth & Bandedge

7. PHOTOS OF TESTED EUT

The following photos show the inside details of the EUT.