

FCC PART 95

EMI MEASUREMENT AND TEST REPORT

For

Shenzhen Bao An Hantong Electronics Factory

Block 11 & 12, Jinbi Industrial Area, Hwang Tian, Baoan,
Shenzhen, Guangdong, China

FCC ID: OK899161HT02

January 21, 2002

| | |
|---|--|
| This Report Concerns: <input checked="" type="checkbox"/> Original Report | Equipment Type: Family Radio Service (FRS) |
| Test Engineer: <u>Jeff Lee</u> | |
| Test Date: <u>January 8, 2002</u>  | |
| Reviewed By: John Y. Chan – Engineering Manager | |
| Prepared By: Bay Area Compliance Laboratory Corporation 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164 | |

Note: This test report is specially limited to the above client company and product model. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

| | |
|--|-----------|
| 1 - GENERAL INFORMATION..... | 4 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) | 4 |
| 1.2 OBJECTIVE | 4 |
| 1.3 TEST METHODOLOGY | 4 |
| 1.4 TEST FACILITY | 4 |
| 1.5 TEST EQUIPMENT LIST | 5 |
| 1.6 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS..... | 5 |
| 1.7 EXTERNAL I/O CABLES LIST AND DETAILS | 5 |
| 2 - SYSTEM TEST CONFIGURATION..... | 6 |
| 2.1 JUSTIFICATION | 6 |
| 2.2 EUT EXERCISE SOFTWARE | 6 |
| 2.3 SPECIAL ACCESSORIES..... | 6 |
| 2.4 SCHEMATICS / BLOCK DIAGRAM | 6 |
| 2.5 EQUIPMENT MODIFICATIONS | 6 |
| 2.6 CONFIGURATION OF TEST SYSTEM..... | 7 |
| 2.7 TEST SETUP BLOCK DIAGRAM | 7 |
| 3 - REQUIREMENTS OF PROVISIONS..... | 8 |
| 3.1 GENERAL PROVISIONS | 8 |
| 3.2 REQUIREMENTS AND TEST SUMMARY | 8 |
| 3.3 LABELING REQUIREMENT | 8 |
| 4 - EFFECTIVE RADIATED POWER..... | 9 |
| 4.1 PROVISION APPLICABLE..... | 9 |
| 4.2 TEST PROCEDURE | 9 |
| 4.3 TEST EQUIPMENT | 10 |
| 4.4 TEST RESULTS | 10 |
| 5 - MODULATION CHARACTERISTICS..... | 11 |
| 5.1 PROVISION APPLICABLE..... | 11 |
| 5.2 TEST PROCEDURE | 11 |
| 5.3 TEST EQUIPMENT | 11 |
| 5.4 TEST RESULTS | 11 |
| 6 - OCCUPIED BANDWIDTH OF EMISSION..... | 14 |
| 6.1 PROVISION APPLICABLE..... | 14 |
| 6.2 TEST PROCEDURE | 14 |
| 6.3 TEST EQUIPMENT | 14 |
| 6.4 TEST RESULTS | 14 |
| 6.5 EMISSION DESIGNATOR..... | 14 |
| 7 - FIELD STRENGTH OF EMISSION | 16 |
| 7.1 PROVISION APPLICABLE..... | 16 |
| 7.2 TEST PROCEDURE | 16 |
| 7.3 TEST EQUIPMENT | 16 |
| 7.4 TEST RESULT | 16 |
| 8 - SPURIOUS EMISSION..... | 20 |
| 8.1 STANDARD APPLICABLE | 20 |
| 8.2 MEASUREMENT PROCEDURE | 20 |
| 8.3 TEST RESULT | 20 |
| 9 - AC LINE CONDUCTED EMISSIONS..... | 22 |
| 9.1 APPLICABLE REQUIREMENTS | 22 |
| 9.2 TEST PROCEDURE | 22 |
| 9.3 TEST EQUIPMENT | 22 |
| 9.4 TEST RESULTS | 22 |

| | |
|---|------------------------------|
| 10 - FREQUENCY STABILITY MEASUREMENT | 23 |
| 10.1 PROVISION APPLICABLE..... | 23 |
| 10.2 TEST PROCEDURE | 23 |
| 10.3 TEST EQUIPMENT | 23 |
| 10.4 TEST RESULTS..... | 24 |
| 11 - FCC ID LABELING AND LOCATION | ERROR! BOOKMARK NOT DEFINED. |
| 11.1 PROPOSED FCC ID LABELING | ERROR! BOOKMARK NOT DEFINED. |
| 11.2 PROPOSED FCC ID LOCATION..... | ERROR! BOOKMARK NOT DEFINED. |
| 12 - TEST SETUP PHOTOGRAPHS | ERROR! BOOKMARK NOT DEFINED. |
| 12.1 RADIATED EMISSION SETUP - FRONT VIEW | ERROR! BOOKMARK NOT DEFINED. |
| 12.2 RADIATED EMISSION SETUP - REAR VIEW | ERROR! BOOKMARK NOT DEFINED. |
| 13 - EUT PHOTOGRAPHS | ERROR! BOOKMARK NOT DEFINED. |
| 13.1 EUT - TOP VIEW | ERROR! BOOKMARK NOT DEFINED. |
| 13.2 EUT - BOTTOM VIEW | ERROR! BOOKMARK NOT DEFINED. |
| 13.3 EUT - COMPONENT VIEW 1 | ERROR! BOOKMARK NOT DEFINED. |
| 13.4 EUT - SOLDER VIEW 1 | ERROR! BOOKMARK NOT DEFINED. |
| 13.5 EUT – COMPONENT VIEW 2 | ERROR! BOOKMARK NOT DEFINED. |
| 13.6 EUT - SOLDER VIEW 2 | ERROR! BOOKMARK NOT DEFINED. |
| APPENDIX A - BLOCK DIAGRAM/SCHEMATICS/PARTS LIST | ERROR! BOOKMARK NOT DEFINED. |
| APPENDIX B - TUNING-UP PROCEDURE | ERROR! BOOKMARK NOT DEFINED. |
| APPENDIX C - OPERATIONAL DESCRIPTION | ERROR! BOOKMARK NOT DEFINED. |
| APPENDIX D - USERS MANUAL | ERROR! BOOKMARK NOT DEFINED. |

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *Shenzhen Bao An Hantong Electronics Factory*'s product, FCC ID: *OK899161HT02* or the "EUT" as referred to in this report is a lightweight, compact two-way radios using the FRS frequency band (operating in the frequency range from 462.5625MHz to 467.7125MHz).

The EUT is a 14-channel UHF two-way radio with 38 sub-codes, featuring a multi-functional LCD display (which indicates the current channel and various radio status icons). Other features also include electronic volume control and battery save circuitry.

The EUT measures approximately 6.0' L x 2.0' W x 1.6' H.

For marketing purposes, *Shenzhen Bao An Hantong Electronics Factory* would like to apply multiple model names to the EUT: 99161, 9917.

99161 and 9917 are the exactly same in electrical components and may vary in cosmetic design. There is no effect on emissions.

** The test data was good only for test samples. It may have deviation for other product samples.*

1.2 Objective

This report is prepared on behalf of *Shenzhen Bao An Hantong Electronics Factory* in accordance with Part 95 Subpart B and Subpart H of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for effective radiated power, modulation characteristics, occupied bandwidth, radiated spurious emissions, AC line conducted emissions and frequency stability.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.4 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

1.5 Test Equipment List

| Manufacturer | Description | Model | Serial Number | Cal. Due Date |
|-------------------|--------------------------|------------------|---------------|---------------|
| HP | Spectrum Analyzer | 8564E | 08303 | 12/6/02 |
| HP | Spectrum Analyzer | 8593B | 2919A00242 | 12/20/02 |
| HP | Amplifier | 8349B | 2644A02662 | 12/20/02 |
| HP | Quasi-Peak Adapter | 85650A | 917059 | 12/6/02 |
| HP | Amplifier | 8447E | 1937A01046 | 12/6/02 |
| A.H. System | Horn Antenna | SAS0200/571 | 261 | 12/27/02 |
| Com-Power | Log Periodic Antenna | AL-100 | 16005 | 11/2/02 |
| Com-Power | Biconical Antenna | AB-100 | 14012 | 11/2/02 |
| Solar Electronics | LISN | 8012-50-R-24-BNC | 968447 | 12/28/02 |
| Com-Power | LISN | LI-200 | 12208 | 12/20/02 |
| Com-Power | LISN | LI-200 | 12005 | 12/20/02 |
| BACL | Data Entry Software | DES1 | 0001 | 12/20/02 |
| Rohde & Schwarz | Signal Generator | SMIQ03B | 1125.5555.03 | 7/10/02 |
| Rohde & Schwarz | I/Q Modulation Generator | AMIQ | 1110.2003.02 | 8/10/02 |

1.6 Local Support Equipment List and Details

| Manufacturer | Description | Model | Serial Number | FCC ID |
|--------------|--------------------------------------|-------|---------------|--------|
| Sony | Ear Phone and Microphone Combination | N/A | None | DOC |

1.7 External I/O Cables List and Details

| Description | Length | From | To |
|----------------------|-----------|--------------|-------------------------------------|
| Unshielded MIC Cable | 1.2 meter | MIC Port/EUT | Earphone and Microphone Combination |

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The EUT was tested under typical operating modes to represent the worst case results during the final qualification test.

2.2 EUT Exercise Software

The EUT was powered and fully operated with option speaker/microphone connected. The unit was powered from 4 fully charged AAA batteries. The sequence used is as follows:

2.3 Special Accessories

As shown in section 2.5, interface cable used for compliance testing is shielded as normally supplied by customer and its respective support equipment manufacturers.


2.4 Schematics / Block Diagram

Appendix A contains a copy of the EUT's schematics diagram as reference. EUT's schematics diagram is not available in this report.

2.5 Equipment Modifications


No modification was made by BACL Corp. to make sure the EUT to comply with the applicable limits.

2.6 Configuration of Test System

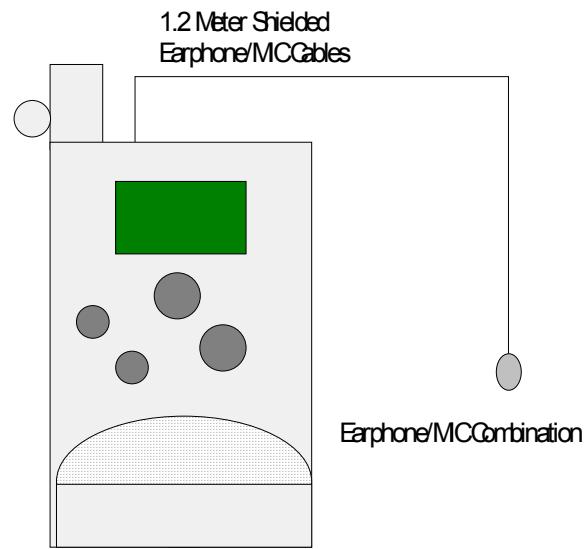

2.7 Test Setup Block Diagram

For tabletop systems, the EUT shall be centered laterally on the tabletop and its rear shall be flushed with the rear of the table. If the EUT is a stand-alone unit, it shall be placed in the center of the tabletop.

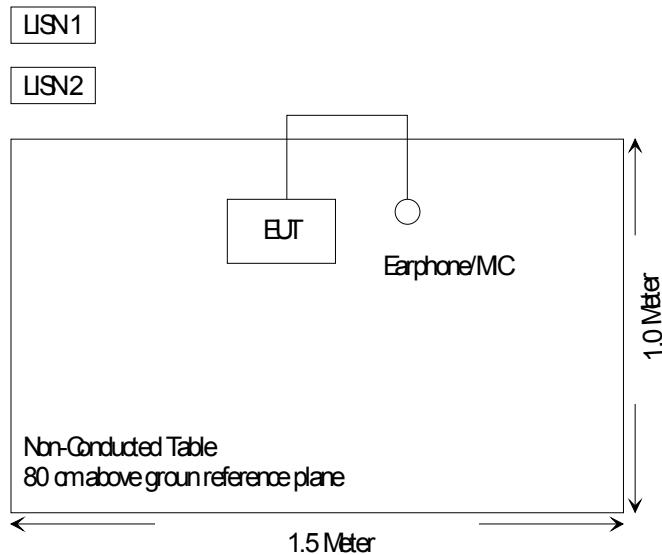

3 - REQUIREMENTS OF PROVISIONS

3.1 General Provisions

FCC §95.191 FRS Rule 1 - Eligibility and responsibility
 FCC §95.192 FRS Rule 2 - Authorized Location
 FCC §95.191 FRS Rule 3 - Types of Communications
 FCC §95.191 FRS Rule 4 - FRS units

3.2 Requirements and Test Summary

| FCC Rules | Rules Description | Test Result | Page |
|------------------------------------|---|---|--------|
| Transmitter Section | | | |
| 2.1046 95.639 (d) | Effective Radiated Power | 0.182 W | P10-11 |
| 2.1047 95.631 (d) 95.637 (a) | Modulation Characteristics F3E analogy voice Peak Frequency Deviation Audio Frequency Response | Deviation: 2.41 kHz < 2.5 kHz | P12-14 |
| 2.1049 95.633 (c) | Occupied Bandwidth | 12.5 KHz | P15 |
| 2.1053 15.109 (a) | Field Strength of Spurious Radiation | Worst Case Frequency: 935.42MHz Margin: -6.0dB | P18-20 |
| 95.635 | Unwanted Radiation | Complied | P21-22 |
| 15.107 | Line Conducted Emissions | N/A | P23 |
| 2.1055 95.621 | Frequency Stability Vs. Temperature Vs. Voltage | 2.3ppm < 2.5ppm | P24-25 |
| Receiver Section | | | |
| 15.109 (a) | Radiated Emission | Worst case frequency: 935.42MHz Margin: -6.0dB | P18-20 |

3.3 Labeling Requirement

Each equipment for which a type acceptance applications is filed on or after May 1, 1981, shall bear an identification plate or label pursuant to §2.295 (Identification of Equipment) and §2.926 (FCC identifier)

4 - Effective Radiated Power

4.1 Provision Applicable

Per FCC §2.1046 and FCC § 95.639 (d), no FRS unit, under any condition of modulation, shall exceed 0.500W effective radiated power (ERP).

4.2 Test Procedure

1. On a test site, the EUT shall be placed at 1.5m height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the quasi-peak detector is used for the measurement.
4. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a tuned dipole (substitution antenna).
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
16. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
17. The measure of the effective radiated power is the large of the two levels recorded, at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.

4.3 Test equipment

- Signal Generator
Manufacturer: Hewlett Packard
Model: OPT001
S/N: 3217A04699
Calibration Due Date: 2/5/02
- Dipole Antenna
Manufacturer: Com Power Corporation
Model: AD-100
S/N: 02222
Calibration Due Date: 7/23/02

4.4 Test Results

The measured result showed as follows:

Low Frequency: 21.17dBm at 462.59MHz
Middle Frequency: 22.6dBm at 467.56MHz
High Frequency: 22.0dBm at 467.717MHz

5 - MODULATION CHARACTERISTICS

5.1 Provision Applicable

Per FCC § 2.1047 and FCC §95.637 (a), a FRS unit that transits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz.

5.2 Test Procedure

5.2.1 Audio Frequency Response

The RF output of the transceiver was connected to the input of a FM deviation meter through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was coupled into the external microphone jack of the transceiver, or alternatively, the microphone element was removed the generator output was connected to the microphone connectors.

The audio signal input level was adjusted to obtain 20% of the maximum rated system deviation at 1 kHz, and recorded as DEV_{REF} . With the audio signal generator level unchanged, set the generator frequency between 300 Hz to 5000 Hz. The transmitter deviations (DEV_{FREQ}) were measured and the audio frequency response was calculated as

$$20\log_{10} [DEV_{FREQ} / DEV_{REF}]$$

5.2.2 Audio Low-Pass Filter Response

An audio signal generator and an audio spectrum analyzer were connected to the input and output of the post limiter low pass filter respectively. The audio signal generator frequency was set between 1000 MHz and the upper low pass filter limit. The audio frequency response at test frequency was calculated as

$$LEV_{FREQ} - LEV_{REF}$$

5.2.3 Modulation Limiting



With the same setup as section 5.2.1 above, at three different modulating frequencies, the output level of the audio generator was varied and the FM deviation level was recorded.



5.3 Test Equipment

Hewlett Packard HP8566B Spectrum Analyzer
Hewlett Packard HP 7470A Plotter
Hewlett Packard HP8901A Modulation Analyzer
Lecroy 9350A Oscilloscope

5.4 Test Results

The plot(s) of modulation characteristic is presented hereinafter as reference.

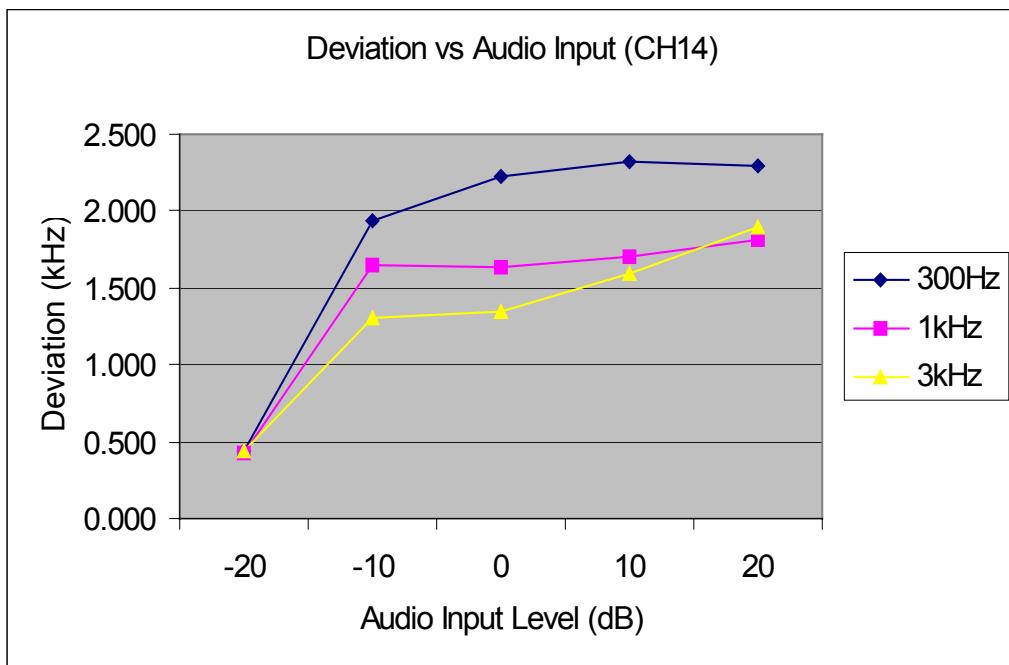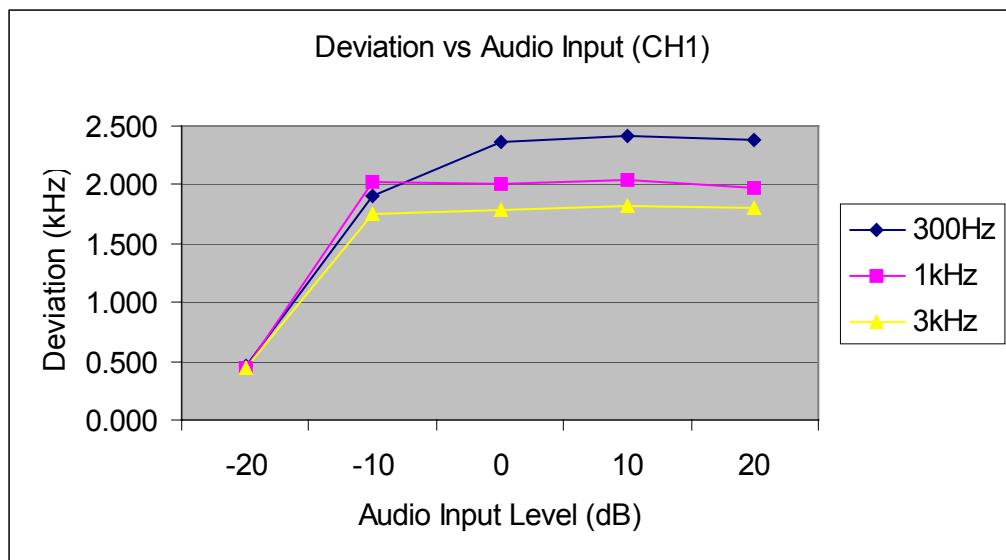

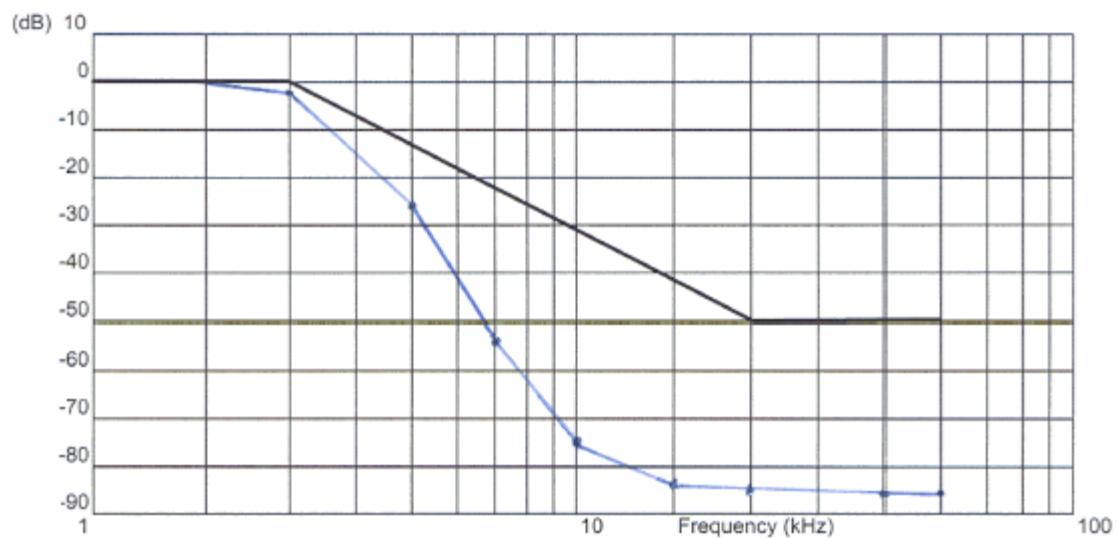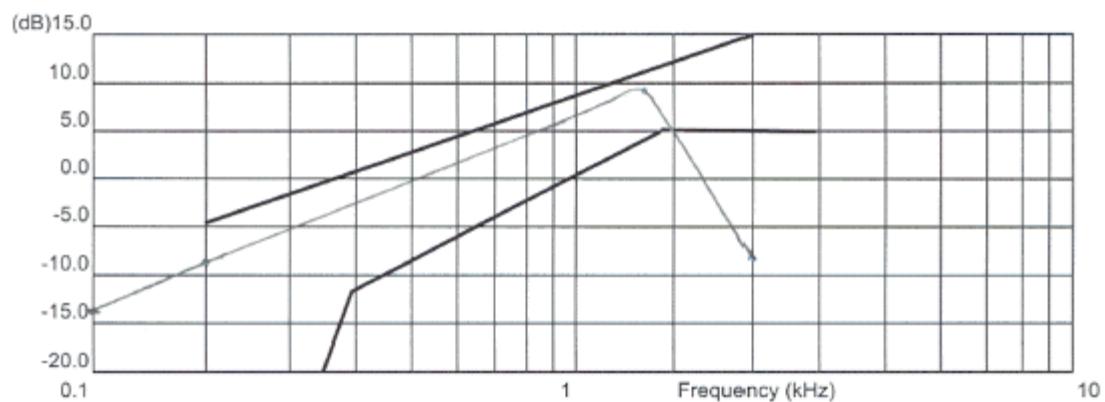

6 - OCCUPIED BANDWIDTH OF EMISSION

6.1 Provision Applicable

Per FCC §2.1049 and FCC §95.633 (c), the authorized bandwidth for emission type F3E transmitted by a FRS unit is 12.5 kHz.

6.2 Test Procedure

The antenna was disconnected from the transmitter and the short cable was connected to the transmitter RF output.

The RF output was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set up at least 10 times higher than the authorized bandwidth of the transmitter. With the transmitter keyed, the level of the unmodulated carrier was set to the full scale reference line of the spectrum analyzer. This is used as a 0dB reference for emission mask measurements.

The transmitter was then modulated with a 2500 Hz tone at an input level 20 dB greater than the necessary to produce 50% of rated system deviation. The resolution bandwidth of the spectrum analyzer was set up to 100 Hz and the spectrum of the transmitting signal was recorded. This spectrum was compared to the required emission mask.

6.3 Test Equipment

Leader LFG-1300S Function Generator
Hewlett Packard HP8566B Spectrum Analyzer
Hewlett Packard HP 7470A Plotter


6.4 Test Results

Test Result: Pass

Please refer the following curve and plots.

6.5 Emission Designator

$$2M + 2D = (2 \times 3 \text{ kHz}) + (2 \times 2.5 \text{ kHz}) = 11\text{K0F3E}$$

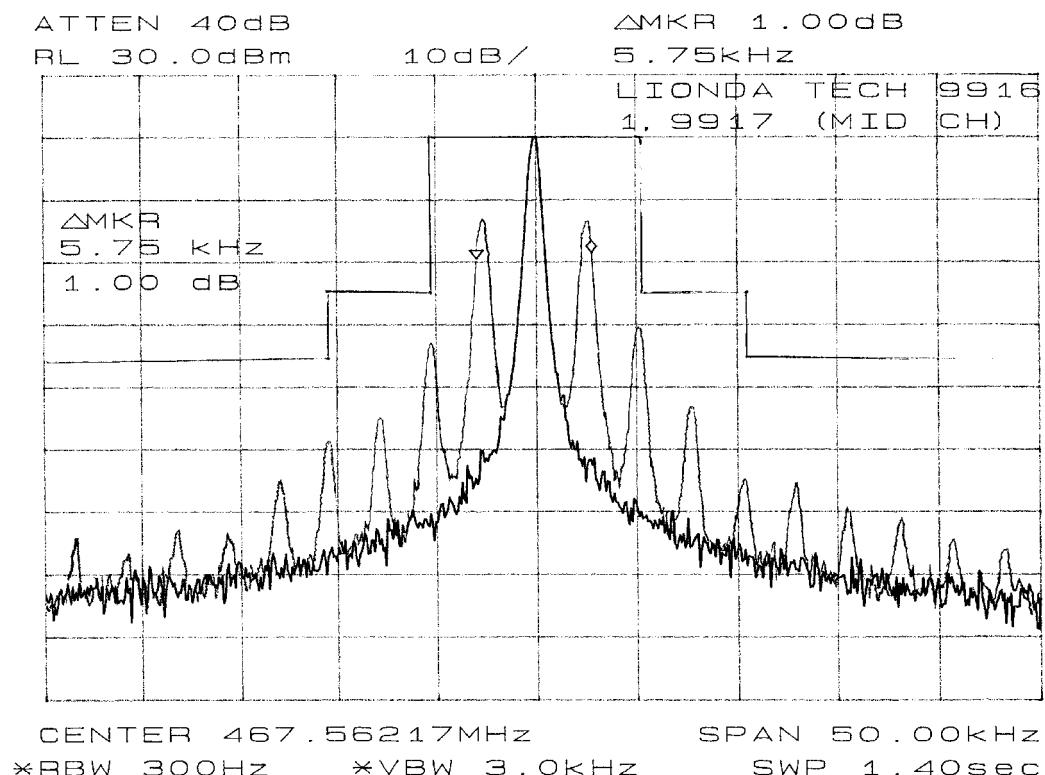

7 - FIELD STRENGTH OF EMISSION

7.1 Provision Applicable

According to FCC §2.1053, measurements shall be made to detect spurious emission that may be radiated directly from the cabinet, control circuits, power leads, or intermediated circuit elements under normal condition of installation and operation. Information submitted shall include the relative radiated power of spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from a halfwave dipole antenna.

7.2 Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3 orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

The spurious harmonic attenuation was calculated as the difference between E in dB (uV/m) at the fundamental frequency and at the spurious emission frequency.

Spurious attenuation limit in dB = $43 + 10 \log_{10}$ (power out in Watts)

7.3 Test Equipment

CDI B100/200/300 Biconical Antennas
EMCO Bi-logcon Antenna
EMCO 3115 Horn Antenna
HP 8566B Spectrum Analyzer
Preamplifiers

7.4 Test Result

Low Frequency: -9.4dB at 4163.07MHz
Middle Frequency: -13.5dB at 2805.37MHz
High Frequency: -6.0dB at 935.42MHz

The detailed test data was presented hereinafter as reference.

7.4.1 Final Test Data at Low Frequency, 30 - 5000MHz

| INDICATED | | TABLE | ANTENNA | | CORRECTION FACTOR | | | CORRECTED AMPLITUDE Corr. Ampl. dB μ V/m | FCC 95 | |
|------------------|-----------------------|-------|-----------------|-----------------|-------------------|-------------------------|-------------|--|-----------------------|--------------|
| Frequency MHz | Ampl. dB μ V/m | | Angle Degree | Height Meter | Polar H/V | Antenna dB μ V/m | Cable dB | | Limit dB μ V/m | Margin dB |
| 462.59 | 118.2 | 90 | 2.2 | H | 17.8 | 3.7 | 25.0 | 114.7 | | |
| 462.59 | 108.7 | 315 | 1.2 | V | 17.8 | 3.7 | 25.0 | 105.2 | | |
| 4163.07 | 63.7 | 225 | 1.0 | H | 31.4 | 4.7 | 30.0 | 69.7 | 79.1 | -9.4 |
| 2775.39 | 65.8 | 225 | 1.2 | H | 29.0 | 3.7 | 30.0 | 68.5 | 79.1 | -10.6 |
| 925.14 | 64.3 | 270 | 2.0 | H | 24.7 | 4.4 | 25.0 | 68.4 | 79.1 | -10.7 |
| 2775.39 | 64.0 | 225 | 1.2 | V | 29.0 | 3.7 | 30.0 | 66.7 | 79.1 | -12.4 |
| 2312.87 | 63.7 | 90 | 1.2 | V | 28.1 | 3.4 | 30.0 | 65.2 | 79.1 | -14.0 |
| 2312.87 | 63.3 | 270 | 1.0 | H | 28.1 | 3.4 | 30.0 | 64.8 | 79.1 | -14.3 |
| 4163.07 | 56.5 | 225 | 1.8 | V | 31.4 | 4.7 | 30.0 | 62.6 | 79.1 | -16.5 |
| 925.14 | 55.3 | 315 | 1.0 | V | 24.7 | 4.4 | 25.0 | 59.4 | 79.1 | -19.7 |
| 233.84 | 51.5 | 270 | 2.1 | H | 12.0 | 1.2 | 25.0 | 39.7 | 79.1 | -39.4 |
| 1850.32 | 38.2 | 270 | 1.0 | H | 25.3 | 2.6 | 30.0 | 36.1 | 79.1 | -43.0 |
| 1850.32 | 35.0 | 315 | 1.2 | V | 25.3 | 2.6 | 30.0 | 32.9 | 79.1 | -46.2 |
| 63.75 | 46.5 | 0 | 1.3 | V | 9.7 | 1.3 | 25.0 | 32.5 | 79.1 | -46.6 |
| 424.99 | 34.8 | 225 | 1.8 | H | 17.2 | 3.0 | 25.0 | 30.0 | 79.1 | -49.1 |
| 191.25 | 35.0 | 270 | 1.6 | V | 14.4 | 2.7 | 25.0 | 27.1 | 79.1 | -52.0 |

7.4.2 Test Data at Middle Frequency, 30 - 50000 MHz

| INDICATED | | TABLE | ANTENNA | | CORRECTION FACTOR | | | CORRECTED AMPLITUDE Corr. Ampl. dB μ V/m | FCC 95 | |
|------------------|-----------------------|-------|-----------------|-----------------|-------------------|-------------------------|-------------|--|-----------------------|--------------|
| Frequency MHz | Ampl. dB μ V/m | | Angle Degree | Height Meter | Polar H/V | Antenna dB μ V/m | Cable dB | | Limit dB μ V/m | Margin dB |
| 467.56 | 118.4 | 270 | 2.2 | H | 17.8 | 3.7 | 25.0 | 114.9 | | |
| 467.56 | 109.2 | 315 | 1.0 | V | 17.8 | 3.7 | 25.0 | 105.7 | | |
| 2805.37 | 64.5 | 90 | 1.2 | V | 29.0 | 3.7 | 30.0 | 67.2 | 80.7 | -13.5 |
| 935.11 | 63.00 | 315 | 1.50 | H | 24.6 | 3.7 | 25.0 | 66.3 | 80.7 | -14.4 |
| 2805.37 | 63.4 | 135 | 1.4 | H | 29.0 | 3.7 | 30.0 | 66.1 | 80.7 | -14.6 |
| 935.11 | 62.67 | 360 | 1.00 | V | 24.6 | 3.7 | 25.0 | 66.0 | 80.7 | -14.7 |
| 2337.80 | 62.8 | 315 | 1.2 | V | 28.1 | 3.4 | 30.0 | 64.3 | 80.7 | -16.4 |
| 4675.62 | 55.7 | 225 | 1.0 | V | 32.5 | 4.9 | 30.0 | 63.1 | 80.7 | -17.6 |
| 2337.80 | 61.1 | 225 | 1.0 | H | 28.1 | 3.4 | 30.0 | 62.6 | 80.7 | -18.2 |
| 4675.62 | 54.2 | 135 | 1.8 | H | 32.5 | 4.9 | 30.0 | 61.6 | 80.7 | -19.1 |
| 1870.24 | 37.5 | 225 | 1.2 | V | 25.3 | 2.6 | 30.0 | 35.4 | 80.7 | -45.3 |
| 1870.24 | 33.2 | 270 | 1.0 | H | 25.3 | 2.6 | 30.0 | 31.1 | 80.7 | -49.6 |
| 154.27 | 39.3 | 270 | 2.0 | V | 13.0 | 0.7 | 25.0 | 28.0 | 80.7 | -52.7 |
| 128.47 | 34.2 | 315 | 1.0 | V | 12.3 | 1.8 | 25.0 | 23.3 | 80.7 | -57.4 |

7.4.3 Test Data at High Frequency, 30 - 5000 MHz

| INDICATED | | TABLE | ANTENNA | | CORRECTION FACTOR | | | CORRECTED AMPLITUDE Corr. Ampl. dB μ V/m | FCC 95 | |
|------------------|-----------------------|-------|-----------------|-----------------|-------------------|-------------------------|-------------|--|-----------------------|--------------|
| Frequency MHz | Ampl. dB μ V/m | | Angle Degree | Height Meter | Polar H/V | Antenna dB μ V/m | Cable dB | | Limit dB μ V/m | Margin dB |
| 467.71 | 117.8 | 225 | 1.0 | H | 17.8 | 3.7 | 25.0 | 114.3 | | |
| 467.71 | 111.4 | 90 | 1.2 | V | 17.8 | 3.7 | 25.0 | 107.9 | | |
| 935.42 | 70.00 | 270 | 1.00 | H | 24.6 | 3.7 | 25.0 | 73.3 | 79.3 | -6.0 |
| 3273.98 | 59.0 | 180 | 1.0 | V | 30.3 | 4.0 | 30.0 | 63.3 | 79.3 | -16.0 |
| 3273.98 | 58.7 | 315 | 1.8 | H | 30.3 | 4.0 | 30.0 | 63.0 | 79.3 | -16.3 |
| 2806.26 | 68.0 | 315 | 1.0 | H | 29.0 | 3.7 | 30.0 | 70.7 | 79.3 | -8.6 |
| 2806.26 | 65.3 | 135 | 1.0 | V | 29.0 | 3.7 | 30.0 | 68.0 | 79.3 | -11.3 |
| 2338.55 | 66.2 | 225 | 1.0 | H | 28.1 | 3.4 | 30.0 | 67.6 | 79.3 | -11.7 |
| 2338.55 | 63.0 | 90 | 1.3 | V | 28.1 | 3.4 | 30.0 | 64.5 | 79.3 | -14.9 |
| 1870.84 | 38.2 | 135 | 1.2 | V | 25.3 | 2.6 | 30.0 | 36.1 | 79.3 | -43.2 |
| 1870.84 | 35.4 | 270 | 1.2 | H | 25.3 | 2.6 | 30.0 | 33.3 | 79.3 | -46.0 |
| 935.42 | 62.67 | 315 | 1.00 | V | 24.6 | 3.7 | 25.0 | 66.0 | 79.3 | -13.3 |
| 454.87 | 42.2 | 225 | 1.0 | H | 17.8 | 3.2 | 25.0 | 38.2 | 79.3 | -41.1 |
| 151.60 | 41.2 | 135 | 2.2 | V | 13.0 | 0.7 | 25.0 | 29.9 | 79.3 | -49.4 |
| 126.25 | 39.2 | 0 | 1.0 | V | 12.3 | 1.8 | 25.0 | 28.3 | 79.3 | -51.0 |

8 - SPURIOUS EMISSION

8.1 Standard Applicable

Per FCC §95.635 (1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (3), at least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (7), at least $43 \pm 10 \log_{10} (T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.




8.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Spurious attenuation limits in dB = $43 + 10\log_{10}(\text{power out in Watts})$

8.3 Test Result

Result: Pass

Please refer the hereinafter plots for more information.

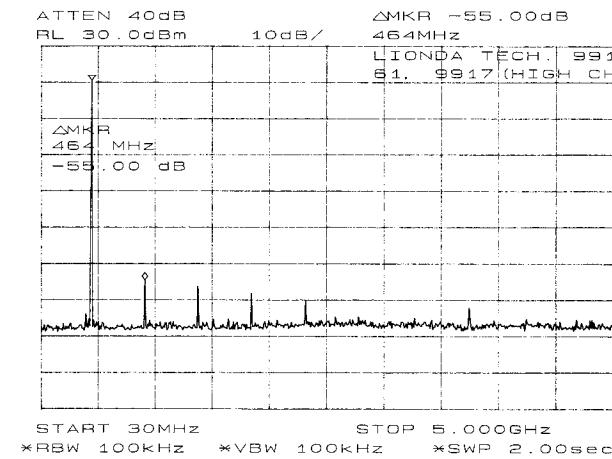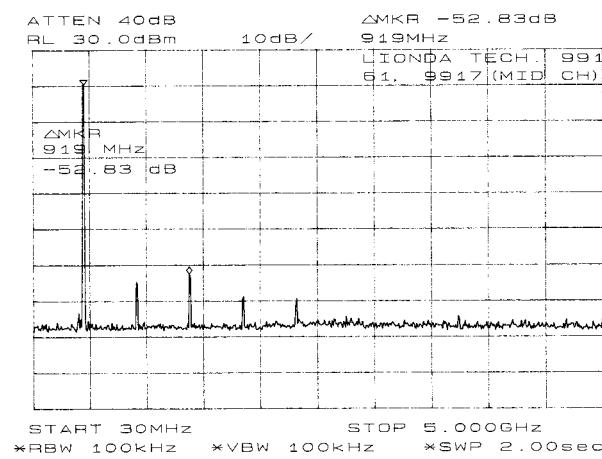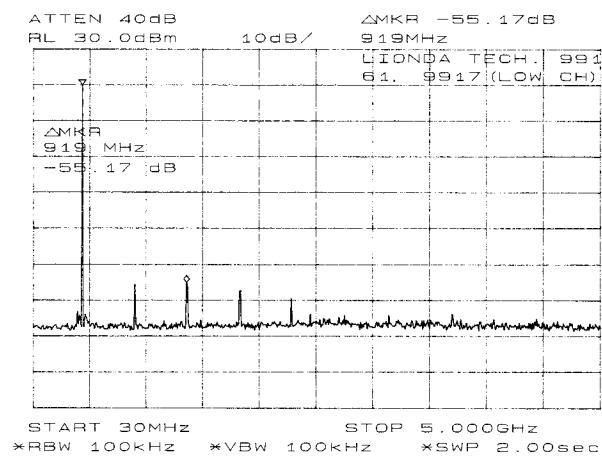

9 - AC Line Conducted Emissions

9.1 Applicable Requirements

According to ANSI C63.4 and FCC §15.107, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is connected back onto the AC power line on any frequency or frequencies within the band 450 kHz to 30 MHz shall not exceed 250 microvolts. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

9.2 Test Procedure

The EUT shall be connected to the DC power supply which shall be connected to the AC line through the first LISN. Both hot and neutral leads shall be tested.

9.3 Test Equipment

HP 8566B Spectrum Analyzer
LISN

9.4 Test Results

Not applicable because of battery operation.

10 - FREQUENCY STABILITY MEASUREMENT

10.1 Provision Applicable

According to FCC §2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$, and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.627, each FRS unit must be maintained within a frequency tolerance of 0.00025%.

10.2 Test Procedure

10.2.1 Frequency stability versus environmental temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feedthrough attenuators. The EUT was placed inside the temperature chamber.

After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

10.2.2 Frequency Stability versus Input Voltage

At room temperature ($25\pm5^{\circ}\text{C}$), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage.

10.3 Test Equipment

Temperature Chamber, -50°C to $+100^{\circ}\text{C}$
Hewlett Packard HP8566B Spectrum Analyzer
Hewlett Packard HP 7470A Plotter
Hewlett Packard HP 5383A Frequency Counter
Goldstar DC Power Supply, GR303

10.4 Test Results

| Reference Frequency: 462.56 MHz, Limit: 2.5ppm | | | |
|--|-------------------------|-------------------------------------|-----------|
| Environment Temperature (°C) | Power Supplied (Vdc) | Frequency Measure with Time Elapsed | |
| | | MCF (MHz) | PPM Error |
| 50 | New Batt. | 462.5610 | 2.1 |
| 40 | New Batt. | 462.5608 | 1.7 |
| 30 | New Batt. | 462.5600 | 0.0 |
| 20 | New Batt. | 462.5611 | 2.3 |
| 10 | New Batt. | 462.5590 | -2.1 |
| 0 | New Batt. | 462.5600 | 0.0 |
| -10 | New Batt. | 462.5593 | -1.5 |
| -20 | New Batt. | 462.5601 | 0.2 |