

FCC PART 15 Subpart C

EMI MEASUREMENT AND TEST REPORT

For

**SHENZHEN BAOAN**

**HANTONG ELECTRONICS FACTORY**

Block 11 & 12 Jinbi Industrial Area, Hwang Tian,  
Baoan, Shenzhen, China

**FCC ID: OK8IBM3850**

November 6, 2001

<b>This Report Concerns:</b> <input checked="" type="checkbox"/> Original Report	<b>Equipment Type:</b> Cordless Telephone– Household Appliances
<b>Test Engineer:</b> <u>Jeff Lee</u>	
<b>Test Date:</b> <u>October 15, 2001</u>	
 <b>Reviewed By:</b> _____	
John Y. Chan – Engineering Manager	
<b>Prepared By:</b> Bay Area Compliance Laboratory Corporation 230 Commercial Street, Suite 2 Sunnyvale, CA 94085 Tel (408) 732-9162 Fax (408) 732-9164	

**Note:** This report is only good for this company and model, it may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

**TABLE OF CONTENTS**

<b>1 – GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	3
1.2 OBJECTIVE .....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S) .....	3
1.4 TEST METHODOLOGY .....	3
1.5 TEST FACILITY .....	3
1.6 TEST EQUIPMENT LIST .....	4
1.7 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	4
1.8 EXTERNAL I/O CABLING LIST AND DETAILS .....	4
<b>2 – SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
2.1 DESCRIPTION OF TEST CONFIGURATION .....	5
2.2 EQUIPMENT MODIFICATIONS .....	5
2.3 CONFIGURATION OF TEST SYSTEM.....	6
2.4 TEST SETUP BLOCK DIAGRAM .....	6
<b>3 – TEST SUMMARY.....</b>	<b>7</b>
<b>4 – CONDUCTED EMISSIONS TEST DATA.....</b>	<b>8</b>
4.1 MEASUREMENT UNCERTAINTY .....	8
4.2 EUT SETUP.....	8
4.3 SPECTRUM ANALYZER SETUP .....	8
4.4 TEST PROCEDURE .....	9
4.5 SUMMARY OF TEST RESULTS .....	9
4.6 CONDUCTED EMISSIONS TEST DATA .....	9
4.7 PLOT OF CONDUCTED EMISSIONS TEST DATA .....	9
<b>5 – RADIATED EMISSION DATA.....</b>	<b>11</b>
5.1 MEASUREMENT UNCERTAINTY .....	11
5.2 EUT SETUP.....	11
5.3 SPECTRUM ANALYZER SETUP .....	11
5.4 TEST PROCEDURE .....	12
5.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	12
5.6 SUMMARY OF TEST RESULTS .....	12
5.7 RADIATED EMISSIONS TEST RESULT DATA .....	13
<b>6 – BAND EDGES TESTING.....</b>	<b>15</b>
6.1 TEST PROCEDURE .....	15
6.2 TEST EQUIPMENT .....	15
6.3 TEST RESULTS .....	15

## 1 – General Information

---

### 1.1 Product Description for Equipment Under Test (EUT)

The *SHENZHEN BAOAN HANTONG ELECTRONICS FACTORY*'s IBM-3850 or the "EUT" as referred to in this report is a 2.4 GHz 50-Channel cordless telephone. EUT was composed of two parts, one is a Handset which measures approximately 9.25" L x 2.25" W x 1.55"H, and the other is a Base which measures approximately 5.25" L x 5.25" W x 2.80"H.

For market purpose, the manufacturer applies multiple model names to the EUT: PMP-3850xx, TT-3855xx, BE-3850xx, where xx = color code. The above applicant affirms that no changes have been made that warrant retest or resubmission. The products are identical with reference to EMI emissions issues per the following:

- Different at brand name and cosmetics design.

### 1.2 Objective

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the 2.4 GHz cordless phone. The EMI measurements were performed according to the measurement procedure described in ANSI C63.6: 1992.

The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by FCC Title 47, Part 15, Subpart C, section 15.203, 15.205, 15.207, and 15.249.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittals

### 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 –1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### 1.5 Test Facility

The Open Area Test site used by Bay Area Compliance Laboratory Corporation to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Suite 2, Sunnyvale, California, USA.

Test site at Bay Area Compliance Laboratory Corporation has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratory Corporation is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (NVLAP). The scope of the accreditation covers the FCC Method - 47 CFR Part 15 - Digital Devices, IEC/CISPR 22: 1998, and AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment test methods under NVLAP Lab Code 200167-0.

### 1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8564E	08303	12/6/2001
HP	Spectrum Analyzer	8593B	2919A00242	12/20/2001
HP	Amplifier	8349B	2644A02662	12/20/2001
HP	Quasi-Peak Adapter	85650A	917059	12/6/2001
HP	Amplifier	8447E	1937A01046	12/6/2001
A.H. System	Horn Antenna	SAS0200/571	261	12/27/2001
Com-Power	Log Periodic Antenna	AL-100	16005	11/2/2002
Com-Power	Biconical Antenna	AB-100	14012	11/2/2002
Solar Electronics	LISN	8012-50-R-24-BNC	968447	12/28/2001
Com-Power	LISN	LI-200	12208	12/20/2001
Com-Power	LISN	LI-200	12005	12/20/2001
BACL	Data Entry Software	DES1	0001	12/20/2001

### 1.7 Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
TELTON CORP.	Simulator	TLS-3B-01	80071	DOC
PANASONIC	Telephone	KX-T3175	6IBTB142741	ACJMLA-75986-MT-E

### 1.8 External I/O Cabling List and Details

Cable Description	Length (M)	Port/From	To
Shielded RJ11 cable	2.0	RJ11 Port/Simulator	EUT
Shielded RJ11 cable	2.0	RJ11 Port/Simulator	Telephone

## **2 – System Test Configuration**

### **2.1 Description of Test Configuration**

The EUT was configured for testing in a typical fashion (as normally used by a typical user).

Handset being tested: The EUT 2.4 GHz cordless telephone – Handset, Model IBM-3850 was placed on the wooden table and tested in three orthogonal axis. The handset was connected to the headset via its headset port. The Low, middle, and high channels were tested. The handset was transmitting to and receiving from the Base unit. The EUT was investigated for emissions while off hook. The radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.5.


Base being tested: The EUT 2.4 GHz cordless telephone – Base, Model IBM-3850 was placed on the wooden table. The Low, middle, and high channels were tested. The base was connected to the line simulator and an AC adapter via its Tel Line and power ports, respectively. The base was transmitting and receiving from the 2.4 GHz cordless phone – Handset. The conducted as well as radiated data was taken in this mode of operation. All initial and final investigations were performed with the EMI receiver in manual mode scanning the frequency range continuously. The cables were bundled and routed as shown in the 2.4.

### **2.2 Equipment Modifications**

No modification(s) to the EUT were made to comply with the applicable limits.

## 2.3 Configuration of Test System


Base

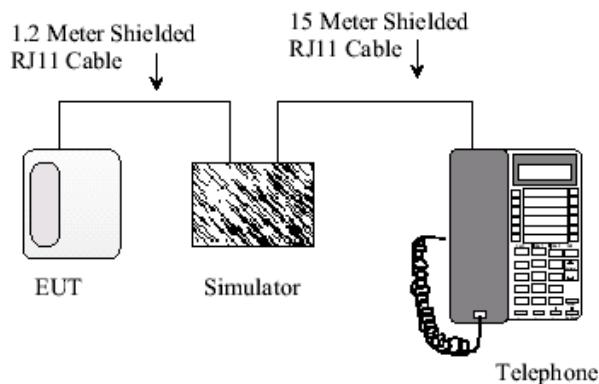

Handset



## 2.4 Test Setup Block Diagram

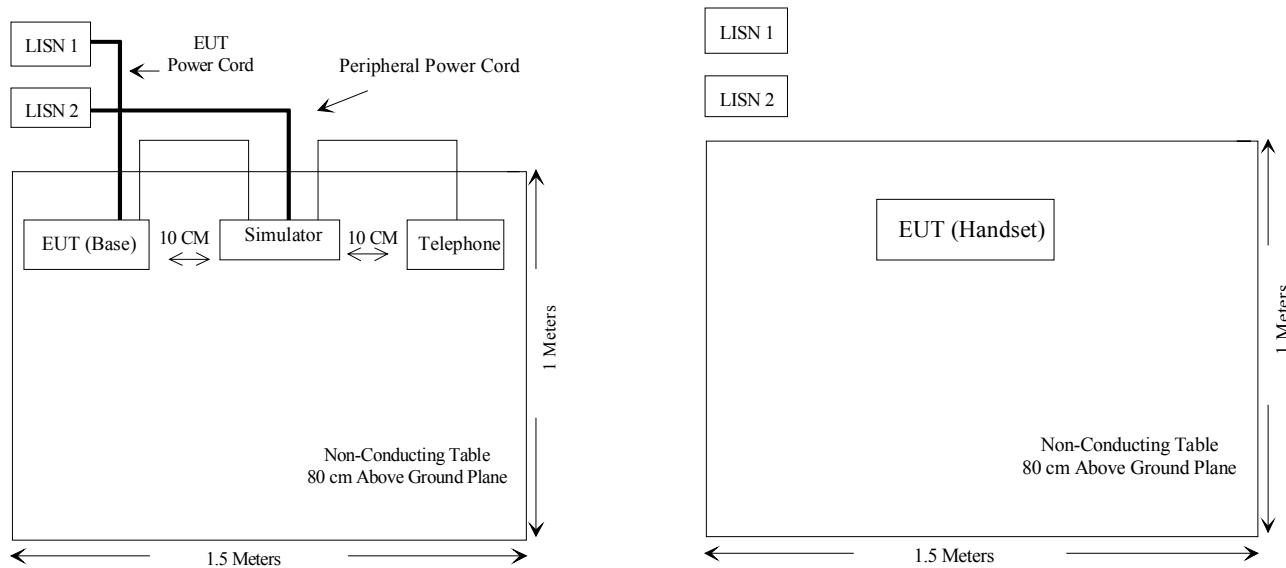

### 3 – Test Summary

FCC RULES	REQUIREMENTS	RESULTS
§15.249 (a)	The 2.4GHz filed strength of emissions from intentional radiators operated within these frequency bands shall comply with the flowing: Field strength of fundamental (millivolts/meter): 50 Field strength of harmonics (microvolts/meter): 50	Complied
§15.249 (b)	Filed strength limits are specified at a distance of 3 meters	Complied
§15.249 (c)	Emissions radiated outside of the specified frequency bands, except fro harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation	Complied
§15.209	The emissions from an intentional radiator shall not exceed the field strength levels specified hereinafter: 30-88MHz: 100 (microvolts/meter) 3 meter 88-216MHz: 150 (microvolts/meter) 3 meter 216-960MHz: 200 (microvolts/meter) 3 meter above 960MHz: 500 (microvolts/meter) 3 meter	Complied
§15.249 (d)	As shown in §15.35(b), for frequencies above 1000 MHz, the above filed strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.	Complied
§15.35	On any frequency of frequencies above 1000MHz,, the radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurements are specified in the regulations, including emission measurements below 1000MHz, there is also a limits on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maxim permitted average limits for the frequency being investigated unless a different peak emission limits is otherwise specified. Unless otherwise specified, measurements above 1000MHz shall be performed using a minimum resolution bandwidth of 1MHz. Measurements of AC power line conducted emissions are performed using a CISPR quasi-peak detector, even for devices for which average radiated emission measurements are specified.	Complied
§15.203	Fixed and Permanent Antenna	Complied

## 4 – Conducted Emissions Test Data

### 4.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is  $\pm 2.4$  dB.

### 4.2 EUT Setup

The measurement was performed at the **Open Area Test Site**, using the same setup per ANSI C63.4 - 1992 measurement procedure. Specification used was with the FCC Class B limits.

The Base of EUT was connected to a 110 VAC / 60 Hz power source and it was placed center and the back edge of the test table. The simulator was placed on one side of the EUT base, and the telephone was placed on the other side the EUT base. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

External Input / Output cables were draped over edge of the test table and bundle when necessary.

### 4.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conducted emission test:

Start Frequency.....	450 kHz
Stop Frequency.....	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	100 kHz
Video Bandwidth.....	100 kHz
Quasi-Peak Adapter Bandwidth .....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

#### 4.4 Test Procedure

During the conducted emission test, the EUT power cord was connected to the auxiliary outlet of the first LISN with all support equipment power cords connected to the second.

The EUT was tested with the *BELL PHONES* (U090030D) power adapter to represent worst case results for the final qualification test. Therefore, these results were used for final test data recorded in the table listed under section 3.6 of this report.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance using all installation combination. All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB of specification limit). Quasi-peak readings are distinguished with a "Qp".

#### 4.5 Summary of Test Results

According to the data in section 3.6, the EUT complied with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:


**-10.7 dB $\mu$ V at 0.840 MHz** in the **Neutral** mode for the ***BELL PHONES***, Model U090030D power adapter.

#### 4.6 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC CLASS B	
Frequency MHz	Amplitude dB $\mu$ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB $\mu$ V	Margin dB
0.840	37.3	QP	Neutral	48	-10.7
1.190	35.7	QP	Line	48	-12.3
1.190	32.0	QP	Neutral	48	-16.0
28.000	28.6	QP	Neutral	48	-19.4
1.530	25.5	QP	Line	48	-22.5
24.980	25.0	QP	Line	48	-23.0

#### 4.7 Plot of Conducted Emissions Test Data

Plot of Conducted Emissions test data for the *BELL PHONES Power Adapter*, model U090030D is presented hereinafter as reference.

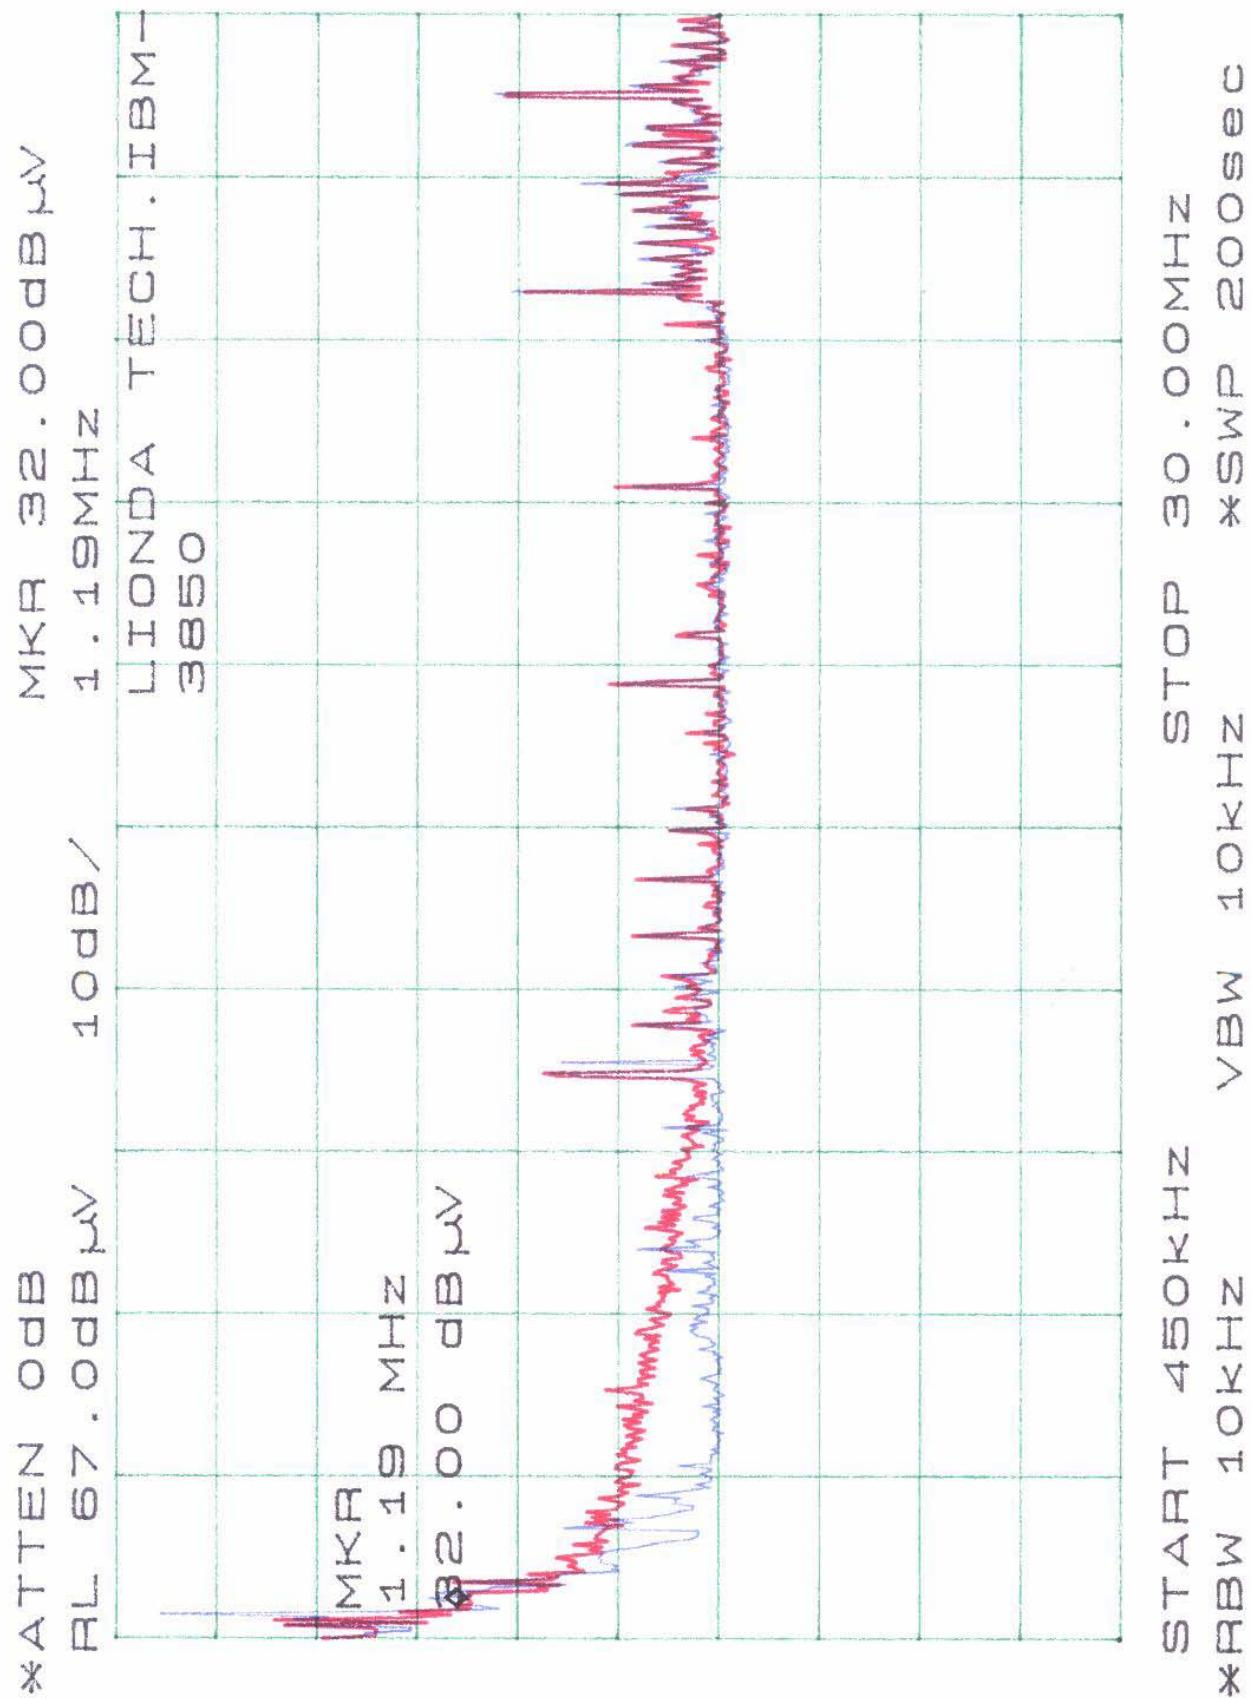

## 5 – Radiated Emission Data

### 5.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is  $\pm 4.0$  dB.

### 5.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4 - 1992. The specification used was the FCC 15 Subpart C limits.

The Base of EUT was connected to a 110 VAC / 60 Hz power source and it was placed center and the back edge of the test table. The simulator was placed on one side of the EUT base, and the telephone was placed on the other side the EUT base. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.

The spacing between the peripherals was 10 centimeters.

The external Input / Output cables were draped over edge of the test table and bundle when necessary.

### 5.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR 15.33 (a) (1), the system was tested to 24000 MHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Start Frequency .....	30 MHz
Stop Frequency .....	24000 MHz
Sweep Speed .....	Auto
IF Bandwidth .....	1 MHz
Video Bandwidth .....	1 MHz
Quasi-Peak Adapter Bandwidth .....	120 kHz
Quasi-Peak Adapter Mode .....	Normal
Resolution Bandwidth .....	1MHz

## 5.4 Test Procedure

For the radiated emissions test, both the EUT and all support equipment power cords were connected to the AC floor outlet since the power supply (U090030D) used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "Qp" in the data table.

## 5.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB $\mu$ V means the emission is 7dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

## 5.6 Summary of Test Results

According to the data in section 4.7, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207, and 15.249 after tested to 10<sup>th</sup> harmonics as required by FCC and had the worst margin of:

*For Base:*

**-1.2 dB $\mu$ V at 2400.97 MHz in the Vertical polarization at Low Channel, 30 ~ 24000 MHz, 3 meters**

**-1.8 dB $\mu$ V at 2402.92 MHz in the Vertical polarization at Middle Channel, 30 ~ 24000 MHz, 3 meters**

**-2.8 dB $\mu$ V at 71.74 MHz in the Vertical polarization at High Channel, 30 ~ 24000 MHz, 3 meters**

*For Handset:*

**-6.6 dB $\mu$ V at 4946.68 MHz in the Horizontal polarization at Low Channel, 30 ~ 24000 MHz, 3 meters**

**-6.4 dB $\mu$ V at 2473.48 MHz in the Horizontal polarization at Middle Channel, 30 ~ 24000 MHz, 3 meters**

**-6.3 dB $\mu$ V at 4948.90 MHz in the Vertical polarization at High Channel, 30 ~ 24000 MHz, 3 meters**

## 5.7 Radiated Emissions Test Result Data

### 5.7.1 Final Test Data, Base Unit, Low Channel, 30 MHz to 24000 MHz, 3 meters

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB $\mu$ V/m		Angle Degree	Height Meter	Polar H/V	Antenna dB $\mu$ V/m	Cable dB	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m
2400.97	91.3	360	1.4	V	28.1	3.4	30.0	92.8	94.0	-1.2
2400.97	88.7	225	1.5	H	28.1	3.4	30.0	90.1	94.0	-3.9
4801.94	39.4	150	1.5	H	32.5	4.9	30.0	46.8	54.0	-7.2
687.21	37.8	270	2.2	H	22.2	3.2	25.0	38.2	46.0	-7.8
4801.94	38.7	180	1.1	V	32.5	4.9	30.0	46.1	54.0	-7.9
143.05	45.2	180	1.6	V	13.2	1.0	25.0	34.4	43.5	-9.1
171.65	41.5	180	2.2	V	13.3	1.4	25.0	31.2	43.5	-12.3
336.58	32.3	180	1.6	H	15.0	2.6	25.0	24.9	46.0	-21.1

### 5.7.2 Final Test Data, Base Unit, Middle Channel, 30MHz to 24000 MHz, 3 meters

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB $\mu$ V/m		Angle Degree	Height Meter	Polar H/V	Antenna dB $\mu$ V/m	Cable dB	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m
2402.92	90.7	225	1.0	V	28.1	3.4	30.0	92.2	94.0	-1.8
71.74	51.0	90	1.0	V	9.6	1.6	25.0	37.2	40.0	-2.8
2402.92	89.0	225	1.0	H	28.1	3.4	30.0	90.5	94.0	-3.6
4805.84	39.0	90	1.6	H	32.5	4.9	30.0	46.4	54.0	-7.6
143.05	46.5	180	2.0	V	13.2	1.0	25.0	35.7	43.5	-7.8
4805.84	38.4	125	1.3	V	32.5	4.9	30.0	45.8	54.0	-8.2
611.92	37.3	315	1.6	H	20.0	3.3	25.0	35.6	46.0	-10.4
336.54	32.7	315	1.5	H	15.0	2.6	25.0	25.3	46.0	-20.7

### 5.7.3 Final Test Data, Base Unit, High Channel, 30MHz to 24000 MHz, 3 meters.

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency MHz	Ampl. dB $\mu$ V/m		Angle Degree	Height Meter	Polar H/V	Antenna dB $\mu$ V/m	Cable dB	Amp. dB	Corr. Ampl. dB $\mu$ V/m	Limit dB $\mu$ V/m
71.74	51.0	45	1.0	V	9.6	1.6	25.0	37.2	40.0	-2.8
211.25	47.2	90	1.0	V	12.5	4.7	25.0	39.4	43.5	-4.1
2405.43	87.7	315	1.6	V	28.1	3.4	30.0	89.1	94.0	-4.9
2405.43	86.2	270	1.0	H	28.1	3.4	30.0	87.6	94.0	-6.4
4810.86	40.0	160	1.5	H	32.5	4.9	30.0	47.4	54.0	-6.6
4810.86	38.7	180	1.2	V	32.5	4.9	30.0	46.1	54.0	-7.9
114.43	48.3	135	1.5	V	11.7	1.3	25.0	36.3	43.5	-7.2
189.77	37.8	90	1.8	V	13.8	3.9	25.0	30.5	43.5	-13.0

**5.7.4 Final Test Data, Handset Unit, Low Channel, 30 MHz ~ 24000 MHz, 3 meters**

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency	Ampl.		Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit
MHz	dB $\mu$ V/m	Degree	Meter	H/V	dB $\mu$ V/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB
4946.68	40.0	125	1.5	H	32.5	4.9	30.0	47.4	54.0	-6.6
4946.68	39.4	150	1.4	V	32.5	4.9	30.0	46.8	54.0	-7.2
178.17	43.3	90	2.0	V	13.4	3.9	25.0	35.6	43.5	-7.9
211.26	43.2	225	1.0	H	12.5	4.7	25.0	35.4	43.5	-8.1
143.05	45.3	225	1.5	V	13.2	1.0	25.0	34.5	43.5	-9.0
2473.34	81.7	90	1.0	V	28.1	3.4	30.0	83.1	94.0	-10.9
2473.34	80.8	90	2.2	H	28.1	3.4	30.0	82.3	94.0	-11.7
449.44	34.0	135	1.6	H	17.4	2.7	25.0	29.1	46.0	-16.9

**5.7.5 Final Test Data, Handset Unit, Middle Channel, 30 MHz ~ 24000 MHz, 3 meters**

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency	Ampl.		Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit
MHz	dB $\mu$ V/m	Degree	Meter	H/V	dB $\mu$ V/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB
2473.48	86.2	180	1.5	H	28.1	3.4	30.0	87.6	94.0	-6.4
4946.96	39.7	150	1.6	H	32.5	4.9	30.0	47.1	54.0	-6.9
4946.96	39.6	150	1.2	V	32.5	4.9	30.0	47.0	54.0	-7.0
519.23	41.0	225	1.8	H	19.3	3.5	25.0	38.8	46.0	-7.2
178.17	43.5	360	2.2	V	13.4	3.9	25.0	35.8	43.5	-7.7
2473.48	84.3	270	1.2	V	28.1	3.4	30.0	85.8	94.0	-8.2
186.15	40.3	45	1.3	V	13.8	3.9	25.0	33.0	43.5	-10.5
150.35	39.8	315	2.1	V	13.0	0.7	25.0	28.5	43.5	-15.0

**5.7.6 Final Test Data, Handset Unit, High Channel, 30 MHz ~ 24000 MHz, 3 meters**

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 Subpart C	
Frequency	Ampl.		Angle	Height	Polar	Antenna	Cable	Amp.	Corr. Ampl.	Limit
MHz	dB $\mu$ V/m	Degree	Meter	H/V	dB $\mu$ V/m	dB	dB	dB $\mu$ V/m	dB $\mu$ V/m	dB
4948.90	40.3	150	1.2	V	32.5	4.9	30.0	47.7	54.0	-6.3
4948.90	39.8	160	1.4	H	32.5	4.9	30.0	47.2	54.0	-6.8
519.23	40.3	135	1.8	H	19.3	3.5	25.0	38.1	46.0	-7.9
149.98	44.2	360	1.0	V	13.4	1.6	25.0	34.2	43.5	-9.3
143.04	44.5	45	2.0	V	13.2	1.0	25.0	33.7	43.5	-9.8
2474.45	81.0	90	1.9	V	28.1	3.4	30.0	82.5	94.0	-11.6
2474.45	79.3	135	1.2	H	28.1	3.4	30.0	80.8	94.0	-13.2
171.68	36.8	45	1.8	V	13.3	1.4	25.0	26.5	43.5	-17.0

## **6 – Band Edges Testing**

Requirements: FCC 15.249 (c), the emission power at the START and STOP frequencies shall be at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC 15.209, whichever is the lesser attenuation.

### **6.1 Test Procedure**

The antenna was removed and a low loss RF cable was connected to the transmitter output. The other end of cable was connected to a spectrum analyzer with the START and STOP frequencies set to the operation band. Transmitter output was read off the spectrum analyzer in dBm. The power output at the transmitter was determined by adding the value of the attenuator to the spectrum analyzer reading.

The test was performed for handset and the base respectively.

### **6.2 Test Equipment**

HP 8566B Spectrum Analyzer  
HP 7470A Plotter

### **6.3 Test Results**

Please refer to the attached plots.

